




Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 64 / 208
Rev.: 01

Project No :TM-2411000185P
Operation Band :802.11a/Band1
Frequency :5190 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :38

Test Date :2024-12-20
Temp./Humi. :24.5/57
Antenna Pol. :HORIZONTAL
Engineer :Ray Li
Test Chamber : 966A

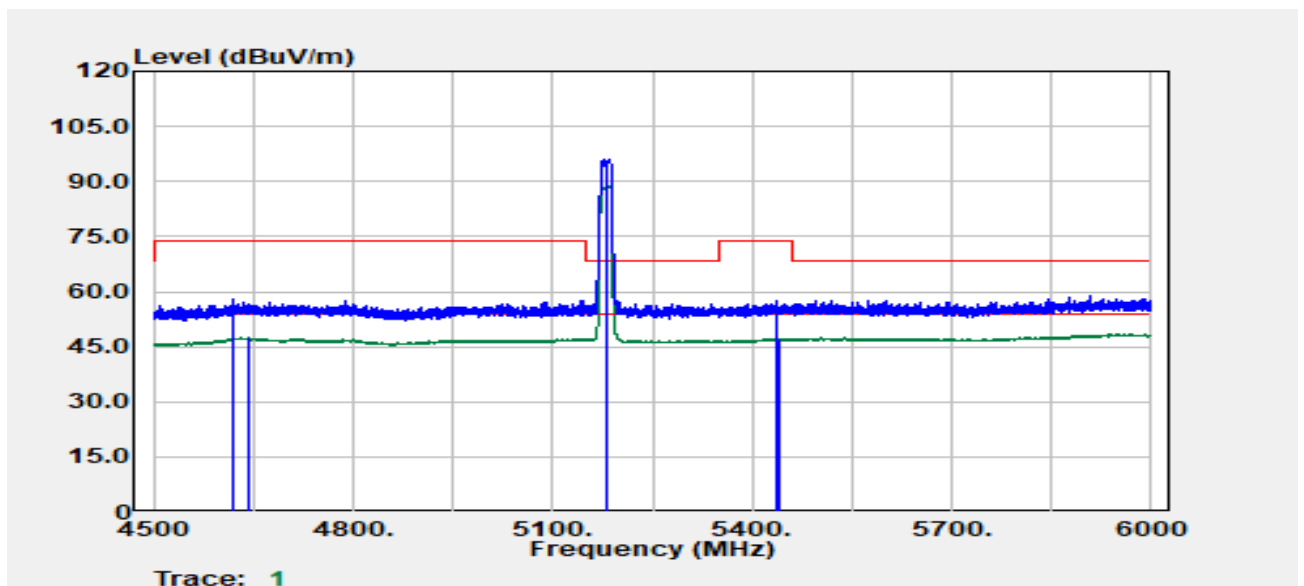


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
4619.19	Peak	42.68	15.14	57.82	74.00	-16.18
4642.68	Average	32.34	15.08	47.42	54.00	-6.58
5180.00	Peak	79.96	16.09	96.05	-	-
5180.00	Average	72.81	16.09	88.90	-	-
5437.53	Peak	40.84	16.47	57.32	74.00	-16.68
5441.28	Average	30.71	16.49	47.20	54.00	-6.80



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 65 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-20
Operation Band	:802.11n20/Band1	Temp./Humi.	:24.5/57
Frequency	:5180 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:Bandedge	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:39		

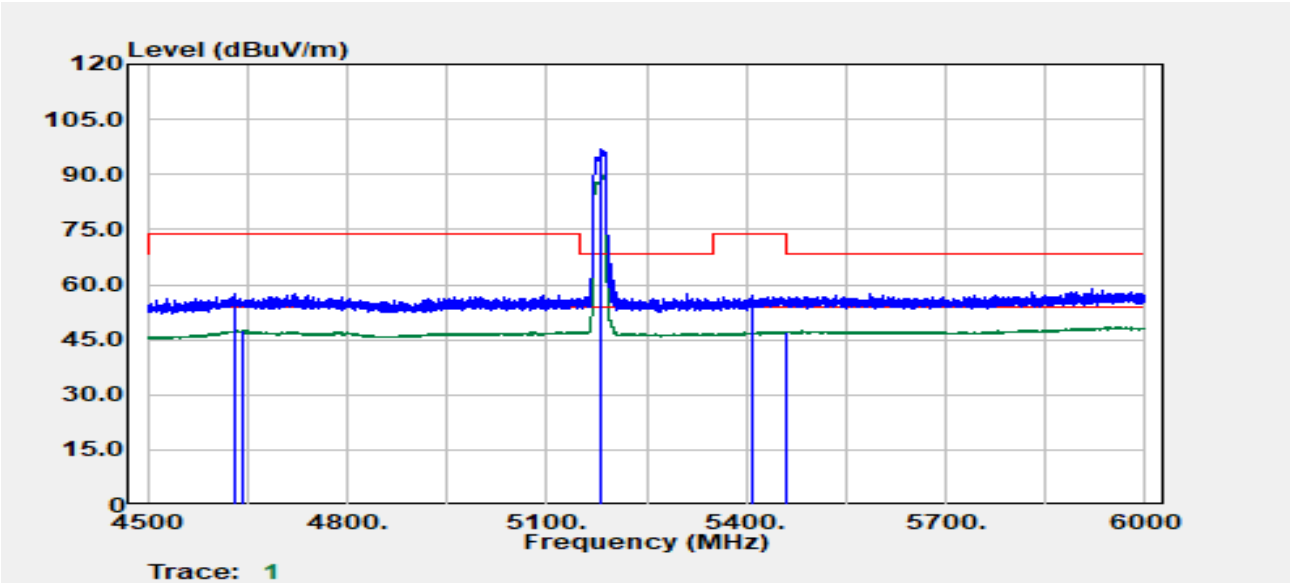

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
4631.19	Peak	42.53	15.11	57.64	74.00	-16.36
4643.93	Average	32.44	15.08	47.52	54.00	-6.48
5180.00	Peak	80.73	16.09	96.82	- -	- -
5180.00	Average	73.56	16.09	89.65	- -	- -
5408.55	Peak	40.70	16.30	57.00	74.00	-17.00
5460.02	Average	30.60	16.54	47.14	54.00	-6.86




Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 66 / 208
Rev.: 01

Project No :TM-2411000185P
Operation Band :802.11n20/Band1
Frequency :5180 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :39

Test Date :2024-12-20
Temp./Humi. :24.5/57
Antenna Pol. :HORIZONTAL
Engineer :Ray Li
Test Chamber : 966A

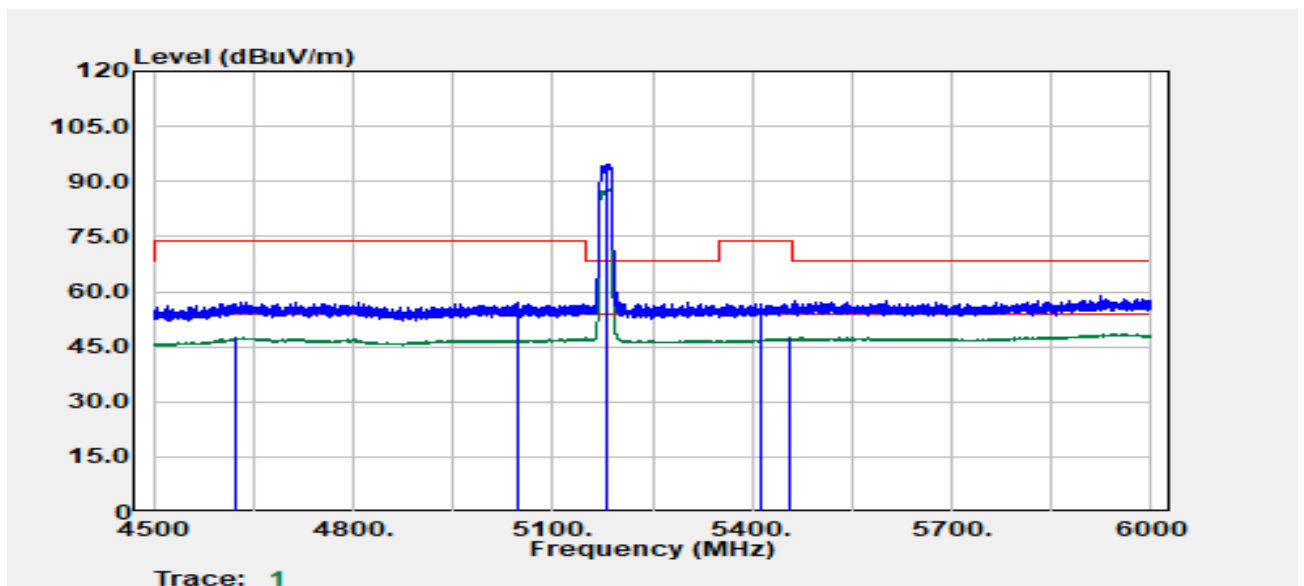


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
4623.69	Average	32.25	15.13	47.38	54.00	-6.62
5047.98	Peak	41.77	15.46	57.23	74.00	-16.77
5180.00	Peak	78.63	16.09	94.72	-	-
5180.00	Average	71.70	16.09	87.79	-	-
5413.79	Peak	40.31	16.33	56.64	74.00	-17.36
5455.52	Average	30.84	16.54	47.39	54.00	-6.61



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 67 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-20
Operation Band	:802.11n40/Band1	Temp./Humi.	:24.5/57
Frequency	:5190 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:Bandedge	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:39		

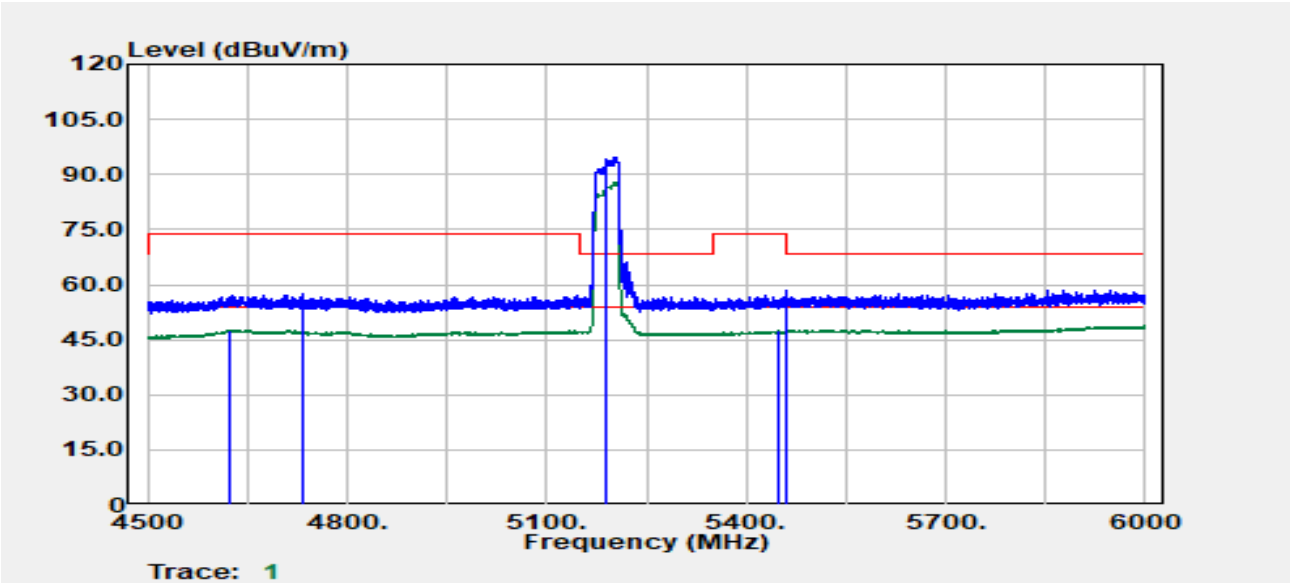


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
4624.94	Average	32.56	15.13	47.69	54.00	-6.31
4732.63	Peak	42.42	15.16	57.58	74.00	-16.42
5190.00	Peak	78.68	16.07	94.76	- -	- -
5190.00	Average	71.81	16.07	87.88	- -	- -
5449.53	Average	30.96	16.54	47.50	54.00	-6.50
5458.27	Peak	41.76	16.54	58.30	74.00	-15.70



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 68 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-20
Operation Band	:802.11n40/Band1	Temp./Humi.	:24.5/57
Frequency	:5190 MHz	Antenna Pol.	:HORIZONTAL
Operation Mode	:Bandedge	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:39		

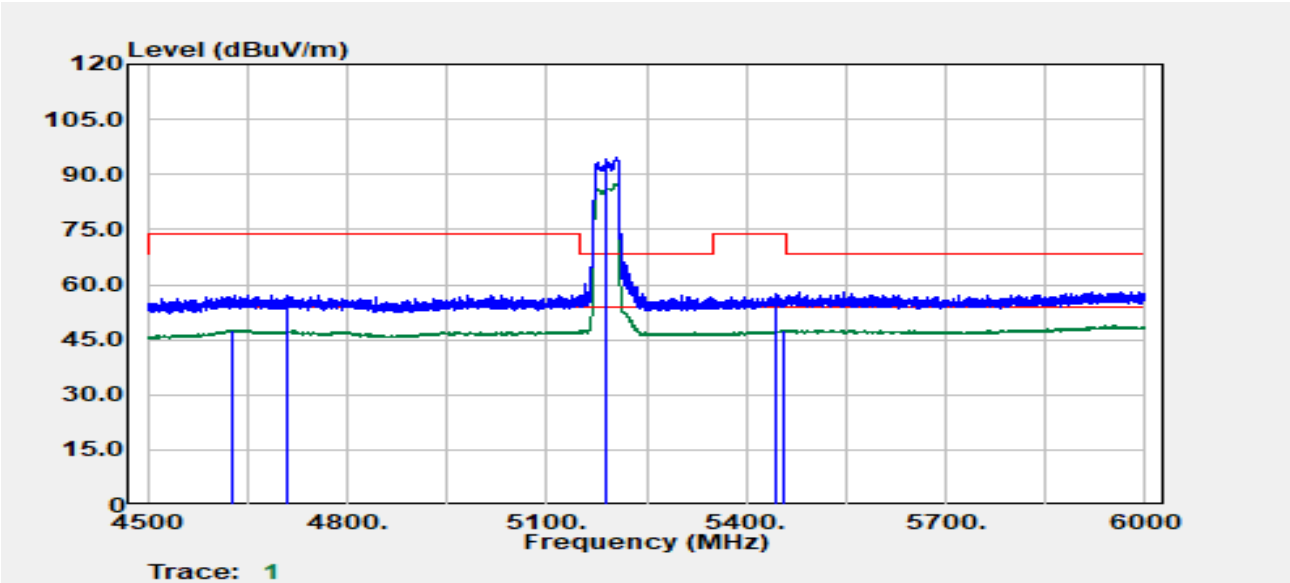


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
4627.69	Average	32.60	15.12	47.72	54.00	-6.28
4711.64	Peak	42.22	15.06	57.28	74.00	-16.72
5190.00	Peak	78.35	16.07	94.43	- -	- -
5190.00	Average	71.53	16.07	87.61	- -	- -
5443.78	Peak	41.10	16.51	57.61	74.00	-16.39
5456.27	Average	31.04	16.54	47.58	54.00	-6.42



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 69 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-20
Operation Band	:802.11ac80/Band1	Temp./Humi.	:24.5/57
Frequency	:5210 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:Bandedge	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:38		

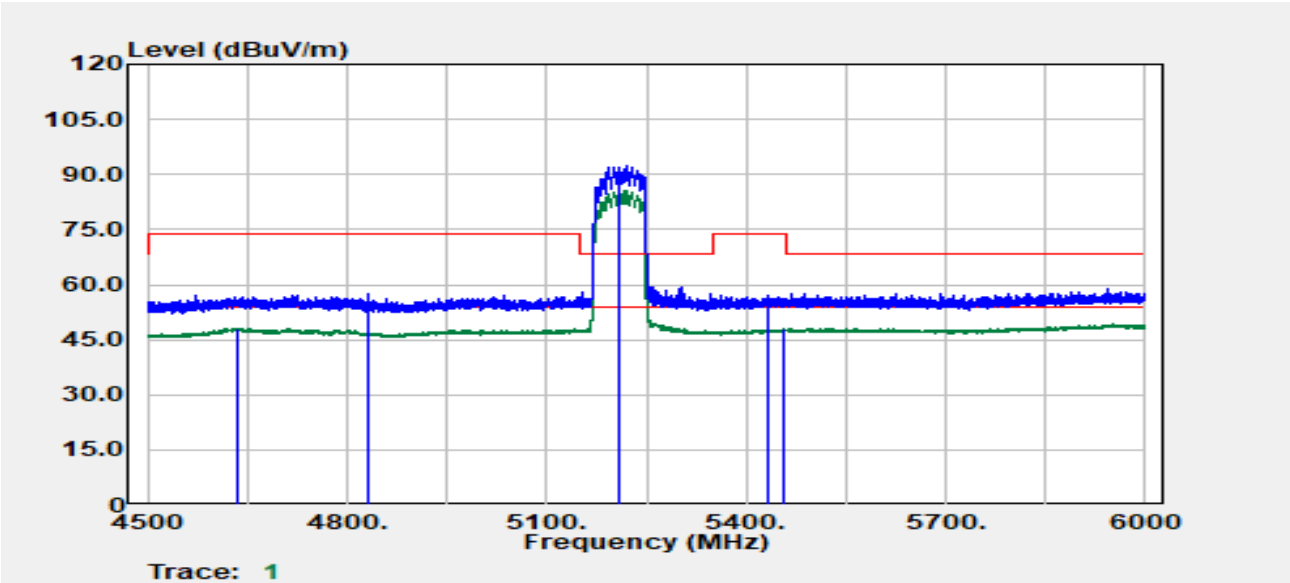

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
4633.43	Average	33.02	15.11	48.13	54.00	-5.87
4829.59	Peak	42.13	15.27	57.40	74.00	-16.60
5210.00	Peak	76.24	16.10	92.34	- -	- -
5210.00	Average	69.89	16.10	85.99	- -	- -
5431.78	Peak	40.58	16.44	57.02	74.00	-16.98
5455.52	Average	31.34	16.54	47.88	54.00	-6.12




Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 70 / 208
Rev.: 01

Project No :TM-2411000185P
Operation Band :802.11ac80/Band1
Frequency :5210 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :38

Test Date :2024-12-20
Temp./Humi. :24.5/57
Antenna Pol. :HORIZONTAL
Engineer :Ray Li
Test Chamber : 966A

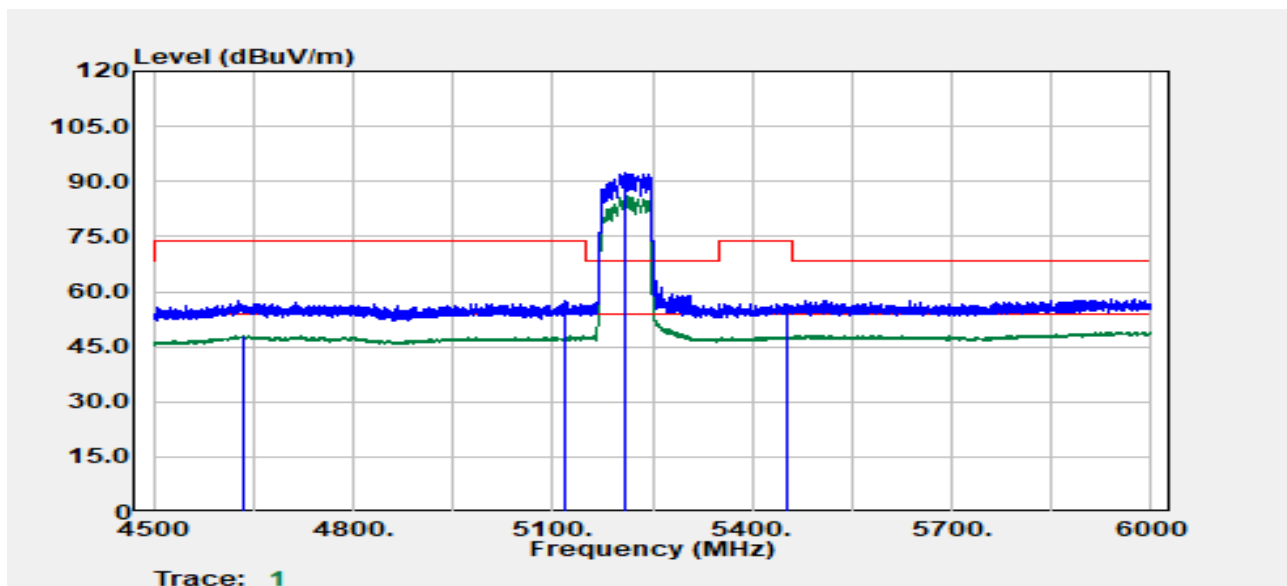


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
4635.43	Average	32.80	15.10	47.90	54.00	-6.10
5117.19	Peak	41.66	15.76	57.42	74.00	-16.58
5210.00	Peak	76.38	16.10	92.48	- -	- -
5210.00	Average	71.24	16.10	87.33	- -	- -
5452.02	Average	31.25	16.54	47.80	54.00	-6.20
5452.52	Peak	40.24	16.54	56.78	74.00	-17.22



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 71 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-20
Operation Band	:802.11a/Band2	Temp./Humi.	:24.5/57
Frequency	:5320 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:Bandedge	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:35		

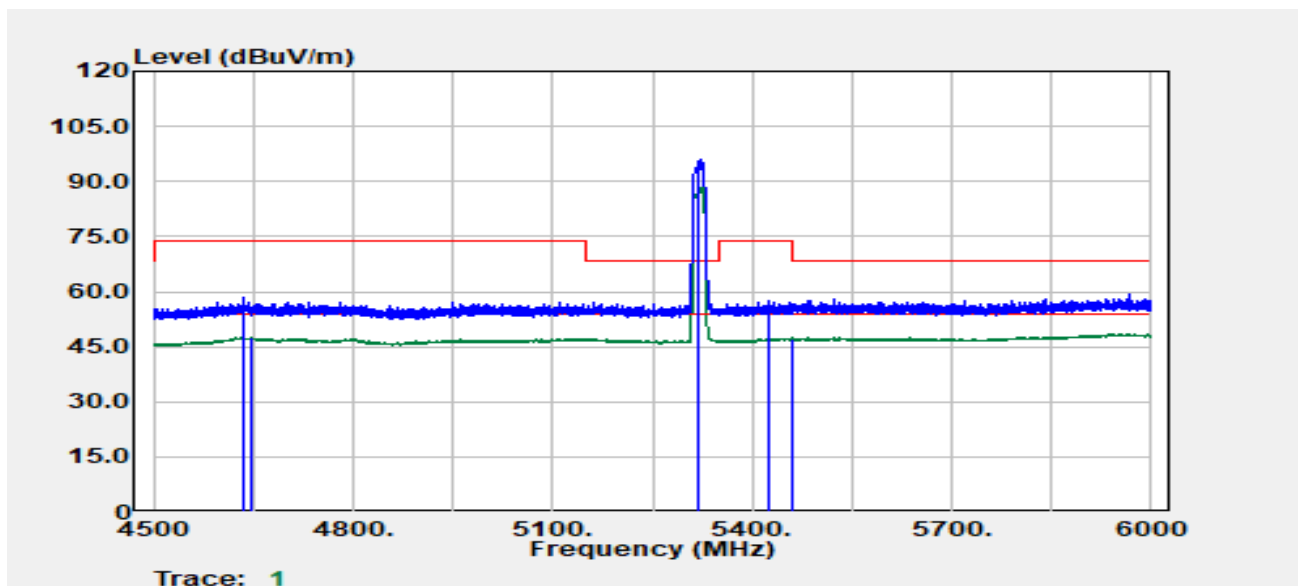


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
4635.43	Peak	43.13	15.10	58.23	74.00	-15.77
4646.18	Average	32.48	15.07	47.56	54.00	-6.44
5320.00	Peak	79.85	16.36	96.21	-	-
5320.00	Average	71.82	16.36	88.18	-	-
5423.04	Peak	41.20	16.39	57.59	74.00	-16.41
5459.02	Average	30.69	16.54	47.23	54.00	-6.77



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 72 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-20
Operation Band	:802.11a/Band2	Temp./Humi.	:24.5/57
Frequency	:5320 MHz	Antenna Pol.	:HORIZONTAL
Operation Mode	:Bandedge	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:35		

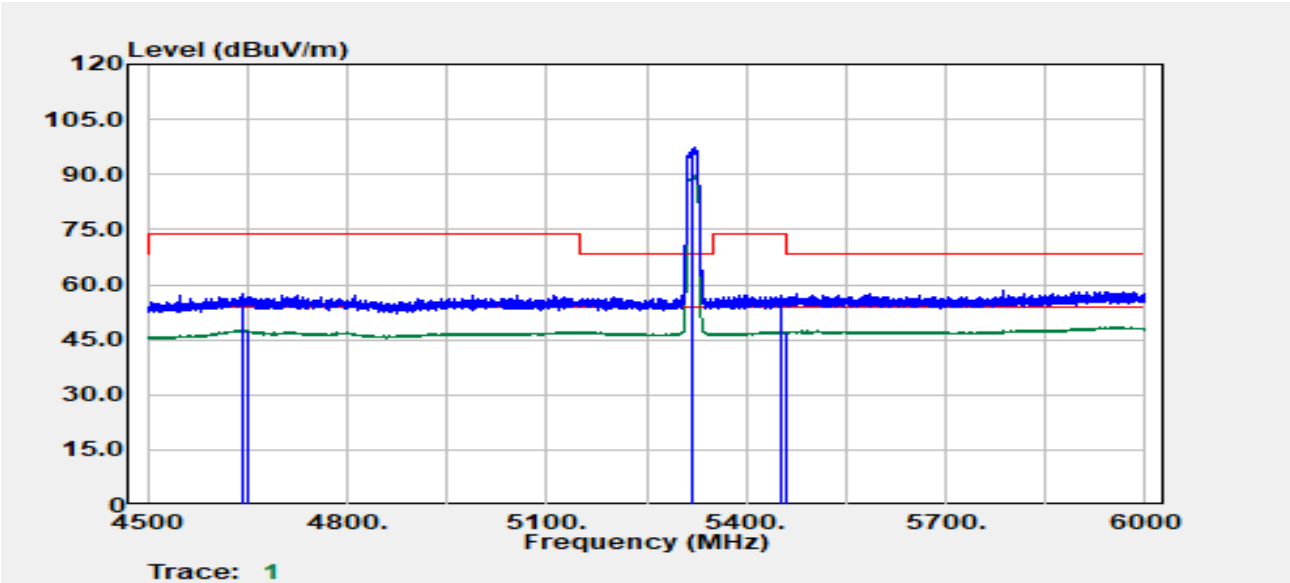


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
4641.18	Peak	42.30	15.09	57.38	74.00	-16.62
4650.18	Average	32.46	15.06	47.52	54.00	-6.48
5320.00	Peak	80.91	16.36	97.27	-	-
5320.00	Average	73.19	16.36	89.55	-	-
5453.52	Peak	40.53	16.54	57.08	74.00	-16.92
5459.27	Average	30.75	16.54	47.29	54.00	-6.71



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 73 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-20
Operation Band	:802.11n20/Band2	Temp./Humi.	:24.5/57
Frequency	:5320 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:Bandedge	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:36		

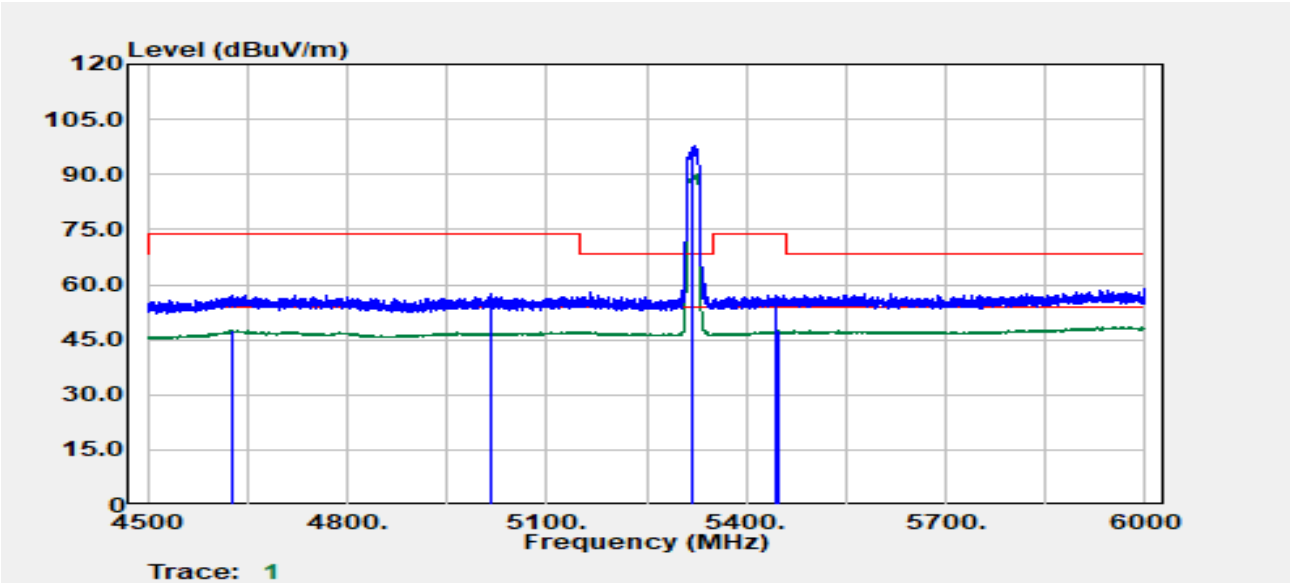

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
4628.44	Average	32.30	15.12	47.42	54.00	-6.58
5017.24	Peak	41.89	15.54	57.43	74.00	-16.57
5320.00	Peak	81.41	16.36	97.77	- -	- -
5320.00	Average	73.75	16.36	90.11	- -	- -
5444.03	Peak	40.56	16.51	57.07	74.00	-16.93
5450.03	Average	30.81	16.54	47.35	54.00	-6.65




Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 74 / 208
Rev.: 01

Project No :TM-2411000185P
Operation Band :802.11n20/Band2
Frequency :5320 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :36

Test Date :2024-12-20
Temp./Humi. :24.5/57
Antenna Pol. :HORIZONTAL
Engineer :Ray Li
Test Chamber : 966A

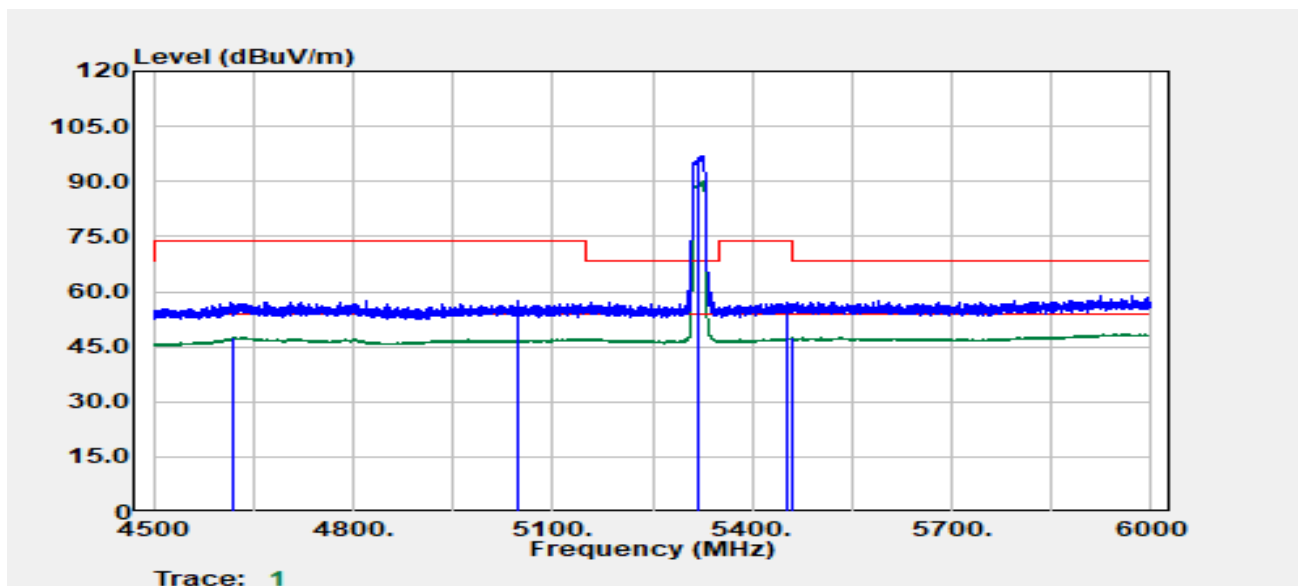


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
4617.69	Average	32.22	15.15	47.37	54.00	-6.63
5048.73	Peak	42.24	15.46	57.70	74.00	-16.30
5320.00	Peak	80.65	16.36	97.01	--	--
5320.00	Average	73.66	16.36	90.02	--	--
5450.77	Peak	40.36	16.54	56.90	74.00	-17.10
5458.52	Average	30.96	16.54	47.50	54.00	-6.50



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 75 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-20
Operation Band	:802.11n40/Band2	Temp./Humi.	:24.5/57
Frequency	:5310 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:Bandedge	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:36		

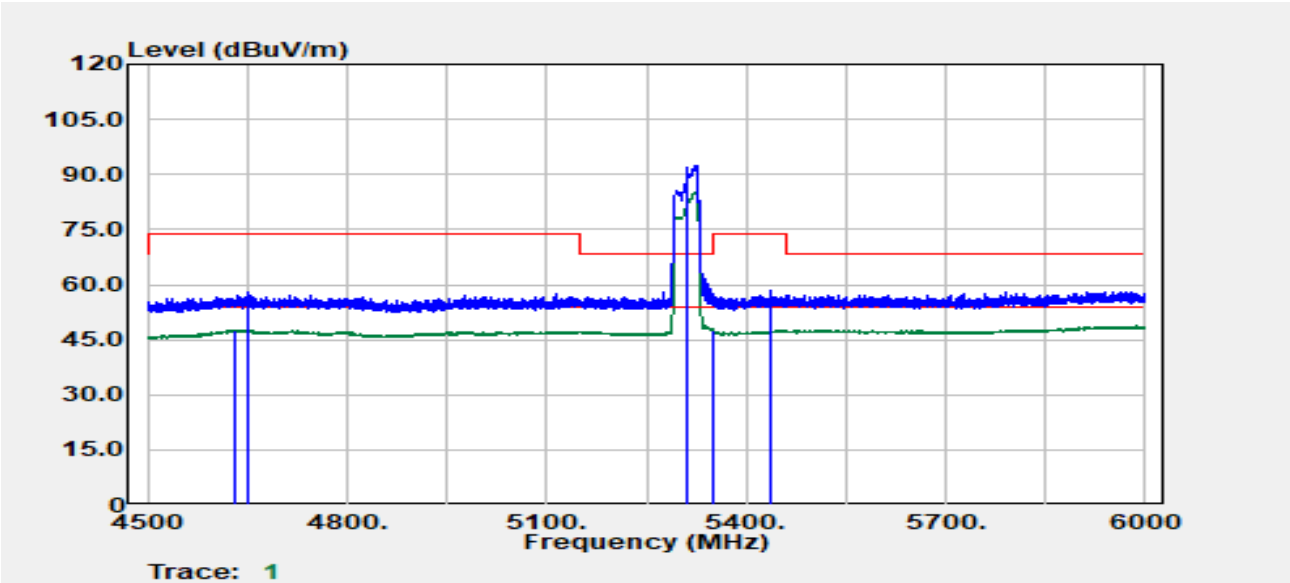


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
4629.19	Average	32.49	15.12	47.61	54.00	-6.39
4650.43	Peak	42.88	15.06	57.95	74.00	-16.05
5310.00	Peak	75.93	16.37	92.30	- -	- -
5310.00	Average	68.99	16.37	85.36	- -	- -
5350.58	Average	31.13	16.33	47.46	54.00	-6.54
5436.28	Peak	41.83	16.46	58.30	74.00	-15.70



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 76 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-20
Operation Band	:802.11n40/Band2	Temp./Humi.	:24.5/57
Frequency	:5310 MHz	Antenna Pol.	:HORIZONTAL
Operation Mode	:Bandedge	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:36		

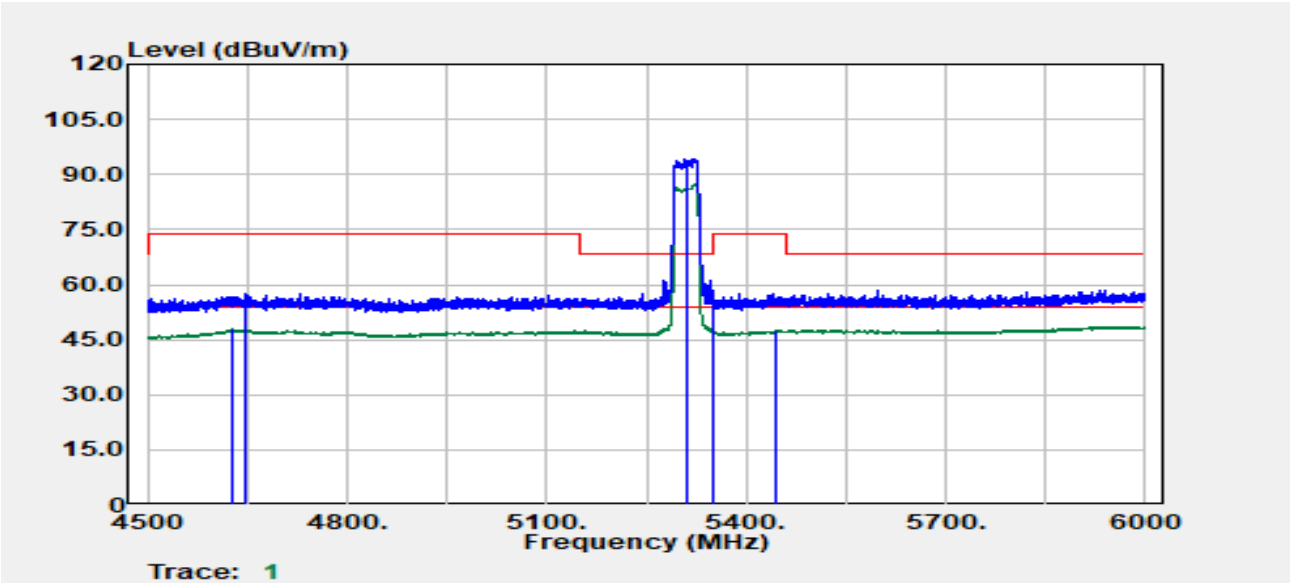

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
4625.44	Average	32.67	15.13	47.79	54.00	-6.21
4645.43	Peak	42.43	15.08	57.51	74.00	-16.49
5310.00	Peak	77.92	16.37	94.29	-	-
5310.00	Average	70.92	16.37	87.29	-	-
5350.33	Peak	41.97	16.33	58.30	74.00	-15.70
5443.53	Average	30.88	16.51	47.39	54.00	-6.61




Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 77 / 208
Rev.: 01

Project No :TM-2411000185P
Operation Band :802.11ac80/Band2
Frequency :5290 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :38

Test Date :2024-12-20
Temp./Humi. :24.5/57
Antenna Pol. :VERTICAL
Engineer :Ray Li
Test Chamber : 966A

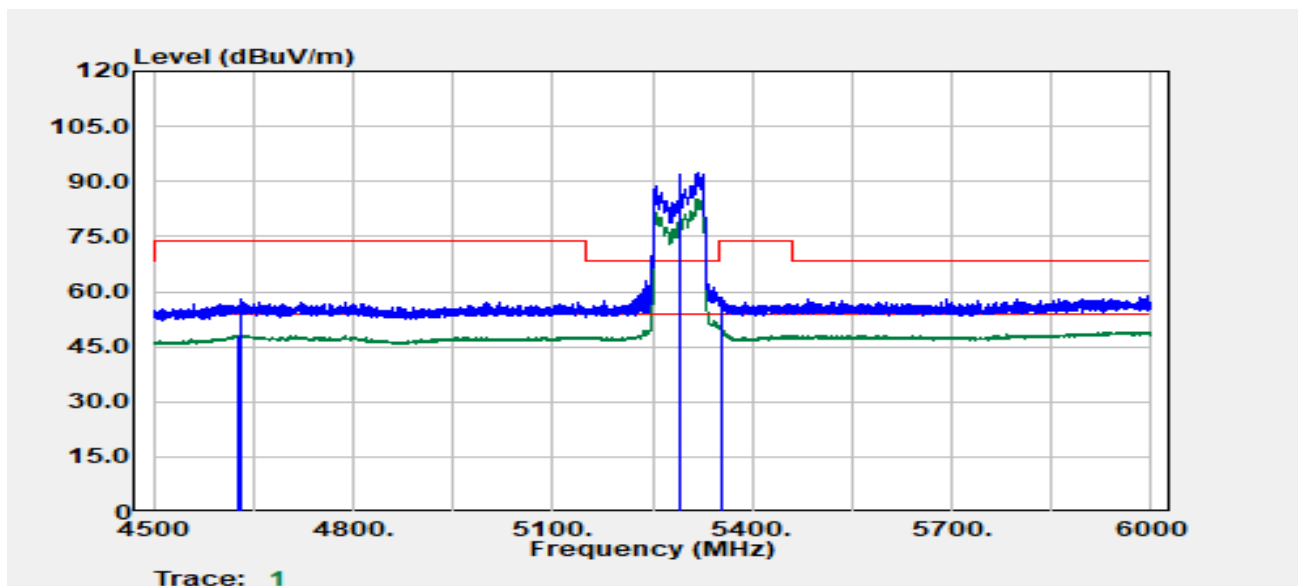


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
4626.44	Average	32.92	15.12	48.04	54.00	-5.96
4631.19	Peak	42.76	15.11	57.87	74.00	-16.13
5290.00	Peak	75.88	16.35	92.23	-	-
5290.00	Average	68.87	16.35	85.22	-	-
5352.57	Average	34.05	16.33	50.38	54.00	-3.62
5355.32	Peak	42.29	16.32	58.61	74.00	-15.39



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 78 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-20
Operation Band	:802.11ac80/Band2	Temp./Humi.	:24.5/57
Frequency	:5290 MHz	Antenna Pol.	:HORIZONTAL
Operation Mode	:Bandedge	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:38		

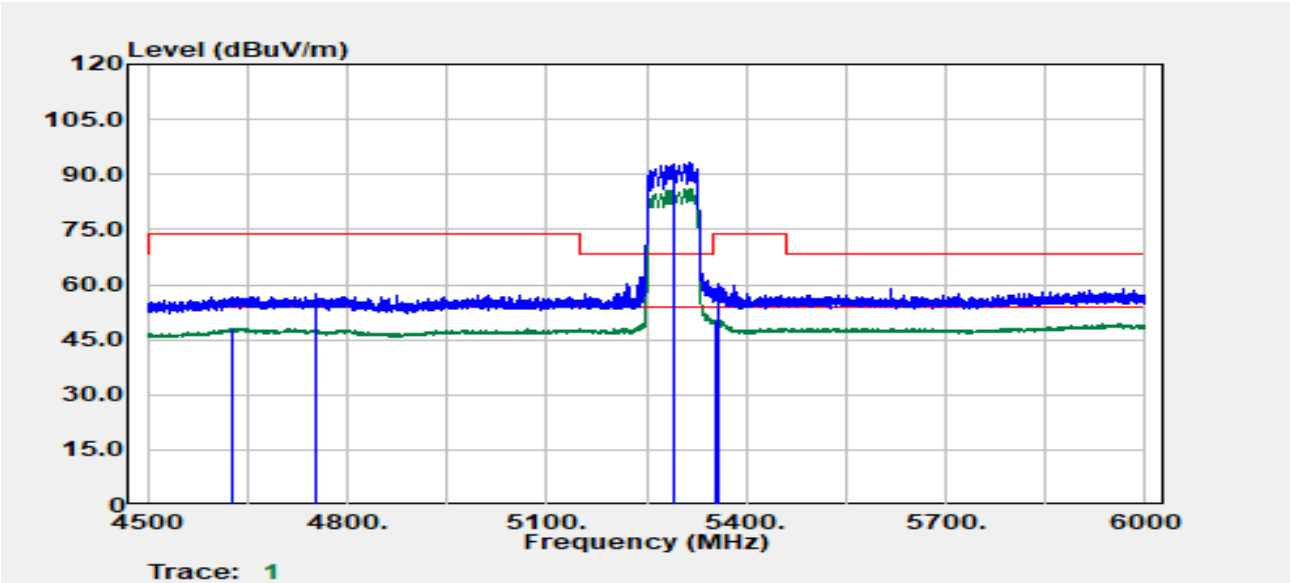

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
4628.44	Average	32.93	15.12	48.05	54.00	-5.95
4753.37	Peak	42.27	15.24	57.51	74.00	-16.49
5290.00	Peak	76.90	16.35	93.25	- -	- -
5290.00	Average	70.88	16.35	87.23	- -	- -
5354.07	Average	34.11	16.32	50.44	54.00	-3.56
5359.82	Peak	43.85	16.31	60.16	74.00	-13.84




Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 79 / 208
Rev.: 01

Project No :TM-2411000185P
Operation Band :802.11a/Band3
Frequency :5500 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :48

Test Date :2024-12-04
Temp./Humi. :24.7/57
Antenna Pol. :VERTICAL
Engineer :Ray Li
Test Chamber : 966A

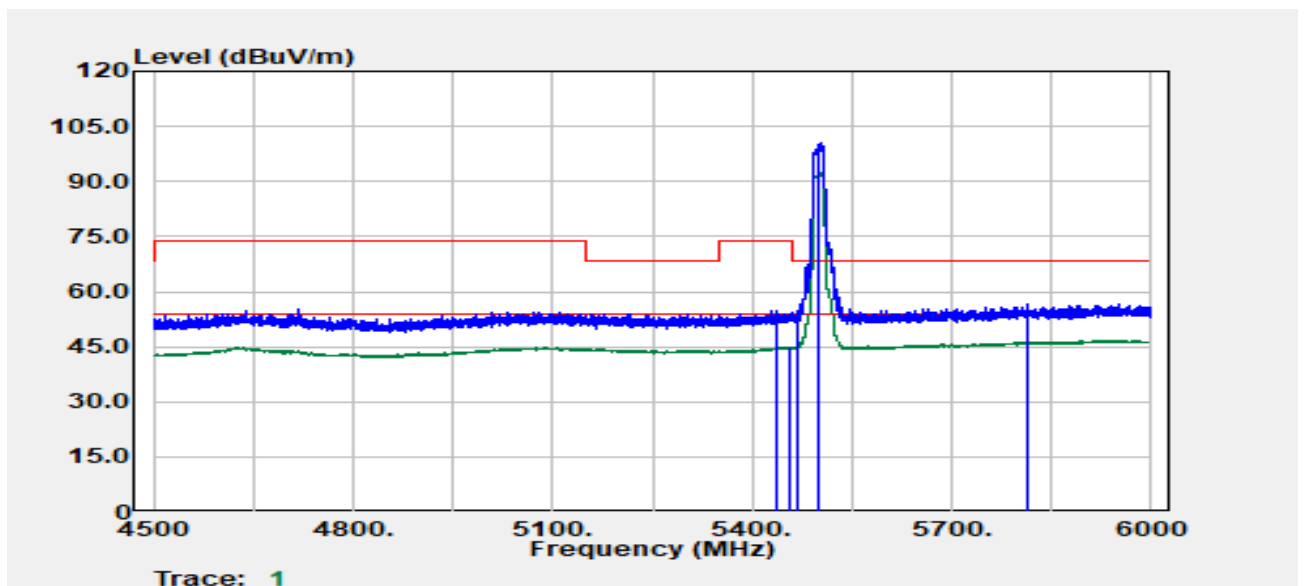

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5436.16	Peak	40.77	14.04	54.80	74.00	-19.20
5457.91	Average	30.80	14.13	44.93	54.00	-9.07
5467.16	Peak	40.55	14.10	54.66	68.20	-13.54
5500.00	Peak	86.34	14.02	100.36	--	--
5500.00	Average	78.55	14.02	92.57	--	--
5813.22	Peak	40.77	15.72	56.49	68.20	-11.71




Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 80 / 208
Rev.: 01

Project No :TM-2411000185P
Operation Band :802.11a/Band3
Frequency :5500 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :48

Test Date :2024-12-04
Temp./Humi. :24.7/57
Antenna Pol. :HORIZONTAL
Engineer :Ray Li
Test Chamber : 966A

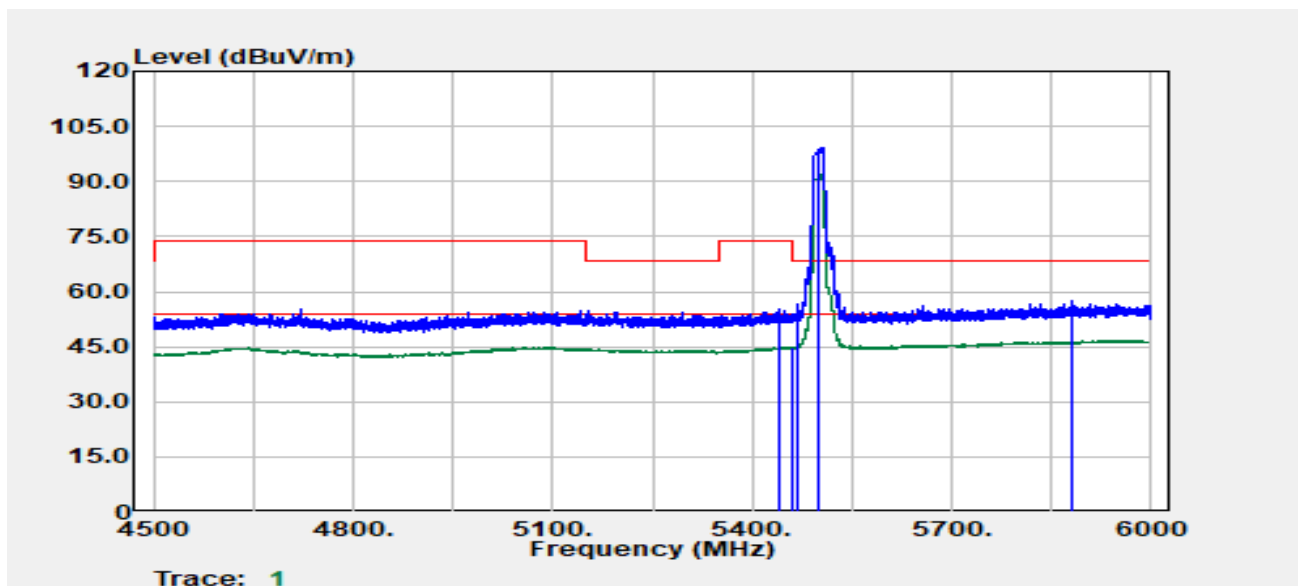

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5441.66	Peak	41.08	14.08	55.16	74.00	-18.84
5459.66	Average	30.71	14.12	44.83	54.00	-9.17
5469.41	Peak	42.56	14.10	56.66	68.20	-11.54
5500.00	Peak	84.97	14.02	98.99	--	--
5500.00	Average	77.82	14.02	91.84	--	--
5878.98	Peak	42.04	15.60	57.65	68.20	-10.55




Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 81 / 208
Rev.: 01

Project No :TM-2411000185P
Operation Band :802.11a/Band3
Frequency :5700 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :44

Test Date :2024-12-04
Temp./Humi. :24.7/57
Antenna Pol. :VERTICAL
Engineer :Ray Li
Test Chamber : 966A

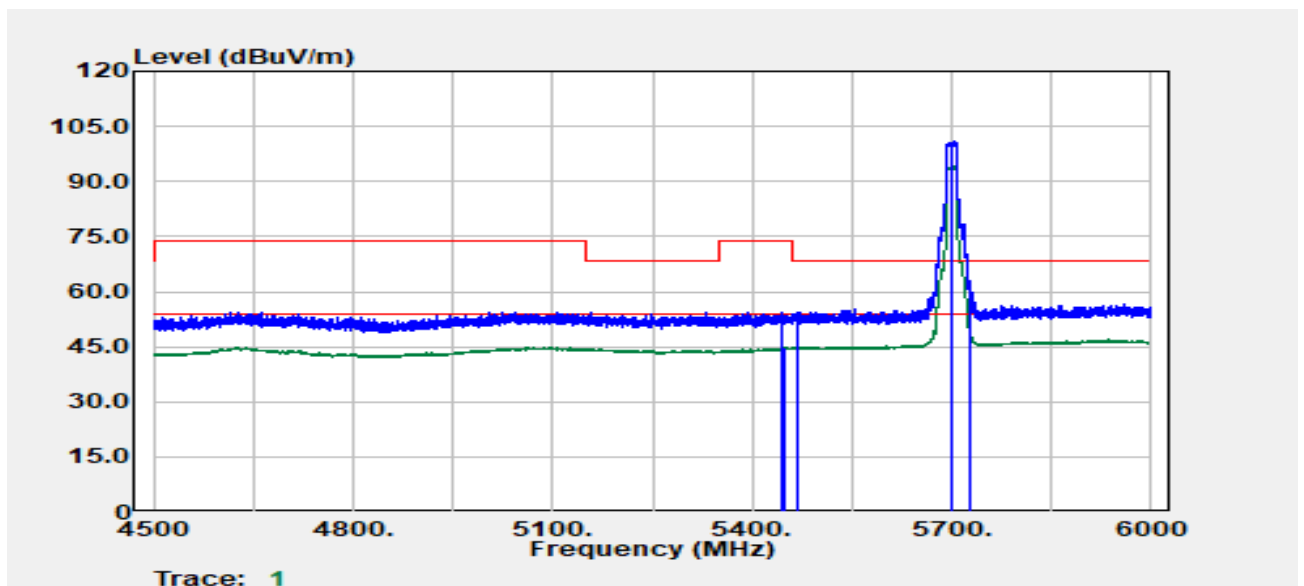

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5446.41	Peak	40.31	14.12	54.43	74.00	-19.57
5446.91	Average	30.61	14.12	44.73	54.00	-9.27
5469.16	Peak	40.05	14.10	54.15	68.20	-14.05
5700.00	Peak	85.62	15.41	101.03	--	--
5700.00	Average	78.61	15.41	94.02	--	--
5726.21	Peak	47.37	15.54	62.90	68.20	-5.30




Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 82 / 208
Rev.: 01

Project No :TM-2411000185P
Operation Band :802.11a/Band3
Frequency :5700 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :44

Test Date :2024-12-04
Temp./Humi. :24.7/57
Antenna Pol. :HORIZONTAL
Engineer :Ray Li
Test Chamber : 966A

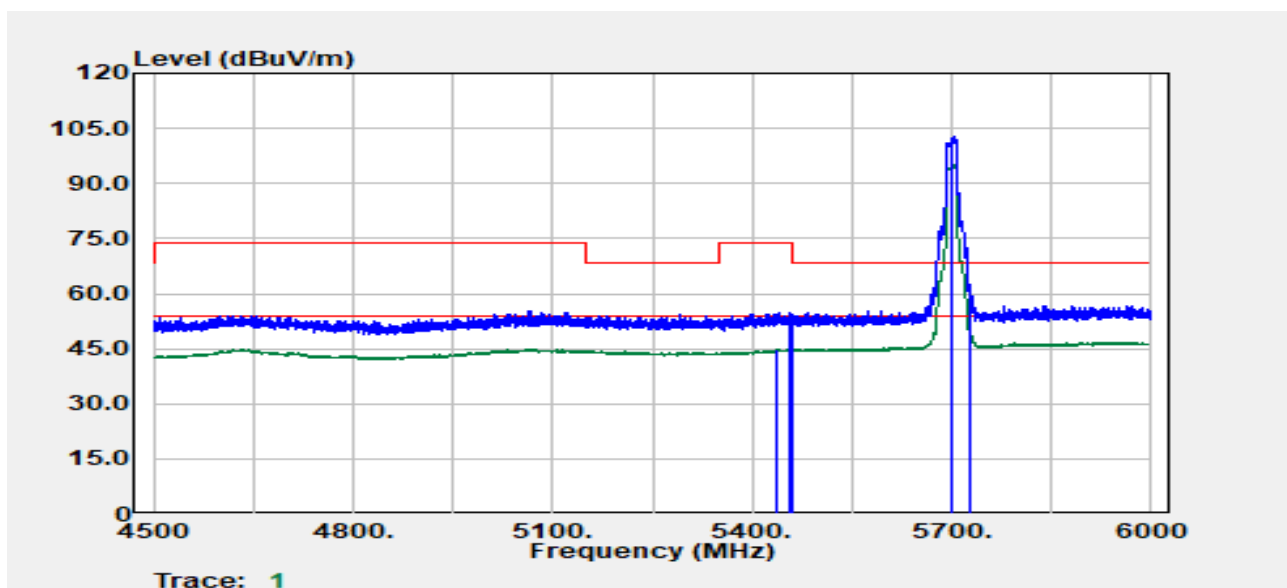


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5435.41	Average	30.74	14.03	44.77	54.00	-9.23
5455.66	Peak	40.64	14.13	54.77	74.00	-19.23
5461.41	Peak	40.37	14.12	54.49	68.20	-13.71
5700.00	Peak	87.18	15.41	102.59	--	--
5700.00	Average	79.71	15.41	95.12	--	--
5725.70	Peak	46.78	15.53	62.31	68.20	-5.89



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 83 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-04
Operation Band	:802.11n20/Band3	Temp./Humi.	:24.6/55
Frequency	:5500 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:Bandedge	Engineer	:Tony Chao
EUT Pol	:E2	Test Chamber	: 966A
Setting	:48		

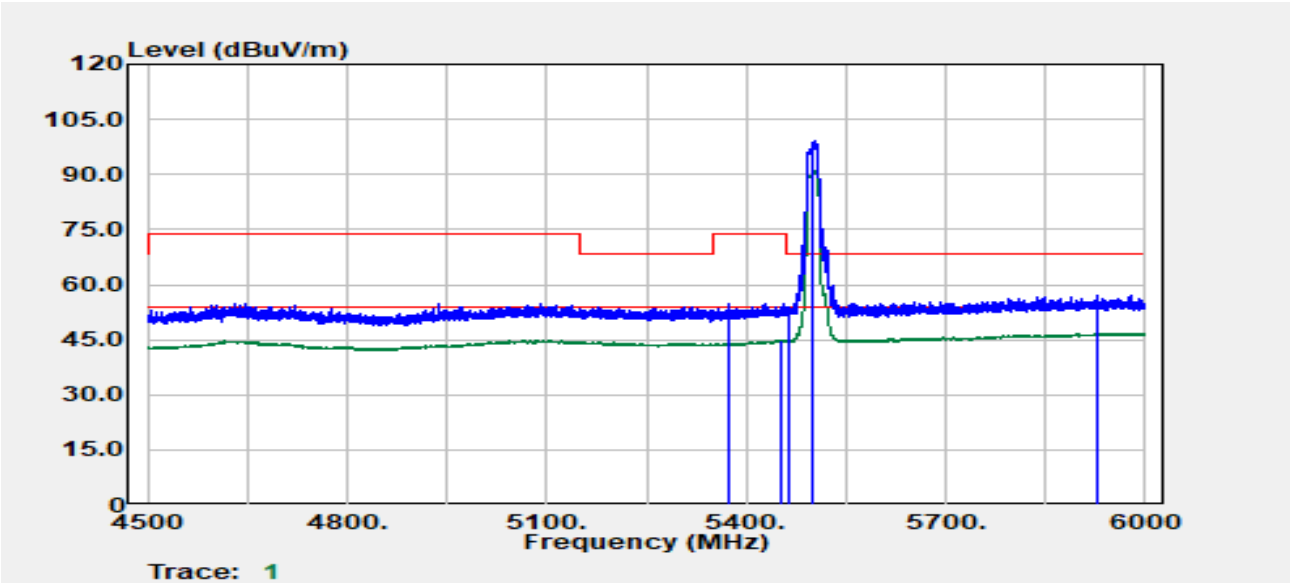

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5372.15	Peak	41.15	13.68	54.84	74.00	-19.16
5450.66	Average	30.69	14.14	44.83	54.00	-9.17
5463.66	Peak	39.57	14.11	53.68	68.20	-14.52
5500.00	Peak	85.05	14.02	99.07	--	--
5500.00	Average	77.28	14.02	91.30	--	--
5929.49	Peak	41.19	15.75	56.94	68.20	-11.26




Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 84 / 208
Rev.: 01

Project No :TM-2411000185P
Operation Band :802.11n20/Band3
Frequency :5500 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :48

Test Date :2024-12-04
Temp./Humi. :24.6/55
Antenna Pol. :HORIZONTAL
Engineer :Tony Chao
Test Chamber : 966A

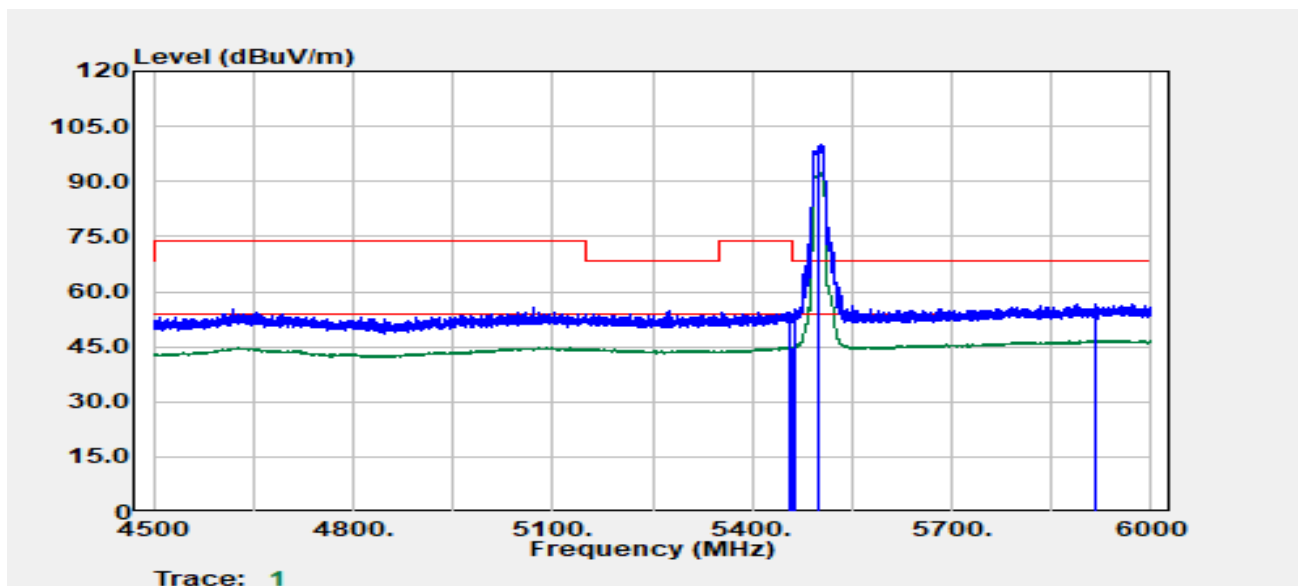

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5454.91	Peak	40.29	14.13	54.42	74.00	-19.58
5458.66	Average	30.71	14.12	44.83	54.00	-9.17
5462.66	Peak	41.07	14.11	55.18	68.20	-13.02
5500.00	Peak	86.13	14.02	100.15	--	--
5500.00	Average	78.64	14.02	92.66	--	--
5917.24	Peak	40.74	15.69	56.43	68.20	-11.77




Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 85 / 208
Rev.: 01

Project No :TM-2411000185P
Operation Band :802.11n20/Band3
Frequency :5700 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :44

Test Date :2024-12-04
Temp./Humi. :24.6/55
Antenna Pol. :VERTICAL
Engineer :Tony Chao
Test Chamber : 966A

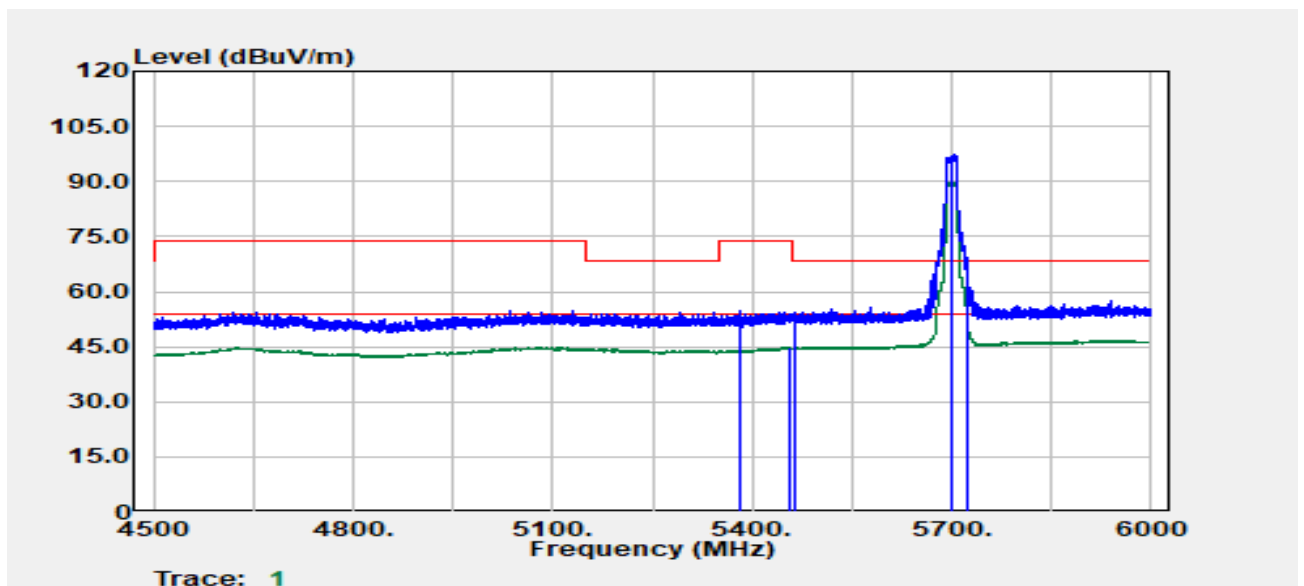


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5381.65	Peak	40.93	13.71	54.64	74.00	-19.36
5456.66	Average	30.62	14.13	44.75	54.00	-9.25
5464.16	Peak	40.40	14.11	54.51	68.20	-13.69
5700.00	Peak	82.16	15.41	97.57	--	--
5700.00	Average	74.36	15.41	89.77	--	--
5725.45	Peak	46.64	15.53	62.17	68.20	-6.03



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 86 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-04
Operation Band	:802.11n20/Band3	Temp./Humi.	:24.6/55
Frequency	:5700 MHz	Antenna Pol.	:HORIZONTAL
Operation Mode	:Bandedge	Engineer	:Tony Chao
EUT Pol	:E2	Test Chamber	: 966A
Setting	:44		

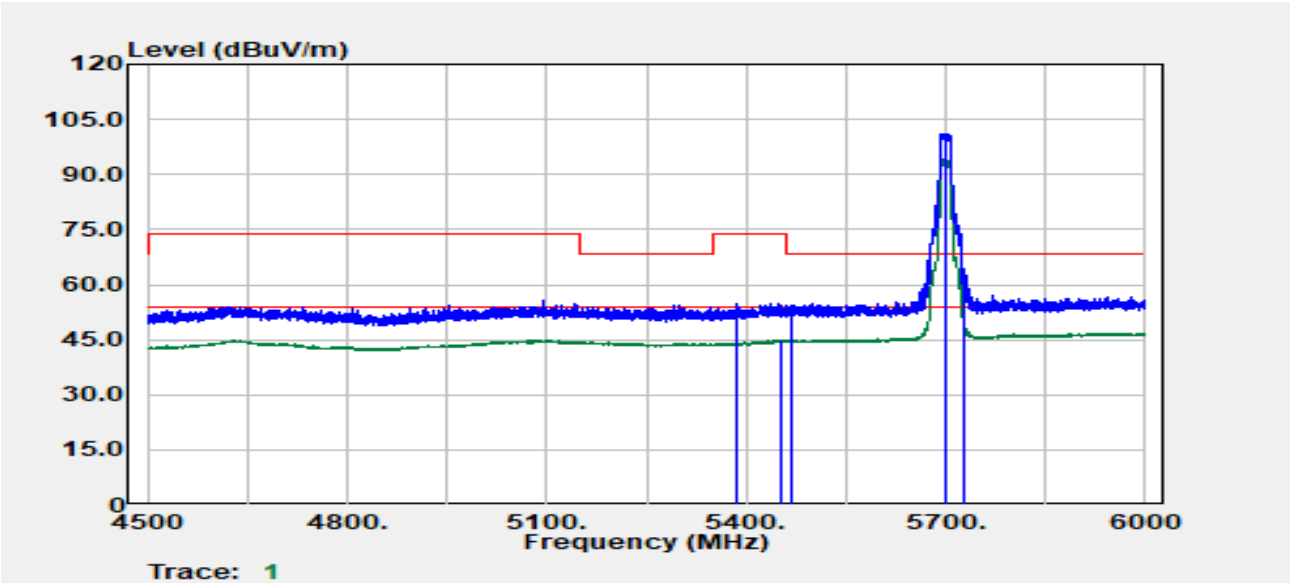


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5383.65	Peak	40.97	13.71	54.68	74.00	-19.32
5450.41	Average	30.55	14.14	44.70	54.00	-9.30
5469.91	Peak	40.45	14.10	54.54	68.20	-13.66
5700.00	Peak	85.50	15.41	100.91	--	--
5700.00	Average	78.88	15.41	94.29	--	--
5728.96	Peak	48.56	15.55	64.11	68.20	-4.09



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 87 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-04
Operation Band	:802.11n40/Band3	Temp./Humi.	:24.6/55
Frequency	:5510 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:Bandedge	Engineer	:Tony Chao
EUT Pol	:E2	Test Chamber	: 966A
Setting	:45		

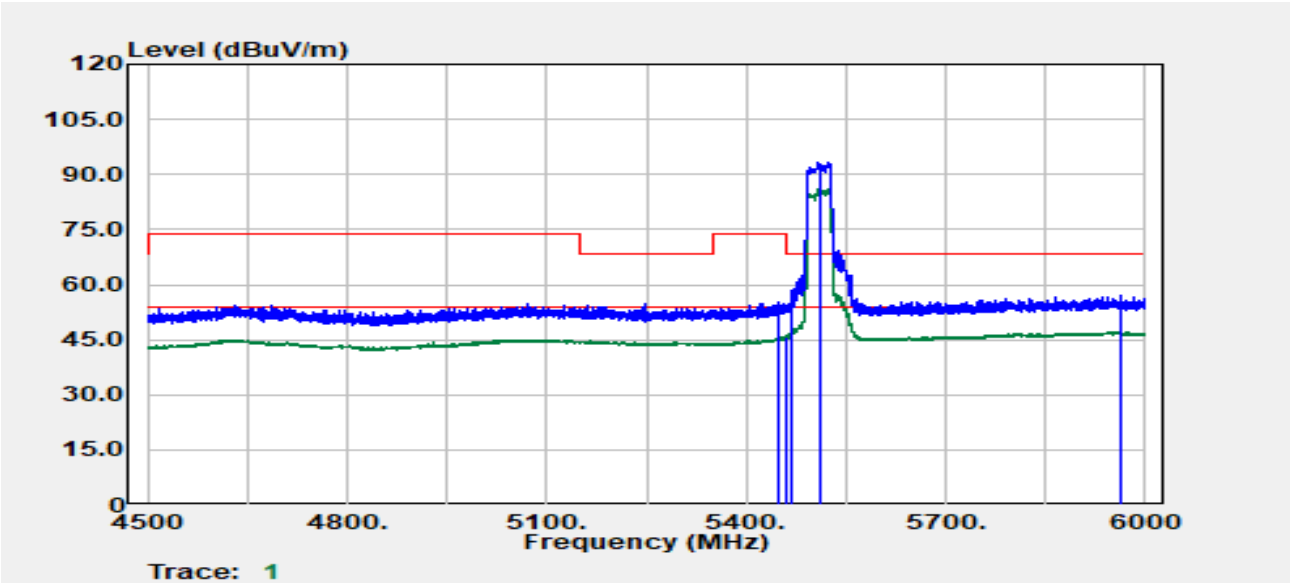

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5446.91	Peak	40.93	14.12	55.05	74.00	-18.95
5458.66	Average	31.60	14.12	45.72	54.00	-8.28
5469.91	Peak	44.21	14.10	58.30	68.20	-9.90
5510.00	Peak	79.39	14.06	93.45	--	--
5510.00	Average	72.02	14.06	86.08	--	--
5962.99	Peak	41.43	15.83	57.27	68.20	-10.93




Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 88 / 208
Rev.: 01

Project No :TM-2411000185P
Operation Band :802.11n40/Band3
Frequency :5510 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :45

Test Date :2024-12-04
Temp./Humi. :24.6/55
Antenna Pol. :HORIZONTAL
Engineer :Tony Chao
Test Chamber : 966A

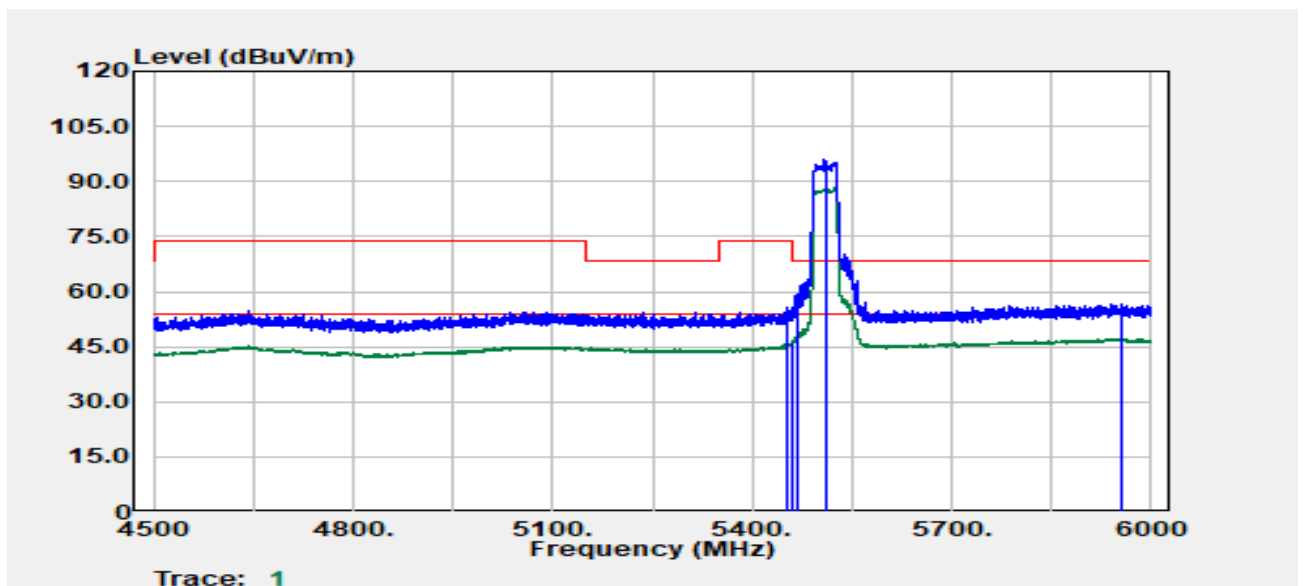


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5450.91	Peak	41.56	14.14	55.70	74.00	-18.30
5459.16	Average	31.87	14.12	45.99	54.00	-8.01
5469.66	Peak	45.07	14.10	59.17	68.20	-9.03
5510.00	Peak	81.92	14.06	95.98	--	--
5510.00	Average	74.16	14.06	88.22	--	--
5953.99	Peak	40.84	15.84	56.69	68.20	-11.51



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 89 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-04
Operation Band	:802.11n40/Band3	Temp./Humi.	:24.6/55
Frequency	:5670 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:Bandedge	Engineer	:Tony Chao
EUT Pol	:E2	Test Chamber	: 966A
Setting	:42		

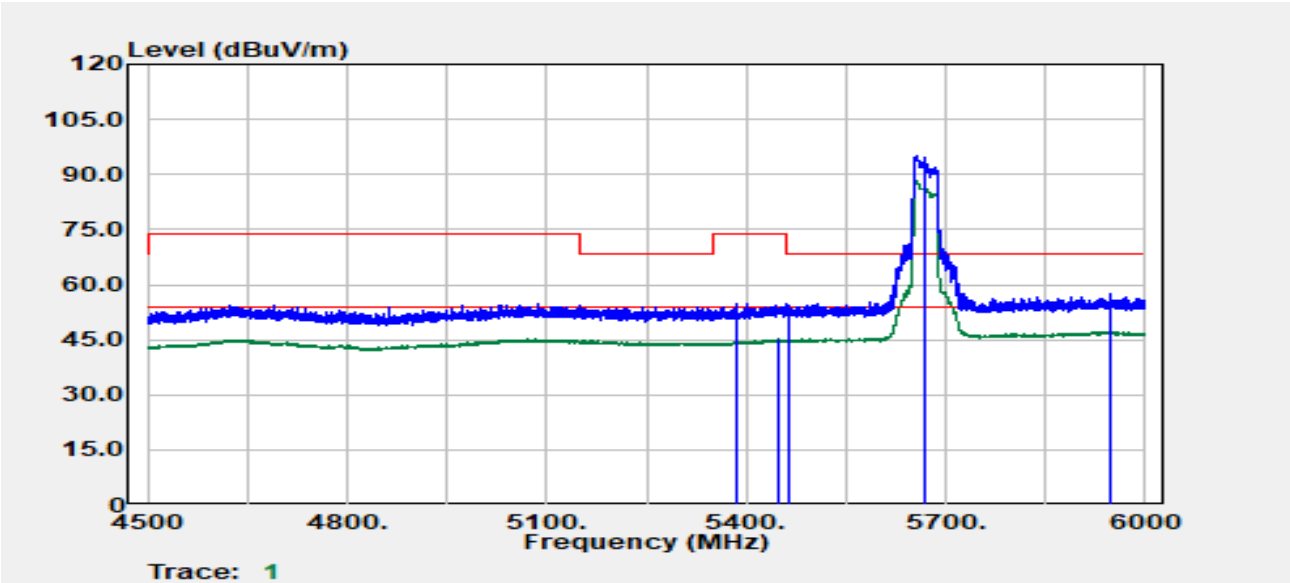


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5386.65	Peak	41.24	13.72	54.96	74.00	-19.04
5449.66	Average	30.92	14.14	45.06	54.00	-8.94
5464.16	Peak	40.39	14.11	54.50	68.20	-13.70
5670.00	Peak	80.10	15.12	95.22	--	--
5670.00	Average	72.98	15.12	88.10	--	--
5948.74	Peak	41.79	15.84	57.63	68.20	-10.57



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 90 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-04
Operation Band	:802.11n40/Band3	Temp./Humi.	:24.6/55
Frequency	:5670 MHz	Antenna Pol.	:HORIZONTAL
Operation Mode	:Bandedge	Engineer	:Tony Chao
EUT Pol	:E2	Test Chamber	: 966A
Setting	:42		

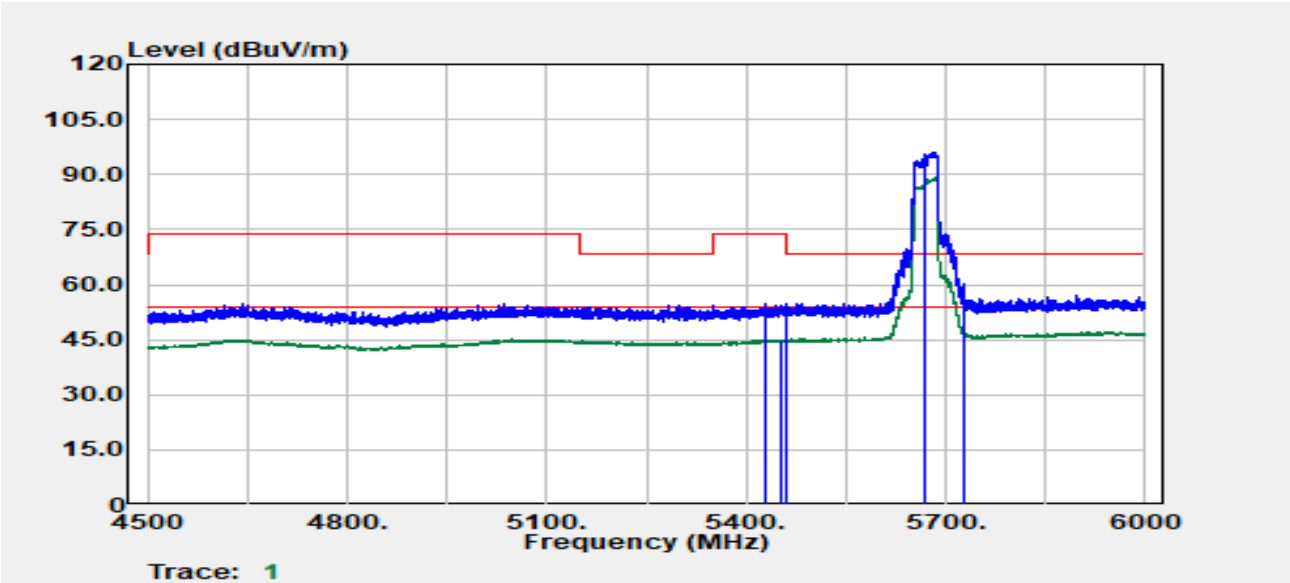


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5430.16	Peak	40.61	13.99	54.60	74.00	-19.40
5452.16	Average	30.88	14.14	45.01	54.00	-8.99
5462.16	Peak	40.61	14.11	54.72	68.20	-13.48
5670.00	Peak	80.79	15.12	95.91	--	--
5670.00	Average	73.88	15.12	89.00	--	--
5725.70	Peak	44.73	15.53	60.27	68.20	-7.93



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 91 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-04
Operation Band	:802.11ac80/Band3	Temp./Humi.	:24.6/55
Frequency	:5530 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:Bandedge	Engineer	:Tony Chao
EUT Pol	:E2	Test Chamber	: 966A
Setting	:43		

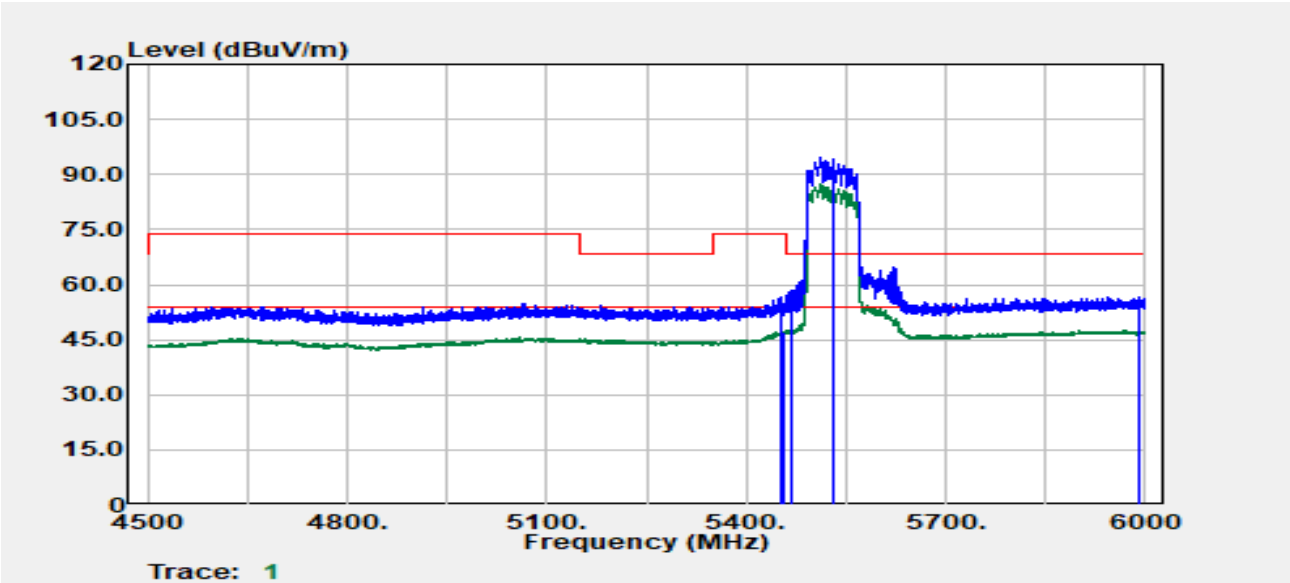

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5451.41	Peak	42.66	14.14	56.80	74.00	-17.20
5456.16	Average	33.16	14.13	47.29	54.00	-6.71
5466.16	Peak	44.15	14.10	58.25	68.20	-9.95
5530.00	Peak	80.67	14.13	94.79	--	--
5530.00	Average	73.09	14.13	87.22	--	--
5989.50	Peak	40.80	15.79	56.60	68.20	-11.60




Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 92 / 208
Rev.: 01

Project No :TM-2411000185P
Operation Band :802.11ac80/Band3
Frequency :5530 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :43

Test Date :2024-12-04
Temp./Humi. :24.6/55
Antenna Pol. :HORIZONTAL
Engineer :Tony Chao
Test Chamber : 966A

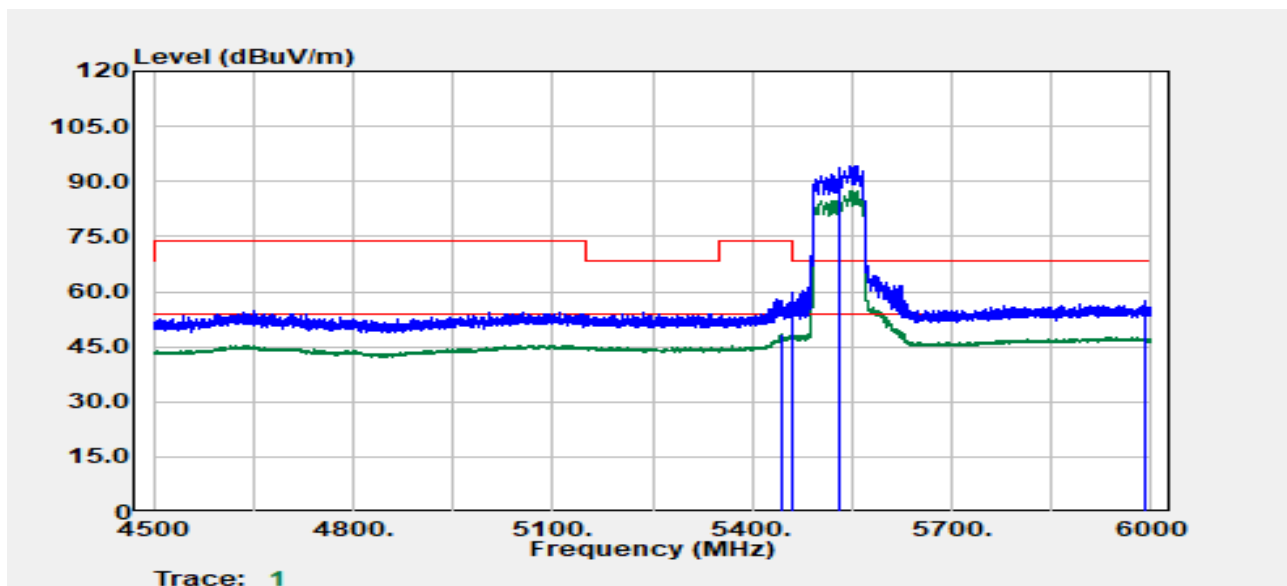


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5442.66	Average	34.54	14.09	48.63	54.00	-5.37
5459.16	Peak	44.04	14.12	58.16	74.00	-15.84
5461.16	Peak	45.73	14.12	59.84	68.20	-8.36
5530.00	Peak	80.15	14.13	94.28	--	--
5530.00	Average	73.43	14.13	87.56	--	--
5988.75	Peak	41.61	15.80	57.41	68.20	-10.79



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 93 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-04
Operation Band	:802.11ac80/Band3	Temp./Humi.	:24.6/55
Frequency	:5610 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:Bandedge	Engineer	:Tony Chao
EUT Pol	:E2	Test Chamber	: 966A
Setting	:43		

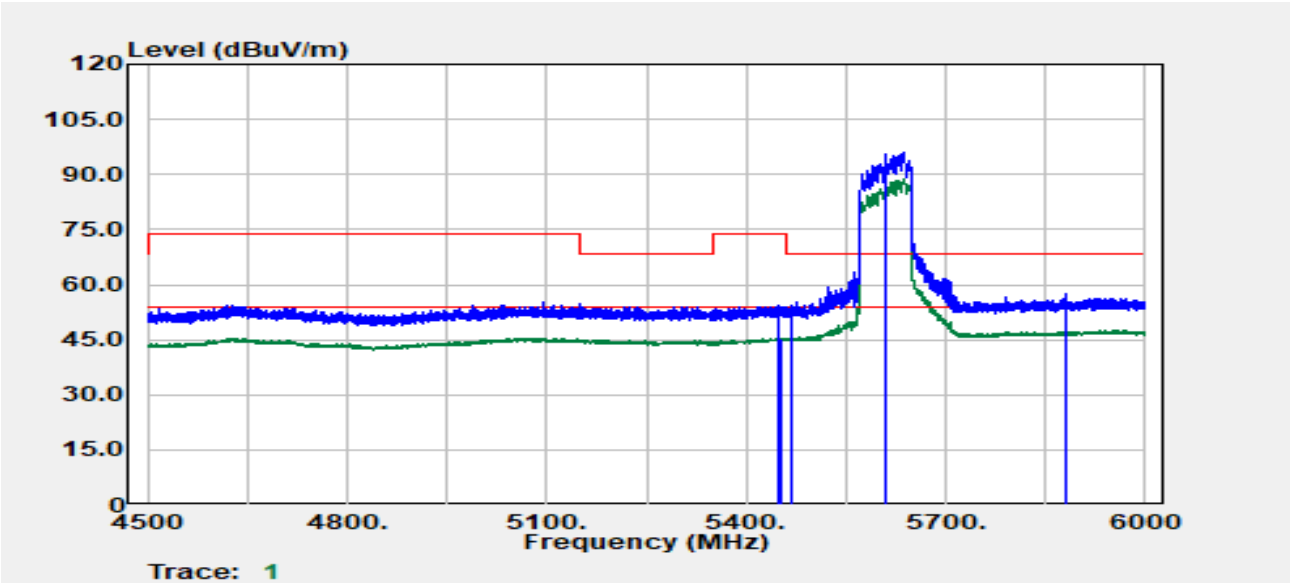


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5448.41	Peak	40.02	14.13	54.15	74.00	-19.85
5453.91	Average	31.37	14.14	45.51	54.00	-8.49
5467.41	Peak	40.09	14.10	54.19	68.20	-14.01
5610.00	Peak	81.44	14.51	95.95	--	--
5610.00	Average	74.37	14.51	88.88	--	--
5879.23	Peak	41.84	15.60	57.44	68.20	-10.76



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 94 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-04
Operation Band	:802.11ac80/Band3	Temp./Humi.	:24.6/55
Frequency	:5610 MHz	Antenna Pol.	:HORIZONTAL
Operation Mode	:Bandedge	Engineer	:Tony Chao
EUT Pol	:E2	Test Chamber	: 966A
Setting	:43		

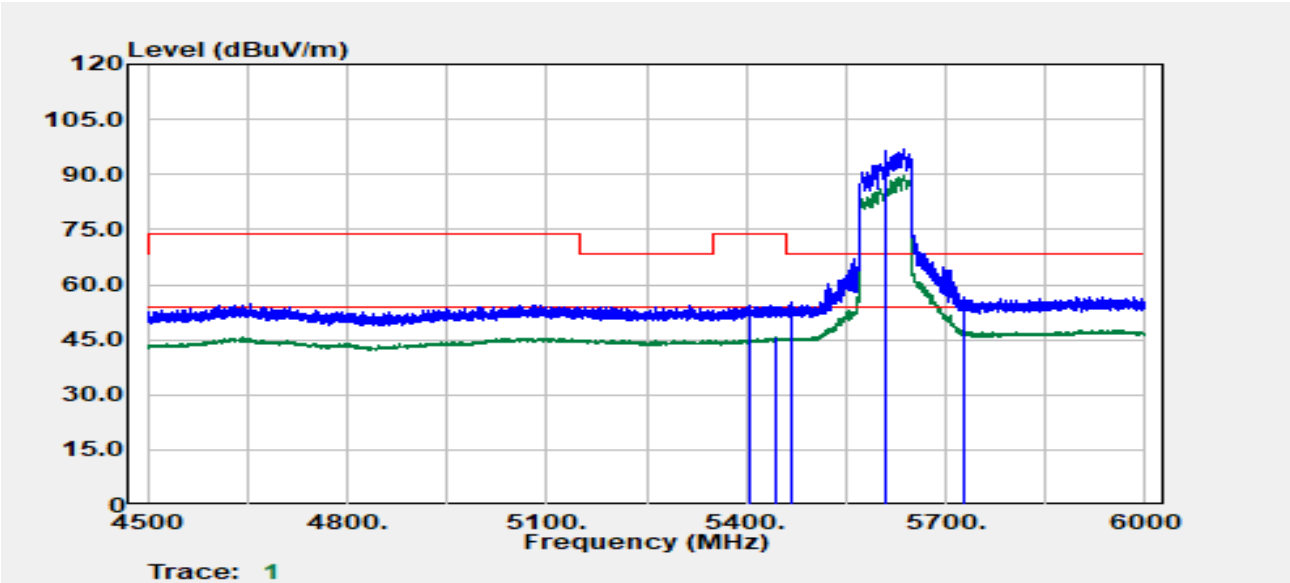

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5406.65	Peak	40.71	13.80	54.51	74.00	-19.49
5443.91	Average	31.51	14.10	45.60	54.00	-8.40
5467.91	Peak	40.98	14.10	55.08	68.20	-13.12
5610.00	Peak	82.29	14.51	96.81	--	--
5610.00	Average	75.18	14.51	89.69	--	--
5727.21	Peak	41.14	15.54	56.68	68.20	-11.52




Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 95 / 208
Rev.: 01

Project No :TM-2411000185P
Operation Band :802.11a/Band4
Frequency :5745 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :43

Test Date :2024-12-04
Temp./Humi. :24.7/57
Antenna Pol. :VERTICAL
Engineer :Ray Li
Test Chamber : 966A

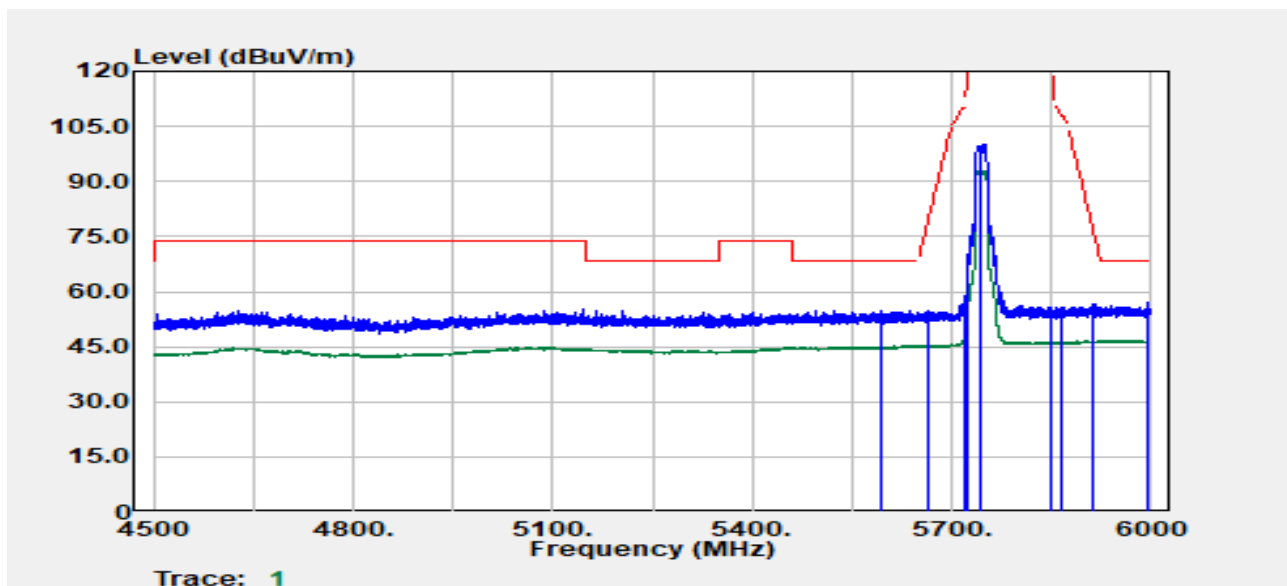

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5592.68	Peak	40.52	14.38	54.90	68.20	-13.30
5664.69	Peak	39.71	15.07	54.77	79.11	-24.33
5718.95	Peak	42.16	15.50	57.66	110.51	-52.85
5723.45	Peak	52.91	15.52	68.43	118.68	-50.25
5745.00	Peak	84.42	15.63	100.05	--	--
5745.00	Average	77.12	15.63	92.74	--	--
5850.73	Peak	39.95	15.61	55.55	120.55	-64.99
5866.48	Peak	40.05	15.60	55.66	107.58	-51.93
5913.99	Peak	40.99	15.67	56.66	76.32	-19.67
5994.00	Peak	41.48	15.79	57.27	68.20	-10.93




Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 96 / 208
Rev.: 01

Project No :TM-2411000185P
Operation Band :802.11a/Band4
Frequency :5745 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :43

Test Date :2024-12-04
Temp./Humi. :24.7/57
Antenna Pol. :HORIZONTAL
Engineer :Ray Li
Test Chamber : 966A

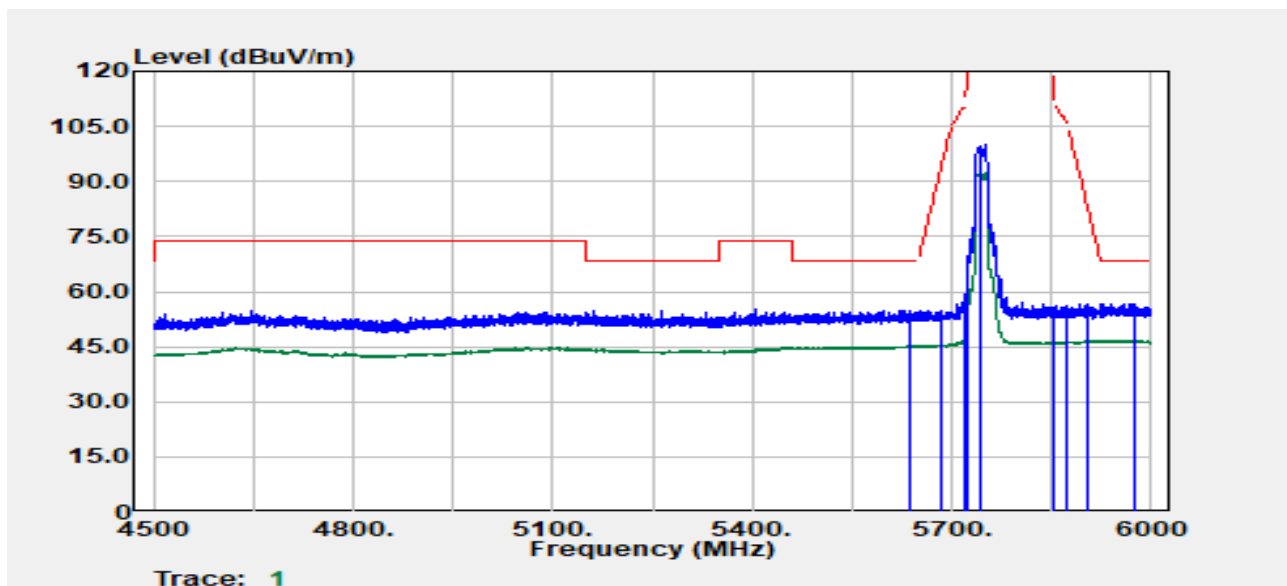


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5638.69	Peak	40.00	14.81	54.81	68.20	-13.39
5682.70	Peak	39.64	15.24	54.88	92.43	-37.55
5719.70	Peak	43.01	15.50	58.52	110.72	-52.20
5723.45	Peak	53.03	15.52	68.55	118.68	-50.12
5745.00	Peak	84.49	15.63	100.11	--	--
5745.00	Average	76.57	15.63	92.20	--	--
5853.23	Peak	40.07	15.60	55.68	114.84	-59.16
5873.23	Peak	40.69	15.60	56.29	105.70	-49.40
5903.48	Peak	41.06	15.62	56.68	84.08	-27.41
5974.50	Peak	41.00	15.82	56.82	68.20	-11.38



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 97 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-04
Operation Band	:802.11a/Band4	Temp./Humi.	:24.7/57
Frequency	:5825 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:Bandedge	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:42		

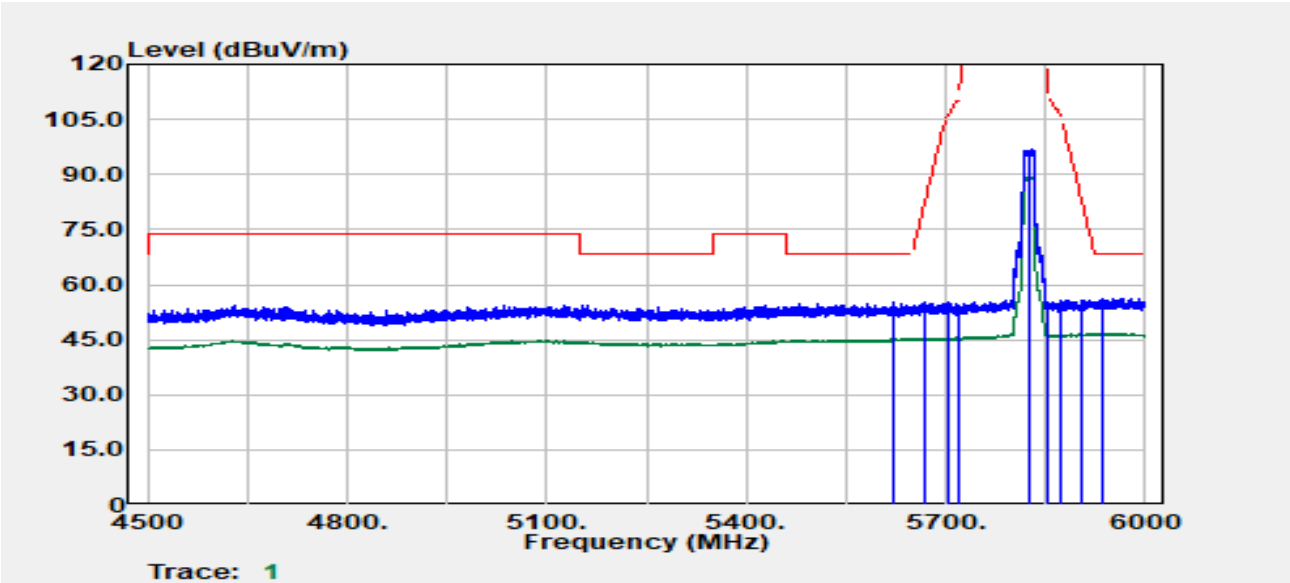

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5622.44	Peak	40.52	14.64	55.16	68.20	-13.04
5666.69	Peak	40.10	15.09	55.18	80.59	-25.41
5703.95	Peak	39.76	15.43	55.18	106.31	-51.12
5720.95	Peak	38.63	15.51	54.14	112.98	-58.84
5825.00	Peak	81.00	15.68	96.68	--	--
5825.00	Average	73.75	15.68	89.43	--	--
5853.23	Peak	39.39	15.60	54.99	114.84	-59.85
5871.73	Peak	40.03	15.60	55.63	106.11	-50.48
5905.48	Peak	40.22	15.63	55.85	82.60	-26.76
5934.74	Peak	40.54	15.77	56.31	68.20	-11.89




Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 98 / 208
Rev.: 01

Project No :TM-2411000185P
Operation Band :802.11a/Band4
Frequency :5825 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :42

Test Date :2024-12-04
Temp./Humi. :24.7/57
Antenna Pol. :HORIZONTAL
Engineer :Ray Li
Test Chamber : 966A

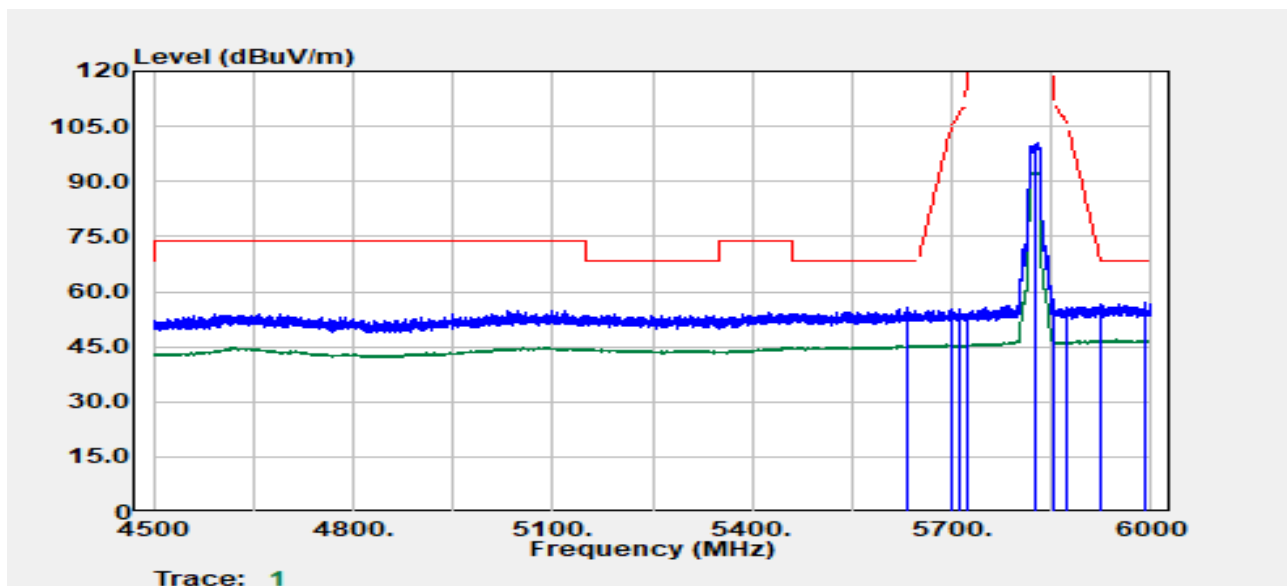

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5631.19	Peak	40.92	14.73	55.65	68.20	-12.55
5698.70	Peak	39.91	15.40	55.31	104.24	-48.93
5712.20	Peak	39.85	15.47	55.32	108.62	-53.30
5722.45	Peak	38.42	15.52	53.94	116.40	-62.45
5825.00	Peak	84.65	15.68	100.33	--	--
5825.00	Average	76.69	15.68	92.37	--	--
5851.48	Peak	42.20	15.60	57.80	118.84	-61.03
5870.98	Peak	39.89	15.60	55.49	106.32	-50.83
5922.74	Peak	40.92	15.71	56.63	69.87	-13.24
5990.00	Peak	41.30	15.79	57.10	68.20	-11.10




Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 99 / 208
Rev.: 01

Project No :TM-2411000185P
Operation Band :802.11n20/Band4
Frequency :5745 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :43

Test Date :2024-12-04
Temp./Humi. :24.6/55
Antenna Pol. :VERTICAL
Engineer :Tony Chao
Test Chamber : 966A

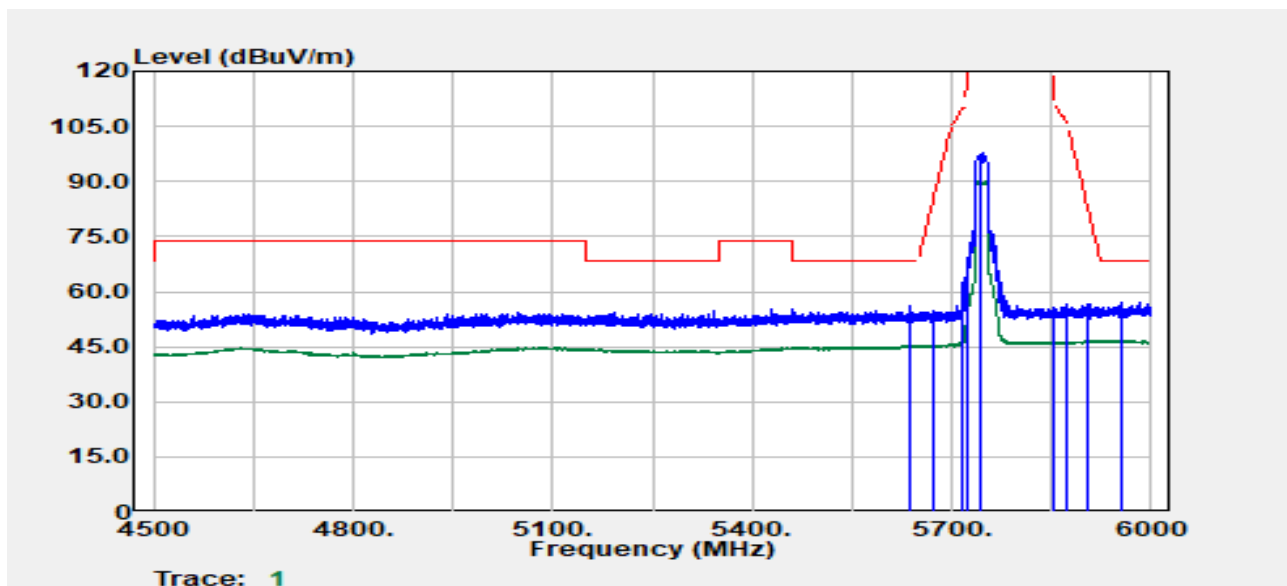

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5637.69	Peak	41.13	14.80	55.93	68.20	-12.27
5673.95	Peak	39.58	15.16	54.74	85.96	-31.22
5717.20	Peak	47.08	15.49	62.57	110.02	-47.45
5724.45	Peak	53.89	15.53	69.42	120.96	-51.53
5745.00	Peak	82.33	15.63	97.95	--	--
5745.00	Average	74.51	15.63	90.14	--	--
5851.73	Peak	39.87	15.60	55.48	118.27	-62.79
5872.73	Peak	40.86	15.60	56.47	105.83	-49.37
5905.98	Peak	40.86	15.63	56.49	82.23	-25.74
5955.74	Peak	41.33	15.84	57.17	68.20	-11.03




Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 100 / 208
Rev.: 01

Project No :TM-2411000185P
Operation Band :802.11n20/Band4
Frequency :5745 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :43

Test Date :2024-12-04
Temp./Humi. :24.6/55
Antenna Pol. :HORIZONTAL
Engineer :Tony Chao
Test Chamber : 966A

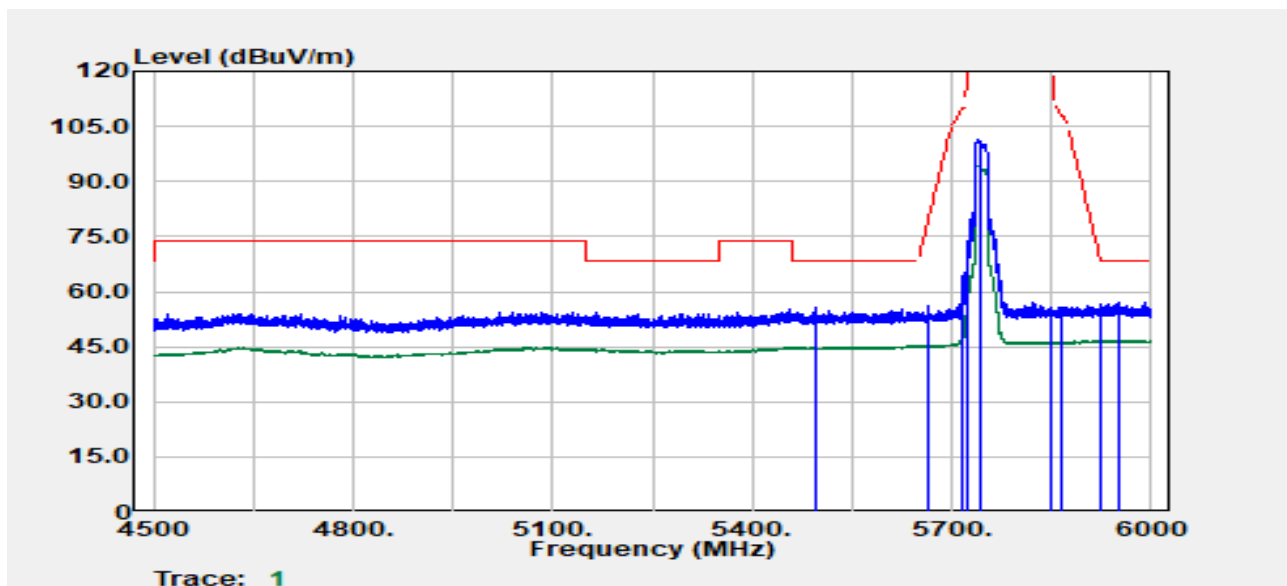

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5497.17	Peak	41.81	14.03	55.84	68.20	-12.36
5663.44	Peak	40.97	15.06	56.02	78.18	-22.16
5716.45	Peak	48.88	15.49	64.37	109.81	-45.44
5724.45	Peak	58.24	15.53	73.77	120.96	-47.19
5745.00	Peak	85.79	15.63	101.42	--	--
5745.00	Average	78.78	15.63	94.41	--	--
5850.98	Peak	40.19	15.60	55.79	119.98	-64.18
5866.23	Peak	40.26	15.60	55.86	107.65	-51.79
5923.24	Peak	40.97	15.72	56.69	69.50	-12.81
5952.74	Peak	41.27	15.85	57.12	68.20	-11.08




Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 101 / 208
Rev.: 01

Project No :TM-2411000185P
Operation Band :802.11n20/Band4
Frequency :5825 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :43

Test Date :2024-12-04
Temp./Humi. :24.6/55
Antenna Pol. :VERTICAL
Engineer :Tony Chao
Test Chamber : 966A

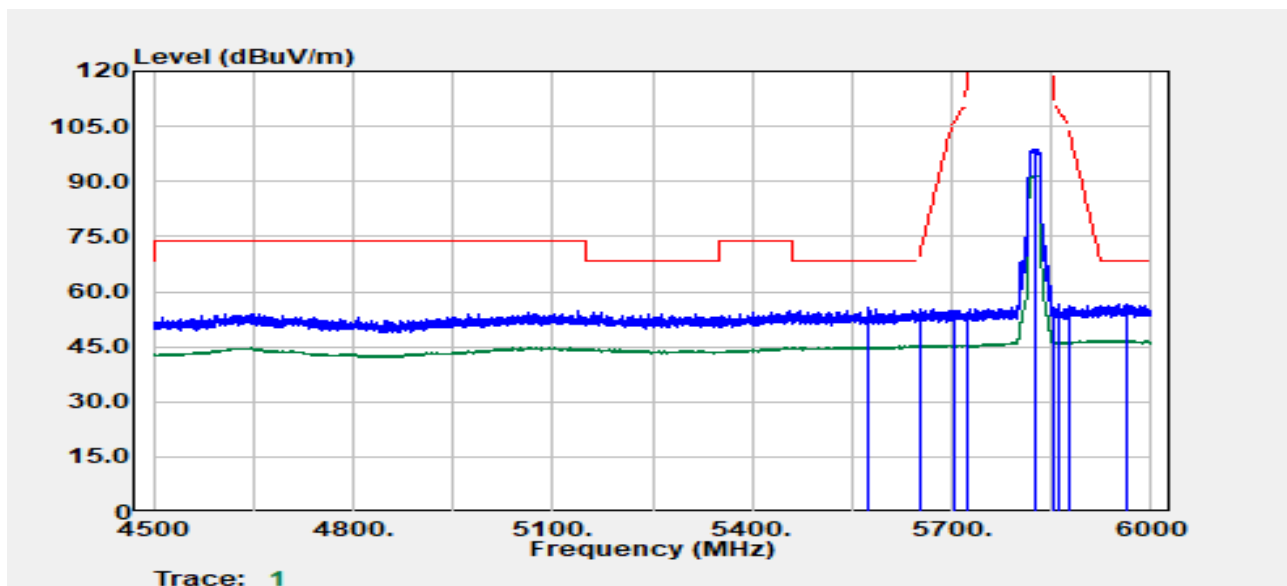

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5575.93	Peak	41.35	14.31	55.66	68.20	-12.54
5652.44	Peak	40.50	14.95	55.45	70.01	-14.56
5702.45	Peak	39.38	15.42	54.80	105.89	-51.09
5723.95	Peak	38.86	15.53	54.38	119.82	-65.43
5825.00	Peak	83.17	15.68	98.85	--	--
5825.00	Average	75.93	15.68	91.61	--	--
5853.48	Peak	40.27	15.60	55.88	114.27	-58.40
5859.73	Peak	41.21	15.60	56.82	109.47	-52.66
5876.23	Peak	40.60	15.60	56.20	104.29	-48.09
5961.74	Peak	40.78	15.83	56.62	68.20	-11.58




Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 102 / 208
Rev.: 01

Project No :TM-2411000185P
Operation Band :802.11n20/Band4
Frequency :5825 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :43

Test Date :2024-12-04
Temp./Humi. :24.6/55
Antenna Pol. :HORIZONTAL
Engineer :Tony Chao
Test Chamber : 966A

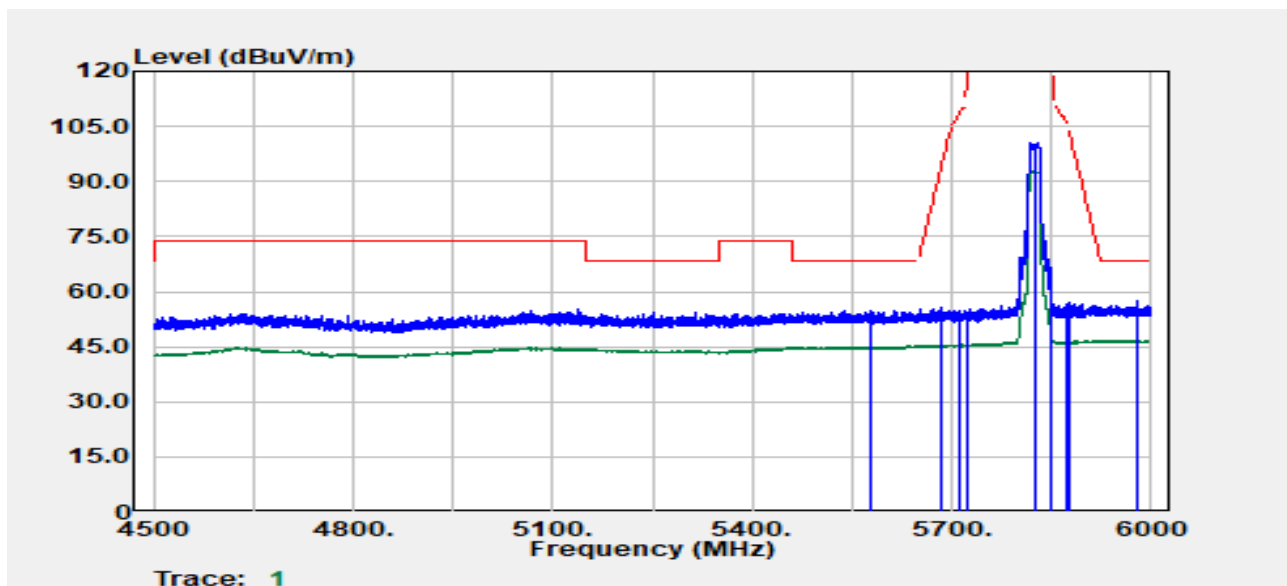

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5578.18	Peak	40.56	14.32	54.87	68.20	-13.33
5685.95	Peak	40.63	15.27	55.90	94.83	-38.93
5710.20	Peak	39.23	15.46	54.69	108.06	-53.37
5723.45	Peak	38.85	15.52	54.38	118.68	-64.30
5825.00	Peak	84.90	15.68	100.59	--	--
5825.00	Average	77.45	15.68	93.14	--	--
5850.00	Peak	42.22	15.61	57.83	122.20	-64.37
5870.98	Peak	40.80	15.60	56.40	106.32	-49.92
5877.23	Peak	41.27	15.60	56.88	103.54	-46.67
5977.75	Peak	41.55	15.81	57.36	68.20	-10.84




Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 103 / 208
Rev.: 01

Project No :TM-2411000185P
Operation Band :802.11n40/Band4
Frequency :5755 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :39

Test Date :2024-12-04
Temp./Humi. :24.6/55
Antenna Pol. :VERTICAL
Engineer :Tony Chao
Test Chamber : 966A

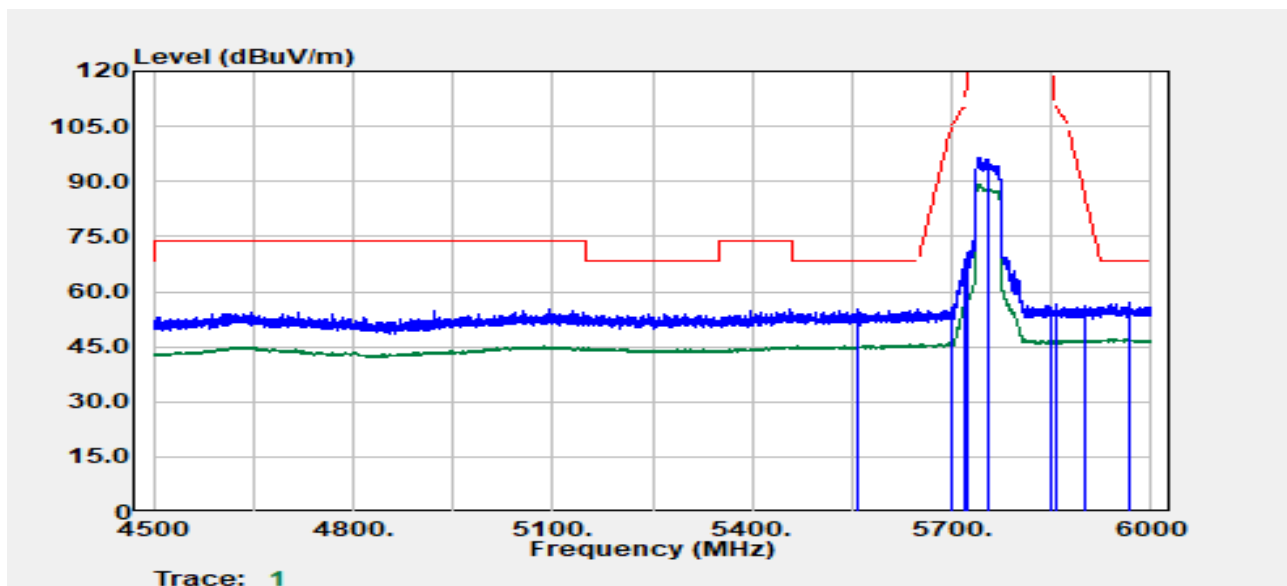

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5558.93	Peak	41.23	14.23	55.46	68.20	-12.74
5699.45	Peak	40.39	15.40	55.79	104.79	-49.00
5719.70	Peak	52.96	15.50	68.46	110.72	-42.25
5722.45	Peak	55.10	15.52	70.61	116.40	-45.78
5755.00	Peak	80.64	15.66	96.30	--	--
5755.00	Average	73.53	15.66	89.19	--	--
5850.98	Peak	39.88	15.60	55.49	119.98	-64.49
5857.98	Peak	40.87	15.60	56.47	109.97	-53.49
5901.23	Peak	40.76	15.61	56.37	85.75	-29.38
5966.24	Peak	41.10	15.83	56.93	68.20	-11.27




Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 104 / 208
Rev.: 01

Project No :TM-2411000185P
Operation Band :802.11n40/Band4
Frequency :5755 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :39

Test Date :2024-12-04
Temp./Humi. :24.6/55
Antenna Pol. :HORIZONTAL
Engineer :Tony Chao
Test Chamber : 966A

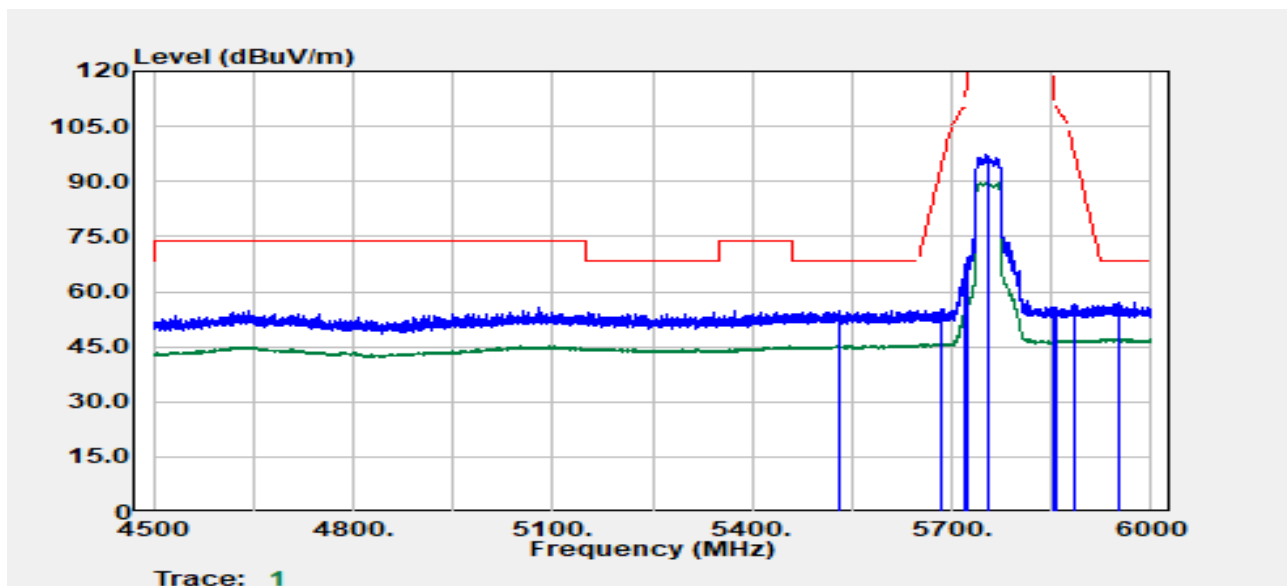

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5530.67	Peak	40.85	14.13	54.97	68.20	-13.23
5684.95	Peak	39.93	15.26	55.19	94.10	-38.90
5719.70	Peak	50.05	15.50	65.55	110.72	-45.16
5724.70	Peak	53.79	15.53	69.32	121.53	-52.20
5755.00	Peak	81.86	15.66	97.52	--	--
5755.00	Average	73.90	15.66	89.56	--	--
5851.48	Peak	40.01	15.60	55.62	118.84	-63.22
5858.48	Peak	40.07	15.60	55.67	109.83	-54.15
5883.48	Peak	40.83	15.60	56.44	98.90	-42.47
5950.74	Peak	41.39	15.85	57.24	68.20	-10.96




Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 105 / 208
Rev.: 01

Project No :TM-2411000185P
Operation Band :802.11n40/Band4
Frequency :5795 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :38

Test Date :2024-12-04
Temp./Humi. :24.6/55
Antenna Pol. :VERTICAL
Engineer :Tony Chao
Test Chamber : 966A

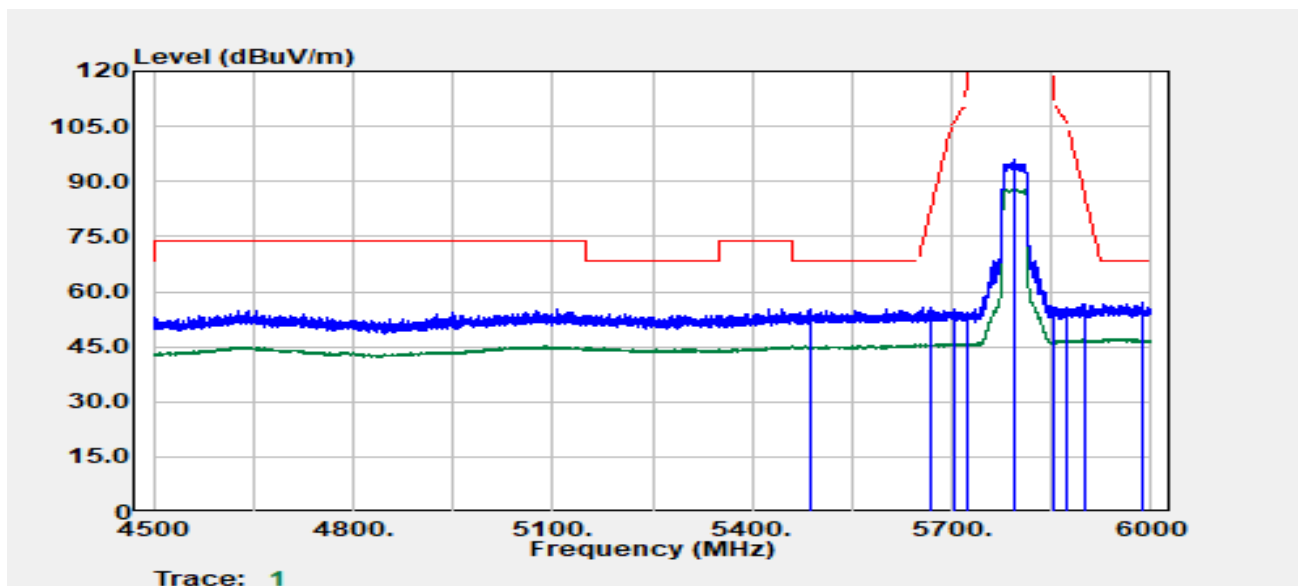

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5486.92	Peak	41.26	14.05	55.31	68.20	-12.89
5669.95	Peak	40.43	15.12	55.55	83.00	-27.45
5702.95	Peak	39.81	15.42	55.23	106.03	-50.80
5722.70	Peak	38.86	15.52	54.38	116.97	-62.59
5795.00	Peak	80.17	15.75	95.92	--	--
5795.00	Average	72.34	15.75	88.09	--	--
5851.98	Peak	40.02	15.60	55.63	117.70	-62.07
5873.23	Peak	40.09	15.60	55.70	105.70	-50.00
5901.73	Peak	41.20	15.61	56.81	85.38	-28.57
5987.25	Peak	41.21	15.80	57.01	68.20	-11.19




Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 106 / 208
Rev.: 01

Project No :TM-2411000185P
Operation Band :802.11n40/Band4
Frequency :5795 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :38

Test Date :2024-12-04
Temp./Humi. :24.6/55
Antenna Pol. :HORIZONTAL
Engineer :Tony Chao
Test Chamber : 966A

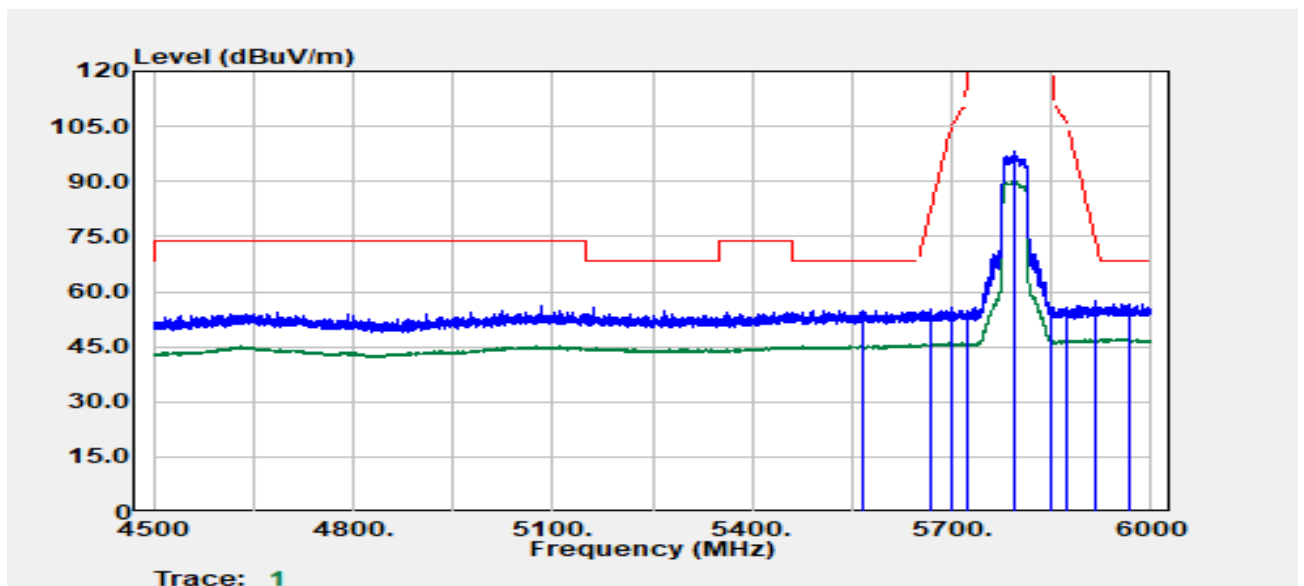

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5565.93	Peak	40.72	14.26	54.99	68.20	-13.21
5667.19	Peak	39.96	15.09	55.05	80.96	-25.91
5700.95	Peak	40.31	15.41	55.72	105.47	-49.75
5723.20	Peak	39.42	15.52	54.94	118.11	-63.16
5795.00	Peak	82.49	15.75	98.24	--	--
5795.00	Average	74.55	15.75	90.29	--	--
5850.98	Peak	40.09	15.60	55.70	119.98	-64.28
5871.23	Peak	39.88	15.60	55.49	106.25	-50.77
5916.24	Peak	42.01	15.68	57.69	74.66	-16.97
5966.75	Peak	40.93	15.83	56.76	68.20	-11.44




Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 107 / 208
Rev.: 01

Project No :TM-2411000185P
Operation Band :802.11ac80/Band4
Frequency :5775 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :39

Test Date :2024-12-04
Temp./Humi. :24.6/55
Antenna Pol. :VERTICAL
Engineer :Tony Chao
Test Chamber : 966A

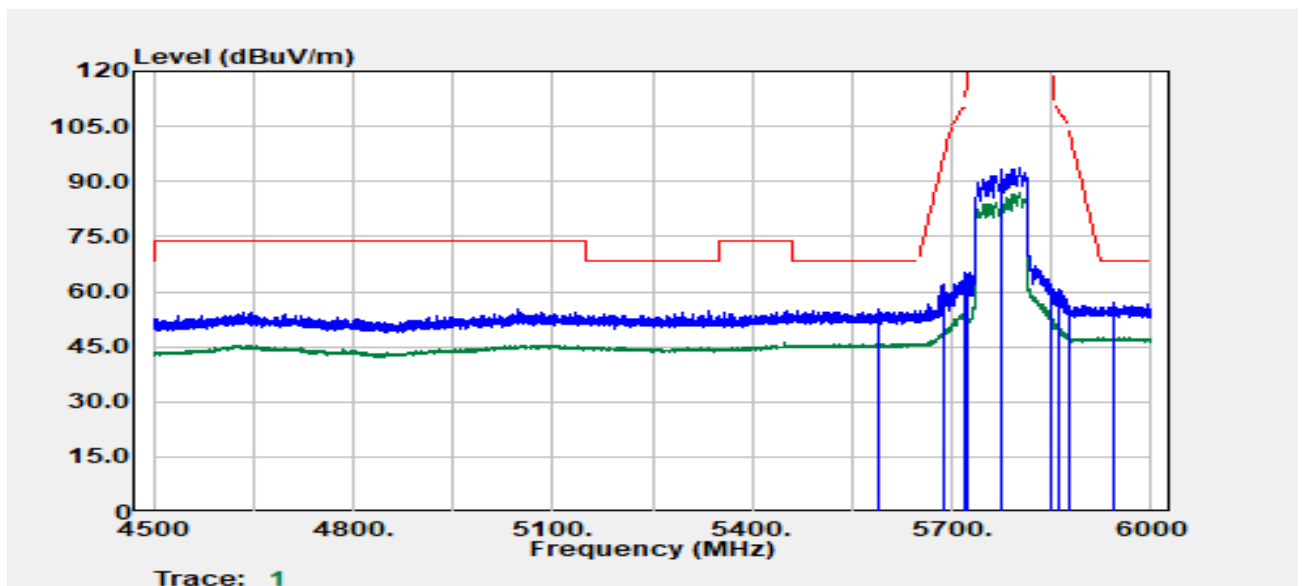

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5588.43	Peak	40.92	14.36	55.28	68.20	-12.92
5689.20	Peak	46.75	15.31	62.06	97.23	-35.18
5719.95	Peak	49.83	15.51	65.34	110.79	-45.45
5724.45	Peak	49.17	15.53	64.70	120.96	-56.26
5775.00	Peak	78.23	15.70	93.94	--	--
5775.00	Average	71.19	15.70	86.90	--	--
5850.00	Peak	45.75	15.61	61.36	122.20	-60.84
5860.73	Peak	45.11	15.60	60.71	109.19	-48.48
5876.98	Peak	40.74	15.60	56.34	103.73	-47.39
5943.49	Peak	41.16	15.82	56.98	68.20	-11.22




Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 108 / 208
Rev.: 01

Project No :TM-2411000185P
Operation Band :802.11ac80/Band4
Frequency :5775 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :39

Test Date :2024-12-04
Temp./Humi. :24.6/55
Antenna Pol. :HORIZONTAL
Engineer :Tony Chao
Test Chamber : 966A

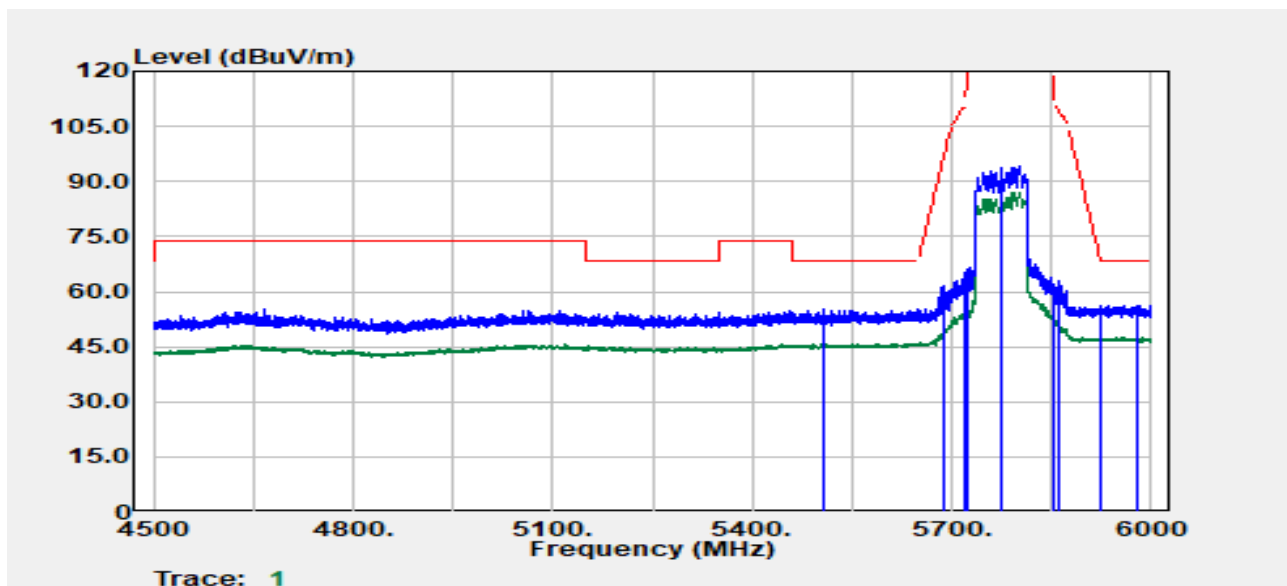

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5508.42	Peak	41.27	14.05	55.32	68.20	-12.88
5688.20	Peak	46.32	15.30	61.61	96.50	-34.89
5719.95	Peak	49.60	15.51	65.11	110.79	-45.68
5724.20	Peak	49.46	15.53	64.98	120.39	-55.40
5775.00	Peak	78.27	15.70	93.98	--	--
5775.00	Average	71.31	15.70	87.01	--	--
5851.48	Peak	46.60	15.60	62.21	118.84	-56.63
5860.23	Peak	47.51	15.60	63.11	109.33	-46.22
5923.24	Peak	40.33	15.72	56.05	69.50	-13.45
5978.00	Peak	40.25	15.81	56.06	68.20	-12.14




Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 109 / 208
Rev.: 01

TX Test Data

Project No	:TM-2411000185P	Test Date	:2024-12-06
Operation Band	:802.11ac80/Band1	Temp./Humi.	:24.7/57
Frequency	:5210 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:		

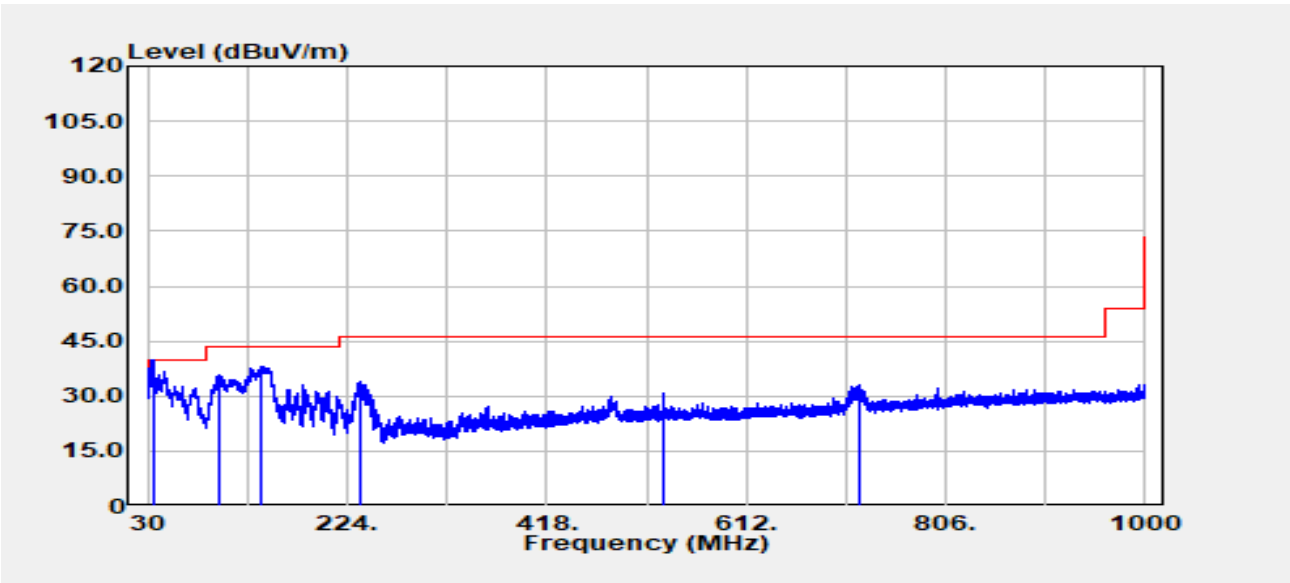


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
34.97	QP	41.42	-6.45	34.97	40.00	-5.03
98.87	Peak	49.78	-13.83	35.94	43.50	-7.56
141.31	Peak	48.82	-10.66	38.16	43.50	-5.34
237.70	Peak	45.40	-11.56	33.84	46.00	-12.16
531.85	Peak	34.82	-3.91	30.91	46.00	-15.09
722.82	Peak	33.87	-0.77	33.10	46.00	-12.90



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 110 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-06
Operation Band	:802.11ac80/Band1	Temp./Humi.	:24.7/57
Frequency	:5210 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:		

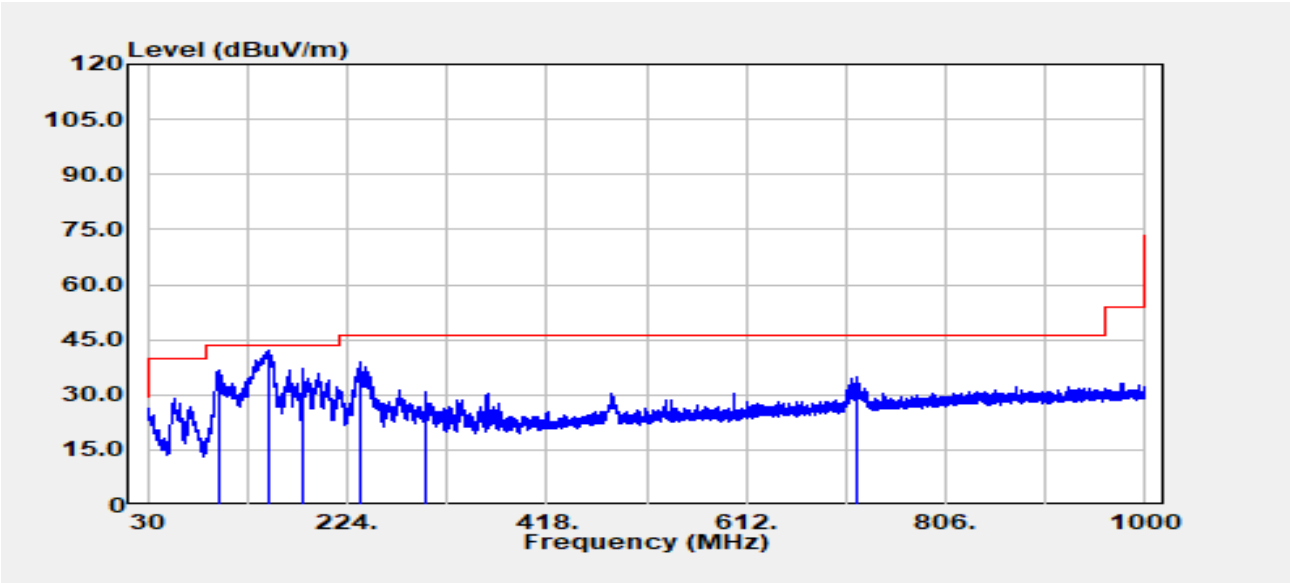


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
98.39	Peak	50.63	-13.98	36.65	43.50	-6.85
146.76	Peak	53.04	-10.84	42.20	43.50	-1.30
179.99	Peak	49.25	-12.19	37.06	43.50	-6.44
235.52	Peak	50.59	-11.70	38.89	46.00	-7.11
300.02	Peak	40.22	-9.33	30.89	46.00	-15.11
720.03	Peak	35.65	-0.86	34.80	46.00	-11.20



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 111 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-20
Operation Band	:802.11a/Band1	Temp./Humi.	:24.5/57
Frequency	:5180 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:38		

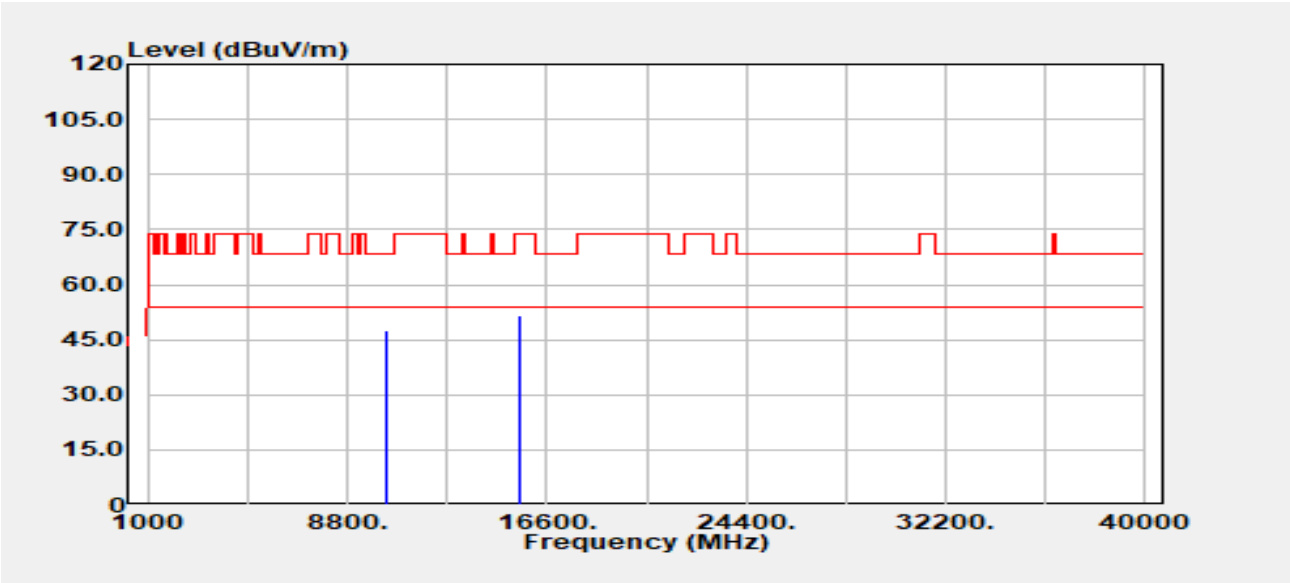


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10360.00	Peak	35.76	11.73	47.49	68.20	-20.71
15540.00	Peak	34.35	17.19	51.55	74.00	-22.45
15540.00	Average	27.58	17.19	44.77	54.00	-9.23



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 112 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-20
Operation Band	:802.11a/Band1	Temp./Humi.	:24.5/57
Frequency	:5180 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:38		

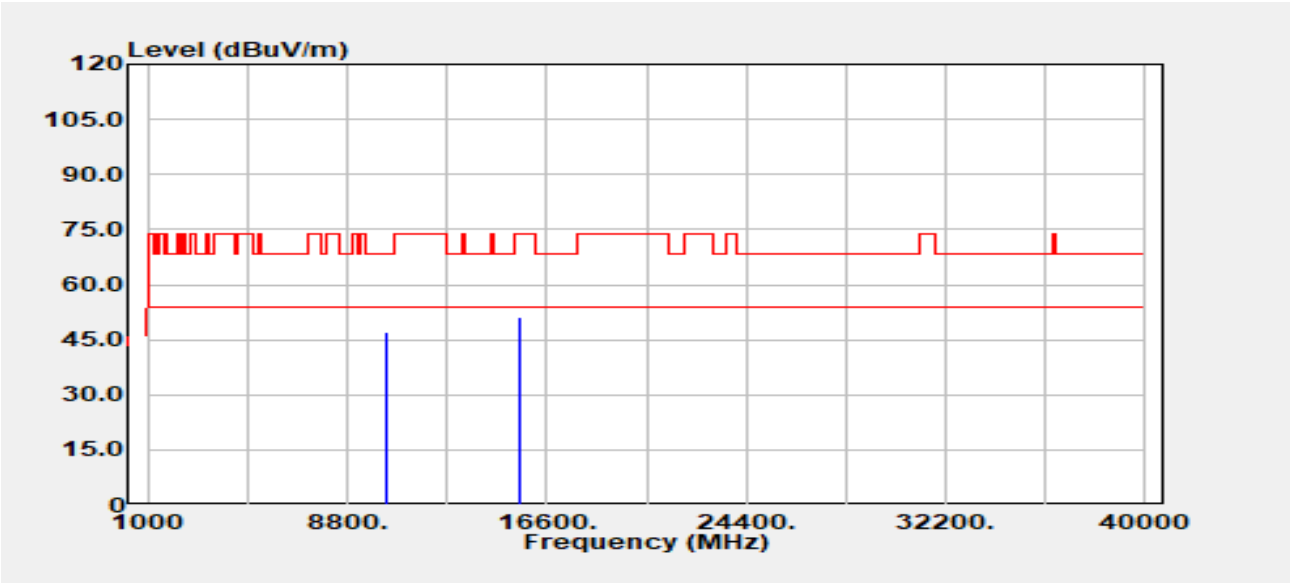


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10360.00	Peak	35.20	11.73	46.93	68.20	-21.27
15540.00	Peak	33.85	17.19	51.04	74.00	-22.96
15540.00	Average	27.61	17.19	44.80	54.00	-9.20



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 113 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-20
Operation Band	:802.11a/Band1	Temp./Humi.	:24.5/57
Frequency	:5220 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:36		

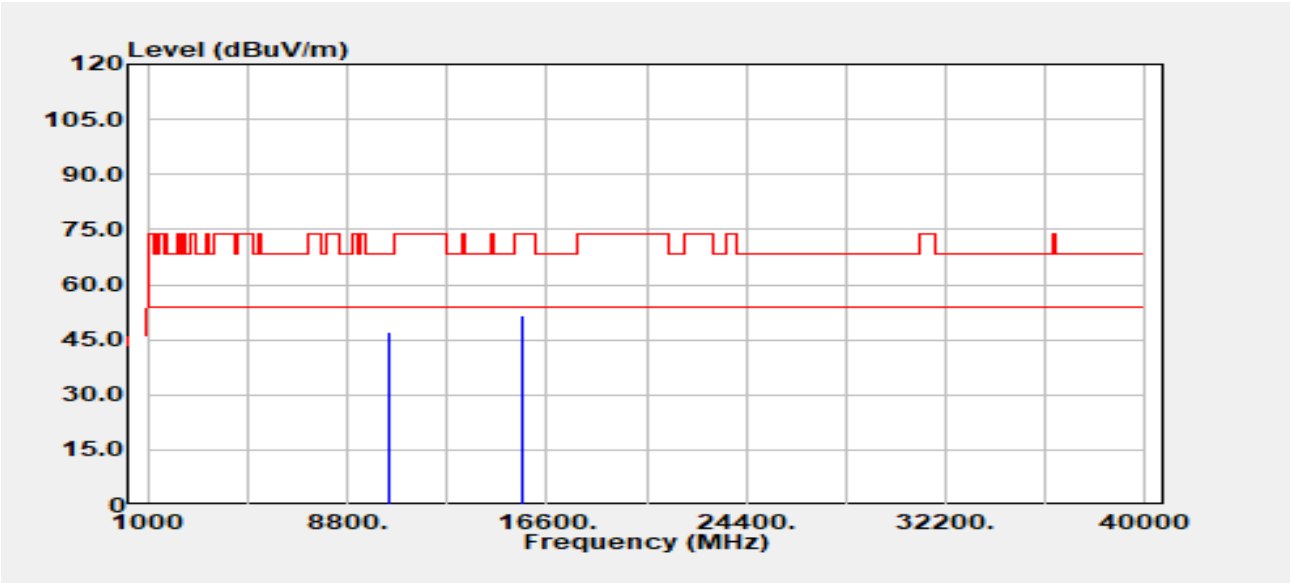


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10440.00	Peak	35.21	11.73	46.94	68.20	-21.26
15660.00	Peak	34.71	17.08	51.79	74.00	-22.21
15660.00	Average	27.93	17.08	45.01	54.00	-8.99



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 114 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-20
Operation Band	:802.11a/Band1	Temp./Humi.	:24.5/57
Frequency	:5220 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:36		

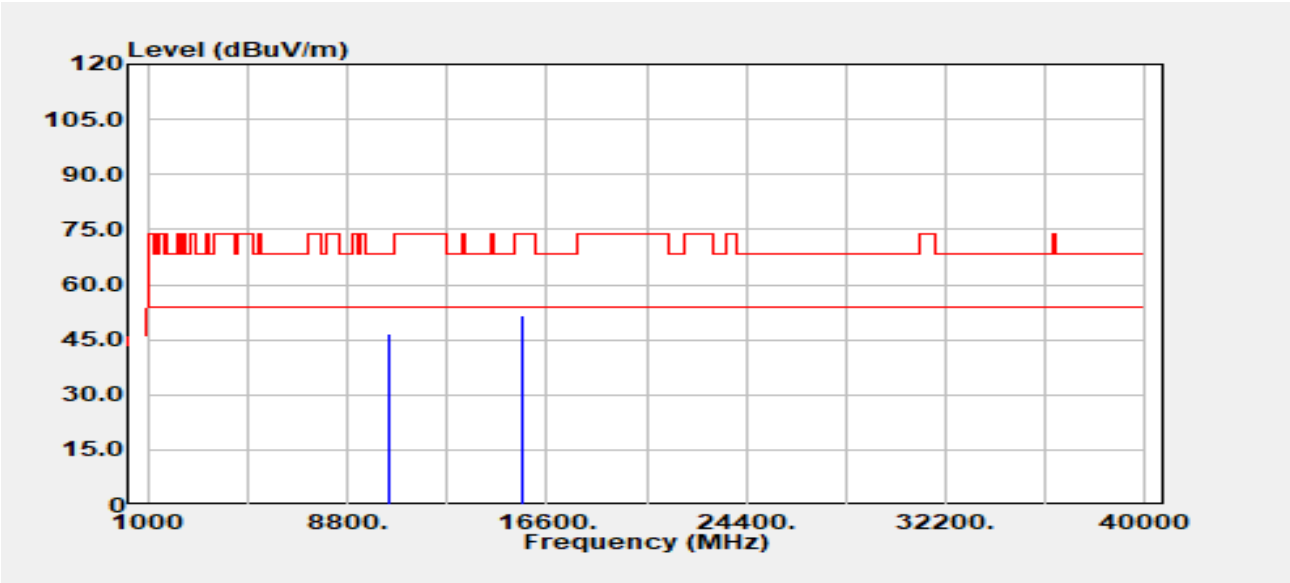


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10440.00	Peak	34.72	11.73	46.46	68.20	-21.74
15660.00	Peak	34.63	17.08	51.70	74.00	-22.30
15660.00	Average	27.82	17.08	44.90	54.00	-9.10



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 115 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-20
Operation Band	:802.11a/Band1	Temp./Humi.	:24.5/57
Frequency	:5240 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:36		

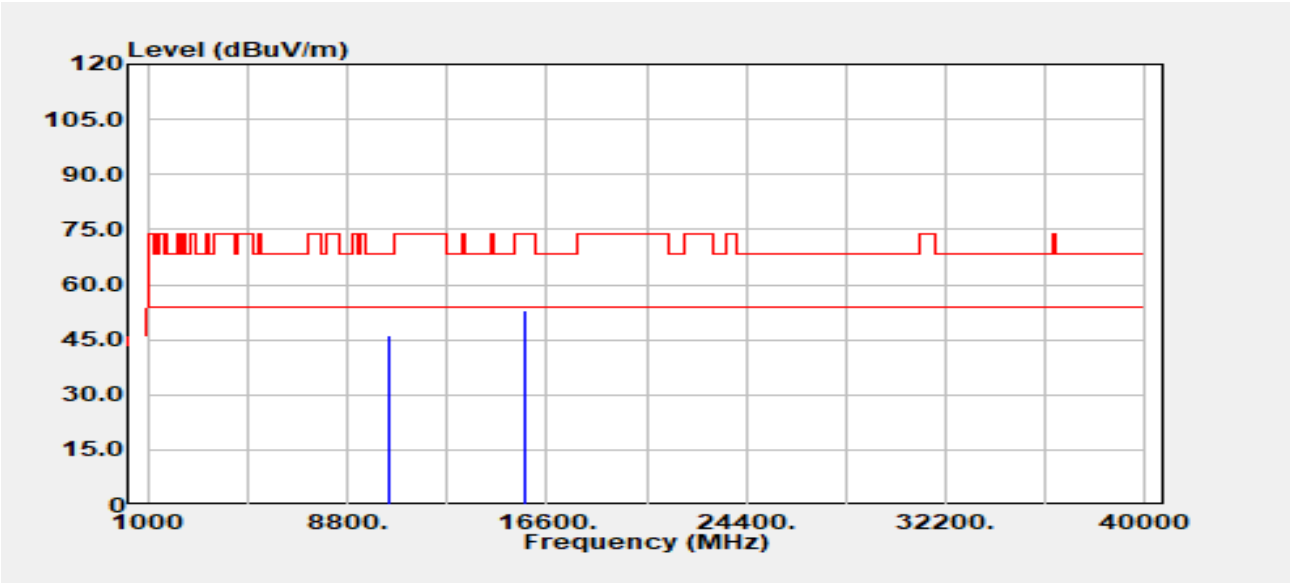


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10480.00	Peak	34.51	11.64	46.16	68.20	-22.04
15720.00	Peak	35.35	17.42	52.77	74.00	-21.23
15720.00	Average	28.12	17.42	45.53	54.00	-8.47



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 116 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-20
Operation Band	:802.11a/Band1	Temp./Humi.	:24.5/57
Frequency	:5240 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:36		

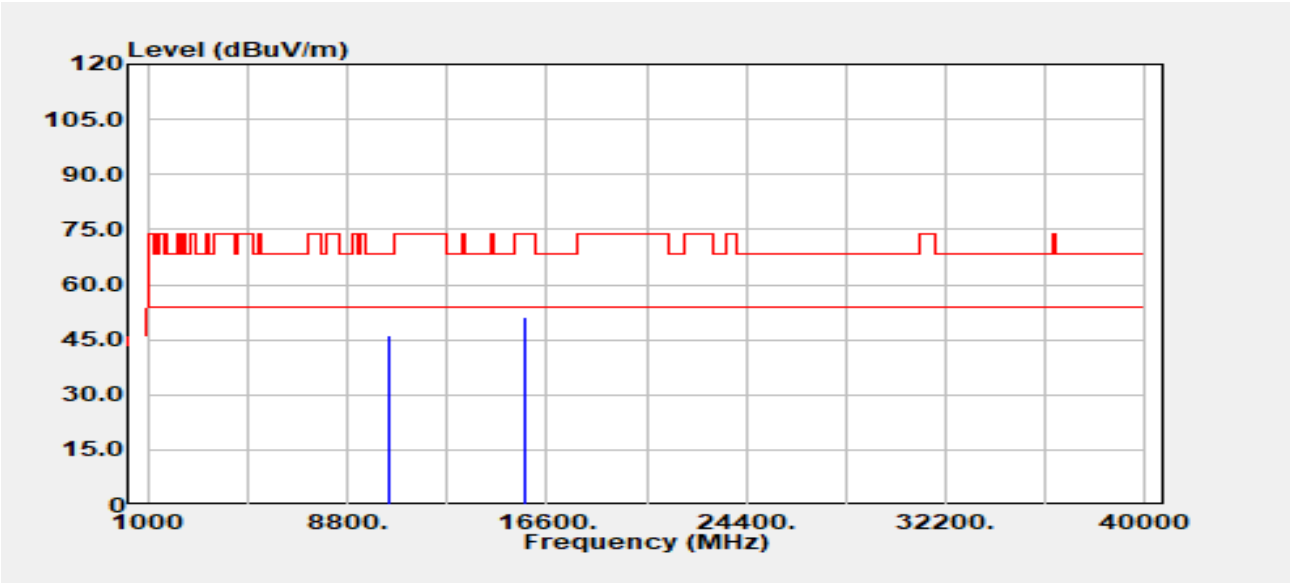


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10480.00	Peak	34.66	11.64	46.30	68.20	-21.90
15720.00	Peak	33.90	17.42	51.32	74.00	-22.68
15720.00	Average	28.19	17.42	45.61	54.00	-8.39



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 117 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-20
Operation Band	:802.11n20/Band1	Temp./Humi.	:24.5/57
Frequency	:5180 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:39		

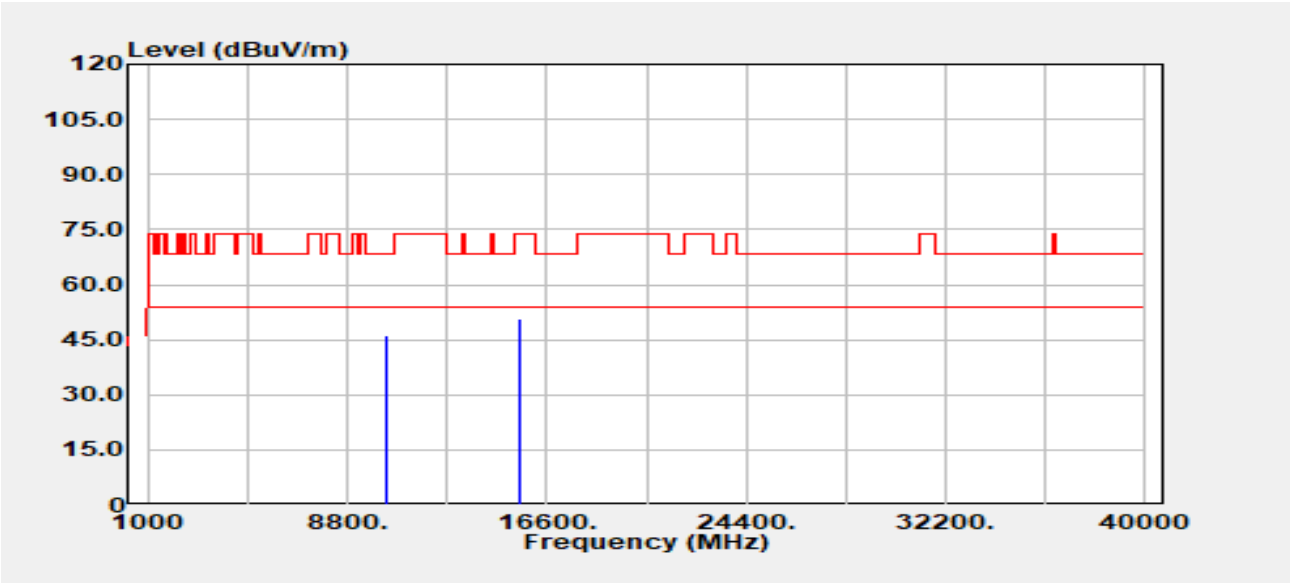


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10360.00	Peak	34.58	11.73	46.31	68.20	-21.89
15540.00	Peak	33.54	17.19	50.74	74.00	-23.26
15540.00	Average	27.70	17.19	44.89	54.00	-9.11



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 118 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-20
Operation Band	:802.11n20/Band1	Temp./Humi.	:24.5/57
Frequency	:5180 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:39		

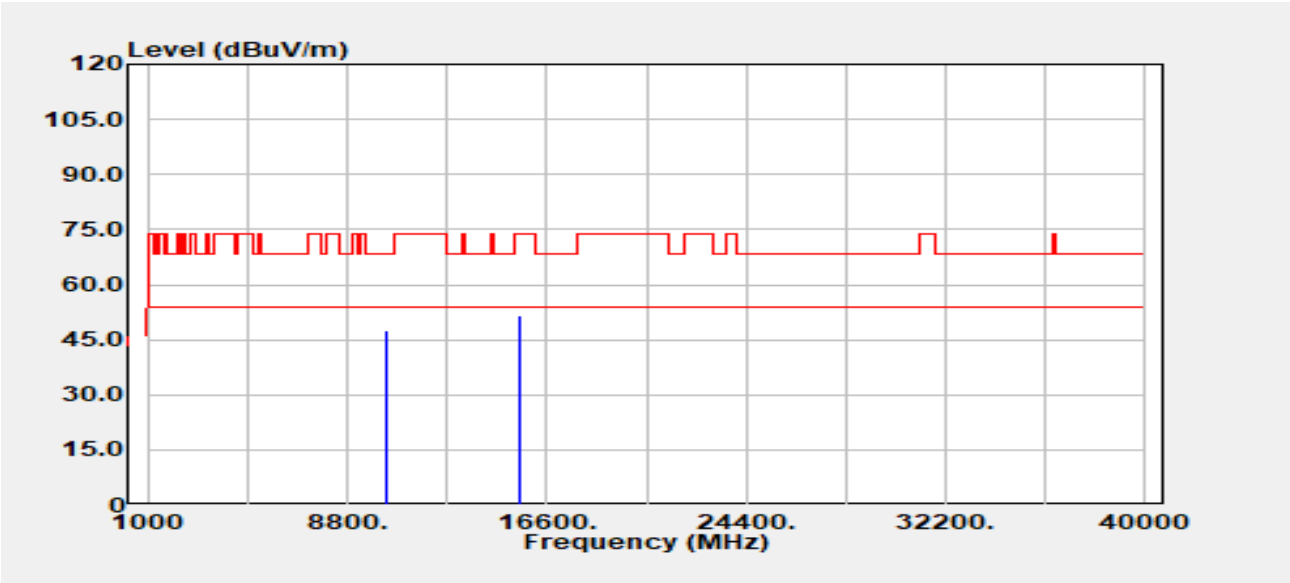


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10360.00	Peak	35.72	11.73	47.45	68.20	-20.75
15540.00	Peak	34.59	17.19	51.78	74.00	-22.22
15540.00	Average	27.66	17.19	44.85	54.00	-9.15



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 119 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-20
Operation Band	:802.11n20/Band1	Temp./Humi.	:24.5/57
Frequency	:5220 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:37		

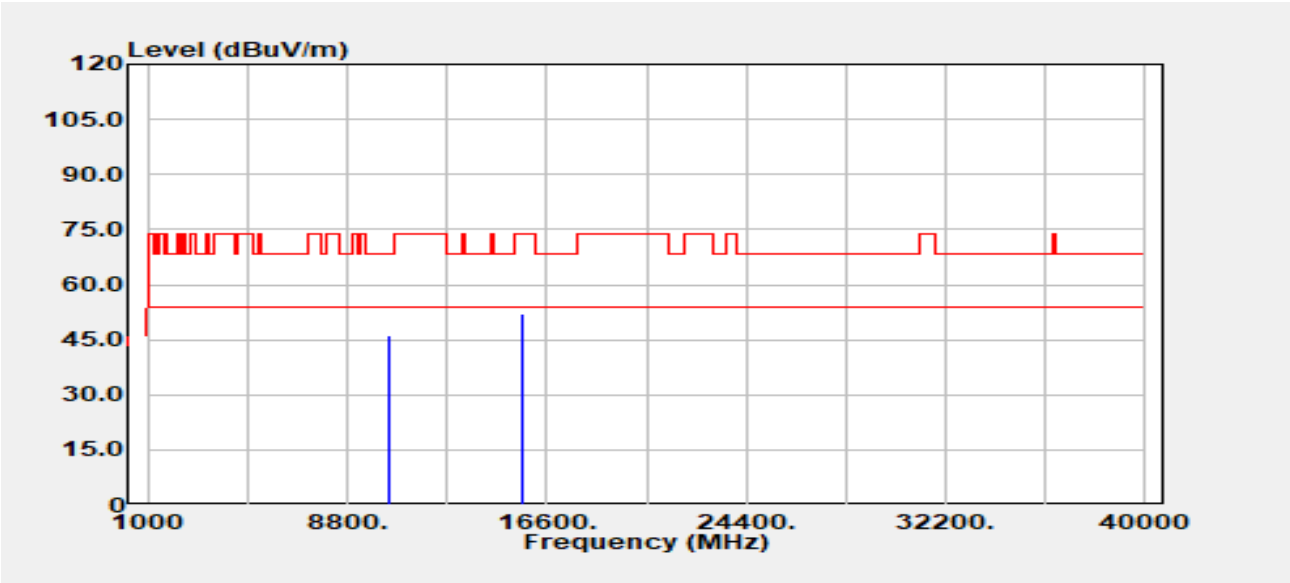


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10440.00	Peak	34.55	11.73	46.28	68.20	-21.92
15660.00	Peak	34.95	17.08	52.03	74.00	-21.97
15660.00	Average	27.92	17.08	45.00	54.00	-9.00



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 120 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-20
Operation Band	:802.11n20/Band1	Temp./Humi.	:24.5/57
Frequency	:5220 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:37		

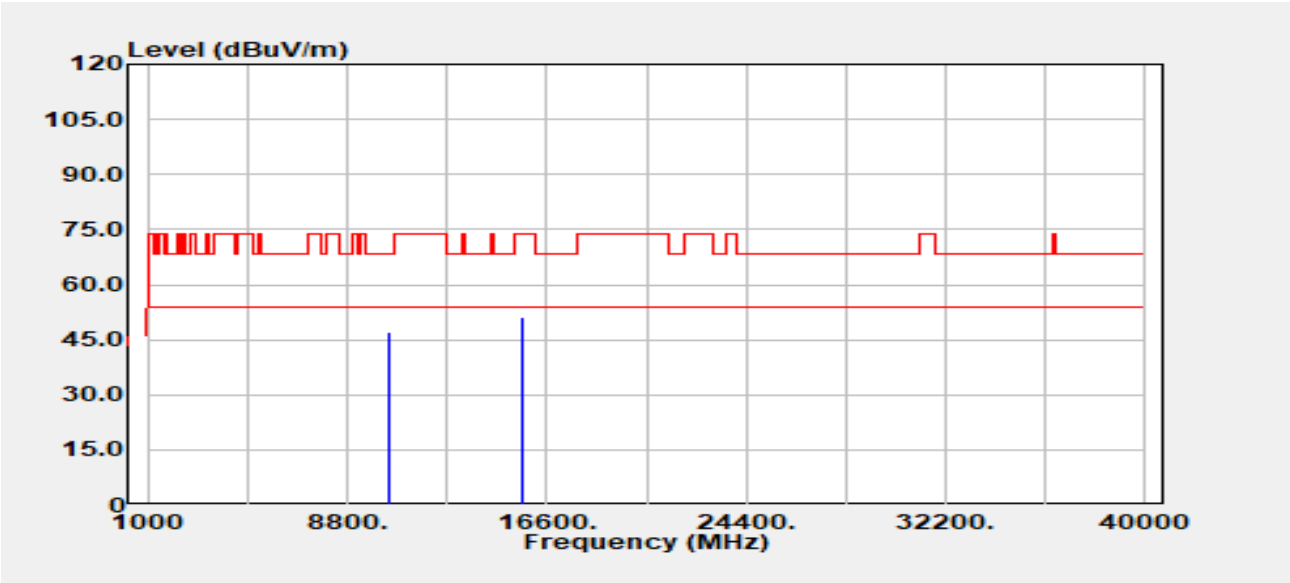


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10440.00	Peak	35.54	11.73	47.27	68.20	-20.93
15660.00	Peak	34.31	17.08	51.39	74.00	-22.61
15660.00	Average	27.82	17.08	44.90	54.00	-9.10



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 121 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-21
Operation Band	:802.11n20/Band1	Temp./Humi.	:24.5/57
Frequency	:5240 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:37		

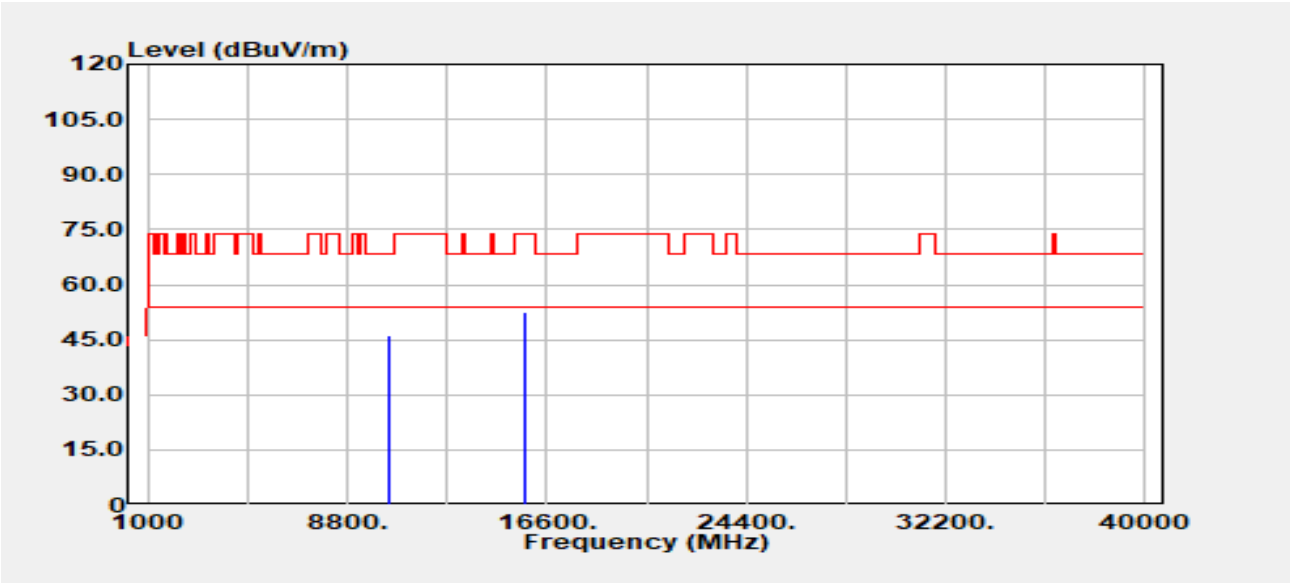


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10480.00	Peak	34.74	11.64	46.39	68.20	-21.81
15720.00	Peak	34.92	17.42	52.34	74.00	-21.66
15720.00	Average	28.13	17.42	45.55	54.00	-8.45



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 122 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-21
Operation Band	:802.11n20/Band1	Temp./Humi.	:24.5/57
Frequency	:5240 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:37		

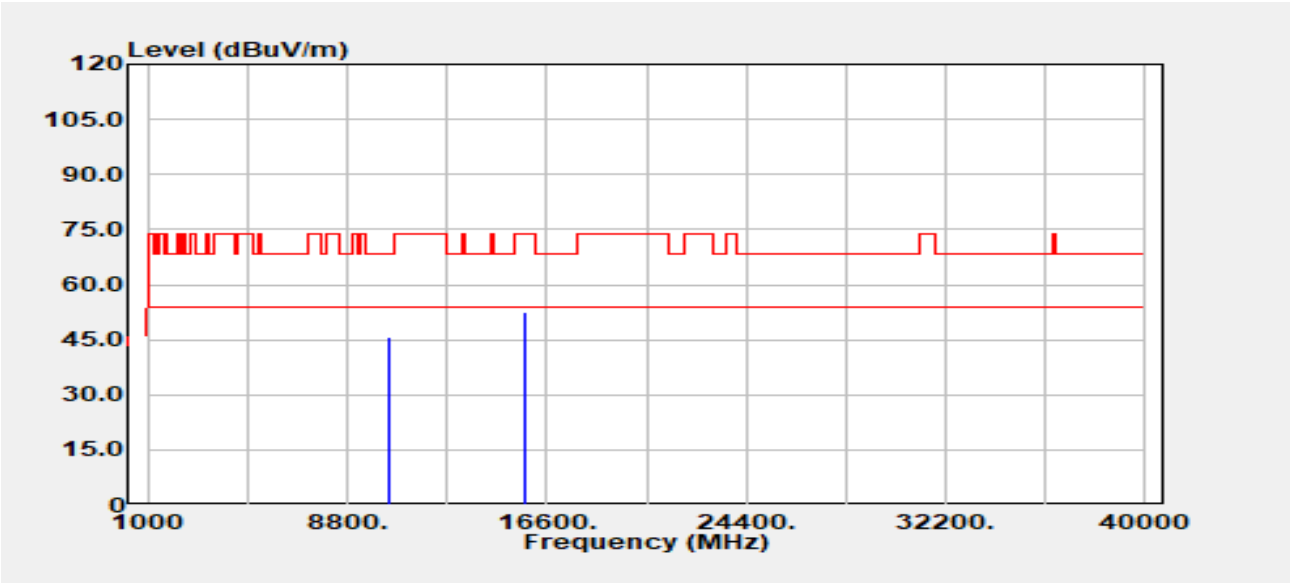


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10480.00	Peak	34.25	11.64	45.89	68.20	-22.31
15720.00	Peak	35.31	17.42	52.73	74.00	-21.27
15720.00	Average	28.27	17.42	45.69	54.00	-8.31



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 123 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-23
Operation Band	:802.11n40/Band1	Temp./Humi.	:24.7/58
Frequency	:5190 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E2	Test Chamber	: 966A
Setting	:39		

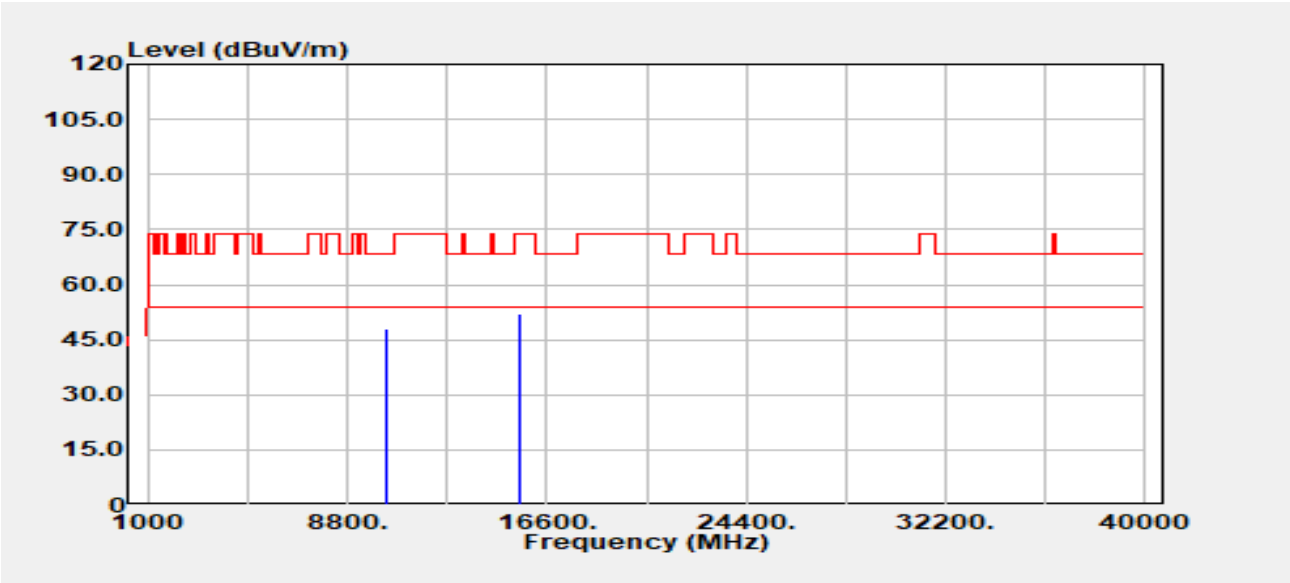


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10380.00	Peak	36.15	11.75	47.90	68.20	-20.30
15570.00	Peak	34.57	17.34	51.91	74.00	-22.09
15570.00	Average	26.33	17.34	43.67	54.00	-10.33



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 124 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-23
Operation Band	:802.11n40/Band1	Temp./Humi.	:24.7/58
Frequency	:5190 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E2	Test Chamber	: 966A
Setting	:39		

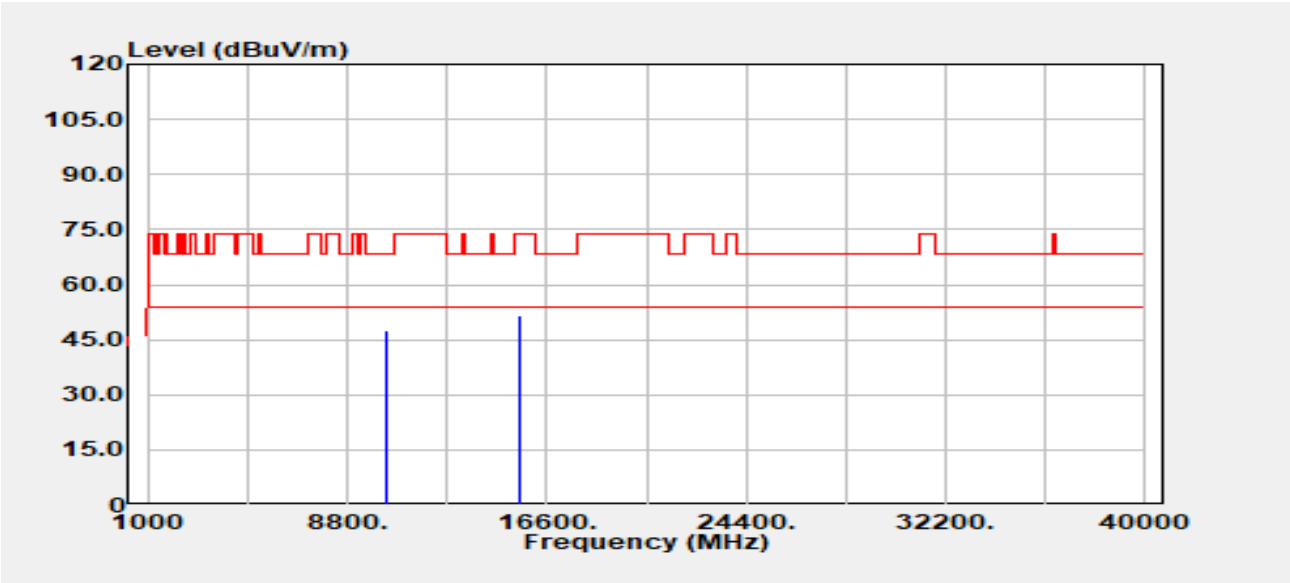


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10380.00	Peak	35.84	11.75	47.59	68.20	-20.61
15570.00	Peak	34.49	17.34	51.83	74.00	-22.17
15570.00	Average	26.49	17.34	43.83	54.00	-10.17



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 125 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-23
Operation Band	:802.11n40/Band1	Temp./Humi.	:24.7/58
Frequency	:5230 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E2	Test Chamber	: 966A
Setting	:37		

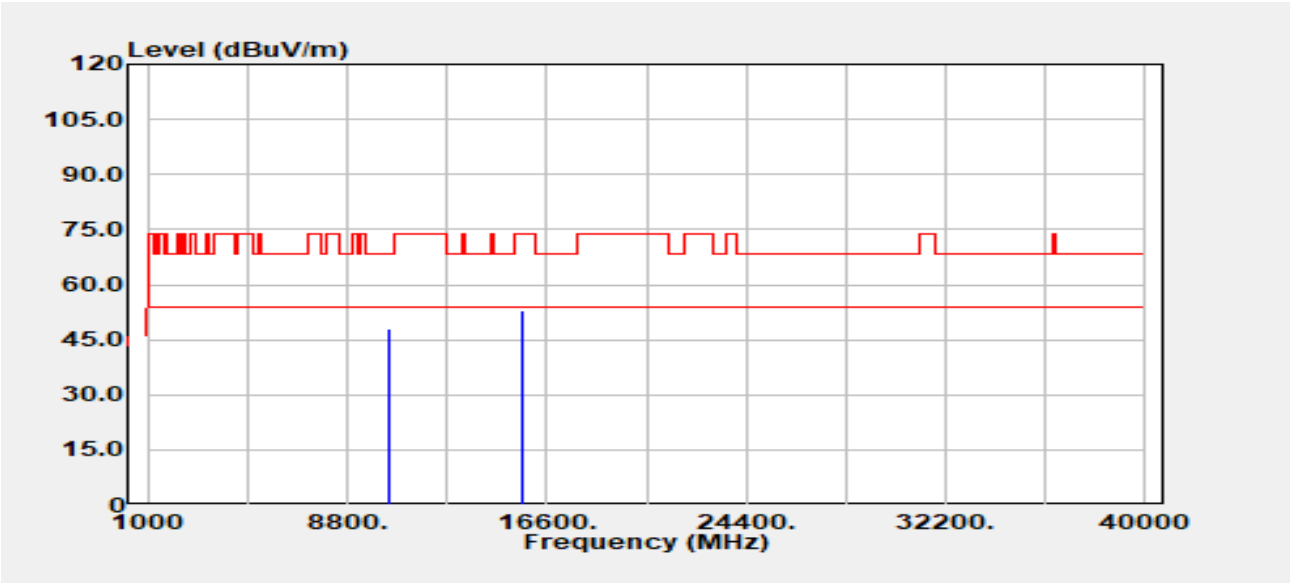

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10460.00	Peak	36.52	11.70	48.22	68.20	-19.98
15690.00	Peak	35.87	17.10	52.98	74.00	-21.02
15690.00	Average	26.57	17.10	43.67	54.00	-10.33




Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 126 / 208
Rev.: 01

Project No :TM-2411000185P
Operation Band :802.11n40/Band1
Frequency :5230 MHz
Operation Mode :TX
EUT Pol :E2
Setting :37

Test Date :2024-12-23
Temp./Humi. :24.7/58
Antenna Pol. :HORIZONTAL
Engineer :Tony Chao
Test Chamber : 966A

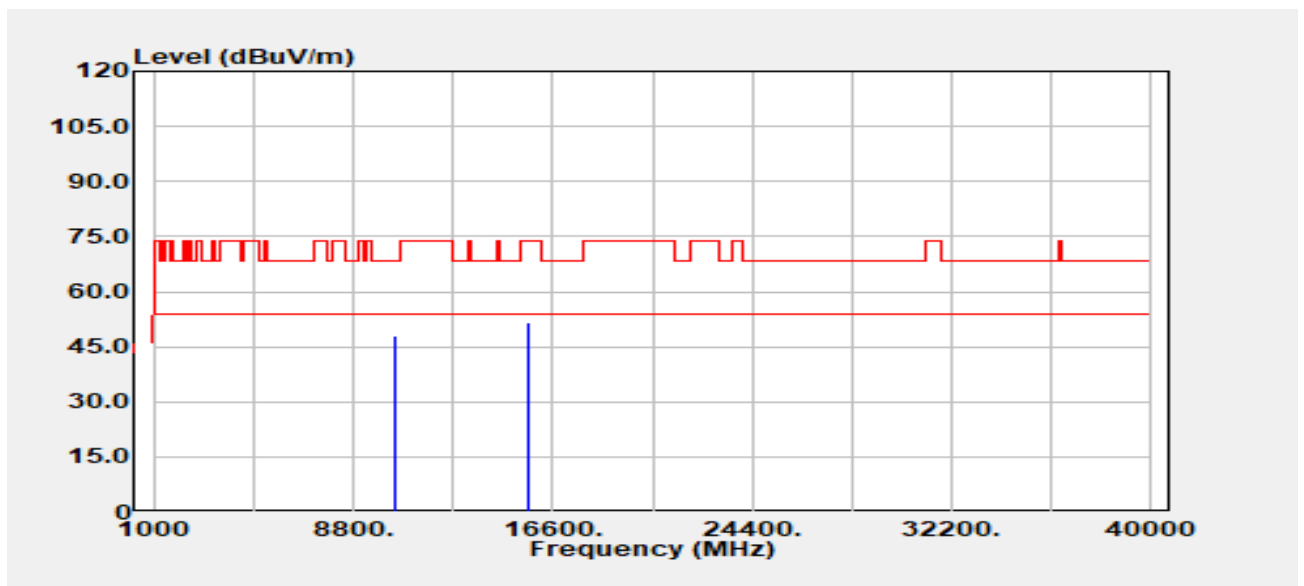


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10460.00	Peak	36.10	11.70	47.80	68.20	-20.40
15690.00	Peak	34.70	17.10	51.80	74.00	-22.20
15690.00	Average	26.50	17.10	43.60	54.00	-10.40



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 127 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-23
Operation Band	:802.11ac80/Band1	Temp./Humi.	:24.7/58
Frequency	:5210 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E2	Test Chamber	: 966A
Setting	:38		

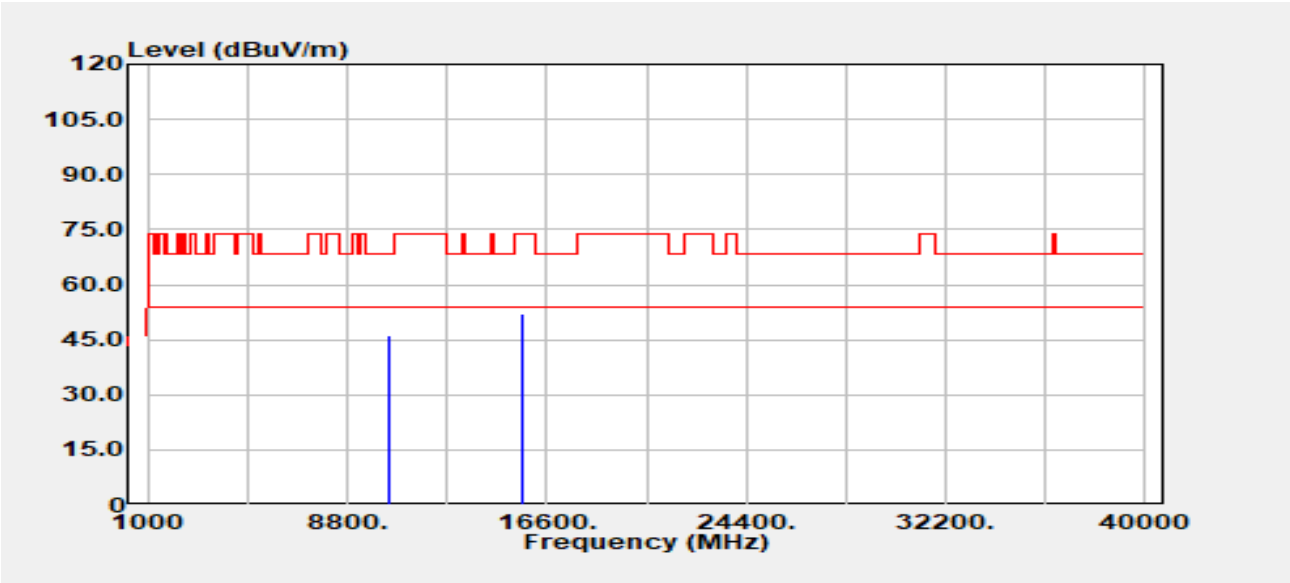


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10420.00	Peak	34.36	11.75	46.11	68.20	-22.09
15630.00	Peak	34.93	17.20	52.14	74.00	-21.86
15630.00	Average	26.42	17.20	43.62	54.00	-10.38



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 128 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-23
Operation Band	:802.11ac80/Band1	Temp./Humi.	:24.7/58
Frequency	:5210 MHz	Antenna Pol.	:HORIZONTAL
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E2	Test Chamber	: 966A
Setting	:38		

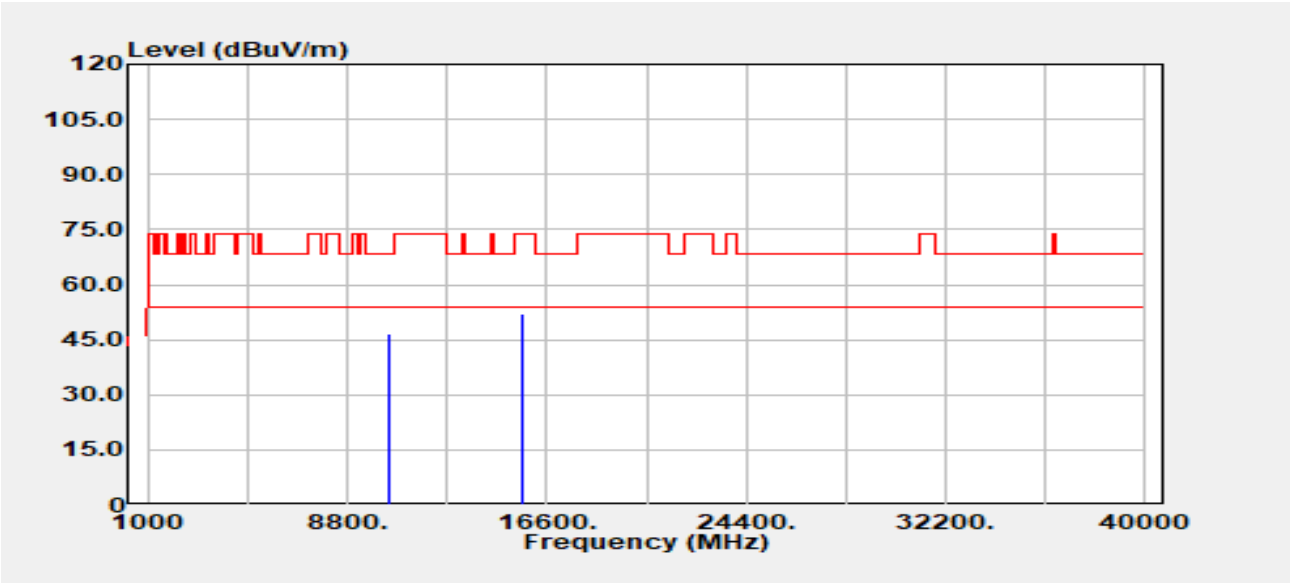


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10420.00	Peak	34.94	11.75	46.69	68.20	-21.51
15630.00	Peak	34.84	17.20	52.04	74.00	-21.96
15630.00	Average	26.29	17.20	43.49	54.00	-10.51



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 129 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-06
Operation Band	:802.11ac80/Band2	Temp./Humi.	:24.7/57
Frequency	:5290 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:		

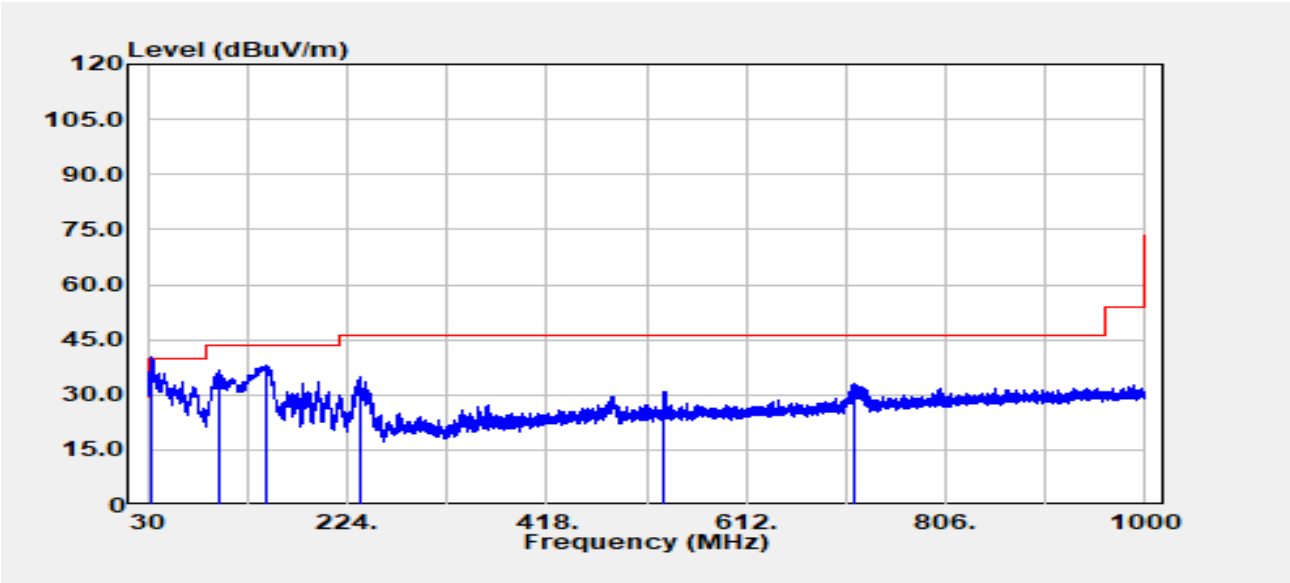


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
34.73	QP	41.71	-6.25	35.46	40.00	-4.54
98.87	Peak	50.51	-13.83	36.67	43.50	-6.83
145.92	Peak	48.90	-10.92	37.98	43.50	-5.52
235.52	Peak	46.42	-11.70	34.72	46.00	-11.28
531.61	Peak	34.71	-3.91	30.80	46.00	-15.20
717.61	Peak	34.00	-0.84	33.17	46.00	-12.83



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 130 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-06
Operation Band	:802.11ac80/Band2	Temp./Humi.	:24.7/57
Frequency	:5290 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:		

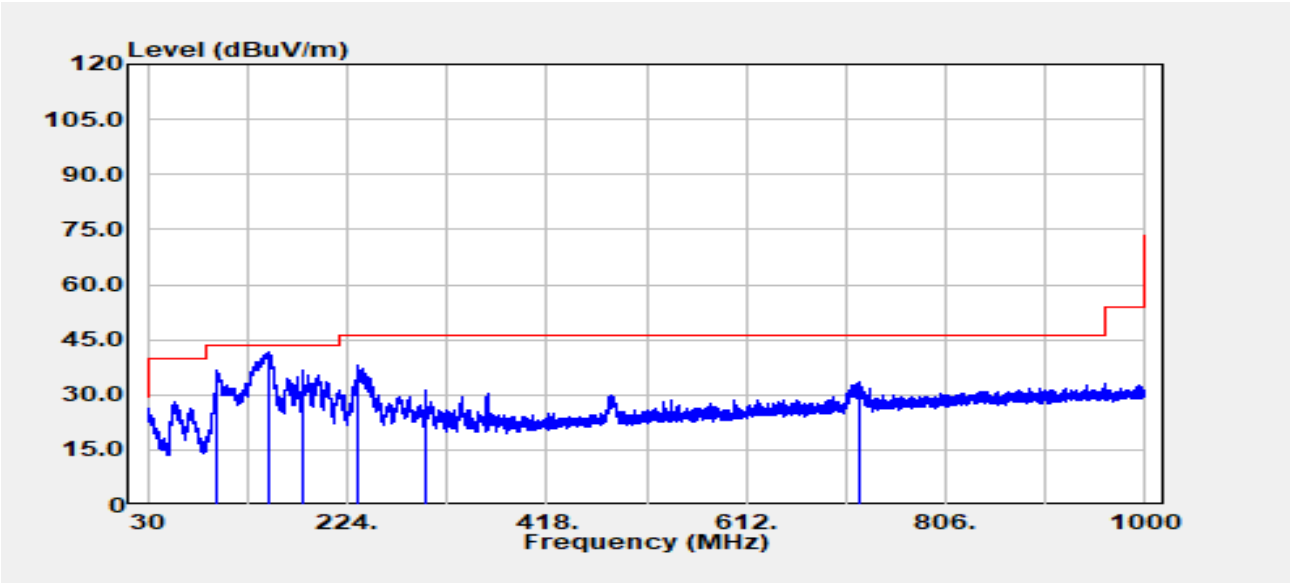


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
97.66	Peak	50.89	-14.16	36.73	43.50	-6.77
147.61	Peak	52.47	-10.94	41.53	43.50	-1.97
179.99	Peak	48.98	-12.19	36.79	43.50	-6.71
235.16	Peak	49.68	-11.72	37.96	46.00	-8.04
300.02	Peak	40.77	-9.33	31.44	46.00	-14.56
722.46	Peak	34.11	-0.78	33.33	46.00	-12.67



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 131 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-23
Operation Band	:802.11a/Band2	Temp./Humi.	:24.7/58
Frequency	:5260 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E2	Test Chamber	: 966A
Setting	:35		

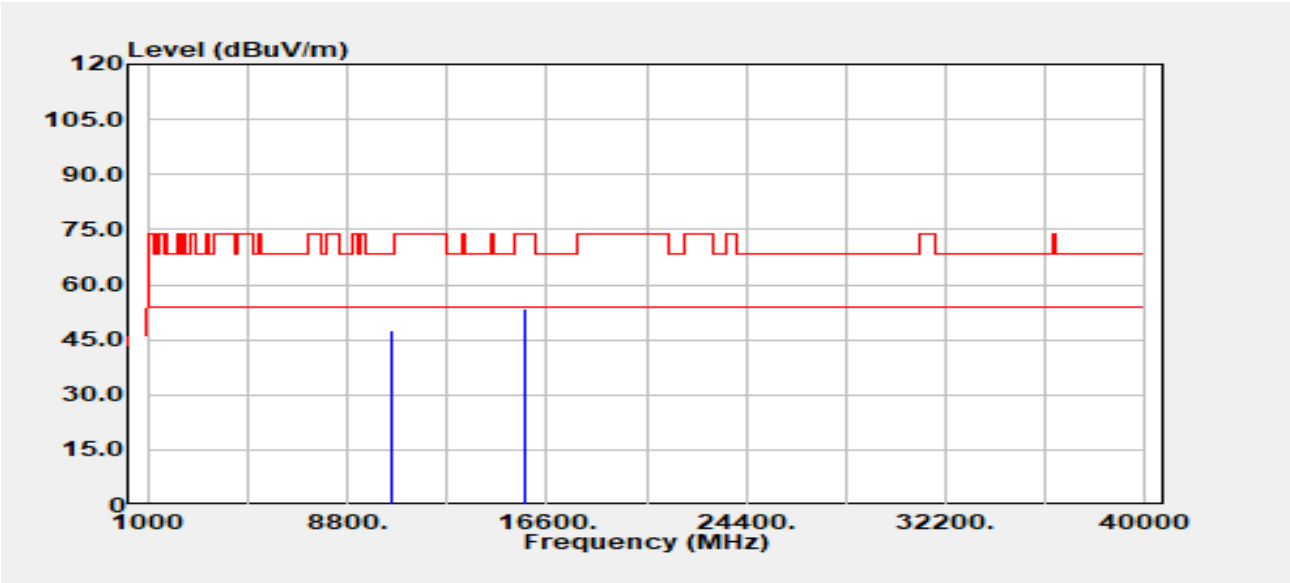


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10520.00	Peak	35.65	11.73	47.38	68.20	-20.82
15780.00	Peak	35.89	17.76	53.65	74.00	-20.35
15780.00	Average	27.09	17.76	44.85	54.00	-9.15



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 132 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-23
Operation Band	:802.11a/Band2	Temp./Humi.	:24.7/58
Frequency	:5260 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E2	Test Chamber	: 966A
Setting	:35		

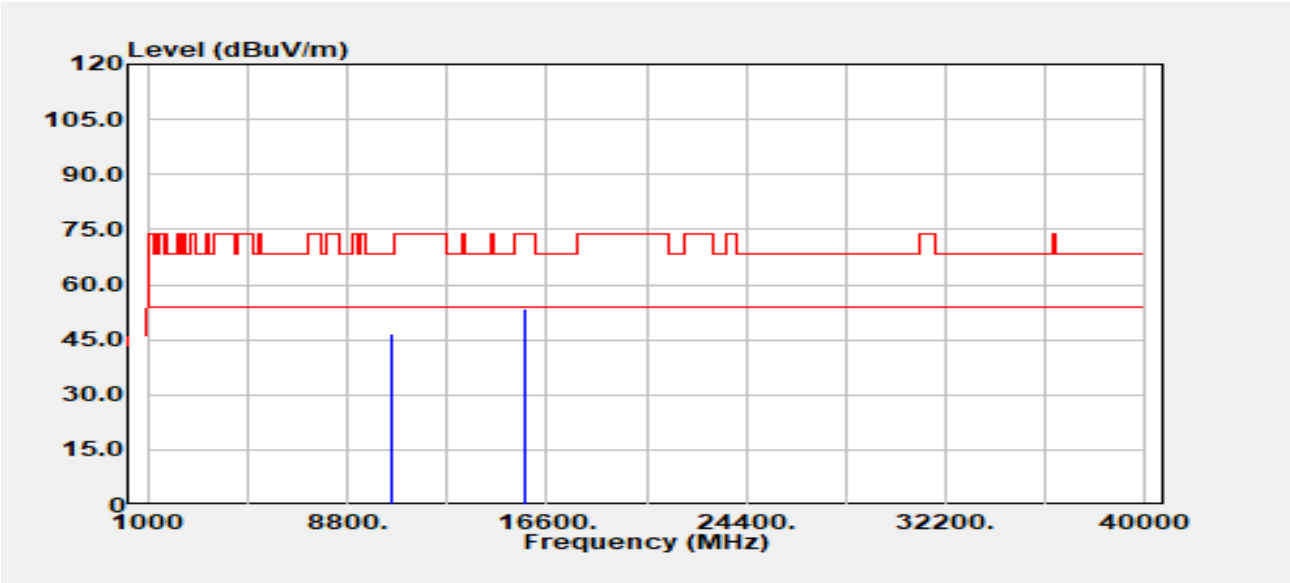


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10520.00	Peak	34.82	11.73	46.55	68.20	-21.65
15780.00	Peak	35.90	17.76	53.66	74.00	-20.34
15780.00	Average	26.99	17.76	44.75	54.00	-9.25



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 133 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-23
Operation Band	:802.11a/Band2	Temp./Humi.	:24.7/58
Frequency	:5300 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E2	Test Chamber	: 966A
Setting	:35		

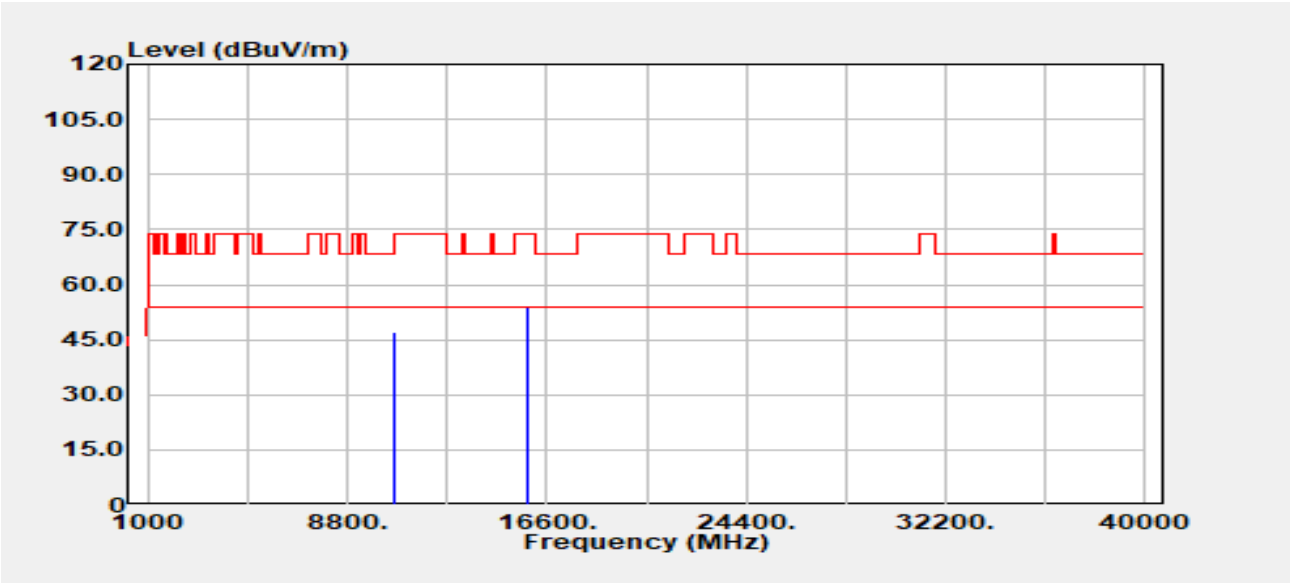


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10600.00	Peak	34.95	12.07	47.02	68.20	-21.18
15900.00	Peak	35.82	17.94	53.76	74.00	-20.24
15900.00	Average	27.61	17.94	45.55	54.00	-8.45



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 134 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-23
Operation Band	:802.11a/Band2	Temp./Humi.	:24.7/58
Frequency	:5300 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E2	Test Chamber	: 966A
Setting	:35		

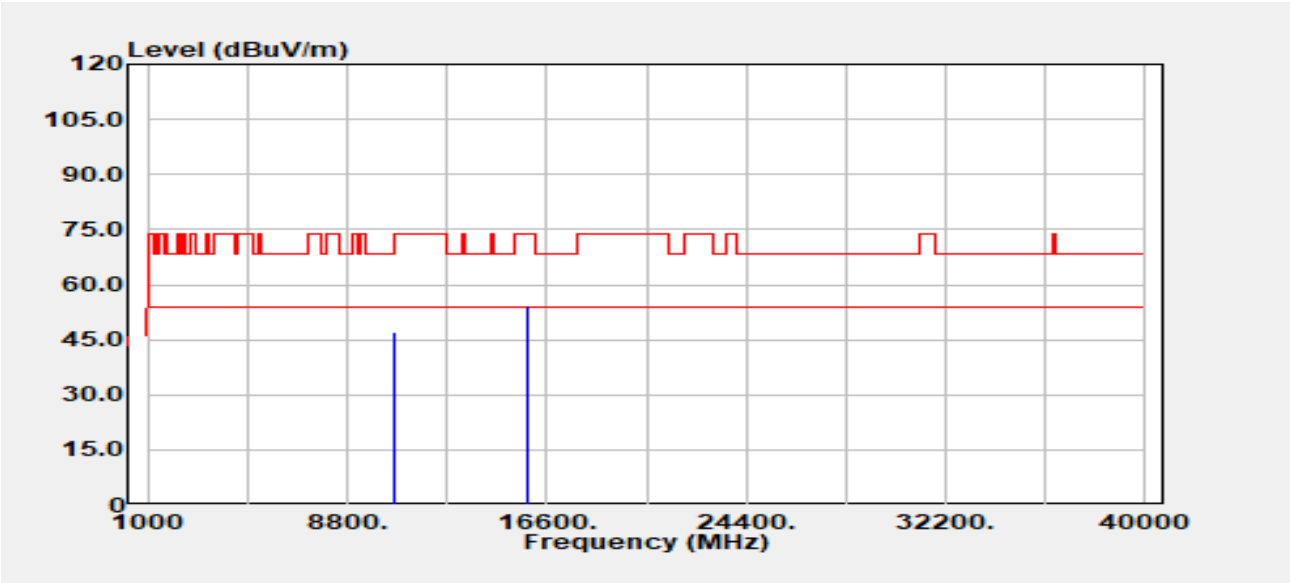


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10600.00	Peak	35.05	12.07	47.12	68.20	-21.08
15900.00	Peak	36.39	17.94	54.33	74.00	-19.67
15900.00	Average	27.62	17.94	45.56	54.00	-8.44



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 135 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-23
Operation Band	:802.11a/Band2	Temp./Humi.	:24.7/58
Frequency	:5320 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E2	Test Chamber	: 966A
Setting	:35		

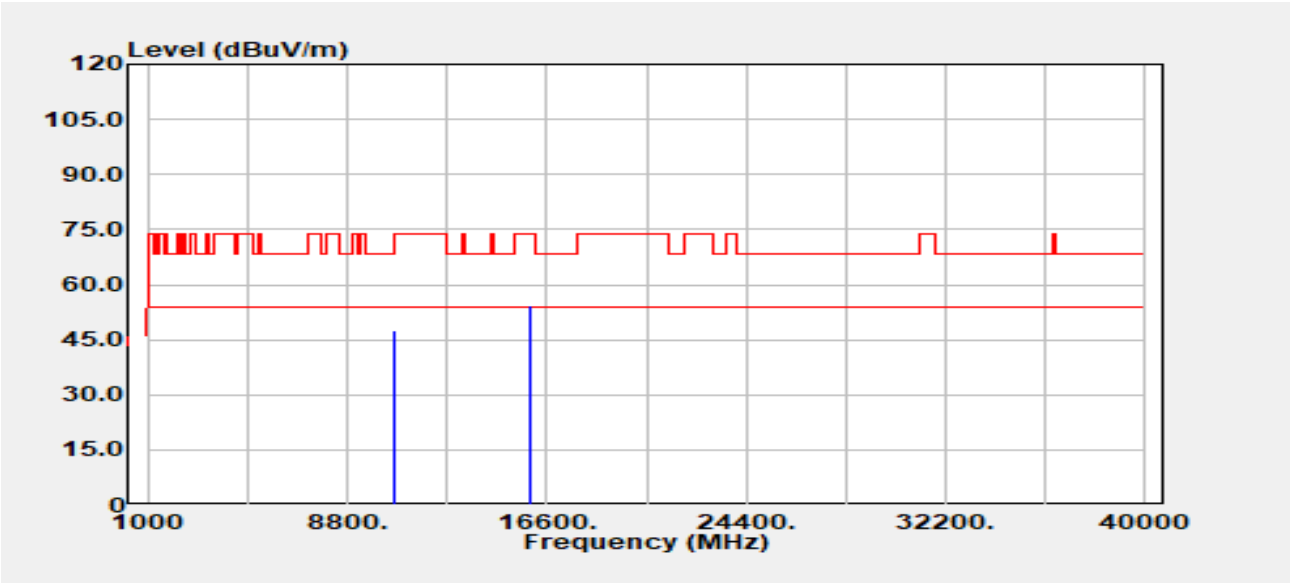


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10640.00	Peak	35.66	12.09	47.75	74.00	-26.25
10640.00	Average	27.23	12.09	39.32	54.00	-14.68
15960.00	Peak	35.95	18.56	54.51	74.00	-19.49
15960.00	Average	27.10	18.56	45.65	54.00	-8.35



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 136 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-23
Operation Band	:802.11a/Band2	Temp./Humi.	:24.7/58
Frequency	:5320 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E2	Test Chamber	: 966A
Setting	:35		

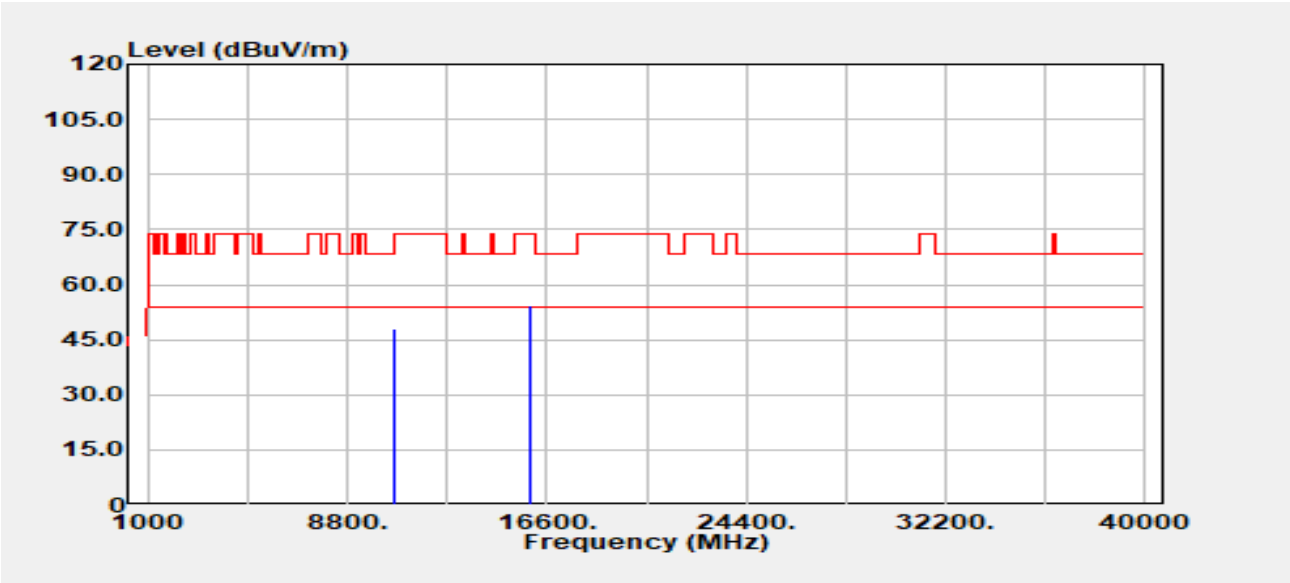


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10640.00	Peak	35.88	12.09	47.97	74.00	-26.03
10640.00	Average	27.35	12.09	39.44	54.00	-14.56
15960.00	Peak	35.68	18.56	54.24	74.00	-19.76
15960.00	Average	27.01	18.56	45.57	54.00	-8.43



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 137 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-23
Operation Band	:802.1n20/Band2	Temp./Humi.	:24.7/58
Frequency	:5260 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E2	Test Chamber	: 966A
Setting	:36		

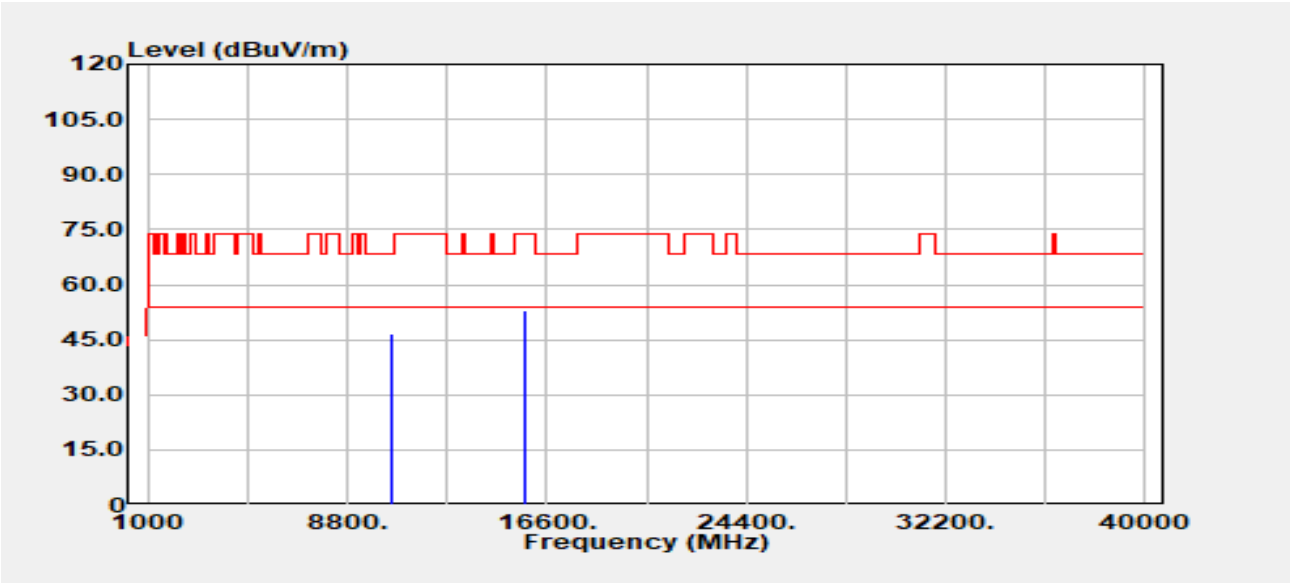


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10520.00	Peak	35.06	11.73	46.78	68.20	-21.42
15780.00	Peak	35.22	17.76	52.98	74.00	-21.02
15780.00	Average	28.64	17.76	46.40	54.00	-7.60



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 138 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-23
Operation Band	:802.1n20/Band2	Temp./Humi.	:24.7/58
Frequency	:5260 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E2	Test Chamber	: 966A
Setting	:36		

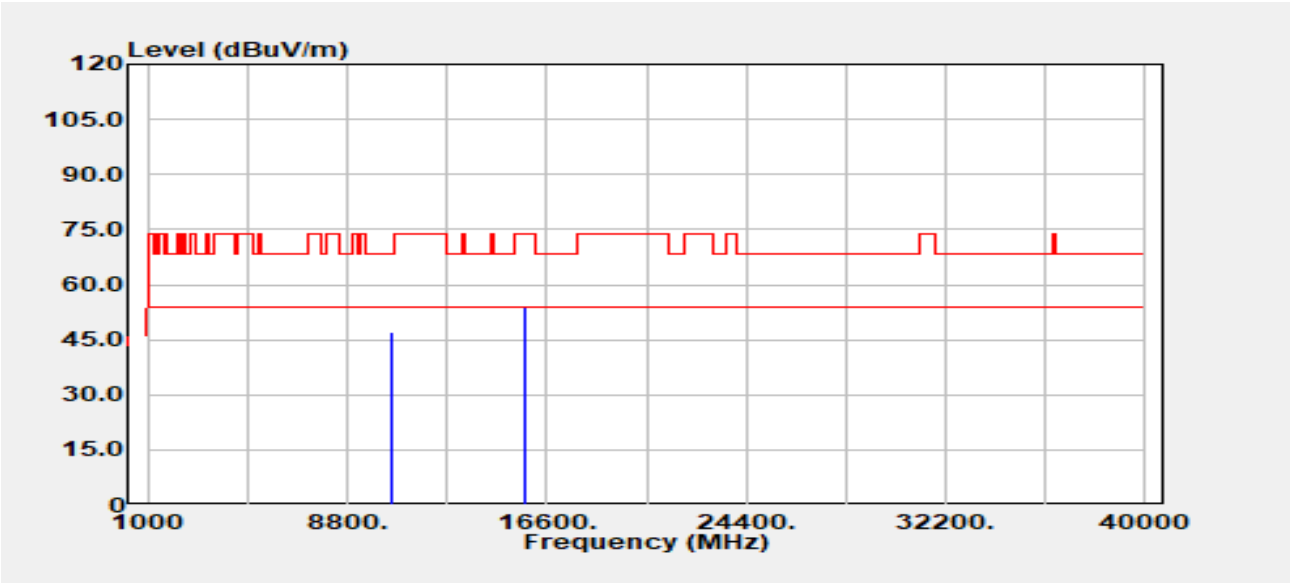


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10520.00	Peak	35.57	11.73	47.30	68.20	-20.90
15780.00	Peak	36.19	17.76	53.95	74.00	-20.05
15780.00	Average	28.58	17.76	46.34	54.00	-7.66



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 139 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-23
Operation Band	:802.1n20/Band2	Temp./Humi.	:24.7/58
Frequency	:5300 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E2	Test Chamber	: 966A
Setting	:36		

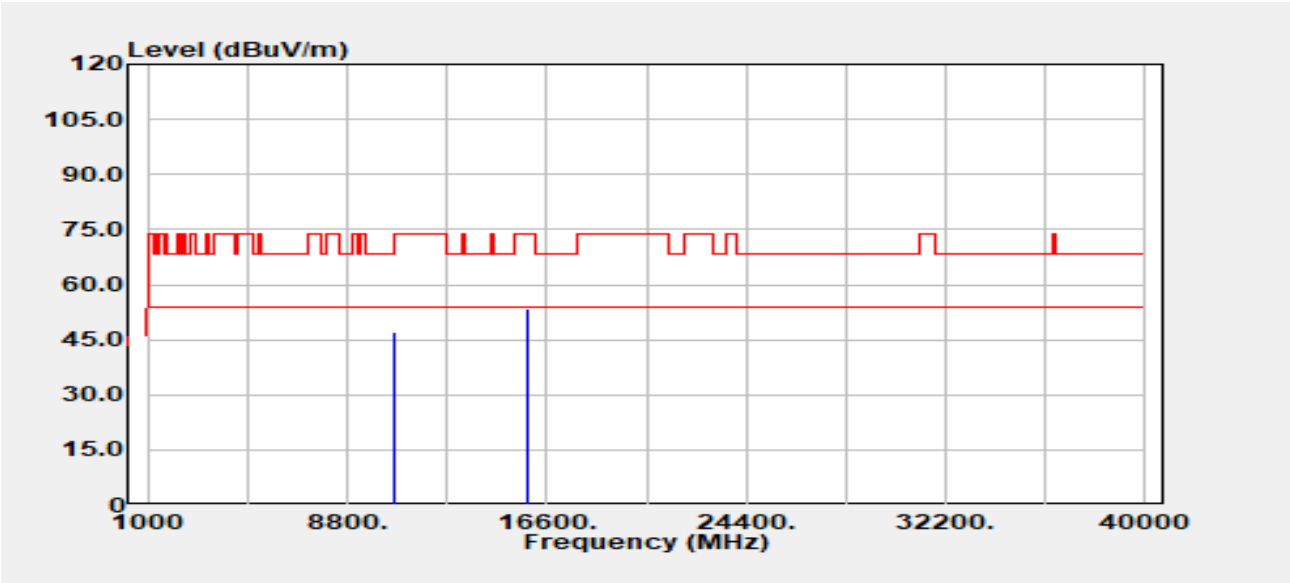


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10600.00	Peak	35.10	12.07	47.17	68.20	-21.03
15900.00	Peak	35.68	17.94	53.62	74.00	-20.38
15900.00	Average	29.19	17.94	47.13	54.00	-6.87



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 140 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-23
Operation Band	:802.1n20/Band2	Temp./Humi.	:24.7/58
Frequency	:5300 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E2	Test Chamber	: 966A
Setting	:36		

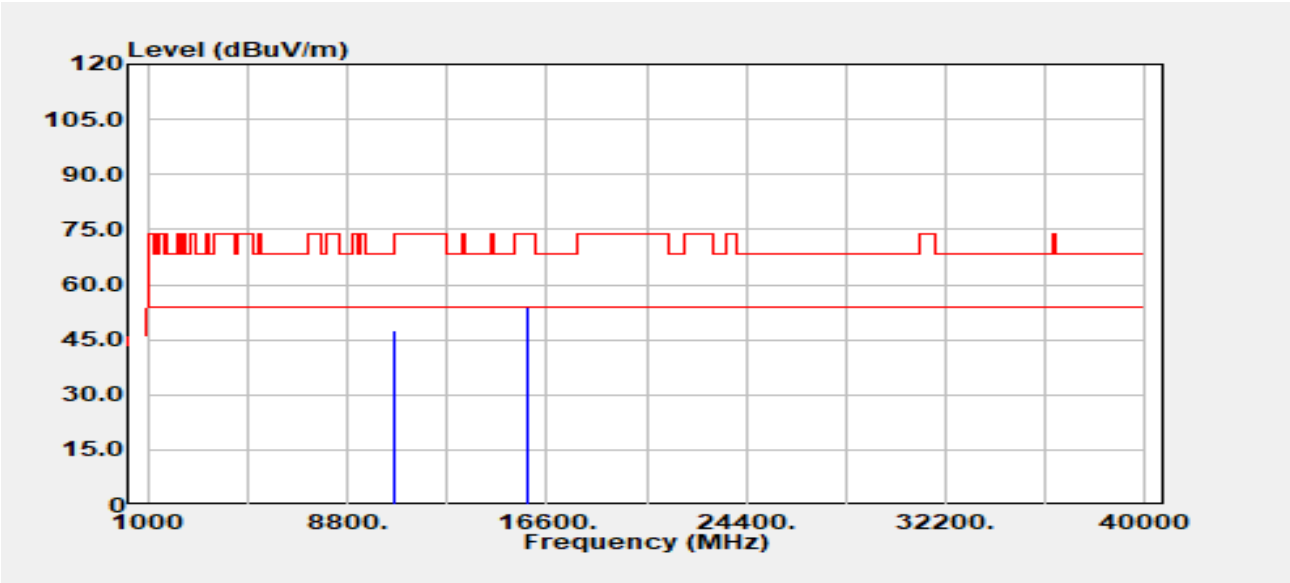


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10600.00	Peak	35.45	12.07	47.52	68.20	-20.68
15900.00	Peak	36.17	17.94	54.11	74.00	-19.89
15900.00	Average	29.07	17.94	47.01	54.00	-6.99



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 141 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-23
Operation Band	:802.1n20/Band2	Temp./Humi.	:24.7/58
Frequency	:5320 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E2	Test Chamber	: 966A
Setting	:36		

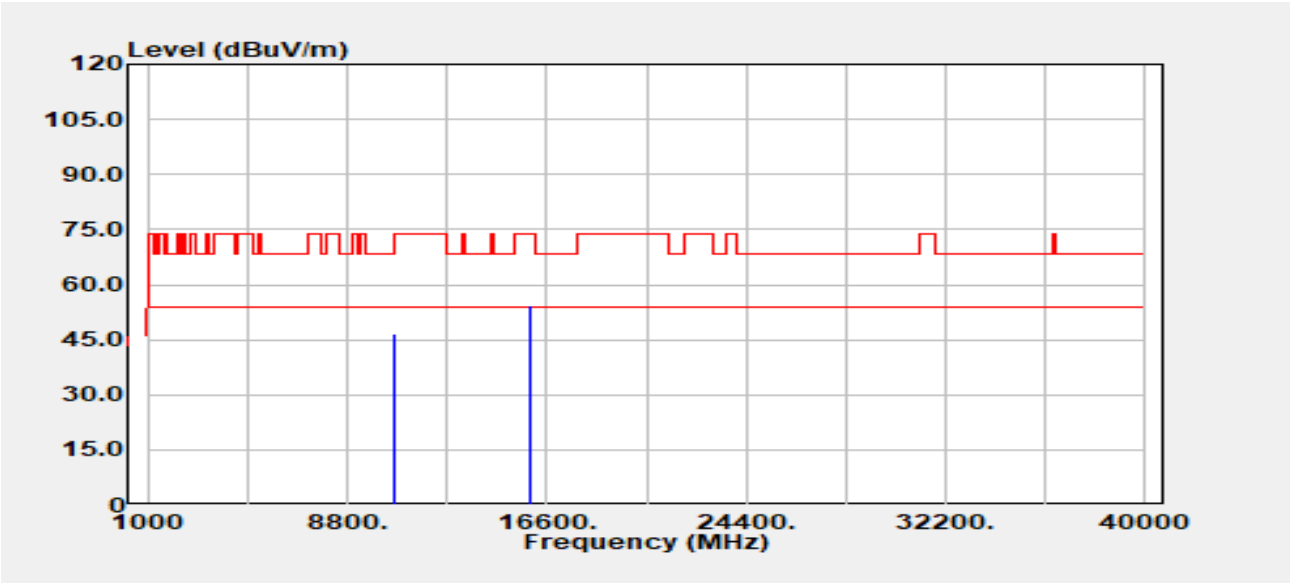


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10640.00	Peak	34.54	12.09	46.63	74.00	-27.37
10640.00	Average	28.68	12.09	40.77	54.00	-13.23
15960.00	Peak	35.90	18.56	54.45	74.00	-19.55
15960.00	Average	28.66	18.56	47.22	54.00	-6.78



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 142 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-23
Operation Band	:802.1n20/Band2	Temp./Humi.	:24.7/58
Frequency	:5320 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E2	Test Chamber	: 966A
Setting	:36		

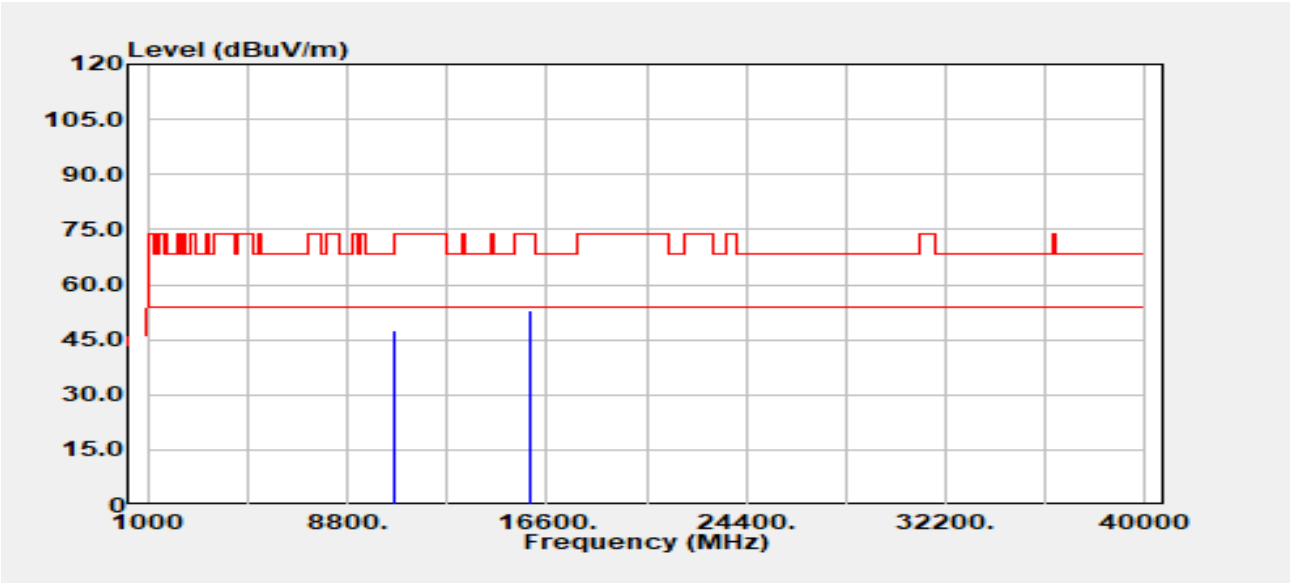


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10640.00	Peak	35.44	12.09	47.53	74.00	-26.47
10640.00	Average	28.89	12.09	40.98	54.00	-13.02
15960.00	Peak	34.62	18.56	53.18	74.00	-20.82
15960.00	Average	28.59	18.56	47.15	54.00	-6.85



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 143 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-23
Operation Band	:802.1n40/Band2	Temp./Humi.	:24.7/58
Frequency	:5270 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E2	Test Chamber	: 966A
Setting	:36		

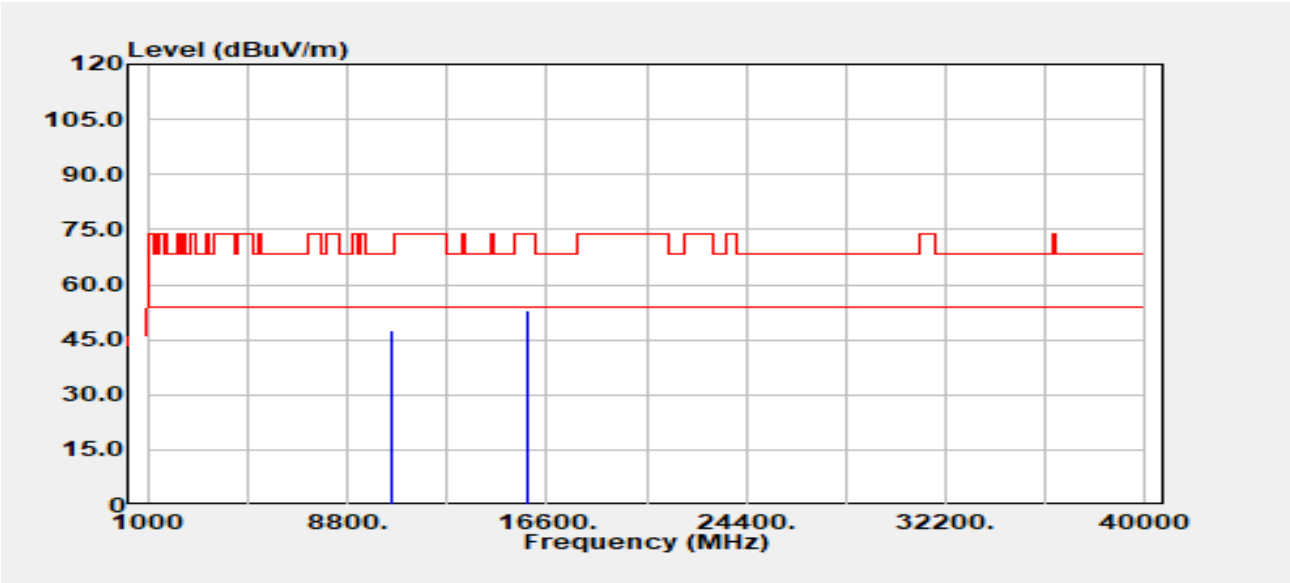


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10540.00	Peak	35.85	11.87	47.72	68.20	-20.48
15810.00	Peak	35.21	17.65	52.87	74.00	-21.13
15810.00	Average	27.13	17.65	44.79	54.00	-9.21



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 144 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-23
Operation Band	:802.1n40/Band2	Temp./Humi.	:24.7/58
Frequency	:5270 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E2	Test Chamber	: 966A
Setting	:36		

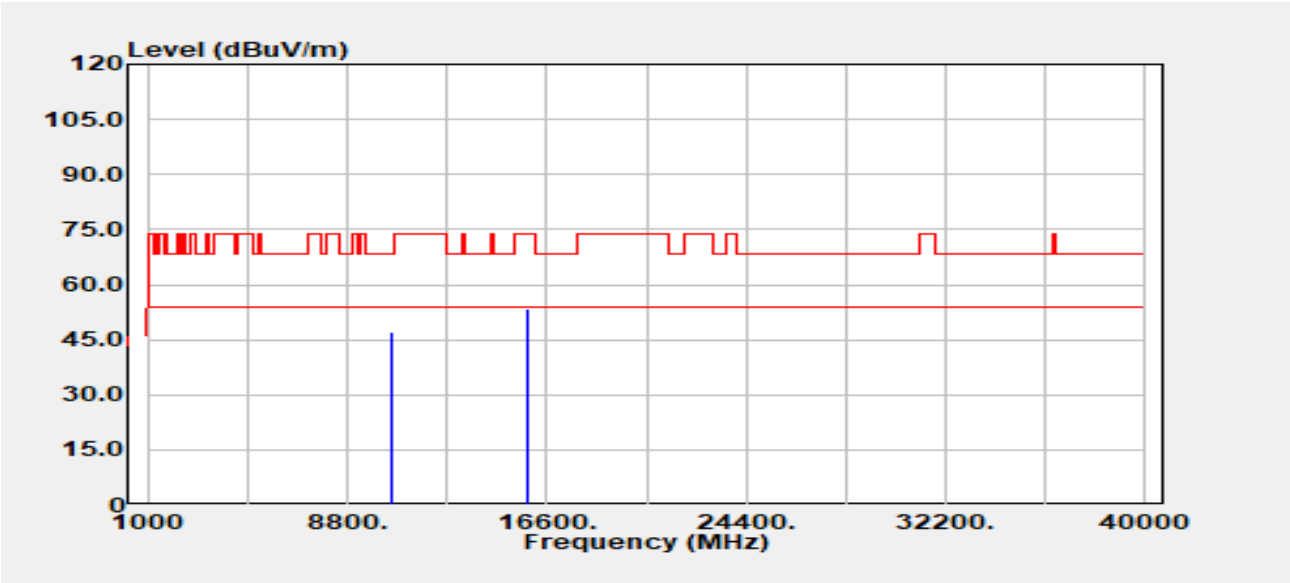


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10540.00	Peak	35.41	11.87	47.28	68.20	-20.92
15810.00	Peak	35.72	17.65	53.37	74.00	-20.63
15810.00	Average	26.91	17.65	44.57	54.00	-9.43



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 145 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-23
Operation Band	:802.1n40/Band2	Temp./Humi.	:24.7/58
Frequency	:5310 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E2	Test Chamber	: 966A
Setting	:36		

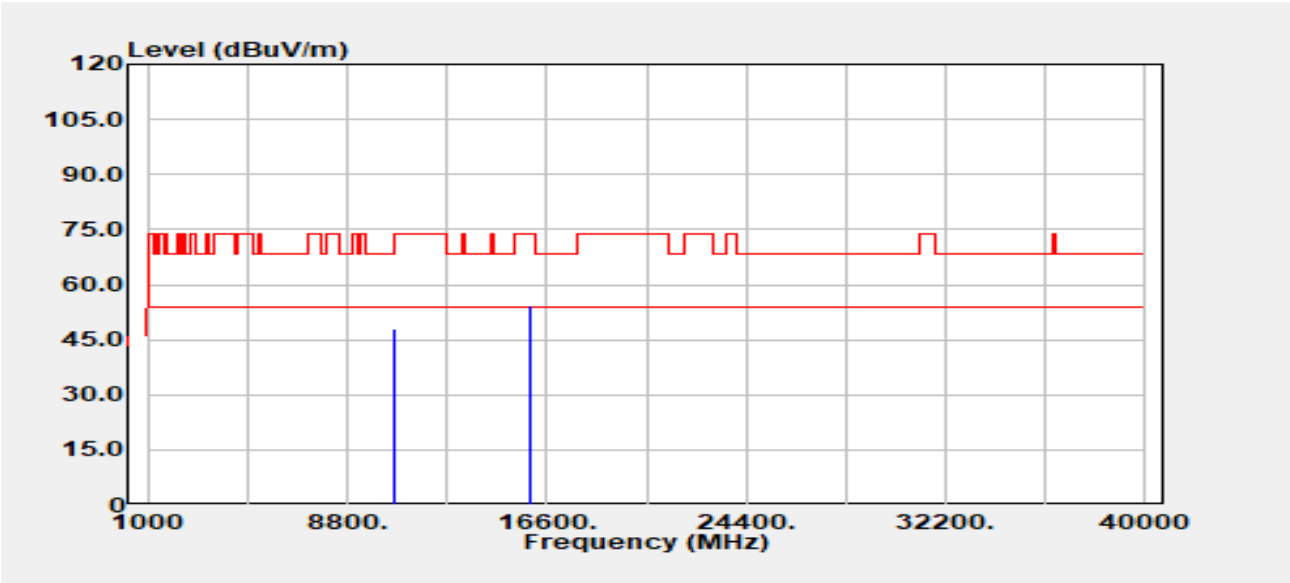


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10620.00	Peak	36.12	12.08	48.20	74.00	-25.80
10620.00	Average	27.32	12.08	39.40	54.00	-14.60
15930.00	Peak	35.91	18.36	54.27	74.00	-19.73
15930.00	Average	27.14	18.36	45.50	54.00	-8.50



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 146 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-23
Operation Band	:802.1n40/Band2	Temp./Humi.	:24.7/58
Frequency	:5310 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E2	Test Chamber	: 966A
Setting	:36		

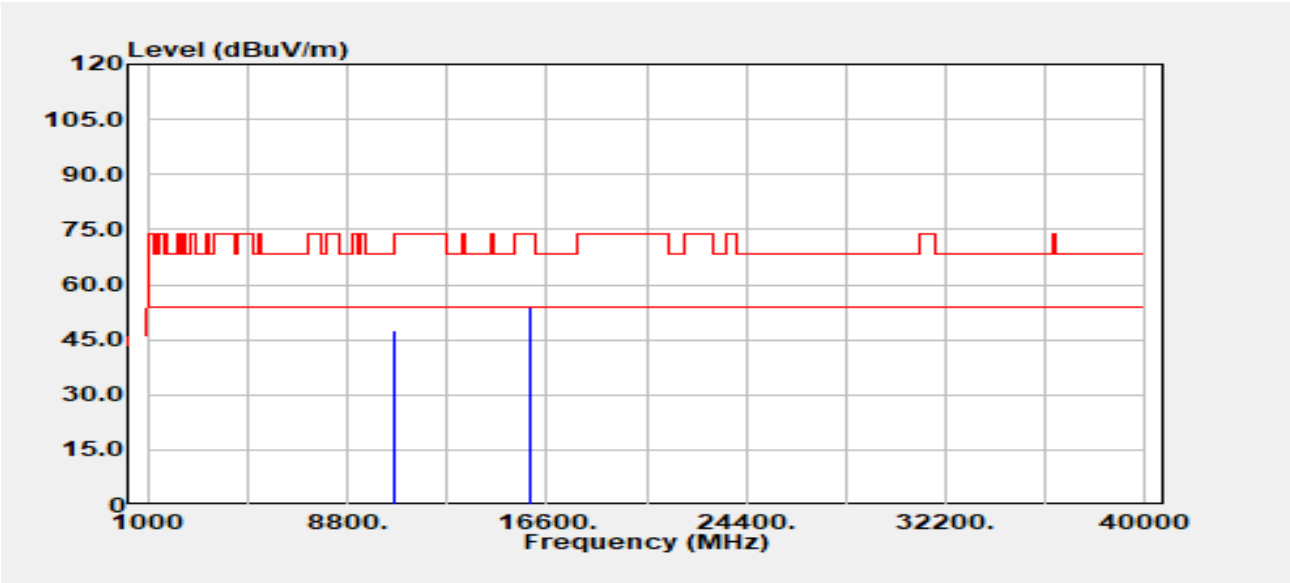


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10620.00	Peak	35.39	12.08	47.47	74.00	-26.53
10620.00	Average	27.00	12.08	39.08	54.00	-14.92
15930.00	Peak	35.69	18.36	54.05	74.00	-19.95
15930.00	Average	27.30	18.36	45.66	54.00	-8.34



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 147 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-23
Operation Band	:802.1ac80/Band2	Temp./Humi.	:24.7/58
Frequency	:5290 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E2	Test Chamber	: 966A
Setting	:38		

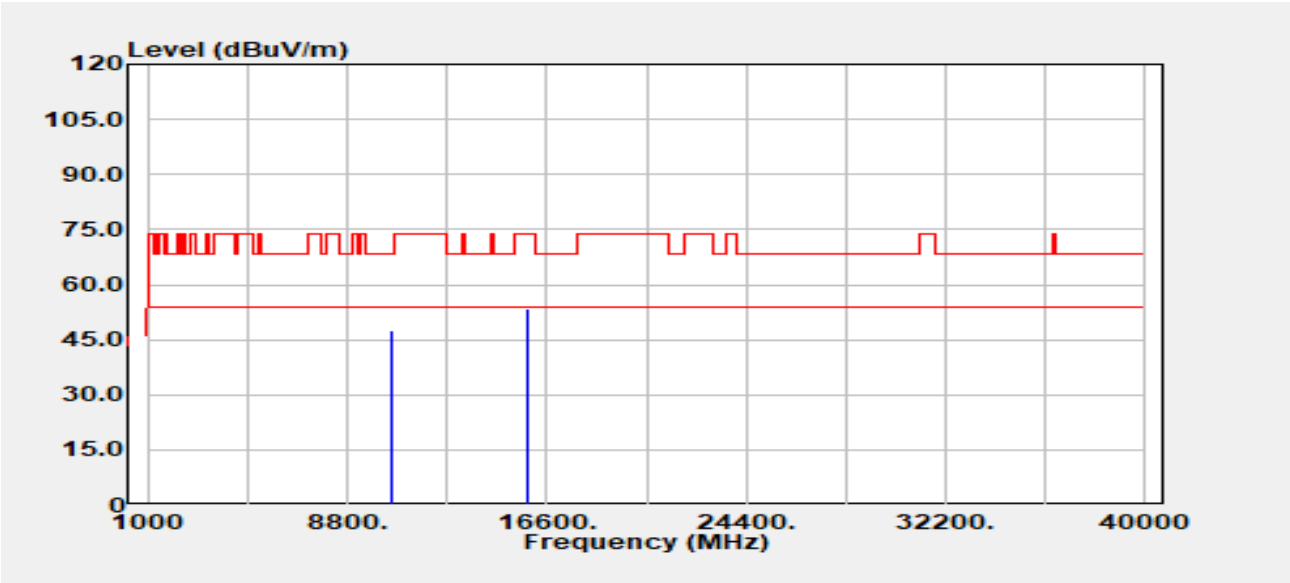

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10580.00	Peak	35.74	12.02	47.76	68.20	-20.44
15870.00	Peak	35.51	17.71	53.22	74.00	-20.78
15870.00	Average	27.83	17.71	45.54	54.00	-8.46




Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 148 / 208
Rev.: 01

Project No :TM-2411000185P
Operation Band :802.1ac80/Band2
Frequency :5290 MHz
Operation Mode :TX
EUT Pol :E2
Setting :38

Test Date :2024-12-23
Temp./Humi. :24.7/58
Antenna Pol. :Horizontal
Engineer :Tony Chao
Test Chamber : 966A

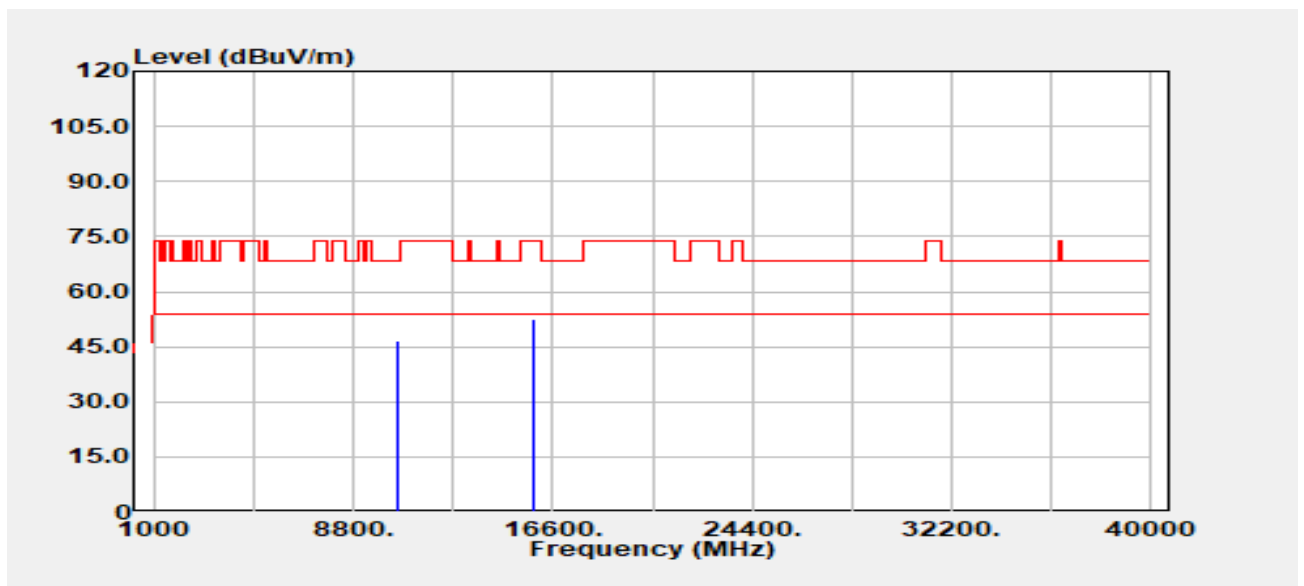


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10580.00	Peak	34.67	12.02	46.69	68.20	-21.51
15870.00	Peak	34.79	17.71	52.49	74.00	-21.51
15870.00	Average	27.67	17.71	45.37	54.00	-8.63



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 149 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-06
Operation Band	:802.11n20/Band3	Temp./Humi.	:24.7/57
Frequency	:5700 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:		

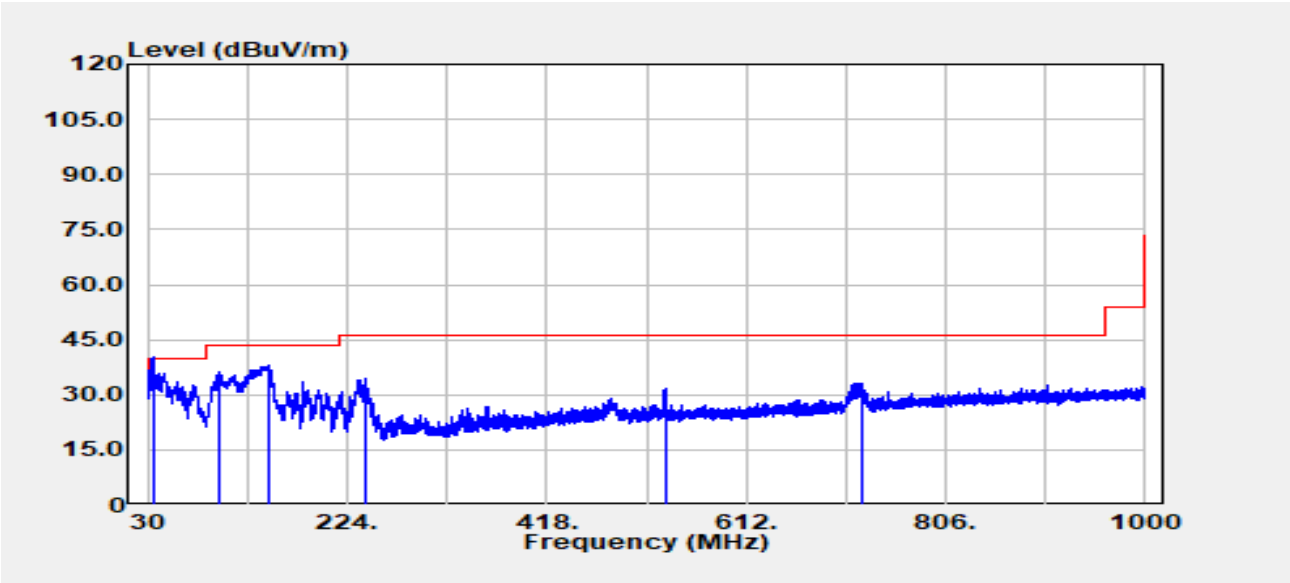

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
35.58	QP	41.54	-7.04	34.50	40.00	-5.50
100.08	Peak	49.79	-13.47	36.33	43.50	-7.17
146.89	Peak	48.66	-10.83	37.83	43.50	-5.67
242.79	Peak	45.88	-11.37	34.51	46.00	-11.49
533.19	Peak	35.58	-3.92	31.66	46.00	-14.34
724.16	Peak	33.94	-0.73	33.21	46.00	-12.79




Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 150 / 208
Rev.: 01

Project No :TM-2411000185P
Operation Band :802.11n20/Band3
Frequency :5700 MHz
Operation Mode :TX
EUT Pol :E2
Setting :

Test Date :2024-12-06
Temp./Humi. :24.7/57
Antenna Pol. :Horizontal
Engineer :Ray Li
Test Chamber : 966A

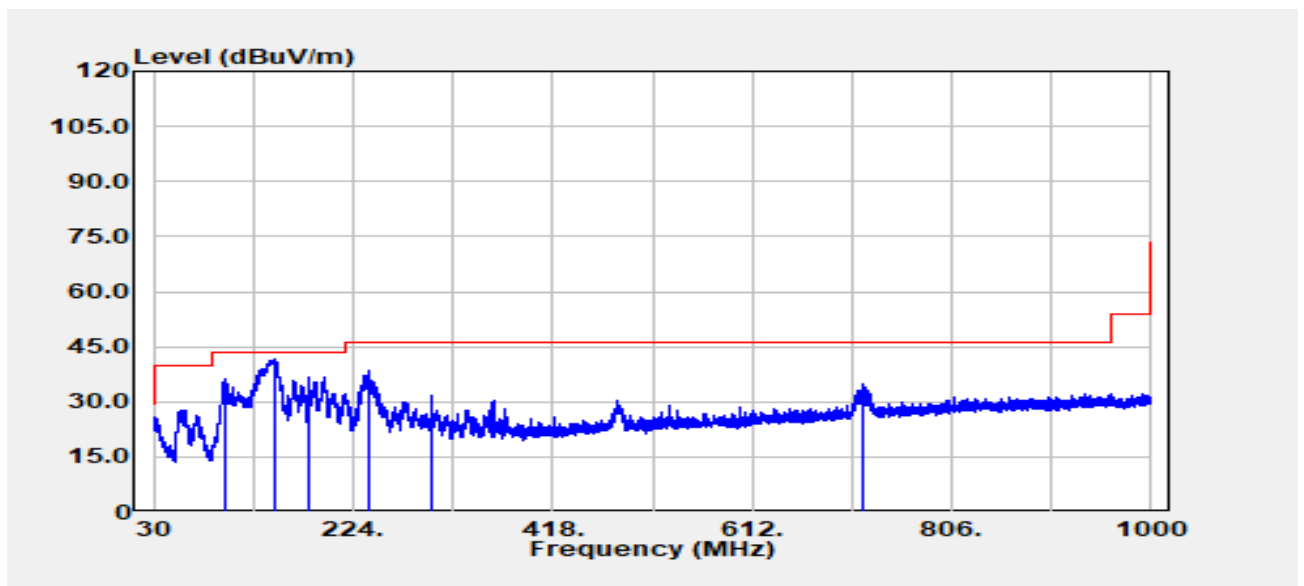


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
98.51	Peak	49.96	-13.94	36.02	43.50	-7.48
146.89	Peak	52.49	-10.83	41.66	43.50	-1.84
179.99	Peak	48.92	-12.19	36.73	43.50	-6.77
239.16	Peak	49.95	-11.47	38.48	46.00	-7.52
300.02	Peak	40.85	-9.33	31.52	46.00	-14.48
720.03	Peak	35.53	-0.86	34.67	46.00	-11.33



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 151 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-04
Operation Band	:802.11a/Band3	Temp./Humi.	:24.6/55
Frequency	:5500 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:48		

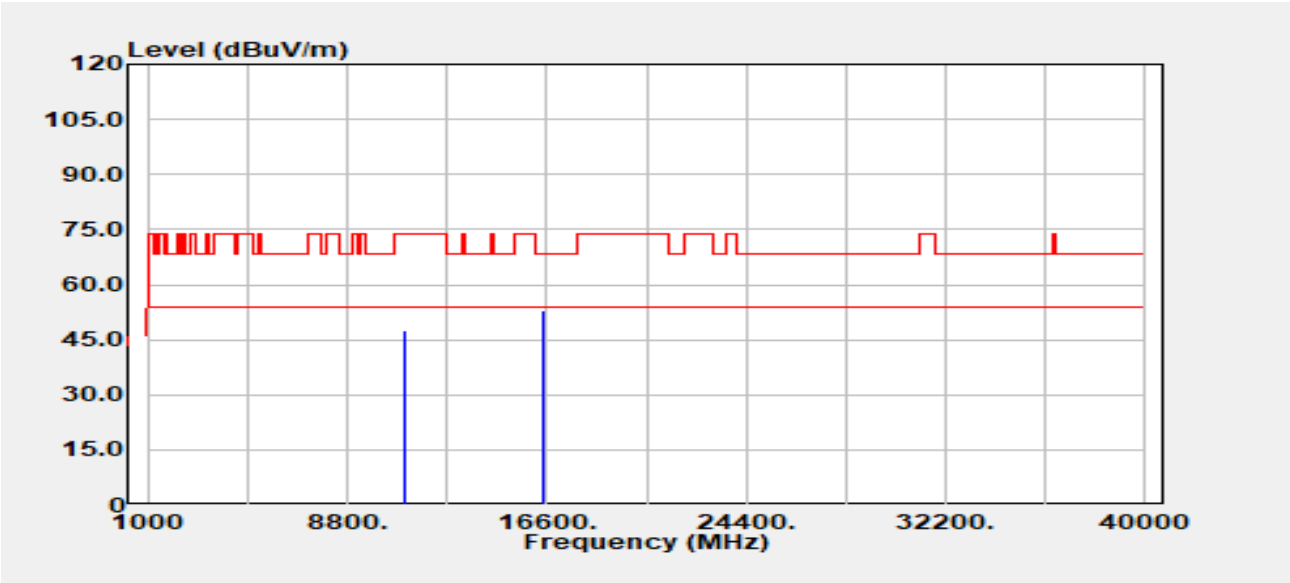


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11000.00	Peak	34.26	13.35	47.61	74.00	-26.39
11000.00	Average	27.99	13.35	41.34	54.00	-12.66
16500.00	Peak	32.34	20.73	53.07	68.20	-15.13



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 152 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-04
Operation Band	:802.11a/Band3	Temp./Humi.	:24.6/55
Frequency	:5500 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:48		

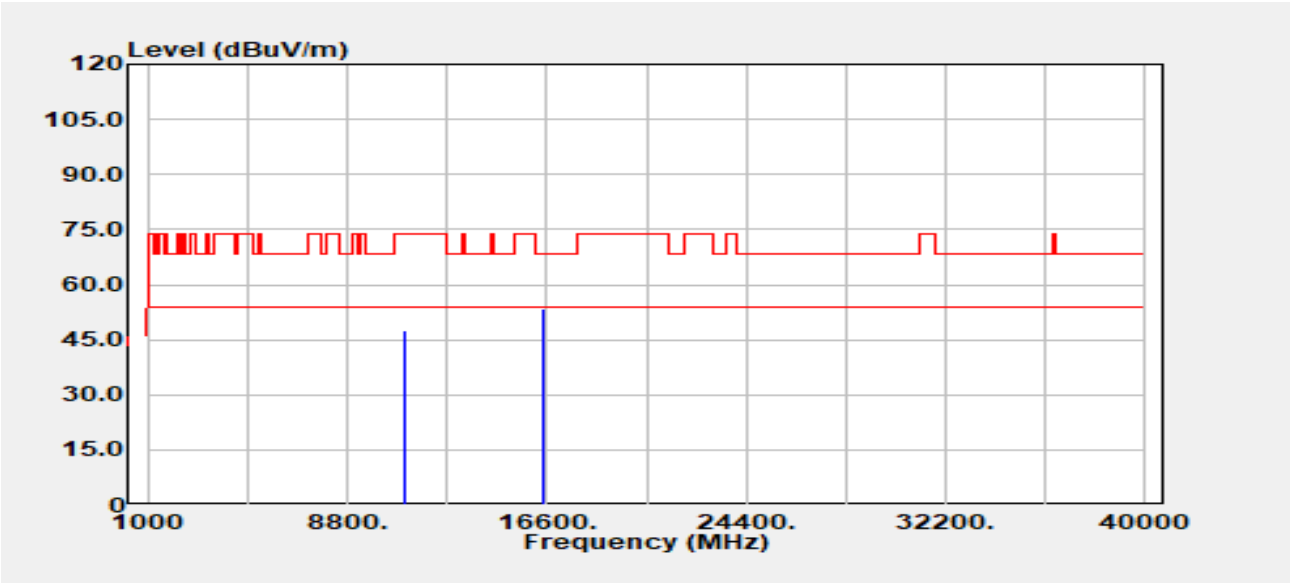


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11000.00	Peak	34.17	13.35	47.52	74.00	-26.48
11000.00	Average	28.56	13.35	41.91	54.00	-12.09
16500.00	Peak	32.81	20.73	53.54	68.20	-14.66



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 153 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-04
Operation Band	:802.11a/Band3	Temp./Humi.	:24.6/55
Frequency	:5580 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:47		

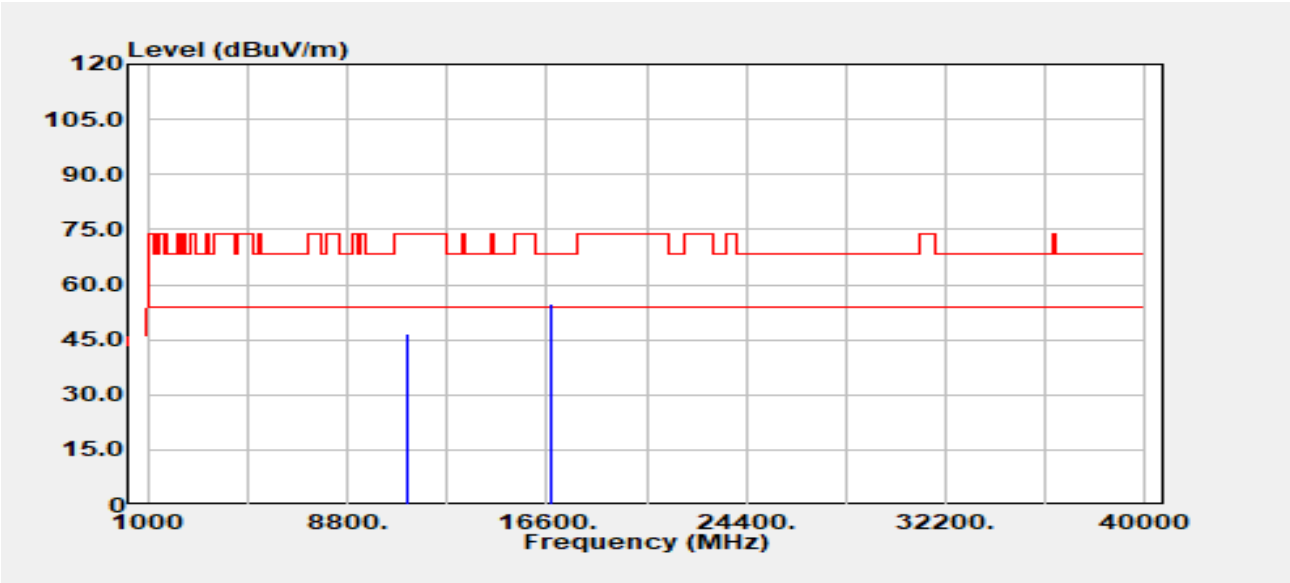


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11160.00	Peak	32.97	13.44	46.42	74.00	-27.58
11160.00	Average	28.05	13.44	41.50	54.00	-12.50
16740.00	Peak	32.36	22.28	54.63	68.20	-13.57



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 154 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-04
Operation Band	:802.11a/Band3	Temp./Humi.	:24.6/55
Frequency	:5580 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:47		

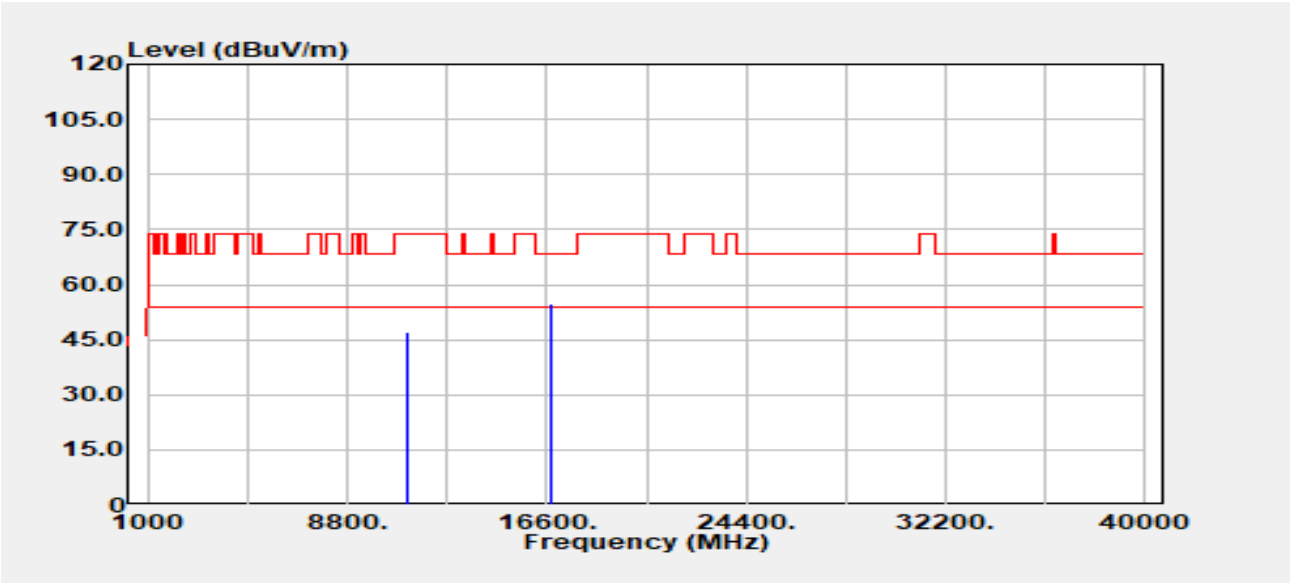


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11160.00	Peak	33.56	13.44	47.00	74.00	-27.00
11160.00	Average	28.67	13.44	42.11	54.00	-11.89
16740.00	Peak	32.37	22.28	54.64	68.20	-13.56



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 155 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-04
Operation Band	:802.11a/Band3	Temp./Humi.	:24.6/55
Frequency	:5700 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:44		

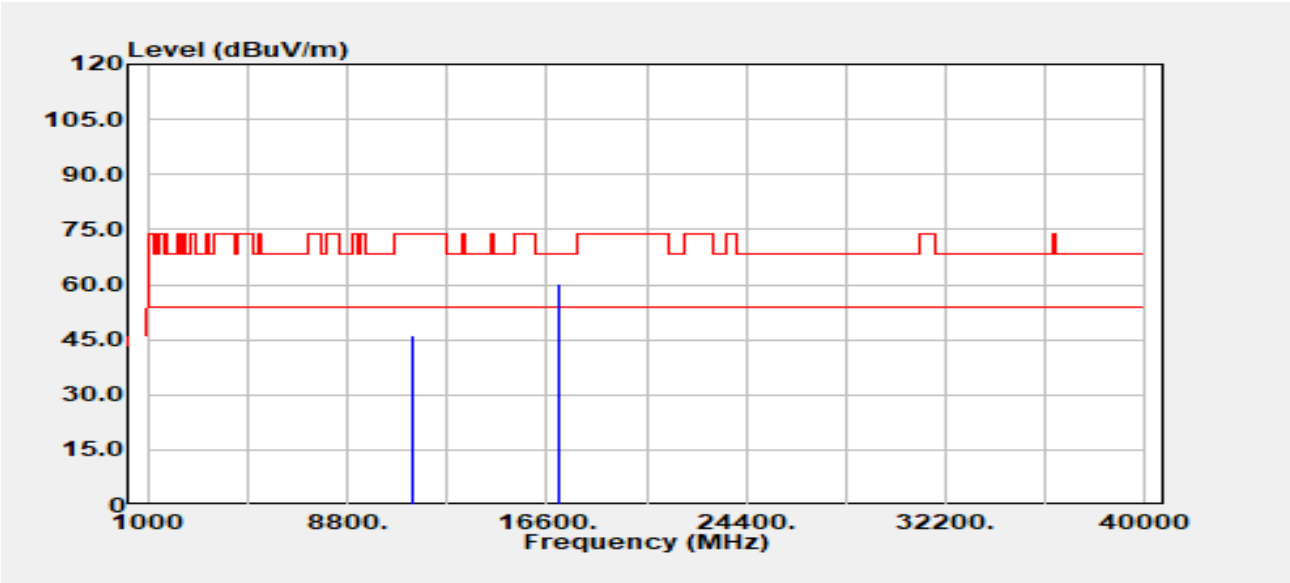


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11400.00	Peak	32.79	13.50	46.29	74.00	-27.71
11400.00	Average	31.22	13.50	44.72	54.00	-9.28
17100.00	Peak	32.90	27.13	60.03	68.20	-8.17



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 156 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-04
Operation Band	:802.11a/Band3	Temp./Humi.	:24.6/55
Frequency	:5700 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:44		

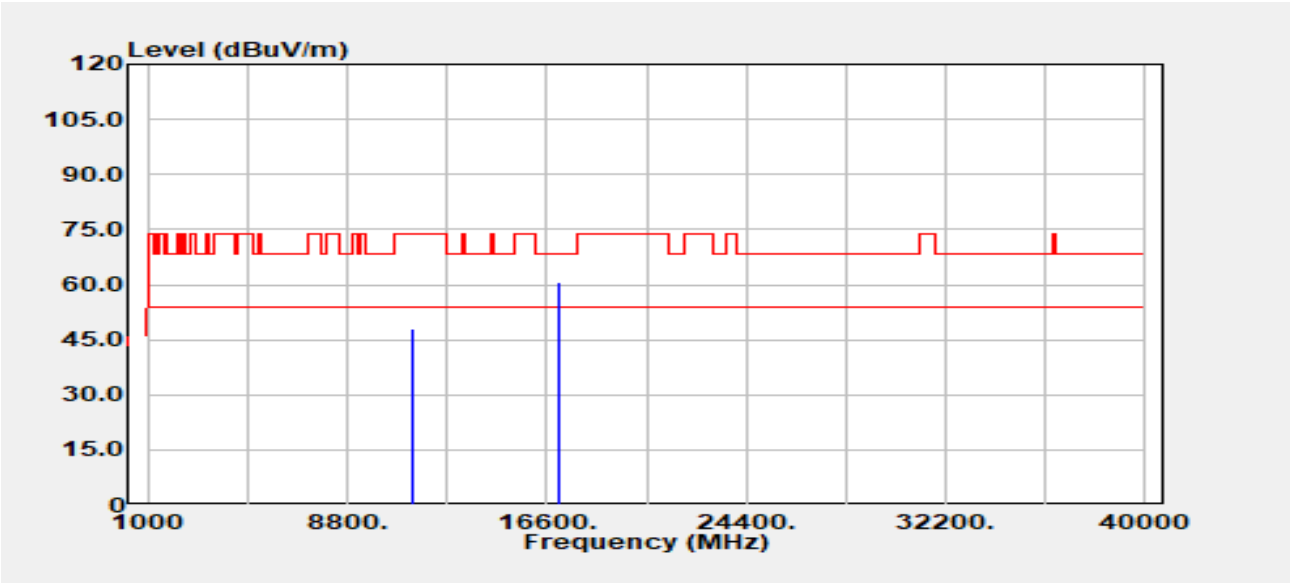


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11400.00	Peak	34.69	13.50	48.19	74.00	-25.81
11400.00	Average	28.98	13.50	42.48	54.00	-11.52
17100.00	Peak	33.48	27.13	60.61	68.20	-7.59



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 157 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-04
Operation Band	:802.11n20/Band3	Temp./Humi.	:24.6/55
Frequency	:5500 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:48		

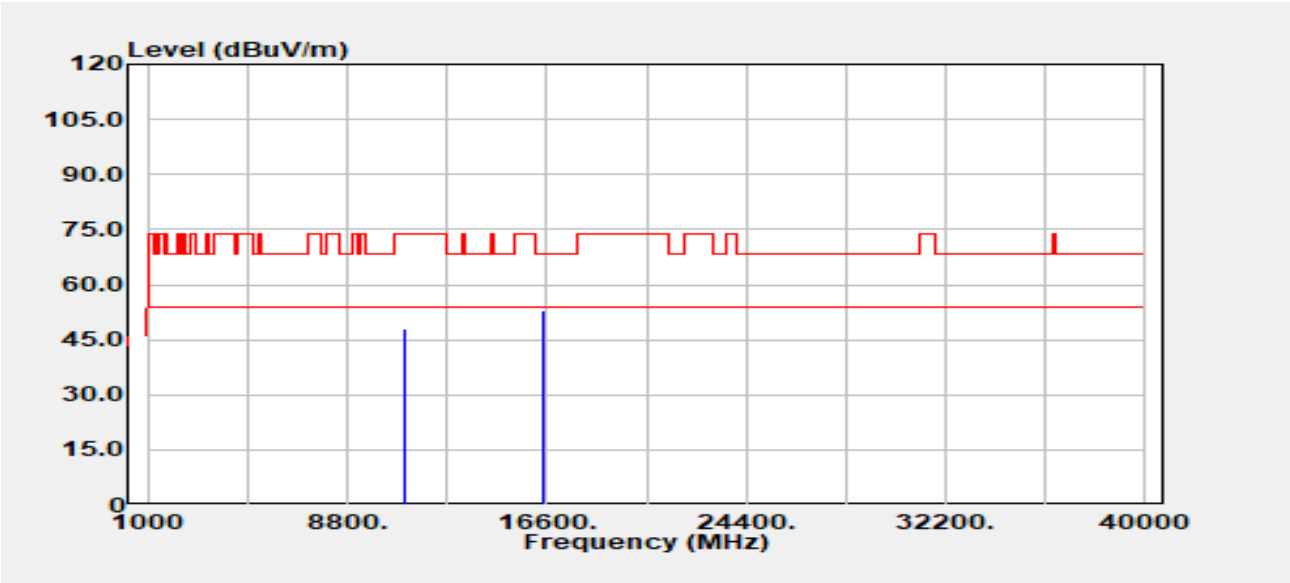


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11000.00	Peak	34.45	13.35	47.80	74.00	-26.20
11000.00	Average	27.87	13.35	41.22	54.00	-12.78
16500.00	Peak	32.37	20.73	53.10	68.20	-15.10



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 158 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-04
Operation Band	:802.11n20/Band3	Temp./Humi.	:24.6/55
Frequency	:5500 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:48		

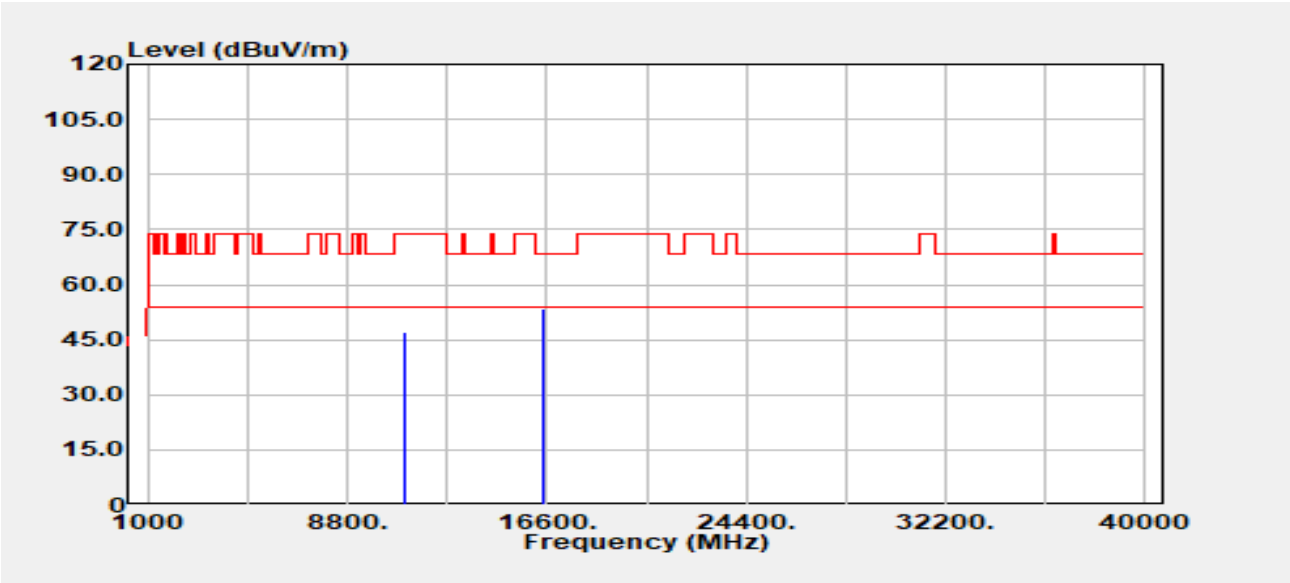


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11000.00	Peak	33.80	13.35	47.15	74.00	-26.85
11000.00	Average	28.26	13.35	41.61	54.00	-12.39
16500.00	Peak	32.57	20.73	53.30	68.20	-14.90



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 159 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-04
Operation Band	:802.11n20/Band3	Temp./Humi.	:24.6/55
Frequency	:5580 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:47		

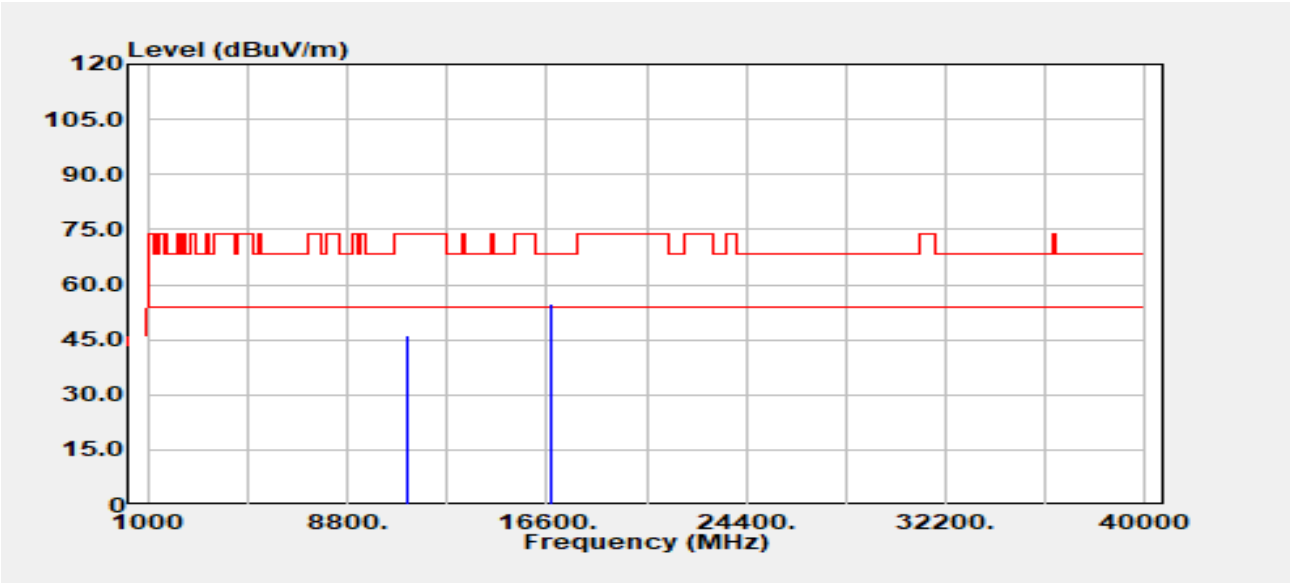


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11160.00	Peak	32.65	13.44	46.09	74.00	-27.91
11160.00	Average	28.28	13.44	41.72	54.00	-12.28
16740.00	Peak	32.69	22.28	54.96	68.20	-13.24



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 160 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-04
Operation Band	:802.11n20/Band3	Temp./Humi.	:24.6/55
Frequency	:5580 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:47		

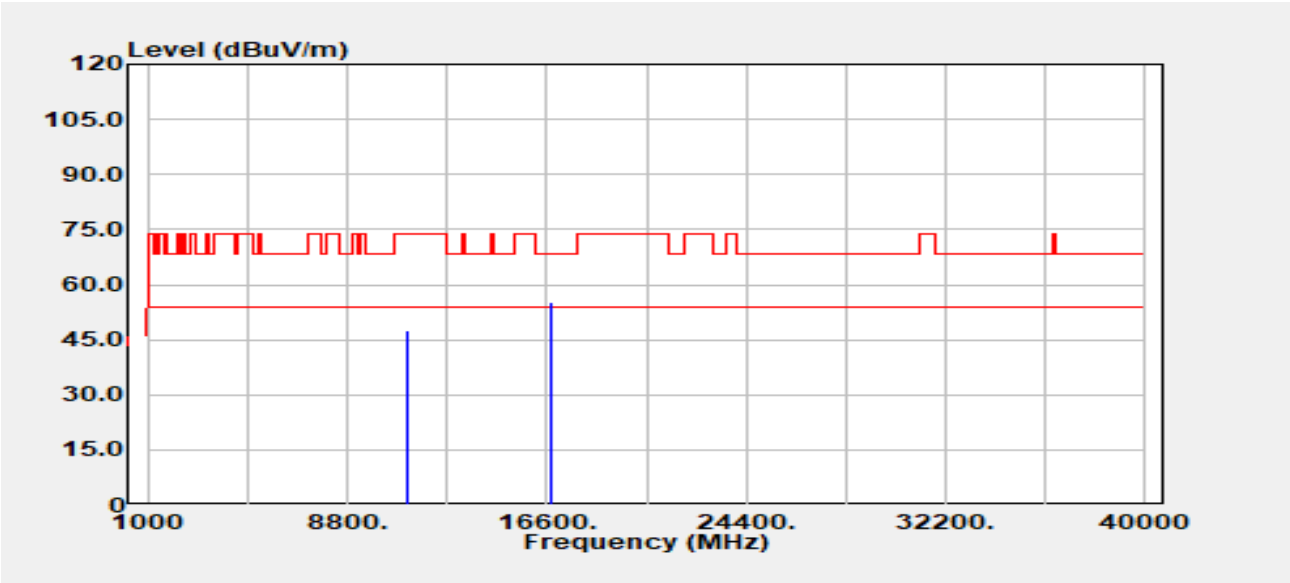


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11160.00	Peak	34.08	13.44	47.52	74.00	-26.48
11160.00	Average	28.39	13.44	41.83	54.00	-12.17
16740.00	Peak	32.94	22.28	55.22	68.20	-12.98



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 161 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-05
Operation Band	:802.11n20/Band3	Temp./Humi.	:24.6/55
Frequency	:5700 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:44		

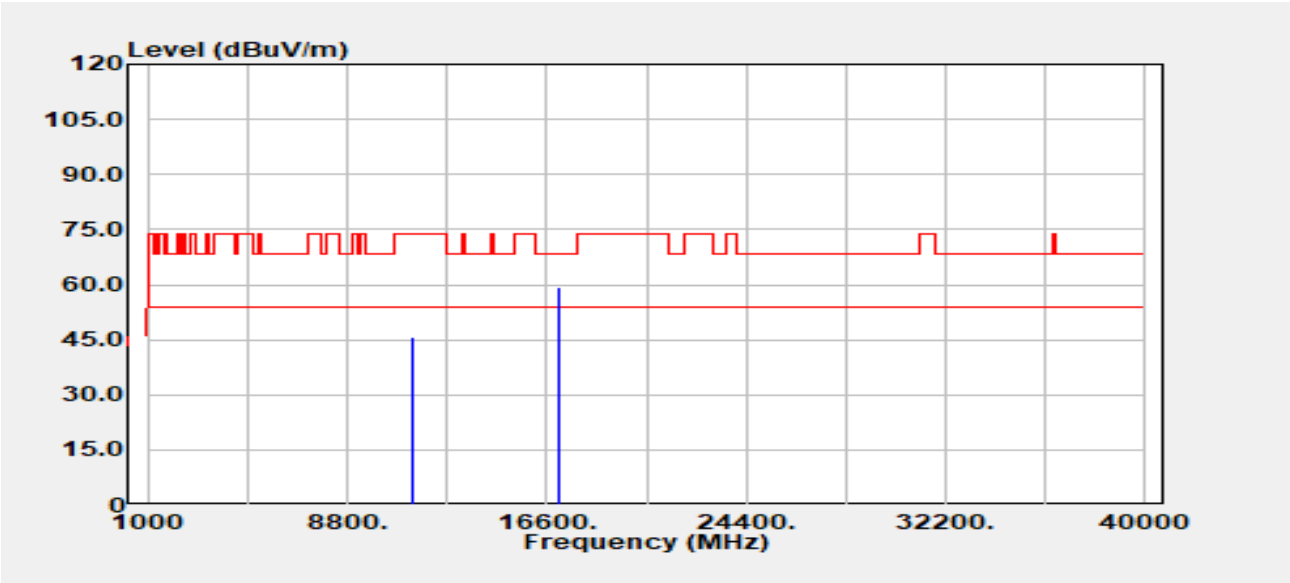


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11400.00	Peak	32.33	13.50	45.83	74.00	-28.17
11400.00	Average	29.86	13.50	43.36	54.00	-10.64
17100.00	Peak	32.07	27.13	59.20	68.20	-9.00



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 162 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-05
Operation Band	:802.11n20/Band3	Temp./Humi.	:24.6/55
Frequency	:5700 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:44		

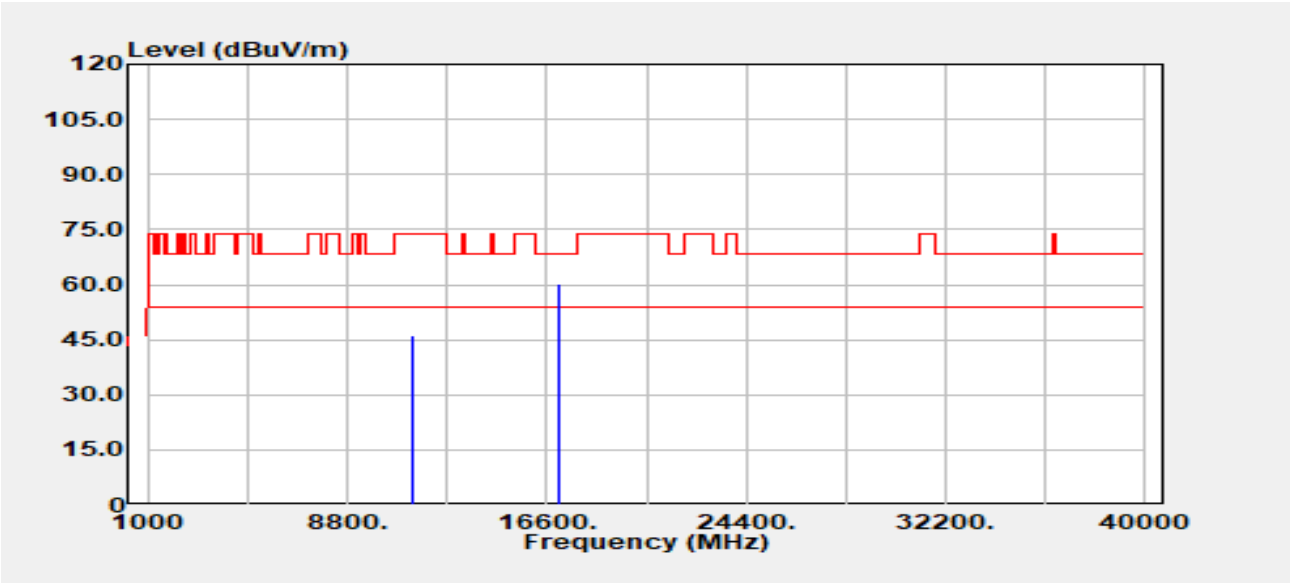


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11400.00	Peak	32.52	13.50	46.02	74.00	-27.98
11400.00	Average	29.37	13.50	42.87	54.00	-11.13
17100.00	Peak	33.30	27.13	60.43	68.20	-7.77



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 163 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-06
Operation Band	:802.11n40/Band3	Temp./Humi.	:24.6/55
Frequency	:5510 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:45		

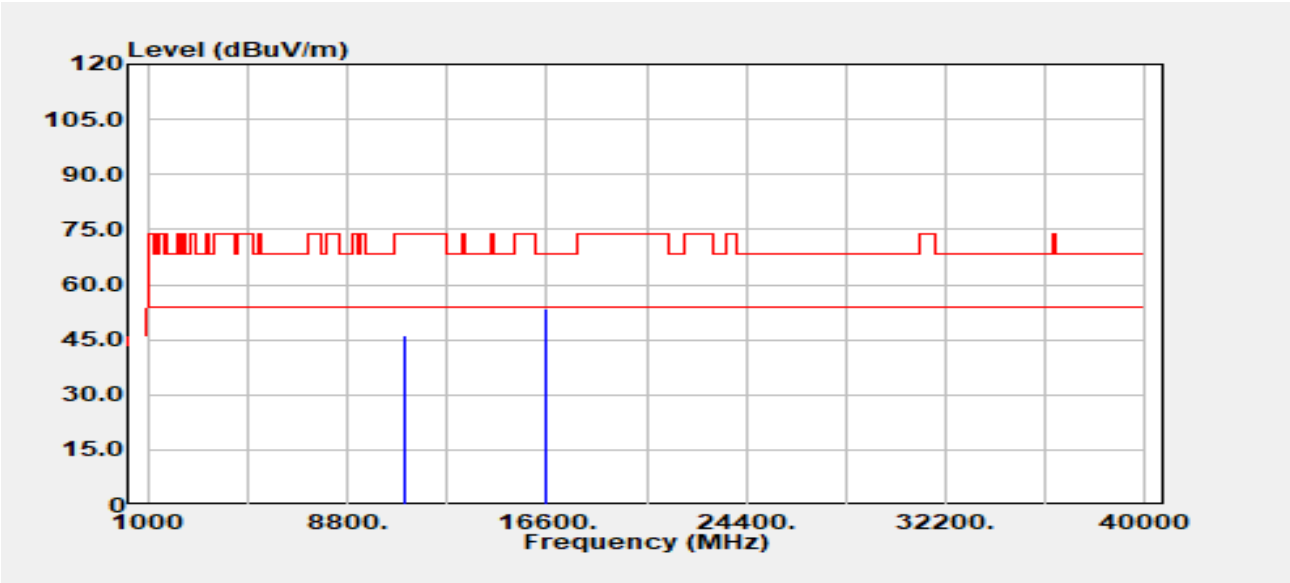


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11020.00	Peak	32.86	13.50	46.36	74.00	-27.64
11020.00	Average	26.55	13.50	40.05	54.00	-13.95
16530.00	Peak	32.96	20.56	53.52	68.20	-14.68



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 164 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-06
Operation Band	:802.11n40/Band3	Temp./Humi.	:24.6/55
Frequency	:5510 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:45		

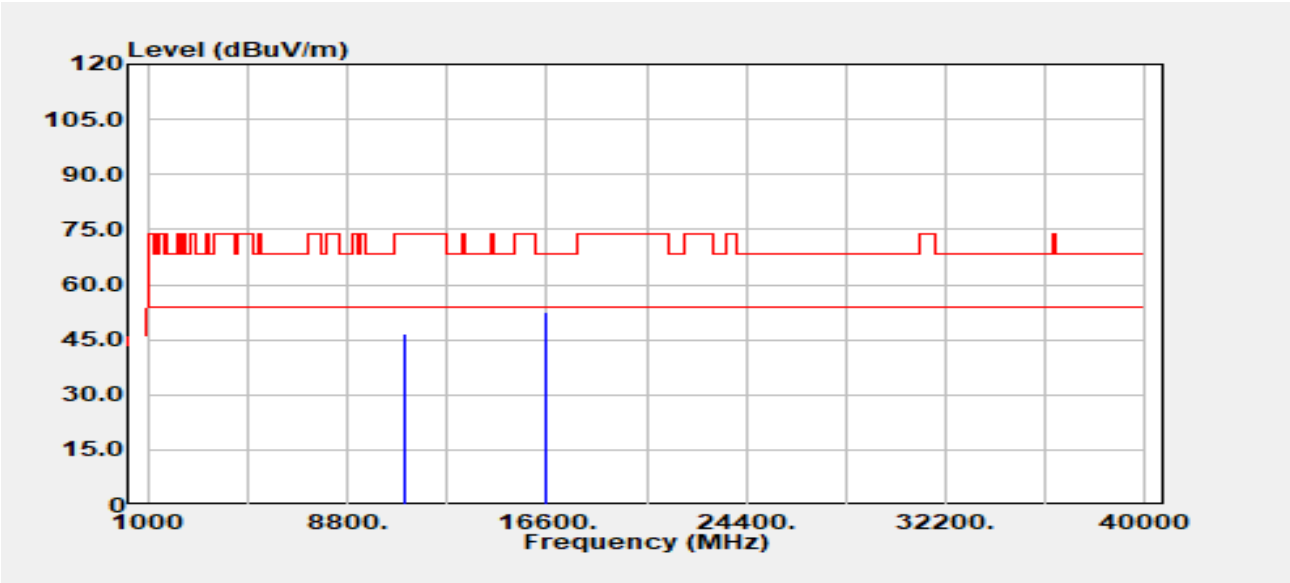


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11020.00	Peak	33.34	13.50	46.84	74.00	-27.16
11020.00	Average	26.32	13.50	39.82	54.00	-14.18
16530.00	Peak	31.93	20.56	52.49	68.20	-15.71



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 165 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-06
Operation Band	:802.11n40/Band3	Temp./Humi.	:24.6/55
Frequency	:5550 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:44		

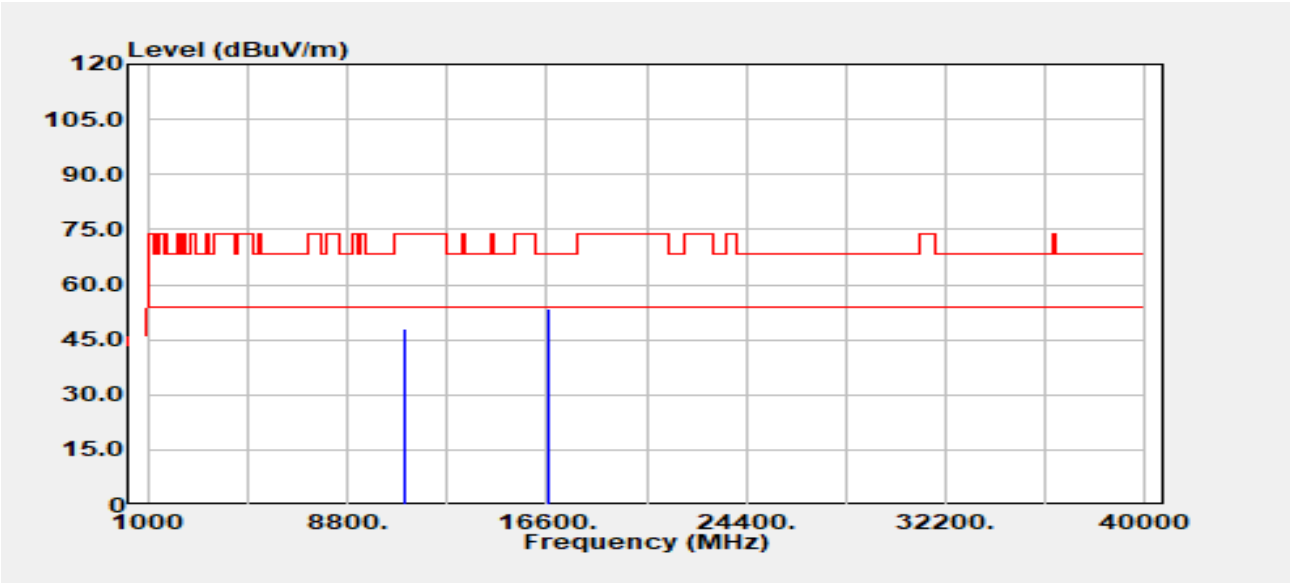


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11100.00	Peak	34.23	13.64	47.87	74.00	-26.13
11100.00	Average	26.00	13.64	39.64	54.00	-14.36
16650.00	Peak	32.28	21.16	53.43	68.20	-14.77



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 166 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-06
Operation Band	:802.11n40/Band3	Temp./Humi.	:24.6/55
Frequency	:5550 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:44		

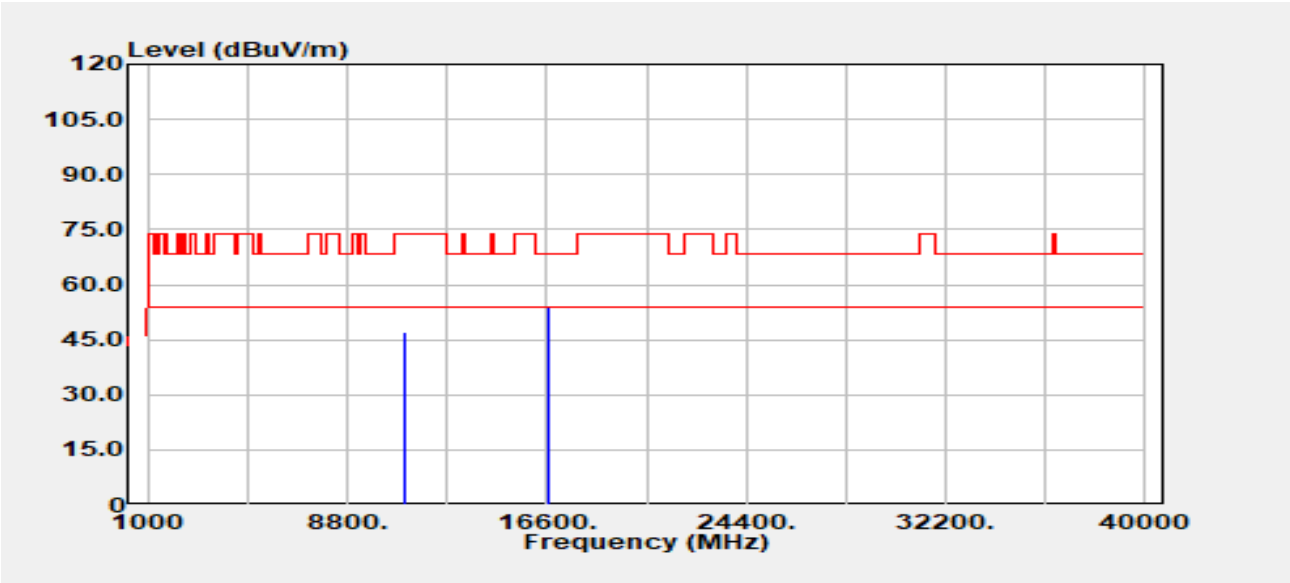


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11100.00	Peak	33.64	13.64	47.28	74.00	-26.72
11100.00	Average	26.21	13.64	39.85	54.00	-14.15
16650.00	Peak	32.69	21.16	53.85	68.20	-14.35



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 167 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-06
Operation Band	:802.11n40/Band3	Temp./Humi.	:24.6/55
Frequency	:5670 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:42		

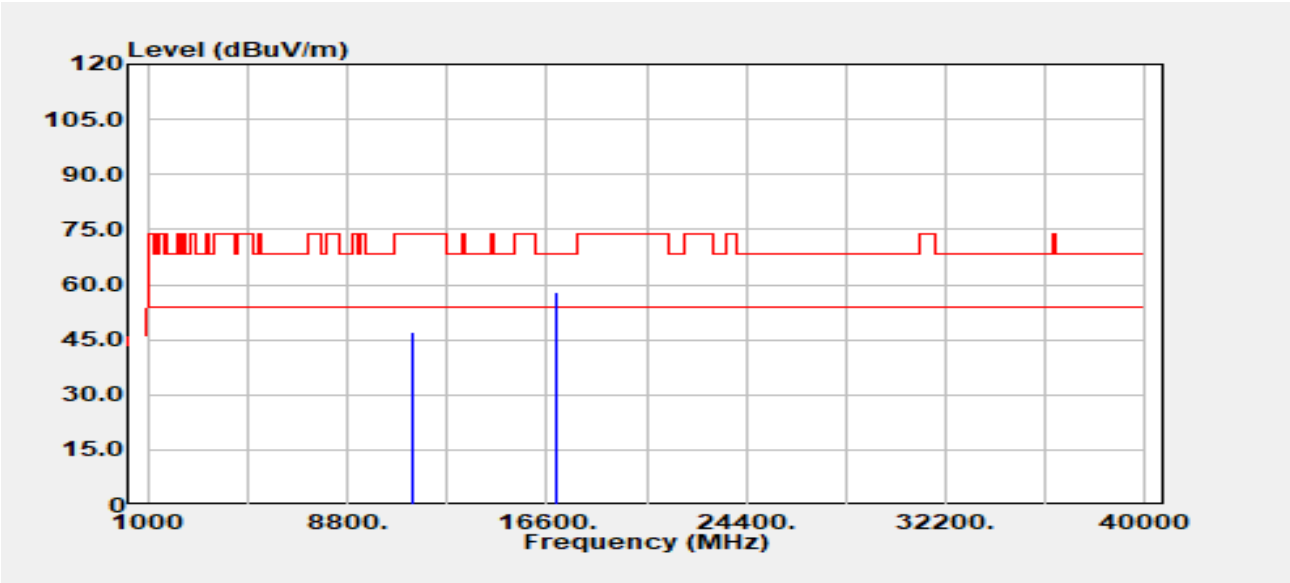


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11340.00	Peak	33.44	13.53	46.97	74.00	-27.03
11340.00	Average	25.78	13.53	39.31	54.00	-14.69
17010.00	Peak	31.86	26.27	58.13	68.20	-10.07



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 168 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-06
Operation Band	:802.11n40/Band3	Temp./Humi.	:24.6/55
Frequency	:5670 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:42		

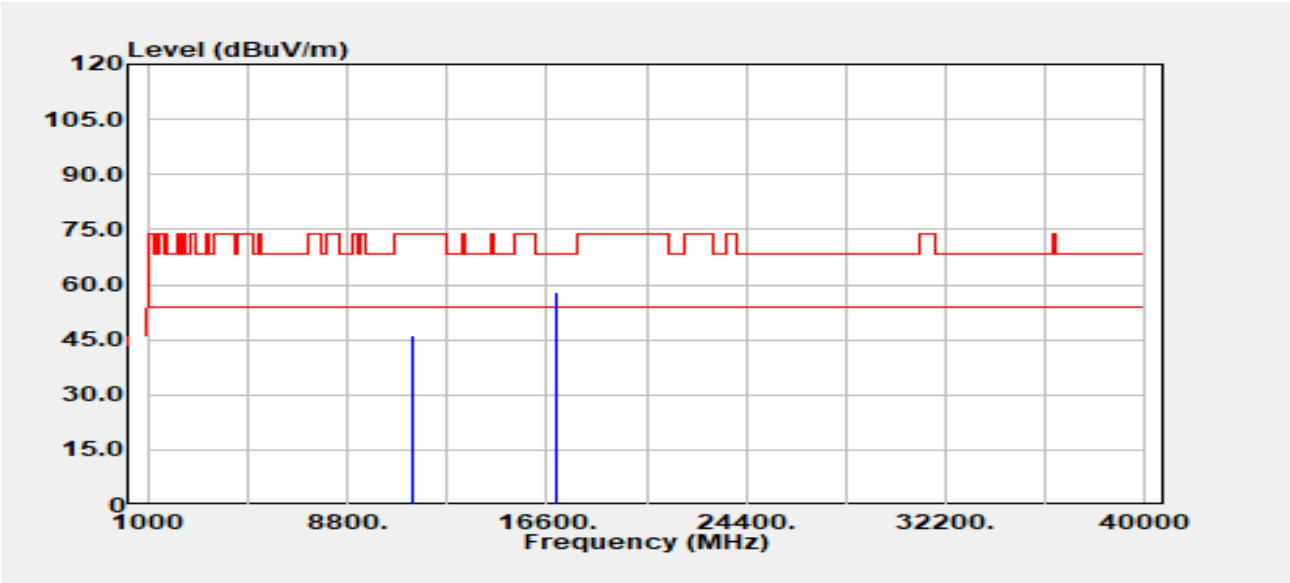


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11340.00	Peak	32.47	13.53	45.99	74.00	-28.01
11340.00	Average	25.98	13.53	39.51	54.00	-14.49
17010.00	Peak	31.48	26.27	57.75	68.20	-10.45



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 169 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-06
Operation Band	:802.11ac80/Band3	Temp./Humi.	:24.6/55
Frequency	:5530 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:43		

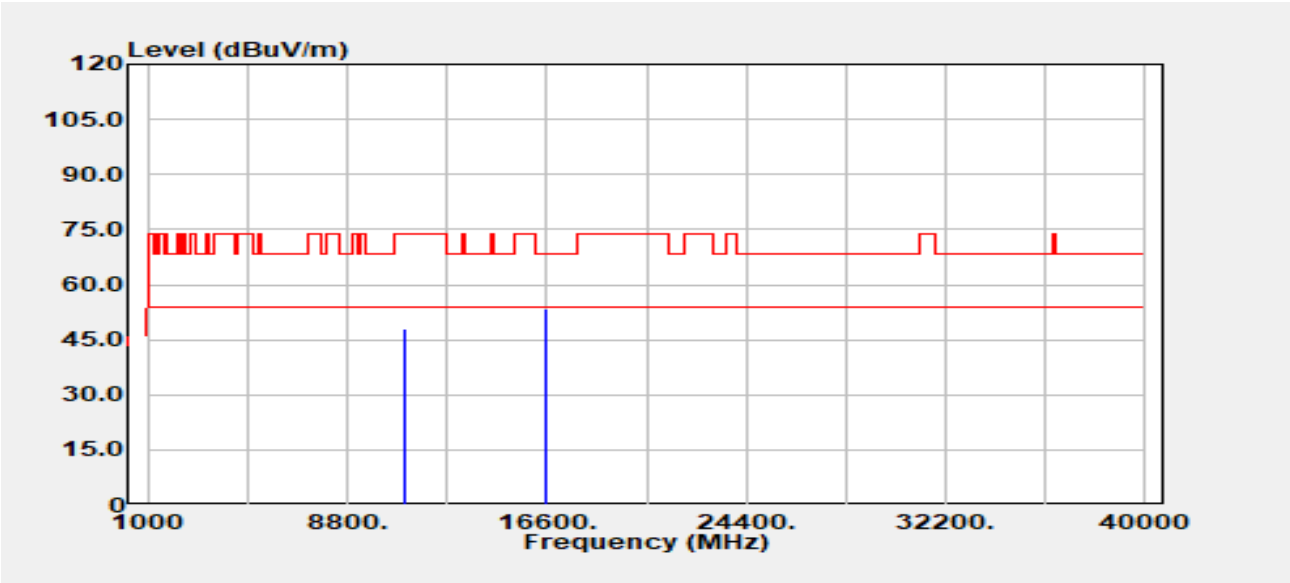


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11060.00	Peak	34.37	13.70	48.07	74.00	-25.93
11060.00	Average	26.90	13.70	40.61	54.00	-13.39
16590.00	Peak	32.61	20.71	53.32	68.20	-14.88



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 170 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-06
Operation Band	:802.11ac80/Band3	Temp./Humi.	:24.6/55
Frequency	:5530 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:43		

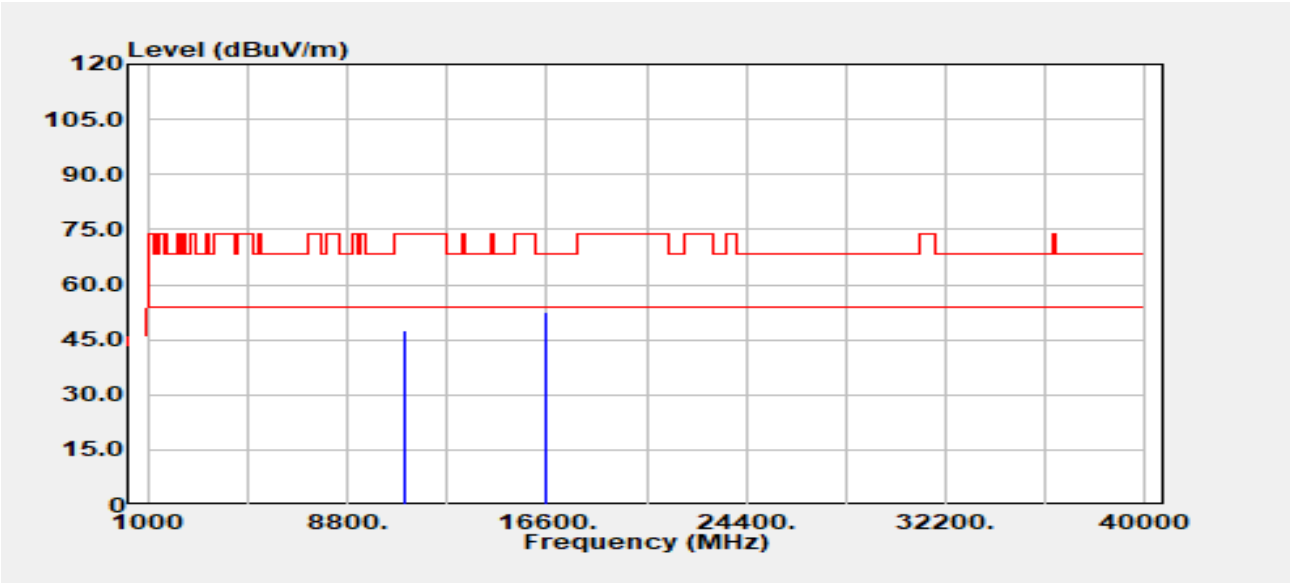


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11060.00	Peak	33.72	13.70	47.42	74.00	-26.58
11060.00	Average	26.77	13.70	40.47	54.00	-13.53
16590.00	Peak	32.01	20.71	52.73	68.20	-15.47



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 171 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-06
Operation Band	:802.11ac80/Band3	Temp./Humi.	:24.6/55
Frequency	:5610 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:43		

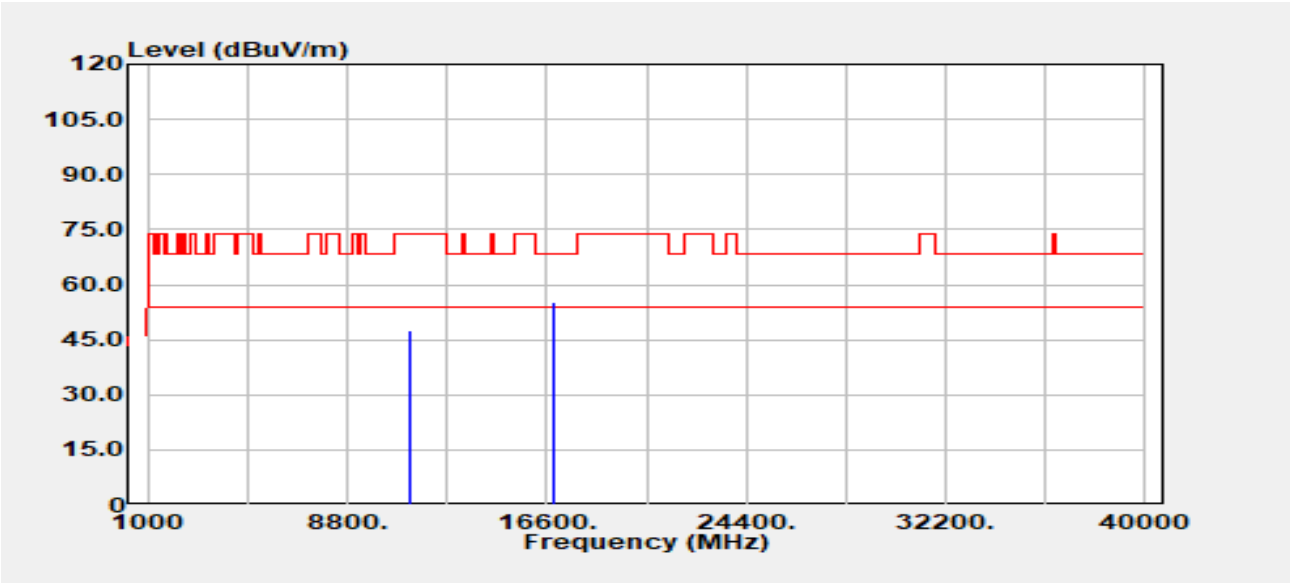


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11220.00	Peak	33.85	13.73	47.58	74.00	-26.42
11220.00	Average	26.06	13.73	39.79	54.00	-14.21
16830.00	Peak	31.66	23.73	55.39	68.20	-12.81



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 172 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-07
Operation Band	:802.11ac80/Band3	Temp./Humi.	:24.6/55
Frequency	:5610 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:43		

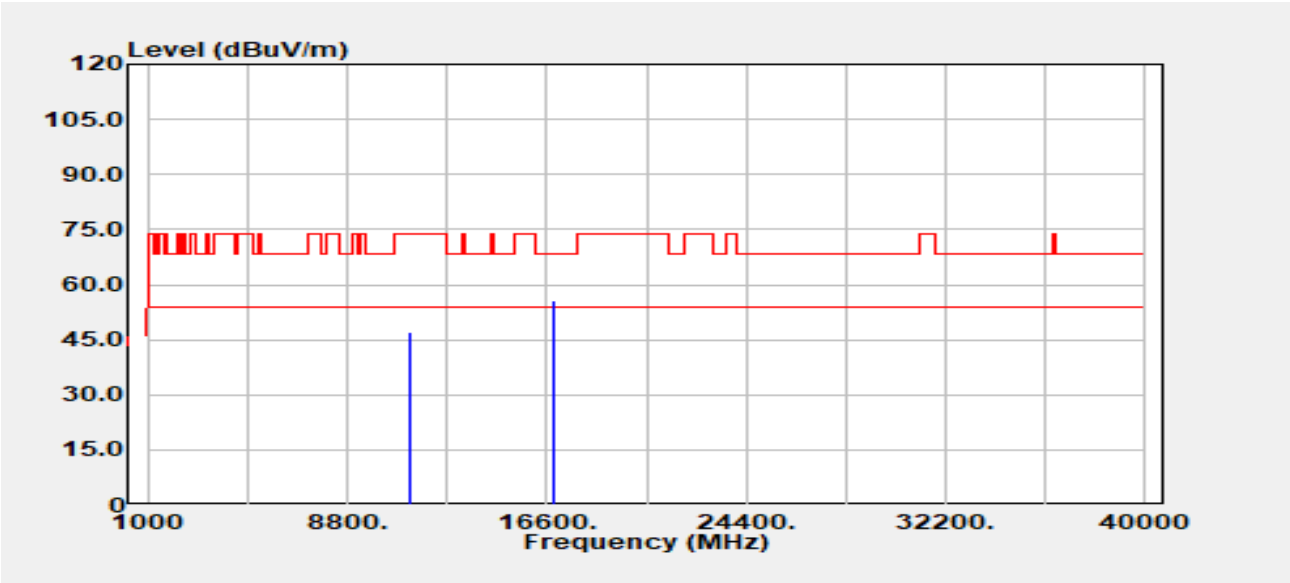


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11220.00	Peak	33.29	13.73	47.02	74.00	-26.98
11220.00	Average	26.31	13.73	40.04	54.00	-13.96
16830.00	Peak	31.93	23.73	55.66	68.20	-12.54



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 173 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-06
Operation Band	:802.11ac80/Band4	Temp./Humi.	:24.7/57
Frequency	:5775 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:		

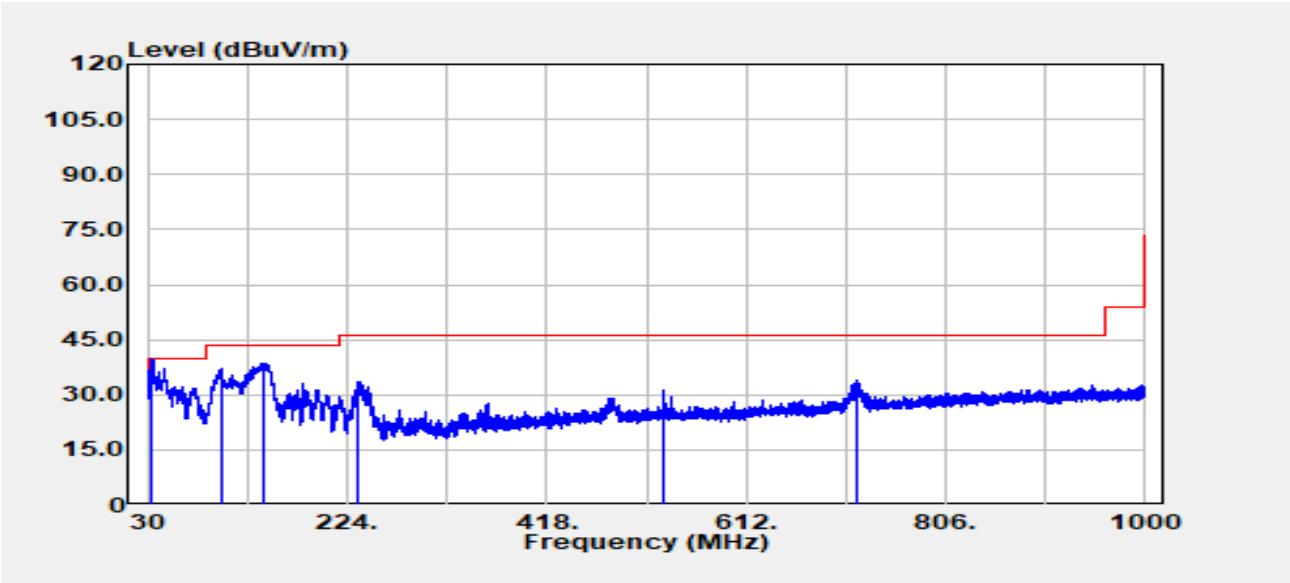


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
34.61	QP	41.22	-6.15	35.07	40.00	-4.93
102.14	Peak	50.15	-12.93	37.23	43.50	-6.27
142.40	Peak	49.39	-10.69	38.71	43.50	-4.79
235.16	Peak	45.36	-11.72	33.64	46.00	-12.36
532.58	Peak	35.14	-3.92	31.22	46.00	-14.78
719.06	Peak	34.78	-0.85	33.93	46.00	-12.07



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 174 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-06
Operation Band	:802.11ac80/Band4	Temp./Humi.	:24.7/57
Frequency	:5775 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:		

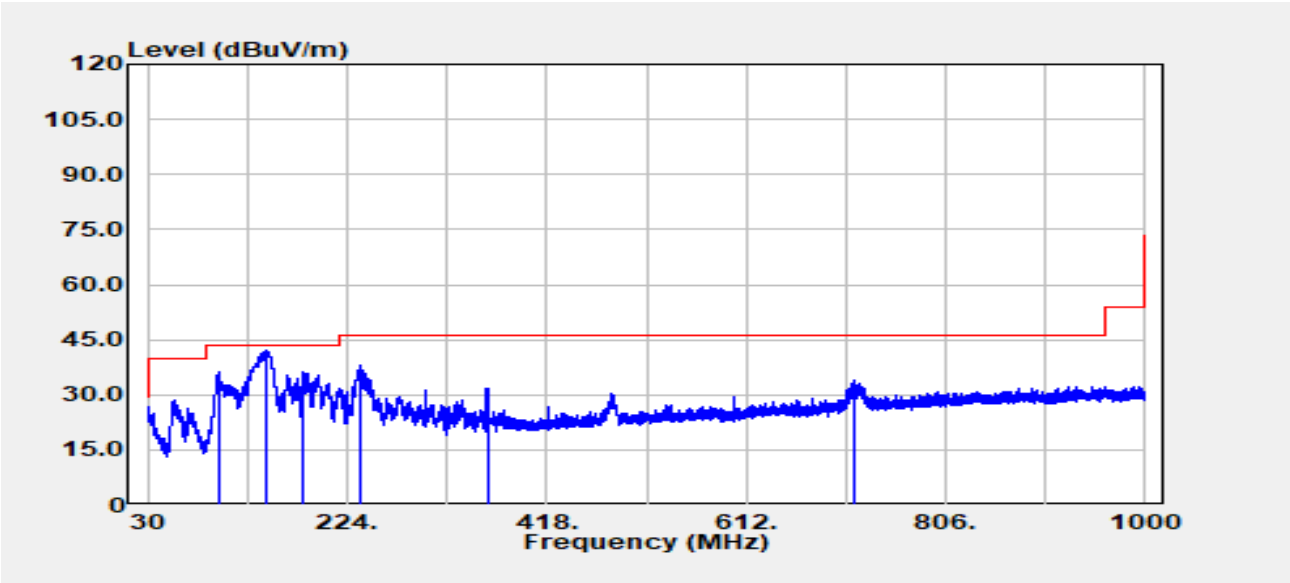


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
98.87	Peak	50.10	-13.83	36.27	43.50	-7.23
146.40	Peak	52.82	-10.88	41.94	43.50	-1.56
179.99	Peak	48.51	-12.19	36.32	43.50	-7.18
236.00	Peak	49.54	-11.67	37.88	46.00	-8.12
360.04	Peak	39.71	-7.99	31.72	46.00	-14.28
717.73	Peak	34.80	-0.84	33.96	46.00	-12.04



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 175 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-04
Operation Band	:802.11a/Band4	Temp./Humi.	:24.6/55
Frequency	:5745 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:43		

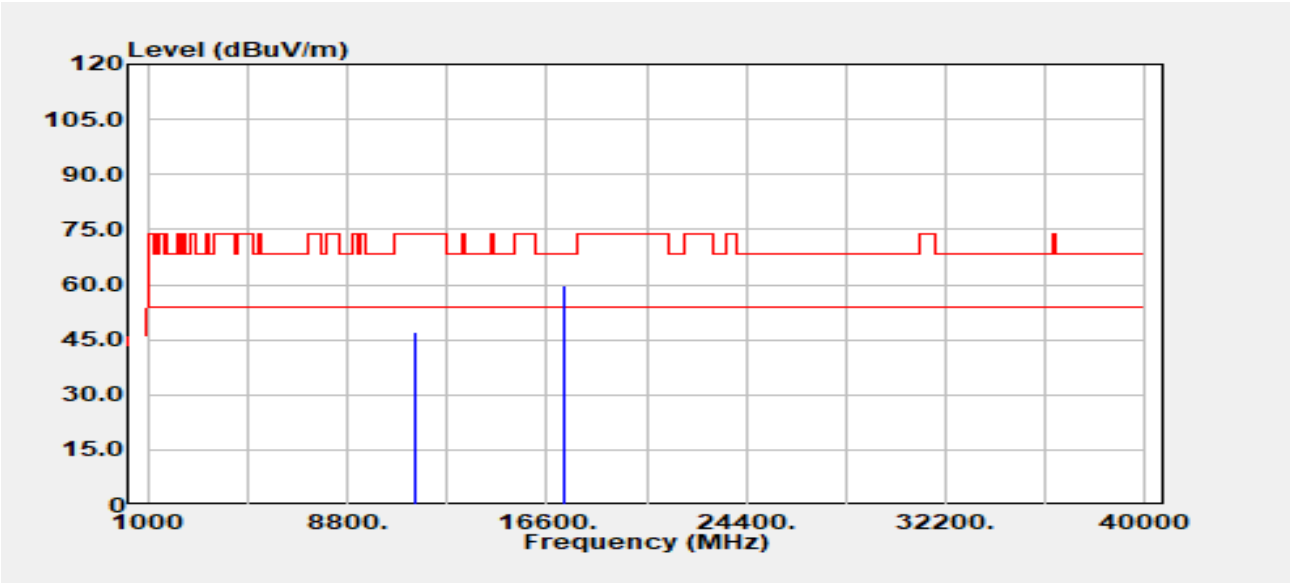


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11490.00	Peak	33.85	13.32	47.17	74.00	-26.83
11490.00	Average	28.79	13.32	42.11	54.00	-11.89
17235.00	Peak	31.90	27.76	59.66	68.20	-8.54



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 176 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-04
Operation Band	:802.11a/Band4	Temp./Humi.	:24.6/55
Frequency	:5745 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:43		

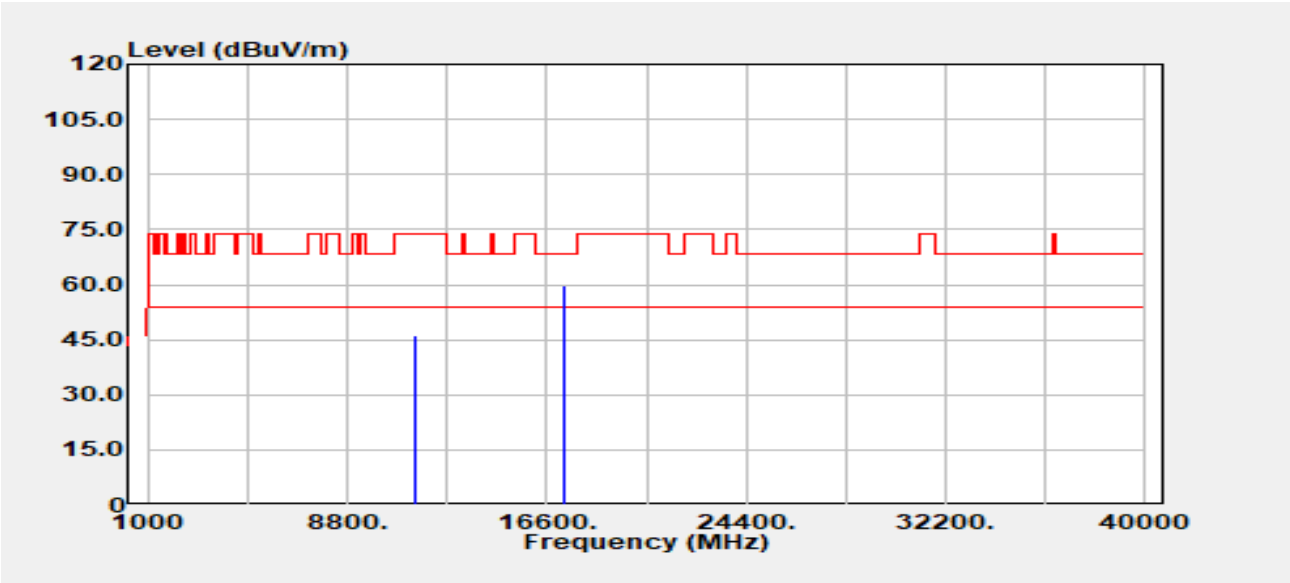


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11490.00	Peak	32.96	13.32	46.28	74.00	-27.72
11490.00	Average	27.94	13.32	41.27	54.00	-12.73
17235.00	Peak	31.87	27.76	59.63	68.20	-8.57



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 177 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-04
Operation Band	:802.11a/Band4	Temp./Humi.	:24.6/55
Frequency	:5785 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:43		

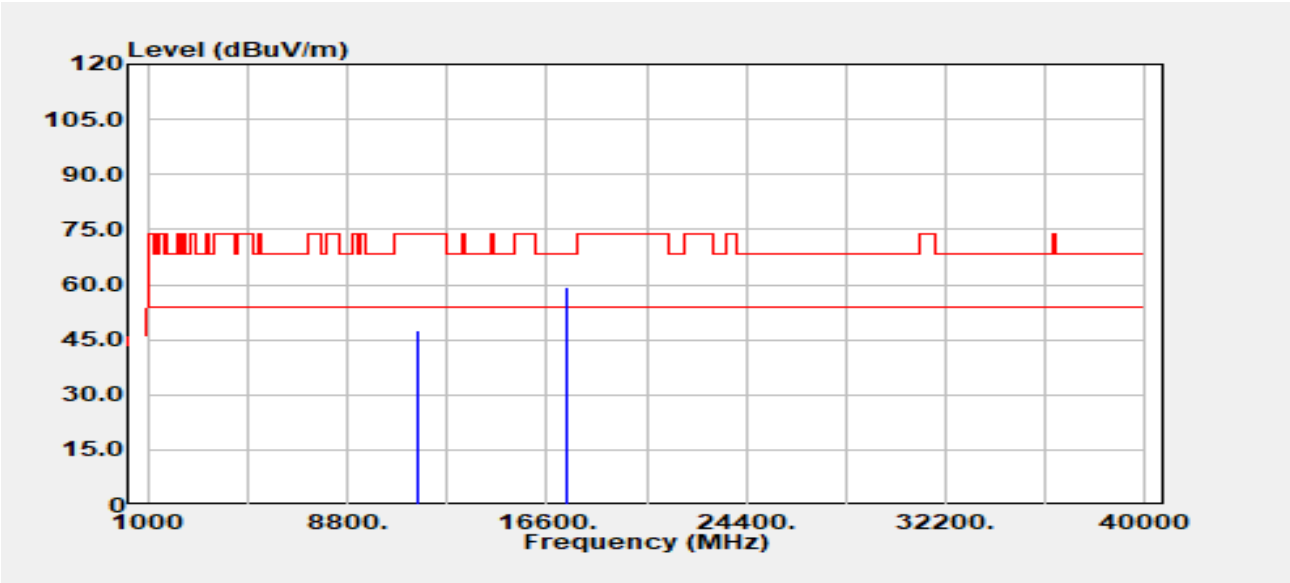


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11570.00	Peak	33.96	13.61	47.56	74.00	-26.44
11570.00	Average	29.89	13.61	43.50	54.00	-10.50
17355.00	Peak	32.26	27.04	59.30	68.20	-8.90



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 178 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-04
Operation Band	:802.11a/Band4	Temp./Humi.	:24.6/55
Frequency	:5785 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:43		

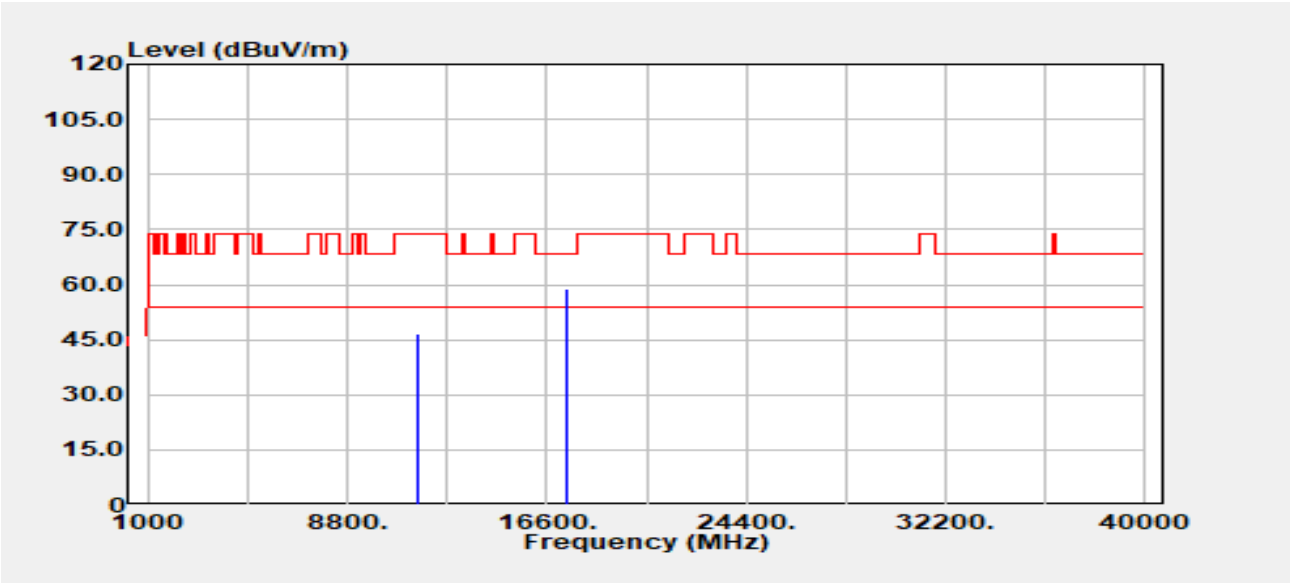


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11570.00	Peak	33.02	13.61	46.62	74.00	-27.38
11570.00	Average	28.85	13.61	42.46	54.00	-11.54
17355.00	Peak	31.96	27.04	59.00	68.20	-9.20



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 179 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-04
Operation Band	:802.11a/Band4	Temp./Humi.	:24.6/55
Frequency	:5825 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:42		

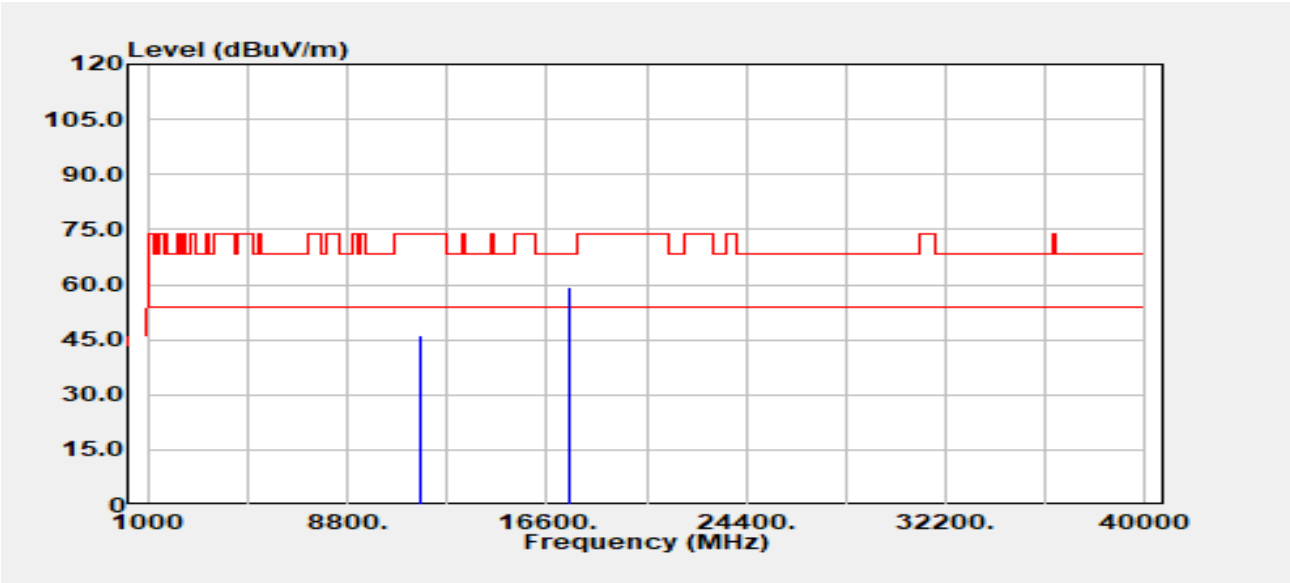


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11650.00	Peak	32.78	13.59	46.37	74.00	-27.63
11650.00	Average	28.16	13.59	41.75	54.00	-12.25
17475.00	Peak	32.65	26.83	59.48	68.20	-8.72



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 180 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-04
Operation Band	:802.11a/Band4	Temp./Humi.	:24.6/55
Frequency	:5825 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:42		

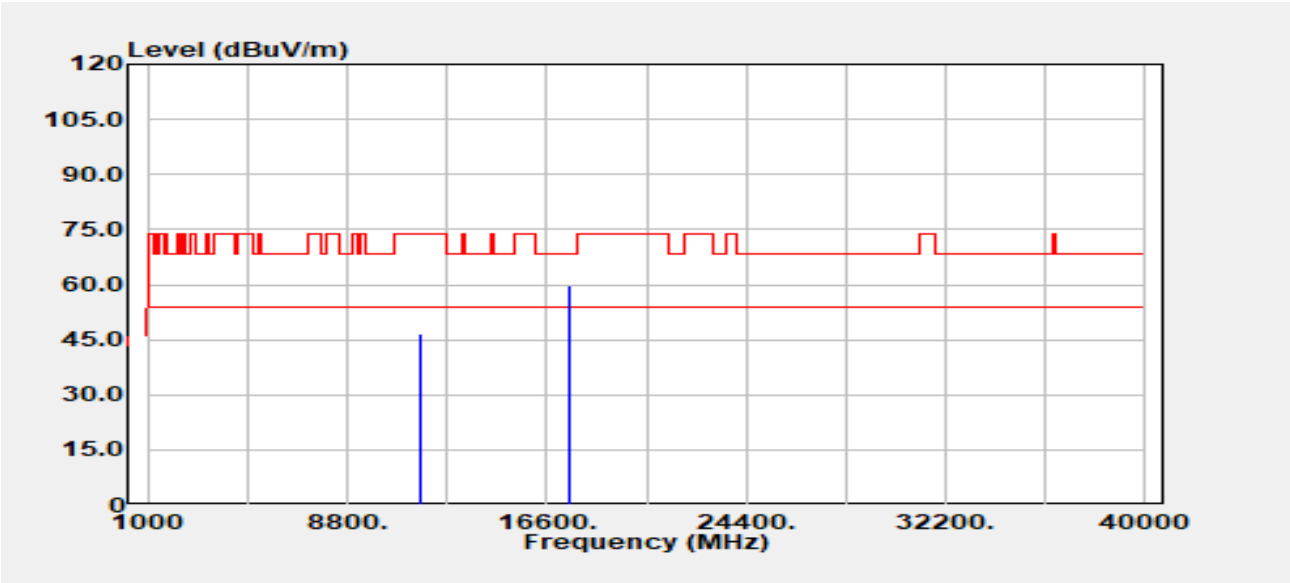


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11650.00	Peak	33.22	13.59	46.81	74.00	-27.19
11650.00	Average	28.07	13.59	41.66	54.00	-12.34
17475.00	Peak	33.10	26.83	59.94	68.20	-8.26



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 181 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-05
Operation Band	:802.11n20/Band4	Temp./Humi.	:24.6/55
Frequency	:5745 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:43		

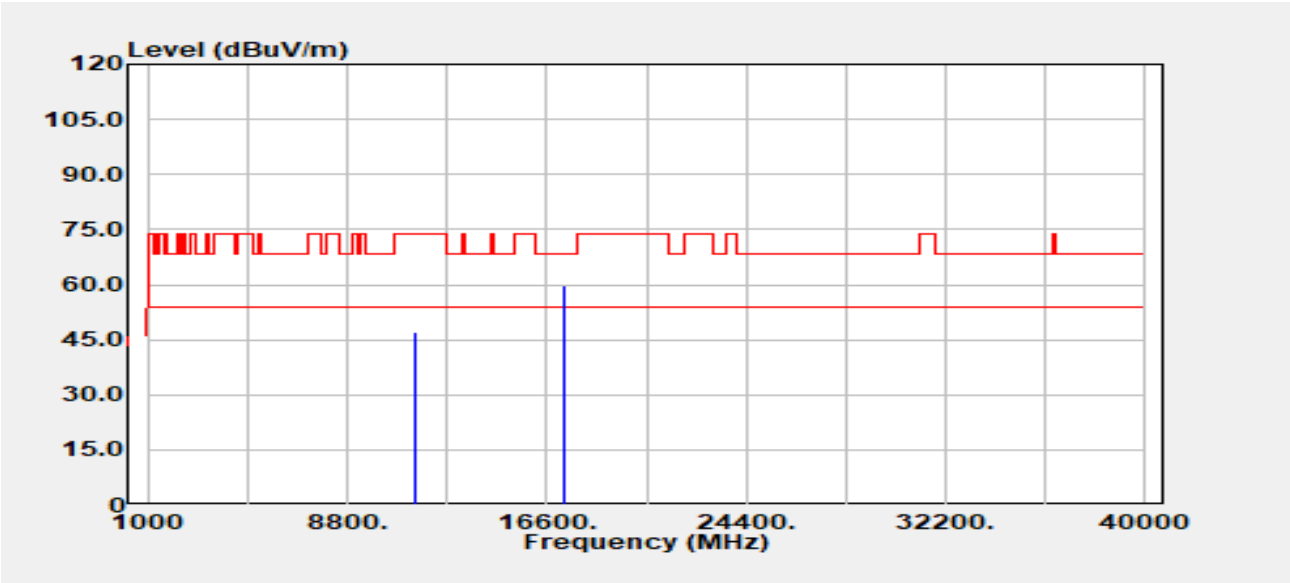


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11490.00	Peak	33.67	13.32	46.99	74.00	-27.01
11490.00	Average	28.43	13.32	41.75	54.00	-12.25
17235.00	Peak	32.13	27.76	59.89	68.20	-8.31



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 182 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-05
Operation Band	:802.11n20/Band4	Temp./Humi.	:24.6/55
Frequency	:5745 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:43		

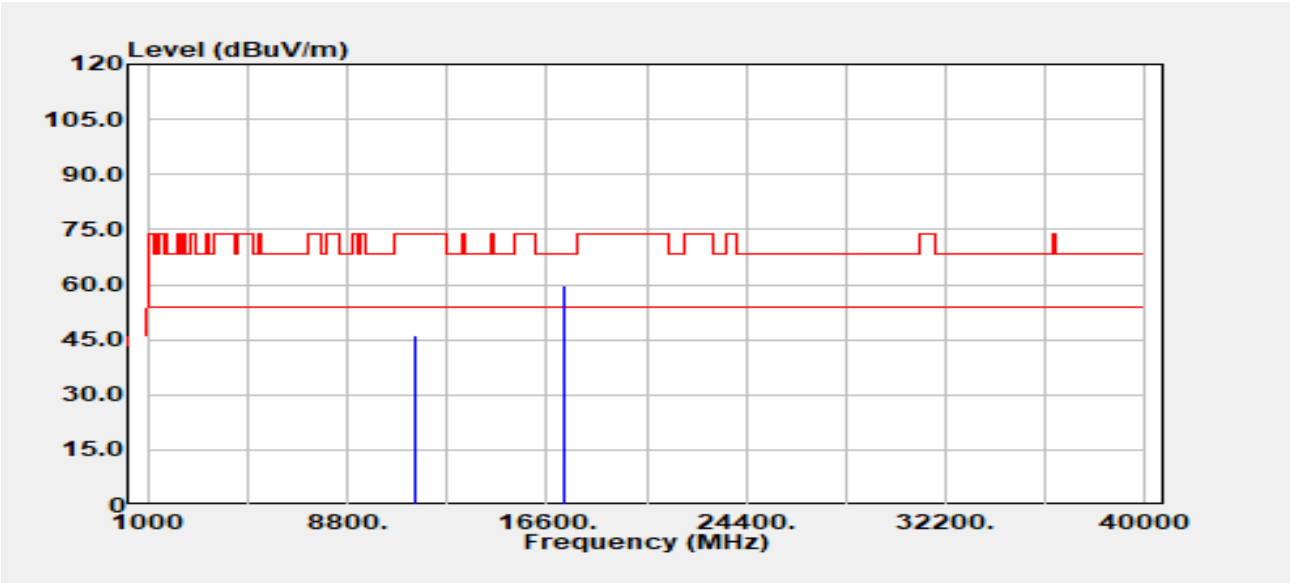


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11490.00	Peak	32.86	13.32	46.18	74.00	-27.82
11490.00	Average	28.08	13.32	41.41	54.00	-12.59
17235.00	Peak	32.04	27.76	59.79	68.20	-8.41



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 183 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-05
Operation Band	:802.11n20/Band4	Temp./Humi.	:24.6/55
Frequency	:5785 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:41		

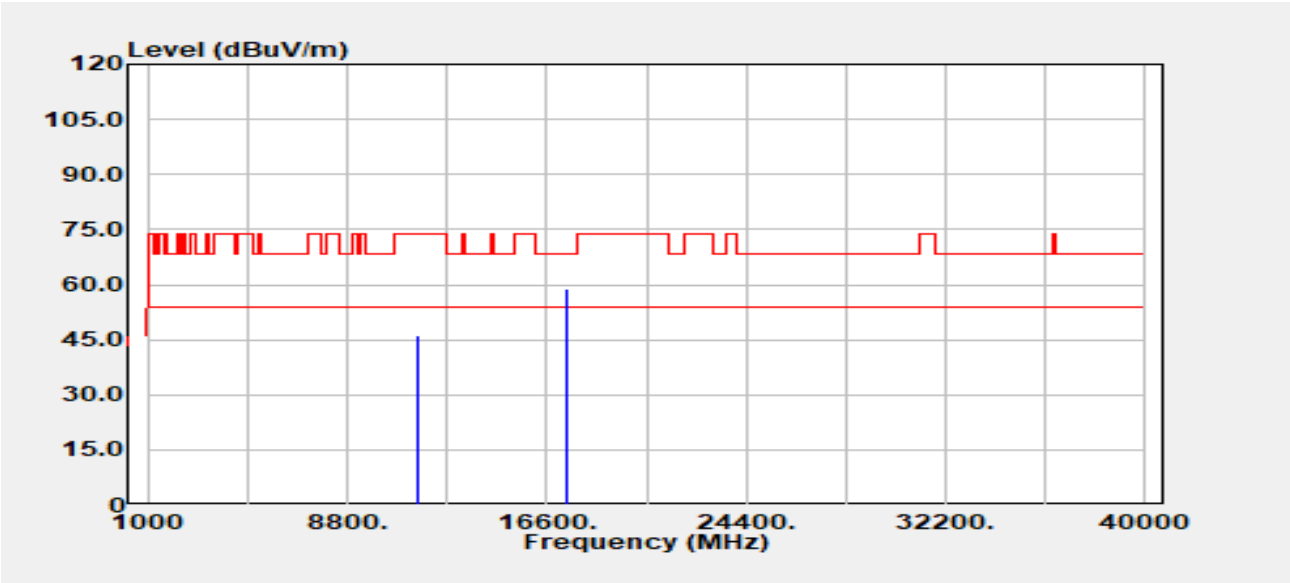


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11570.00	Peak	32.39	13.61	46.00	74.00	-28.00
11570.00	Average	29.27	13.61	42.88	54.00	-11.12
17355.00	Peak	31.99	27.04	59.03	68.20	-9.17



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 184 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-05
Operation Band	:802.11n20/Band4	Temp./Humi.	:24.6/55
Frequency	:5785 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:41		

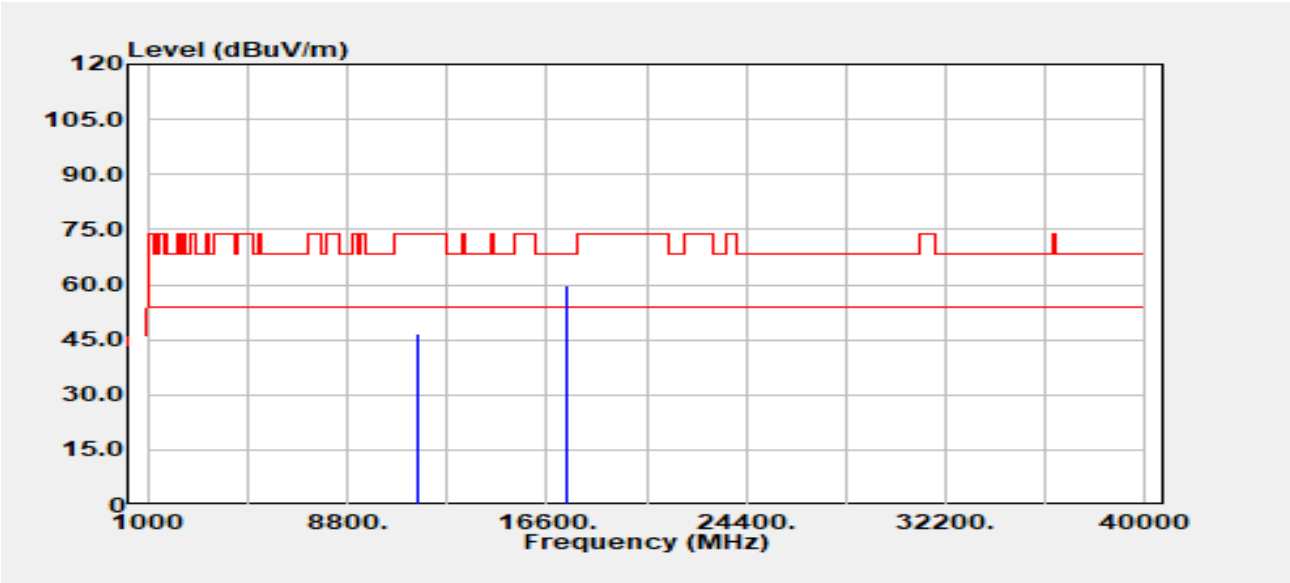


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11570.00	Peak	32.92	13.61	46.53	74.00	-27.47
11570.00	Average	28.29	13.61	41.90	54.00	-12.10
17355.00	Peak	32.72	27.04	59.76	68.20	-8.44



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 185 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-05
Operation Band	:802.11n20/Band4	Temp./Humi.	:24.6/55
Frequency	:5825 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:40		

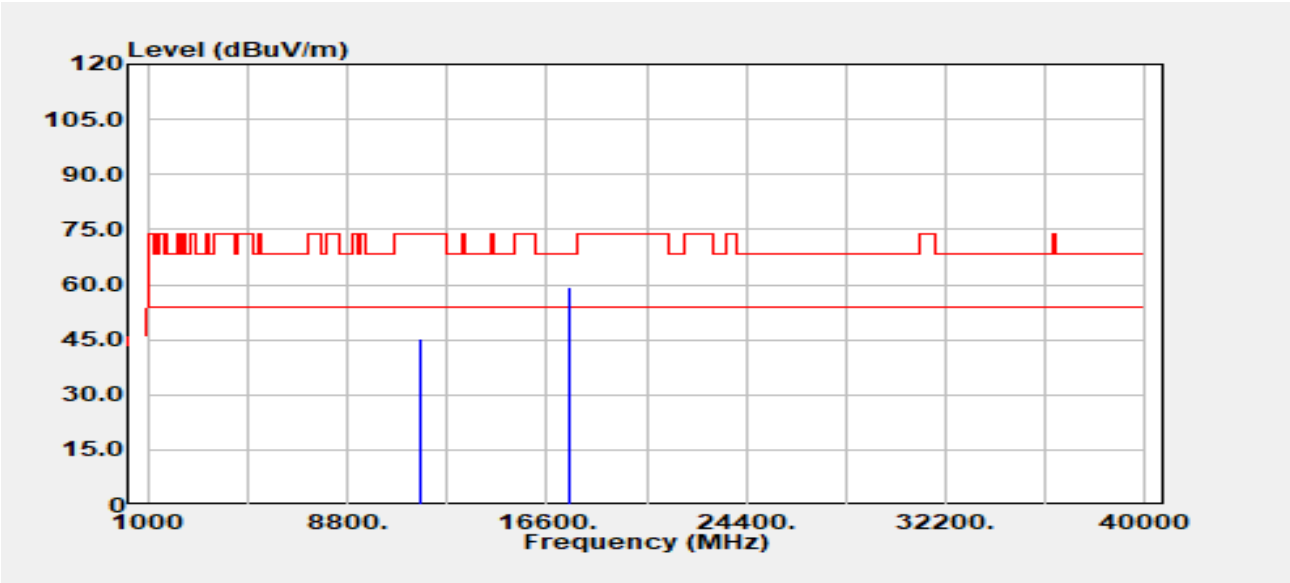


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11650.00	Peak	31.60	13.59	45.19	74.00	-28.81
11650.00	Average	27.32	13.59	40.91	54.00	-13.09
17475.00	Peak	32.45	26.83	59.28	68.20	-8.92



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 186 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-05
Operation Band	:802.11n20/Band4	Temp./Humi.	:24.6/55
Frequency	:5825 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:40		

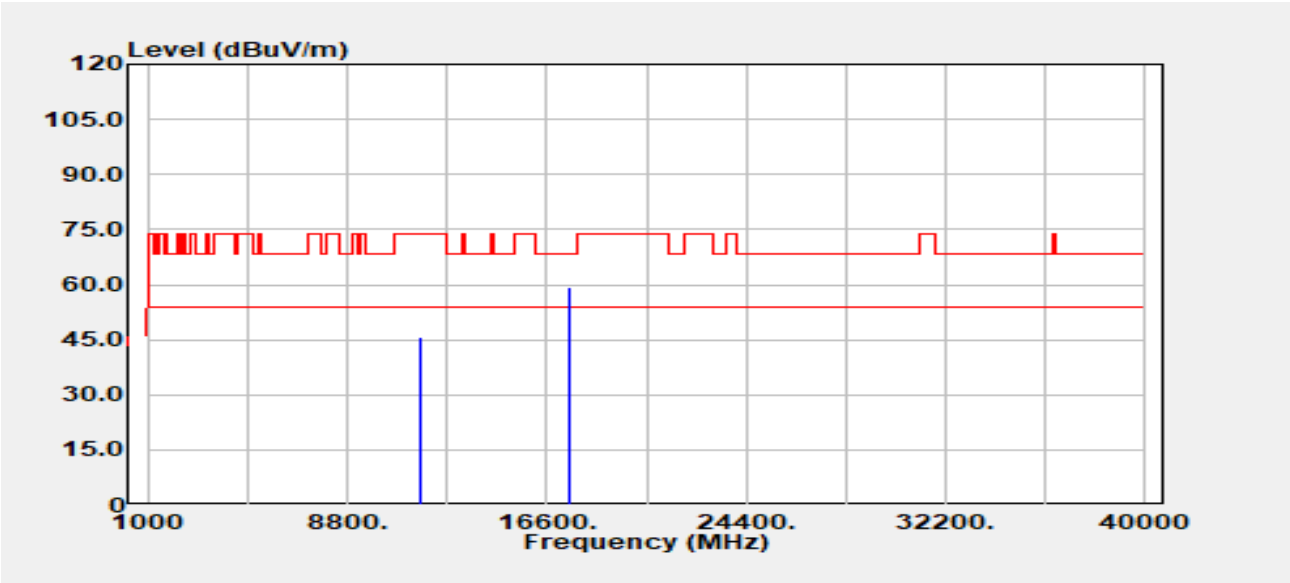


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11650.00	Peak	32.09	13.59	45.68	74.00	-28.32
11650.00	Average	27.65	13.59	41.24	54.00	-12.76
17475.00	Peak	32.66	26.83	59.49	68.20	-8.71



Project No: TM-2411000185P
Report No.: TMWK2411003935KR

Page: 187 / 208
Rev.: 01

Project No	:TM-2411000185P	Test Date	:2024-12-06
Operation Band	:802.11n40/Band4	Temp./Humi.	:24.6/55
Frequency	:5755 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:39		

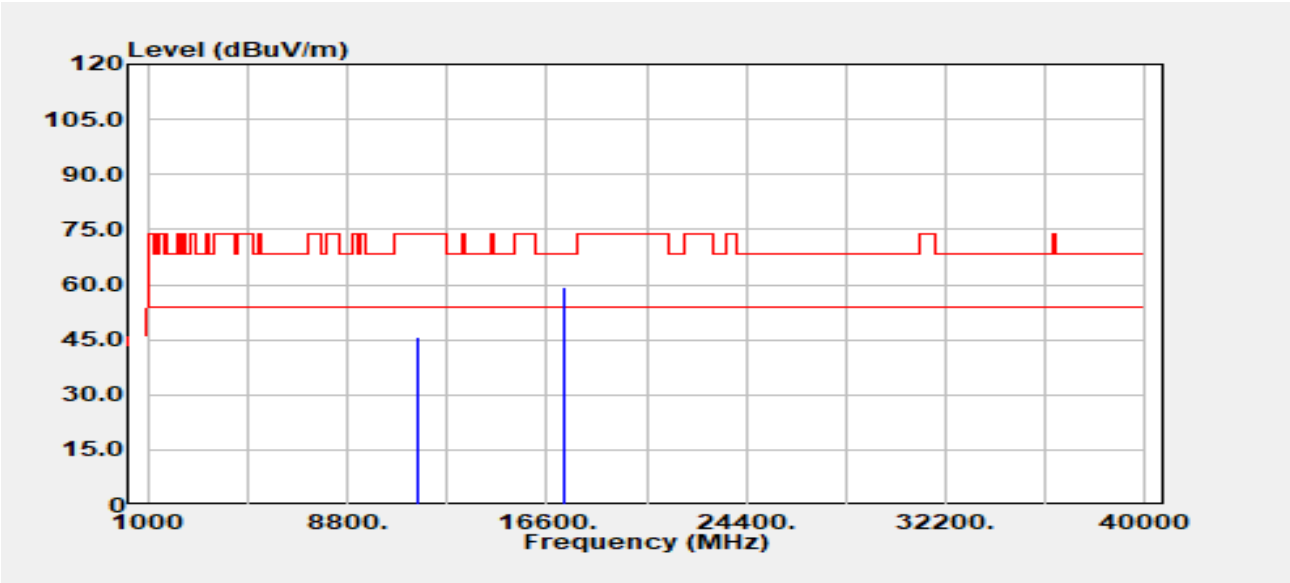

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11510.00	Peak	32.35	13.43	45.78	74.00	-28.22
11510.00	Average	25.58	13.43	39.01	54.00	-14.99
17265.00	Peak	31.54	27.64	59.18	68.20	-9.02