

ZT-USB433


USB Access Interface

Introduction


- The ZT-USB433 is collect information on Device to the Data Manager.
- RF IC for the main design, combined with USB interface, MCU codec.

Software Operation


1. Please refer to the “ZT-USB433’s USB to PC Data Form” to install USB driver into PC.
2. Execute the HG_Demo.exe program and the window shall appear.

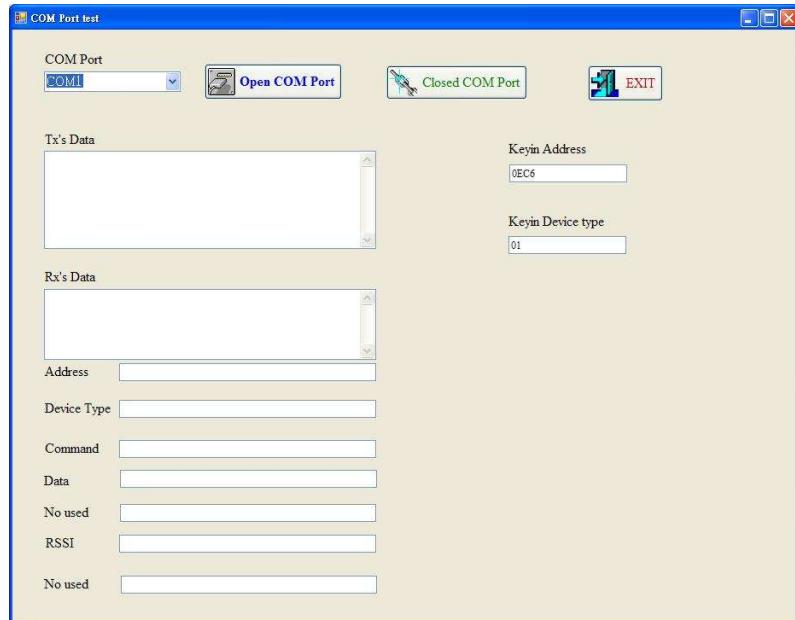

3. Connect the ZT-USB433 to the PC.
4. Select the COM port generated by ZT-USB433 and click the “Open COM Port” button.
5. Trigger the ZT-PIR433 by moving hand in front of the sensor or placing a magnet close to the sticker of “place magnet here”, some data will show on the window.

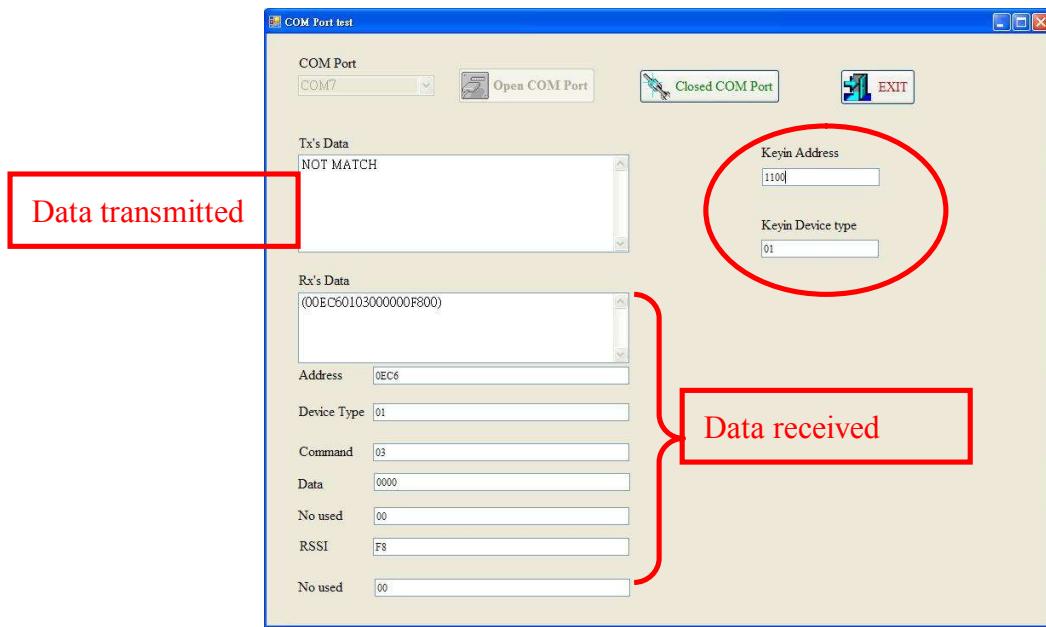

6. If the “Key in Address” and “Key in Device Type” match with the “Address” and “Device Type” of data received, a series of data pack will show on the “Tx’s Data” block. If unmatched, the “Tx’s Data” block will show “NOT MATCH”.

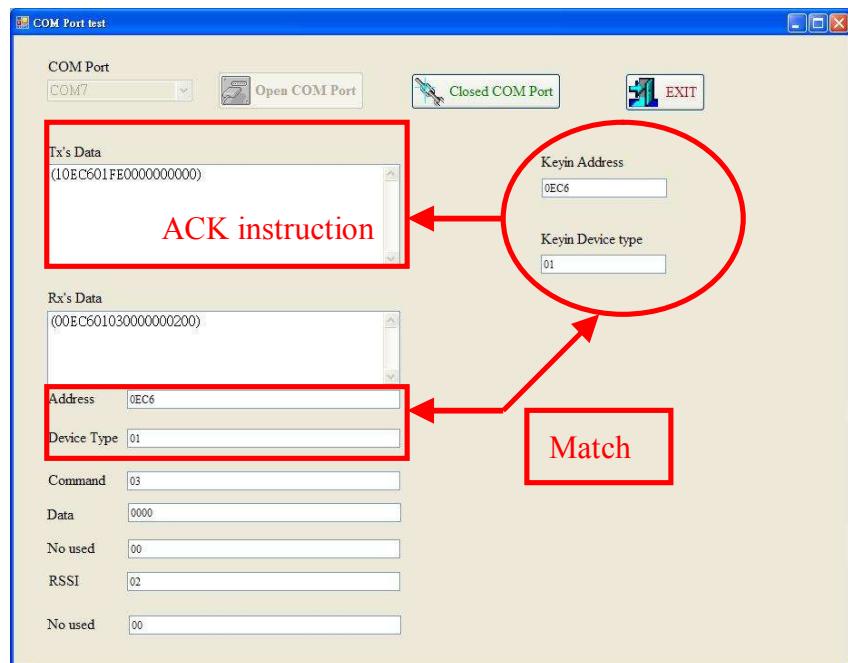

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.

Note:

1. Any changes of modifications not expressly approved by the grantee of this device could void the user's authority to operate the equipment.

2. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15

of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a

residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed

and used in accordance with the instructions, may cause harmful interference to radio communications.

However,

there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the

equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help