FCC SAR Test Report

APPLICANT : Tobii Technology AB

EQUIPMENT: DMS-SE07

BRAND NAME: Tobii

MODEL NAME : Glasses2 RU

FCC ID : W5M-DMSSE07

STANDARD : **FCC 47 CFR Part 2 (2.1093)**

ANSI/IEEE C95.1-1992

IEEE 1528-2003

We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and had been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Eric Huang / Deputy Manager

Este man?

Approved by: Jones Tsai / Manager

lac-MRA



Report No.: FA4O2406

SPORTON INTERNATIONAL INC.

No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Taoyuan City, Taiwan R.O.C.

Page 1 of 23

TEL: 886-3-327-3456 / FAX: 886-3-328-4978

FCC ID: W5M-DMSSE07

Issued Date: Feb. 17, 2015

Form version. : 141020

Table of Contents

1. Statement of Compliance	4
2. Administration Data	4
3. Guidance Standard	5
4. Equipment Under Test (EUT)	5
4.1 General Information	5
4.2 Maximum Tune-up Limit	5
5. RF Exposure Limits	
5.1 Uncontrolled Environment	6
5.2 Controlled Environment	
6. Specific Absorption Rate (SAR)	
6.1 Introduction	
6.2 SAR Definition	
7. System Description and Setup	8
8. Measurement Procedures	
8.1 Spatial Peak SAR Evaluation	
8.2 Power Reference Measurement	
8.3 Area Scan	10
8.4 Zoom Scan	
8.5 Volume Scan Procedures	
8.6 Power Drift Monitoring	
9. Test Equipment List	
10. System Verification	
10.1 Tissue Verification	
10.2 System Performance Check Results	
11. Conducted RF Output Power (Unit: dBm)	
12. Antenna Location	
13. SAR Test Results	
13.1 Body SAR	
13.2 Repeated SAR Measurement	
14. Uncertainty Assessment	
15. References	23
Appendix A. Plots of System Performance Check	
Appendix B. Plots of High SAR Measurement	
Appendix C. DASY Calibration Certificate	
Appendix D. Test Setup Photos	

Revision History

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FA4O2406	Rev. 01	Initial issue of report	Feb. 17, 2015

TEL: 886-3-327-3456 / FAX: 886-3-328-4978

FCC ID: W5M-DMSSE07

Issued Date: Feb. 17, 2015 Form version.: 141020

1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **Tobii Technology AB**, **DMS-SE07**, **Glasses2 RU**, are as follows.

Equipment Class	Frequency Band	Highest SAR Summary Body 1g SAR (W/kg)
DTS	WLAN 2.4GHz Band	1.26
NIII	WLAN 5.2GHz Band	0.83
NII	WLAN 5.8GHz Band	1.21
Date of Testing:		11/21/2014 ~ 11/22/2014

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2003.

2. Administration Data

Testing Laboratory		
Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Taoyuan City, Taiwan R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978	

Applicant		
Company Name	Tobii Technology AB	
Address	Karlsrov. 2D, 182 53 Danderyd, Sweden	

Manufacturer		
Company Name	Advantech Co. Ltd	
Address	No. 1, Alley 20, Lane 26, Rueiguang Rd., Neihu District, Taipei City, Taiwan, R. O. C.	

TEL: 886-3-327-3456 / FAX: 886-3-328-4978

FCC ID: W5M-DMSSE07 Page 4 of 23

Issued Date: Feb. 17, 2015 Form version.: 141020

3. Guidance Standard

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

Report No.: FA4O2406

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2003
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r03
- FCC KDB 865664 D02 SAR Reporting v01r01
- FCC KDB 447498 D01 General RF Exposure Guidance v05r02
- FCC KDB 248227 D01 SAR meas for 802 11abg v01r02

4. Equipment Under Test (EUT)

4.1 General Information

Product Feature & Specification		
Equipment Name	DMS-SE07	
Brand Name	Tobii	
Model Name	Glasses2 RU	
FCC ID	W5M-DMSSE07	
S/N	TG02B-080104030771 (14-19)	
Frequency Range	WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz	
Mode	• 802.11a/b/g/n HT20	

4.2 Maximum Tune-up Limit

Mode		Average Power (dBm)	
802.11b		18.50	
2.4GHz	802.11g	15.00	
	802.11n-HT20	14.00	
5GHz	802.11a	14.50	
3GHZ	802.11n-HT20	13.50	

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 / FAX: 886-3-328-4978 Issued Date: Feb. 17, 2015 Form version.: 141020

FCC ID: W5M-DMSSE07 Page 5 of 23

5. RF Exposure Limits

5.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

Report No.: FA4O2406

5.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

6. Specific Absorption Rate (SAR)

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (p). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

Page 7 of 23


TEL: 886-3-327-3456 / FAX: 886-3-328-4978

FCC ID: W5M-DMSSE07

Issued Date: Feb. 17, 2015 Form version.: 141020

7. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

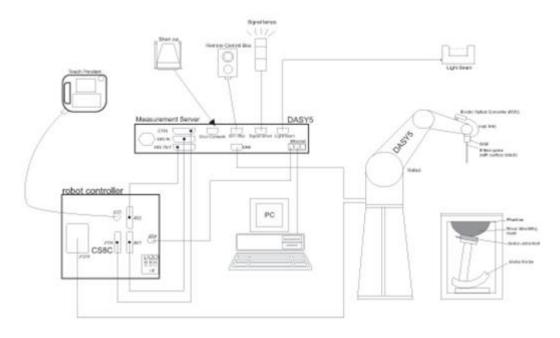

Report No.: FA4O2406

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

8. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

(a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.

Report No.: FA4O2406

- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

SPORTON INTERNATIONAL INC.

8.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values form the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

8.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

8.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0 is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r03 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5 \text{ mm}$
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
	\leq 2 GHz: \leq 15 mm 2 – 3 GHz: \leq 12 mm	$3 - 4 \text{ GHz:} \le 12 \text{ mm}$ $4 - 6 \text{ GHz:} \le 10 \text{ mm}$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area} When the x or y dimension of the test device measurement plane orientation, is smaller to the measurement resolution must be \leq the x or y dimension of the test device with at measurement point on the test device.		on, is smaller than the above, must be \leq the corresponding levice with at least one

Page 10 of 23

TEL: 886-3-327-3456 / FAX: 886-3-328-4978

FCC ID: W5M-DMSSE07

Issued Date: Feb. 17, 2015

Form version. : 141020

8.4 Zoom Scan

Zoom scans are used assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube shoes base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Report No.: FA4O2406

Zoom scan parameters extracted from FCC KDB 865664 D01v01r03 SAR measurement 100 MHz to 6 GHz.

		≤ 3 GHz	> 3 GHz	
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}		\leq 2 GHz: \leq 8 mm 2 – 3 GHz: \leq 5 mm [*]	$3 - 4 \text{ GHz: } \le 5 \text{ mm}^*$ $4 - 6 \text{ GHz: } \le 4 \text{ mm}^*$	
uniform grid: A		grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	$3 - 4 \text{ GHz: } \le 4 \text{ mm}$ $4 - 5 \text{ GHz: } \le 3 \text{ mm}$ $5 - 6 \text{ GHz: } \le 2 \text{ mm}$
Maximum zoom scan spatial resolution, normal to phantom surface	patial resolution, normal to phantom	Δz _{Zoom} (1): between 1 st two points closest to phantom surface	≤ 4 mm	$3 - 4 \text{ GHz: } \le 3 \text{ mm}$ $4 - 5 \text{ GHz: } \le 2.5 \text{ mm}$ $5 - 6 \text{ GHz: } \le 2 \text{ mm}$
grid	grid	Δz _{Zoom} (n>1): between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	X. V. 7		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm

Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.

8.5 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

8.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 / FAX: 886-3-328-4978 Issued Date: Feb. 17, 2015

FCC ID: W5M-DMSSE07 Page 11 of 23 Form version.: 141020

When zoom scan is required and the <u>reported</u> SAR from the area scan based 1-g SAR estimation procedures of KDB 447498 is $\leq 1.4 \text{ W/kg}$, $\leq 8 \text{ mm}$, $\leq 7 \text{ mm}$ and $\leq 5 \text{ mm}$ zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.

9. Test Equipment List

Manufacturer	Name of Equipment	Type/Madel	Carial Number	Calib	ration	
Manufacturer	Name of Equipment	Type/Model	Serial Number	Last Cal.	Due Date	
SPEAG	2450MHz System Validation Kit	D2450V2	869	Jun. 13, 2014	Jun. 12, 2015	
SPEAG	5GHz System Validation Kit	D5GHzV2	1006	Sep. 25, 2014	Sep. 24, 2015	
SPEAG	Data Acquisition Electronics	DAE4	1279	Jul. 23, 2014	Jul. 22, 2015	
SPEAG	Dosimetric E-Field Probe	EX3DV4	3753	Mar. 26, 2014	Mar. 25, 2015	
SPEAG	Device Holder	N/A	N/A	NCR	NCR	
R&S	Signal Generator	SMU200A	102502	Jul. 07, 2014	Jul. 06, 2015	
SPEAG	Dielectric Probe Kit	DAKS-3.5	0004	Mar. 04, 2014	Mar. 03, 2015	
Agilent	ENA Network Analyzer	E5071C	MY46101588	May. 31, 2014	May. 30, 2015	
Anritsu	Power Meter	ML2495A	1036004	Aug. 09, 2014	Aug. 08, 2015	
Anritsu	Power Sensor	MA2411B	1027253	Aug. 11, 2014	Aug. 10, 2015	
R&S	Spectrum Analyzer	FSP 7	101131	Jul. 10, 2014	Jul. 09, 2015	
Agilent	Dual Directional Coupler	778D	50422	No	te1	
Woken	Attenuator 1	WK0602-XX	N/A	No	te1	
PE	Attenuator 2	PE7005-10	N/A	No	te1	
PE	Attenuator 3	PE7005- 3	N/A	No	te1	
AR	Power Amplifier	5S1G4M2	0328767	Note1		
Mini-Circuits	Power Amplifier	ZVE-3W	162601250	Note1		
Mini-Circuits	Power Amplifier	ZHL-42W+	13440021344	Note1		

Report No.: FA4O2406

General Note:

Prior to system verification and validation, the path loss from the signal generator to the system check source and
the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the
network analyzer. The reading of the power meter was offset by the path loss difference between the path to the
power meter and the path to the system check source to monitor the actual power level fed to the system check
source.

10. System Verification

10.1 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Report No.: FA4O2406

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (εr)			
				For Head							
750 41.1 57.0 0.2 1.4 0.2 0 0.89											
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5			
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5			
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0			
2450	55.0	0	0	0	0	45.0	1.80	39.2			
2600	54.8	0	0	0.1	0	45.1	1.96	39.0			
				For Body							
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5			
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2			
900	50.8	48.2	0	0.9	0.1	0	1.05	55.0			
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3			
2450	68.6	0	0	0	0	31.4	1.95	52.7			
2600	68.1	0	0	0.1	0	31.8	2.16	52.5			

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ε _r)	Conductivity Target (σ)	Permittivity Target (ε _r)	Delta (σ) (%)	Delta (ε _r) (%)	Limit (%)	Date
2450	MSL	22.3	1.920	53.118	1.95	52.70	-1.54	0.79	±5	2014/11/22
5200	MSL	22.6	5.244	47.499	5.30	49.00	-1.06	-3.06	±5	2014/11/21
5800	MSL	22.6	6.127	46.464	6.00	48.20	2.12	-3.60	±5	2014/11/21

10.2 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2014/11/22	2450	MSL	250	D2450V2-869	EX3DV4 - SN3753	DAE4 Sn1279	13.00	50.30	52.00	3.38
2014/11/21	5200	MSL	100	D5GHzV2-1006	EX3DV4 - SN3753	DAE4 Sn1279	7.83	77.50	78.30	1.03
2014/11/21	5800	MSL	100	D5GHzV2-1006	EX3DV4 - SN3753	DAE4 Sn1279	8.23	78.40	82.30	4.97

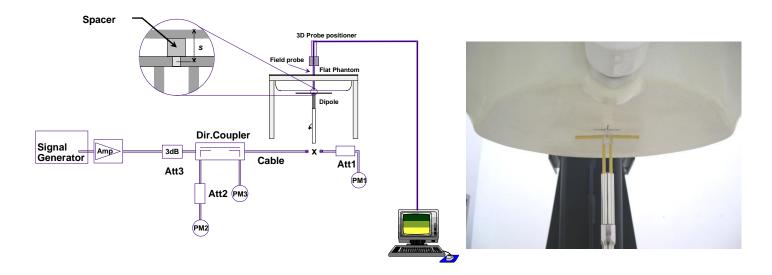


Fig 8.3.1 System Performance Check Setup

Fig 8.3.2 Setup Photo

Report No.: FA4O2406

FCC ID: W5M-DMSSE07 Page 14 of 23 Form version.: 141020

11. Conducted RF Output Power (Unit: dBm)

<WLAN Conducted Power>

General Note:

1. For IEEE802.11a/b/g SAR testing, highest average RF output power channel for the lowest data rate for 802.11b were selected for SAR evaluation. 802.11g were not investigated since the average output powers over all channels and data rates were not more than 0.25 dB higher than the tested channel in the lowest data rate of 802.11b mode.

Report No.: FA4O2406

- 2. For IEEE802.11n, SAR testing can be conducted on channel with the highest output power when taking into consideration tune-up tolerance for same test configuration that was identified during SAR evaluations for IEEE802.11a/b/g (as applicable) provided bandwidth and test position are the same.
- 3. For IEEE802.11n with multiple channel BW configurations, highest channel BW configuration with highest output power limit shall be tested.
- 4. Testing of lower BW configurations is not required when the maximum average output of the default test channels in each lower BW configuration is less than 1/4dB higher than the default test channel in the highest BW configuration.

<2.4GHz WLAN>

	,	WLAN 2.4GHz 802.11I	b Average Power (dBm)									
Power vs. Channel													
Channal	Frequency	Data Rate	OMbas	E EMbaa	11Nbpo								
Channel	(MHz)	1Mbps	- 2Mbps	5.5Mbps	11Mbps								
CH 1	2412	17.32											
CH 6	2437	17.48	17.45	17.38	17.41								
CH 11	2462	17.46											

	WLAN 2.4GHz 802.11g Average Power (dBm)													
Po	wer vs. Chan	nel		Power vs. Data Rate										
Channel	Frequency	Data Rate	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps					
Chamer	(MHz)	6Mbps	alvibps	12IVIDPS	roivibhs	241VIDPS	Solvibhs	40IVIDPS	54Mbhs					
CH 1	2412	13.96		14.80										
CH 6	2437	14.86	14.84		14.79	14.77	14.83	14.58	14.64					
CH 11	2462	14.68												

	WLAN 2.4GHz 802.11n-HT20 Average Power (dBm)													
Po	wer vs. Chan	nel	Power vs. MCS Index											
Channel	Frequency	MCS Index	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7					
Chamilei	(MHz)	MCS0	IVICOT	IVICOZ	IVICOS	IVIC34	IVICOS	IVICSO	IVICS					
CH 1	2412	13.83												
CH 6	2437	13.80	13.80	13.79	13.79	13.78	13.76	13.81	13.48					
CH 11	2462	13.65												



SPORTON LAB. FCC SAR Test Report

<5GHz WLAN>

	WLAN 5GHz 802.11a Average Power (dBm)													
Po	ower vs. Chan	nel			Pov	wer vs. Data F	Rate							
Channel	Frequency	Data Rate	9Mbps	12Mbpa	10Mbpa	24Mbpa	26Mbpa	40Mbpa	E4Mbpo					
Channel	(MHz)	6Mbps	Sidnie	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps					
CH 36	5180	14.15												
CH 40	5200	14.03	14.14	14.14	14.11	14.12	14.09	12.92	12.83					
CH 44	5220	14.07	14.14						12.03					
CH 48	5240	14.02												
CH 149	5745	13.10												
CH 153	5765	13.00												
CH 157	5785	13.40	13.39	12.68	12.64	11.66	11.71	10.28	10.27					
CH 161	5805	13.01												
CH 165	5825	12.80												


Report No.: FA4O2406

	WLAN 5GHz 802.11n-HT20 Average Power (dBm)													
Po	ower vs. Chan	nel			Pov	ver vs. MCS Ir	ndex							
Channel	Frequency	Data Rate	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps					
Charmer	(MHz)	6Mbps	alvibha	121110045	Tolvibha	241VIDPS	Solvibhs	401VIDPS	54IVIDPS					
CH 36	5180	13.25			13.21									
CH 40	5200	13.01	13.20	13.15		13.23	12.85	12.77	11.98					
CH 44	5220	13.21	13.20						11.30					
CH 48	5240	13.07												
CH 149	5745	12.21												
CH 153	5765	12.98												
CH 157	5785	13.29	12.49	12.37	11.61	11.54	10.15	10.11	9.30					
CH 161	5805	13.00												
CH 165	5825	12.83												

TEL: 886-3-327-3456 / FAX: 886-3-328-4978

Issued Date : Feb. 17, 2015 Form version. : 141020 FCC ID: W5M-DMSSE07 Page 16 of 23

12. Antenna Location

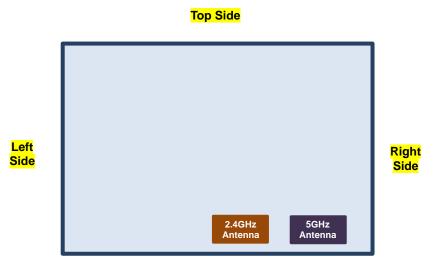

Bottom Side

Front View

Report No.: FA4O2406

TEL: 886-3-327-3456 / FAX: 886-3-328-4978

FCC ID: W5M-DMSSE07

Issued Date : Feb. 17, 2015

Page 17 of 23 Form version. : 141020

13. SAR Test Results

General Note:

- 1. Per KDB 447498 D01v05r02, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.

Report No.: FA4O2406

- b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
- c. For WLAN: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
- 2. Per KDB 447498 D01v05r02, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - · ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - \cdot \leq 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - · ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
- 3. EUT will choose either WLAN 2.4GHz or WLAN 5GHz according to the network signal condition; therefore, 2.4GHz WLAN and 5GHz WLAN will not operate simultaneously at any moment.
- 4. During SAR testing the WLAN transmission was verified using a spectrum analyzer.

13.1 Body SAR

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Dower	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Drift	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	0cm	6	2437	17.48	18.50	1.265	100	1.000	-0.14	0.973	1.231
	WLAN2.4GHz	802.11b 1Mbps	Front	0cm	1	2412	17.32	18.50	1.312	100	1.000	-0.07	0.953	1.251
	WLAN2.4GHz	802.11b 1Mbps	Front	0cm	11	2462	17.46	18.50	1.271	100	1.000	-0.18	0.940	1.194
	WLAN2.4GHz	802.11n-HT20 MCS0	Front	0cm	1	2412	13.83	14.00	1.040	97.62	1.024	-0.04	0.388	0.413
	WLAN2.4GHz	802.11b 1Mbps	Back	0cm	6	2437	17.48	18.50	1.265	100	1.000	-0.03	0.039	0.049
	WLAN2.4GHz	802.11b 1Mbps	Right Side	0cm	6	2437	17.48	18.50	1.265	100	1.000	-0.09	0.155	0.196
	WLAN2.4GHz	802.11b 1Mbps	Top Side	0cm	6	2437	17.48	18.50	1.265	100	1.000	-0.1	0.017	0.022
	WLAN2.4GHz	802.11b 1Mbps	Bottom Side	0cm	6	2437	17.48	18.50	1.265	100	1.000	-0.17	0.909	1.150
01	WLAN2.4GHz	802.11b 1Mbps	Bottom Side	0cm	1	2412	17.32	18.50	1.312	100	1.000	-0.17	0.957	1.256
	WLAN2.4GHz	802.11b 1Mbps	Bottom Side	0cm	11	2462	17.46	18.50	1.271	100	1.000	-0.17	0.792	1.006
	WLAN5GHz	802.11a 6Mbps	Front	0cm	36	5180	14.15	14.50	1.084	97.9	1.021	0.01	0.712	0.788
02	WLAN5GHz	802.11a 6Mbps	Front	0cm	44	5220	14.07	14.50	1.104	97.9	1.021	0.03	0.737	<mark>0.831</mark>
	WLAN5GHz	802.11n-HT20 MCS0	Front	0cm	36	5180	13.25	13.50	1.059	97.62	1.024	-0.06	0.514	0.558
	WLAN5GHz	802.11a 6Mbps	Back	0cm	36	5180	14.15	14.50	1.084	97.9	1.021	-0.01	0.066	0.073
	WLAN5GHz	802.11a 6Mbps	Right Side	0cm	36	5180	14.15	14.50	1.084	97.9	1.021	0.01	0.232	0.257
	WLAN5GHz	802.11a 6Mbps	Top Side	0cm	36	5180	14.15	14.50	1.084	97.9	1.021	0.13	0.029	0.032
	WLAN5GHz	802.11a 6Mbps	Bottom Side	0cm	36	5180	14.15	14.50	1.084	97.9	1.021	-0.09	0.631	0.698
	WLAN5GHz	802.11a 6Mbps	Front	0cm	157	5785	13.40	14.50	1.288	97.9	1.021	0.03	0.821	1.080
03	WLAN5GHz	802.11a 6Mbps	Front	0cm	149	5745	13.10	14.50	1.380	97.9	1.021	-0.08	0.856	<mark>1.206</mark>
	WLAN5GHz	802.11a 6Mbps	Front	0cm	161	5805	13.01	14.50	1.409	97.9	1.021	-0.04	0.814	1.171
	WLAN5GHz	802.11n-HT20 MCS0	Front	0cm	157	5785	13.29	13.50	1.050	97.62	1.024	-0.03	0.854	0.918
	WLAN5GHz	802.11n-HT20 MCS0	Front	0cm	149	5745	12.21	13.50	1.346	97.62	1.024	0.05	0.515	0.710
	WLAN5GHz	802.11n-HT20 MCS0	Front	0cm	161	5805	13.00	13.50	1.122	97.62	1.024	-0.1	0.842	0.967
	WLAN5GHz	802.11a 6Mbps	Back	0cm	157	5785	13.40	14.50	1.288	97.9	1.021	-0.08	0.179	0.235
	WLAN5GHz	802.11a 6Mbps	Right Side	0cm	157	5785	13.40	14.50	1.288	97.9	1.021	-0.16	0.230	0.303
	WLAN5GHz	802.11a 6Mbps	Top Side	0cm	157	5785	13.40	14.50	1.288	97.9	1.021	-0.18	0.051	0.067
	WLAN5GHz	802.11a 6Mbps	Bottom Side	0cm	157	5785	13.40	14.50	1.288	97.9	1.021	-0.05	0.771	1.014
	WLAN5GHz	802.11a 6Mbps	Bottom Side	0cm	149	5745	13.10	14.50	1.380	97.9	1.021	-0.15	0.760	1.071
	WLAN5GHz	802.11a 6Mbps	Bottom Side	0cm	161	5805	13.01	14.50	1.409	97.9	1.021	-0.15	0.791	1.138

SPORTON INTERNATIONAL INC.

FCC ID: W5M-DMSSE07 Page 18 of 23 Form version.: 141020

13.2 Repeated SAR Measurement

No.	Band	Mode	Test Position	Gap (cm)	Ch.		Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Cycle %	Duty Cycle Scaling Factor	Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	WLAN2.4GHz	802.11b 1Mbps	Front	0cm	6	2437	17.48	18.50	1.265	100	1.000	-0.14	0.973		1.231
2nd	WLAN2.4GHz	802.11b 1Mbps	Front	0cm	6	2437	17.48	18.50	1.265	100	1.000	-0.14	0.965	1.01	1.220
1st	WLAN5GHz	802.11a 6Mbps	Front	0cm	149	5745	13.10	14.50	1.380	97.9	1.021	-0.08	0.856		1.206
2nd	WLAN5GHz	802.11a 6Mbps	Front	0cm	149	5745	13.10	14.50	1.380	97.9	1.021	-0.01	0.853	1.00	1.202

Report No.: FA4O2406

General Note:

- 1. Per KDB 865664 D01v01r03, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥0.8W/kg
- 2. Per KDB 865664 D01v01r03, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR <1.45W/kg, only one repeated measurement is required.
- 3. The ratio is the difference in percentage between original and repeated measured SAR.
- 4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

Test Engineer: Angelo Chang, Frank Wu and Bevis Chang

FCC ID: W5M-DMSSE07 Page 19 of 23 Form version.: 141020

14. Uncertainty Assessment

The component of uncertainly may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainly by the statistical analysis of a series of observations is termed a Type An evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

Report No.: FA4O2406

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture's specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in table below.

Uncertainty Distributions	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor ^(a)	1/k ^(b)	1/√3	1/√6	1/√2

- (a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity
- (b) κ is the coverage factor

Table 14.1. Standard Uncertainty for Assumed Distribution

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.

TEL: 886-3-327-3456 / FAX: 886-3-328-4978 Issued Date: Feb. 17, 2015

FCC ID: W5M-DMSSE07 Form version. : 141020 Page 20 of 23

Error Description	Uncertainty Value (±%)	Probability Distribution	Divisor	Ci (1g)	Ci (10g)	Standard Uncertainty (1g)	Standard Uncertainty (10g)	
Measurement System								
Probe Calibration	6.0	Normal	1	1	1	± 6.0 %	± 6.0 %	
Axial Isotropy	4.7	Rectangular	√3	0.7	0.7	± 1.9 %	± 1.9 %	
Hemispherical Isotropy	9.6	Rectangular	√3	0.7	0.7	± 3.9 %	± 3.9 %	
Boundary Effects	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %	
Linearity	4.7	Rectangular	√3	1	1	± 2.7 %	± 2.7 %	
System Detection Limits	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %	
Readout Electronics	0.3	Normal	1	1	1	± 0.3 %	± 0.3 %	
Response Time	0.8	Rectangular	√3	1	1	± 0.5 %	± 0.5 %	
Integration Time	2.6	Rectangular	√3	1	1	± 1.5 %	± 1.5 %	
RF Ambient Noise	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %	
RF Ambient Reflections	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %	
Probe Positioner	0.4	Rectangular	√3	1	1	± 0.2 %	± 0.2 %	
Probe Positioning	2.9	Rectangular	√3	1	1	± 1.7 %	± 1.7 %	
Max. SAR Eval.	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %	
Test Sample Related	Test Sample Related							
Device Positioning	2.9	Normal	1	1	1	± 2.9 %	± 2.9 %	
Device Holder	3.6	Normal	1	1	1	± 3.6 %	± 3.6 %	
Power Drift	5.0	Rectangular	√3	1	1	± 2.9 %	± 2.9 %	
Phantom and Setup								
Phantom Uncertainty	4.0	Rectangular	√3	1	1	± 2.3 %	± 2.3 %	
Liquid Conductivity (Target)	5.0	Rectangular	√3	0.64	0.43	± 1.8 %	± 1.2 %	
Liquid Conductivity (Meas.)	2.5	Normal	1	0.64	0.43	± 1.6 %	± 1.1 %	
Liquid Permittivity (Target)	5.0	Rectangular	√3	0.6	0.49	± 1.7 %	± 1.4 %	
Liquid Permittivity (Meas.)	2.5	Normal	1	0.6	0.49	± 1.5 %	± 1.2 %	
Combined Standard Uncertainty					± 11.0 %	± 10.8 %		
Coverage Factor for 95 %					K=2			
Expanded Uncertainty					± 22.0 %	± 21.5 %		

Table 14.2. Uncertainty Budget for frequency range 300 MHz to 3 GHz

TEL: 886-3-327-3456 / FAX: 886-3-328-4978

FCC ID: W5M-DMSSE07

Issued Date : Feb. 17, 2015 Form version. : 141020

Report No.: FA4O2406

Page 21 of 23

Error Description	Uncertainty Value (±%)	Probability Distribution	Divisor	Ci (1g)	Ci (10g)	Standard Uncertainty (1g)	Standard Uncertainty (10g)
Measurement System							
Probe Calibration	6.55	Normal	1	1	1	± 6.55 %	± 6.55 %
Axial Isotropy	4.7	Rectangular	√3	0.7	0.7	± 1.9 %	± 1.9 %
Hemispherical Isotropy	9.6	Rectangular	√3	0.7	0.7	± 3.9 %	± 3.9 %
Boundary Effects	2.0	Rectangular	√3	1	1	± 1.2 %	± 1.2 %
Linearity	4.7	Rectangular	√3	1	1	± 2.7 %	± 2.7 %
System Detection Limits	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Readout Electronics	0.3	Normal	1	1	1	± 0.3 %	± 0.3 %
Response Time	0.8	Rectangular	√3	1	1	± 0.5 %	± 0.5 %
Integration Time	2.6	Rectangular	√3	1	1	± 1.5 %	± 1.5 %
RF Ambient Noise	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
RF Ambient Reflections	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
Probe Positioner	0.8	Rectangular	√3	1	1	± 0.5 %	± 0.5 %
Probe Positioning	9.9	Rectangular	√3	1	1	± 5.7 %	± 5.7 %
Max. SAR Eval.	4.0	Rectangular	√3	1	1	± 2.3 %	± 2.3 %
Test Sample Related							
Device Positioning	2.9	Normal	1	1	1	± 2.9 %	± 2.9 %
Device Holder	3.6	Normal	1	1	1	± 3.6 %	± 3.6 %
Power Drift	5.0	Rectangular	√3	1	1	± 2.9 %	± 2.9 %
Phantom and Setup							
Phantom Uncertainty	4.0	Rectangular	√3	1	1	± 2.3 %	± 2.3 %
Liquid Conductivity (Target)	5.0	Rectangular	√3	0.64	0.43	± 1.8 %	± 1.2 %
Liquid Conductivity (Meas.)	2.5	Normal	1	0.64	0.43	± 1.6 %	± 1.1 %
Liquid Permittivity (Target)	5.0	Rectangular	√3	0.6	0.49	± 1.7 %	± 1.4 %
Liquid Permittivity (Meas.)	2.5	Normal	1	0.6	0.49	± 1.5 %	± 1.2 %
Combined Standard Uncertaint	у					± 12.8 %	± 12.6 %
Coverage Factor for 95 %					K=2		
Expanded Uncertainty						± 25.6 %	± 25.2 %

Table 14.3. Uncertainty Budget for frequency range 3 GHz to 6 GHz

TEL: 886-3-327-3456 / FAX: 886-3-328-4978

FCC ID: W5M-DMSSE07

Issued Date : Feb. 17, 2015
Page 22 of 23
Form version. : 141020

15. References

[1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"

Report No.: FA4O2406

- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2003, "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v01r02, "SAR Measurement Procedures for 802.11 a/b/g Transmitters", May 2007
- [6] FCC KDB 447498 D01 v05r02, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Feb 2014
- [7] FCC KDB 865664 D01 v01r03, "SAR Measurement Requirements for 100 MHz to 6 GHz", Feb 2014.
- [8] FCC KDB 865664 D02 v01r01, "RF Exposure Compliance Reporting and Documentation Considerations" May 2013.