



FCC ID: W5Y-1002244
Report No.: T191120D05-RP9

IC: 24213-1002244

Page: 1 / 82
Rev.: 03

**FCC 47 CFR PART 27 SUBPART C, M
&
INDUSTRY CANADA RSS-199**

TEST REPORT

For

GUARDIAN SYSTEM LTE

**FCC Model No.: G2-SY-CON2
IC Model No.: G2-SY-CON2-1002244**

Trade Name: GUARDIAN

Issued to

FCC:	Seeing Machines Pty Ltd 80 Mildura Street, Fyshwick, ACT , Canberra 2609 Australia
IC:	Seeing Machines Ltd. 80 Mildura Street Fyshwick ACT 2609 Australia

Issued by

**Compliance Certification Services Inc.
Wugu Laboratory
No.11, Wugong 6th Rd., Wugu Dist.,
New Taipei City, Taiwan. (R.O.C.)
Issued Date: June 20, 2020**

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instruction, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced, except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	January 22, 2020	Initial Issue	ALL	Doris Chu
01	April 22, 2020	See the following Note Rev. (01)	P.6, P.11, P.13, P.20-22, P.30-31, P.34-39, P.57-73, P.75-76	Doris Chu
02	April 28, 2020	See the following Note Rev. (02)	P.6	Doris Chu
03	June 20, 2020	See the following Note Rev. (03)	P.1, P.4, P.6	Allison Chen

Rev (01):

1. Revised Antenna type.
2. Revised section 5.2 DC Power Supplies Cal Due date indication.
3. Added section 6.3.
4. Revised section 8.2 Test Procedure and Test Results.
5. Revised 100%RB to Full RB.
6. The worst case in section 8.6 is 1RB
7. Added section 8.7 Test Configuration.

Rev (02):

1. Revised section 2 power supply.

Rev (03):

1. Modify IC Model No.: G2-SY-CON2-1002244.



Report No.: T191120D05-RP9

Page: 3 / 82

Rev.: 03

TABLE OF CONTENTS

1.	TEST RESULT CERTIFICATION	4
2.	EUT DESCRIPTION	6
3.	TEST METHODOLOGY	7
3.1	DESCRIPTION OF TEST TYPE	7
3.2	THE WORST MODE OF MEASUREMENT	8
4.	TEST SUMMARY	9
5.	INSTRUMENT CALIBRATION	10
5.1	FACILITIES AND TEST LOCATION	10
5.2	MEASUREMENT EQUIPMENT USED	11
5.3	MEASUREMENT UNCERTAINTY	12
6.	FACILITIES AND ACCREDITATIONS	13
6.1	FACILITIES	13
6.2	EQUIPMENT	13
7.	SETUP OF EQUIPMENT UNDER TEST	14
7.1	SETUP CONFIGURATION OF EUT	14
7.2	SUPPORT EQUIPMENT	14
8.	TEST PROCEDURE AND RESULT	15
8.1	EIRP MEASUREMENT	15
8.2	FREQUENCY STABILITY MEASUREMENT	20
8.3	OCCUPIED BANDWIDTH MEASUREMENT	23
8.4	PEAK TO AVERAGE POWER RATIO	29
8.5	BAND EDGE MEASUREMENT	40
8.6	CONDUCTED SPURIOUS EMISSIONS	57
8.7	RADIATED EMISSION MEASUREMENT	74
	APPENDIX A PHOTOGRAPHS OF TEST SETUP	A-1



Report No.: T191120D05-RP9

Page: 4 / 82

Rev.: 03

1. TEST RESULT CERTIFICATION

FCC Applicant: Seeing Machines Pty Ltd
80 Mildura Street, Fyshwick, ACT , Canberra 2609 Australia

IC Applicant: Seeing Machines Ltd.
80 Mildura Street Fyshwick ACT 2609 Australia

Manufacturer: ADLINK TECHNOLOGY INC.
9F, No. 166, Jian Yi Rd., Zhonghe Dist., New Taipei City, 235
Taiwan

Equipment Under Test: GUARDIAN SYSTEM LTE

Trade Name: GUARDIAN

FCC Model No.: G2-SY-CON2

IC Model No.: G2-SY-CON2-1002244

Date of Test: December 23, 2019 ~ January 8, 2020



Report No.: T191120D05-RP9

Page: 5 / 82

Rev.: 03

APPLICABLE STANDARDS	
Standard	TEST RESULT
FCC Part 27, Subpart C, M, FCC Part 2 & RSS-199 Issue 3 December 2016	No non-compliance noted
Statements of Conformity	
Determination of compliance is based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.	

The above equipment has been tested by Compliance Certification Services Inc., and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Approved by:

Kevin Tsai
Deputy Manager
Compliance Certification Services Inc.

2. EUT DESCRIPTION

Product	GUARDIAN SYSTEM LTE		
FCC Model No.	G2-SY-CON2		
IC Model No.	G2-SY-CON2-1002244		
Model Discrepancy	N/A		
Trade	GUARDIAN		
Received Date	November 20, 2019		
Power Supply	Powered from DC supply: DC 12V.		
Modulation Technology	LTE Band 41	QPSK, 16QAM	
Frequency Range	LTE Band 41 Channel Bandwidth: 5MHz	2498.5MHz ~2687.5MHz	
	LTE Band 41 Channel Bandwidth: 10MHz	2501MHz ~2685MHz	
	LTE Band 41 Channel Bandwidth: 15MHz	2503.5MHz ~2682.5MHz	
	LTE Band 41 Channel Bandwidth: 20MHz	2506MHz ~2680MHz	
Transmit Power (EIRP Power)	LTE Band 41 Channel Bandwidth: 5MHz	QPSK	22.39 dBm
		16QAM	21.94 dBm
	LTE Band 41 Channel Bandwidth: 10MHz	QPSK	21.69 dBm
		16QAM	21.69 dBm
	LTE Band 41 Channel Bandwidth: 15MHz	QPSK	21.70 dBm
		16QAM	21.70 dBm
	LTE Band 41 Channel Bandwidth: 20MHz	QPSK	22.50 dBm
		16QAM	22.00 dBm
Antenna Specification	Dipole Antenna Band 41 Antenna gain: 0.1 dBi		
HW Version	V1		
SW Version	V9		

Note: 1. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.



Report No.: T191120D05-RP9

Page: 7 / 82

Rev.: 03

3. TEST METHODOLOGY

3.1 DESCRIPTION OF TEST TYPE

The EUT had been tested under operating condition.

Software used to control the EUT for staying in continuous transmitting mode was programmed.

LTE Band 41: 2496MHz ~ 2690MHz

Three channels had been tested for each channel bandwidth.

Channel Bandwidth	5MHz		10MHz		15MHz		20MHz	
	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
Low CH	39675	2498.5	39700	2501	39725	2503.5	39750	2506
Middle CH	40620	2593	40620	2593	40620	2593	40620	2593
High CH	41565	2687.5	41540	2685	41515	2682.5	41490	2680

3.2 THE WORST MODE OF MEASUREMENT

Radiated Emission Measurement Above 1G	
Test Condition	Radiated Emission Above 1G
Power supply Mode	Mode 1: EUT power by Power supply
Worst Mode	☒ Mode 1 ☐ Mode 2 ☐ Mode 3 ☐ Mode 4
Worst Position	☐ Placed in fixed position. ☒ Placed in fixed position at X-Plane (E2-Plane) ☐ Placed in fixed position at Y-Plane (E1-Plane) ☐ Placed in fixed position at Z-Plane (H-Plane)

Radiated Emission Measurement Below 1G	
Test Condition	Radiated Emission Below 1G
Power supply Mode	Mode 1: EUT power by Power supply
Worst Mode	☒ Mode 1 ☐ Mode 2 ☐ Mode 3 ☐ Mode 4

Remark:

1. The worst mode was record in this test report.
2. EUT pre-scanned in three axis ,X,Y, Z and two polarity, for radiated measurement. The worst case(X-Plane) were recorded in this report



Report No.: T191120D05-RP9

Page: 9 / 82

Rev.: 03

4. TEST SUMMARY

FCC Standard Section	IC Standard Section	Report Section	Test Item	Result
-	-	2	Antenna Requirement	Pass
2.1046 27.50(h)(2)	RSS-199, section 4.4	8.1	ERP and EIRP Measurement	Pass
2.1055, 27.54	RSS-199 section 4.3	8.2	Frequency Stability v.s. temperature measurement	Pass
2.1049	RSS-GEN 6.7 RSS-199, section 4.2	8.3	Occupied Bandwidth Measurement	Pass
27.53(h)	RSS-199 section 4.5	8.4	Peak to Average Ratio	Pass
27.53(h)	RSS-199 section 4.5	8.5	Conducted Band Edge	Pass
27.53(h)	RSS-199 section 4.5	8.6	Conducted Spurious Emission	Pass
27.53(h)	RSS-199 section 4.5	8.7	Spurious Radiation Measurement	Pass



Report No.: T191120D05-RP9

Page: 10 / 82

Rev.: 03

5. INSTRUMENT CALIBRATION

5.1 FACILITIES AND TEST LOCATION

All measurement facilities used to collect the measurement data are located at
No.11, Wugong 6th Rd., Wugu Dist., New Taipei City, Taiwan. (R.O.C.)

Test site	Test Engineer	Remark
Radiation	Jerry Chang	-
RF Conducted	Dally Hong	-

Remark: The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

5.2 MEASUREMENT EQUIPMENT USED

Equipment Used for Emissions Measurement

Remark: Each piece of equipment is scheduled for calibration once a year.

RF Conducted Test Site					
Equipment	Manufacturer	Model	S/N	Cal Date	Cal Due
Coaxial Cable	Woken	WC12	CC001	06/28/2019	06/27/2020
Coaxial Cable	Woken	WC12	CC003	06/28/2019	06/27/2020
Power Divider	Solvang Technology	STI08-0015	008	08/06/2019	08/05/2020
Signal Analyzer	R&S	FSV 40	101073	09/25/2019	09/24/2020
Wideband Radio Communication Tester	R&S	CMW 500	116875	07/29/2019	07/28/2020
DC Power Supplies	GW Instek	SPS-3610	GPE880163	01/14/2019	01/13/2020
Software	N/A				

3M 966 Chamber Test Site					
Equipment	Manufacturer	Model	S/N	Cal Date	Cal Due
Band Reject Filters	MICRO TRONICS	BRM 50702	120	02/26/2019	02/25/2020
Bilog Antenna	Sunol Sciences	JB3	A030105	07/26/2019	07/25/2020
Coaxial Cable	HUBER SUHNER	SUCOFLEX 104PEA	20995	02/26/2019	02/25/2020
Coaxial Cable	EMCI	EMC105	190914+25111	09/20/2019	09/19/2020
Digital Thermo-Hygro Meter	WISEWIND	1206	D07	01/30/2019	01/29/2020
double Ridged Guide Horn Antenna	ETC	MCTD 1209	DRH13M02003	10/04/2019	10/03/2020
Loop Ant	COM-POWER	AL-130	121051	03/22/2019	03/21/2020
Pre-Amplifier	EMEC	EM330	060609	02/26/2019	02/25/2020
Pre-Amplifier	HP	8449B	3008A00965	02/26/2019	02/25/2020
Wideband Radio Communication Tester	R&S	CMW 500	116875	07/29/2019	07/28/2020
PSA Series Spectrum Analyzer	Agilent	E4446A	MY46180323	05/29/2019	05/28/2020
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R	N.C.R
Turn Table	CCS	CC-T-1F	N/A	N.C.R	N.C.R
Software	e3 6.11-20180413				

5.3 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
AC Powerline Conducted Emission	+/- 1.2575
Emission bandwidth, 20dB bandwidth	+/- 0.0014
RF output power, conducted	+/- 1.14
Power density, conducted	+/- 1.40
3M Semi Anechoic Chamber / 30M~200M	+/- 4.12
3M Semi Anechoic Chamber / 200M~1000M	+/- 4.68
3M Semi Anechoic Chamber / 1G~8G	+/- 5.18
3M Semi Anechoic Chamber / 8G~18G	+/- 5.47
3M Semi Anechoic Chamber / 18G~26G	+/- 3.81
3M Semi Anechoic Chamber / 26G~40G	+/- 3.87

Remark: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

6. FACILITIES AND ACCREDITATIONS

6.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

☐ No.199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.

Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029

☒ No.11, Wugong 6th Rd., Wugu Dist., New Taipei City, Taiwan. (R.O.C.)

Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10: 2013 and CISPR Publication 22.

6.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6.3 LABORATORY ACCREDITATIONS AND LISTING

The test facilities used to perform radiated and conducted emissions tests are accredited by American Association for Laboratory Accreditation Program for the specific scope accreditation under Lab Code: 0824-01 to perform Electromagnetic Interference tests according to FCC Part 15 and CISPR 22 requirements. In addition, the test facilities are listed with Industry Canada, Certification and Engineering Bureau, ISSED#: 2324G.



Report No.: T191120D05-RP9

Page: 14 / 82

Rev.: 03

7. SETUP OF EQUIPMENT UNDER TEST

7.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix I for the actual connections between EUT and support equipment.

7.2 SUPPORT EQUIPMENT

No.	Equipment	Brand	Model	Series No.	FCC ID	IC ID
1	NB(J)	TOSHIBA	PT345T-00L002	N/A	PD97260H	1000M-7260H

Remark:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.



Report No.: T191120D05-RP9

Page: 15 / 82

Rev.: 03

8. TEST PROCEDURE AND RESULT

8.1 EIRP MEASUREMENT

LIMIT

According to FCC §2.1046

FCC 27.50 (h)(2): Mobile and other user stations. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

RSS-199 § 4.4,

For mobile subscriber equipment, the e.i.r.p. shall not exceed 2 W. For fixed subscriber equipment, the transmitter output power shall not exceed 2 W and the e.i.r.p. shall be limited to 40 W.

TEST PROCEDURES

CONDUCTED POWER MEASUREMENT:

1. The transmitter output power was connected to the call box.
2. Set EUT at maximum output power via call box.
3. Set Call box at lowest, middle and highest channels for each band and modulation.

TEST RESULTS

No non-compliance noted.

LTE Band 41

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)	EIRP Power (dBm)
Band 41	5M	39675	2498.5	QPSK	1	0	0	22.04	22.14
					1	12	0	22.24	22.34
					1	24	0	21.94	22.04
					12	0	1	21.84	21.94
					12	6	1	22.24	22.34
					12	11	1	22.04	22.14
					25	0	1	21.54	21.64
				16QAM	1	0	1	21.44	21.54
					1	12	1	21.34	21.44
					1	24	1	21.84	21.94
					12	0	2	20.94	21.04
					12	6	2	21.54	21.64
					12	11	2	21.04	21.14
					25	0	2	20.94	21.04
		40620	2593.0	QPSK	1	0	0	21.21	21.31
					1	12	0	21.39	21.49
					1	24	0	21.11	21.21
					12	0	1	21.61	21.71
					12	6	1	21.91	22.01
					12	11	1	21.41	21.51
					25	0	1	21.71	21.81
				16QAM	1	0	1	21.11	21.21
					1	12	1	21.61	21.71
					1	24	1	20.91	21.01
					12	0	2	20.81	20.91
					12	6	2	20.81	20.91
					12	11	2	20.51	20.61
					25	0	2	20.61	20.71
		41565	2687.5	QPSK	1	0	0	20.89	20.99
					1	12	0	22.29	22.39
					1	24	0	21.19	21.29
					12	0	1	21.39	21.49
					12	6	1	21.29	21.39
					12	11	1	21.49	21.59
					25	0	1	21.39	21.49
				16QAM	1	0	1	19.99	20.09
					1	12	1	21.49	21.59
					1	24	1	20.89	20.99
					12	0	2	20.39	20.49
					12	6	2	20.79	20.89
					12	11	2	20.49	20.59
					25	0	2	20.39	20.49

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)	EIRP Power (dBm)
Band 41	10M	39700	2501.0	QPSK	1	0	0	20.09	20.19
					1	24	0	20.29	20.39
					1	49	0	20.11	20.21
					25	0	1	20.05	20.15
					25	12	1	20.02	20.12
					25	24	1	19.99	20.09
					50	0	1	20.05	20.15
				16QAM	1	0	1	20.04	20.14
					1	24	1	20.03	20.13
					1	49	1	20.89	20.99
					25	0	2	19.99	20.09
					25	12	2	20.05	20.15
					25	24	2	20.09	20.19
					50	0	2	19.99	20.09
		40620	2593.0	QPSK	1	0	0	21.23	21.33
					1	24	0	21.35	21.45
					1	49	0	21.17	21.27
					25	0	1	21.15	21.25
					25	12	1	21.21	21.31
					25	24	1	21.17	21.27
					50	0	1	21.33	21.43
				16QAM	1	0	1	21.19	21.29
					1	24	1	21.59	21.69
					1	49	1	21.09	21.19
					25	0	2	20.79	20.89
					25	12	2	20.69	20.79
					25	24	2	20.59	20.69
					50	0	2	20.49	20.59
		41540	2685.0	QPSK	1	0	0	20.99	21.09
					1	24	0	21.39	21.49
					1	49	0	21.19	21.29
					25	0	1	21.39	21.49
					25	12	1	21.29	21.39
					25	24	1	21.49	21.59
					50	0	1	21.59	21.69
				16QAM	1	0	1	20.19	20.29
					1	24	1	20.49	20.59
					1	49	1	20.59	20.69
					25	0	2	20.59	20.69
					25	12	2	20.79	20.89
					25	24	2	20.69	20.79
					50	0	2	20.59	20.69

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)	EIRP Power (dBm)
Band 41	15M	39725	2503.5	QPSK	1	0	0	20.10	20.20
					1	37	0	20.30	20.40
					1	74	0	20.12	20.22
					36	0	1	20.06	20.16
					36	18	1	20.03	20.13
					36	35	1	20.00	20.10
					75	0	1	20.06	20.16
				16QAM	1	0	1	20.05	20.15
					1	37	1	20.04	20.14
					1	74	1	20.90	21.00
					36	0	2	20.00	20.10
					36	18	2	20.06	20.16
					36	35	2	20.10	20.20
					75	0	2	20.00	20.10
		40620	2593.0	QPSK	1	0	0	21.24	21.34
					1	37	0	21.36	21.46
					1	74	0	21.18	21.28
					36	0	1	21.16	21.26
					36	18	1	21.22	21.32
					36	35	1	21.18	21.28
					75	0	1	21.34	21.44
				16QAM	1	0	1	21.20	21.30
					1	37	1	21.60	21.70
					1	74	1	21.10	21.20
					36	0	2	20.80	20.90
					36	18	2	20.70	20.80
					36	35	2	20.60	20.70
					75	0	2	20.50	20.60
		41515	2682.5	QPSK	1	0	0	21.00	21.10
					1	37	0	21.40	21.50
					1	74	0	21.20	21.30
					36	0	1	21.40	21.50
					36	18	1	21.30	21.40
					36	35	1	21.50	21.60
					75	0	1	21.60	21.70
				16QAM	1	0	1	20.20	20.30
					1	37	1	20.50	20.60
					1	74	1	20.60	20.70
					36	0	2	20.60	20.70
					36	18	2	20.80	20.90
					36	35	2	20.70	20.80
					75	0	2	20.60	20.70

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)	EIRP Power (dBm)
Band 41	20M	39750	2506.0	QPSK	1	0	0	22.10	22.20
					1	49	0	22.30	22.40
					1	99	0	22.00	22.10
					50	0	1	21.90	22.00
					50	24	1	22.30	22.40
					50	49	1	22.10	22.20
					100	0	1	21.60	21.70
				16QAM	1	0	1	21.50	21.60
					1	49	1	21.40	21.50
					1	99	1	21.90	22.00
					50	0	2	21.00	21.10
					50	24	2	21.60	21.70
					50	49	2	21.10	21.20
					100	0	2	21.00	21.10
		40620	2593.0	QPSK	1	0	0	21.30	21.40
					1	49	0	21.48	21.58
					1	99	0	21.20	21.30
					50	0	1	21.70	21.80
					50	24	1	22.00	22.10
					50	49	1	21.50	21.60
					100	0	1	21.80	21.90
				16QAM	1	0	1	21.20	21.30
					1	49	1	21.70	21.80
					1	99	1	21.00	21.10
					50	0	2	20.90	21.00
					50	24	2	20.90	21.00
					50	49	2	20.60	20.70
					100	0	2	20.70	20.80
		41490	2680.0	QPSK	1	0	0	21.00	21.10
					1	49	0	22.40	22.50
					1	99	0	21.30	21.40
					50	0	1	21.50	21.60
					50	24	1	21.40	21.50
					50	49	1	21.60	21.70
					100	0	1	21.50	21.60
				16QAM	1	0	1	20.10	20.20
					1	49	1	21.60	21.70
					1	99	1	21.00	21.10
					50	0	2	20.50	20.60
					50	24	2	20.90	21.00
					50	49	2	20.60	20.70
					100	0	2	20.50	20.60

8.2 FREQUENCY STABILITY MEASUREMENT

LIMIT

According to the FCC part 27.54 shall be tested the frequency stability. The rule is defined that "The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

According to RSS -199 section 4.3.

The transmitter frequency stability limit shall be determined as follows:

- (a) the frequency offset shall be measured according to the procedure described in RSS-Gen and recorded
- (b) using a resolution bandwidth equal to that permitted within the 1 MHz band immediately outside the channel edge, as found in section 4.5, reference points will be selected at the unwanted emission limits, which comply with the attenuation specified in section 4.5 for the type of device under test, on the emission mask of the lowest and highest channels. The frequency at these points shall be recorded as fL and fH respectively

The applicant shall ensure compliance with frequency stability requirements by showing that fL minus the frequency offset and fH plus the frequency offset is within the frequency range in which the equipment is designed to operate.

TEST PROCEDURE

Use Anritsu 8820 with frequency Error measurement capability.

Temp = -40°C to +65°C

Voltage= 85% to 115% of the nominal value.

The Worst case: DC 12V

NOTE: The frequency error was recorded frequency error from the communication simulator.



Report No.: T191120D05-RP9

Page: 21 / 82

Rev.: 03

TEST RESULTS

FREQUENCY STABILITY V.S. TEMPERATURE MEASUREMENT: LTE Band 41

Reference Frequency: LTE Band 41 Max Bandwidth QPSK, 2593 MHz				
Limit: ± 2.5 ppm = 6482.5 Hz				
Power Supply	Environment	Frequency Error	Frequency Error	Limit (ppm)
Vdc	Temperature (°C)	(Hz)	(ppm)	(ppm)
12	65	0.01	0.000004	+/- 2.5
12	50	0.01	0.000004	
12	40	-0.01	-0.000004	
12	30	0.00	0.000000	
12	20	0.00	0.000000	
12	10	0.02	0.000008	
12	0	0.01	0.000004	
12	-10	-0.01	-0.000004	
12	-20	0.02	0.000008	
12	-30	0.01	0.000004	
12	-40	0.00	0.000000	

Reference Frequency: LTE Band 41 Max Bandwidth 16QAM, 2593 MHz				
Limit: ± 2.5 ppm = 6482.5 Hz				
Power Supply	Environment	Frequency Error	Frequency Error	Limit (ppm)
Vdc	Temperature (°C)	(Hz)	(ppm)	(ppm)
12	65	0.01	0.000004	+/- 2.5
12	50	-0.01	-0.000004	
12	40	0.01	0.000004	
12	30	0.00	0.000000	
12	20	0.00	0.000000	
12	10	0.02	0.000008	
12	0	0.02	0.000008	
12	-10	-0.01	-0.000004	
12	-20	-0.01	-0.000004	
12	-30	0.00	0.000000	
12	-40	0.01	0.000004	



Report No.: T191120D05-RP9

Page: 22 / 82

Rev.: 03

FREQUENCY STABILITY V.S. VOLTAGE MEASUREMENT:

LTE Band 41

Reference Frequency: LTE Band 41 Max Bandwidth QPSK, 2593 MHz				
Limit: ± 2.5 ppm = 6482.5 Hz				
Power Supply	Environment	Frequency Error	Frequency Error	Limit (ppm)
Vdc	Temperature (°C)	(Hz)	(ppm)	(ppm)
10.2	20	0.00	0.000000	+/- 2.5
12	20	0.00	0.000000	
13.8	20	0.01	0.000004	

Reference Frequency: LTE Band 41 Max Bandwidth 16QAM, 2593 MHz				
Limit: ± 2.5 ppm = 6482.5 Hz				
Power Supply	Environment	Frequency Error	Frequency Error	Limit (ppm)
Vdc	Temperature (°C)	(Hz)	(ppm)	(ppm)
10.2	20	-0.01	-0.000004	+/- 2.5
12	20	0.00	0.000000	
13.8	20	0.00	0.000000	



Report No.: T191120D05-RP9

Page: 23 / 82

Rev.: 03

8.3 OCCUPIED BANDWIDTH MEASUREMENT

LIMITS

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

TEST PROCEDURES

KDB 971168 D01 Power Meas License Digital Systems – Section 4.2

1. The occupied bandwidth was measured with the spectrum analyzer at the lowest, middle and highest channels in each band and different modulation. The 99% and -26dB bandwidth was measured and recorded.
2. RBW = 1-5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max. hold



Report No.: T191120D05-RP9

Page: 24 / 82

Rev.: 03

TEST RESULTS

LTE Band 41


Band	BW (MHz)	Channel	Frequency (MHz)	Mode	OBW(99%)(MHz)	26 dB Bandwidth(MHz)
41	5	Middle	2535.0	QPSK	4.4863	4.9490
		Middle	2535.0	16QAM	4.4718	4.9350
	10	Middle	2535.0	QPSK	8.9436	10.4920
		Middle	2535.0	16QAM	8.9146	9.6240
	15	Middle	2535.0	QPSK	13.4588	16.0490
		Middle	2535.0	16QAM	13.4588	16.7870
	20	Middle	2535.0	QPSK	18.0608	19.9710
		Middle	2535.0	16QAM	18.0029	20.2600

Report No.: T191120D05-RP9

LTE Band 41

CHANNEL BANDWIDTH: 5MHz / QPSK


CH Mid

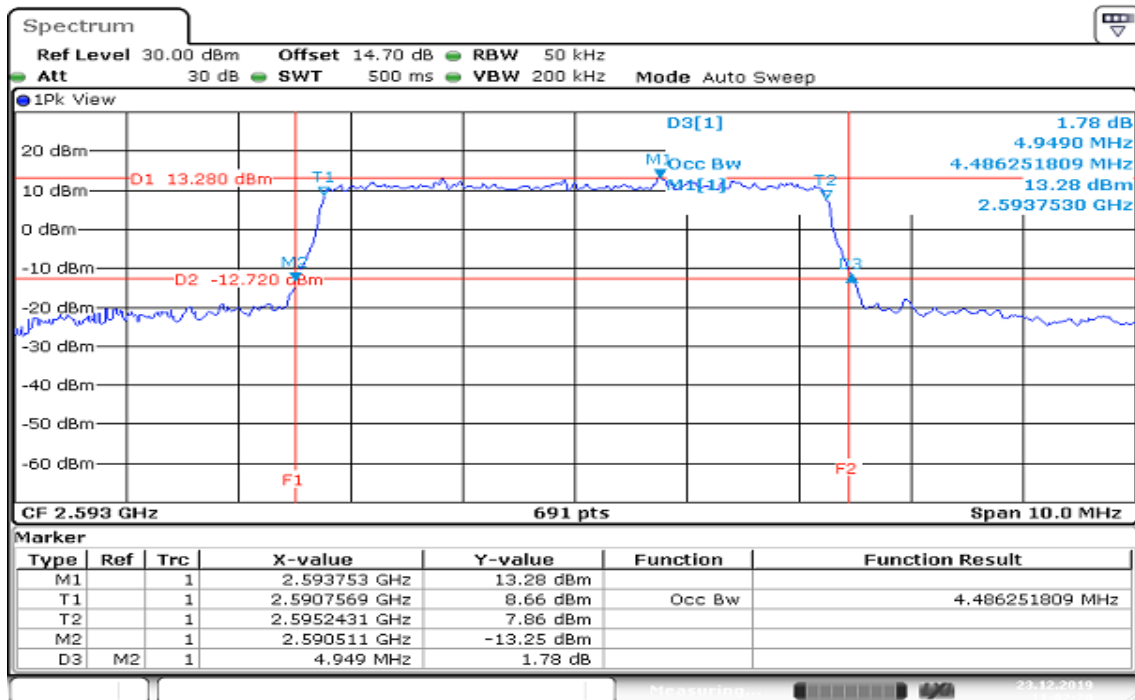

Date: 23.DEC.2019 11:02:20

CHANNEL BANDWIDTH: 5MHz / 16QAM

CH Mid

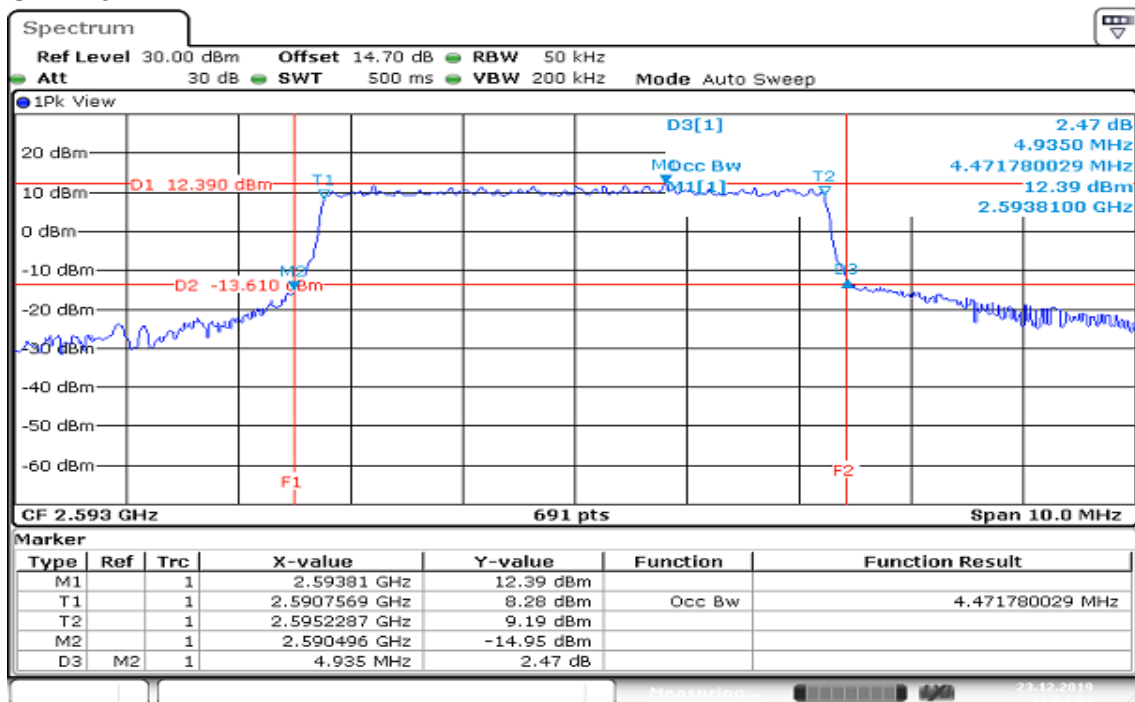


Date: 23.DEC.2019 11:04:02




Report No.: T191120D05-RP9

CHANNEL BANDWIDTH: 10MHz / QPSK CH Mid

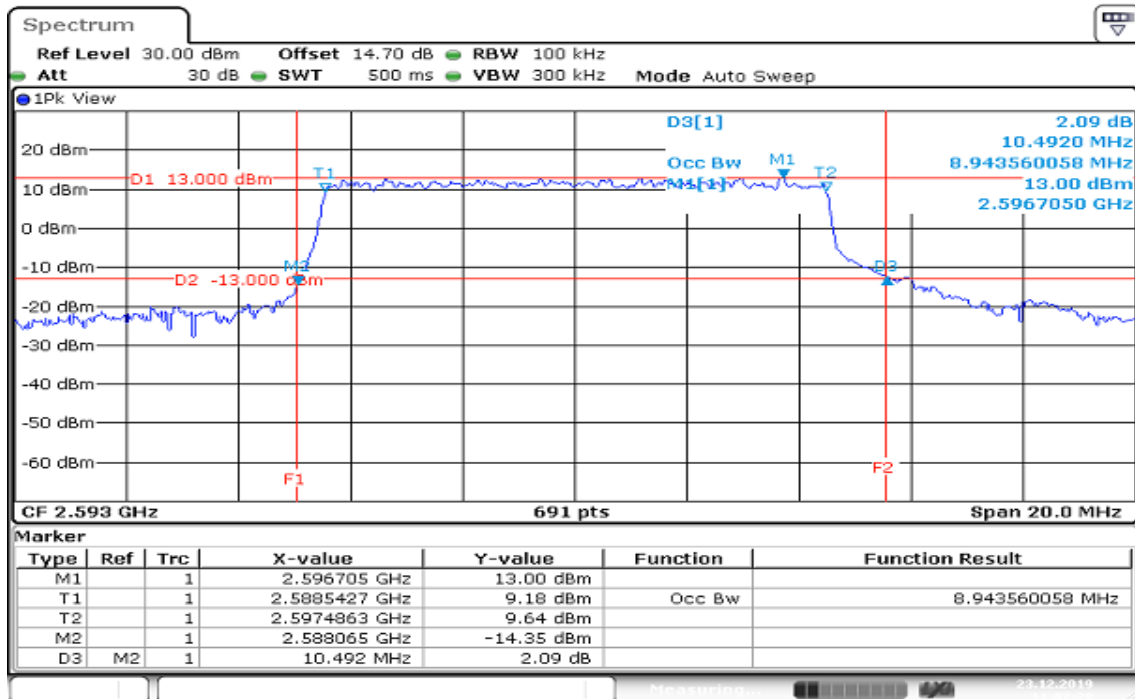


Date: 23.DEC.2019 11:07:28

CHANNEL BANDWIDTH: 10MHz / 16QAM CH Mid

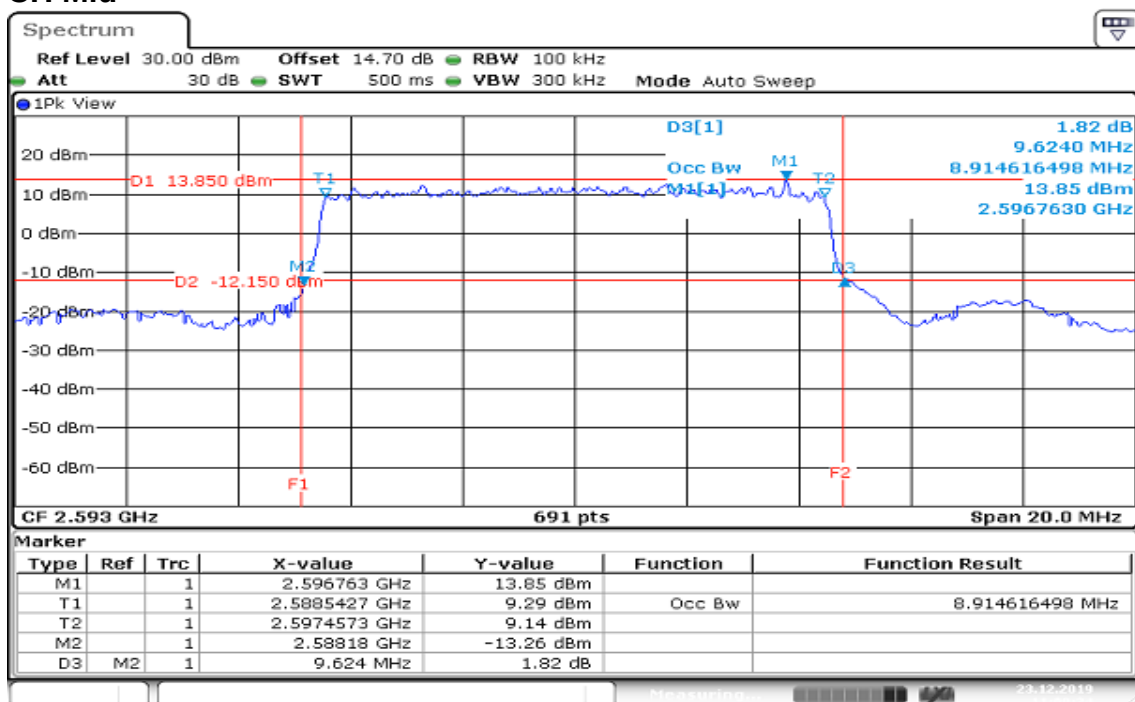


Date: 23.DEC.2019 11:09:34

Report No.: T191120D05-RP9

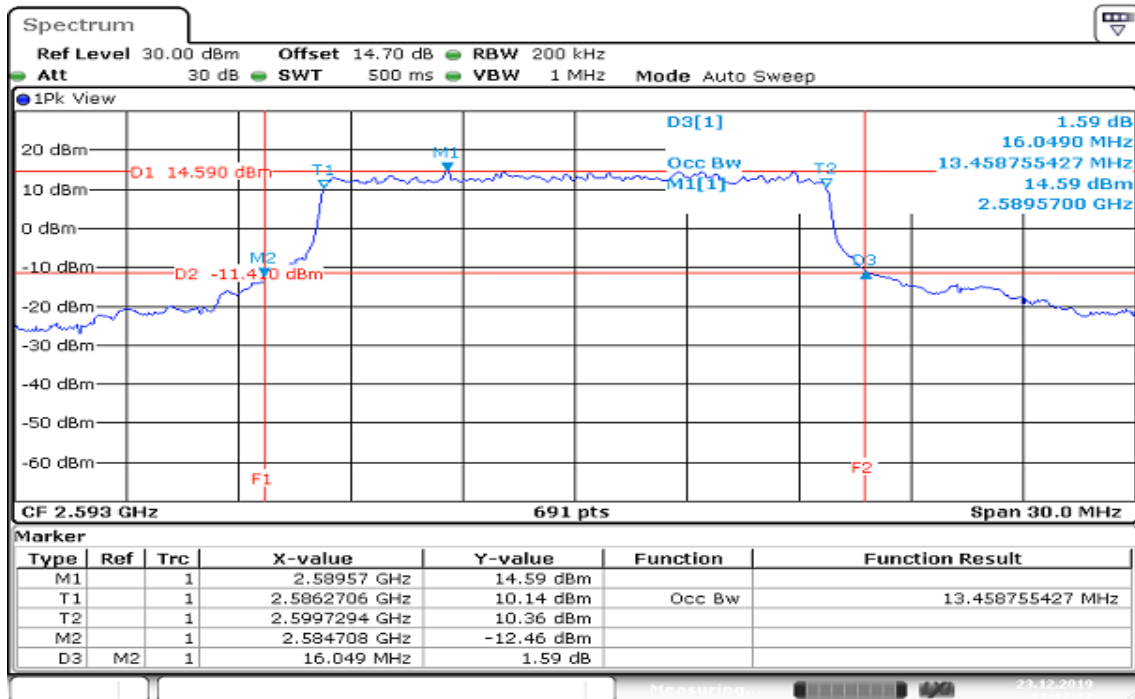CHANNEL BANDWIDTH: 15MHz / QPSK
CH Mid


Date: 23.DEC.2019 11:12:27

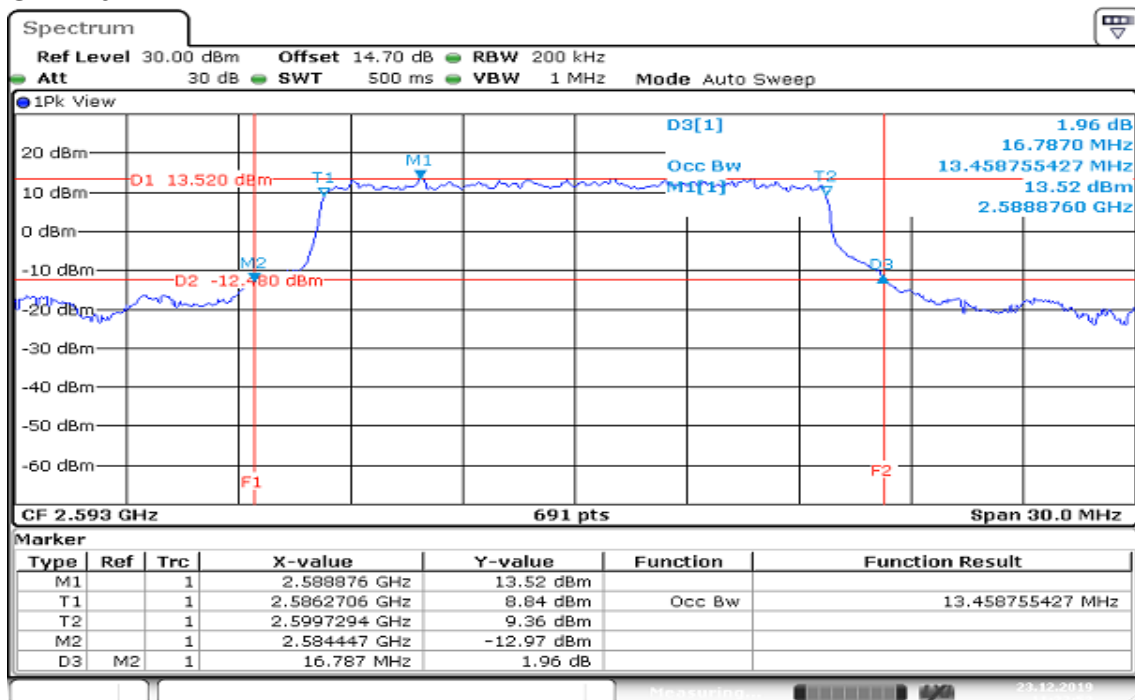CHANNEL BANDWIDTH: 15MHz / 16QAM
CH Mid

Date: 23.DEC.2019 11:22:53


Report No.: T191120D05-RP9

CHANNEL BANDWIDTH: 20MHz / QPSK CH Mid

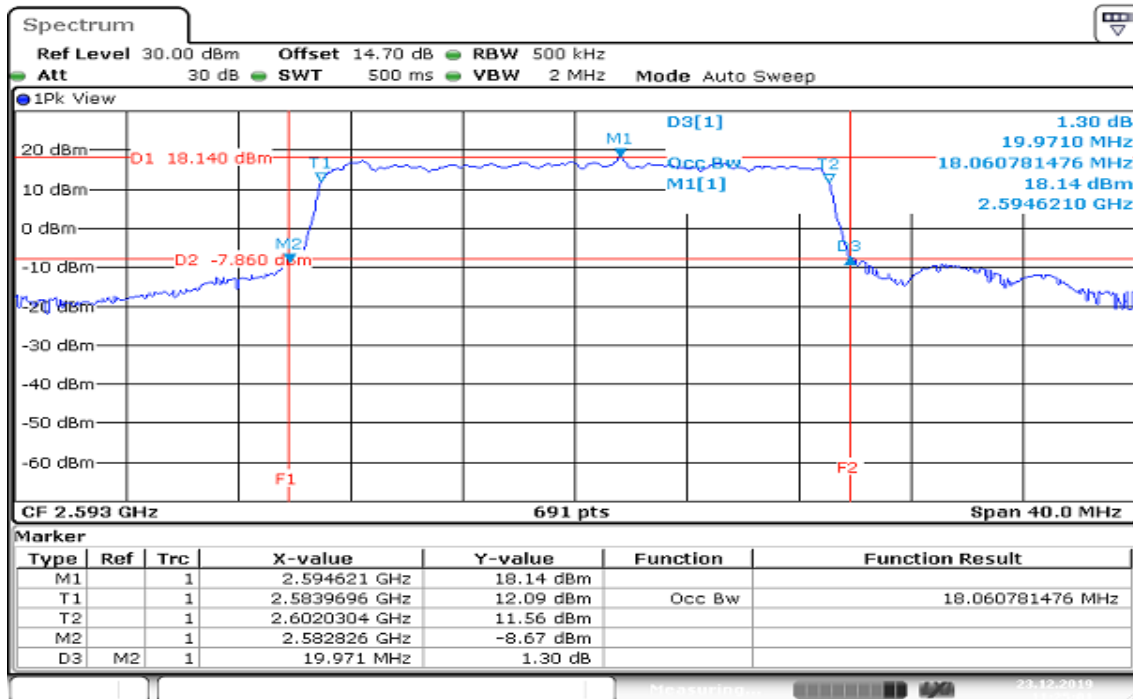

Date: 23.DEC.2019 11:25:01

CHANNEL BANDWIDTH: 20MHz / 16QAM CH Mid

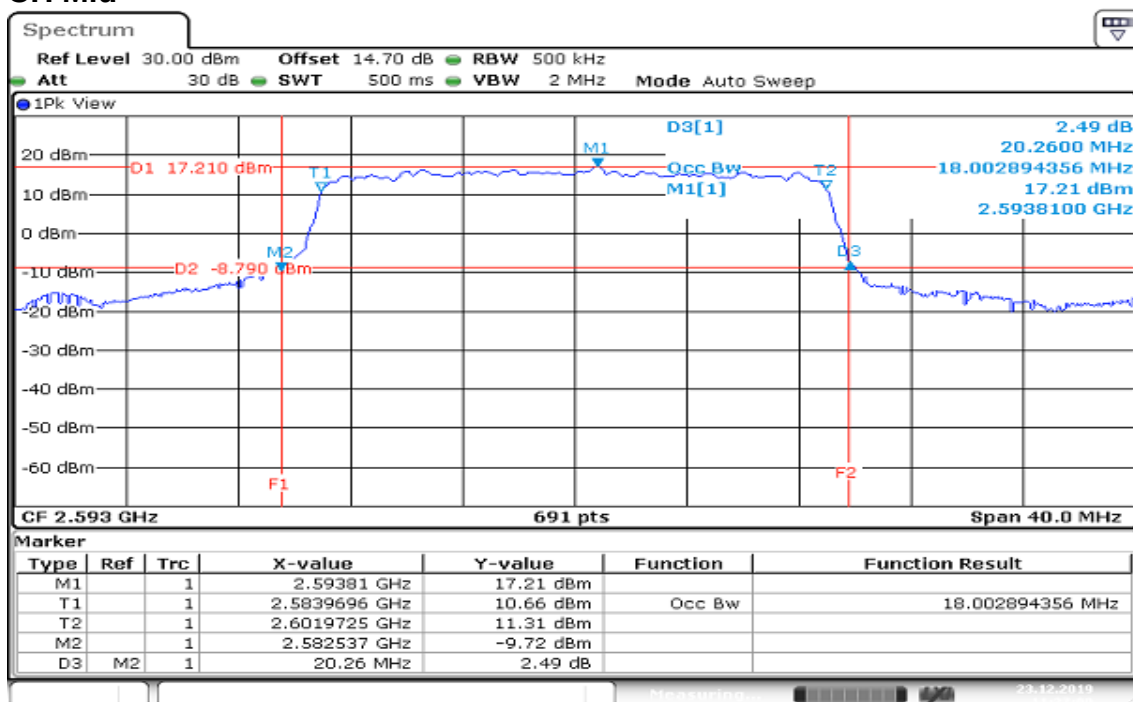

Date: 23.DEC.2019 11:27:01



Report No.: T191120D05-RP9

Page: 29 / 82

Rev.: 03

8.4 PEAK TO AVERAGE POWER RATIO

LIMIT

In measuring transmissions in this band using an average power technique, peak-to-average power ratio (PAPR) of the transmission may not exceed 13 dB.

TEST PROCEDURES

1. According to KDB 971168D01.
2. The EUT was connect to spectrum analyzer and call box.
3. Set the CCDF function in spectrum analyzer.
4. The highest RF output power were measured and recorded the maximum PAPR level associated with a probability of 0.1%.
5. Record the Peak to Average Power Ratio.

TEST RESULTS

LTE Band 41

CHANNEL BANDWIDTH: 5MHz / QPSK / 1RB

Channel	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
40620	2593	5.45

CHANNEL BANDWIDTH: 10MHz / QPSK / 1RB

Channel	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
40620	2593	5.97

CHANNEL BANDWIDTH: 15MHz / QPSK / 1RB

Channel	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
40620	2593	5.36

CHANNEL BANDWIDTH: 20MHz / QPSK / 1RB

Channel	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
40620	2593	5.57

CHANNEL BANDWIDTH: 5MHz / QPSK / Full RB

Channel	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
40620	2593	5.22

CHANNEL BANDWIDTH: 10MHz / QPSK / Full RB

Channel	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
40620	2593	7.36

CHANNEL BANDWIDTH: 15MHz / QPSK / Full RB

Channel	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
40620	2593	5.22

CHANNEL BANDWIDTH: 20MHz / QPSK / Full RB

Channel	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
40620	2593	4.87

Note: We selected worst case to performed test in middle channel, the results can be meet other channel.

CHANNEL BANDWIDTH: 5MHz / 16QAM / 1RB

Channel	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
40620	2593	6.14

CHANNEL BANDWIDTH: 10MHz / 16QAM / 1RB

Channel	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
40620	2593	6.64

CHANNEL BANDWIDTH: 15MHz / 16QAM / 1RB

Channel	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
40620	2593	5.57

CHANNEL BANDWIDTH: 20MHz / 16QAM / 1RB

Channel	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
40620	2593	6.03

CHANNEL BANDWIDTH: 5MHz / 16QAM / Full RB

Channel	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
40620	2593	5.97

CHANNEL BANDWIDTH: 10MHz / 16QAM / Full RB

Channel	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
40620	2593	6.87

CHANNEL BANDWIDTH: 15MHz / 16QAM / Full RB

Channel	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
40620	2593	7.01

CHANNEL BANDWIDTH: 20MHz / 16QAM / Full RB


Channel	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
40620	2593	6.78

Note: We selected worst case to performed test in middle channel, the results can be meet other channel.

Report No.: T191120D05-RP9


LTE Band 41

CHANNEL BANDWIDTH: 5MHz / QPSK/1RB

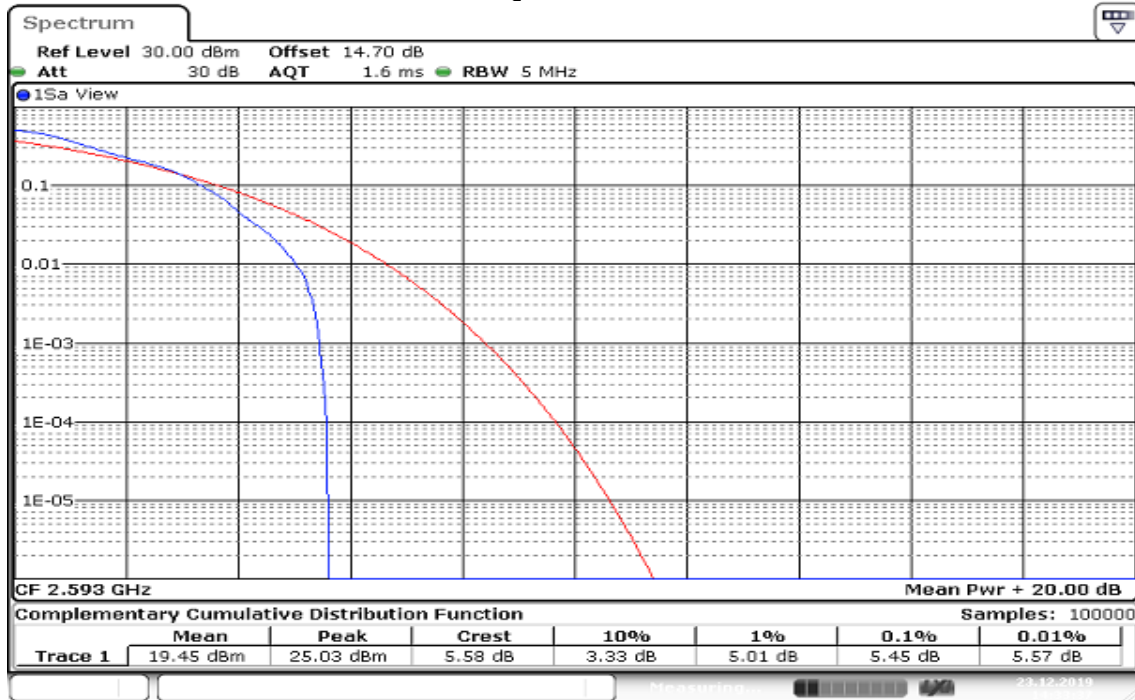

Date: 23.DEC.2019 14:33:37


CHANNEL BANDWIDTH: 10MHz / QPSK /1RB

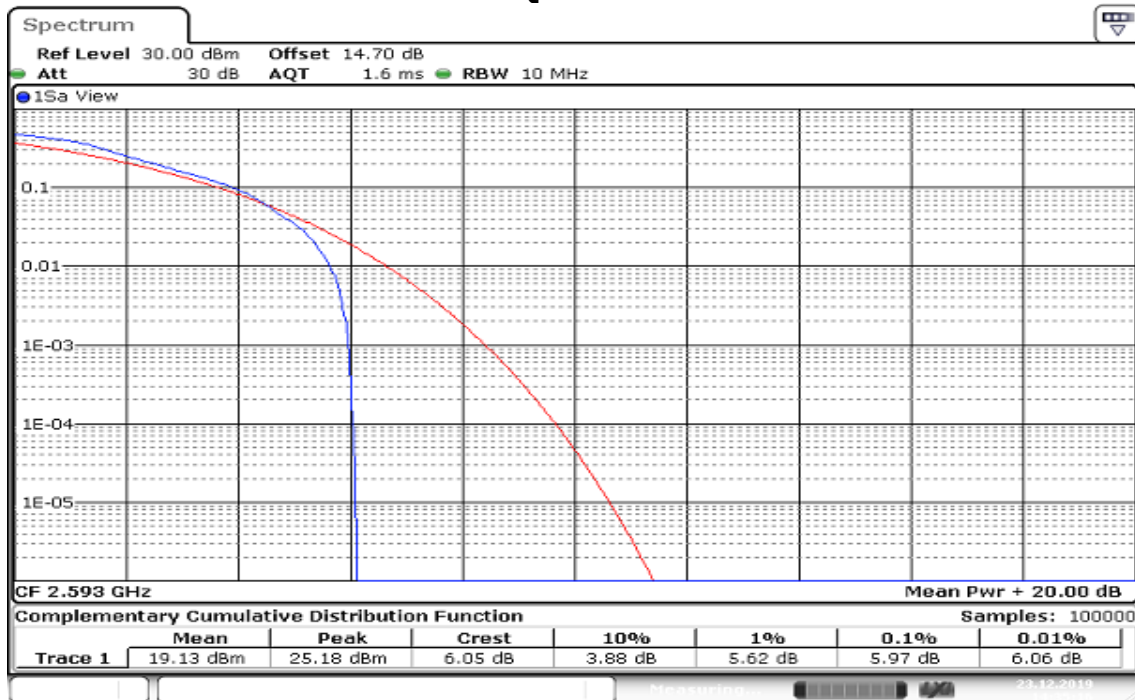


Date: 23.DEC.2019 14:35:16

Report No.: T191120D05-RP9

CHANNEL BANDWIDTH: 15MHz / QPSK/1RB

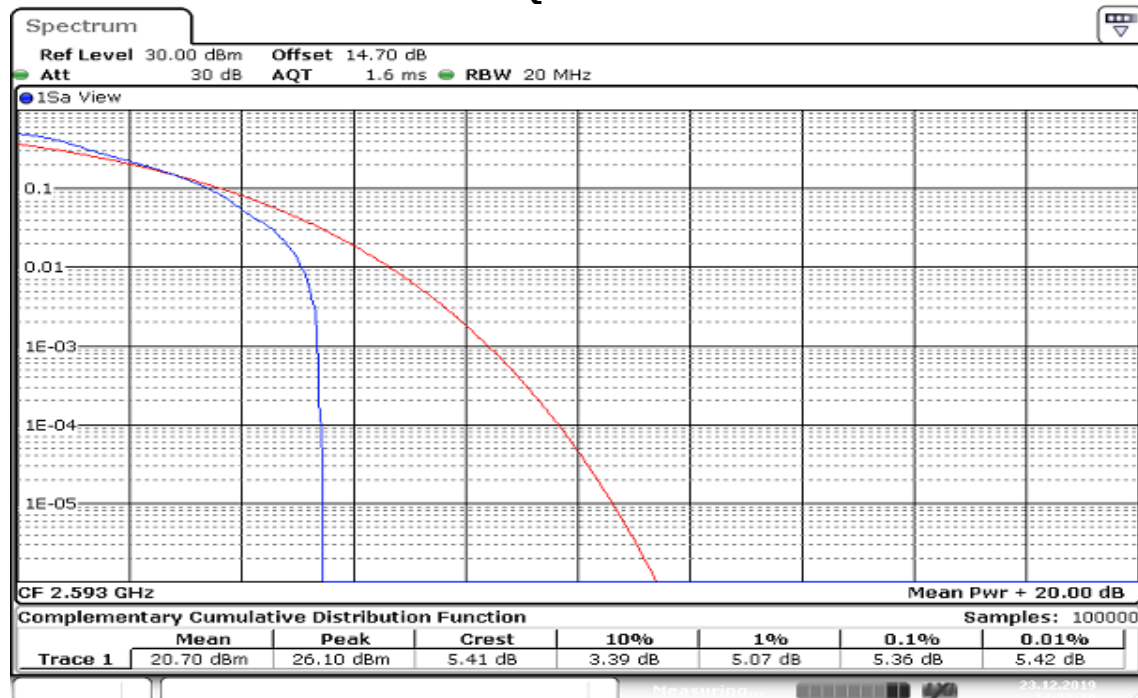


CHANNEL BANDWIDTH: 20MHz / QPSK /1RB

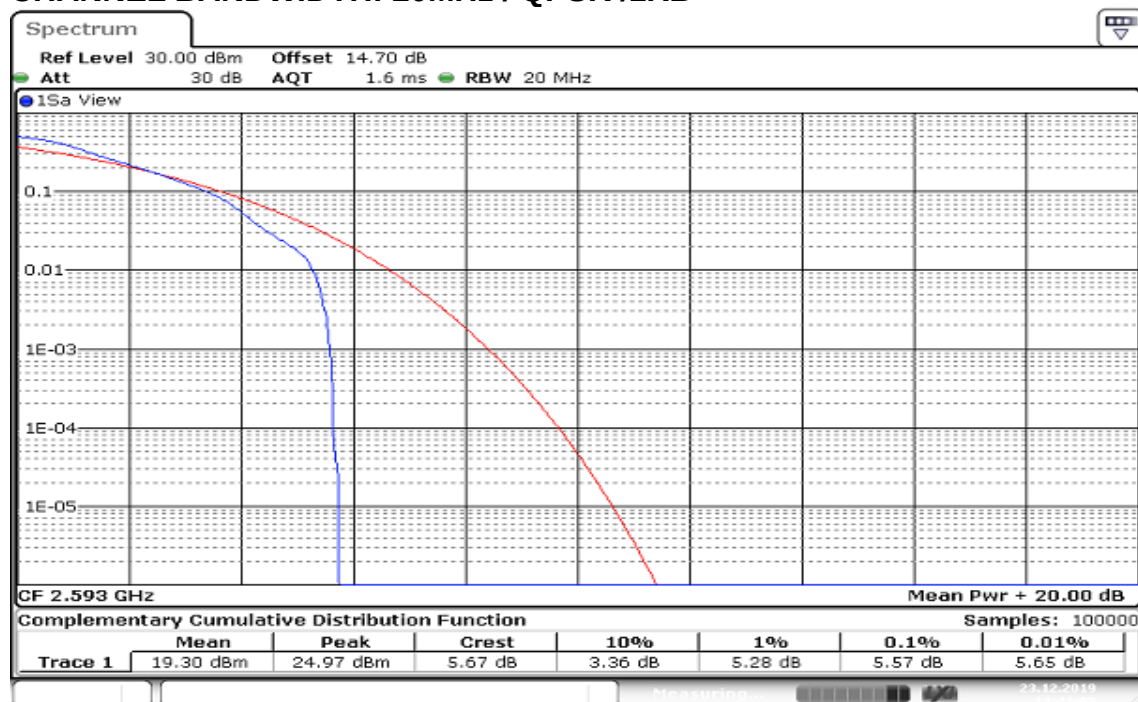


Report No.: T191120D05-RP9

CHANNEL BANDWIDTH: 5MHz / QPSK/ Full RB

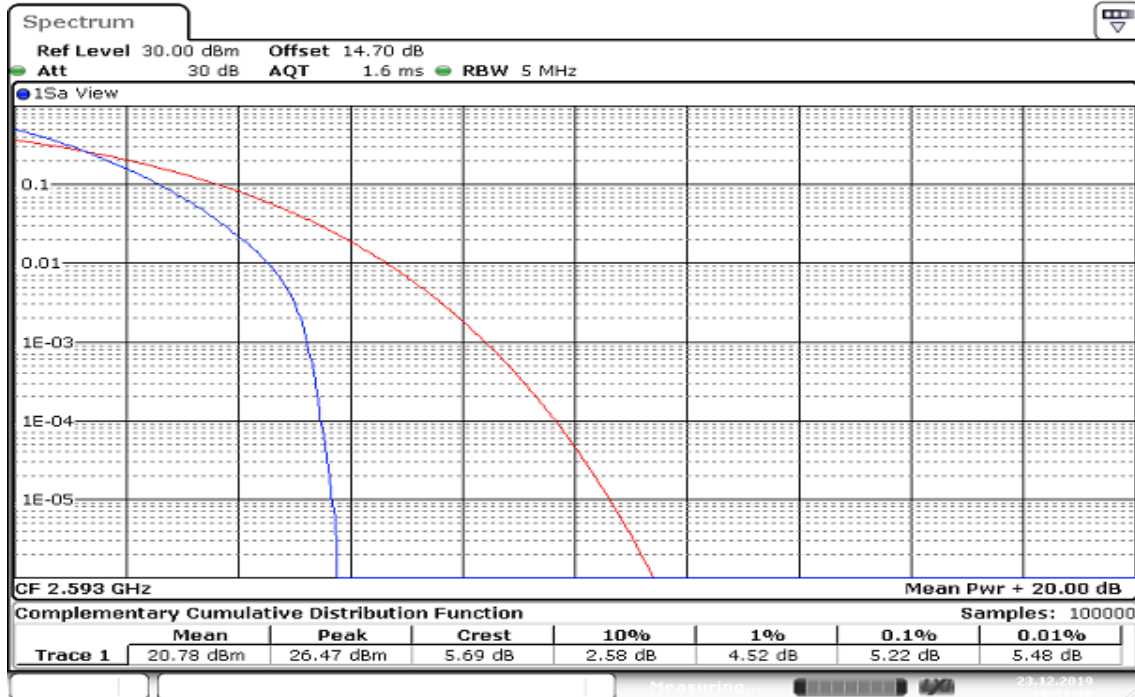


CHANNEL BANDWIDTH: 10MHz / QPSK / Full RB

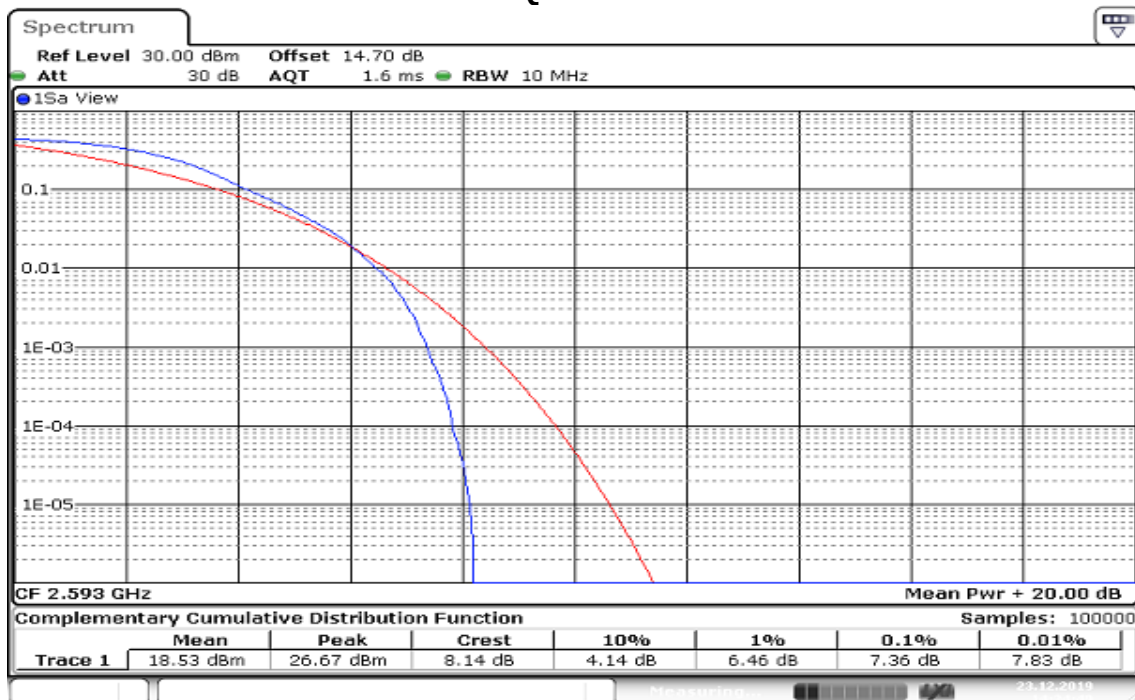


Report No.: T191120D05-RP9

CHANNEL BANDWIDTH: 15MHz / QPSK/ Full RB

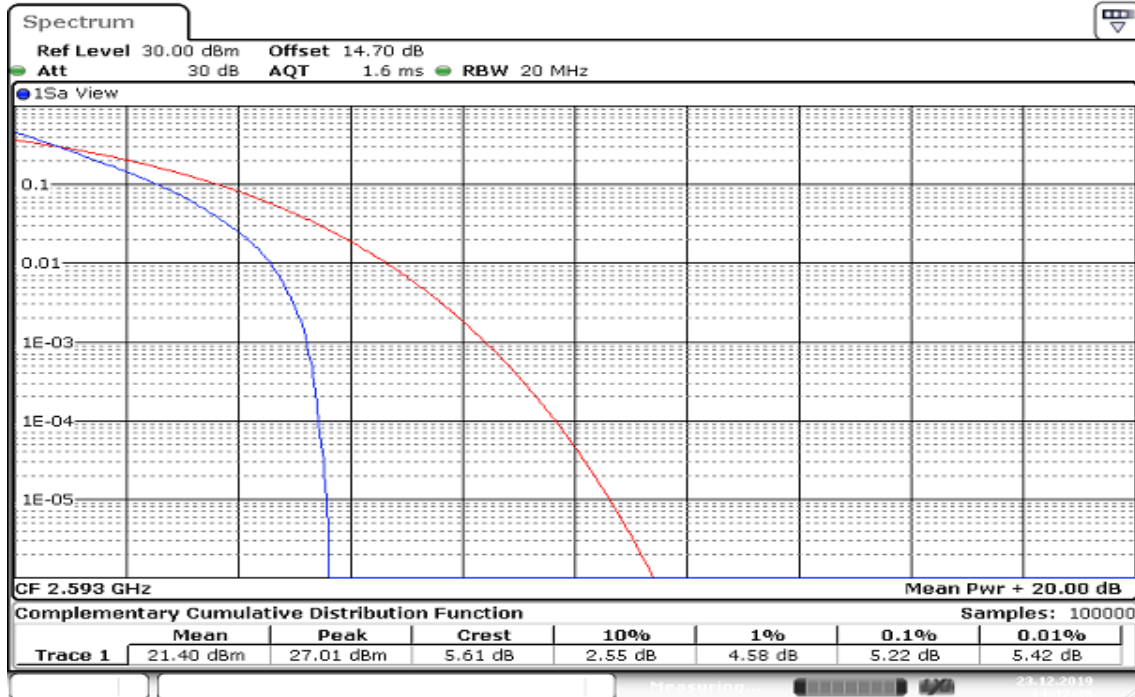


CHANNEL BANDWIDTH: 20MHz / QPSK / Full RB

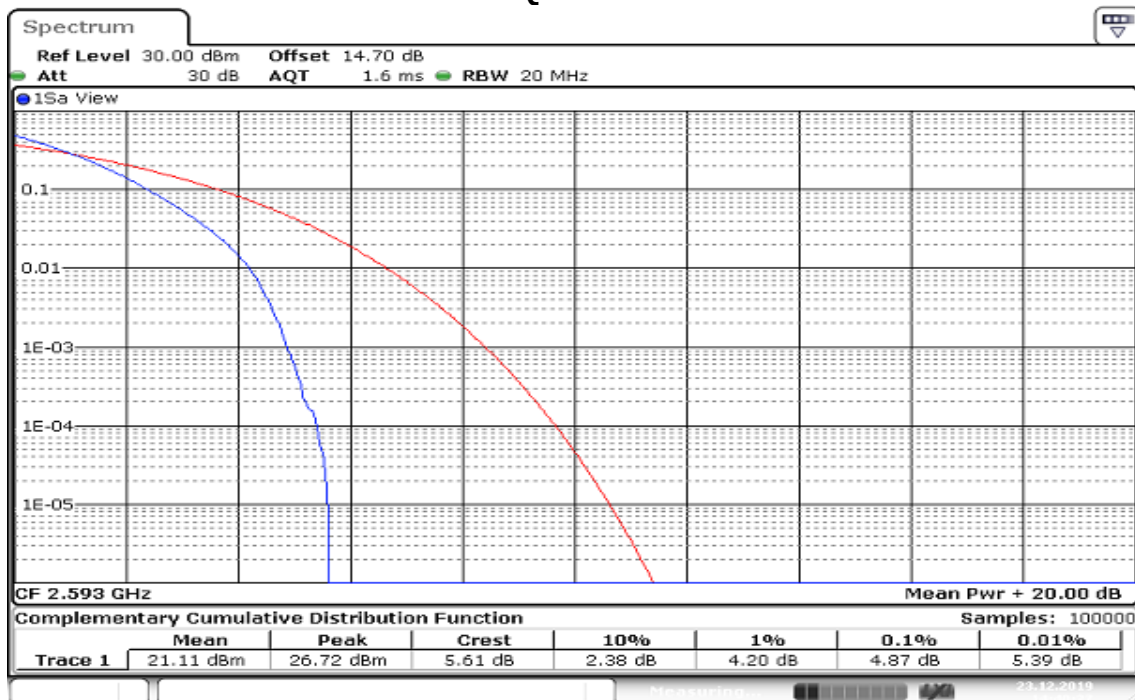


Report No.: T191120D05-RP9


CHANNEL BANDWIDTH: 5MHz / 16QAM /1RB

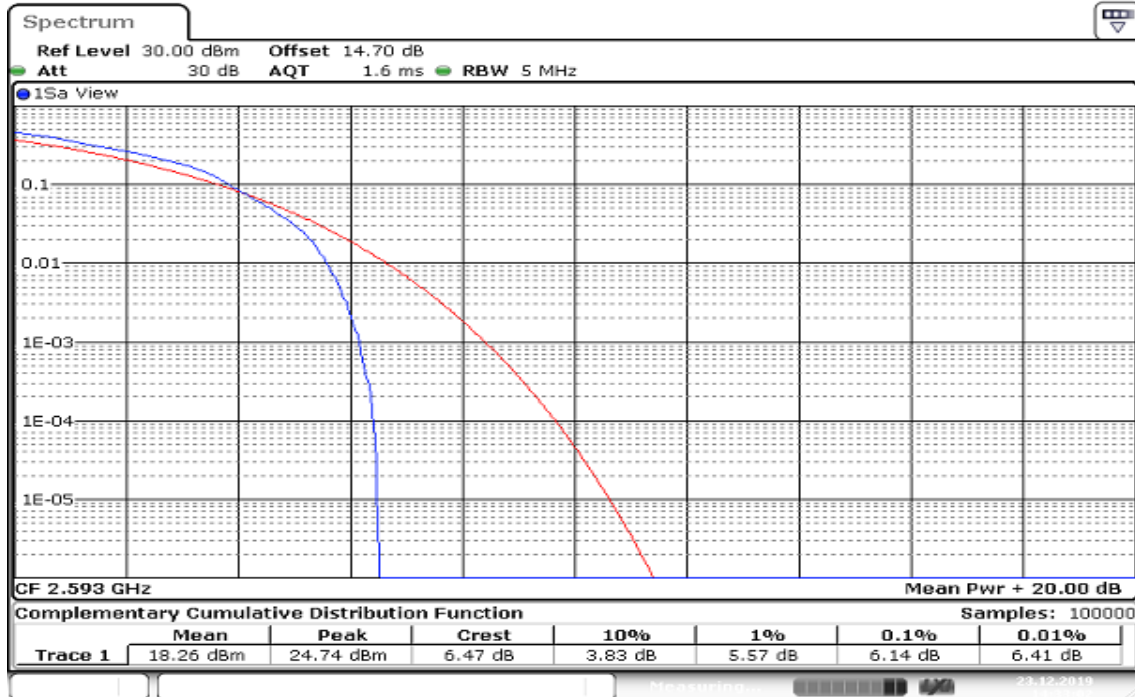


CHANNEL BANDWIDTH: 10MHz / 16QAM /1RB

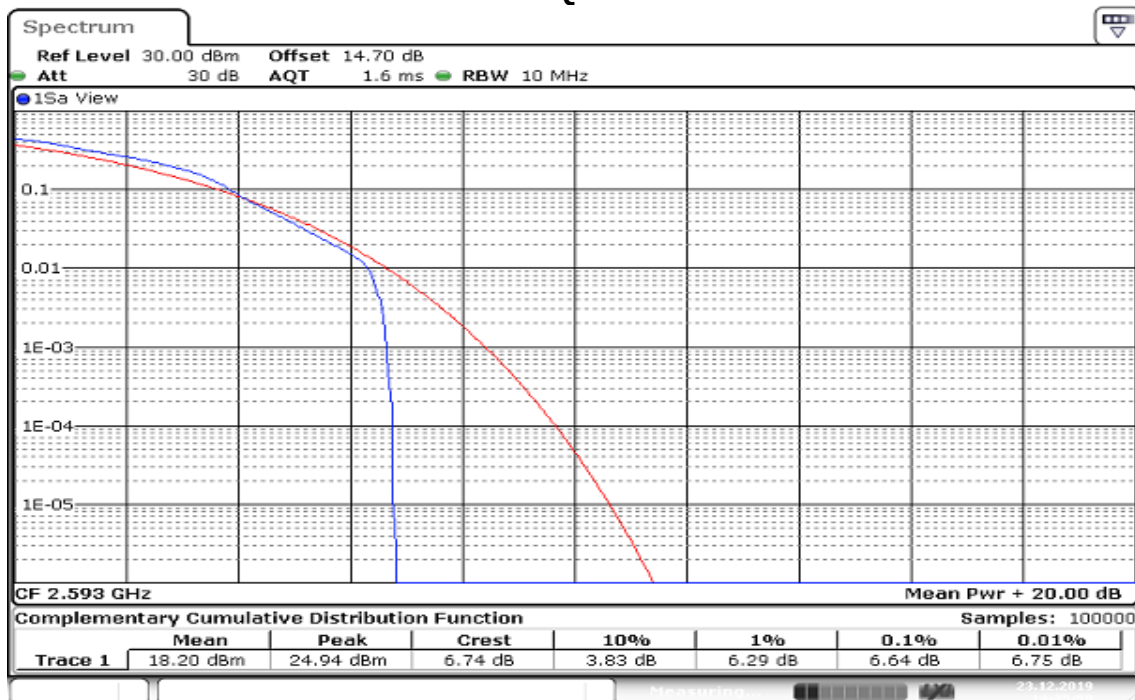

CHANNEL BANDWIDTH: 15MHz / 16QAM /1RB

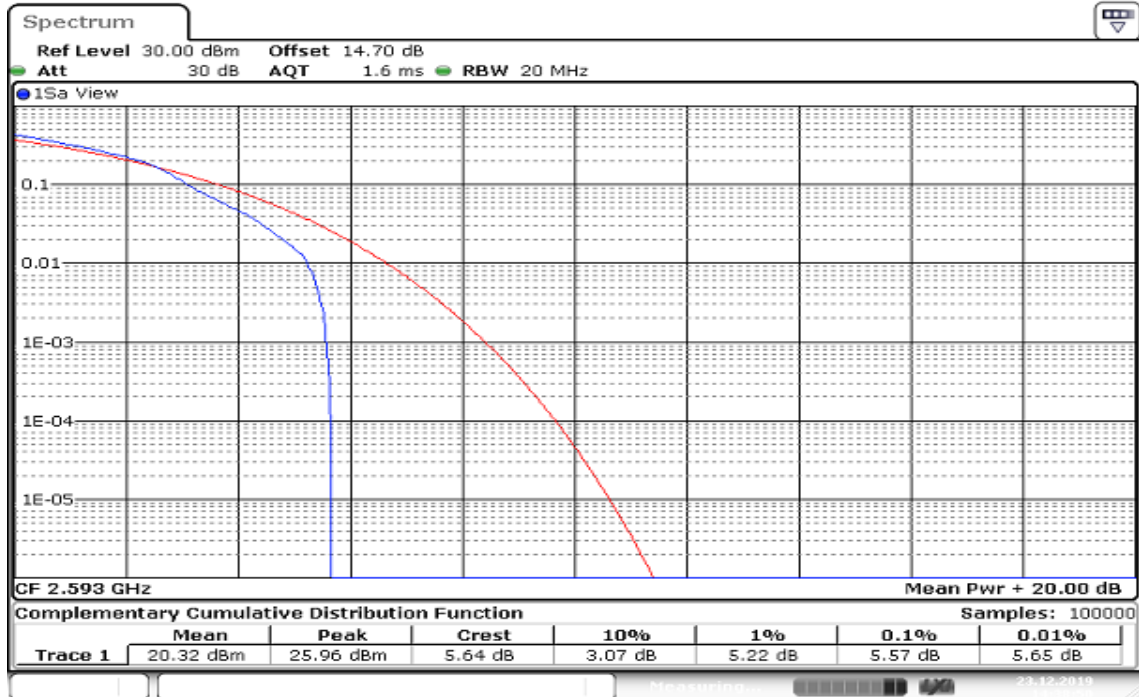


CHANNEL BANDWIDTH: 20MHz / 16QAM /1RB

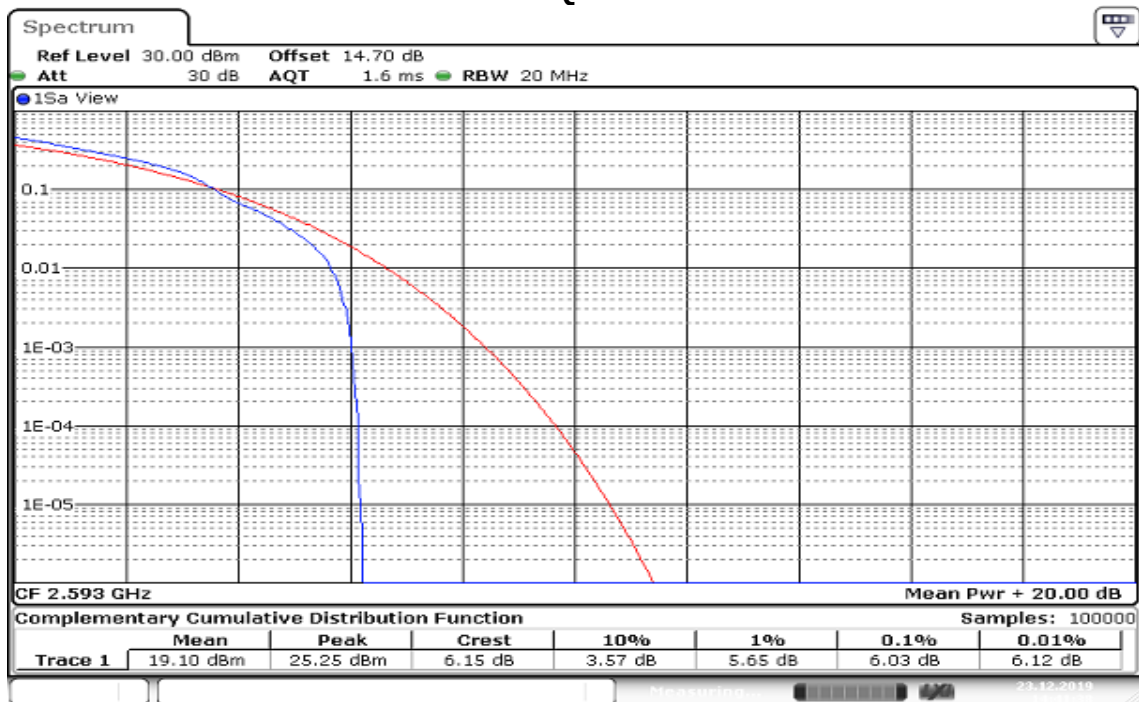


Report No.: T191120D05-RP9

CHANNEL BANDWIDTH: 5MHz / 16QAM / Full RB

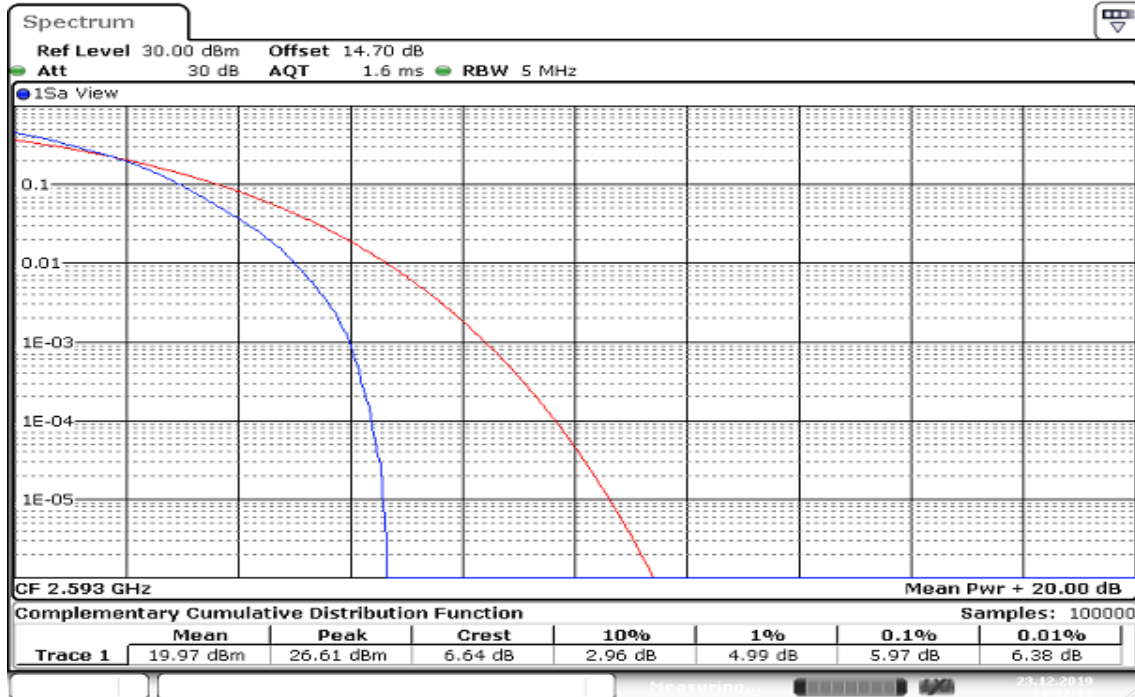


CHANNEL BANDWIDTH: 10MHz / 16QAM / Full RB

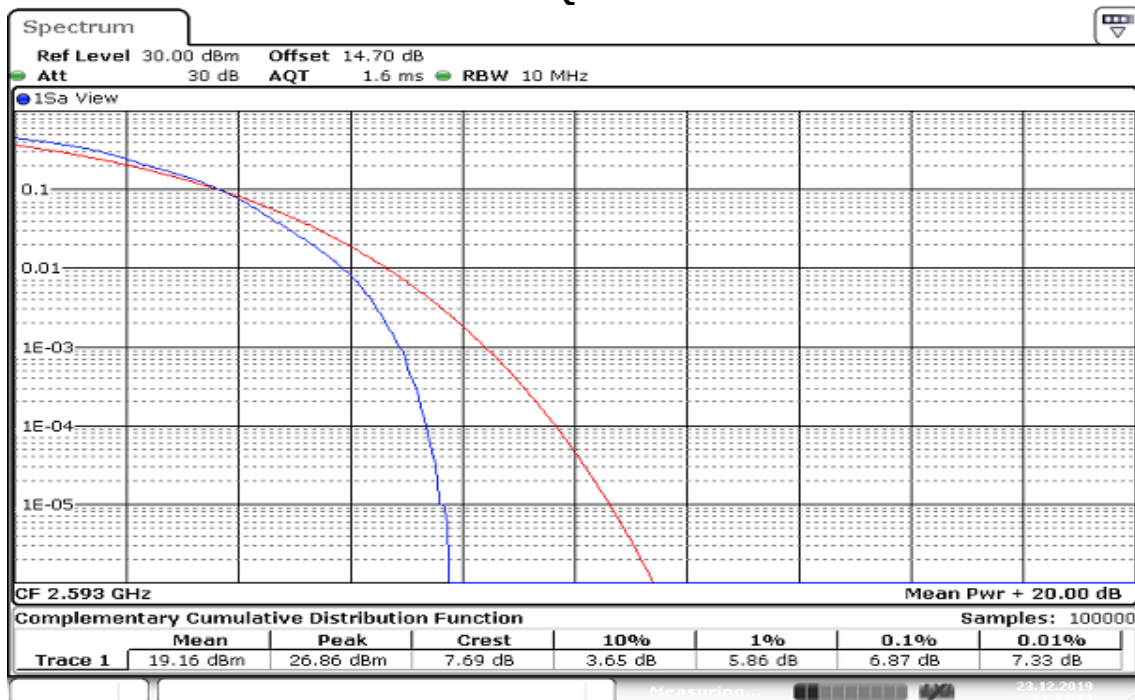


Report No.: T191120D05-RP9

CHANNEL BANDWIDTH: 15MHz / 16QAM / Full RB

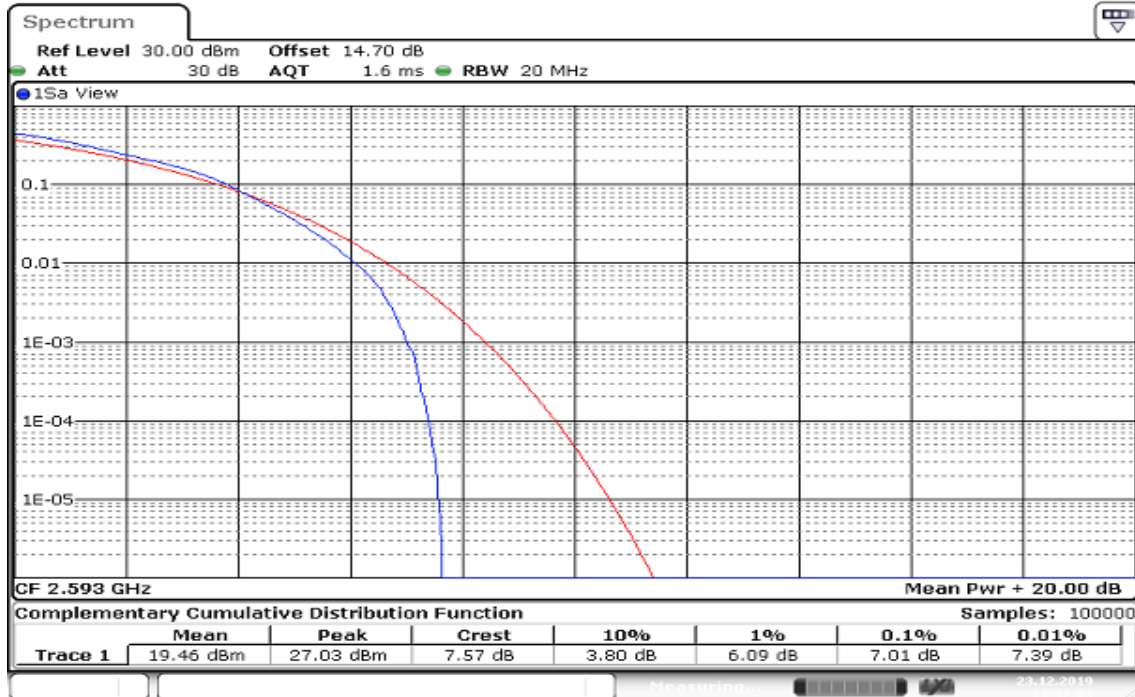

CHANNEL BANDWIDTH: 20MHz / 16QAM / Full RB

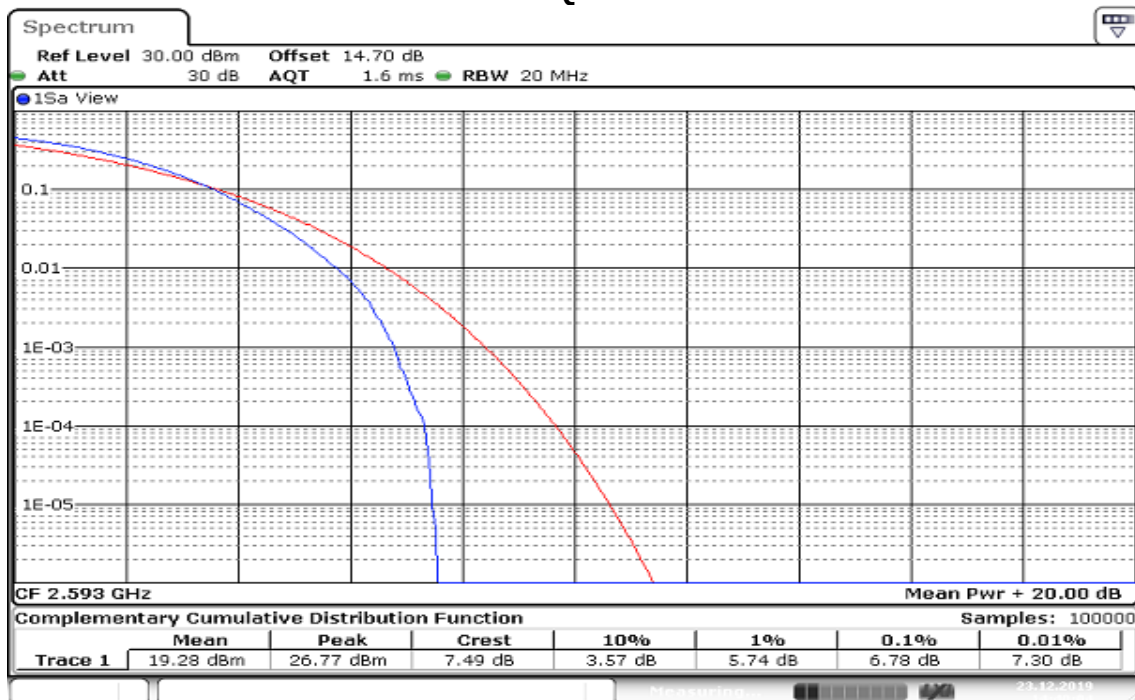

8.5 BAND EDGE MEASUREMENT

LIMIT

Part 27.53(m) (4), Band 41

Specifies that “for BRS and EBS stations. For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(4) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

According to RSS-199, Band 41

For mobile subscriber equipment, the power of any unwanted emissions measured as above shall be attenuated (in dB) below the transmitter power, P (dBW), by at least:

- (i) $40 + 10 \log_{10} p$ from the channel edges to 5 MHz away
- (ii) $43 + 10 \log_{10} p$ between 5 MHz and X MHz from the channel edges, and
- (iii) $55 + 10 \log_{10} p$ at X MHz and beyond from the channel edges


In addition, the attenuation shall not be less than $43 + 10 \log_{10} p$ on all frequencies between 2490.5 MHz and 2496 MHz, and $55 + 10 \log_{10} p$ at or below 2490.5 MHz.

p is the transmitter power measured in watts and **X** is 6 MHz or the equipment occupied bandwidth, whichever is greater.


TEST PROCEDURES

KDB 971168 D01 Power Meas License Digital Systems – Section 6.0

1. RBW $\geq$ 1% of the emission bandwidth
2. VBW $\geq$ 3 x RBW
3. Span was set large enough so as to capture all out of emissions near the band edge.

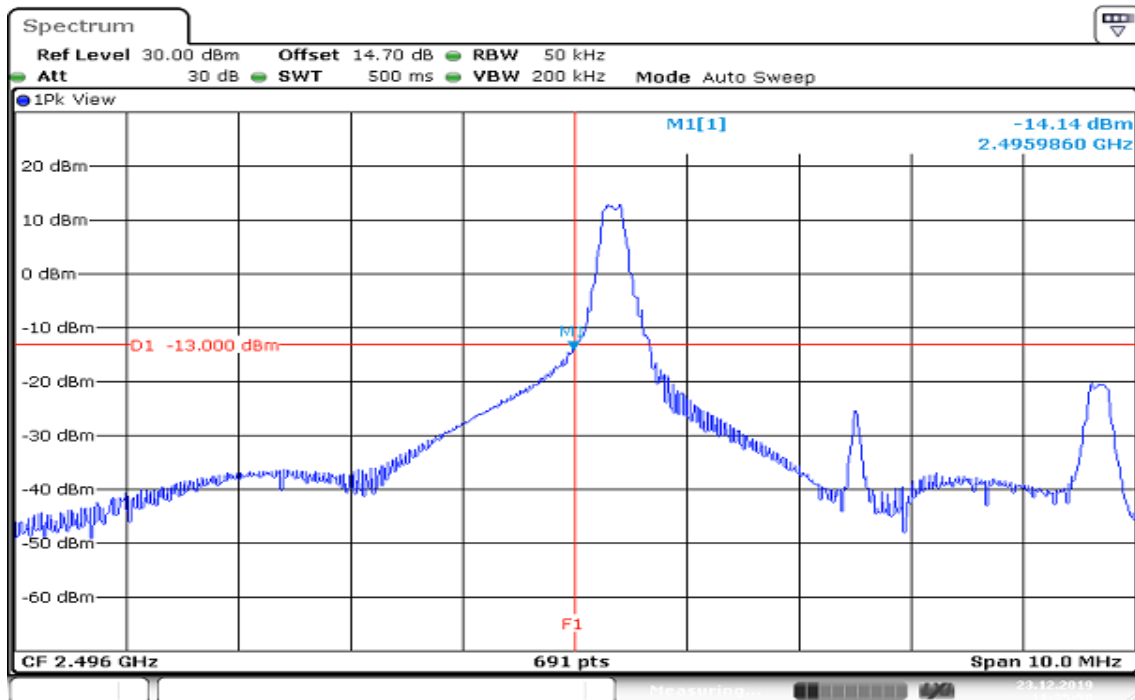
TEST RESULTS:**LTE Band 41****CHANNEL BANDWIDTH: 5MHz / QPSK / 1RB ALLOCATION****LOWER BAND EDGE**

Date: 23.DEC.2019 11:35:59

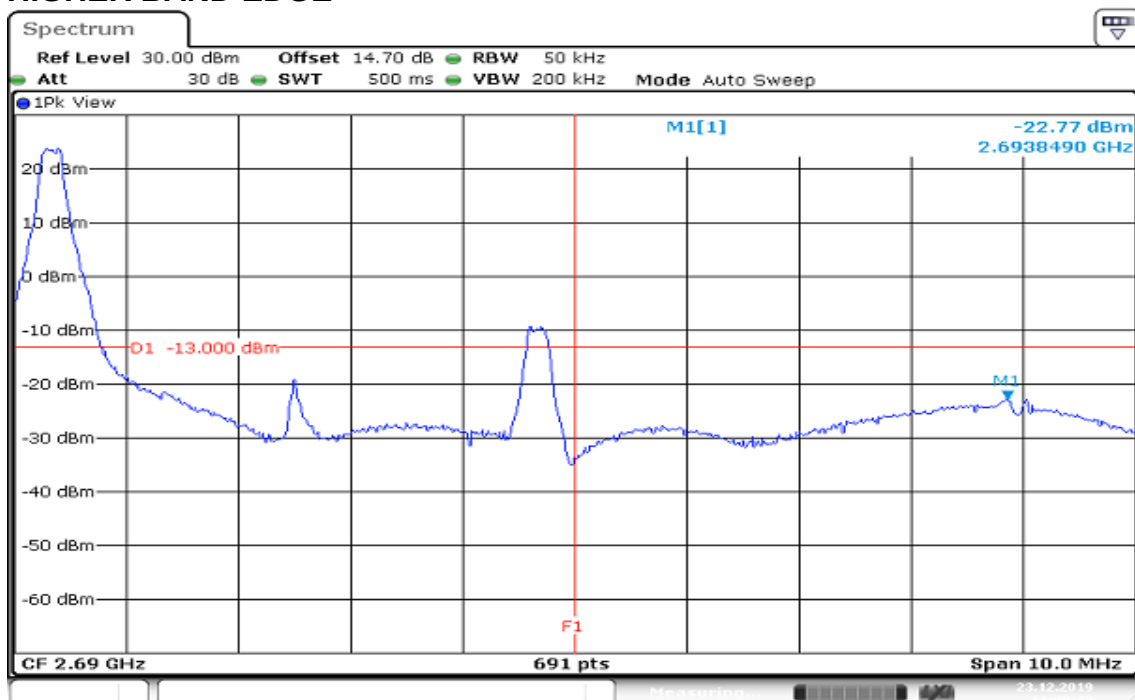HIGHER BAND EDGE


Date: 23.DEC.2019 11:40:33

CHANNEL BANDWIDTH: 10MHz / QPSK / 1RB ALLOCATION LOWER BAND EDGE

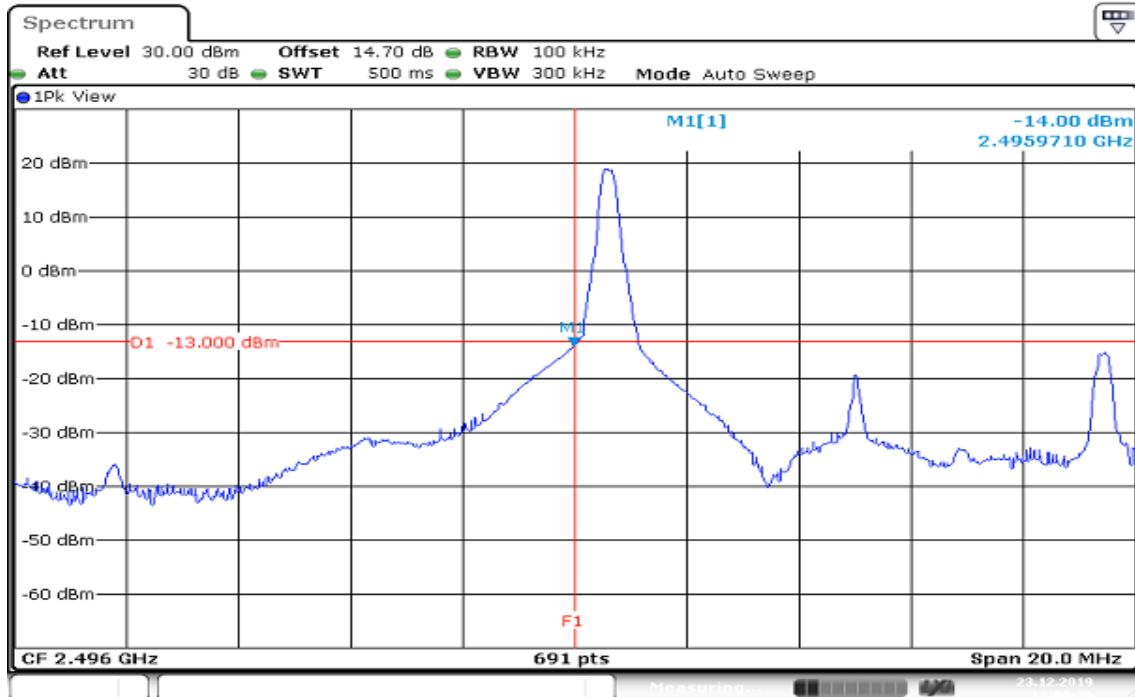

Date: 23.DEC.2019 12:00:26


HIGHER BAND EDGE

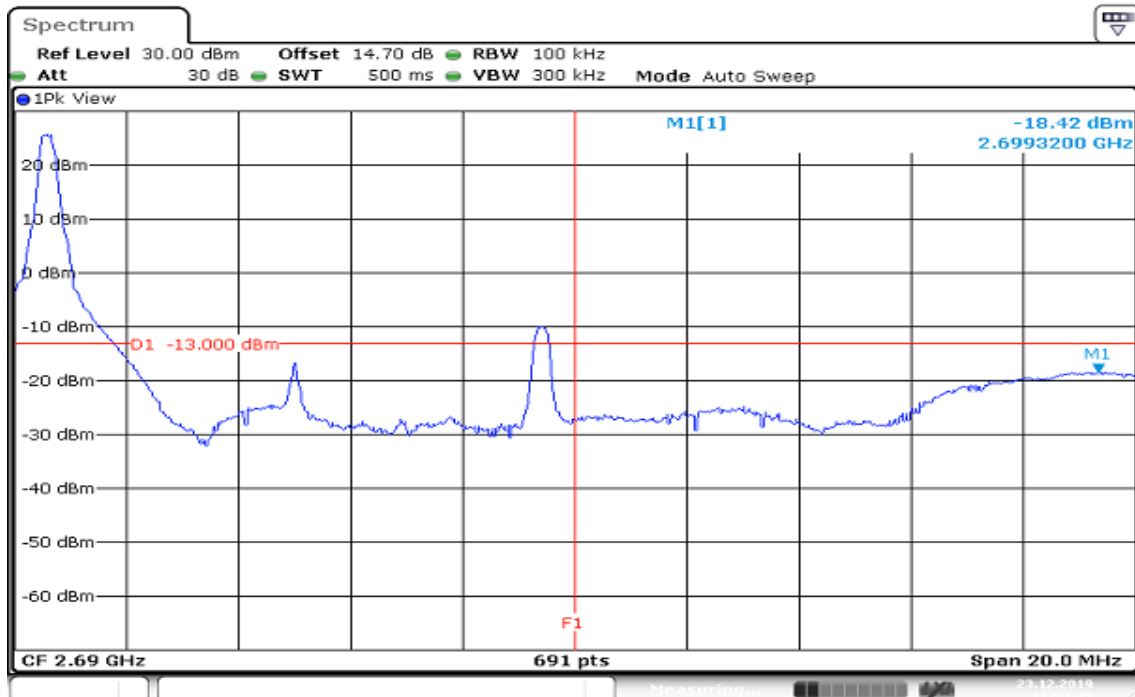

Date: 23.DEC.2019 11:53:44


Report No.: T191120D05-RP9

CHANNEL BANDWIDTH: 15MHz / QPSK / 1RB ALLOCATION LOWER BAND EDGE

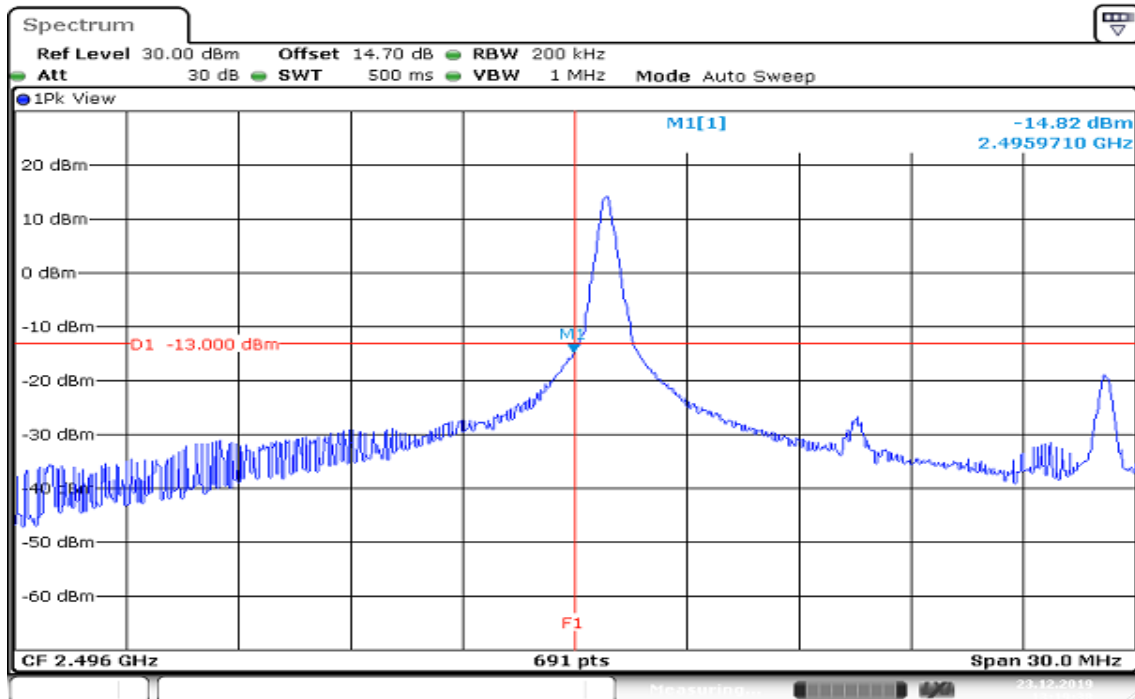

Date: 23.DEC.2019 13:19:38


HIGHER BAND EDGE

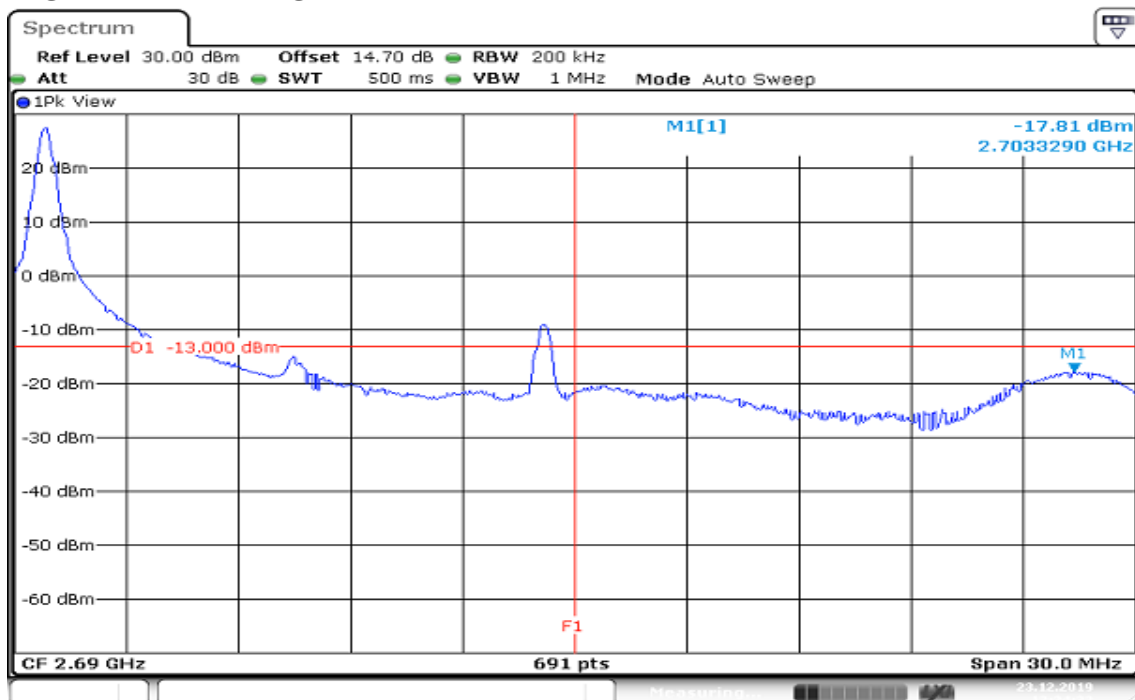

Date: 23.DEC.2019 13:24:33


Report No.: T191120D05-RP9

CHANNEL BANDWIDTH: 20MHz / QPSK / 1RB ALLOCATION LOWER BAND EDGE

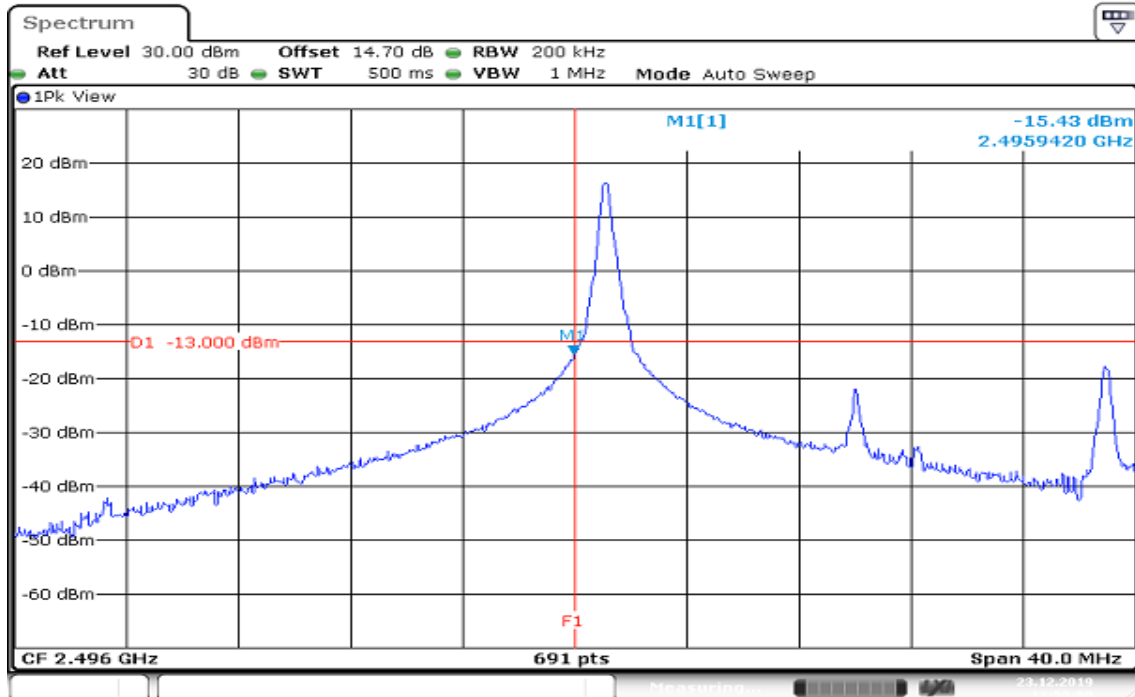


Date: 23.DEC.2019 13:50:00


HIGHER BAND EDGE

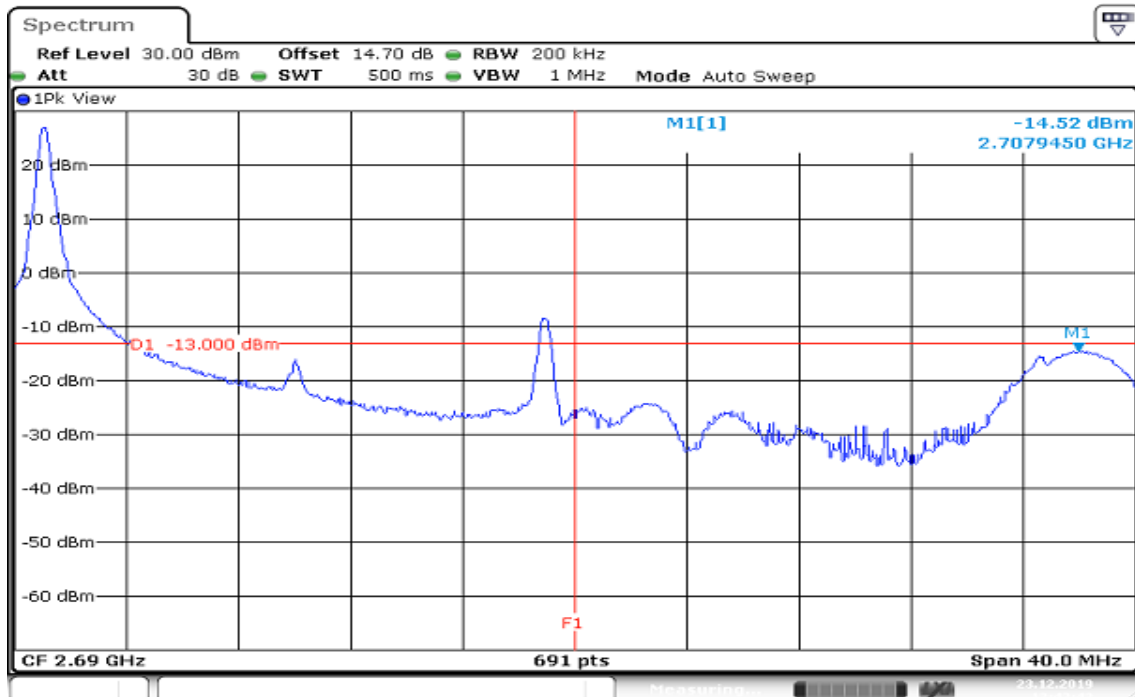

Date: 23.DEC.2019 13:42:43

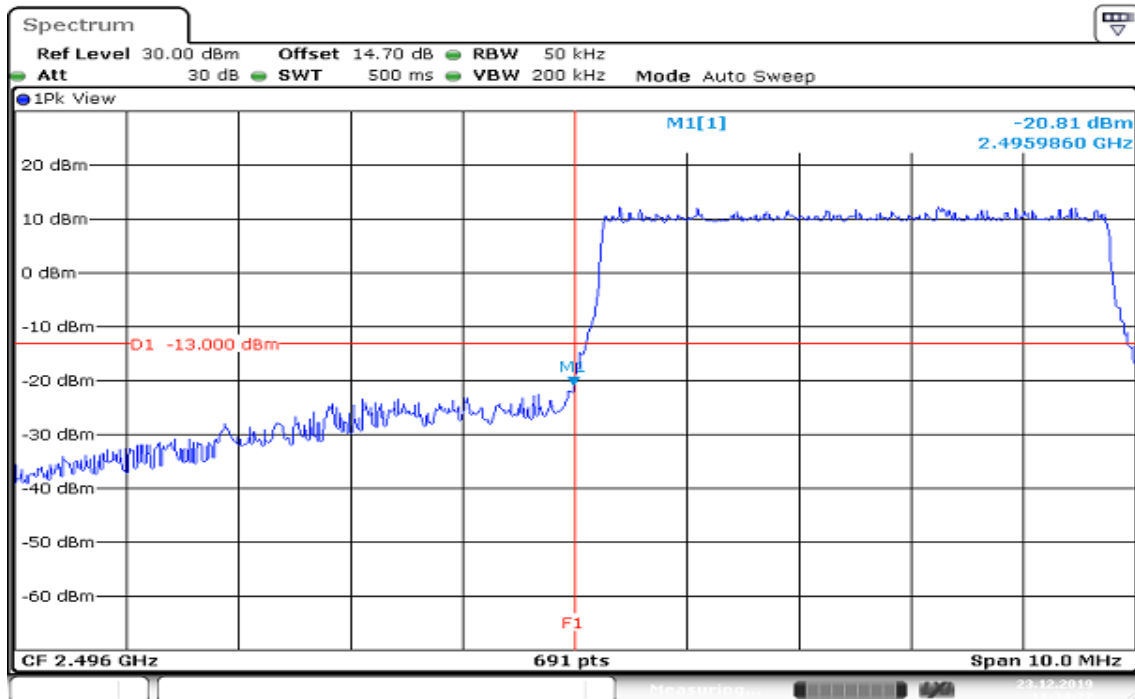
**CHANNEL BANDWIDTH: 5MHz / QPSK / FULLRB ALLOCATION
LOWER BAND EDGE**

Date: 23.DEC.2019 11:34:27

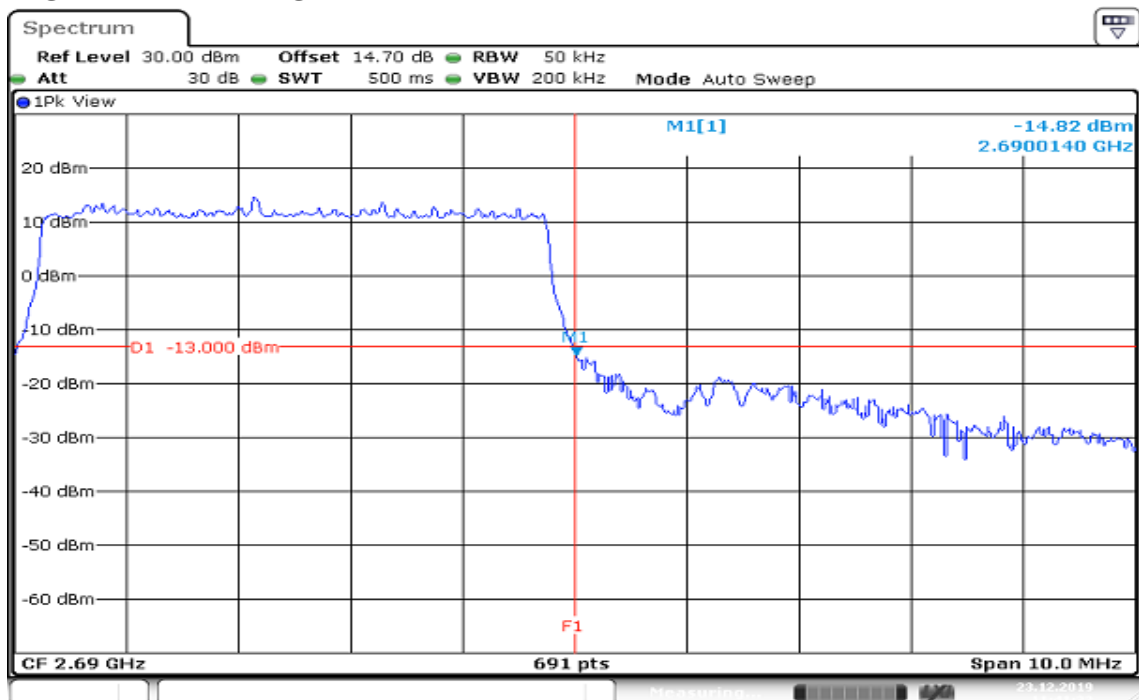HIGHER BAND EDGE


Date: 23.DEC.2019 11:41:32

CHANNEL BANDWIDTH: 10MHz / QPSK / FULLRB ALLOCATION LOWER BAND EDGE

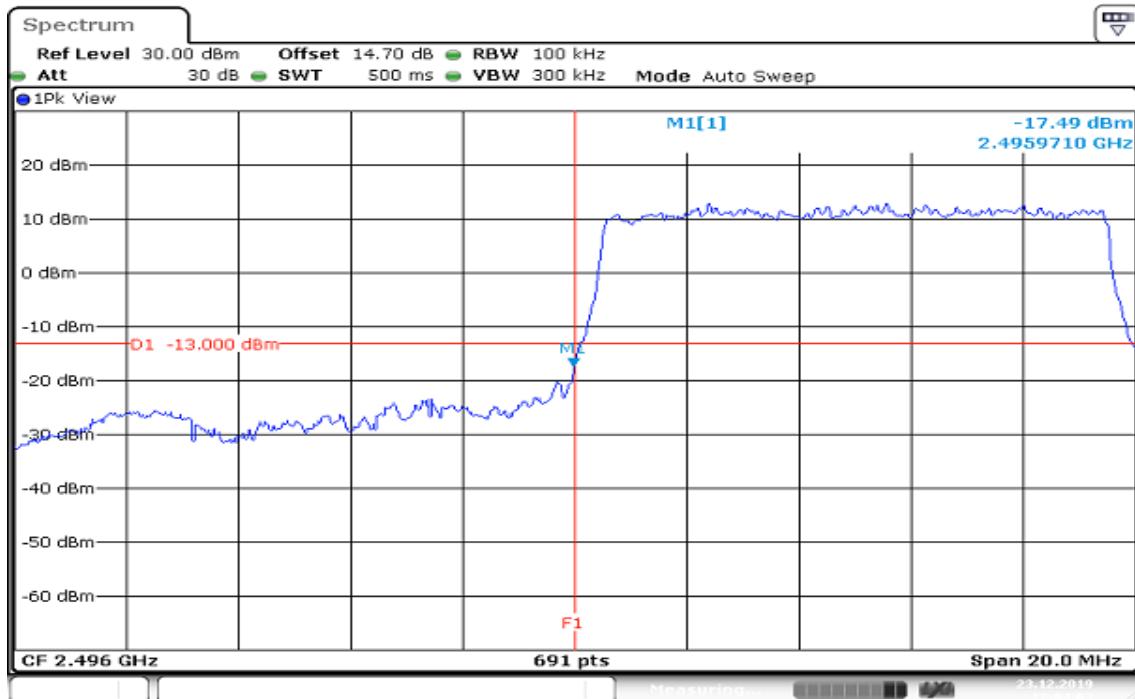


Date: 23.DEC.2019 12:04:03

HIGHER BAND EDGE

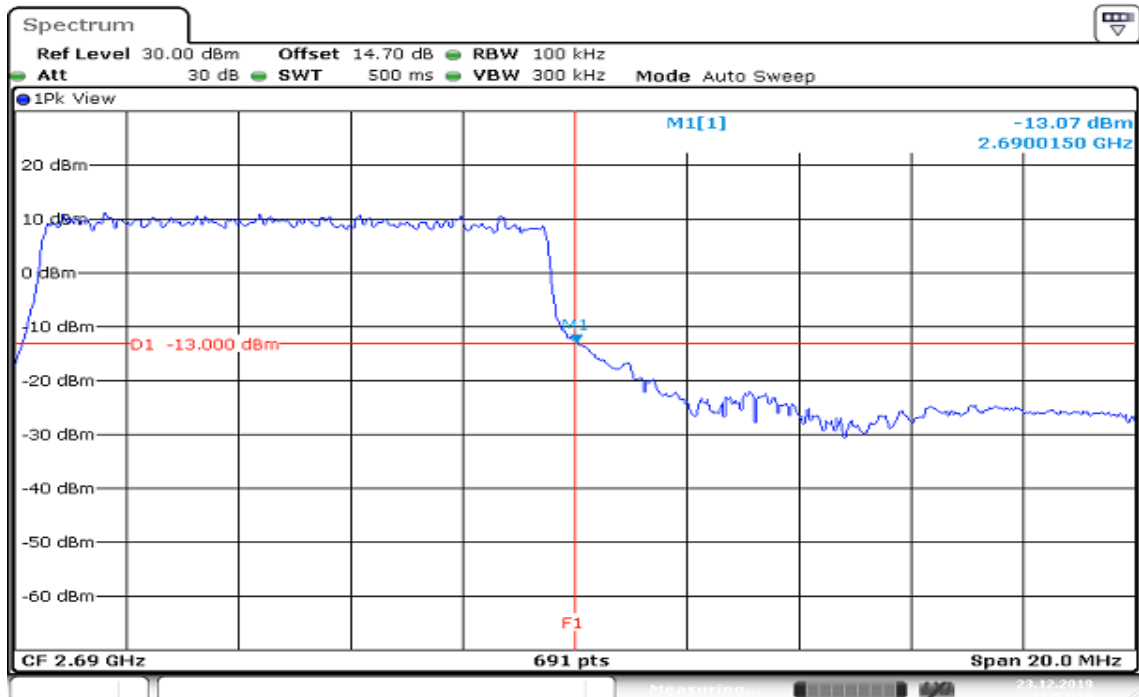


Date: 23.DEC.2019 11:52:21

CHANNEL BANDWIDTH: 15MHz / QPSK / FULLRB ALLOCATION LOWER BAND EDGE

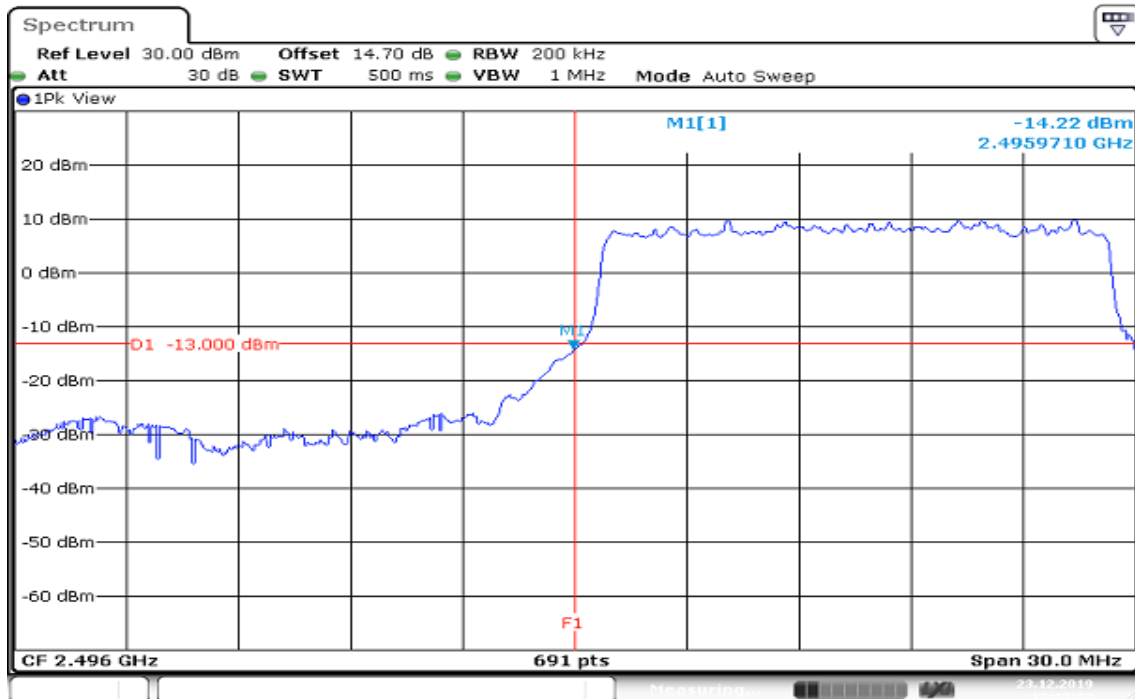


Date: 23.DEC.2019 12:13:33


HIGHER BAND EDGE

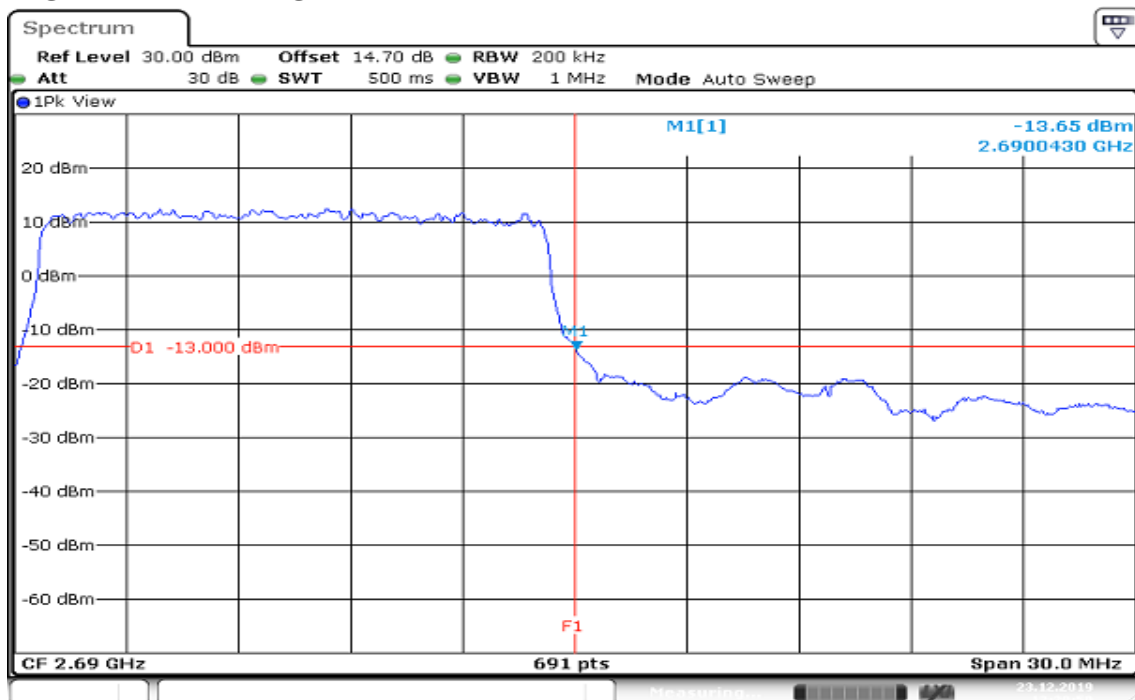

Date: 23.DEC.2019 13:29:59

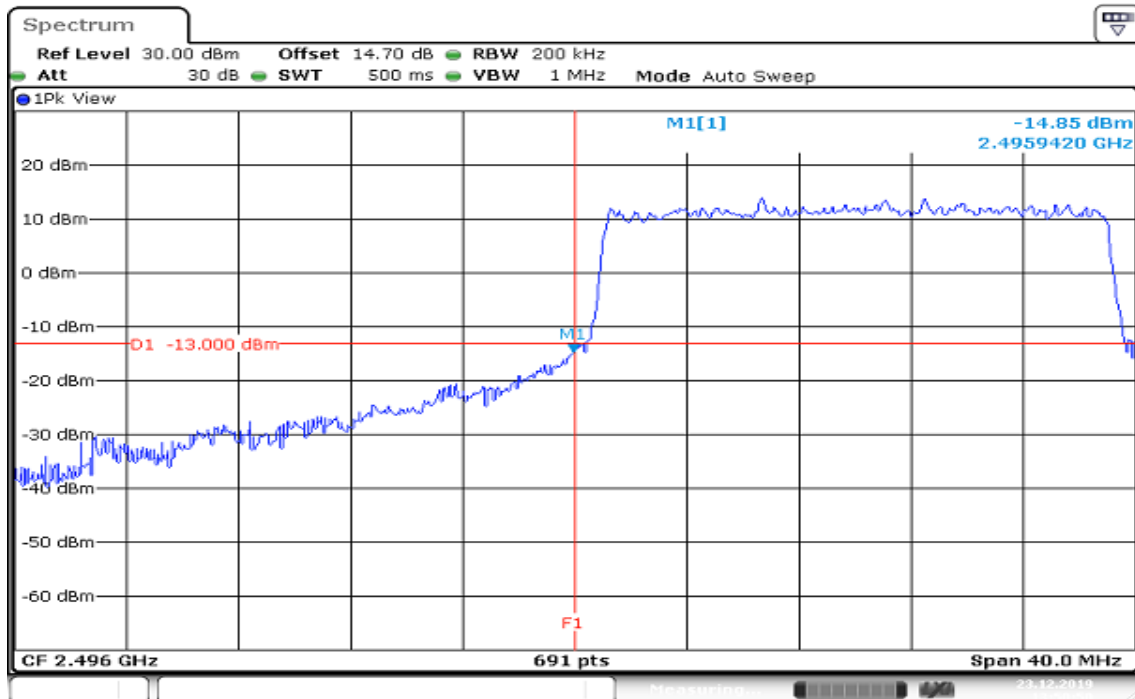**CHANNEL BANDWIDTH: 20MHz / QPSK / FULLRB ALLOCATION
LOWER BAND EDGE**


Date: 23.DEC.2019 13:50:50

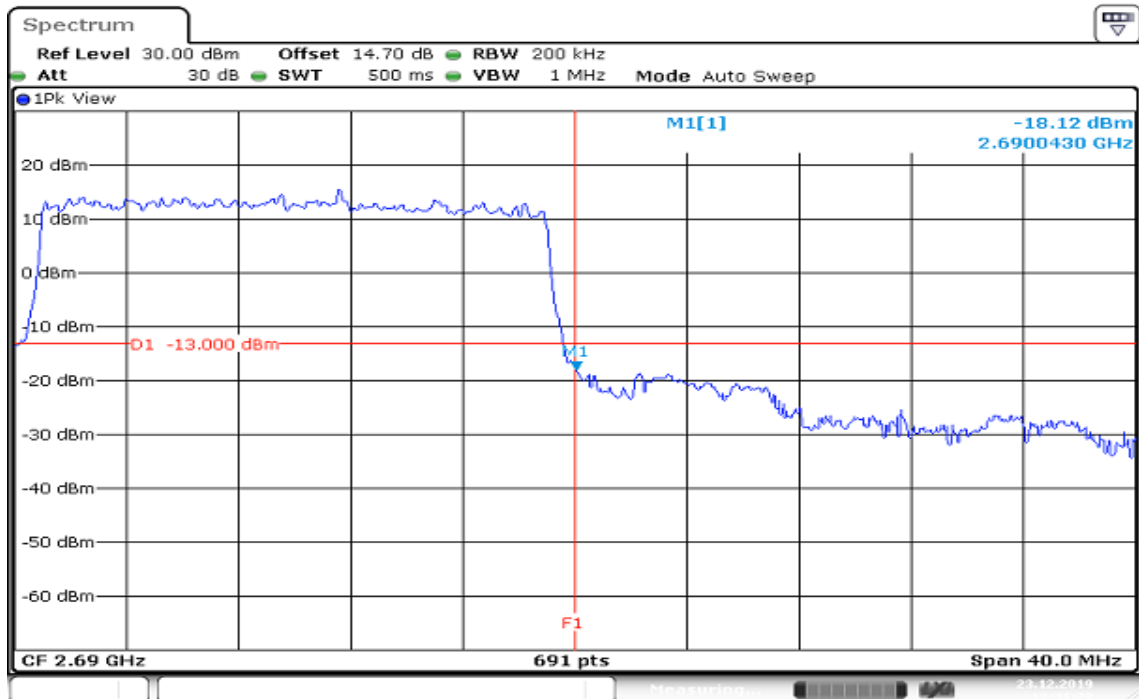HIGHER BAND EDGE

Date: 23.DEC.2019 13:41:24


Report No.: T191120D05-RP9

CHANNEL BANDWIDTH: 5MHz / 16QAM/ 1RB ALLOCATION LOWER BAND EDGE

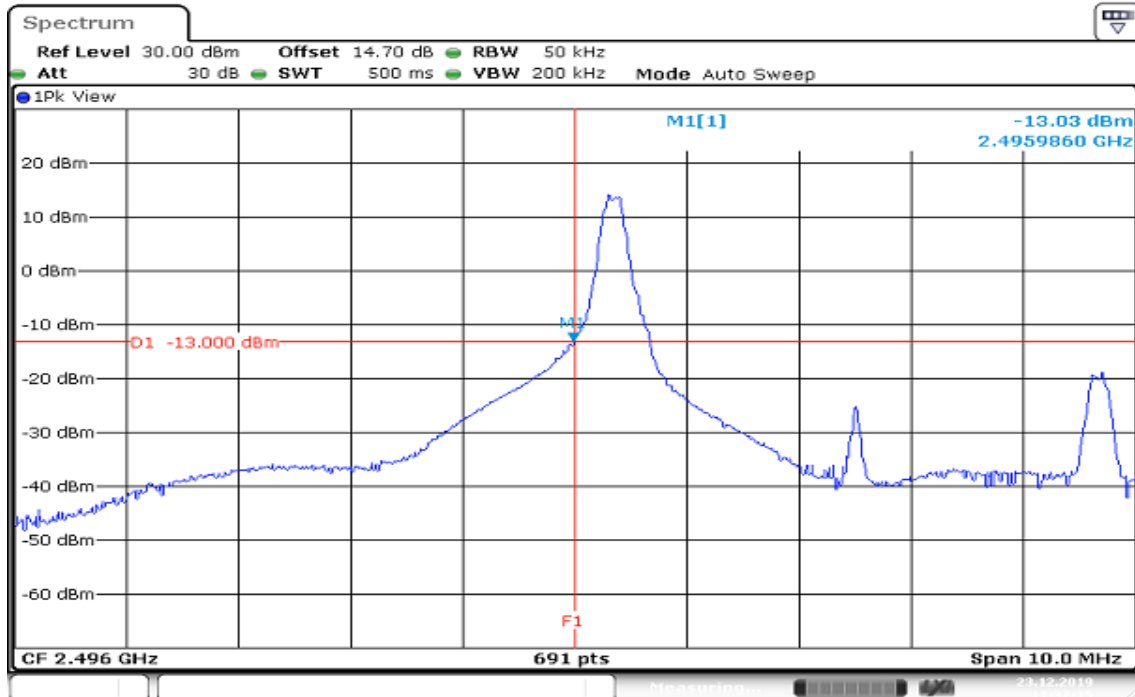


Date: 23.DEC.2019 11:37:16

HIGHER BAND EDGE

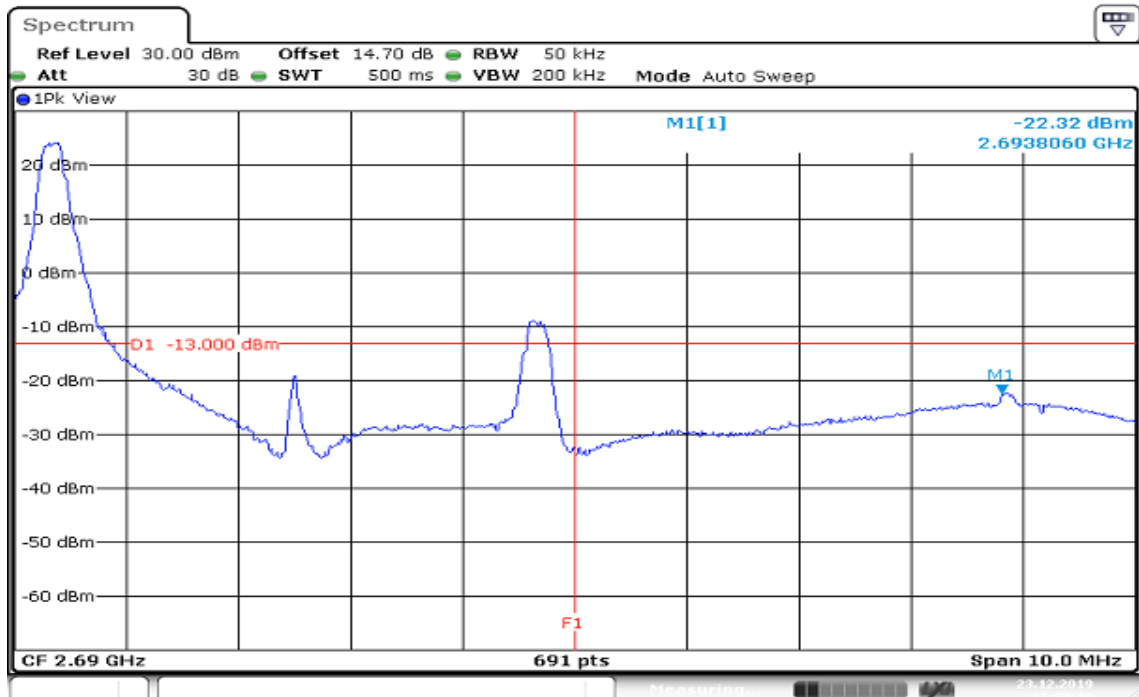


Date: 23.DEC.2019 11:39:20

CHANNEL BANDWIDTH: 10MHz / 16QAM/ 1RB ALLOCATION LOWER BAND EDGE

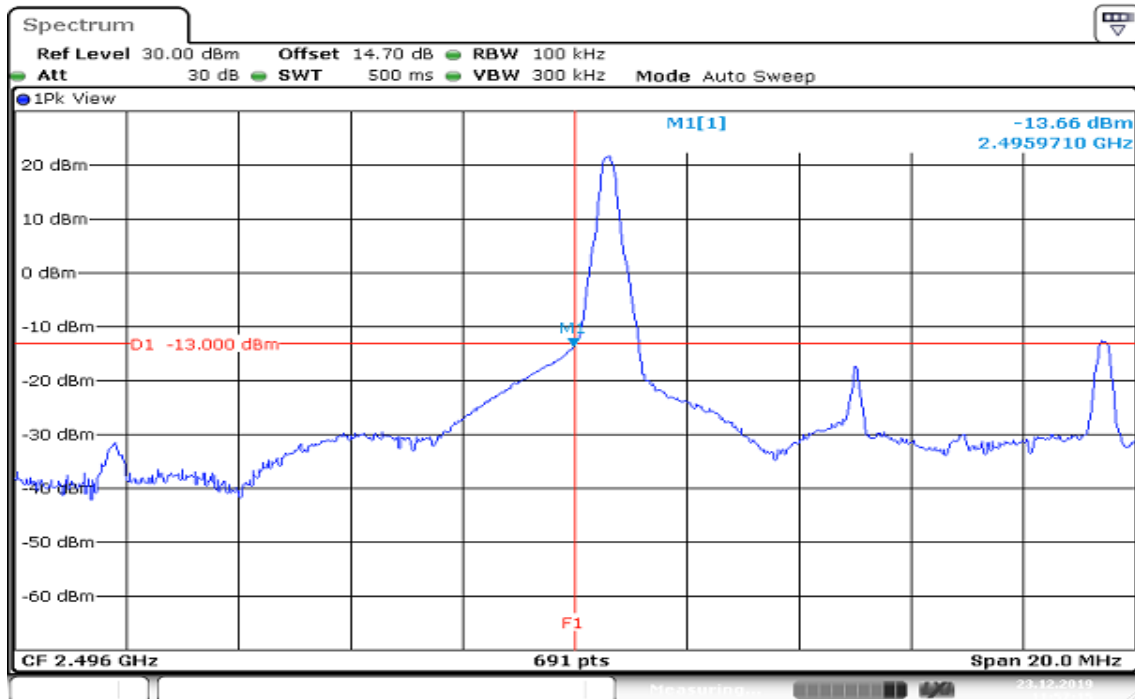


Date: 23.DEC.2019 11:57:15

HIGHER BAND EDGE

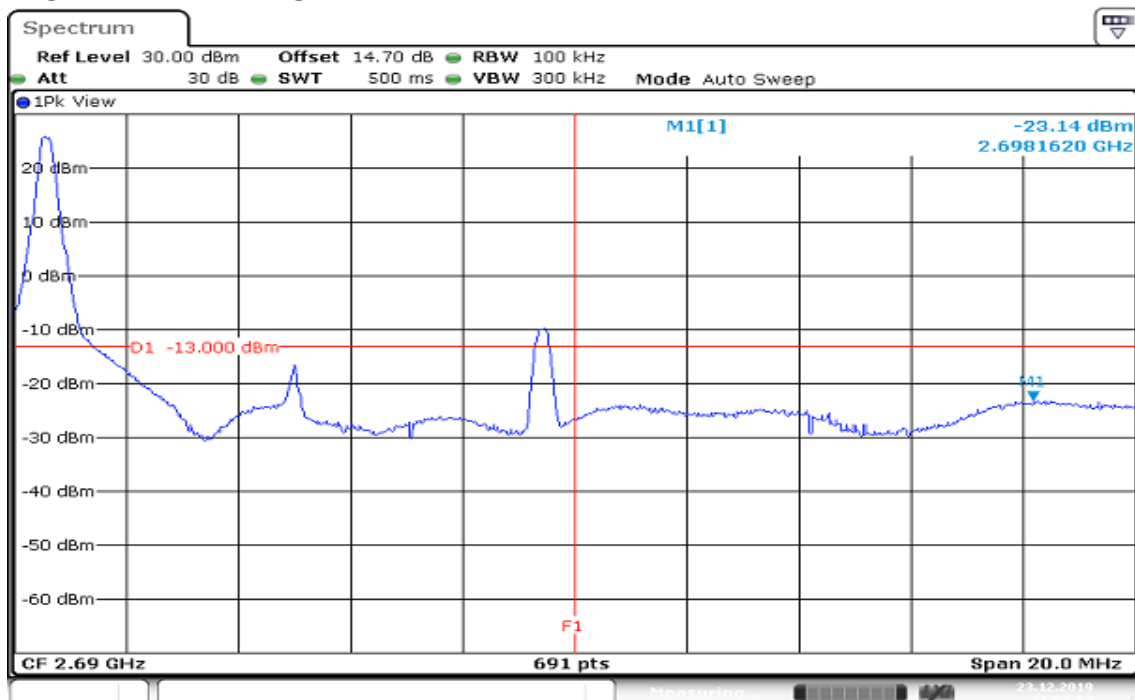


Date: 23.DEC.2019 11:55:14

CHANNEL BANDWIDTH: 15MHz / 16QAM/ 1RB ALLOCATION LOWER BAND EDGE

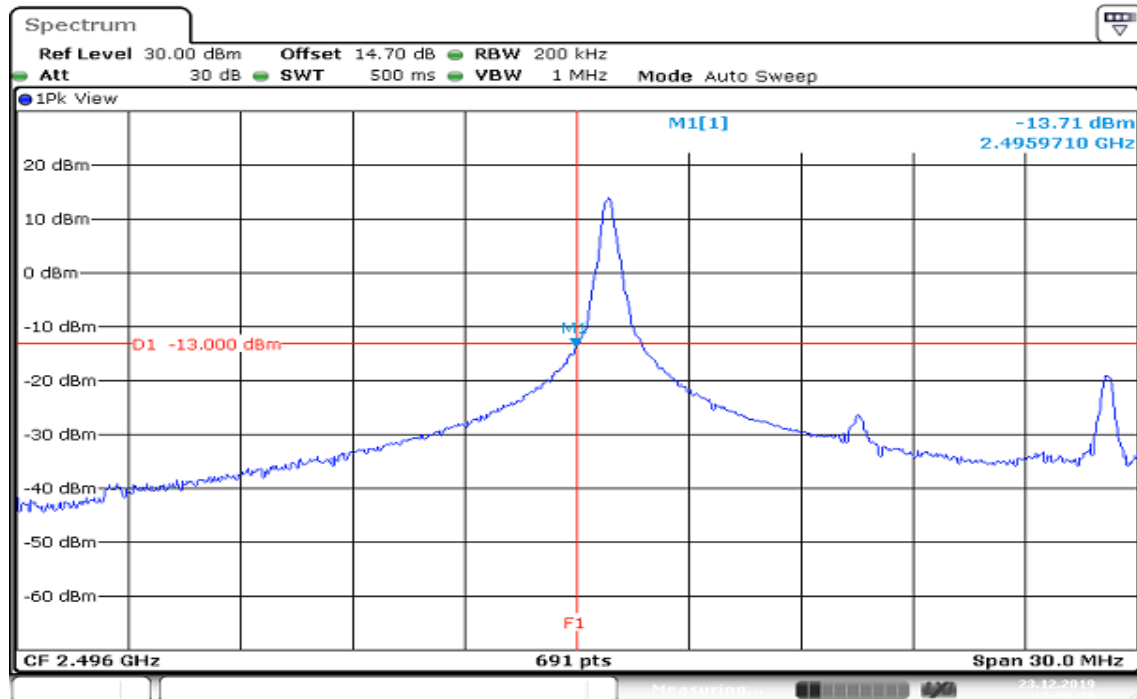

Date: 23.DEC.2019 13:20:39


HIGHER BAND EDGE

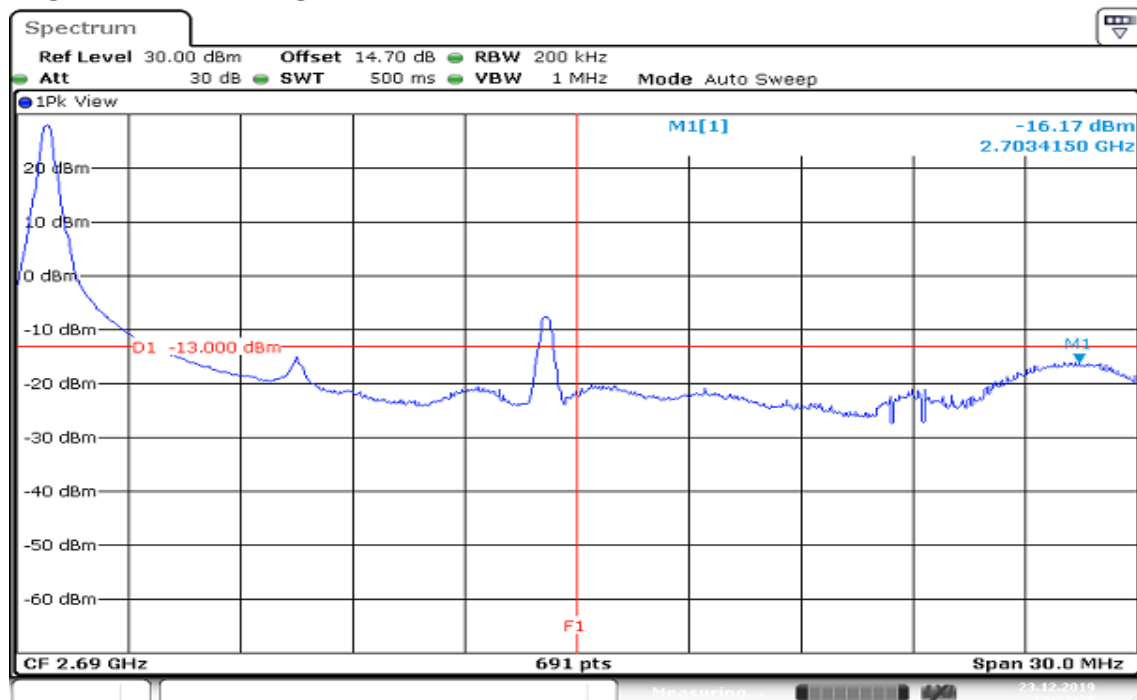

Date: 23.DEC.2019 13:23:38


Report No.: T191120D05-RP9

**CHANNEL BANDWIDTH: 20MHz / 16QAM/ 1RB ALLOCATION
LOWER BAND EDGE**

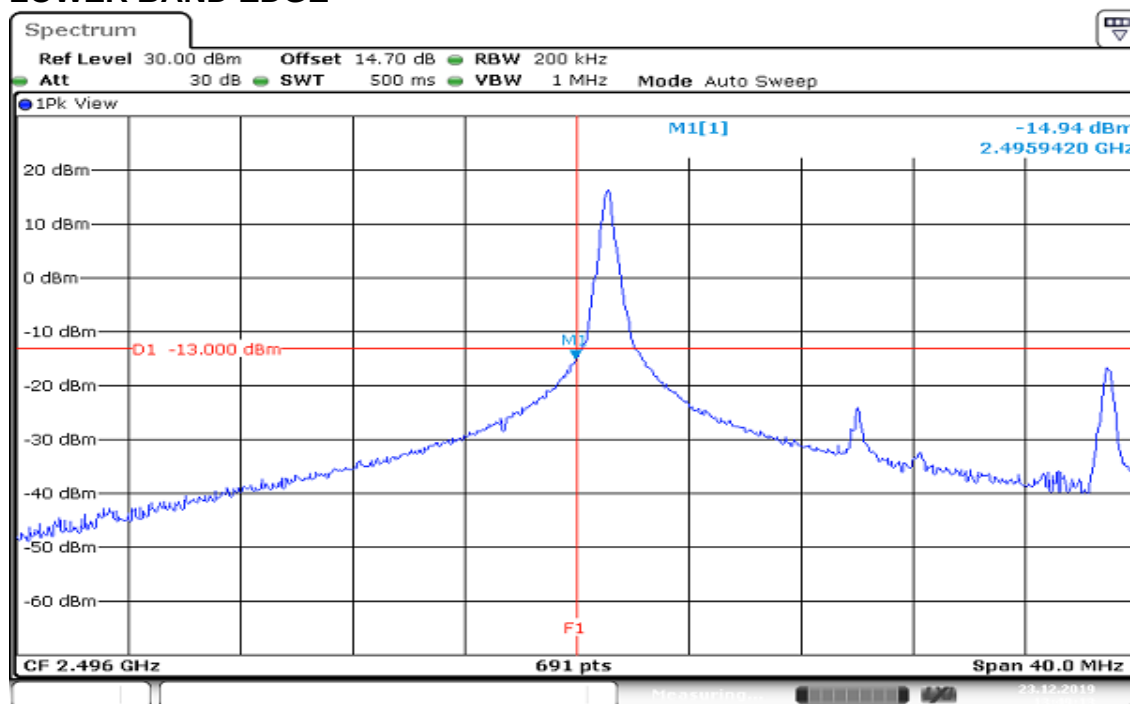


Date: 23.DEC.2019 13:49:13

HIGHER BAND EDGE

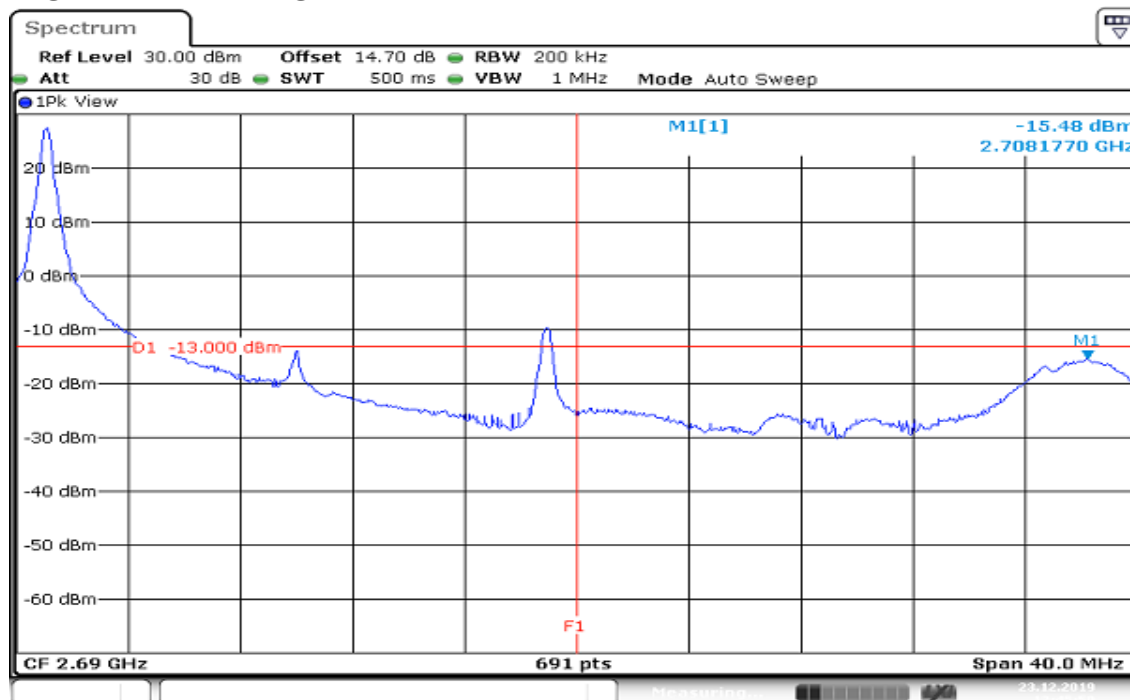


Date: 23.DEC.2019 13:45:50

CHANNEL BANDWIDTH: 5MHz / 16QAM/ FULLRB ALLOCATION LOWER BAND EDGE

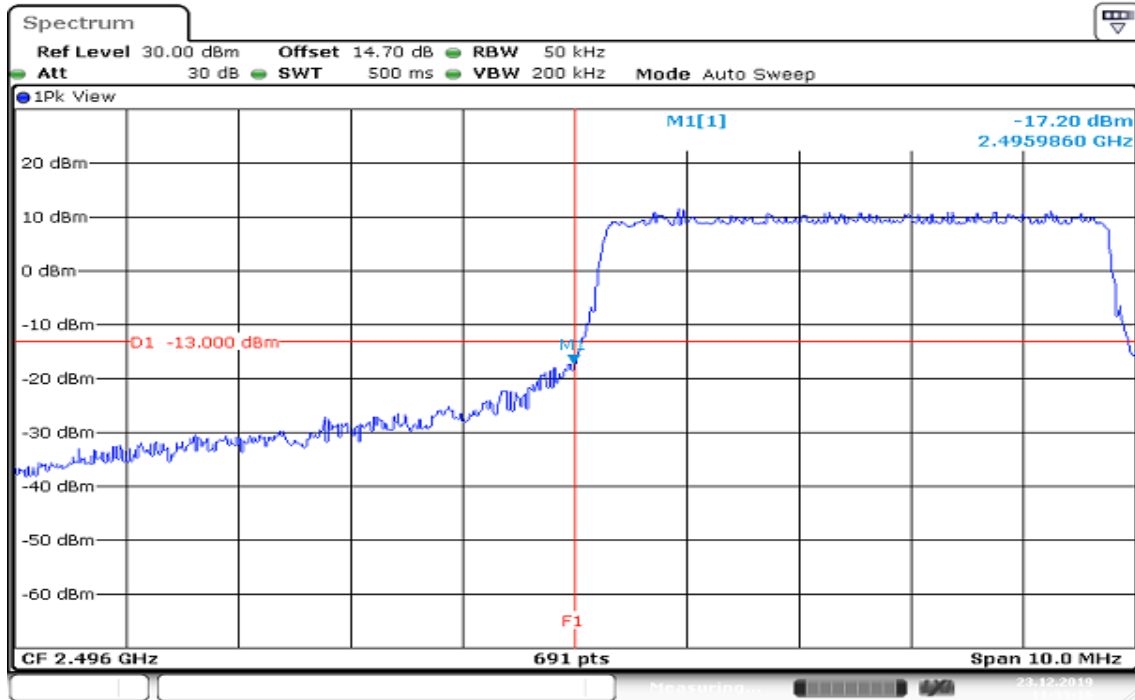

Date: 23.DEC.2019 11:33:16


HIGHER BAND EDGE

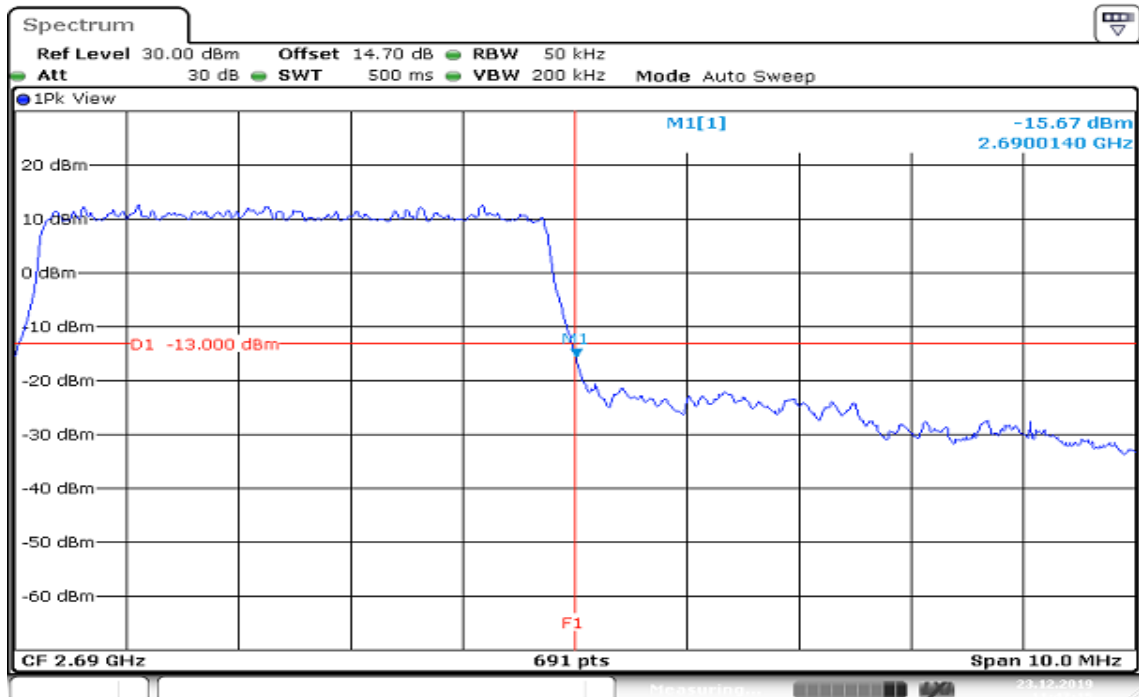

Date: 23.DEC.2019 11:47:16


Report No.: T191120D05-RP9

CHANNEL BANDWIDTH: 10MHz / 16QAM/ FULLRB ALLOCATION LOWER BAND EDGE

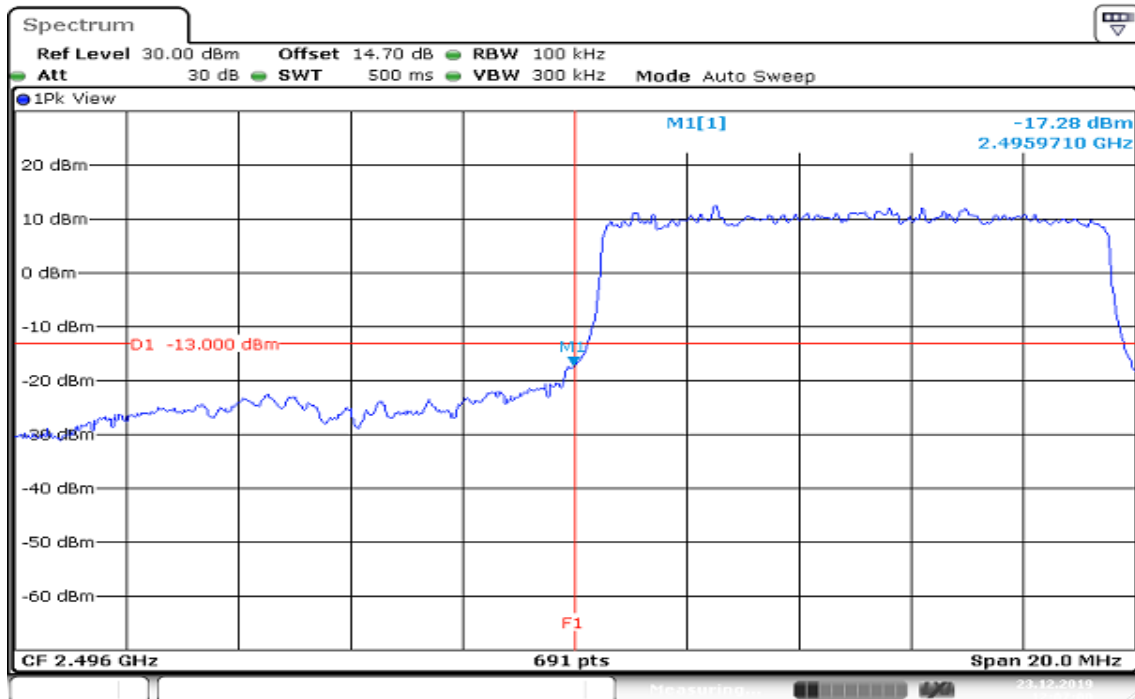


Date: 23.DEC.2019 12:07:01

HIGHER BAND EDGE

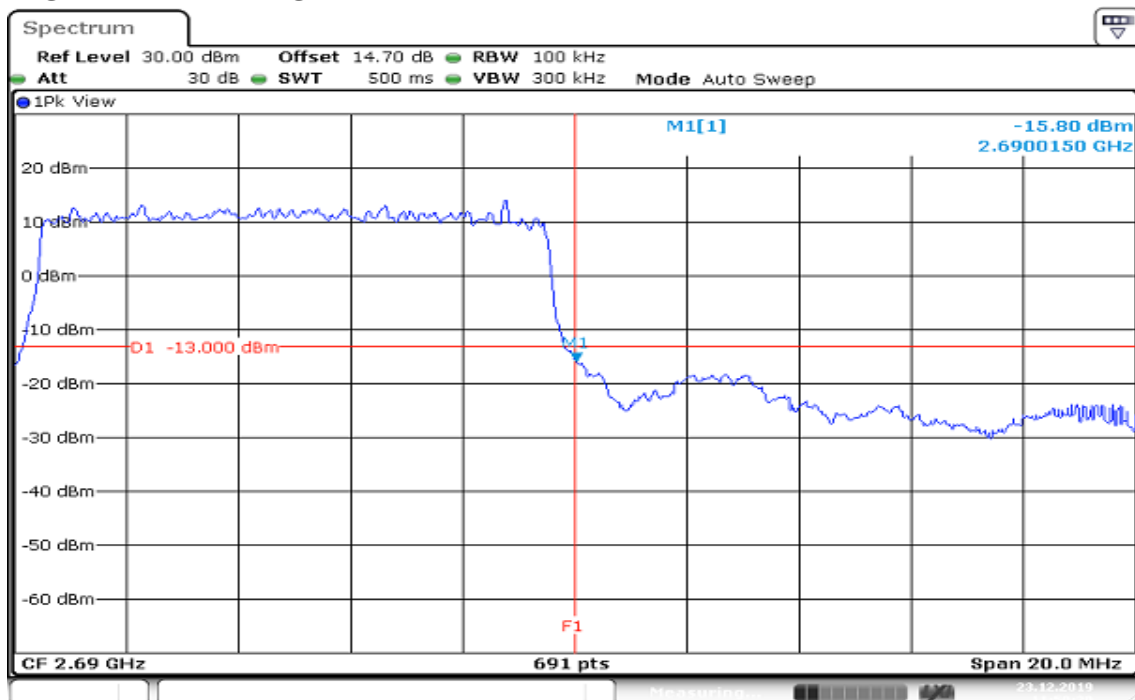


Date: 23.DEC.2019 11:50:21

CHANNEL BANDWIDTH: 15MHz / 16QAM/ FULLRB ALLOCATION LOWER BAND EDGE

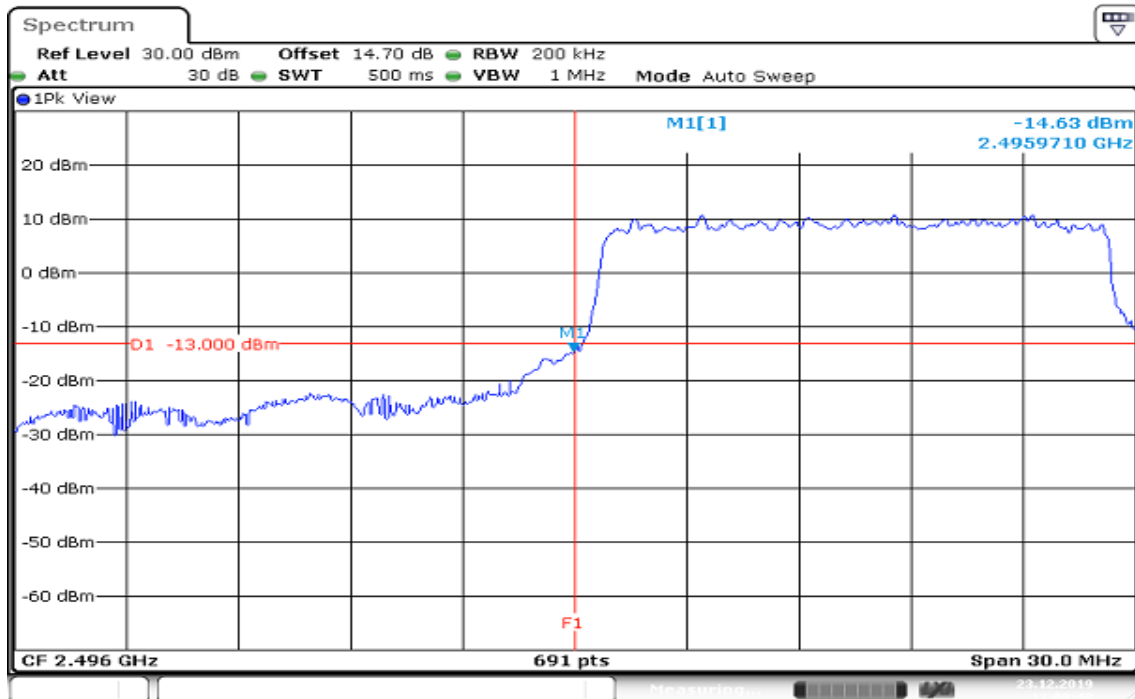


Date: 23.DEC.2019 12:09:49

HIGHER BAND EDGE

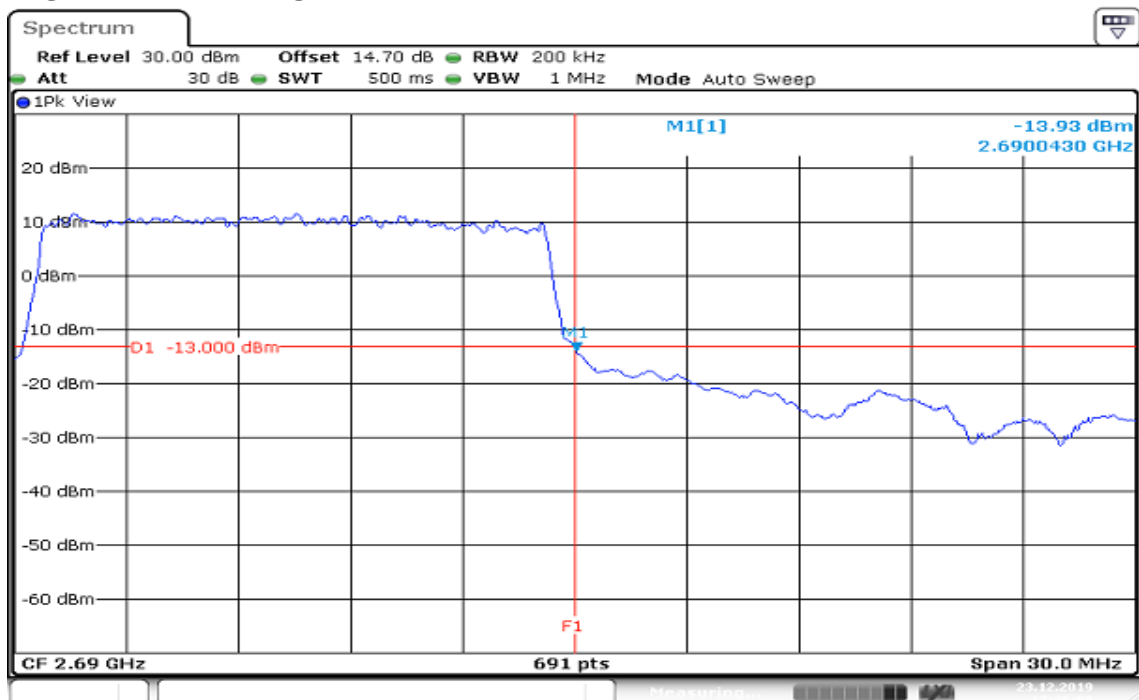


Date: 23.DEC.2019 13:36:10

CHANNEL BANDWIDTH: 20MHz / 16QAM/ FULLRB ALLOCATION LOWER BAND EDGE

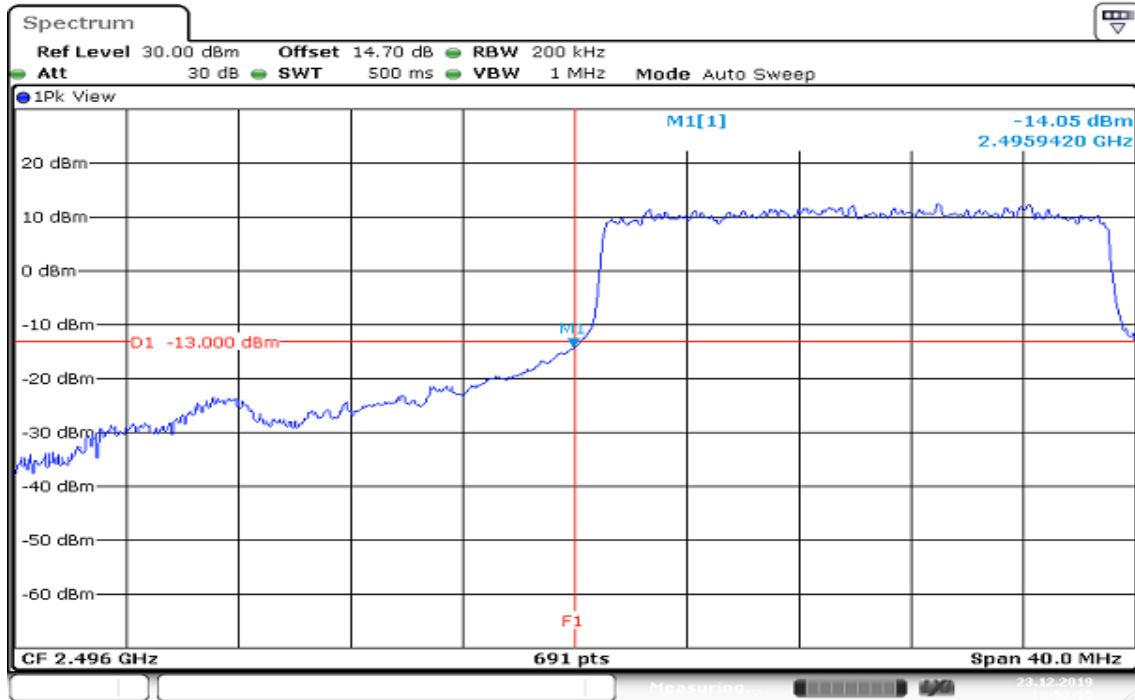

HIGHER BAND EDGE

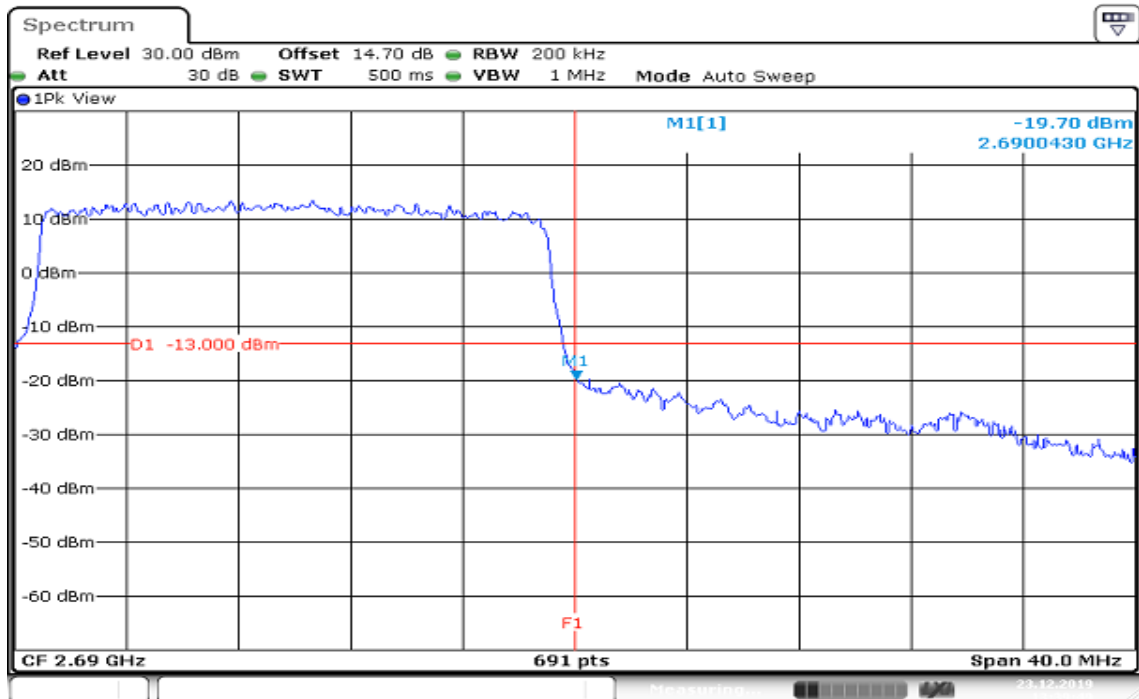



Report No.: T191120D05-RP9

Page: 57 / 82

Rev.: 03

8.6 CONDUCTED SPURIOUS EMISSIONS

LIMITS

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10}(P)$ dB. The limit of emission equal to -13dBm

TEST PROCEDURES


1. According to KDB 971168D01, photograph 6.0
2. The EUT was connect to spectrum analyzer and call box.
3. The RF output of EUT was connected to the spectrum analyzer.
4. Set the spectrum analyzer , RBW=1MHz, VBW=3MHz.
5. Record the maximum spurious emission.
6. The fundamental frequency should be excluded against the limit in operating band.

TEST RESULTS


LTE Band 41

CHANNEL BANDWIDTH: 5MHz /QPSK / 1RB


CH Low

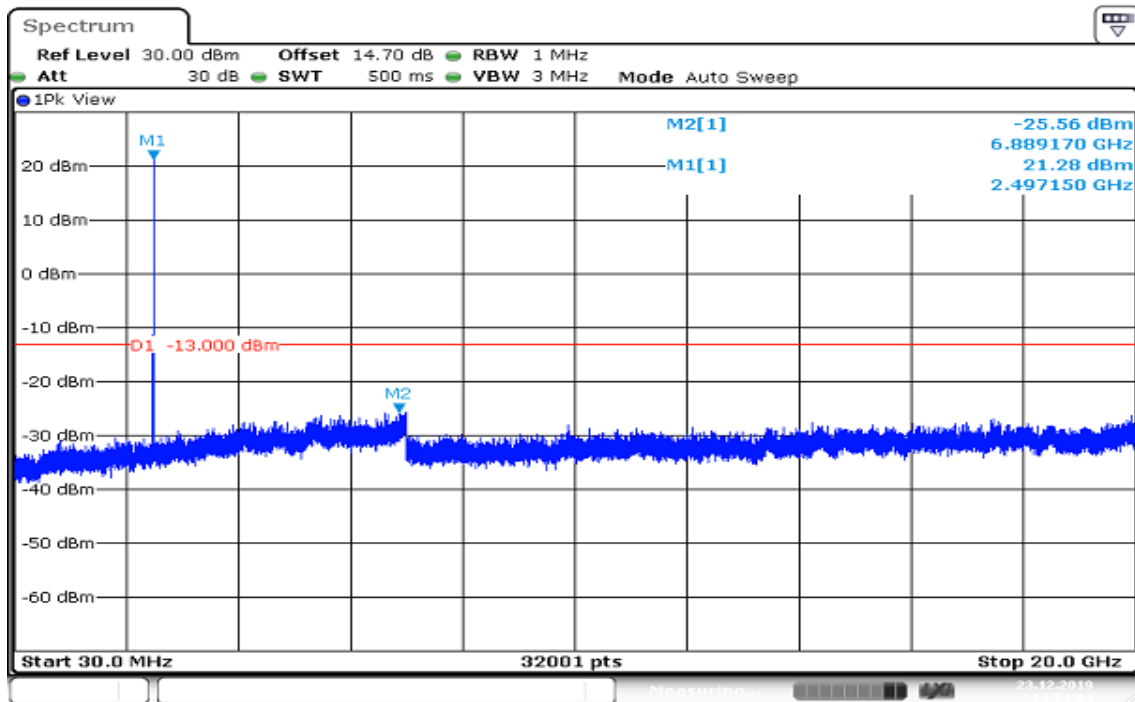

CH Mid

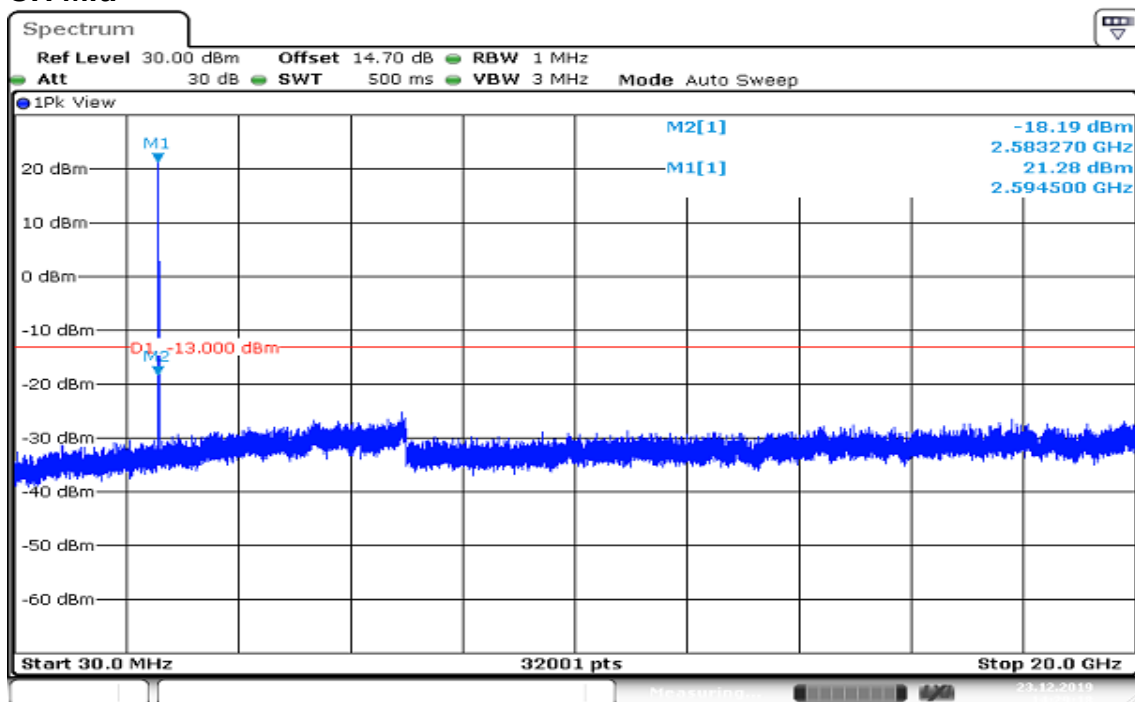


CH High

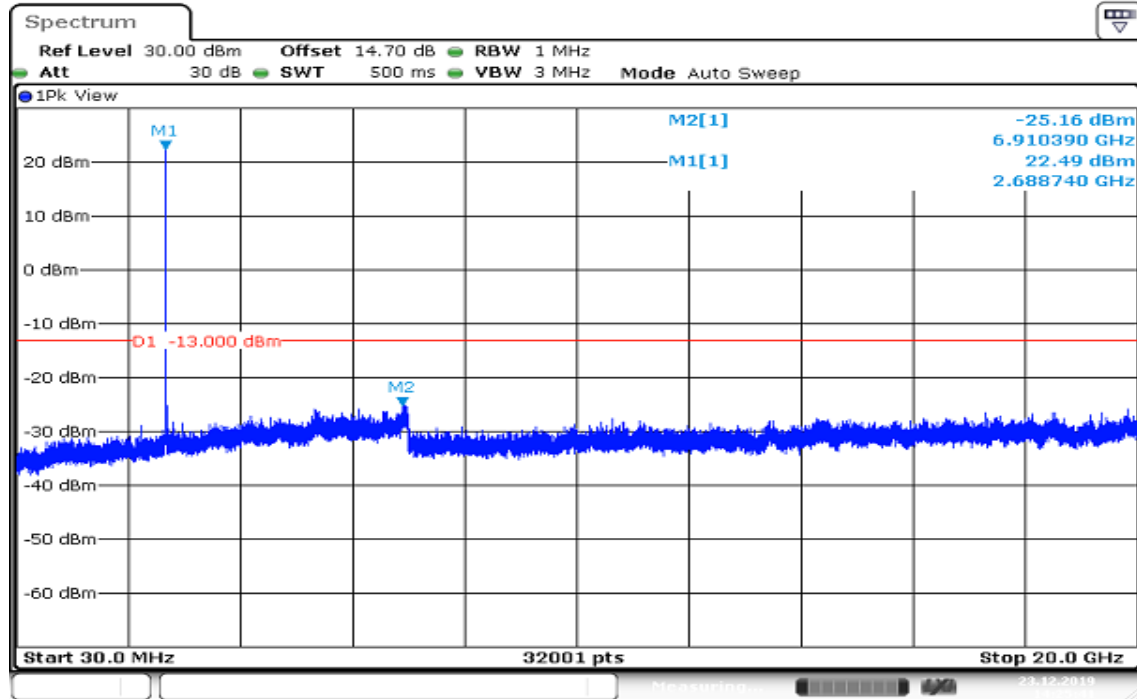


Date: 23.DEC.2019 14:25:41


CHANNEL BANDWIDTH: 10MHz /QPSK / 1RB CH Low

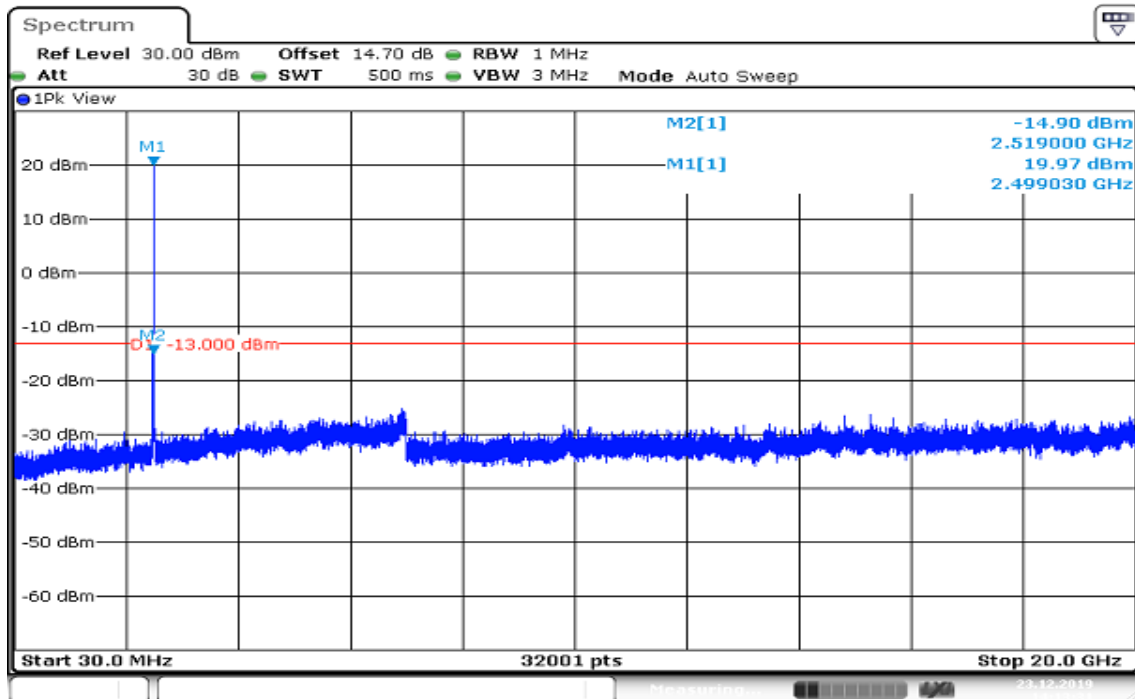

CH Mid

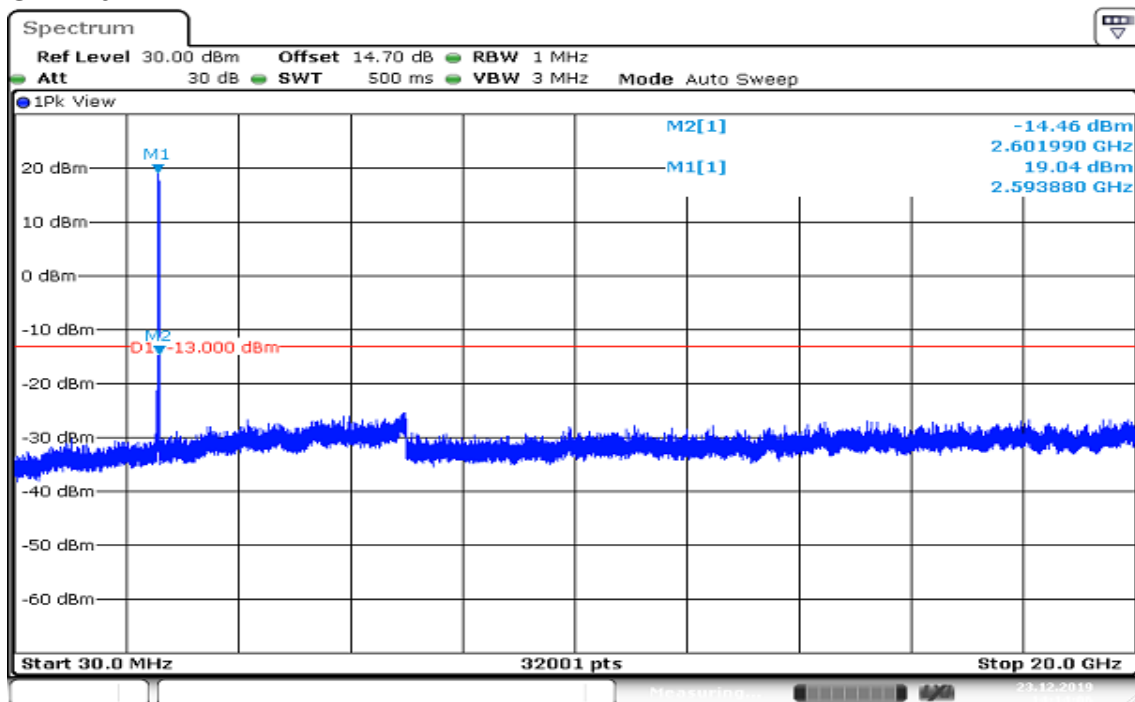

CH High

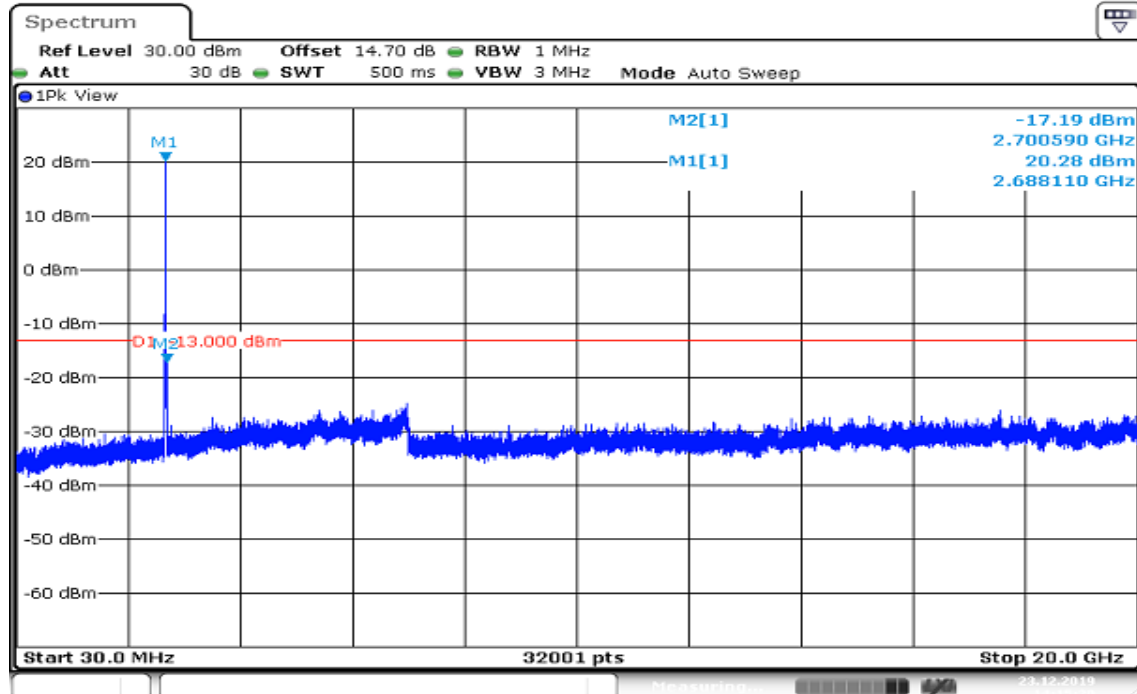


Date: 23.DEC.2019 14:15:20


Report No.: T191120D05-RP9

CHANNEL BANDWIDTH: 15MHz /QPSK / 1RB


CH Low

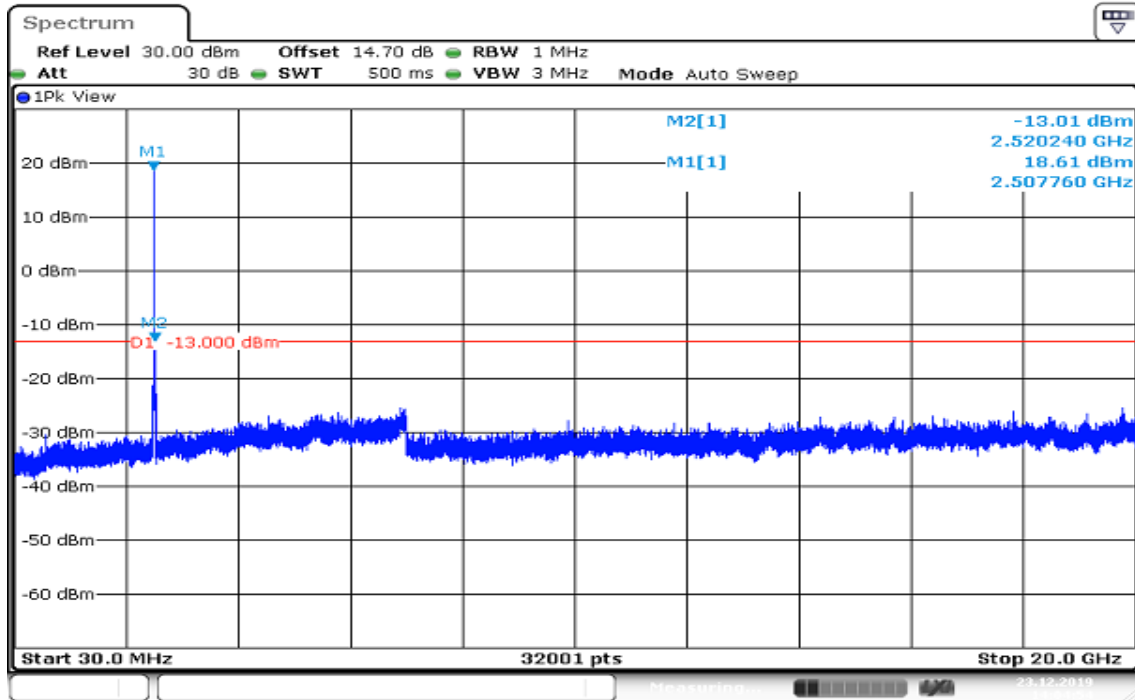

CH Mid

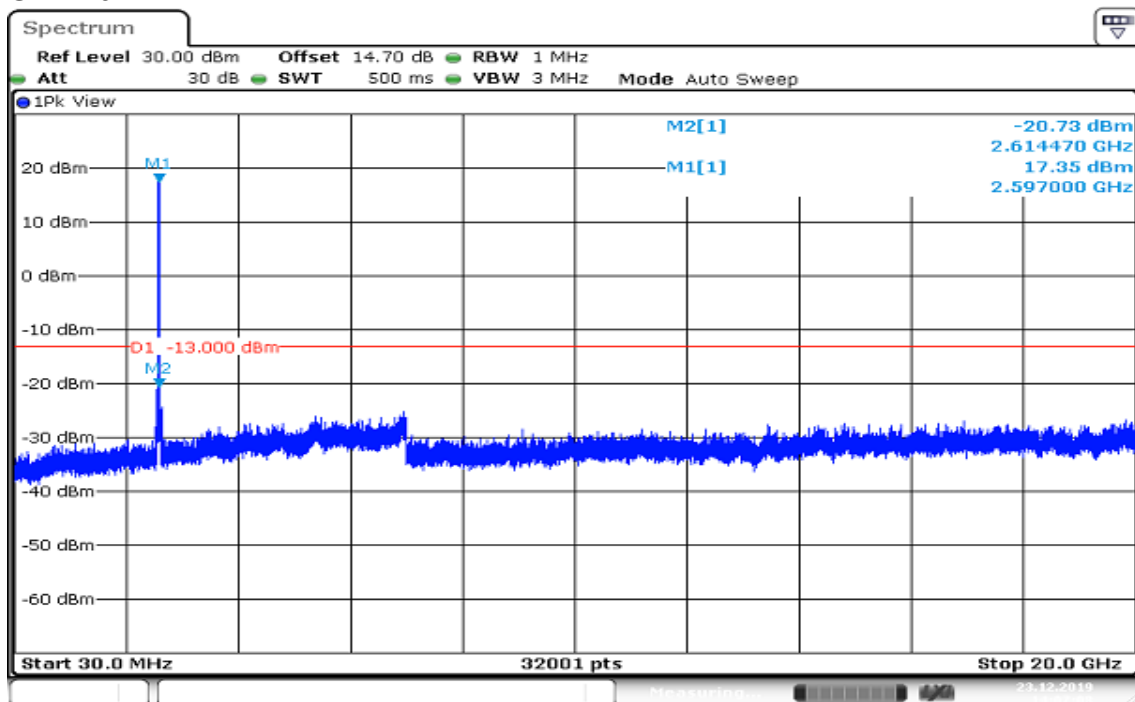

CH High

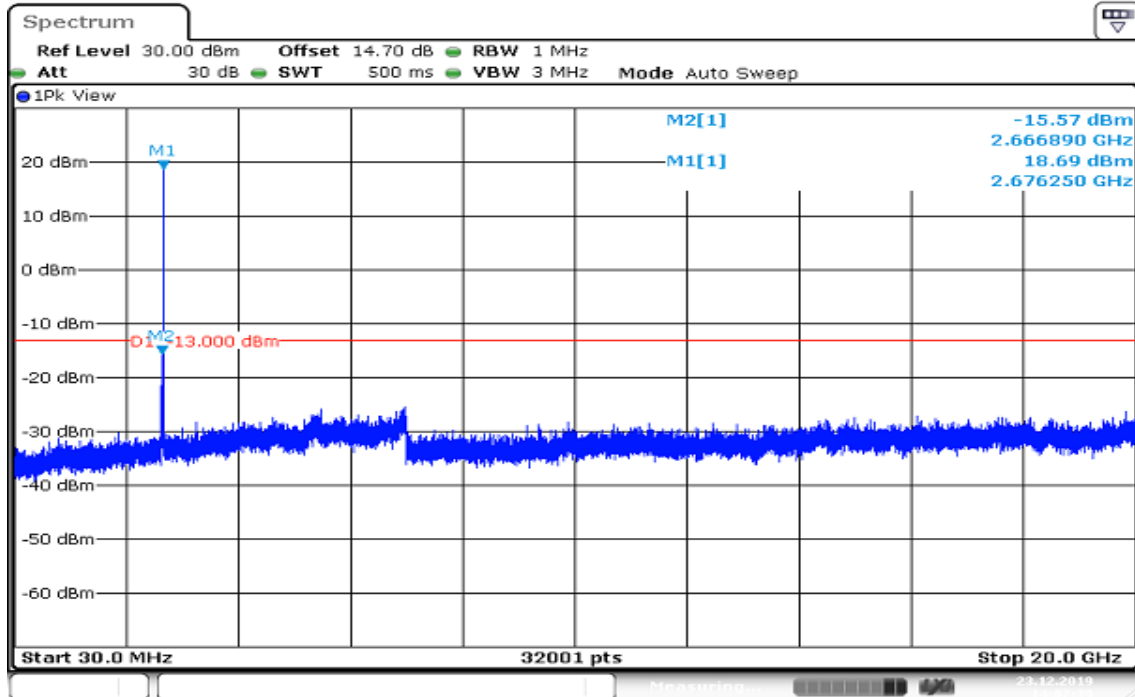


Date: 23.DEC.2019 14:07:39

Report No.: T191120D05-RP9


Page: 64 / 82

Rev.: 03


CHANNEL BANDWIDTH: 20MHz /QPSK / 1RB CH Low

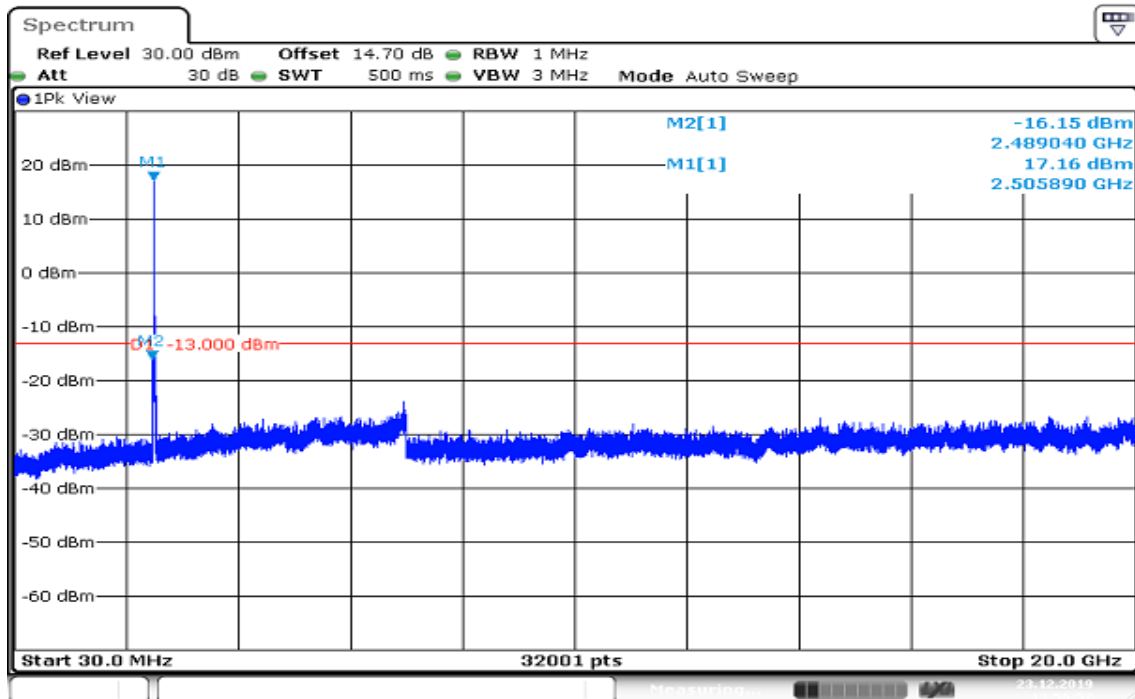

CH Mid

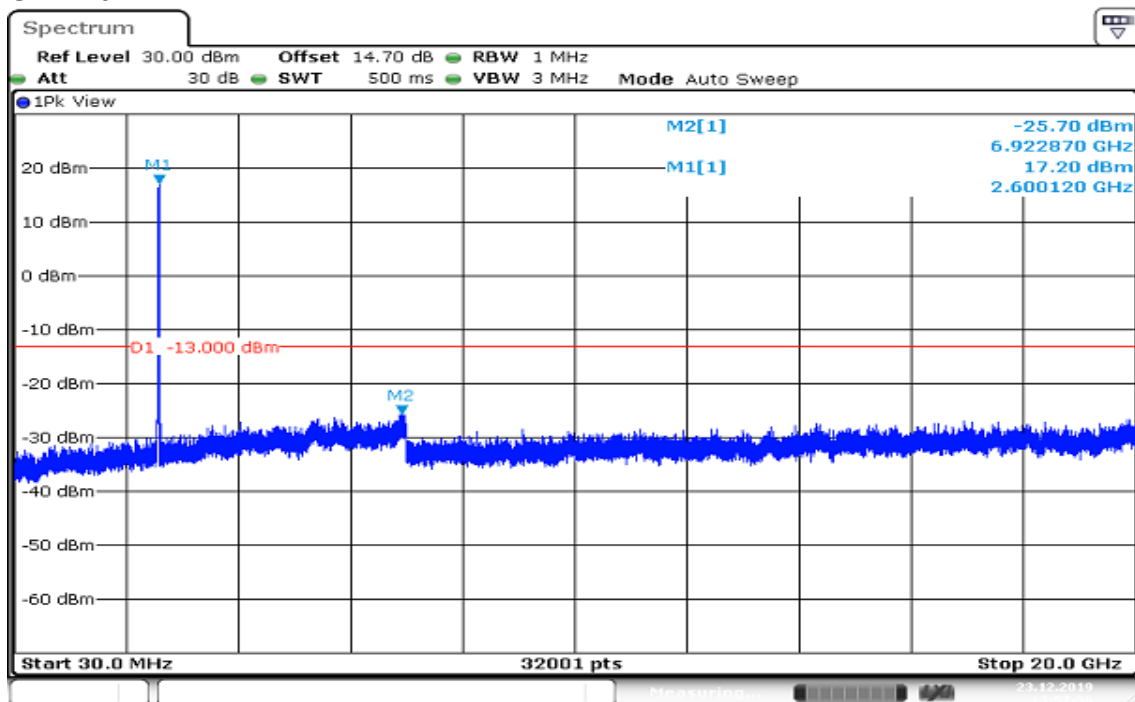


CH High

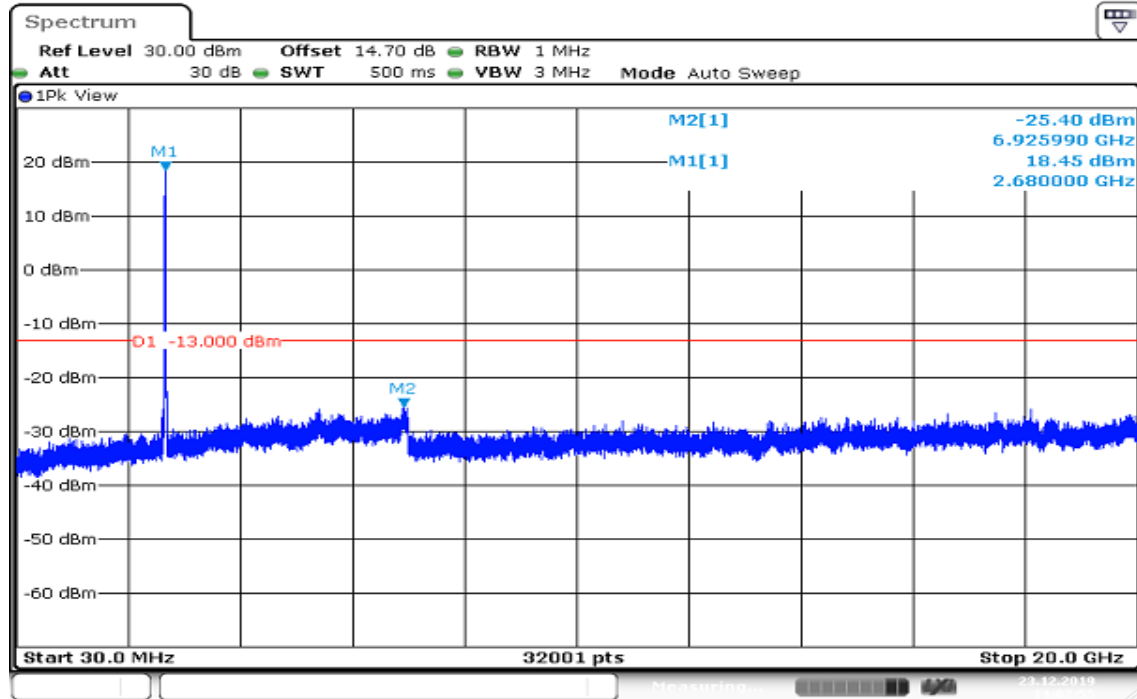


Date: 23.DEC.2019 14:02:55

Report No.: T191120D05-RP9


CHANNEL BANDWIDTH:5MHz /16QAM / 1RB CH Low

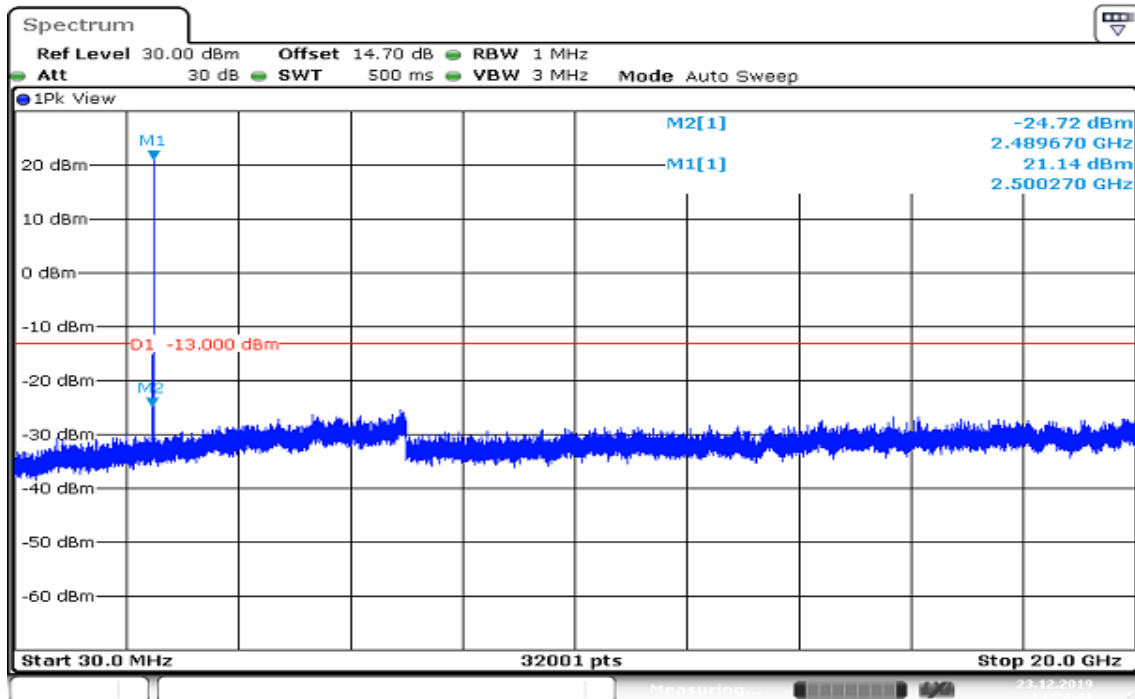

CH Mid

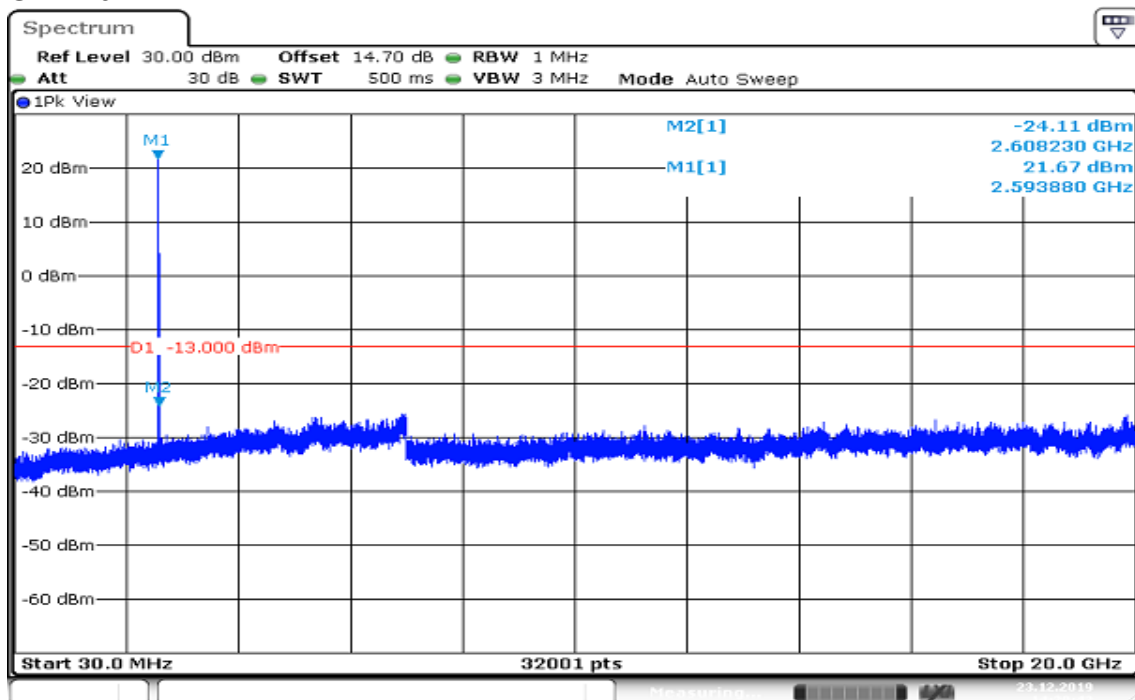


CH High

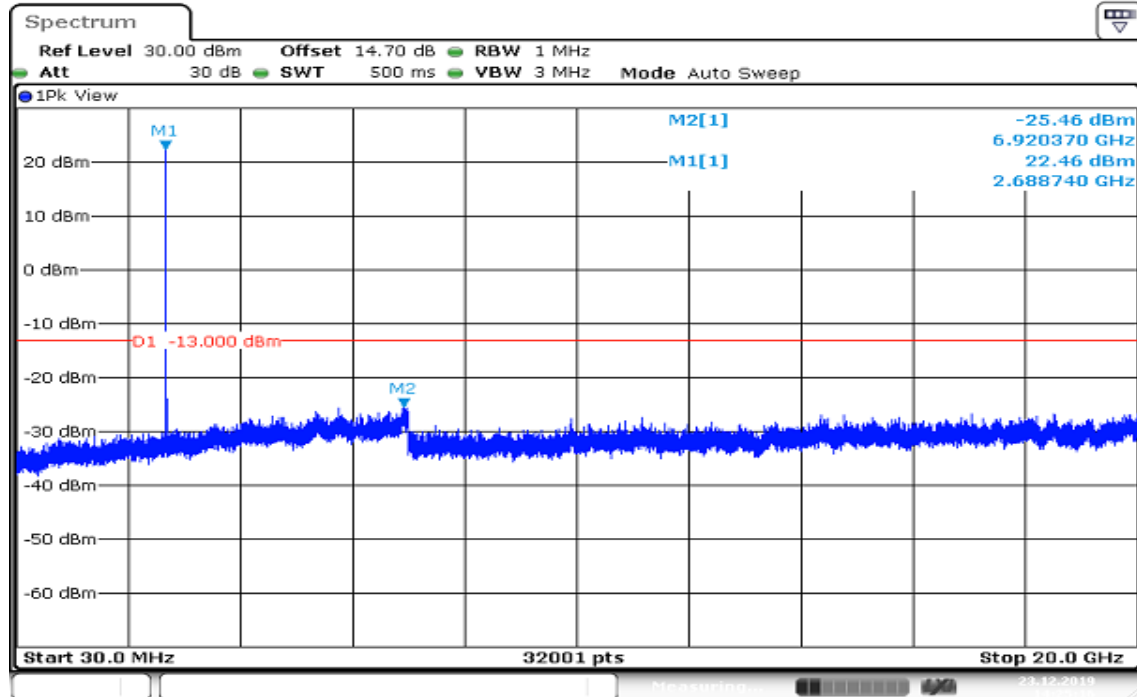

Date: 23.DEC.2019 14:25:16


Report No.: T191120D05-RP9

CHANNEL BANDWIDTH:10MHz /16QAM / 1RB CH Low

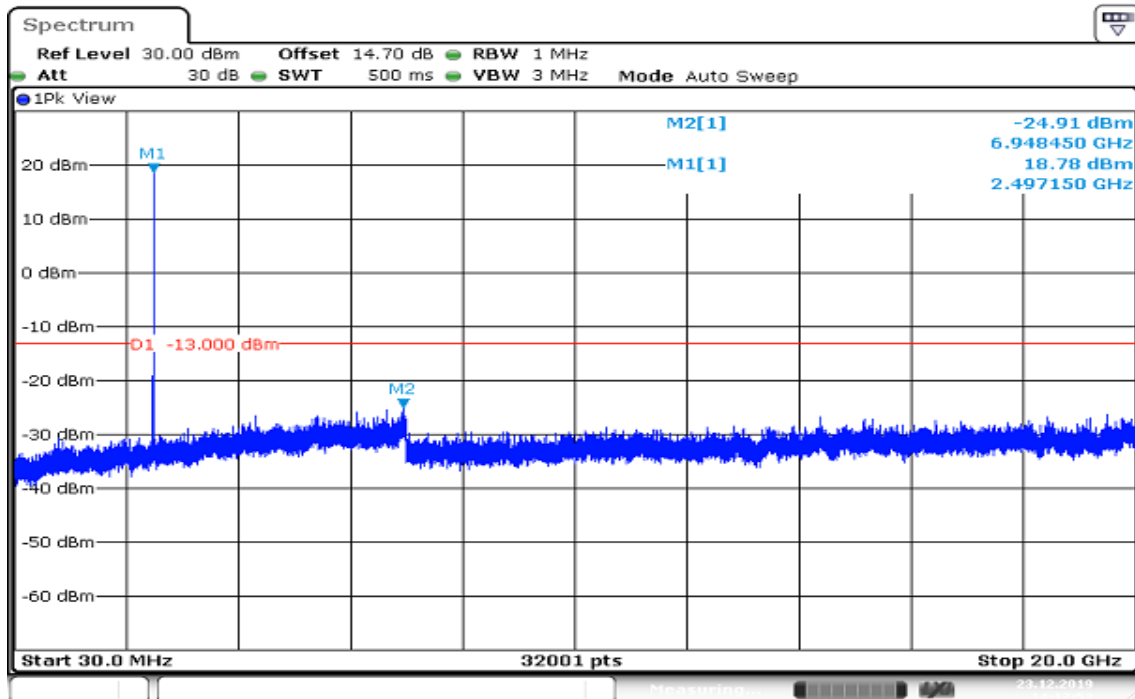


Date: 23.DEC.2019 14:12:54

CH Mid

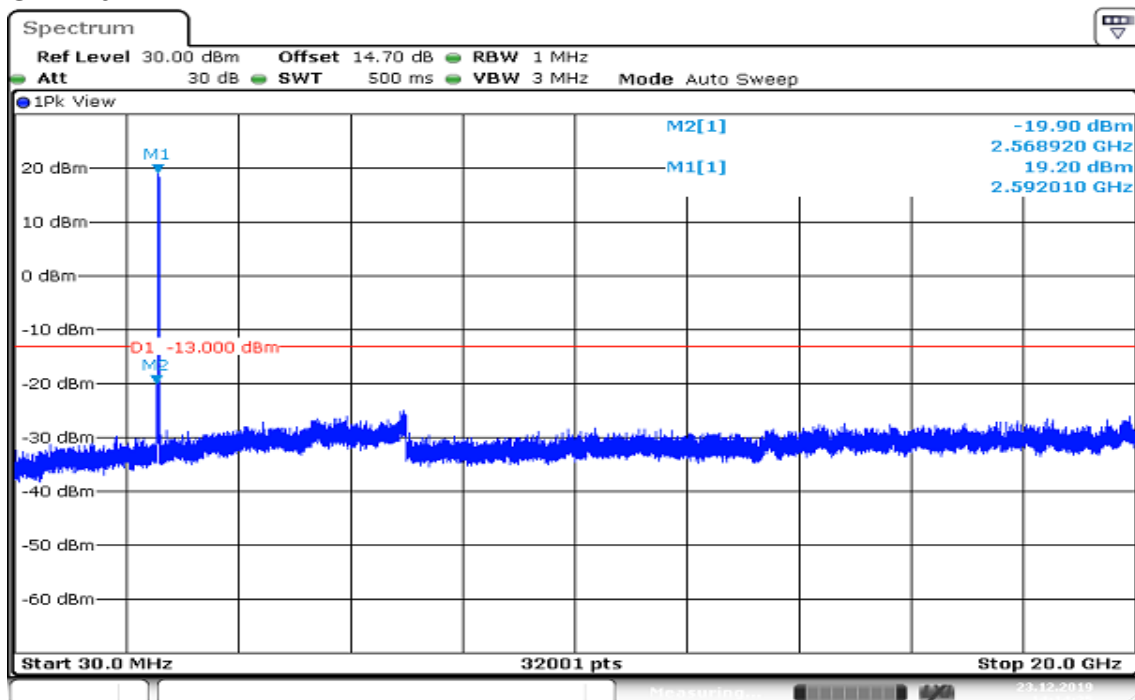


Date: 23.DEC.2019 14:14:25

CH High

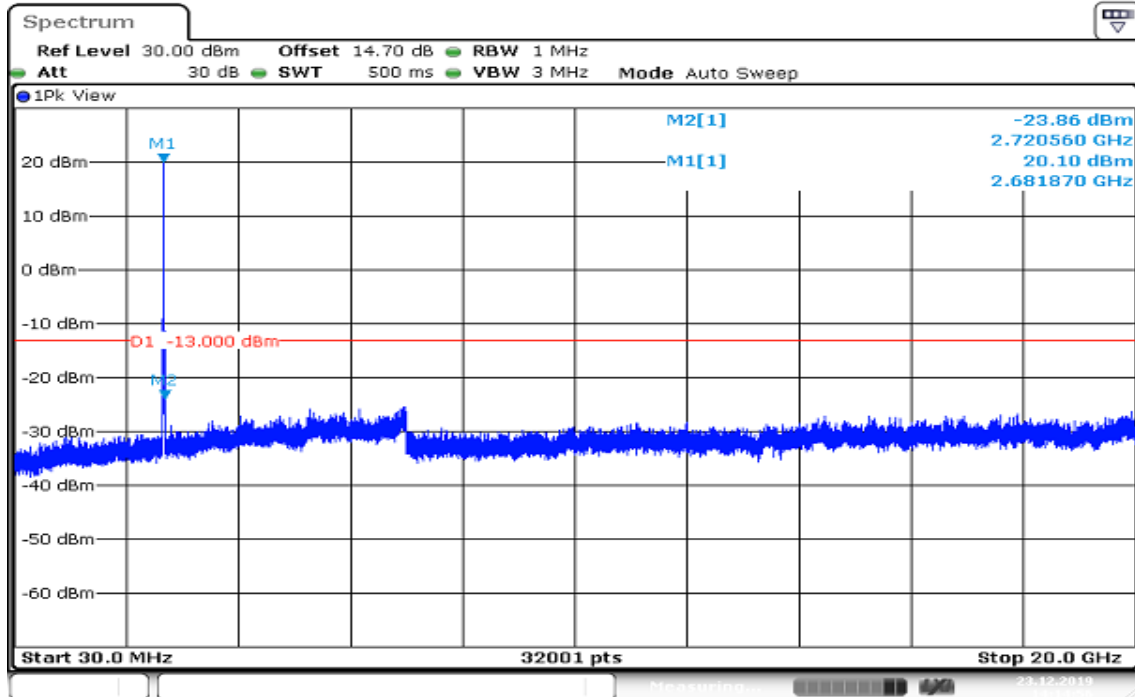


Date: 23.DEC.2019 14:14:56


CHANNEL BANDWIDTH:15MHz /16QAM / 1RB CH Low

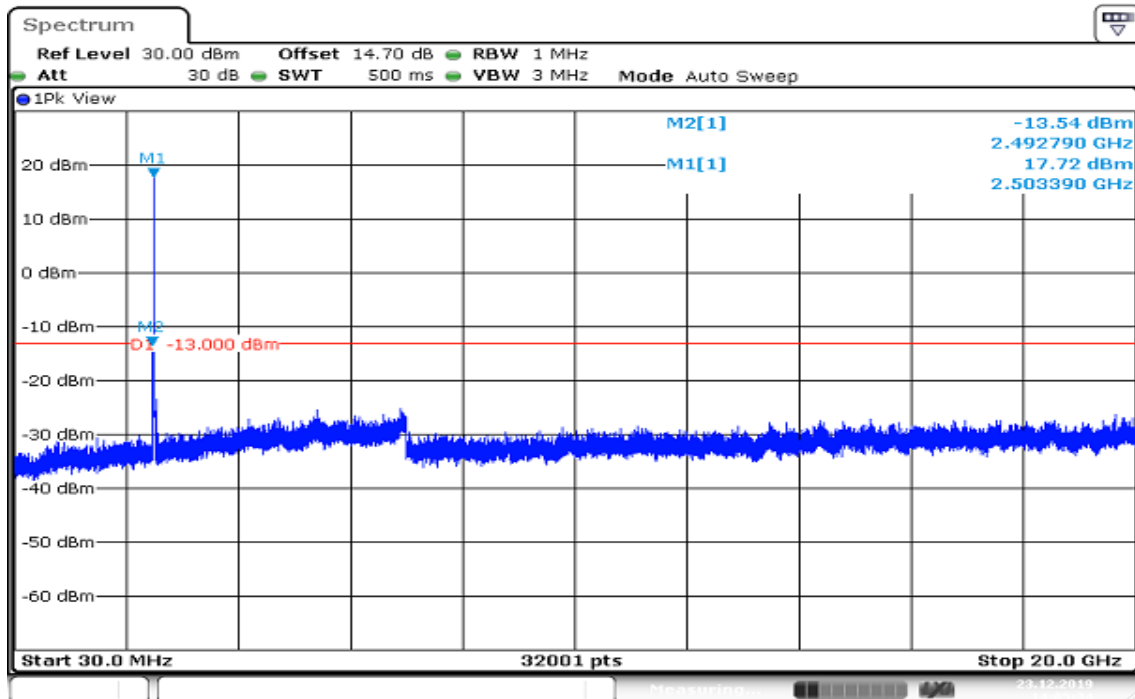

CH Mid

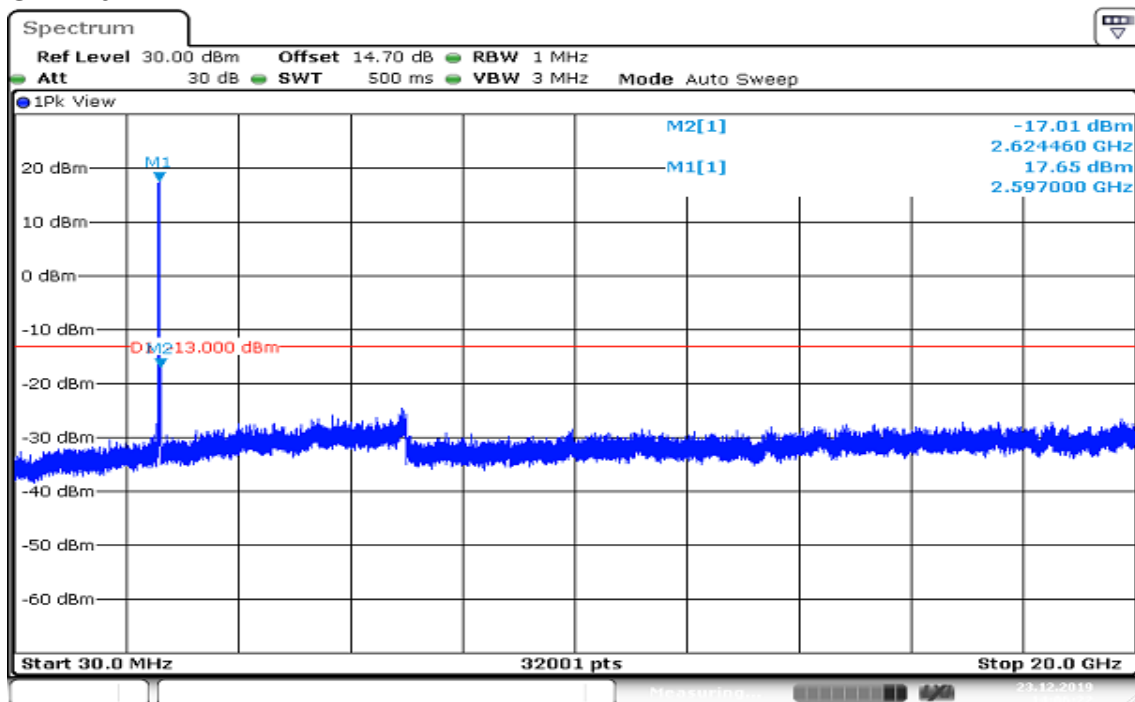

CH High

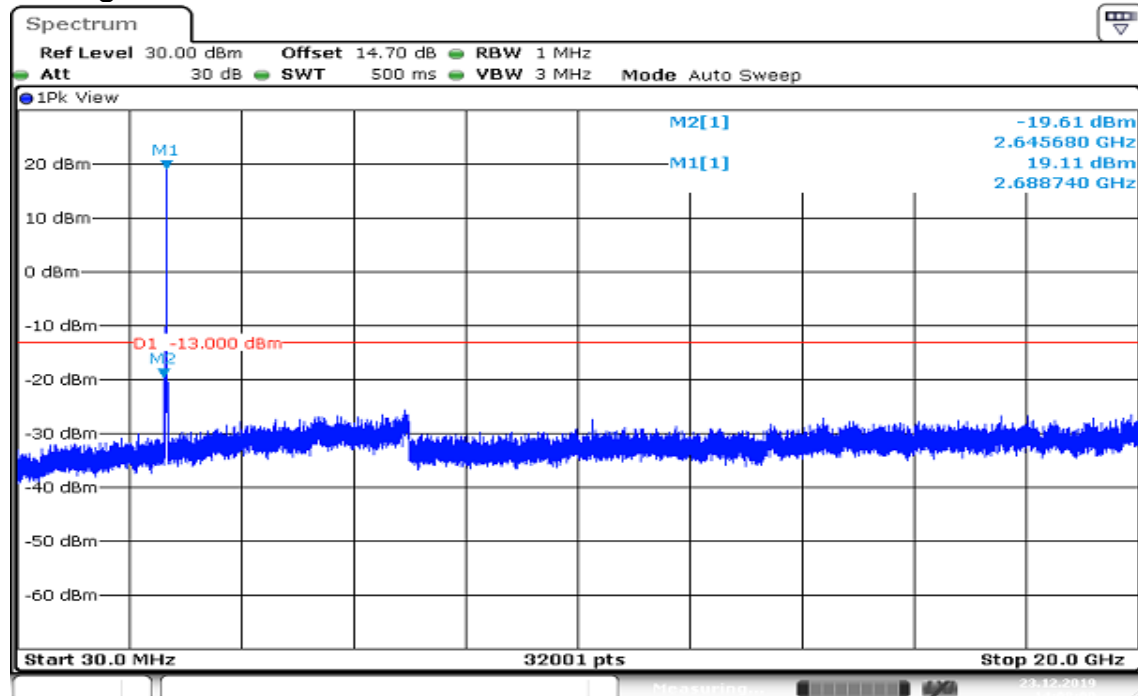


Date: 23.DEC.2019 14:08:00

Report No.: T191120D05-RP9


Page: 72 / 82

Rev.: 03


CHANNEL BANDWIDTH:20MHz /16QAM / 1RB CH Low

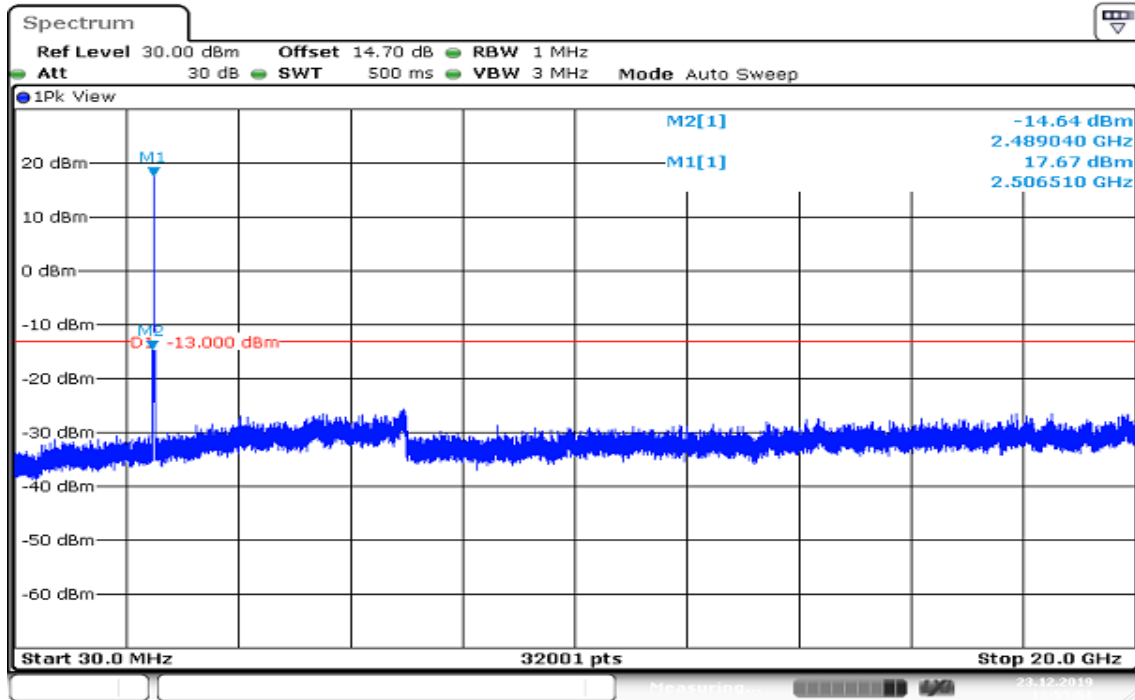

CH Mid

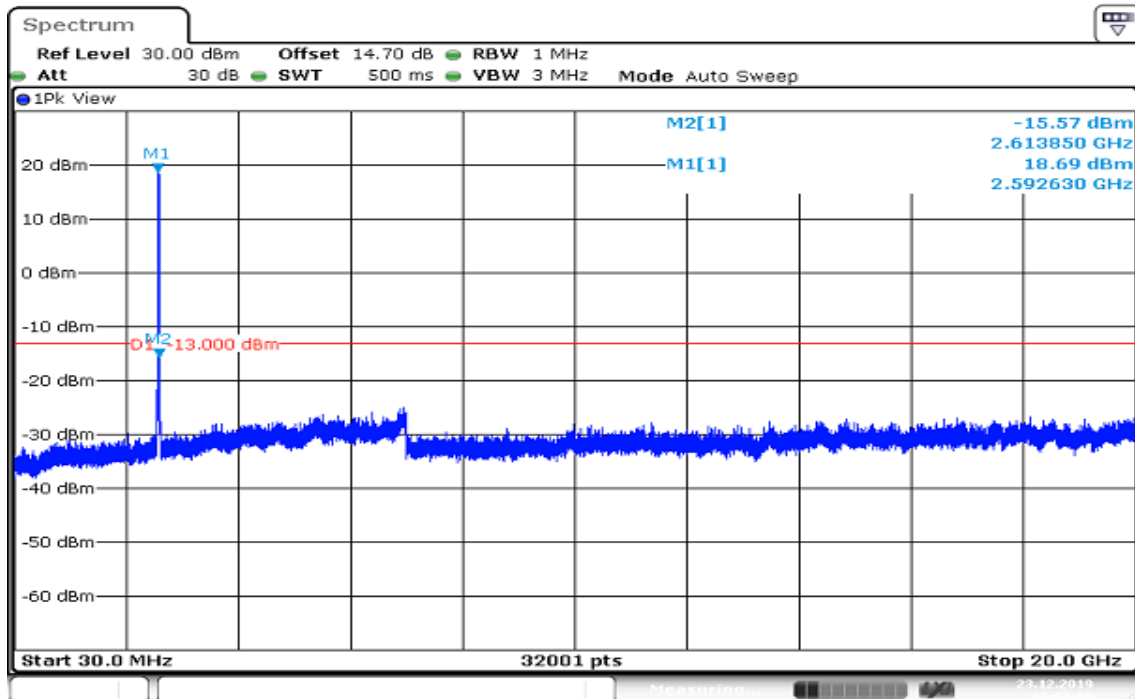

CH High

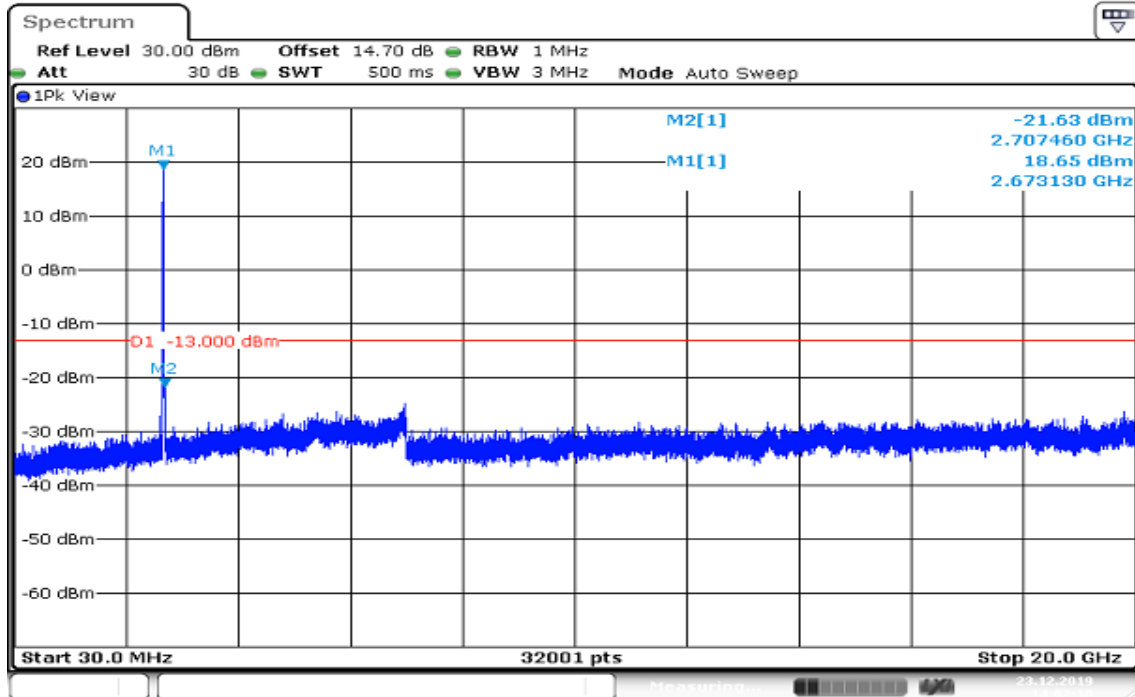

Date: 23.DEC.2019 14:02:11



Report No.: T191120D05-RP9

Page: 74 / 82

Rev.: 03

8.7 RADIATED EMISSION MEASUREMENT

LIMITS

FCC §27.53(h), Band 41

General protection levels. Except as otherwise specified below, for operations in the 1710-1755MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB.

According to RSS-199, Band 41

For mobile subscriber equipment, the power of any unwanted emissions measured as above shall be attenuated (in dB) below the transmitter power, P (dBW), by at least:


- (i) $40 + 10 \log_{10} p$ from the channel edges to 5 MHz away
- (ii) $43 + 10 \log_{10} p$ between 5 MHz and X MHz from the channel edges, and
- (iii) $55 + 10 \log_{10} p$ at X MHz and beyond from the channel edges

In addition, the attenuation shall not be less than $43 + 10 \log_{10} p$ on all frequencies between 2490.5 MHz and 2496 MHz, and $55 + 10 \log_{10} p$ at or below 2490.5 MHz.


p is the transmitter power measured in watts and **X** is 6 MHz or the equipment occupied bandwidth, whichever is greater.

Test Configuration


Below 1 GHz

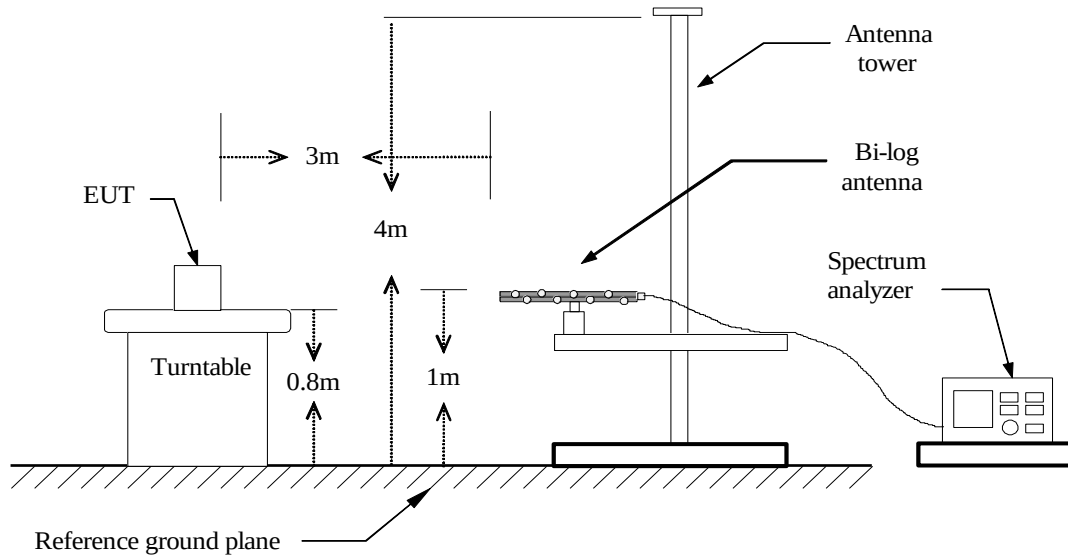

Above 1 GHz

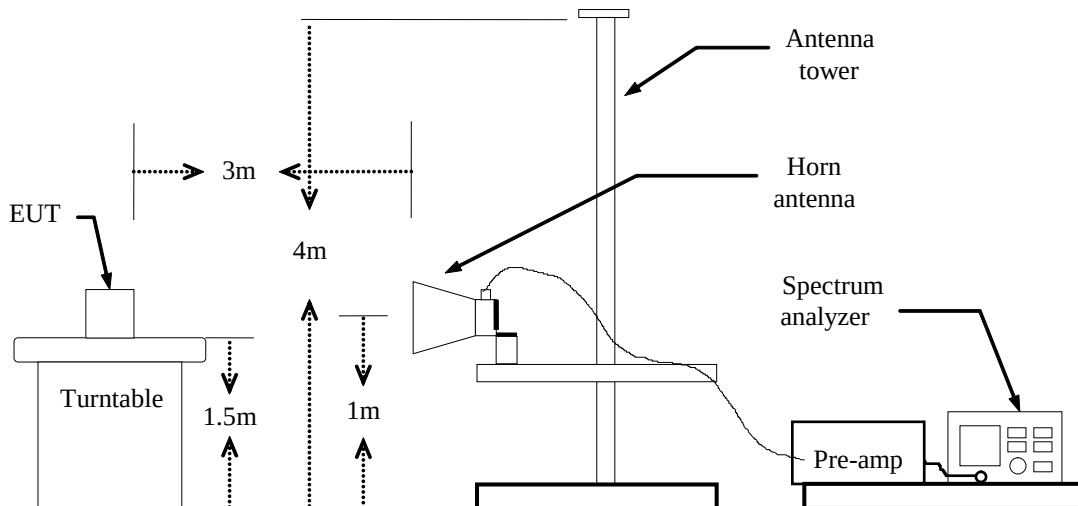

Substituted Method Test Set-up

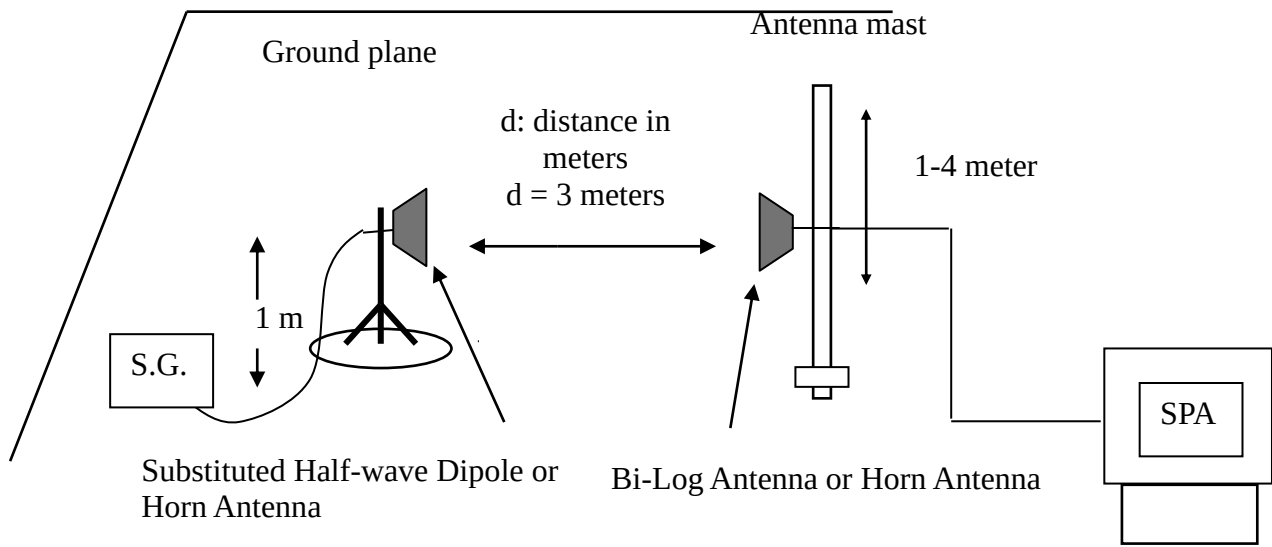

TEST PROCEDURES

1. According to KDB 971168 D01 and TIA-603-E.
2. The EUT was placed on a turntable
 - (1) Below 1G : 0.8m
 - (2) Above 1G : 1.5m
 - (3) EUT set 3m from the receiving antenna
 - (4) The table was rotated 360 degrees of the highest spurious emission to determine the position.
3. Set the spectrum analyzer , RBW=1MHz, VBW=3MHz.
4. A horn antenna was driven by a signal generator.
5. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.



Report No.: T191120D05-RP9

Page: 77 / 82

Rev.: 03

Test Results

LTE Band 41 / BW: 20MHz / QPSK / RB =1, RB Offset = 0

Operation Mode: Tx / Low CH


Test Date: January 8, 2020

Temperature: 18.6°C

Tested by: Jerry Chang

Humidity: 59% RH

Polarity: Ver.

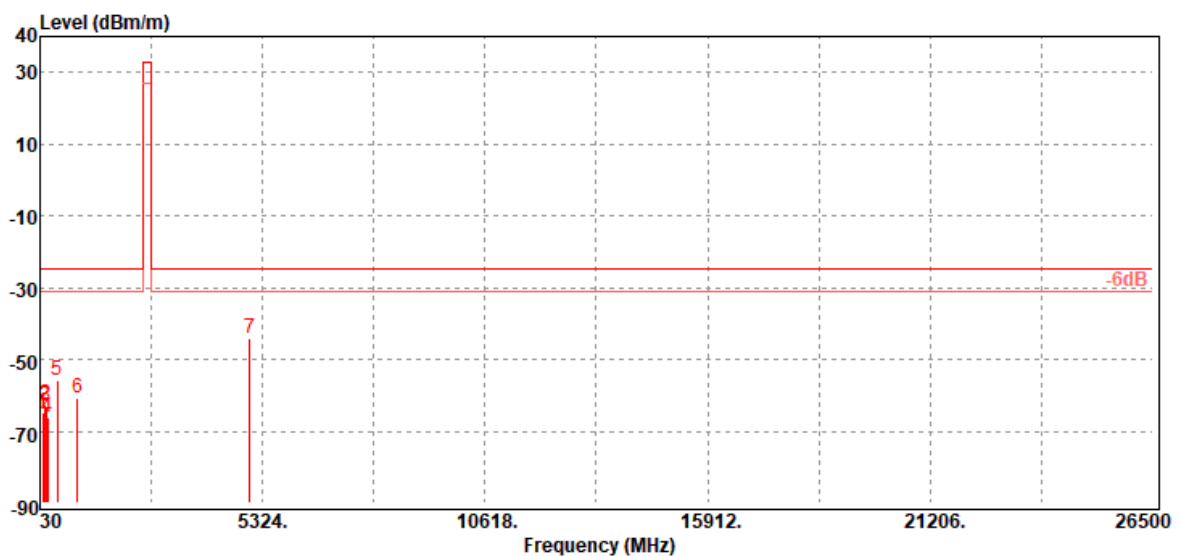

Freq. MHz	ERP/EIRP dBm	SG Output Level dBm	Antenna Gain dBd/dBi	Cable Loss dB	Limit dBm	Margin dB	Antenna Polarization (V/H)
105.66	-64.60	-54.39	-9.37	-0.84	-25.00	-39.60	V
159.01	-62.74	-55.3	-6.40	-1.04	-25.00	-37.74	V
172.59	-62.80	-56.58	-5.14	-1.08	-25.00	-37.80	V
219.15	-66.14	-62.9	-2.02	-1.22	-25.00	-41.14	V
447.10	-55.80	-51.95	-2.10	-1.75	-25.00	-30.80	V
924.34	-60.98	-57.1	-1.30	-2.58	-25.00	-35.98	V
5012.00	-44.17	-50.08	12.48	-6.57	-25.00	-19.17	V



Report No.: T191120D05-RP9

Page: 78 / 82

Rev.: 03

Operation Mode: Tx / Low CH


Test Date: January 8, 2020

Temperature: 18.6°C

Tested by: Jerry Chang

Humidity: 59% RH

Polarity: Hor.

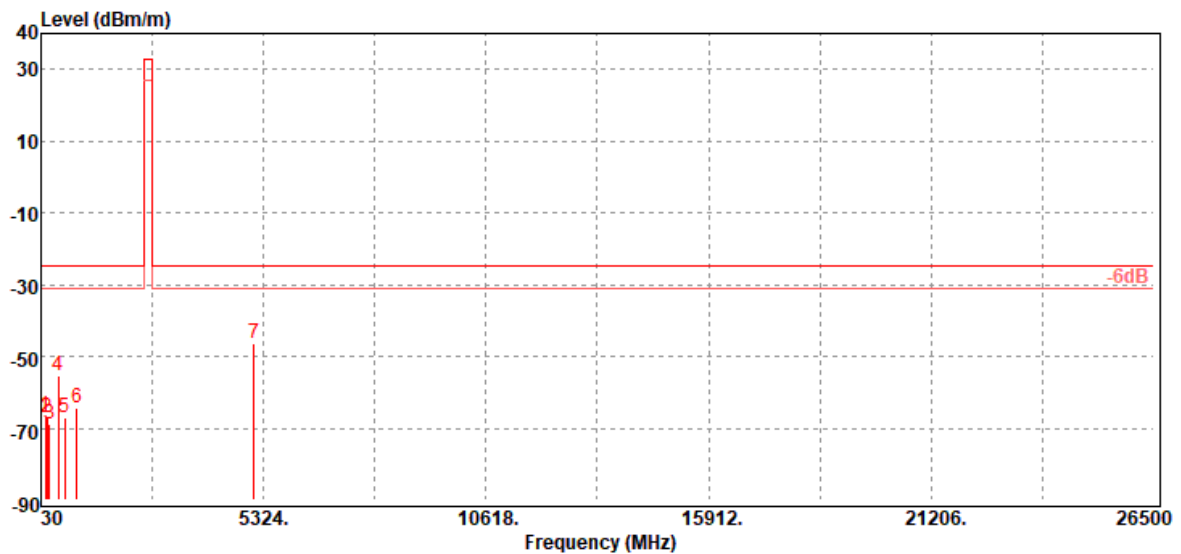

Freq. MHz	ERP/EIRP dBm	SG Output Level dBm	Antenna Gain dBd/dBi	Cable Loss dB	Limit dBm	Margin dB	Antenna Polarization (V/H)
134.76	-66.41	-56.11	-9.35	-0.95	-25.00	-41.41	H
180.35	-67.13	-61.67	-4.36	-1.10	-25.00	-42.13	H
224.00	-68.88	-65.73	-1.92	-1.23	-25.00	-43.88	H
442.25	-55.56	-51.72	-2.10	-1.74	-25.00	-30.56	H
604.24	-67.02	-63.97	-0.98	-2.07	-25.00	-42.02	H
878.75	-64.20	-60.46	-1.23	-2.51	-25.00	-39.20	H
5102.00	-46.44	-52.39	12.60	-6.65	-25.00	-21.44	H



Report No.: T191120D05-RP9

Page: 79 / 82

Rev.: 03

Operation Mode: Tx / Mid CH


Test Date: January 8, 2020

Temperature: 18.6°C

Tested by: Jerry Chang

Humidity: 59% RH

Polarity: Ver.

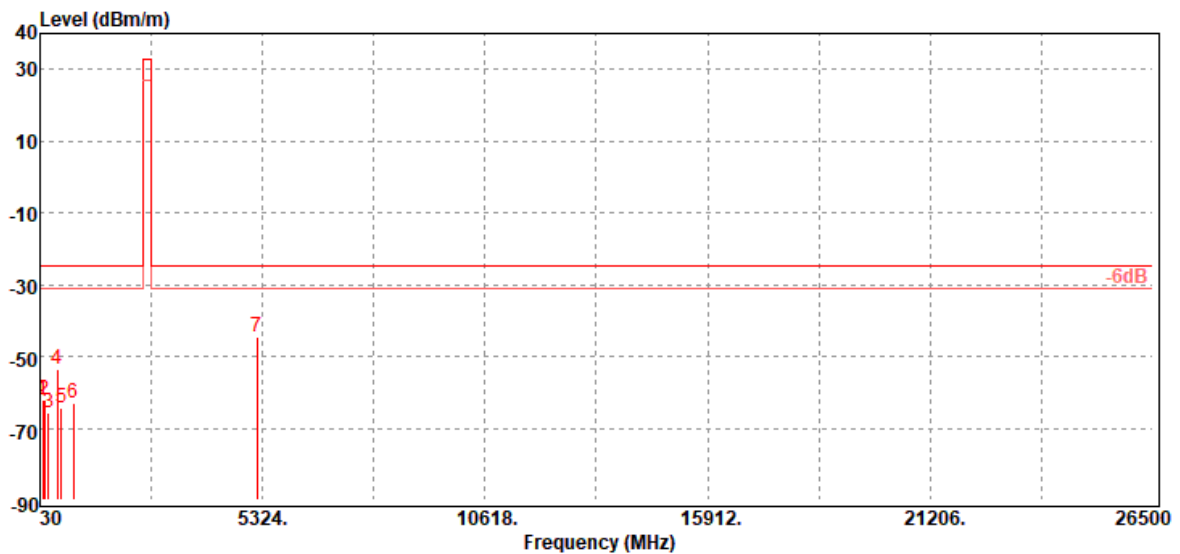

Freq. MHz	ERP/EIRP dBm	SG Output Level dBm	Antenna Gain dBd/dBi	Cable Loss dB	Limit dBm	Margin dB	Antenna Polarization (V/H)
105.66	-62.26	-52.05	-9.37	-0.84	-25.00	-37.26	V
133.79	-62.16	-51.69	-9.52	-0.95	-25.00	-37.16	V
225.94	-65.53	-62.36	-1.94	-1.23	-25.00	-40.53	V
447.10	-53.48	-49.63	-2.10	-1.75	-25.00	-28.48	V
531.49	-64.29	-61.07	-1.30	-1.92	-25.00	-39.29	V
817.64	-62.98	-59.07	-1.51	-2.40	-25.00	-37.98	V
5186.00	-44.53	-50.71	12.92	-6.74	-25.00	-19.53	V



Report No.: T191120D05-RP9

Page: 80 / 82

Rev.: 03

Operation Mode: Tx / Mid CH


Test Date: January 8, 2020

Temperature: 18.6°C

Tested by: Jerry Chang

Humidity: 59% RH

Polarity: Hor.

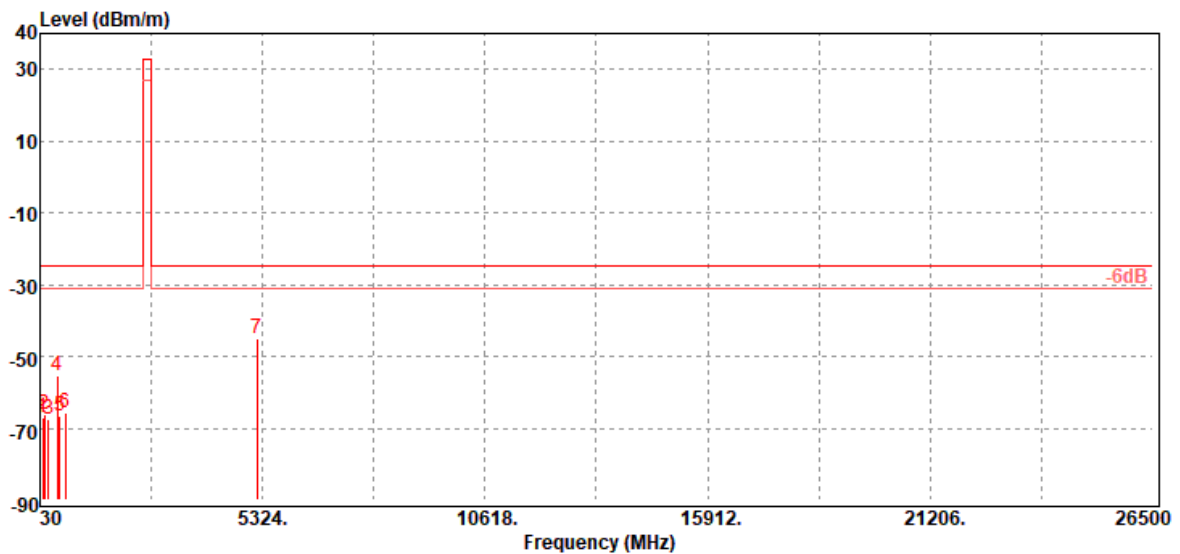

Freq. MHz	ERP/EIRP dBm	SG Output Level dBm	Antenna Gain dBd/dBi	Cable Loss dB	Limit dBm	Margin dB	Antenna Polarization (V/H)
94.99	-67.14	-59.04	-7.30	-0.80	-25.00	-42.14	H
134.76	-66.21	-55.91	-9.35	-0.95	-25.00	-41.21	H
225.94	-67.44	-64.27	-1.94	-1.23	-25.00	-42.44	H
444.19	-55.58	-51.73	-2.10	-1.75	-25.00	-30.58	H
500.45	-66.69	-62.83	-1.99	-1.87	-25.00	-41.69	H
636.25	-65.74	-61.91	-1.70	-2.13	-25.00	-40.74	H
5186.00	-45.07	-51.25	12.92	-6.74	-25.00	-20.07	H



Report No.: T191120D05-RP9

Page: 81 / 82

Rev.: 03

Operation Mode: Tx / High CH


Test Date: January 8, 2020

Temperature: 18.6°C

Tested by: Jerry Chang

Humidity: 59% RH

Polarity: Ver.

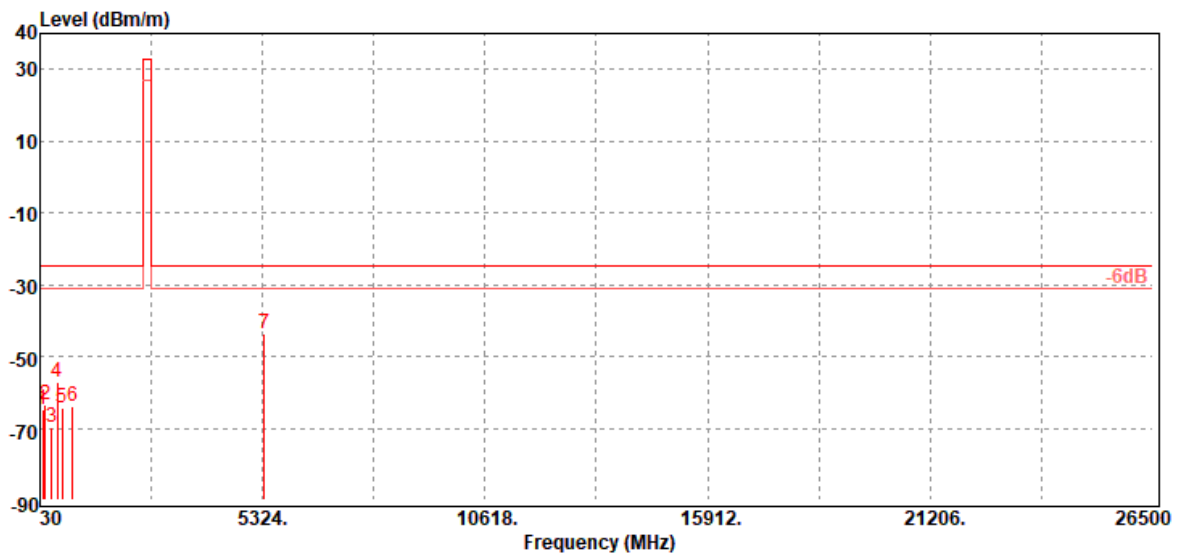

Freq. MHz	ERP/EIRP dBm	SG Output Level dBm	Antenna Gain dBd/dBi	Cable Loss dB	Limit dBm	Margin dB	Antenna Polarization (V/H)
105.66	-64.99	-54.78	-9.37	-0.84	-25.00	-39.99	V
159.01	-63.67	-56.23	-6.40	-1.04	-25.00	-38.67	V
299.66	-69.79	-66.35	-2.01	-1.43	-25.00	-44.79	V
445.16	-56.95	-53.1	-2.10	-1.75	-25.00	-31.95	V
553.80	-64.19	-60.95	-1.28	-1.96	-25.00	-39.19	V
813.76	-63.90	-60.09	-1.42	-2.39	-25.00	-38.90	V
5360.00	-43.68	-50.03	13.26	-6.91	-25.00	-18.68	V

Operation Mode: Tx / High CH


Test Date: January 8, 2020

Temperature: 18.6°C

Tested by: Jerry Chang

Humidity: 59% RH

Polarity: Hor.

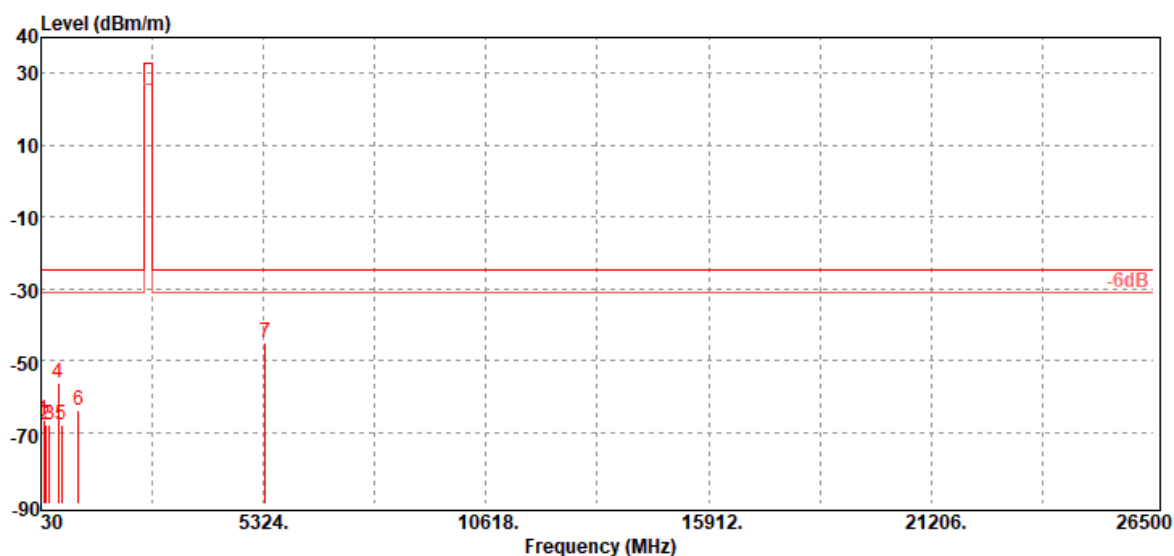

Freq. MHz	ERP/EIRP dBm	SG Output Level dBm	Antenna Gain dBd/dBi	Cable Loss dB	Limit dBm	Margin dB	Antenna Polarization (V/H)
94.99	-66.76	-58.66	-7.30	-0.80	-25.00	-41.76	H
133.79	-68.02	-57.55	-9.52	-0.95	-25.00	-43.02	H
225.94	-68.04	-64.87	-1.94	-1.23	-25.00	-43.04	H
445.16	-56.38	-52.53	-2.10	-1.75	-25.00	-31.38	H
527.61	-67.94	-64.72	-1.30	-1.92	-25.00	-42.94	H
925.31	-63.70	-59.82	-1.30	-2.58	-25.00	-38.70	H
5360.00	-45.03	-51.38	13.26	-6.91	-25.00	-20.03	H

- End of Test Report -