



A D T

# FCC TEST REPORT (15.407)

**REPORT NO.:** RF120328C07E-1  
**MODEL NO.:** RNX-N600UB  
**FCC ID:** W6RRNX-N600UB  
**RECEIVED:** Apr. 2, 2014  
**TESTED:** Apr. 17 ~ Jun. 13, 2014  
**ISSUED:** Jun. 19, 2014

**APPLICANT:** Rosewill Inc.

**ADDRESS:** 17708 Rowland Street, City of Industry, CA  
91748, USA

**ISSUED BY:** Bureau Veritas Consumer Products Services  
(H.K.) Ltd., Taoyuan Branch

**LAB ADDRESS:** No. 47, 14th Ling, Chia Pau Vil., Lin Kou Dist.,  
New Taipei City, Taiwan, R.O.C.

This report should not be used by the client to claim  
product certification, approval, or endorsement by  
TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.



## TABLE OF CONTENTS

RELEASE CONTROL RECORD .....	4
1. CERTIFICATION .....	5
2. SUMMARY OF TEST RESULTS .....	6
2.1 MEASUREMENT UNCERTAINTY .....	6
3. GENERAL INFORMATION .....	7
3.1 GENERAL DESCRIPTION OF EUT .....	7
3.2 DESCRIPTION OF TEST MODES .....	9
3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL .....	10
3.3 DUTY CYCLE OF TEST SIGNAL .....	12
3.4 DESCRIPTION OF SUPPORT UNITS .....	15
3.4.1 CONFIGURATION OF SYSTEM UNDER TEST .....	15
3.5 GENERAL DESCRIPTION OF APPLIED STANDARDS .....	16
4. TEST TYPES AND RESULTS .....	17
4.1 RADIATED EMISSION AND BANDEdge MEASUREMENT .....	17
4.1.1 LIMITS OF RADIATED EMISSION AND BANDEdge MEASUREMENT .....	17
4.1.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS .....	17
4.1.3 TEST INSTRUMENTS .....	18
4.1.4 TEST PROCEDURES .....	19
4.1.5 DEVIATION FROM TEST STANDARD .....	19
4.1.6 TEST SETUP .....	20
4.1.7 EUT OPERATING CONDITION .....	20
4.1.8 TEST RESULTS .....	21
4.2 CONDUCTED EMISSION MEASUREMENT .....	30
4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT .....	30
4.2.2 TEST INSTRUMENTS .....	30
4.2.3 TEST PROCEDURES .....	31
4.2.4 DEVIATION FROM TEST STANDARD .....	31
4.2.5 TEST SETUP .....	31
4.2.6 EUT OPERATING CONDITIONS .....	31
4.2.7 TEST RESULTS .....	32
4.3 PEAK TRANSMIT POWER MEASUREMENT .....	34
4.3.1 LIMITS OF PEAK TRANSMIT POWER MEASUREMENT .....	34
4.3.2 TEST SETUP .....	34
4.3.3 TEST INSTRUMENTS .....	35
4.3.4 TEST PROCEDURE .....	35
4.3.5 DEVIATION FROM TEST STANDARD .....	35
4.3.6 EUT OPERATING CONDITIONS .....	35
4.3.7 TEST RESULTS .....	36
4.4 PEAK POWER SPECTRAL DENSITY MEASUREMENT .....	39
4.4.1 LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT .....	39
4.4.2 TEST SETUP .....	39
4.4.3 TEST INSTRUMENTS .....	39



A D T

4.4.4 TEST PROCEDURES.....	39
4.4.5 DEVIATION FROM TEST STANDARD .....	39
4.4.6 EUT OPERATING CONDITIONS.....	39
4.4.7 TEST RESULTS.....	40
4.5 PEAK POWER EXCURSION MEASUREMENT .....	42
4.5.1 LIMITS OF PEAK POWER EXCURSION MEASUREMENT .....	42
4.5.2 TEST SETUP .....	42
4.5.3 TEST INSTRUMENTS .....	42
4.5.4 TEST PROCEDURE .....	42
4.5.5 DEVIATION FROM TEST STANDARD .....	42
4.5.6 EUT OPERATING CONDITIONS.....	42
4.5.7 TEST RESULTS.....	43
4.6 FREQUENCY STABILITY .....	44
4.6.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT.....	44
4.6.2 TEST SETUP .....	44
4.6.3 TEST INSTRUMENTS .....	44
4.6.4 TEST PROCEDURE .....	45
4.6.5 DEVIATION FROM TEST STANDARD .....	45
4.6.6 EUT OPERATING CONDITION .....	45
4.6.7 TEST RESULTS.....	46
4.7 20dBc BANDWIDTH MEASUREMENT .....	47
4.7.1 LIMITS OF 20dBc BANDWIDTH MEASUREMENT .....	47
4.7.2 TEST SETUP .....	47
4.7.3 TEST INSTRUMENTS .....	47
4.7.4 TEST PROCEDURE .....	47
4.7.5 TEST RESULTS.....	48
5. PHOTOGRAPHS OF THE TEST CONFIGURATION .....	51
6. INFORMATION ON THE TESTING LABORATORIES.....	52
7. APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB .....	53



A D T

## RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF120328C07E-1	Original release	Jun. 19, 2014



A D T

## 1. CERTIFICATION

**PRODUCT:** Wireless Dual Band USB Adapter

**BRAND:** Newegg

**MODEL:** RNX-N600UB

**APPLICANT:** Rosewill Inc.

**TESTED:** Apr. 17 ~ Jun. 13, 2014

**TEST SAMPLE:** PROTOTYPE

**STANDARDS:** FCC Part 15, Subpart E (Section 15.407)

ANSI C63.10-2009

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**PREPARED BY :** Annie Chang , **DATE:** Jun. 19, 2014  
( Annie Chang / Supervisor )

**APPROVED BY :** Rex. Lai , **DATE:** Jun. 19, 2014  
( Rex Lai / Assistant Manager )



A D T

## 2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART E (SECTION 15.407)			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
15.407(b)(6)	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -10.40dB at 0.50938MHz.
15.407(b/1/2/3) (b)(6)	Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -0.2dB at 5150.00MHz.
15.407(a/1/2)	Max Average Transmit Power	PASS	Meet the requirement of limit.
15.407(a)(6)	Peak Power Excursion	PASS	Meet the requirement of limit.
15.407(a/1/2)	Peak Power Spectral Density	PASS	Meet the requirement of limit.
15.407(g)	Frequency Stability	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used.
15.215	20dBc Bandwidth	PASS	Meet the requirement of limit.

### 2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Uncertainty
Conducted emissions	150kHz~30MHz	3.43 dB
Radiated emissions	30MHz ~ 1GHz	4.00 dB
	Above 1GHz	3.36 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .



A D T

### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

<b>EUT</b>	Wireless Dual Band USB Adapter
<b>MODEL NO.</b>	RNX-N600UB
<b>POWER SUPPLY</b>	5Vdc from host equipment
<b>MODULATION TYPE</b>	64QAM, 16QAM, QPSK, BPSK 256QAM for OFDM in 11ac mode only
<b>MODULATION TECHNOLOGY</b>	OFDM
<b>TRANSFER RATE</b>	802.11a: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps 802.11n: up to 300Mbps
<b>OPERATING FREQUENCY</b>	5180.0 ~ 5240.0MHz
<b>NUMBER OF CHANNEL</b>	4 for 802.11a, 802.11n (20MHz) 2 for 802.11n (40MHz)
<b>OUTPUT POWER</b>	43.0mW
<b>ANTENNA TYPE</b>	Printed antenna with 0dBi gain
<b>ANTENNA CONNECTOR</b>	N/A
<b>DATA CABLE</b>	N/A
<b>I/O PORTS</b>	Refer to user's manual
<b>ACCESSORY DEVICES</b>	N/A

**NOTE:**

1. The frequency bands used in this EUT are listed as follows:

Frequency Band (MHz)	2412~2462	5180~5240	5745~5825
802.11b	✓		
802.11g	✓		
802.11a		✓	✓
802.11n (20MHz)	✓	✓	✓
802.11n (40MHz)	✓	✓	✓

2. The EUT incorporates a MIMO function. Physically, the EUT provides two completed transmitters and two receivers.

MODULATION MODE	TX FUNCTION
802.11b	2TX
802.11g	2TX
802.11a	2TX
802.11n (20MHz)	2TX
802.11n (40MHz)	2TX



A D T

3. The EUT had been pre-tested with Horizontal & Vertical condition. The worst case was found when tested under Horizontal condition, therefore only its test data was recorded in this report.
  
4. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.



A D T

### 3.2 DESCRIPTION OF TEST MODES

4 channels are provided for 802.11a, 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
36	5180MHz	44	5220MHz
40	5200MHz	48	5240MHz

2 channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
38	5190MHz	46	5230MHz



A D T

### 3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE $\geq$ 1G	RE $<$ 1G	PLC	APCM	
-	✓	✓	✓	✓	-

Where

RE $\geq$ 1G: Radiated Emission above 1GHzRE $<$ 1G: Radiated Emission below 1GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

**NOTE:** The EUT had been pre-tested on the positioned of x & y axis. The worst case was found when positioned on X-plane.

#### RADIATED EMISSION TEST (ABOVE 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11a	36 to 48	36, 40, 48	OFDM	BPSK	6
-	802.11n (20MHz)	36 to 48	36, 40, 48	OFDM	BPSK	13
-	802.11n (40MHz)	38 to 46	38, 46	OFDM	BPSK	27

#### RADIATED EMISSION TEST (BELOW 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11n (20MHz)	36 to 48	48	OFDM	BPSK	13

#### POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11n (20MHz)	36 to 48	48	OFDM	BPSK	13



A D T

**ANTENNA PORT CONDUCTED MEASUREMENT:**

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11a	36 to 48	36, 40, 48	OFDM	BPSK	6
-	802.11n (20MHz)	36 to 48	36, 40, 48	OFDM	BPSK	13
-	802.11n (40MHz)	38 to 46	38, 46	OFDM	BPSK	27


**TEST CONDITION:**

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER (SYSTEM)	TESTED BY
<b>RE≥1G</b>	21deg. C, 71%RH	120Vac, 60Hz	Joey Liu
<b>RE&lt;1G</b>	21deg. C, 71%RH	120Vac, 60Hz	Joey Liu
<b>PLC</b>	20deg. C, 73% RH	120Vac, 60Hz	Aaron You
<b>APCM</b>	25deg. C, 60%RH	120Vac, 60Hz	Saxon Lee

### 3.3 DUTY CYCLE OF TEST SIGNAL

Duty cycle of test signal is 100 %

802.11a:

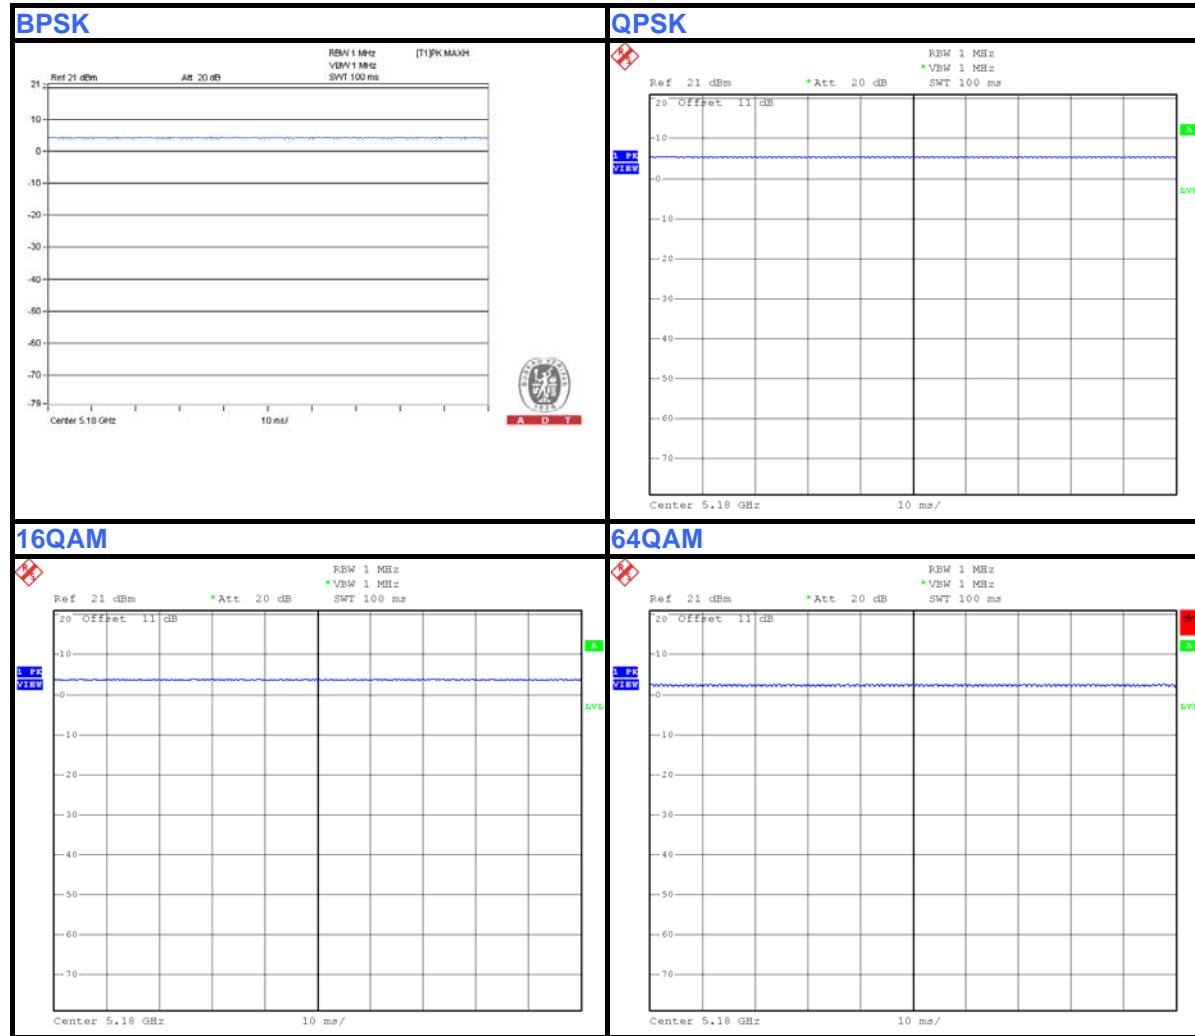





A D T

### 802.11n (20MHz)


#### BPSK

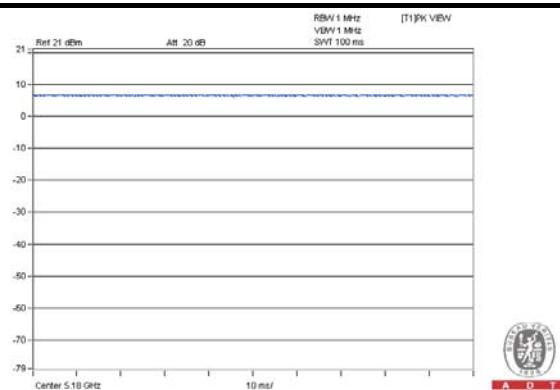


#### QPSK




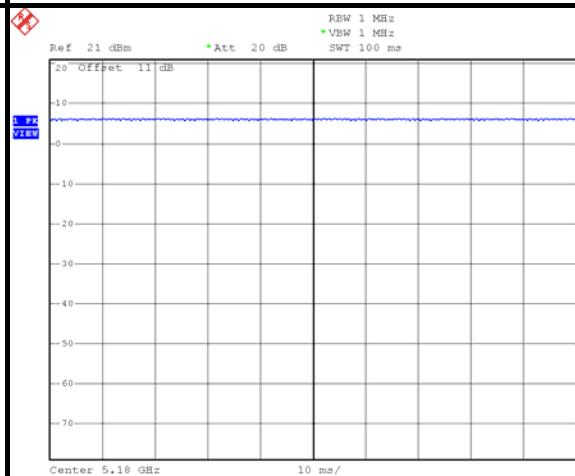


#### 16QAM

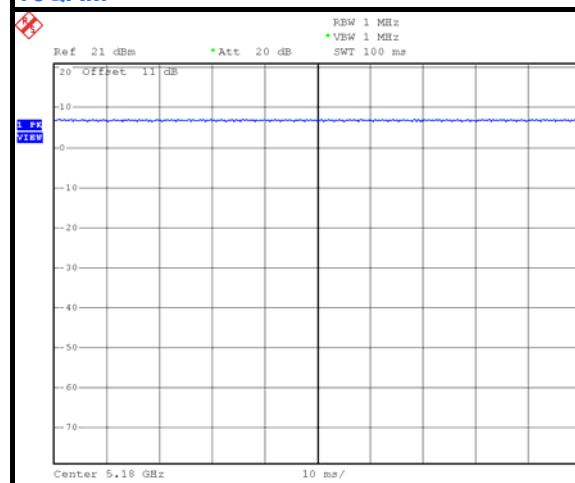

#### 64QAM

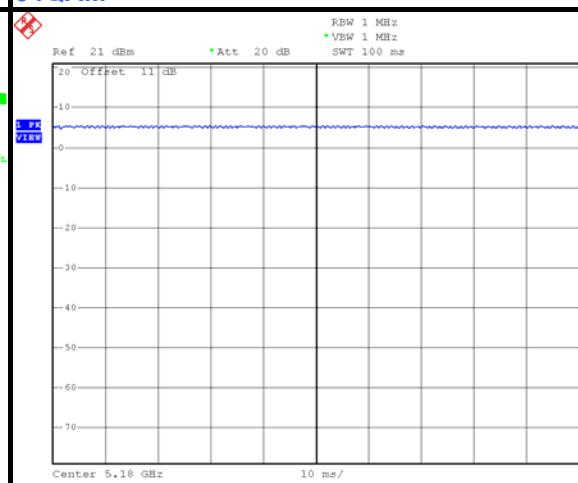

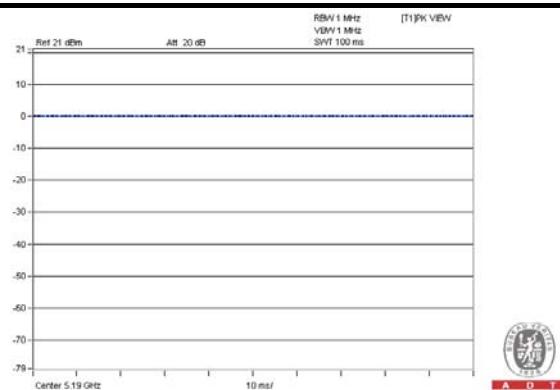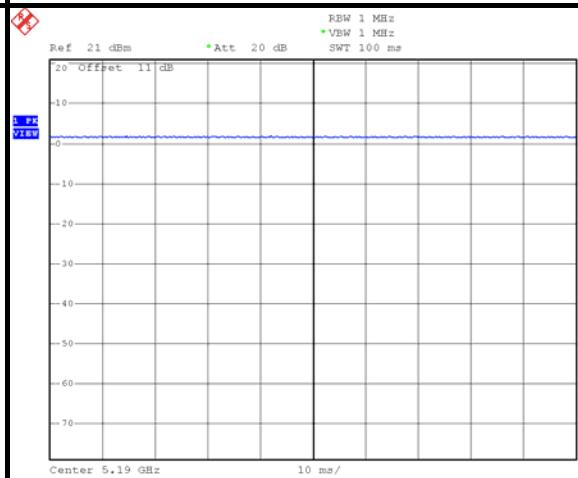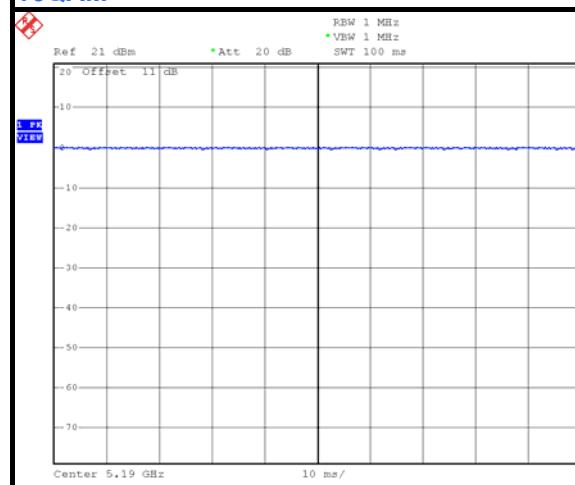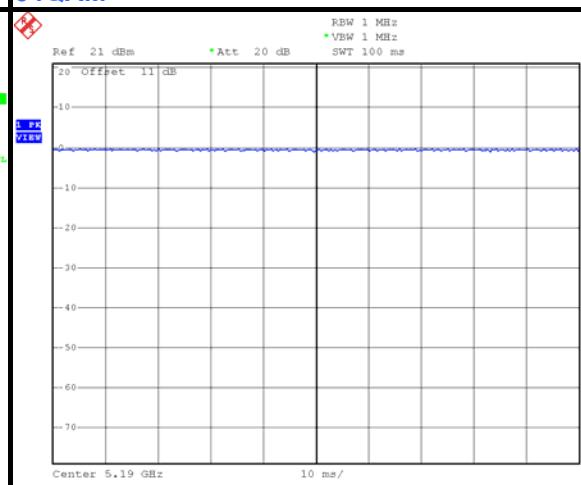**802.11n (40MHz):**
**BPSK**

**QPSK**

**16QAM**

**64QAM**




### 3.4 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Notebook	DELL	E5410	BW33YM1	FCC DoC Approved

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	N/A

**NOTE:** All power cords of the above support units are non shielded (1.8m).

#### 3.4.1 CONFIGURATION OF SYSTEM UNDER TEST

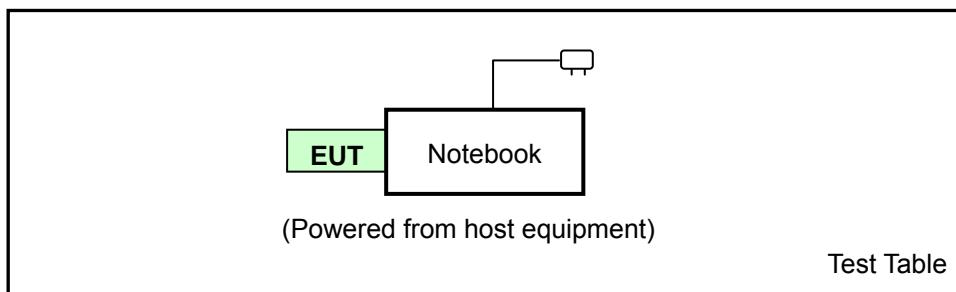



A D T

### 3.5 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart E (15.407)**

**789033 D01 General UNII Test Procedures Old Rules v01r04**

**662911 D01 Multiple Transmitter Output v02r01**

**ANSI C63.10-2009**

All test items have been performed and recorded as per the above standards.

**NOTE:** The product has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



A D T

## 4. TEST TYPES AND RESULTS

### 4.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT

#### 4.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB<sub>u</sub>V/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

#### 4.1.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

APPLICABLE TO	LIMIT	
	FIELD STRENGTH AT 3m (dB <sub>u</sub> V/m)	
PK	AV	
74	54	
√	EIRP LIMIT (dBm)	EQUIVALENT FIELD STRENGTH AT 3m (dB <sub>u</sub> V/m)
	PK	PK
	-27	68.3

**NOTE:** The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m}, \text{ where } P \text{ is the eirp (Watts).}$$



A D T

#### 4.1.3 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
HP Preamplifier	8447D	2432A03504	Feb. 26, 2014	Feb. 25, 2015
HP Preamplifier	8449B	3008A01201	Feb. 26, 2014	Feb. 25, 2015
Agilent TEST RECEIVER	N9038A	MY51210129	Jan. 18, 2014	Jan. 17, 2015
Schwarzbeck Antenna	VULB 9168	139	Feb. 24, 2014	Feb. 23, 2015
Schwarzbeck Antenna	VHBA 9123	480	May 29, 2013	May 28, 2015
ADT. Turn Table	TT100	0306	NA	NA
ADT. Tower	AT100	0306	NA	NA
Software	ADT_Radiated_V 7.6.15.9.4	NA	NA	NA
SUHNER RF cable	SF102	CABLE-CH6	Aug. 16, 2013	Aug. 15, 2014
EMCO Horn Antenna	3115	00028257	Sep. 27, 2013	Sep. 26, 2014
Highpass filter Wainwright Instruments	WHK 3.1/18G-10SS	SN 8	NA	NA
ROHDE & SCHWARZ Spectrum Analyzer	FSP 40	100036	May 17, 2014	May 16, 2015
Anritsu Power Sensor	MA2411B	0738404	Apr. 21, 2014	Apr. 20, 2015
Anritsu Power Meter	ML2495A	0842014	Apr. 21, 2014	Apr. 20, 2015

**NOTE:**

1. The calibration interval of the above test instruments is 12/24 months. And the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in Chamber No. 6.
4. The Industry Canada Reference No. IC 7450E-6.
5. The FCC Site Registration No. is 447212.



A D T

#### 4.1.4 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

##### NOTE:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is  $\geq 1/T$ (Duty cycle < 98%) or 10Hz(Duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

#### 4.1.5 DEVIATION FROM TEST STANDARD


No deviation.

#### 4.1.6 TEST SETUP

Frequency range 30MHz~1GHz

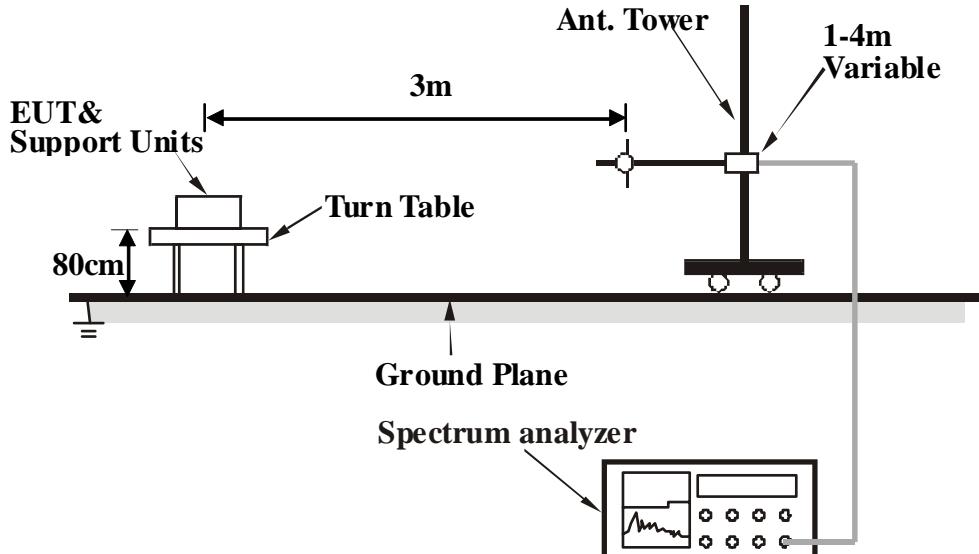

Frequency range above 1GHz

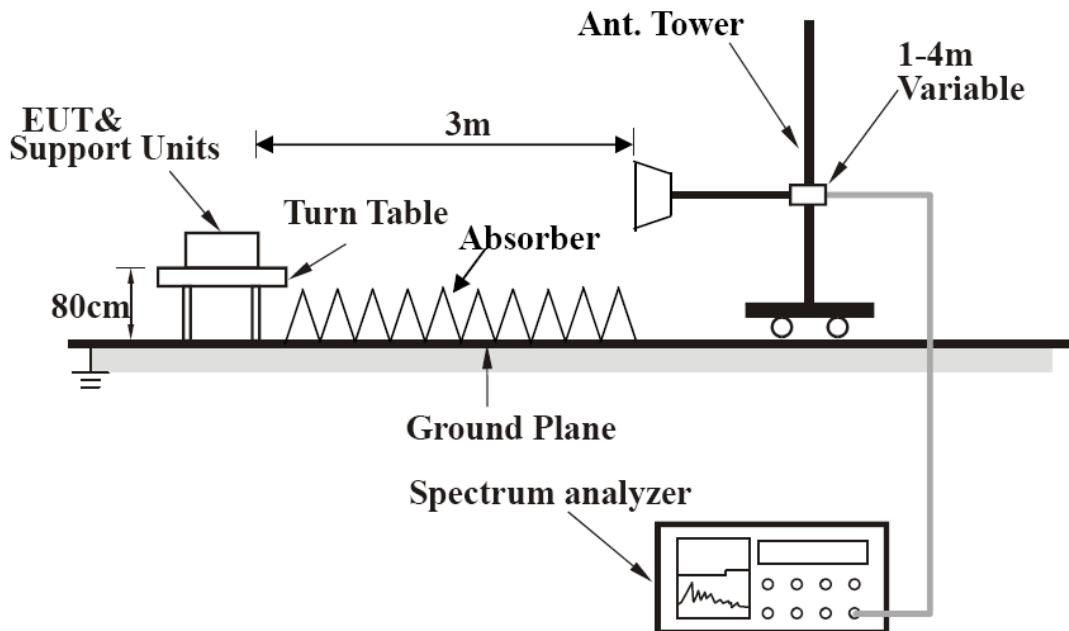

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.7 EUT OPERATING CONDITION

- Turn on the power of all equipment.
- Notebook PC ran a test program (provided by manufacture) to enable EUT under transmitting condition at specific channel continuously.



A D T

#### 4.1.8 TEST RESULTS

##### ABOVE 1GHz DATA

###### 802.11a

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	50.6 PK	74.0	-23.4	1.00 H	322	13.24	37.37
2	5150.00	39.8 AV	54.0	-14.3	1.00 H	322	2.38	37.37
3	*5180.00	109.7 PK			1.00 H	322	72.27	37.41
4	*5180.00	98.9 AV			1.00 H	322	61.53	37.41
5	#10360.00	58.2 PK	68.3	-10.1	1.11 H	300	10.97	47.25

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	53.8 PK	74.0	-20.2	1.00 V	321	16.45	37.37
2	5150.00	39.0 AV	54.0	-15.1	1.00 V	321	1.58	37.37
3	*5180.00	109.2 PK			1.00 V	321	71.74	37.41
4	*5180.00	100.4 AV			1.00 V	321	63.01	37.41
5	#10360.00	56.9 PK	68.3	-11.4	1.04 V	72	9.62	47.25

##### REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	109.0 PK			1.00 H	317	71.52	37.43
2	*5200.00	100.0 AV			1.00 H	317	62.58	37.43
3	#10400.00	58.0 PK	68.3	-10.3	1.15 H	301	10.65	47.31
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	109.6 PK			1.00 V	319	72.18	37.43
2	*5200.00	99.3 AV			1.00 V	319	61.88	37.43
3	#10400.00	56.9 PK	68.3	-11.4	1.03 V	75	9.57	47.31

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	108.7 PK			1.00 H	322	71.17	37.48
2	*5240.00	100.4 AV			1.00 H	322	62.94	37.48
3	5350.00	46.3 PK	74.0	-27.7	1.00 H	322	8.67	37.62
4	5350.00	35.9 AV	54.0	-18.1	1.00 H	322	-1.73	37.62
5	#10480.00	57.7 PK	68.3	-10.7	1.22 H	299	10.16	47.49

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	110.4 PK			1.00 V	318	72.93	37.48
2	*5240.00	100.2 AV			1.00 V	318	62.72	37.48
3	5350.00	49.3 PK	74.0	-24.7	1.00 V	318	11.65	37.62
4	5350.00	39.2 AV	54.0	-14.8	1.00 V	318	1.54	37.62
5	#10480.00	56.5 PK	68.3	-11.9	1.07 V	67	8.96	47.49

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

## 802.11n (20MHz)

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	58.3 PK	74.0	-15.7	1.00 H	319	20.89	37.37
2	5150.00	42.0 AV	54.0	-12.0	1.00 H	319	4.61	37.37
3	*5180.00	109.2 PK			1.00 H	319	71.81	37.41
4	*5180.00	99.6 AV			1.00 H	319	62.23	37.41
5	#10360.00	57.3 PK	68.3	-11.0	1.00 H	296	10.05	47.25

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	59.1 PK	74.0	-14.9	1.00 V	323	21.77	37.37
2	5150.00	42.6 AV	54.0	-11.4	1.00 V	323	5.20	37.37
3	*5180.00	110.3 PK			1.00 V	323	72.89	37.41
4	*5180.00	101.3 AV			1.00 V	323	63.91	37.41
5	#10360.00	54.3 PK	68.3	-14.0	1.00 V	63	7.07	47.25

## REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	108.3 PK			1.00 H	284	70.83	37.43
2	*5200.00	98.8 AV			1.00 H	284	61.32	37.43
3	#10400.00	57.0 PK	68.3	-11.3	1.00 H	298	9.70	47.31
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	109.6 PK			1.00 V	320	72.12	37.43
2	*5200.00	100.0 AV			1.00 V	320	62.56	37.43
3	#10400.00	54.5 PK	68.3	-13.8	1.00 V	55	7.18	47.31

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	109.4 PK			1.00 H	279	71.94	37.48
2	*5240.00	99.9 AV			1.00 H	279	62.46	37.48
3	5350.00	43.3 PK	74.0	-30.7	1.00 H	279	5.72	37.62
4	5350.00	34.3 AV	54.0	-19.7	1.00 H	279	-3.34	37.62
5	#10480.00	57.9 PK	68.3	-10.4	1.00 H	10	10.41	47.49
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	111.5 PK			1.00 V	317	73.97	37.48
2	*5240.00	101.1 AV			1.00 V	317	63.60	37.48
3	5350.00	45.0 PK	74.0	-29.0	1.00 V	317	7.34	37.62
4	5350.00	35.2 AV	54.0	-18.8	1.00 V	317	-2.44	37.62
5	#10480.00	55.0 PK	68.3	-13.3	1.00 V	66	7.50	47.49

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

802.11n (40MHz)

CHANNEL	TX Channel 38	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	71.0 PK	74.0	-3.0	1.00 H	319	39.24	31.75
2	5150.00	53.6 AV	54.0	-0.5	1.00 H	319	21.80	31.75
3	*5190.00	105.5 PK			1.00 H	319	73.66	31.79
4	*5190.00	96.0 AV			1.00 H	319	64.22	31.79
5	#5250.00	37.5 PK	68.3	-30.8	1.00 H	319	5.67	31.85
6	#10380.00	55.7 PK	68.3	-12.6	1.00 H	301	16.12	39.56

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	71.0 PK	74.0	-3.0	1.00 V	322	39.28	31.75
2	5150.00	53.8 AV	54.0	-0.2	1.00 V	322	22.06	31.75
3	*5190.00	106.3 PK			1.00 V	322	74.50	31.79
4	*5190.00	96.6 AV			1.00 V	322	64.76	31.79
5	#5250.00	37.9 PK	68.3	-30.5	1.00 V	322	6.00	31.85
6	#10380.00	55.0 PK	68.3	-13.3	1.00 V	61	15.44	39.56

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

CHANNEL	TX Channel 46	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5230.00	105.1 PK			1.00 H	321	67.67	37.47
2	*5230.00	95.6 AV			1.00 H	321	58.14	37.47
3	5350.00	43.8 PK	74.0	-30.2	1.00 H	321	6.18	37.62
4	5350.00	34.3 AV	54.0	-19.7	1.00 H	321	-3.28	37.62
5	#10460.00	55.3 PK	68.3	-13.0	1.00 H	298	7.88	47.44

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5230.00	105.4 PK			1.00 V	325	67.92	37.47
2	*5230.00	96.4 AV			1.00 V	325	58.91	37.47
3	5350.00	44.2 PK	74.0	-29.8	1.00 V	325	6.59	37.62
4	5350.00	35.1 AV	54.0	-18.9	1.00 V	325	-2.54	37.62
5	#10460.00	54.5 PK	68.3	-13.8	1.06 V	71	7.05	47.44

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

### BELOW 1GHz WORST-CASE DATA

#### 802.11n (20MHz)

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	105.56	22.0 QP	43.5	-21.5	1.37 H	213	39.33	-17.34
2	148.29	25.6 QP	43.5	-17.9	1.17 H	98	39.09	-13.50
3	233.17	30.6 QP	46.0	-15.4	1.43 H	240	46.16	-15.56
4	257.80	29.5 QP	46.0	-16.6	1.69 H	360	43.19	-13.74
5	347.87	27.7 QP	46.0	-18.3	1.73 H	98	39.17	-11.45
6	417.56	30.0 QP	46.0	-16.0	1.25 H	81	40.13	-10.11

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	33.54	30.6 QP	40.0	-9.4	1.39 V	50	45.62	-15.05
2	41.59	29.5 QP	40.0	-10.6	1.17 V	200	43.53	-14.08
3	139.51	31.8 QP	43.5	-11.7	1.57 V	156	45.90	-14.14
4	232.34	27.8 QP	46.0	-18.2	1.69 V	52	43.57	-15.73
5	416.01	29.2 QP	46.0	-16.8	1.37 V	72	39.34	-10.18
6	631.64	35.9 QP	46.0	-10.1	1.46 V	92	42.00	-6.08

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value



A D T

## 4.2 CONDUCTED EMISSION MEASUREMENT

### 4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB $\mu$ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

**NOTE:** 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 4.2.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
ROHDE & SCHWARZ TEST RECEIVER	ESCS 30	100276	Apr. 18, 2014	Apr. 17, 2015
ROHDE & SCHWARZ Artificial Mains Network (for EUT)	ESH3-Z5	100219	Nov. 17, 2013	Nov. 16, 2014
LISN With Adapter (for EUT)	AD10	C10Ada-001	Nov. 17, 2013	Nov. 16, 2014
ROHDE & SCHWARZ Artificial Mains Network (for peripherals)	ESH3-Z5	100218	Nov. 25, 2013	Nov. 24, 2014
SCHWARZBECK Artificial Mains Network (For EUT)	NNLK8129	8129229	May 15, 2013	May 14, 2014
Software	ADT_Cond_V7.3.7	NA	NA	NA
RF cable (JYEBAO)	5D-FB	Cable-C10.01	Feb. 18, 2014	Feb. 17, 2015
SUHNER Terminator (For ROHDE & SCHWARZ LISN)	65BNC-5001	E1-011484	May 23, 2013	May 22, 2014
Isolation Transformer (Erika Fiedler)	D-65396	017	Jul. 29, 2013	Jul. 28, 2014

Notes: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
2. The test was performed in Shielded Room No. 10.  
3. The VCCI Site Registration No. C-1852.

#### 4.2.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

**NOTE:** All modes of operation were investigated and the worst-case emissions are reported.

#### 4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.2.5 TEST SETUP

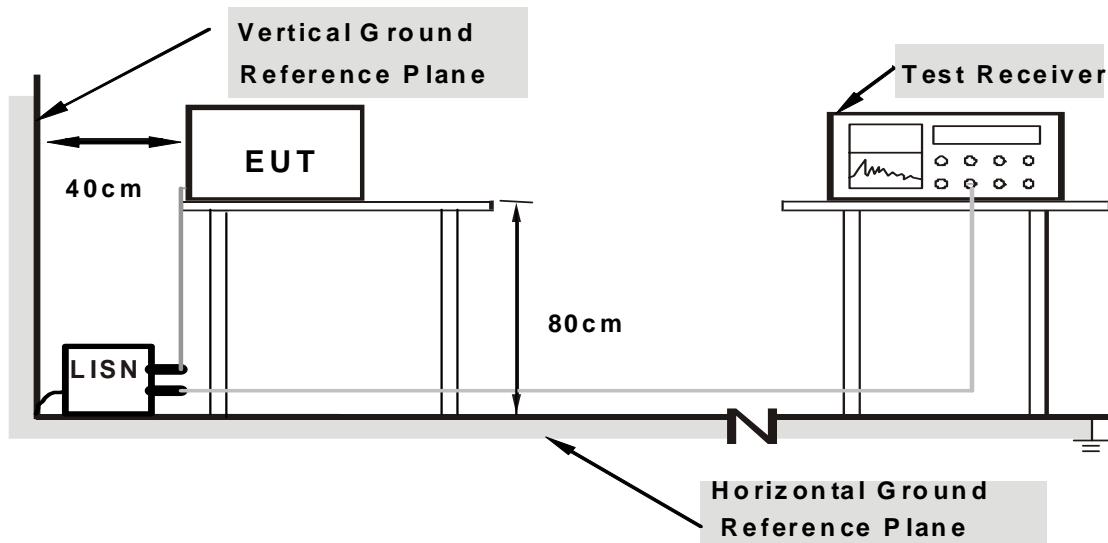

**Note: Support units were connected to second LISN.**

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.2.6 EUT OPERATING CONDITIONS

Same as item 4.1.6.

#### 4.2.7 TEST RESULTS


##### CONDUCTED WORST-CASE DATA : 802.11n (20MHz)

Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Channel	TX Channel 48		

No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
	0.25938	0.16	42.40	33.73	42.56	33.89	61.45	51.45	-18.89	-17.56
2	0.41563	0.17	39.94	23.54	40.11	23.71	57.54	47.54	-17.43	-23.83
3	0.50938	0.17	39.97	34.94	40.14	35.11	56.00	46.00	-15.86	-10.89
4	0.63438	0.17	39.55	32.34	39.72	32.51	56.00	46.00	-16.28	-13.49
5	0.87266	0.17	36.36	30.79	36.53	30.96	56.00	46.00	-19.47	-15.04
6	18.15625	1.03	34.26	28.17	35.29	29.20	60.00	50.00	-24.71	-20.80

##### Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

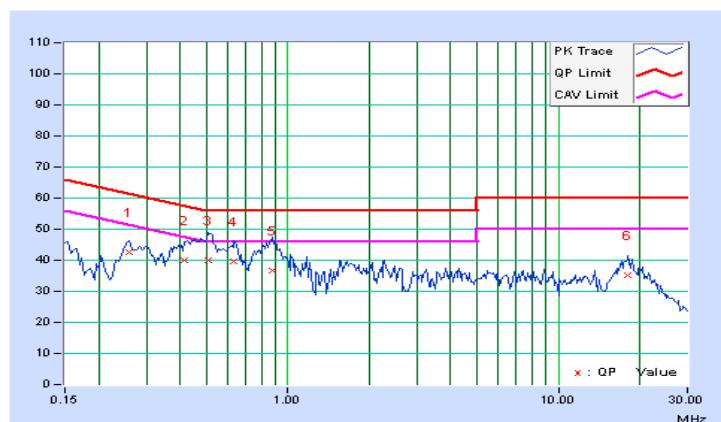


Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Channel	TX Channel 48		

No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.29453	0.54	41.29	23.80	41.83	24.34	60.40	50.40	-18.57	-26.06
2	<b>0.50938</b>	<b>0.54</b>	<b>45.06</b>	<b>34.37</b>	<b>45.60</b>	<b>34.91</b>	<b>56.00</b>	<b>46.00</b>	<b>-10.40</b>	<b>-11.09</b>
3	0.83750	0.55	37.81	23.00	38.36	23.55	56.00	46.00	-17.64	-22.45
4	0.99375	0.56	34.40	23.99	34.96	24.55	56.00	46.00	-21.04	-21.45
5	1.64844	0.57	35.55	25.08	36.12	25.65	56.00	46.00	-19.88	-20.35
6	18.54688	1.05	31.04	24.28	32.09	25.33	60.00	50.00	-27.91	-24.67

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

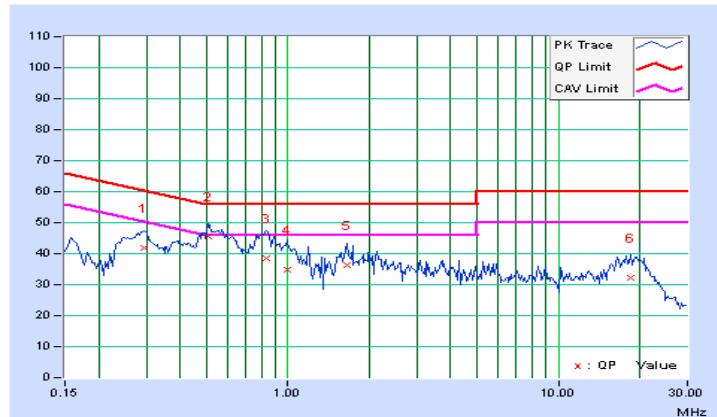

## 4.3 PEAK TRANSMIT POWER MEASUREMENT

### 4.3.1 LIMITS OF PEAK TRANSMIT POWER MEASUREMENT

FREQUENCY BAND	LIMIT
5.15 ~ 5.25GHz	The lesser of 50mW (17dBm) or 4dBm + 10logB

**NOTE:** Where B is the 26dB emission bandwidth in MHz.

Per KDB 662911 D01 Multiple Transmitter Output v02r01 Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for NANT  $\leq$  4;


Array Gain = 0 dB (i.e., no array gain) for channel widths  $\geq$  40 MHz for any NANT;

Array Gain =  $5 \log(NANT/NSS)$  dB or 3 dB, whichever is less for 20-MHz channel widths with NANT  $\geq$  5.


For power measurements on all other devices: Array Gain =  $10 \log(NANT/NSS)$  dB.

### 4.3.2 TEST SETUP

#### FOR POWER OUTPUT MEASUREMENT

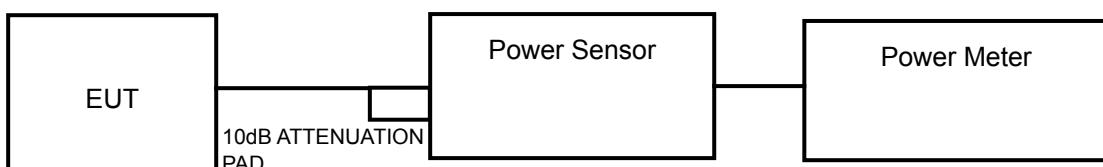

#### FOR 26dB BANDWIDTH



#### 4.3.3 TEST INSTRUMENTS

Refer to section 4.1.3 to get information of above instrument.

#### 4.3.4 TEST PROCEDURE

##### FOR AVERAGE POWER MEASUREMENT

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

##### FOR 26dB BANDWIDTH

- 1) Set RBW = approximately 1% of the emission bandwidth.
- 2) Set the VBW > RBW.
- 3) Detector = Peak.
- 4) Trace mode = max hold.
- 5) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

#### 4.3.5 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.



A D T

#### 4.3.7 TEST RESULTS

##### POWER OUTPUT:

###### 802.11a

CHAN.	CHAN. FREQ. (MHz)	AVERAGE POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
36	5180	13.32	13.03	41.7	16.19	17	PASS
40	5200	13.35	13.29	43.0	16.33	17	PASS
48	5240	13.08	13.02	40.4	16.06	17	PASS

##### CHAIN 0

1.  $4\text{dBm} + 10\log(21.34) = 17.29\text{ dBm} > 17\text{dBm.}$
2.  $4\text{dBm} + 10\log(21.31) = 17.29\text{ dBm} > 17\text{dBm.}$
3.  $4\text{dBm} + 10\log(21.32) = 17.29\text{ dBm} > 17\text{dBm.}$

##### CHAIN 1

1.  $4\text{dBm} + 10\log(21.17) = 17.26\text{ dBm} > 17\text{dBm.}$
2.  $4\text{dBm} + 10\log(21.12) = 17.25\text{ dBm} > 17\text{dBm.}$
3.  $4\text{dBm} + 10\log(21.28) = 17.28\text{ dBm} > 17\text{dBm.}$

###### 802.11n (20MHz)

CHAN.	CHAN. FREQ. (MHz)	AVERAGE POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
36	5180	12.30	12.28	33.9	15.30	16.98	PASS
40	5200	12.35	12.24	33.9	15.31	16.96	PASS
48	5240	12.41	12.22	34.1	15.33	16.97	PASS

##### CHAIN 0

1.  $4\text{dBm} + 10\log(21.25) = 17.27\text{ dBm} > 17\text{dBm.}$
2.  $4\text{dBm} + 10\log(21.32) = 17.29\text{ dBm} > 17\text{dBm.}$
3.  $4\text{dBm} + 10\log(20.49) = 17.12\text{ dBm} > 17\text{dBm.}$

##### CHAIN 1

1.  $4\text{dBm} + 10\log(19.84) = 16.98\text{ dBm} < 17\text{dBm.}$
2.  $4\text{dBm} + 10\log(19.77) = 16.96\text{ dBm} < 17\text{dBm.}$
3.  $4\text{dBm} + 10\log(19.83) = 16.97\text{ dBm} < 17\text{dBm.}$



A D T

### 802.11n (40MHz)

CHAN.	CHAN. FREQ. (MHz)	AVERAGE POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
38	5190	11.37	11.24	27.0	14.32	17	PASS
46	5230	11.42	11.37	27.6	14.41	17	PASS

#### CHAIN 0


1.  $4\text{dBm} + 10\log(42.00) = 20.23\text{ dBm} > 17\text{dBm.}$
2.  $4\text{dBm} + 10\log(42.16) = 20.25\text{ dBm} > 17\text{dBm.}$

#### CHAIN 1

1.  $4\text{dBm} + 10\log(41.27) = 20.16\text{ dBm} > 17\text{dBm.}$
2.  $4\text{dBm} + 10\log(41.68) = 20.20\text{ dBm} > 17\text{dBm.}$

**26dB BANDWIDTH:**

CHANNEL	CHANNEL FREQUENCY (MHz)	26dBc BANDWIDTH (MHz)		PASS / FAIL
		CHAIN 0	CHAIN 1	
<b>802.11a</b>				
36	5180	21.34	21.17	PASS
40	5200	21.31	21.12	PASS
48	5240	21.32	21.28	PASS
<b>802.11n (20MHz)</b>				
36	5180	21.25	19.84	PASS
40	5200	21.32	19.77	PASS
48	5240	20.49	19.83	PASS
<b>802.11n (40MHz)</b>				
38	5190	42.00	41.27	PASS
46	5230	42.16	41.68	PASS

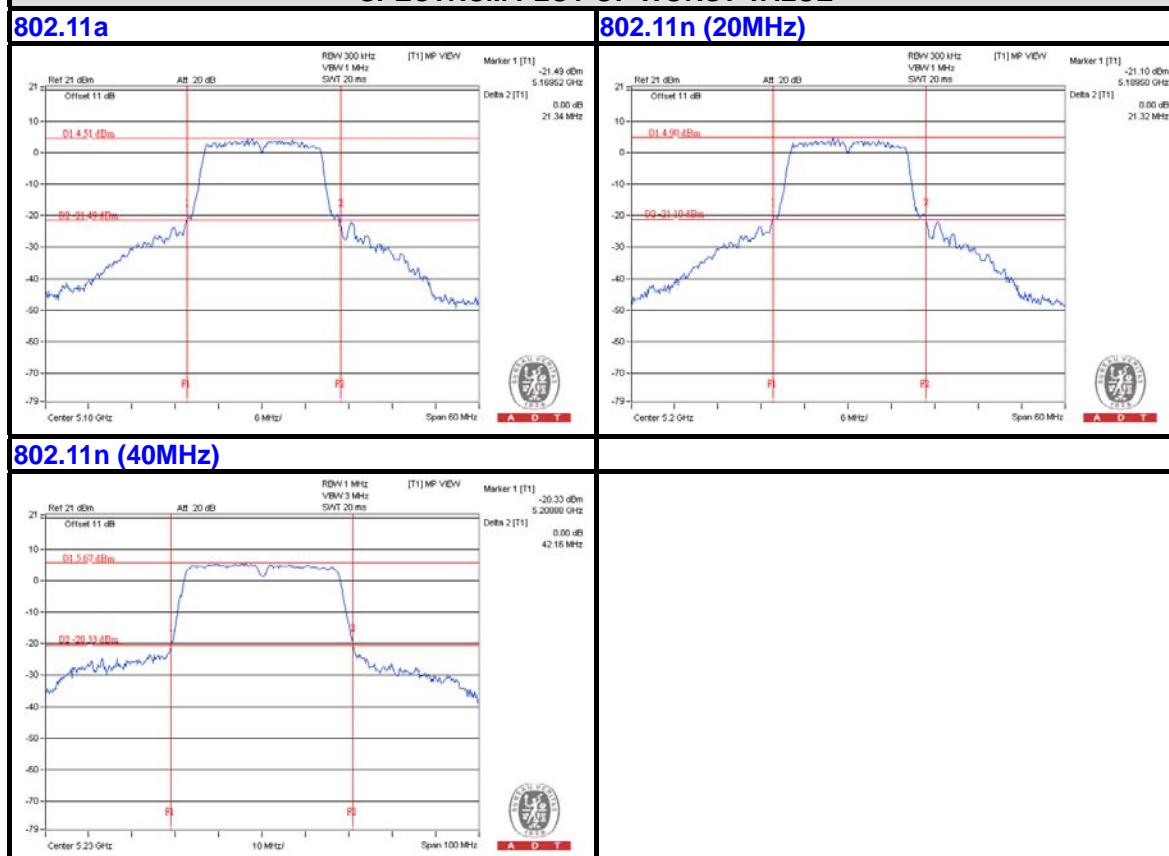**SPECTRUM PLOT OF WORST VALUE**


## 4.4 PEAK POWER SPECTRAL DENSITY MEASUREMENT

### 4.4.1 LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT

FREQUENCY BAND	LIMIT
5.15 ~ 5.25GHz	4dBm

### 4.4.2 TEST SETUP



### 4.4.3 TEST INSTRUMENTS

Refer to section 4.1.3 to get information of above instrument.

### 4.4.4 TEST PROCEDURES

Using method SA-1

- 1) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- 2) Set RBW = 30 KHz, Set VBW  $\geq$  1 MHz, Detector = RMS
- 3) Set Channel power measure = 1MHz
- 4) Sweep time = auto, trigger set to “free run”.
- 5) Trace average at least 100 traces in power averaging mode.
- 6) Record the max value and add 10 log (1/duty cycle)

### 4.4.5 DEVIATION FROM TEST STANDARD

No deviation.

### 4.4.6 EUT OPERATING CONDITIONS

Same as 4.3.6.



A D T

#### 4.4.7 TEST RESULTS

CHAN.	CHAN. FREQ. (MHz)	PSD (dBm)		TOTAL PSD (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1			
<b>802.11a</b>						
36	5180	-0.11	-0.80	2.57	4	PASS
40	5200	0.19	-0.80	2.73	4	PASS
48	5240	-0.55	-1.08	2.20	4	PASS
<b>802.11n (20MHz)</b>						
36	5180	-0.39	-1.82	1.96	4	PASS
40	5200	-0.27	-1.35	2.23	4	PASS
48	5240	-1.10	-1.70	1.62	4	PASS
<b>802.11n (40MHz)</b>						
38	5190	-4.43	-5.46	-1.90	4	PASS
46	5230	-4.79	-5.71	-2.22	4	PASS

**NOTE:**


1. Method a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = 0dBi + 10log(2) = 3.01dBi < 6dBi, so the power spectral density limit is not reduced.




A D T

### SPECTRUM PLOT OF WORST VALUE


#### 802.11a

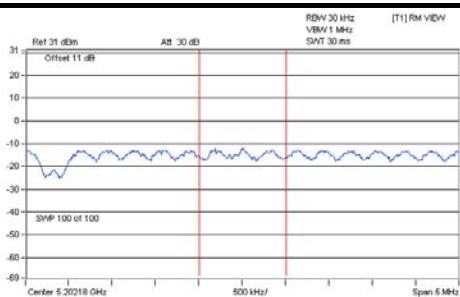

#### 802.11n (20MHz)

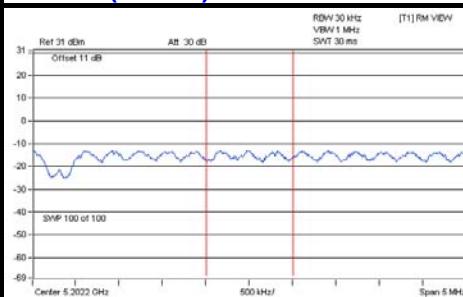

#### 802.11n (40MHz)

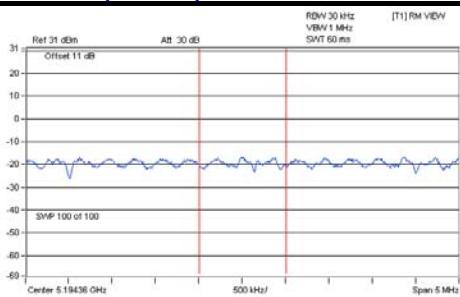


## 4.5 PEAK POWER EXCURSION MEASUREMENT

### 4.5.1 LIMITS OF PEAK POWER EXCURSION MEASUREMENT

Shall not exceed 13 dB

### 4.5.2 TEST SETUP



### 4.5.3 TEST INSTRUMENTS

Refer to section 4.1.3 to get information of above instrument.

### 4.5.4 TEST PROCEDURE

- 1) Set RBW = 1 MHz, VBW  $\geq$  3 MHz, Detector = peak.
- 2) Trace mode = max-hold. Allow the sweeps to continue until the trace stabilizes.
- 3) Use the peak search function to find the peak of the spectrum.
- 4) Measure the PPSD.
- 5) Compute the ratio of the maximum of the peak-max-hold spectrum to the PPSD.  
Find the worst channel and modulation mode as above test procedure, and follow KDB 789033 D01 General UNII Test Procedures v01r03 and repeat step 1 to 5 for final testing of each modulation mode on a single channel ( all modulation types ) in a single operating band to compliance with the peak excursion requirement.

### 4.5.5 DEVIATION FROM TEST STANDARD


No deviation.

### 4.5.6 EUT OPERATING CONDITIONS

Same as item 4.2.6

#### 4.5.7 TEST RESULTS

MODULATION MODE	MODULATION TYPE	CHAN. FREQ. (MHz)	PEAK VALUE (dBm)	PPSD WITHOUT DUTY FACTOR (dBm)	PPSD WITH DUTY FACTOR (dBm)	PEAK EXCURSION (dB)	LIMIT (dB)	PASS /FAIL
802.11a	BPSK	5180	10.03	-0.11	-0.11	10.14	13	PASS
	QPSK		9.03	-1.72	-1.72	10.75	13	PASS
	16QAM		6.70	-3.25	-3.25	9.95	13	PASS
	64QAM		5.24	-5.26	-5.26	10.50	13	PASS
802.11n (20MHz)	BPSK	5180	9.64	-0.39	-0.39	10.03	13	PASS
	QPSK		10.08	-0.82	-0.82	10.90	13	PASS
	16QAM		10.22	-0.77	-0.77	10.99	13	PASS
	64QAM		8.31	-2.53	-2.53	10.84	13	PASS
802.11n (40MHz)	BPSK	5190	6.21	-4.43	-4.43	10.64	13	PASS
	QPSK		5.94	-5.14	-5.14	11.08	13	PASS
	16QAM		5.88	-4.90	-4.90	10.78	13	PASS
	64QAM		3.97	-6.71	-6.71	10.68	13	PASS

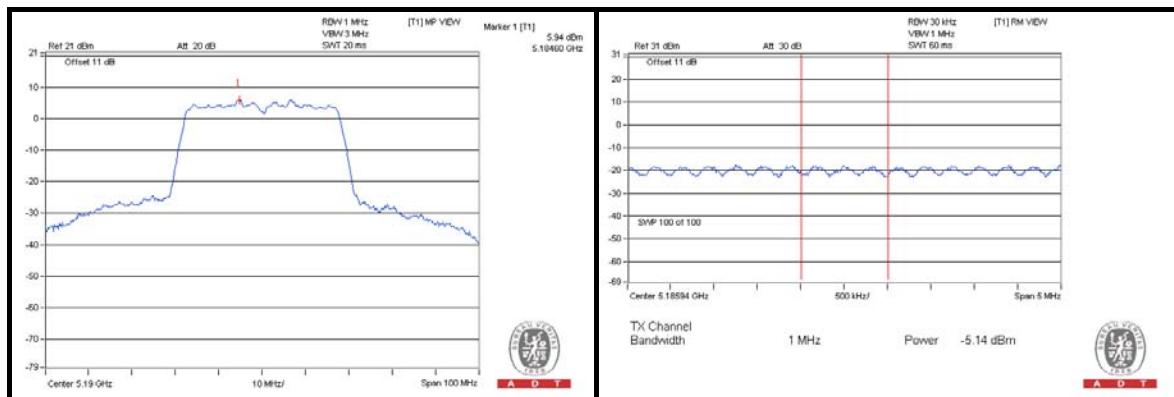


## 4.6 FREQUENCY STABILITY

### 4.6.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT

The frequency of the carrier signal shall be maintained within band of operation

### 4.6.2 TEST SETUP

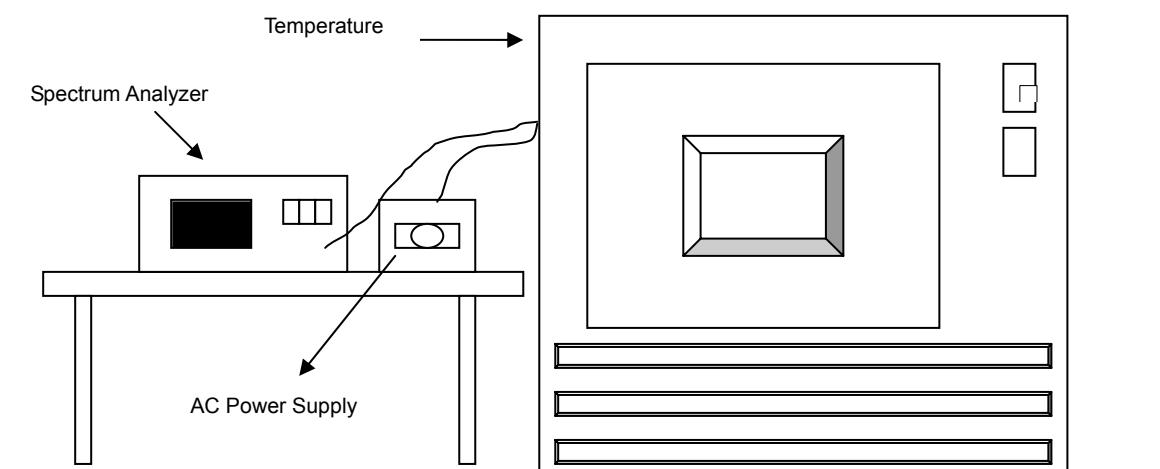

### 4.6.3 TEST INSTRUMENTS

Refer to section 4.1.3 to get information of above instrument.



A D T

#### 4.6.4 TEST PROCEDURE

- a. The EUT was placed inside the environmental test chamber and powered by nominal AC voltage.
- b. Turn the EUT on and couple its output to a spectrum analyzer.
- c. Turn the EUT off and set the chamber to the highest temperature specified.
- d. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
- e. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
- f. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

#### 4.6.5 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.6.6 EUT OPERATING CONDITION

Set the EUT transmit at un-modulation mode to test frequency stability.



A D T

#### 4.6.7 TEST RESULTS

FREQUEMCY STABILITY VERSUS TEMP.									
OPERATING FREQUENCY: 5180MHz									
TEMP. (°C)	POWER SUPPLY (Vac)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency (MHz)	Frequency Drift (ppm)	Measured Frequency (MHz)	Frequency Drift (ppm)	Measured Frequency (MHz)	Frequency Drift (ppm)	Measured Frequency (MHz)	Frequency Drift (ppm)
40	120	5180.042863	8.2747632	5180.042941	8.2897201	5180.042865	8.2750006	5180.04316	8.3320028
30	120	5180.043031	8.3071770	5180.042802	8.2628916	5180.042904	8.2826837	5180.043079	8.3164261
20	120	5180.04317	8.3340694	5180.043502	8.3980243	5180.043409	8.3801644	5180.043163	8.3326947
10	120	5180.042721	8.2473377	5180.04271	8.2451471	5180.042557	8.2156047	5180.042975	8.2963083
0	120	5180.042451	8.1952429	5180.042372	8.1798894	5180.042450	8.1949002	5180.042523	8.2090394


FREQUEMCY STABILITY VERSUS VOLTAGE									
OPERATING FREQUENCY: 5180MHz									
TEMP. (°C)	POWER SUPPLY (Vac)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency (MHz)	Frequency Drift (ppm)	Measured Frequency (MHz)	Frequency Drift (ppm)	Measured Frequency (MHz)	Frequency Drift (ppm)	Measured Frequency (MHz)	Frequency Drift (ppm)
20	138	5180.042806	8.2637535	5180.042893	8.2805609	5180.042922	8.2861620	5180.042973	8.2959545
	120	5180.04317	8.3340694	5180.043502	8.3980243	5180.043409	8.3801644	5180.043163	8.3326947
	102	5180.0426	8.2240275	5180.042657	8.2349515	5180.042516	8.2076928	5180.042333	8.1724280

## 4.7 20dBc BANDWIDTH MEASUREMENT

### 4.7.1 LIMITS OF 20dBc BANDWIDTH MEASUREMENT

20dBc point shall not overlap in 5150~5250MHz.

### 4.7.2 TEST SETUP



### 4.7.3 TEST INSTRUMENTS

Refer to section 4.1.3 to get information of above instrument.

### 4.7.4 TEST PROCEDURE

789033 D01 General UNII Test Procedures v01r04


#### Emission bandwidth


1. Set RBW = approximately 1% of the emission bandwidth.
2. Set the VBW > RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Measure the maximum width of the emission that is 20 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.


#### 4.7.5 TEST RESULTS

CHANNEL	CHANNEL FREQUENCY (MHz)	20dBc BANDWIDTH (MHz)	
		CHAIN 0	CHAIN 1
<b>802.11a</b>			
36	5180	18.70	18.66
48	5240	18.57	18.58
<b>802.11n (20MHz)</b>			
36	5180	19.30	19.14
48	5240	19.23	19.35
<b>802.11n (40MHz)</b>			
38	5190	39.84	39.83
46	5230	39.88	39.85

##### 802.11a:

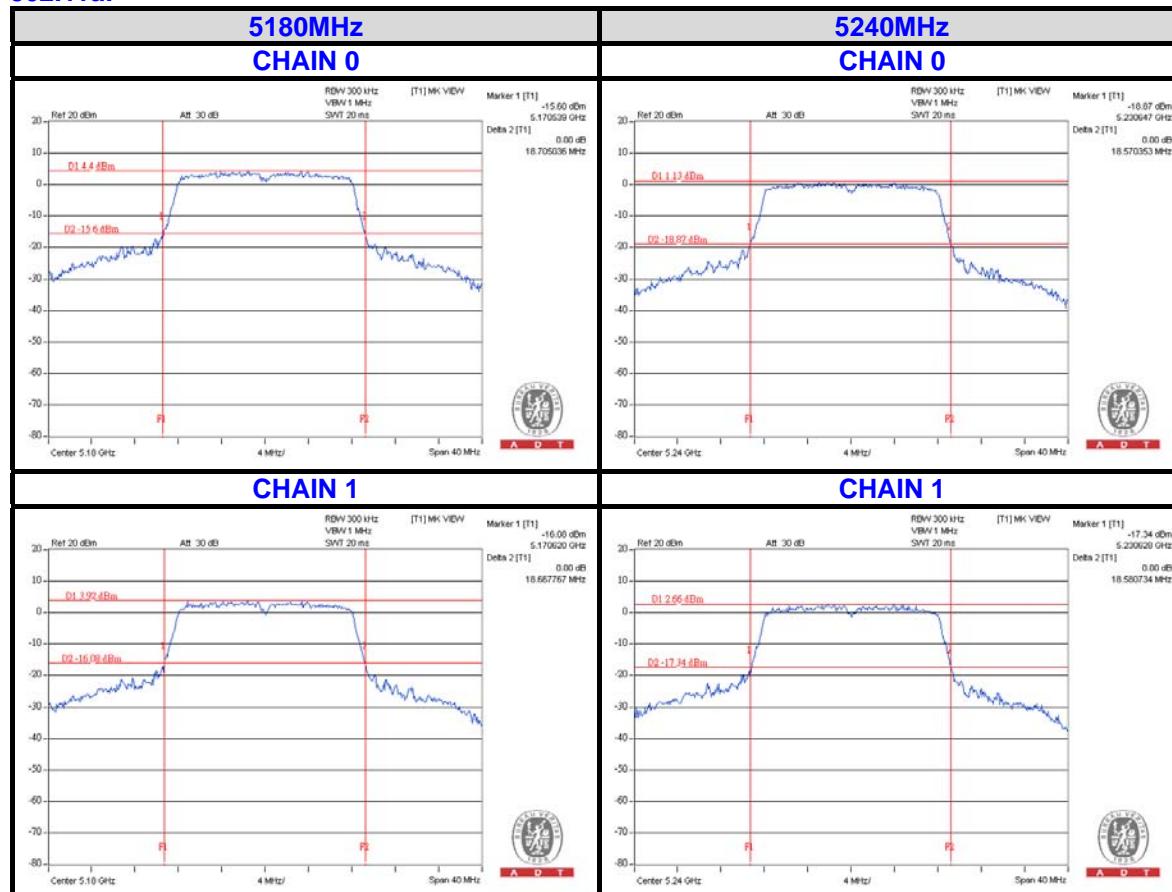

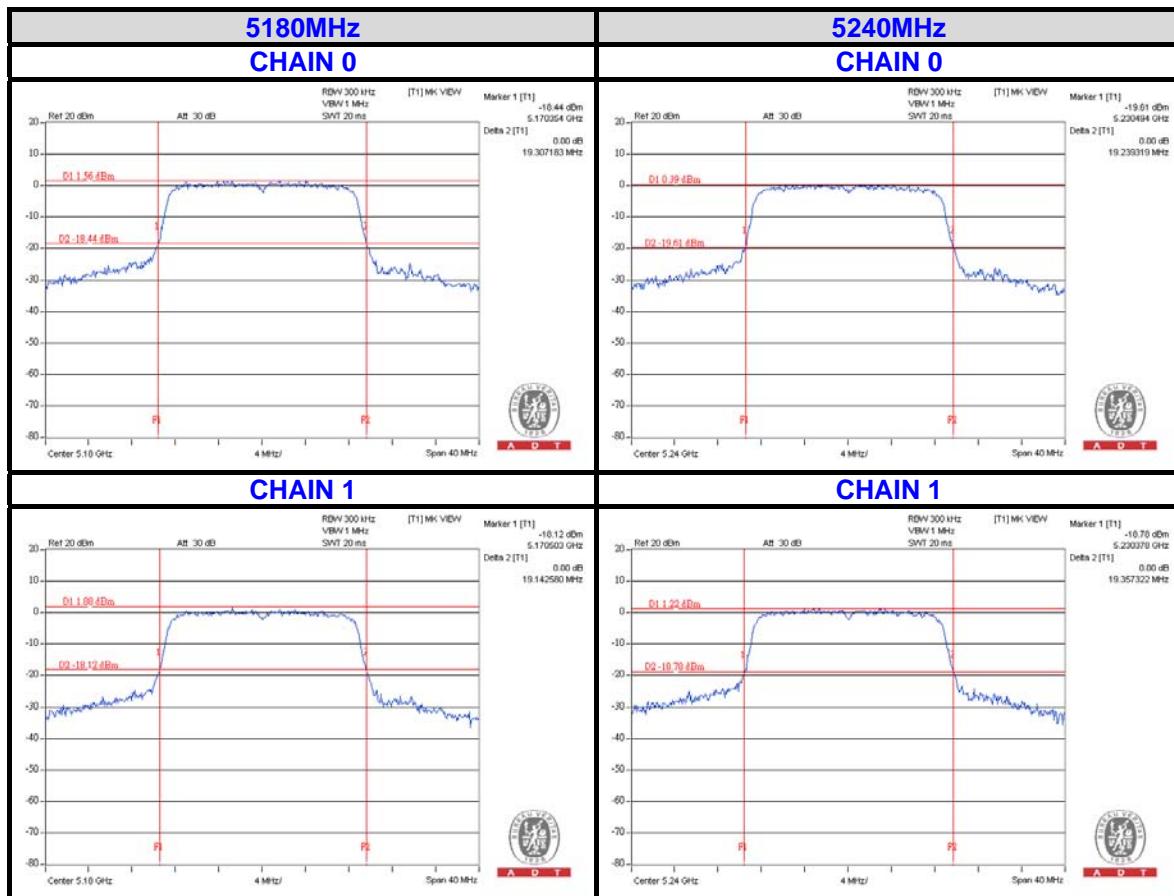**802.11n (20MHz)**

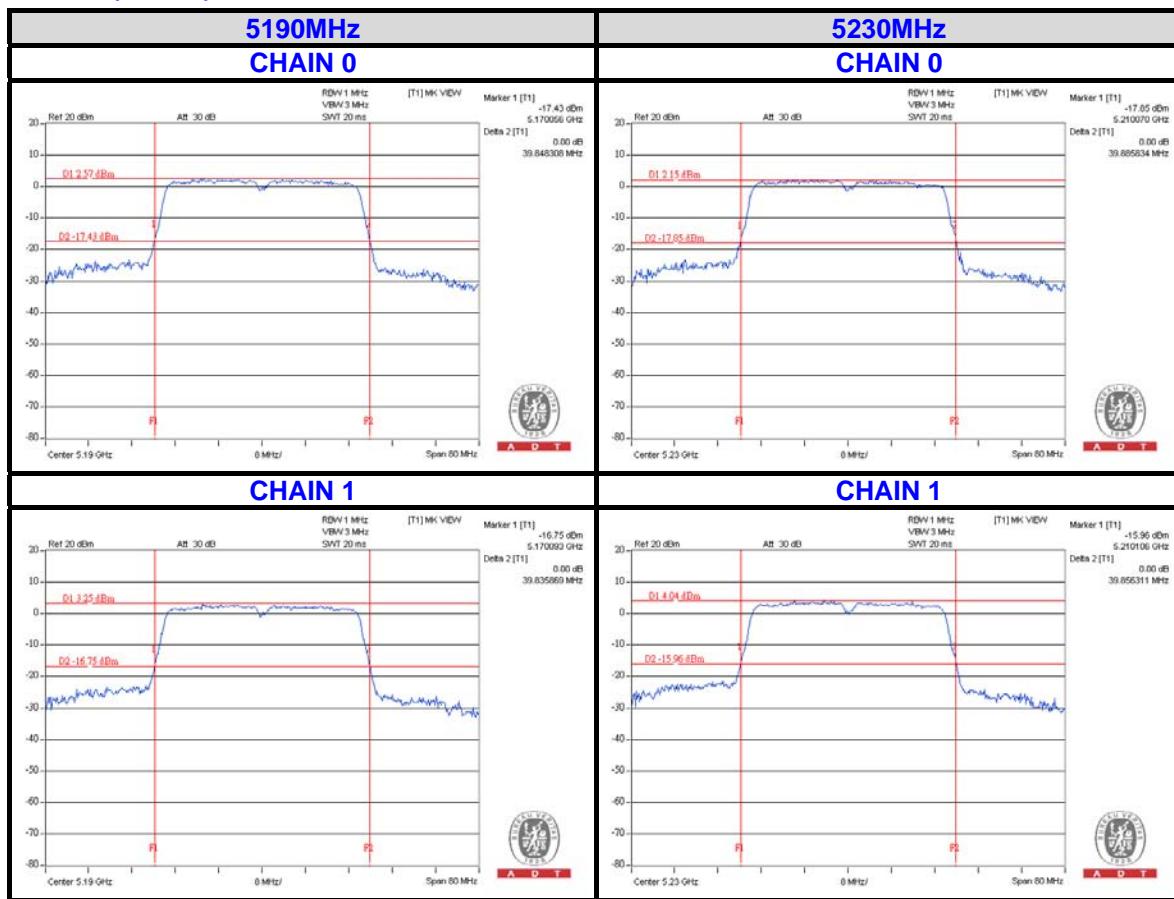
**802.11n (40MHz)**




A D T

## 5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



A D T

## 6. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab:**

Tel: 886-2-26052180  
Fax: 886-2-26051924

**Hsin Chu EMC/RF Lab:**

Tel: 886-3-5935343  
Fax: 886-3-5935342

**Hwa Ya EMC/RF/Safety Telecom Lab:**

Tel: 886-3-3183232  
Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.



A D T

## 7. APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

---END---