

# TEST REPORT

FCC BT LE Test for FX100

**APPLICANT**  
PASSTECH CO., LTD

**REPORT NO.**  
HCT-RF-2105-FC042

**DATE OF ISSUE**  
May 26, 2021

Tested by  
Jin Gwan Lee



Technical Manager  
Jong Seok Lee



**HCT CO., LTD.**  
*BongJai Huh*  
BongJai Huh / CEO

**HCT CO., LTD.**

74, Seoicheon-ro 578beon-gil, Majang-myeon,  
Icheon-si, Gyeonggi-do, 17383 KOREA  
Tel. +82 31 634 6300 F ax. +82 31 645 6401

**HCT Co., Ltd.**

74, Seocheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA  
Tel. +82 31 634 6300 Fax. +82 31 645 6401

<b>TEST REPORT</b> FCC BT LE Test for FX100	<b>REPORT NO.</b> HCT-RF-2105-FC042
	<b>DATE OF ISSUE</b> May 26, 2021
	<b>Additional Model</b> FX100WR, FX200, FX200WR

<b>Applicant</b>	<b>PASSTECH CO., LTD</b> B-402. 215 Galmachi-ro, Jungwon-gu, Seongnam-si, Gyeonggi-do, Rep. of Korea (Zip 13217)
<b>Eut Type</b> <b>Model Name</b>	FURNITURE LOCK FX100
<b>FCC ID</b>	W6YFX100
<b>Max. RF Output Power</b>	-4.666 dBm (0.342 mW)
<b>Modulation type</b>	GFSK
<b>FCC Classification</b>	Digital Transmission System(DTS)
<b>FCC Rule Part(s)</b>	Part 15.247

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

This test results were applied only to the test methods required by the standard.



## CONTENTS

1. EUT DESCRIPTION	5
2. TEST METHODOLOGY	6
EUT CONFIGURATION	6
EUT EXERCISE	6
GENERAL TEST PROCEDURES	6
DESCRIPTION OF TEST MODES	7
3. INSTRUMENT CALIBRATION	7
4. FACILITIES AND ACCREDITATIONS	7
FACILITIES	7
EQUIPMENT	7
5. ANTENNA REQUIREMENTS	8
6. MEASUREMENT UNCERTAINTY	8
7. DESCRIPTION OF TESTS	9
8. SUMMARY TEST OF RESULTS	25
9. TEST RESULT	26
9.1 DUTY CYCLE	26
9.2 DUTY CYCLE CORRECTION	26
9.3 6dB BANDWIDTH	29
9.4 OUTPUT POWER	38
9.5 POWER SPECTRAL DENSITY	42
9.6 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS	51
9.7 RADIATED SPURIOUS EMISSIONS	67
9.8 RADIATED RESTRICTED BAND EDGES	77
9.9 POWERLINE CONDUCTED EMISSIONS	81
10. LIST OF TEST EQUIPMENT	85
11. ANNEX A_ TEST SETUP PHOTO	87

**1. EUT DESCRIPTION**

Model	FX100	
Additional Model	FX100WR, FX200, FX200WR	
EUT Type	FURNITURE LOCK	
Power Supply	FX100(DC) 3.0 V FX200(AC Adaptor) 100 ~ 220 V, Output DC 5V	
Frequency Range	2402 MHz - 2480 MHz	
Max. RF Output Power	Peak	125k Bit/s - 37 byte : -4.666 dBm (0.342 mW) 2M Bit/s - 37 byte: -5.694 dBm (0.270 mW)
	Average	1M Bit/s - 37 byte: -4.968 dBm (0.319 mW) 2M Bit/s - 37 byte: -5.810 dBm (0.262 mW)
Modulation Type	GFSK	
Bluetooth Version	5.0	
Number of Channels	40 Channels	
Antenna Specification	Antenna type: Multilayer Chip Antenna Peak Gain : 3.5 dBi	
Date(s) of Tests	May 14, 2021~ May 25, 2021	

## 2. TEST METHODOLOGY

FCC KDB 558074 D01 15.247 Meas Guidance v05r02 dated April 02, 2019 entitled “guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices and the measurement procedure described in ANSI C63.10(Version : 2013) ‘the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices’.

### EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

### GENERAL TEST PROCEDURES

#### Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

#### Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz. Above 1GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013)

## DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

## 3. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

## 4. FACILITIES AND ACCREDITATIONS

### FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.

The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

### EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

## 5. ANTENNA REQUIREMENTS

### According to FCC 47 CFR § 15.203

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- (1) The antennas of this E.U.T are permanently attached.
- (2) The E.U.T Complies with the requirement of § 15.203

## 6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of  $k=2$  to indicate a 95 % level of confidence.


The measurement data shown herein meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05

## 7. DESCRIPTION OF TESTS

### 7.1. Duty Cycle

#### Test Configuration

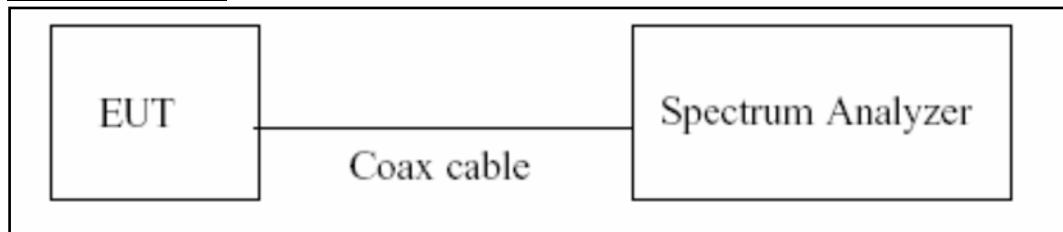

#### Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to the zero-span measurement method, 6.0)b) in KDB 558074 v05r02.

The largest available value of RBW is 8 MHz and VBW is 50 MHz.

The zero-span method of measuring duty cycle shall not be used if  $T \leq 6.25$  microseconds. ( $50/6.25 = 8$ )

The zero-span method was used because all measured T data are  $> 6.25$  microseconds and both RBW and VBW are  $> 50/T$ .


1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz ( $\geq$  RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep  $> 100$
6. Trace mode = Clear write
7. Measure  $T_{total}$  and  $T_{on}$
8. Calculate Duty Cycle =  $T_{on}/T_{total}$  and Duty Cycle Factor =  $10\log(1/\text{Duty Cycle})$

## 7.2. 6dB Bandwidth

### Limit

The minimum permissible 6 dB bandwidth is 500 kHz.

### Test Configuration



### Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to (Procedure 8.2 in KDB 558074 v05r02, Procedure 11.8.1 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW  $\geq$  3 x RBW
- 3) Detector = Peak
- 4) Trace mode = max hold
- 5) Sweep = auto couple
- 6) Allow the trace to stabilize
- 7) We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.


Note : We tested OBW using the automatic bandwidth measurement capability of a spectrum analyzer.

### 7.3. Output Power

#### Limit

The maximum permissible conducted output power is 1 Watt.

#### Test Configuration



#### Test Procedure

The transmitter output is connected to the Power Meter.

- Peak Power (Procedure 11.9.1.3 in ANSI 63.10-2013)  
: Measure the peak power of the transmitter.
- Average Power (Procedure 8.3.2.3 in KDB 558074 v05r02, Procedure 11.9.2.3 in ANSI 63.10-2013)
  - 1) Measure the duty cycle.
  - 2) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
  - 3) Add  $10 \log (1/x)$ , where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

#### Sample Calculation


- Conducted Output Power(Peak) = Reading Value + ATT loss + Cable loss
- Conducted Output Power(Average) = Reading Value + ATT loss + Cable loss + Duty Cycle Factor

#### 7.4. Power Spectral Density

##### Limit

The transmitter power density average over 1-second interval shall not be greater than 8dBm in any 3 kHz BW.

##### Test Configuration

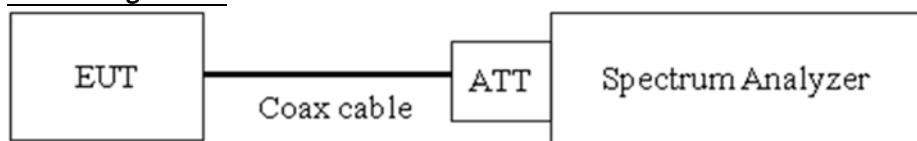

##### Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure 8.4 in KDB 558074 v05r02, Procedure 11.10 in ANSI 63.10-2013.

The spectrum analyzer is set to :

- 1) Set analyzer center frequency to DTS channel center frequency.
- 2) Set span to at least 1.5 times the OBW.
- 3)  $RBW = 3 \text{ kHz} \leq RBW \leq 100 \text{ kHz}$ .
- 4)  $VBW \geq 3 \times RBW$ .
- 5) Sweep = auto couple
- 6) Detector = Peak
- 7) Trace mode = max hold
- 8) Allow trace to fully stabilize.
- 9) Use the peak marker function to determine the maximum amplitude level.
- 10) Use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

##### Sample Calculation

- Power Spectral Density = Reading Value + ATT loss + Cable loss


## 7.5. Conducted Band Edge(Out of Band Emissions) & Conducted Spurious Emissions

### Limit

The maximum conducted (peak) output power was used to demonstrate compliance, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20dBc relative to the maximum in-band peak PSD level in 100 kHz.

[ Conducted > 20dBc]

### Test Configuration

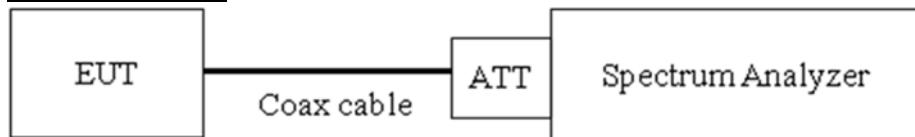

### Test Procedure

The transmitter output is connected to the spectrum analyzer.

(Procedure 8.5 in KDB 558074 v05r02, Procedure 11.11 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW  $\geq 3 \times$  RBW
- 3) Set span to encompass the spectrum to be examined
- 4) Detector = Peak
- 5) Trace Mode = max hold
- 6) Sweep time = auto couple
- 7) Ensure that the number of measurement points  $\geq 2 \times$  Span/VBW
- 8) Allow trace to fully stabilize.
- 9) Use peak marker function to determine the maximum amplitude level.

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the lowest, middle, and highest channels.

**Factors for frequency**

Freq(MHz)	Factor(dB)
30	21.05
100	21.10
200	21.14
300	21.19
400	21.25
500	21.25
600	21.26
700	21.27
800	21.28
900	21.30
1000	21.35
2000	21.50
2400	21.53
2412	21.55
2437	21.55
2462	21.55
2500	21.54
3000	21.64
4000	21.72
5000	21.79
5700	21.80
5800	21.87
6000	21.88
7000	22.01
8000	22.01
9000	22.09
10000	22.19
11000	22.28
12000	22.37
13000	22.38
14000	22.41
15000	22.51
16000	22.59
17000	22.80
18000	22.93
19000	22.85
20000	22.52
21000	22.65
22000	22.64
23000	22.65
24000	22.66
25000	22.76

Note : 1. 2 400 ~ 2 500 MHz is fundamental frequency range.


2. Factor = Attenuator loss(20 dB) + Cable loss + EUT Cable loss

**7.6. Radiated Test**Limit


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Configuration


Below 30 MHz

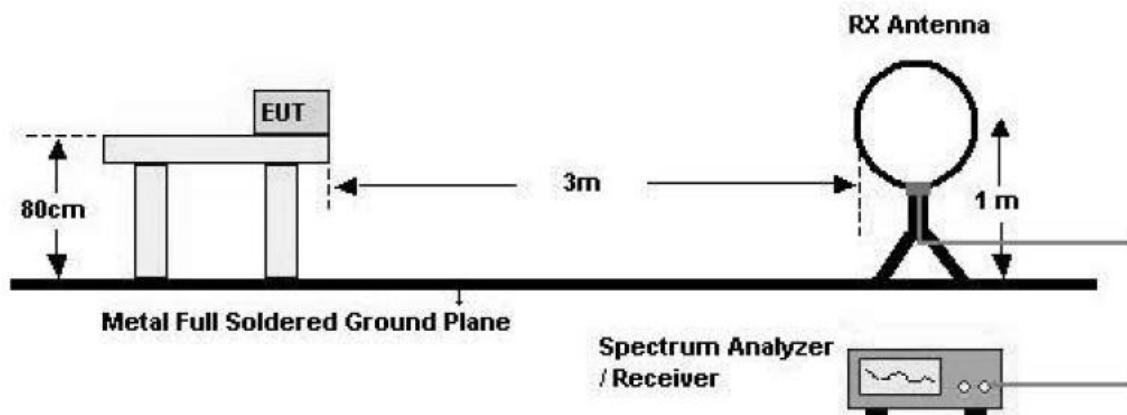

30 MHz - 1 GHz

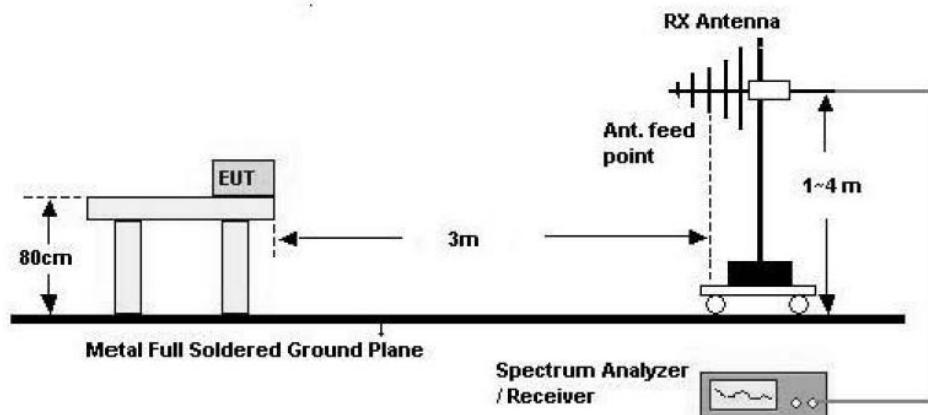

Above 1 GHz

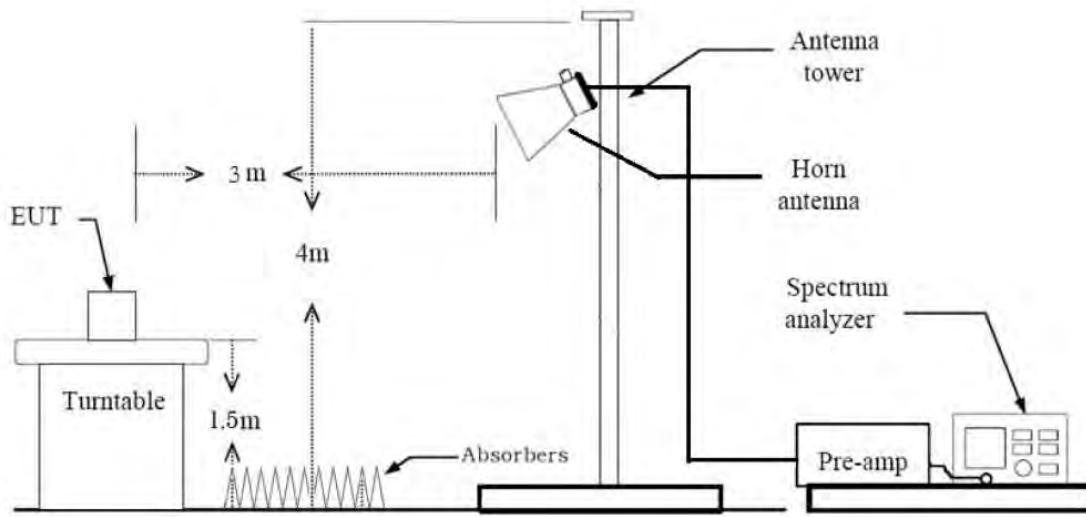

#### Test Procedure of Radiated spurious emissions(Below 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor( $0.009 \text{ MHz} - 0.490 \text{ MHz}$ ) =  $40\log(3 \text{ m}/300 \text{ m}) = -80 \text{ dB}$   
Measurement Distance : 3 m
7. Distance Correction Factor( $0.490 \text{ MHz} - 30 \text{ MHz}$ ) =  $40\log(3 \text{ m}/30 \text{ m}) = -40 \text{ dB}$   
Measurement Distance : 3 m
8. Spectrum Setting
  - Frequency Range = 9 kHz ~ 30 MHz
  - Detector = Peak
  - Trace = Maxhold
  - RBW = 9 kHz
  - VBW  $\geq 3 \times \text{RBW}$
9. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin  $> 20 \text{ dB}$  from the applicable limit) and considered

that's already beyond the background noise floor.

#### **KDB 414788 OFS and Chamber Correlation Justification**

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

#### **Test Procedure of Radiated spurious emissions(Below 1GHz)**

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. The Hybrid antenna was placed at a location 3m from the EUT, which is varied from 1m to 4m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.

#### **6. Spectrum Setting**

##### **(1) Measurement Type(Peak):**

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 100 kHz
- VBW  $\geq$  3 x RBW

##### **(2) Measurement Type(Quasi-peak):**

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Quasi-Peak
- RBW = 120 kHz

In general, (1) is used mainly

7. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L)
8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

**Test Procedure of Radiated spurious emissions (Above 1 GHz)**

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting (Method 8.6 in KDB 558074 v05r02, Procedure 11.12 in ANSI 63.10-2013)
  - (1) Measurement Type(Peak):
    - Measured Frequency Range : 1 GHz – 25 GHz
    - Detector = Peak
    - Trace = Max hold
    - RBW = 1 MHz
    - VBW  $\geq$  3 x RBW
  - (2) Measurement Type(Average):
    - Duty cycle < 98%, duty cycle variations are less than  $\pm 2\%$
    - Measured Frequency Range : 1 GHz – 25 GHz
    - Detector = RMS
    - Averaging type = power (*i.e.*, RMS)
    - RBW = 1 MHz
    - VBW  $\geq$  3 x RBW
    - Sweep time = auto.
    - Trace mode = average (at least 100 traces).
    - Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.
- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1
9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
10. Distance extrapolation factor =  $20\log(\text{test distance} / \text{specific distance})$  (dB)

11. Total (Measurement Type : Peak)

= Peak Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

Total (Measurement Type : Average)

= Average Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G)  
+ Distance Factor(D.F) + Duty Cycle Factor

**Test Procedure of Radiated Restricted Band Edge**

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting
  - (1) Measurement Type(Peak):
    - Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
    - Detector = Peak
    - Trace = Max hold
    - RBW = 1 MHz
    - VBW  $\geq$  3 x RBW
  - (2) Measurement Type(Average):
    - Duty cycle < 98%, duty cycle variations are less than  $\pm 2\%$
    - Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
    - Detector = RMS
    - Averaging type = power (*i.e.*, RMS)
    - RBW = 1 MHz
    - VBW  $\geq$  3 x RBW
    - Sweep time = auto.
    - Trace mode = average (at least 100 traces).
    - Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.
    - Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.
9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
10. Distance extrapolation factor =  $20\log(\text{test distance} / \text{specific distance})$  (dB)

11. Total(Measurement Type : Peak

= Peak Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

Total(Measurement Type : Average)

= Average Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

+ Duty Cycle Factor

## 7.7. AC Power line Conducted Emissions

### Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56 <sup>(a)</sup>	56 to 46 <sup>(a)</sup>
0.50 to 5	56	46
5 to 30	60	50

<sup>(a)</sup>Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

### Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

### Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

### Sample Calculation

Quasi-peak(Final Result) = Reading Value + Correction Factor

## 7.8. Worst case configuration and mode

### Radiated Test

1. All modes of operation were investigated and the worst case configuration results are reported.

- Mode : Stand alone, Stand alone+ Travel adaptor
- Worstcase : Stand alone

2. EUT Axis:

- Radiated Spurious Emissions : Y
- Radiated Restricted Band Edge : Y

3. All packet length of operation were investigated and the test results are worst case in lowest packet length.

- Worst case : 125k Bit/s 37Bytes (LE Data Packet Length Extension : Not Supported)

4. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.

- Position : Horizontal, Vertical, Parallel to the ground plane

5. FX100, FX200 were tested and the worst case results are reported.

- Worst case : FX100

### AC Power line Conducted Emissions

1. All modes of operation were investigated and the worst case configuration results are reported.

- Mode : Stand alone + Travel adaptor + Notebook
- Worst case : Stand alone + Travel adaptor + Notebook

2. FX200 were tested and the worst case results are reported.

- Worst case : FX200(AC)

### Conducted test

1. The EUT was configured with packet length of highest power.

- EUT supported All mode was tested.
- B.E & C.S.E (Worst case : 125kBit & 2M 37Bytes)

2. FX100, FX200 were tested and the worst case results are reported.

- Worst case : FX100

**8. SUMMARY TEST OF RESULTS****FCC Part**

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	§ 15.247(a)(2)	> 500 kHz		PASS
Conducted Maximum Output Power	§ 15.247(b)(3)	< 1 Watt		PASS
Power Spectral Density	§ 15.247(e)	< 8 dBm / 3 kHz Band	Conducted	PASS
Band Edge (Out of Band Emissions)	§ 15.247(d)	Conducted > 20 dBc		PASS
AC Power line Conducted Emissions	§ 15.207	cf. Section 7.7		PASS
Radiated Spurious Emissions	§ 15.247(d), 15.205, 15.209	cf. Section 7.6		PASS
Radiated Restricted Band Edge	§ 15.247(d), 15.205, 15.209	cf. Section 7.6	Radiated	PASS

## 9. TEST RESULT

### 9.1 DUTY CYCLE

Data rate (Bit/s)	Packet length (Byte)	$T_{on}$ (ms)	$T_{total}$ (ms)	Duty Cycle	Duty Cycle Factor (dB)
1M	37	2.113	3.380	0.6252	2.04
2M	37	1.067	3.273	0.3259	4.87
125k	37	8.790	10.380	0.8468	0.72
500k	37	2.500	4.370	0.5721	2.43

### 9.2 DUTY CYCLE CORRECTION

#### Worst case) Duty Cycle Correction Factor

125kbit/s


- a.  $T_{total}$  [ms] = 10.380 ms
- b. Number of hits =  $100 / T_{total} + 1 = 10$
- c. Worst case 100ms operation = 8.790 ms
- d. Duty Cycle Correction Factor(DCCF)  
 $= 20 \log (\text{number of hits} * (\text{worst case 100ms operation} / 100ms)) = -1.12 \text{ dB}$

2Mbit/s

- e.  $T_{total}$  [ms] = 3.273 ms
- f. Number of hits =  $100 / T_{total} + 1 = 31$
- g. Worst case 100ms operation = 1.067 ms
- h. Duty Cycle Correction Factor(DCCF)  
 $= 20 \log (\text{number of hits} * (\text{worst case 100ms operation} / 100ms)) = -9.61 \text{ dB}$


## ▣ 1M Bit/s(37 Byte) Test Plots

Duty Cycle (Low-CH 0)

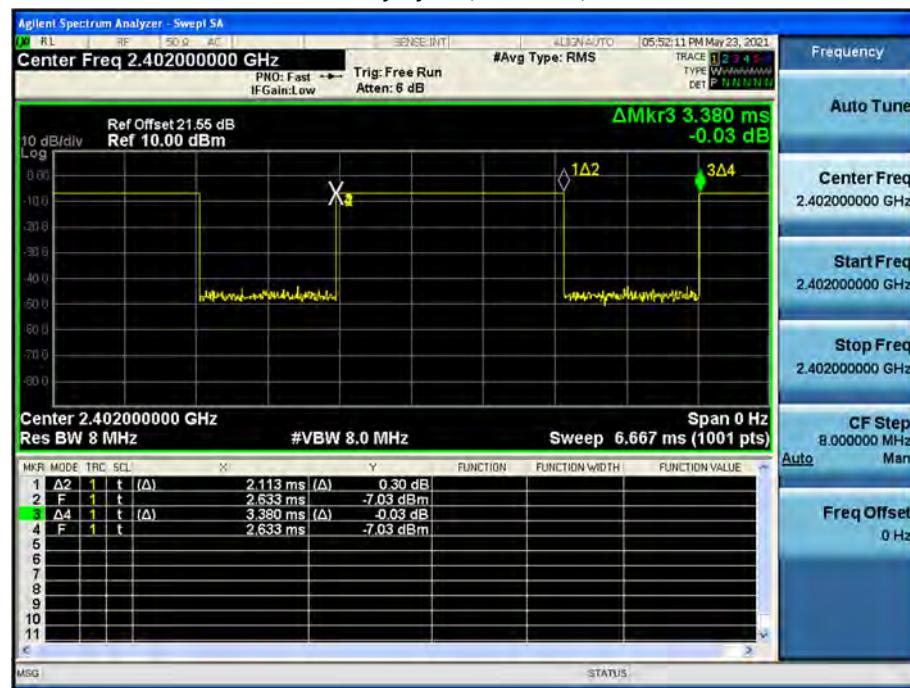


## ▣ 2M Bit/s(37 Byte) Test Plots

Duty Cycle (Low-CH 0)

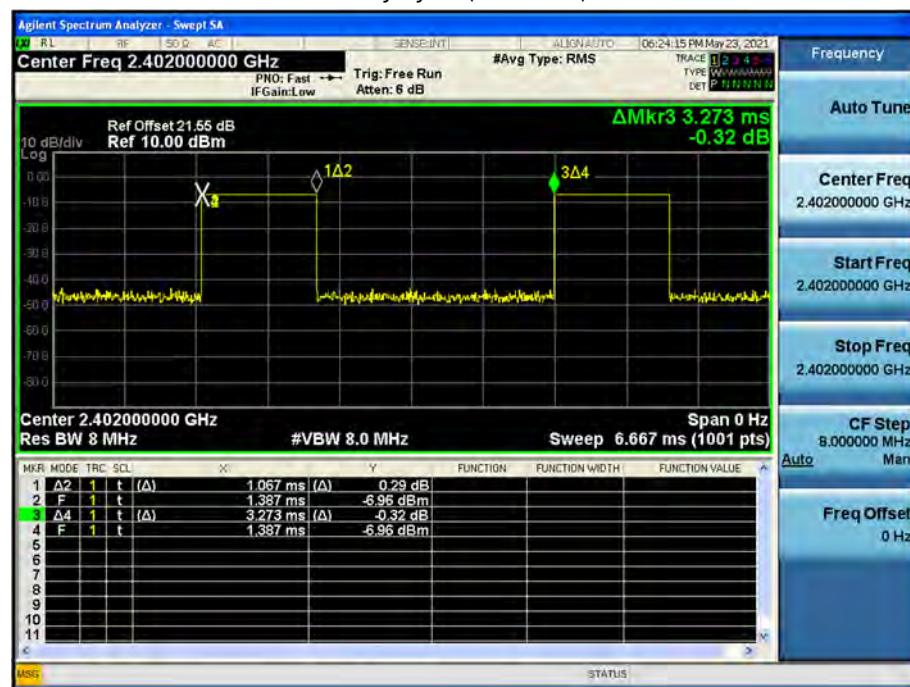


## ▣ 125k Bit/s(37 Byte) Test Plots

Duty Cycle (Low-CH 0)

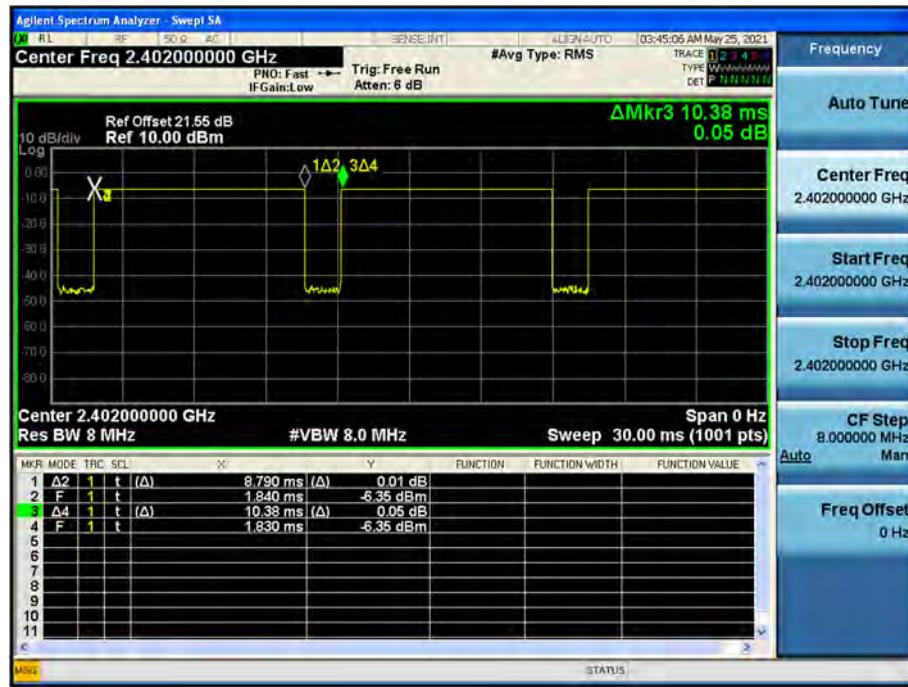

## ▣ 500k Bit/s(37 Byte) Test Plots

Duty Cycle (Low-CH 0)

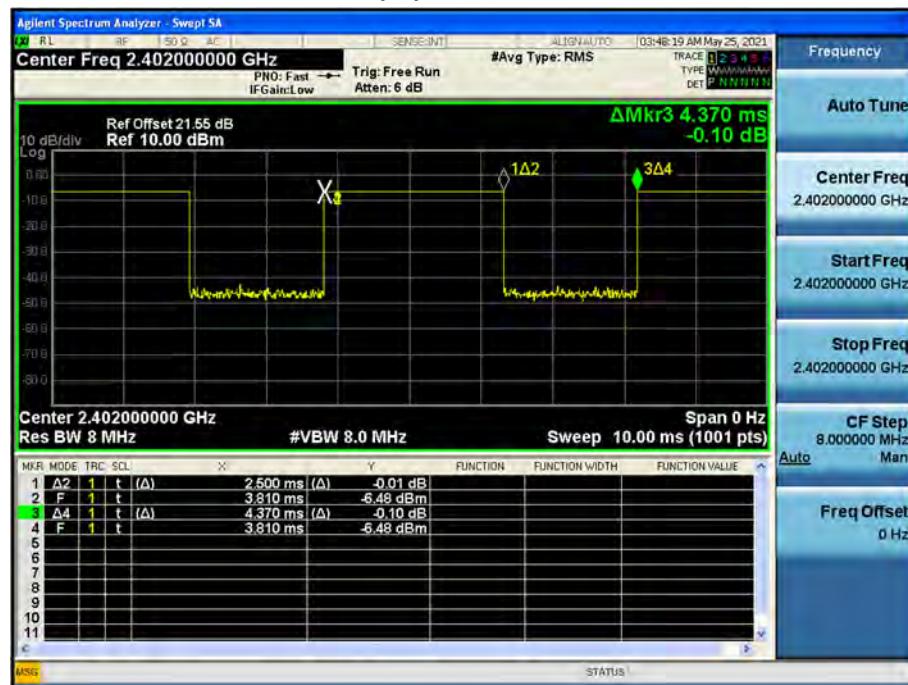

**9.3 6dB BANDWIDTH**

Mode (Bit/s)	Channel	6 dB Bandwidth (kHz)	Limit (kHz)
1M 37Byte	0	729.6	> 500
	19	705.6	
	39	714.2	
2M 37Byte	0	1204.6	> 500
	19	1109.2	
	39	1089.3	
125k 37Byte	0	727.7	> 500
	19	619.4	
	39	618.9	
500k 37Byte	0	692.4	> 500
	19	704.5	
	39	707.0	

## ▣ 1M Bit/s(37 Byte) Test Plots

6 dB Bandwidth plot (Low-CH 0)



6 dB Bandwidth plot (Mid-CH 19)



## 6 dB Bandwidth plot (High-CH 39)



## ▣ 2M Bit/s(37 Byte) Test Plots

6 dB Bandwidth plot (Low-CH 0)



6 dB Bandwidth plot (Mid-CH 19)



## 6 dB Bandwidth plot (High-CH 39)



## □ 125k Bit/s(37 Byte) Test Plots

6 dB Bandwidth plot (Low-CH 0)



6 dB Bandwidth plot (Mid-CH 19)



6 dB Bandwidth plot (High-CH 39)



## ▣ 500k Bit/s(37 Byte) Test Plots

6 dB Bandwidth plot (Low-CH 0)



6 dB Bandwidth plot (Mid-CH 19)



6 dB Bandwidth plot (High-CH 39)



**9.4 OUTPUT POWER****Peak Power****- FX100(DC)**

Data rate (Bit/s)	Packet length (Byte)	LE Mode		Measured Power(dBm )	Limit (dBm )	PLS
		Frequency [MHz]	Channel			
1M	37	2402	0	-6.419	30	0
		2440	19	-5.729		2
		2480	39	-6.144		2
2M	37	2402	0	-6.739	30	3
		2440	19	-5.694		2
		2480	39	-6.053		2
125k	37	2402	0	-6.427	30	0
		2440	19	-4.666		2
		2480	39	-4.890		2
500k	37	2402	0	-6.427	30	0
		2440	19	-5.898		2
		2480	39	-6.180		2

## - FX200(AC)

Data rate (Bit/s)	Packet length (Byte)	LE Mode		Measured Power(dBm) )	Limit (dBm) )	PLS
		Frequency [MHz]	Channel			
1M	37	2402	0	-6.374	30	-4
		2440	19	-4.899		-4
		2480	39	-5.558		-4
2M	37	2402	0	-6.325	30	-4
		2440	19	-4.878		-4
		2480	39	-5.496		-4
125k	37	2402	0	-6.384	30	-4
		2440	19	-5.178		-4
		2480	39	-5.652		-4
500k	37	2402	0	-6.221	30	-4
		2440	19	-4.995		-4
		2480	39	-5.432		-4

Average Power

## - FX100(DC)

Data rate	Packet length	LE Mode		Measured Power (dBm)	Duty Cycle Factor	Result	Limit (dBm)	PL S
		(Bit/s)	(Byte)					
1M	37	2402	0	-8.62	2.04	-6.58	30	0
		2440	19	-8.12	2.04	<b>-6.08</b>		2
		2480	39	-8.37	2.04	-6.33		2
2M	37	2402	0	-11.76	4.87	-6.89	30	3
		2440	19	-10.68	4.87	<b>-5.81</b>		2
		2480	39	-11.19	4.87	-6.32		2
125k	37	2402	0	-7.15	0.72	-6.43	30	0
		2440	19	-5.69	0.72	<b>-4.97</b>		2
		2480	39	-5.75	0.72	-5.03		2
500k	37	2402	0	-9.03	2.43	-6.60	30	0
		2440	19	-8.42	2.43	<b>-5.99</b>		2
		2480	39	-8.83	2.43	-6.40		2

## - FX200(AC)

Data rate	Packet length	LE Mode		Measured Power (dBm)	Duty Cycle Factor	Result	Limit (dBm)	PL S
		(Bit/s)	(Byte)					
1M	37	2402	0	-8.75	2.04	-6.71	30	-4
		2440	19	-7.39	2.04	<b>-5.35</b>		-4
		2480	39	-7.89	2.04	-5.85		-4
2M	37	2402	0	-11.47	4.87	-6.60	30	-4
		2440	19	-10.13	4.87	<b>-5.26</b>		-4
		2480	39	-10.75	4.87	-5.88		-4
125k	37	2402	0	-7.25	0.72	-6.53	30	-4
		2440	19	-5.98	0.72	<b>-5.26</b>		-4
		2480	39	-6.62	0.72	-5.90		-4
500k	37	2402	0	-8.81	2.43	-6.38	30	-4
		2440	19	-7.67	2.43	<b>-5.24</b>		-4
		2480	39	-8.07	2.43	-5.64		-4

Note :

1. Power meter offset = Attenuator loss + Cable loss + EUT Cable Loss
2. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.  
So, 21.55 dB is offset for 2.4 GHz Band.

## 9.5 POWER SPECTRAL DENSITY

Frequency (MHz)	Channel No.	Mode (Bit/s)	Test Result	
			Measured Power(dBm)	Limit (dBm)
2402	0	1M 37 Byte	-19.120	8
2440	19		-19.055	
2480	39		-19.178	
2402	0	2M 37 Byte	-21.475	
2440	19		-21.805	
2480	39		-21.565	
2402	0	125k 37 Byte	-12.381	
2440	19		-10.618	
2480	39		-10.926	
2402	0	500k 37 Byte	-12.633	
2440	19		-12.100	
2480	39		-12.328	

**Note :**

1. Spectrum reading values are not plot data.

The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.

2. Spectrum offset = Attenuator loss + Cable loss + EUT Cable loss

3. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.

So, 21.55 dB is offset for 2.4 GHz Band.

## ▣ 1M Bit/s (37 Byte) Test Plots

Power Spectral Density (Low-CH 0)



Power Spectral Density (Mid-CH 19)



## Power Spectral Density (High-CH 39)



## ▣ 2M Bit/s (37 Byte) Test Plots

Power Spectral Density (Low-CH 0)



Power Spectral Density (Mid-CH 19)



## Power Spectral Density (High-CH 39)



## □ 125k Bit/s (37 Byte) Test Plots

Power Spectral Density (Low-CH 0)



Power Spectral Density (Mid-CH 19)



## Power Spectral Density (High-CH 39)



## ▣ 500k Bit/s (37 Byte) Test Plots

Power Spectral Density (Low-CH 0)



Power Spectral Density (Mid-CH 19)



## Power Spectral Density (High-CH 39)




## 9.6 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS

Test Result : please refer to the plot below.

In order to simplify the report, attached plots were only the worst case channel and data rate.

## ▣ 2M Bit/s (37 Byte) Test Plots -BandEdge

Low-CH 0

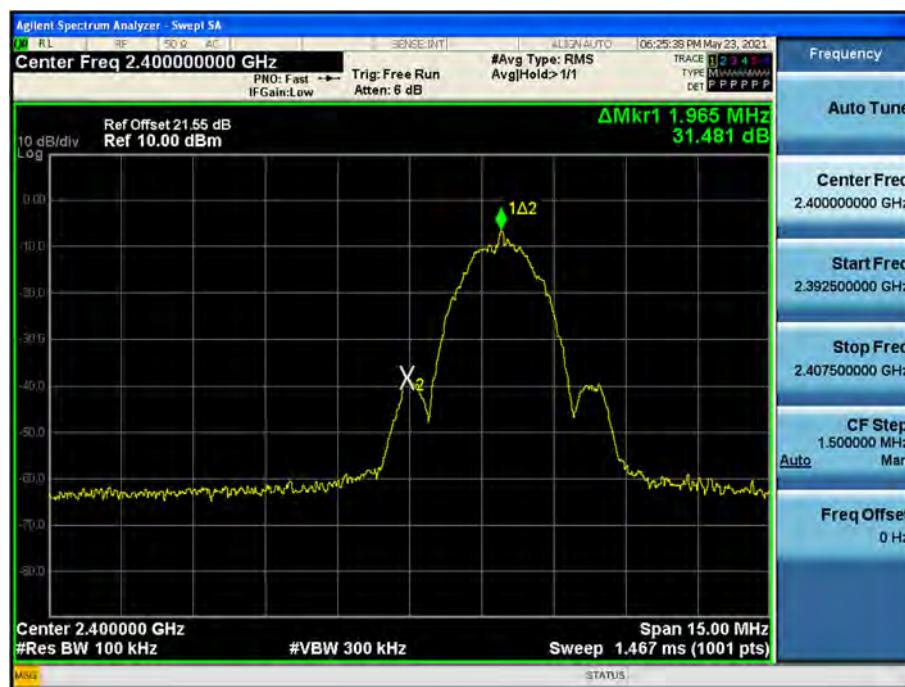


High-CH 39



## ▣ 2M Bit/s (37 Byte) Test Plots -Conducted Spurious Emission


30 MHz ~ 1 GHz

Conducted Spurious Emission (Low-CH 19)

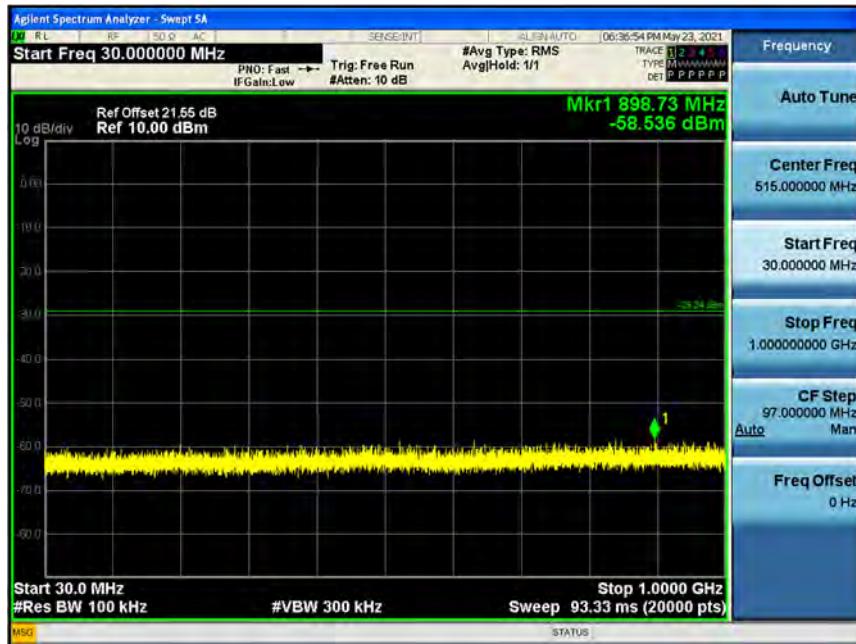


1 GHz ~ 3 GHz

Conducted Spurious Emission (Low-CH 19)

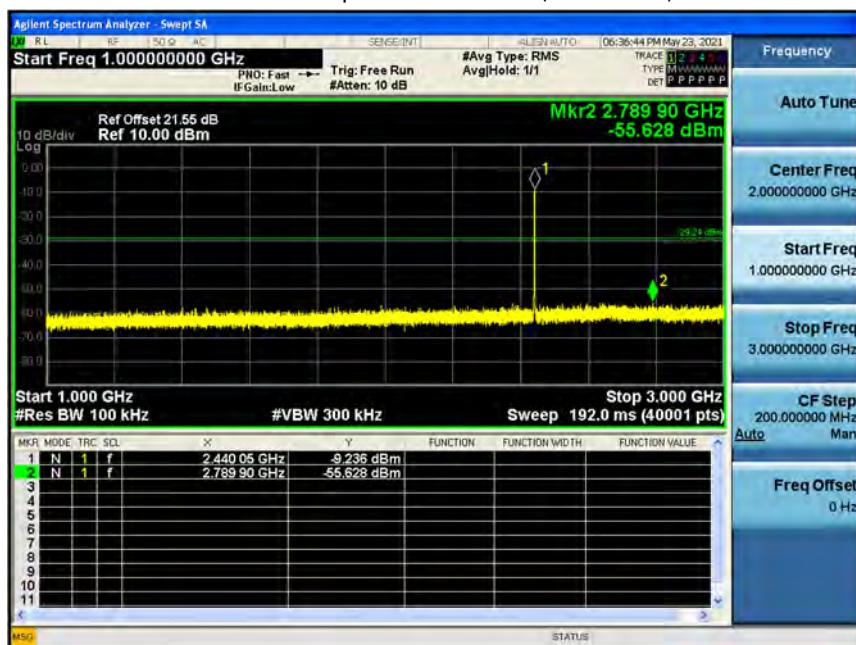


3 GHz ~ 5 GHz

## Conducted Spurious Emission (Low-CH 19)

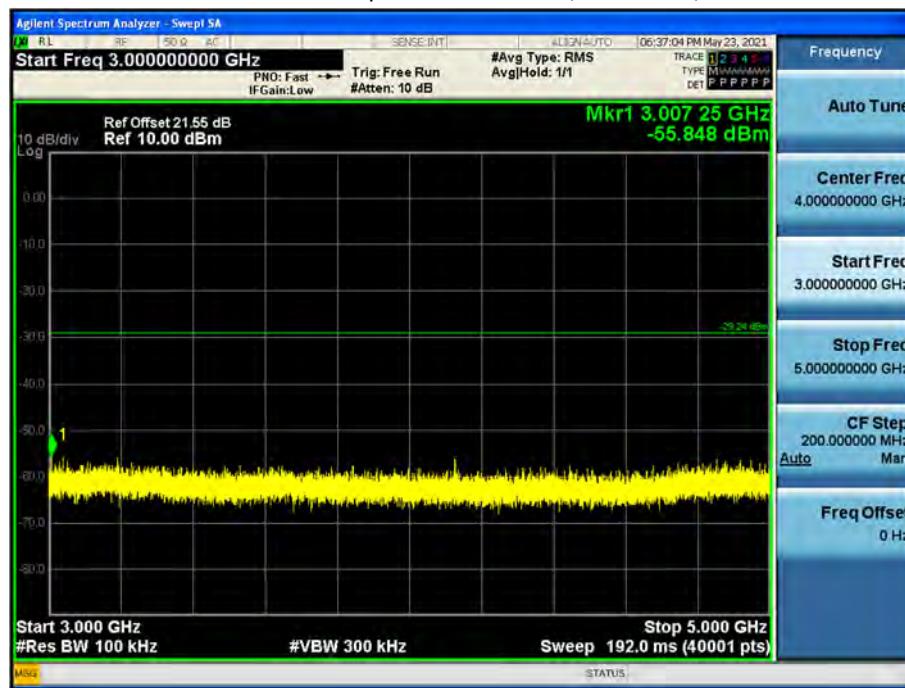


5 GHz ~ 7 GHz

## Conducted Spurious Emission (Low-CH 19)

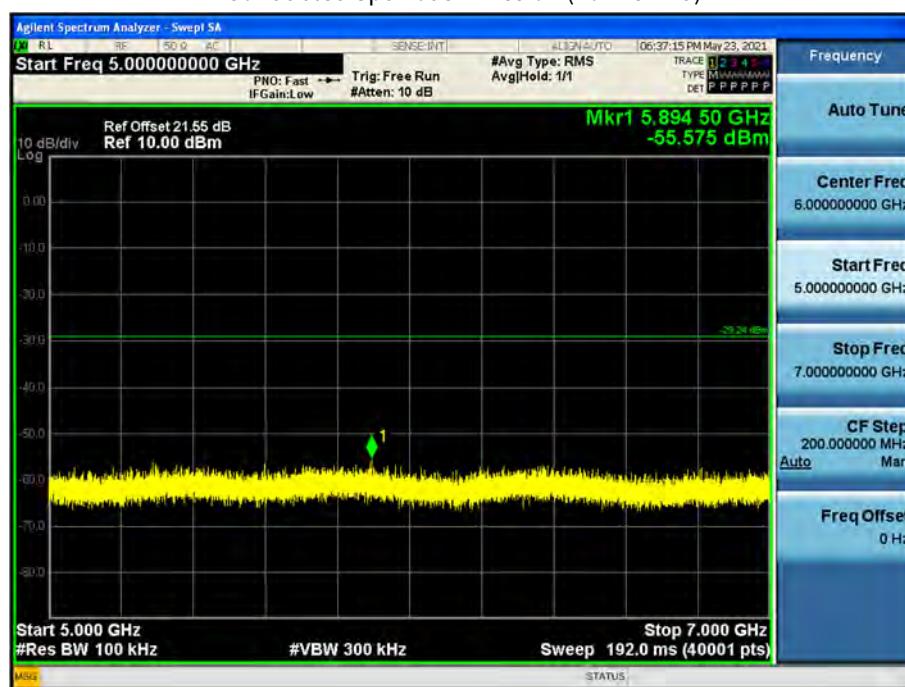


7 GHz ~ 9 GHz

## Conducted Spurious Emission (Low-CH 19)

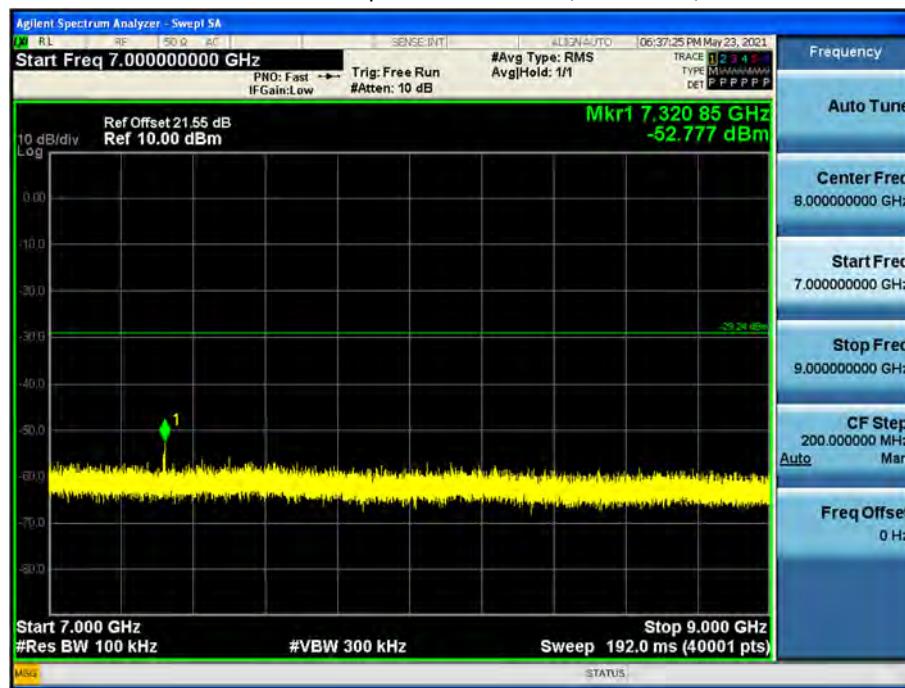


9 GHz ~ 11 GHz

## Conducted Spurious Emission (Low-CH 19)

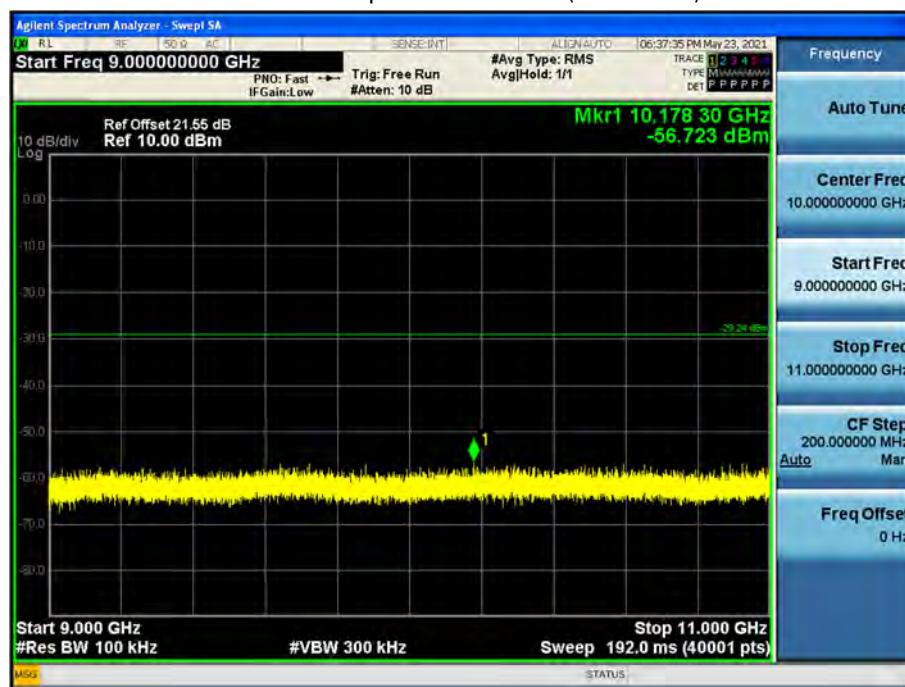


11 GHz ~ 13 GHz

## Conducted Spurious Emission (Low-CH 19)

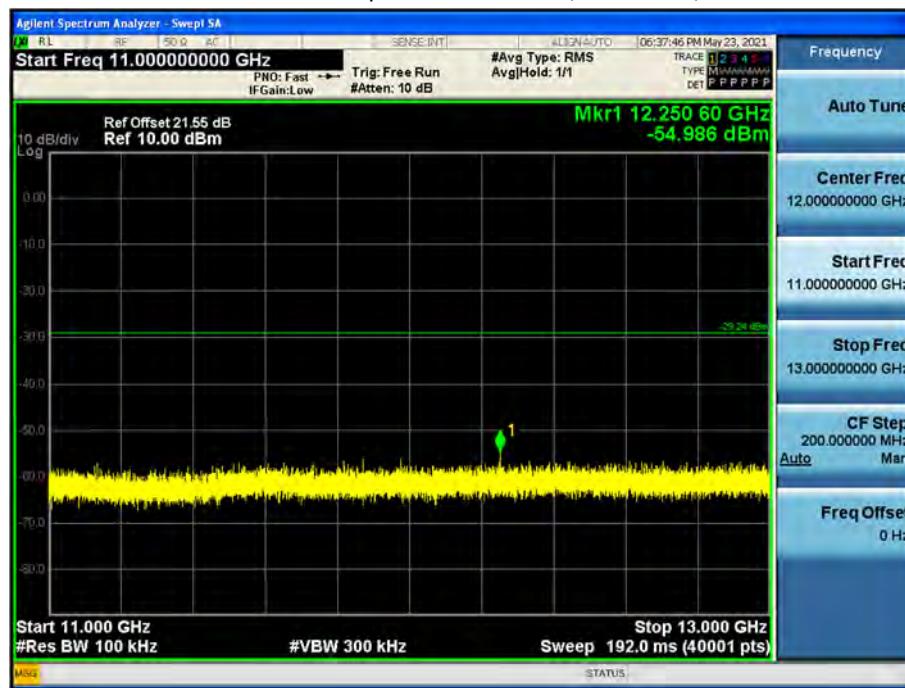


13 GHz ~ 15 GHz

## Conducted Spurious Emission (Low-CH 19)

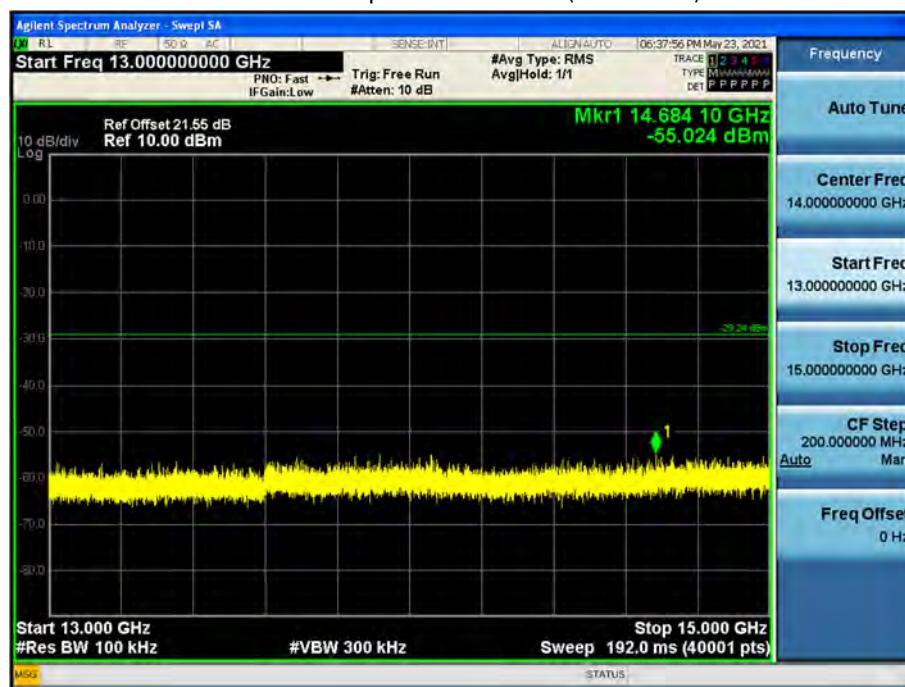


15 GHz ~ 17 GHz

## Conducted Spurious Emission (Low-CH 19)

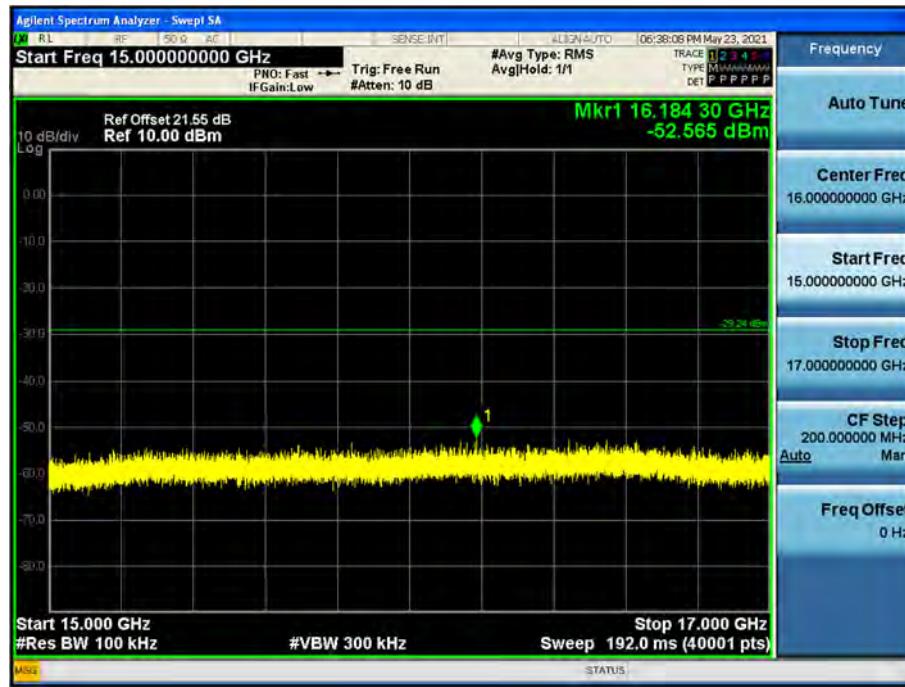

17 GHz ~ 19 GHz

## Conducted Spurious Emission (Low-CH 19)

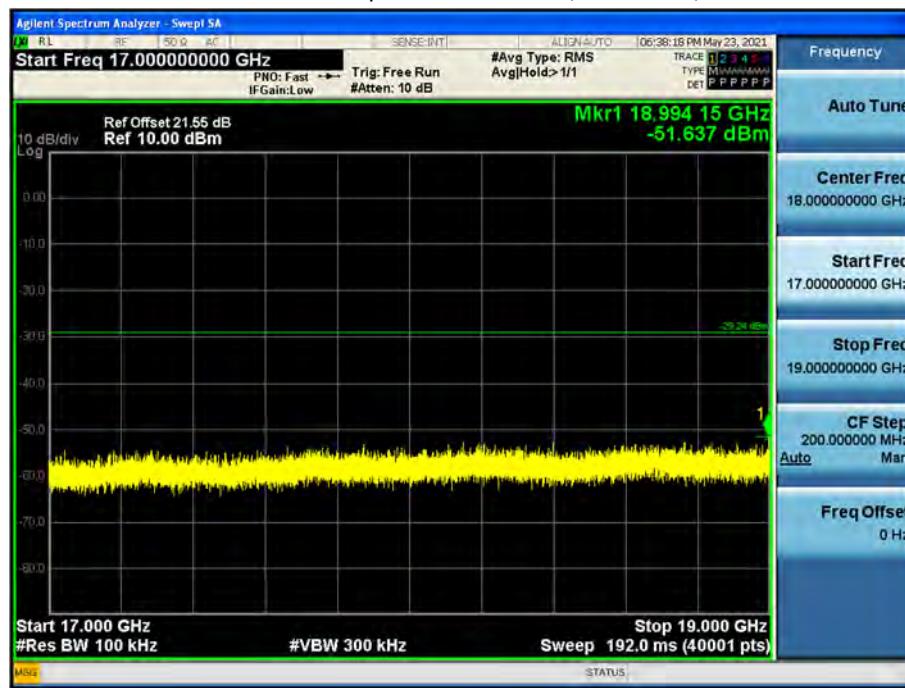


19 GHz ~ 21 GHz

## Conducted Spurious Emission (Low-CH 19)




21 GHz ~ 23 GHz

## Conducted Spurious Emission (Low-CH 19)

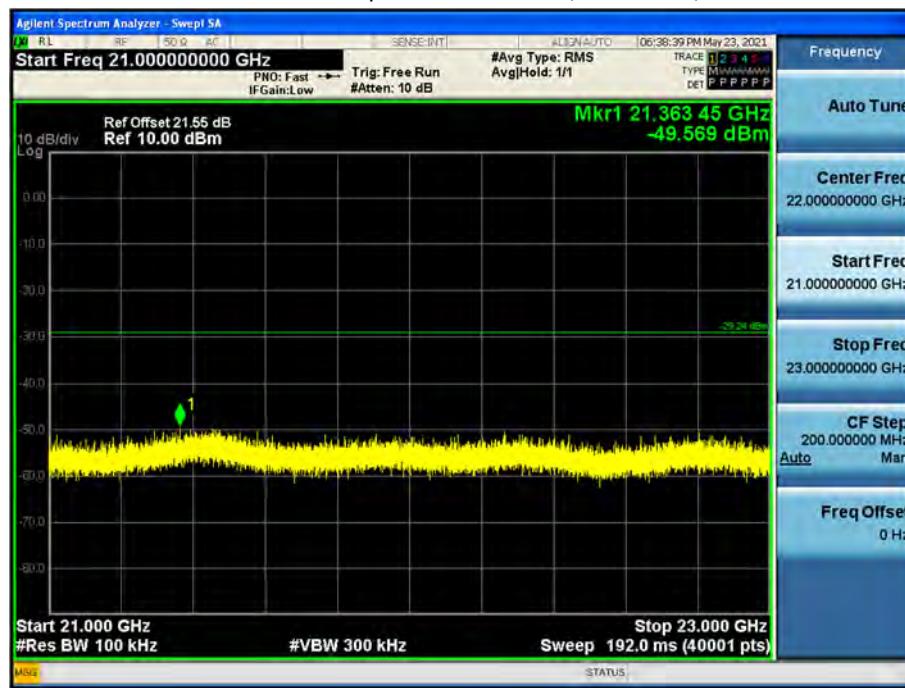

23 GHz ~ 25 GHz


## Conducted Spurious Emission (Low-CH 19)

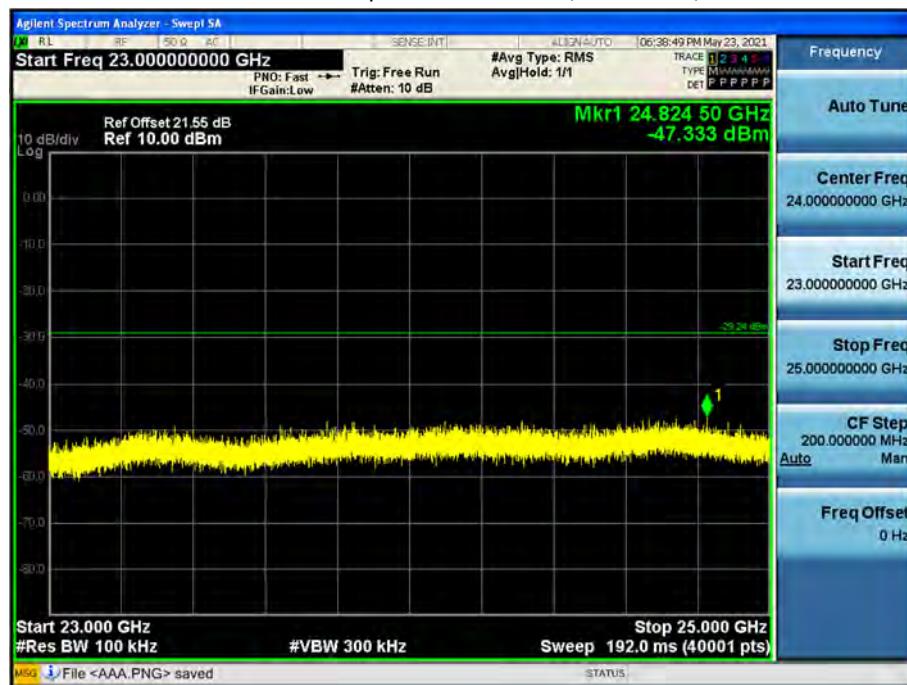

**▣ 125k Bit/s (37 Byte) Test Plots -Conducted Spurious Emission**


30 MHz ~ 1 GHz

Conducted Spurious Emission (Low-CH 19)

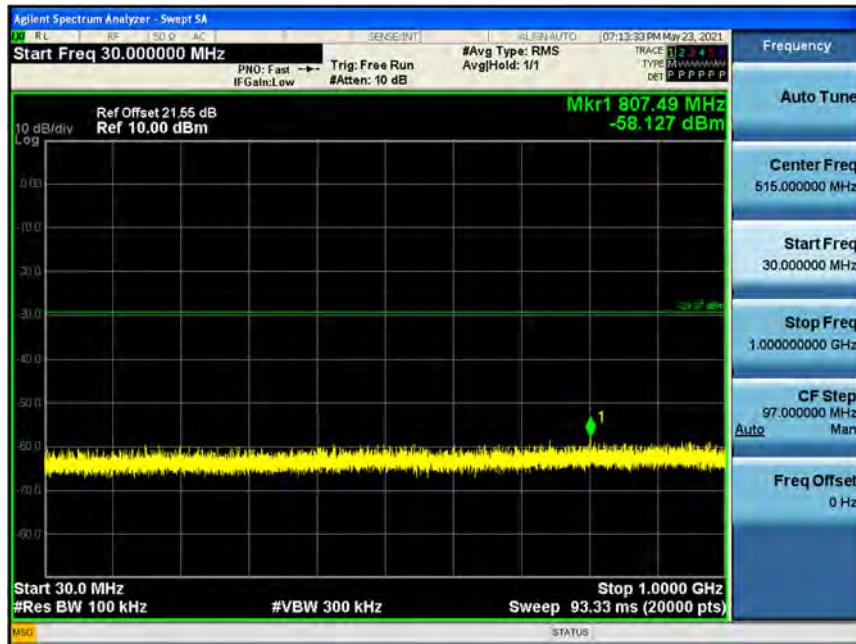


1 GHz ~ 3 GHz

Conducted Spurious Emission (Low-CH 19)

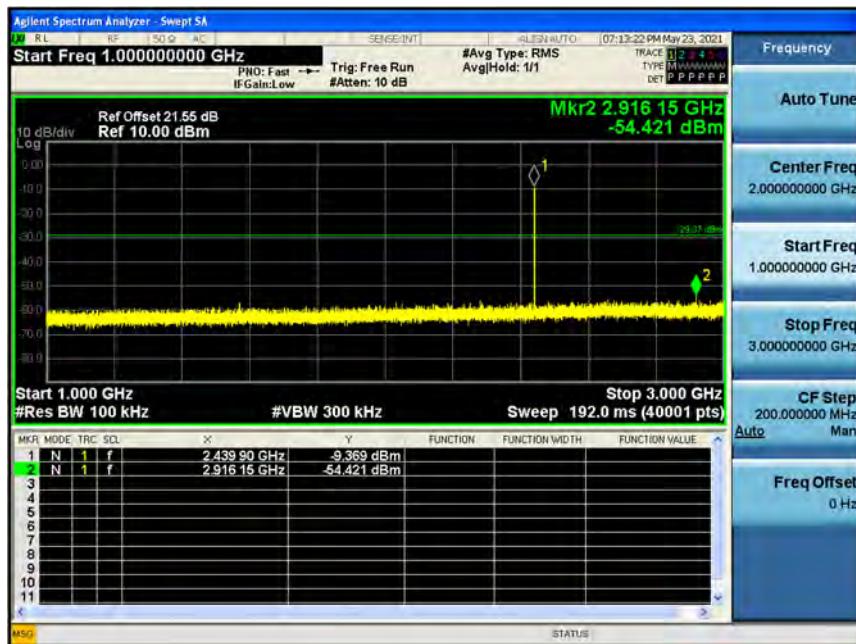


3 GHz ~ 5 GHz

## Conducted Spurious Emission (Low-CH 19)

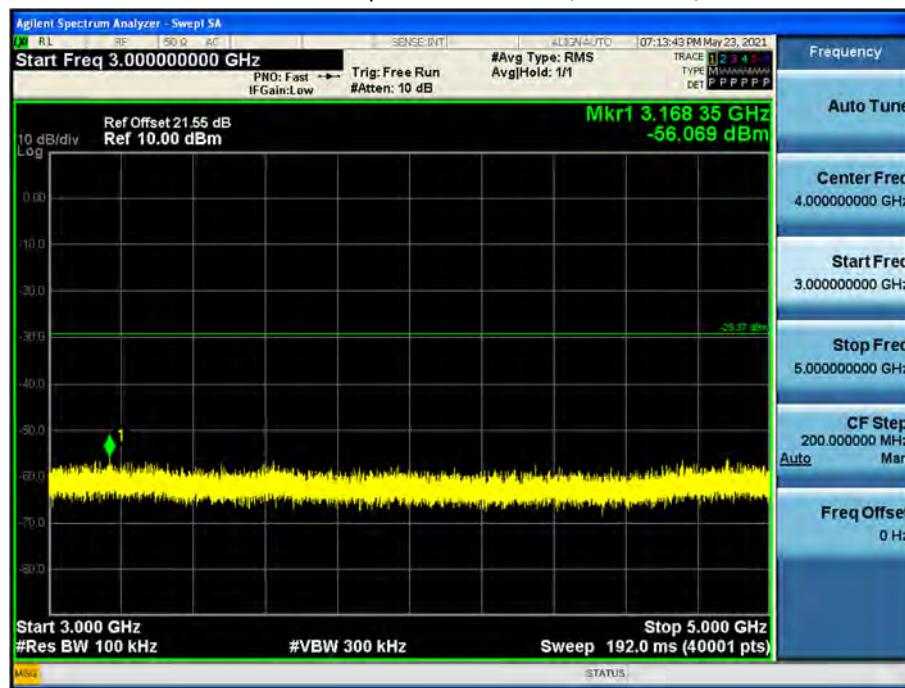


5 GHz ~ 7 GHz

## Conducted Spurious Emission (Low-CH 19)

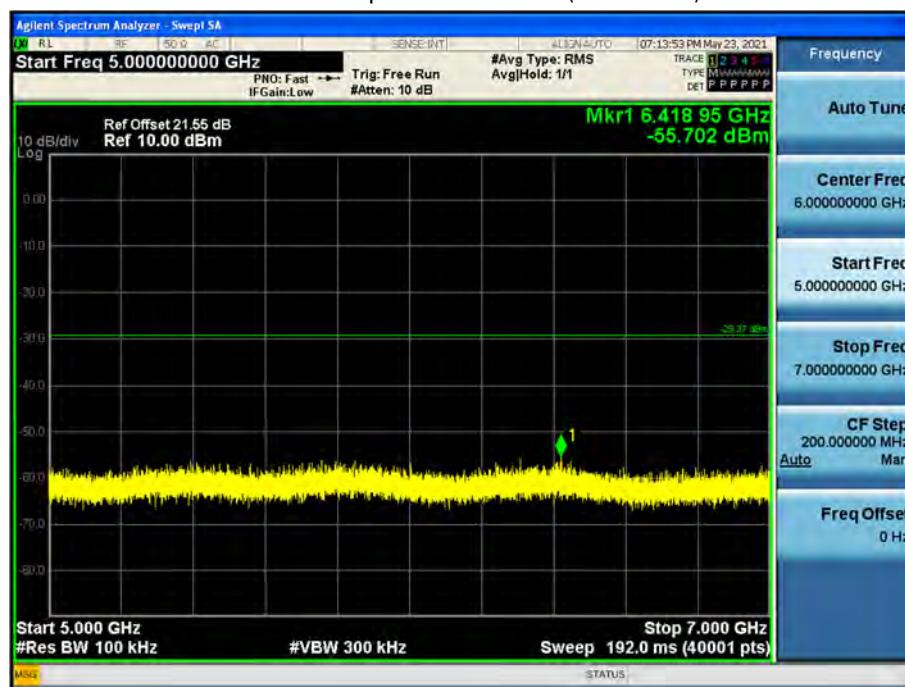


7 GHz ~ 9 GHz

## Conducted Spurious Emission (Low-CH 19)

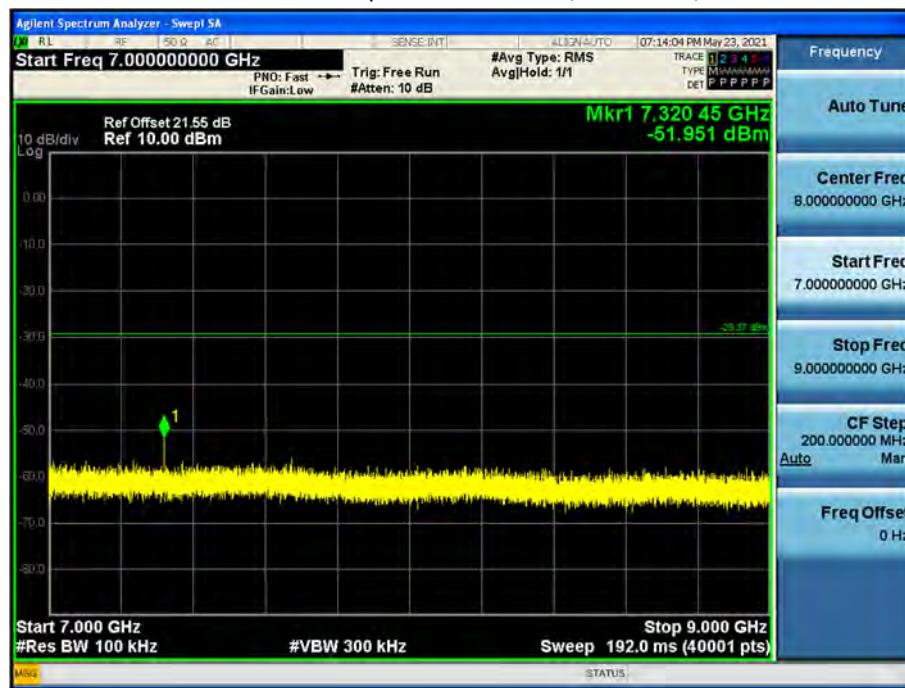


9 GHz ~ 11 GHz

## Conducted Spurious Emission (Low-CH 19)

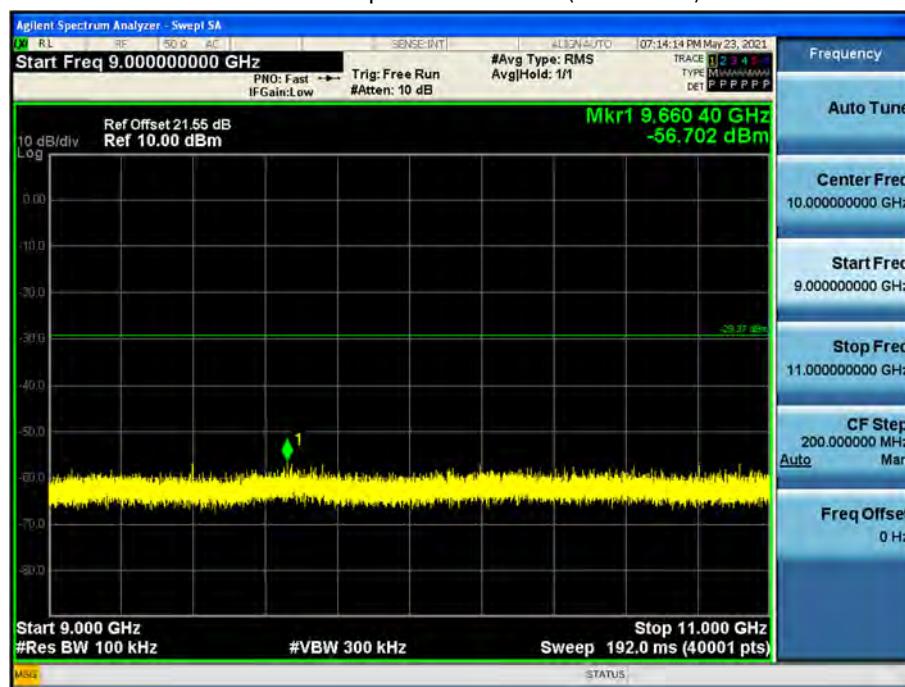


11 GHz ~ 13 GHz

## Conducted Spurious Emission (Low-CH 19)

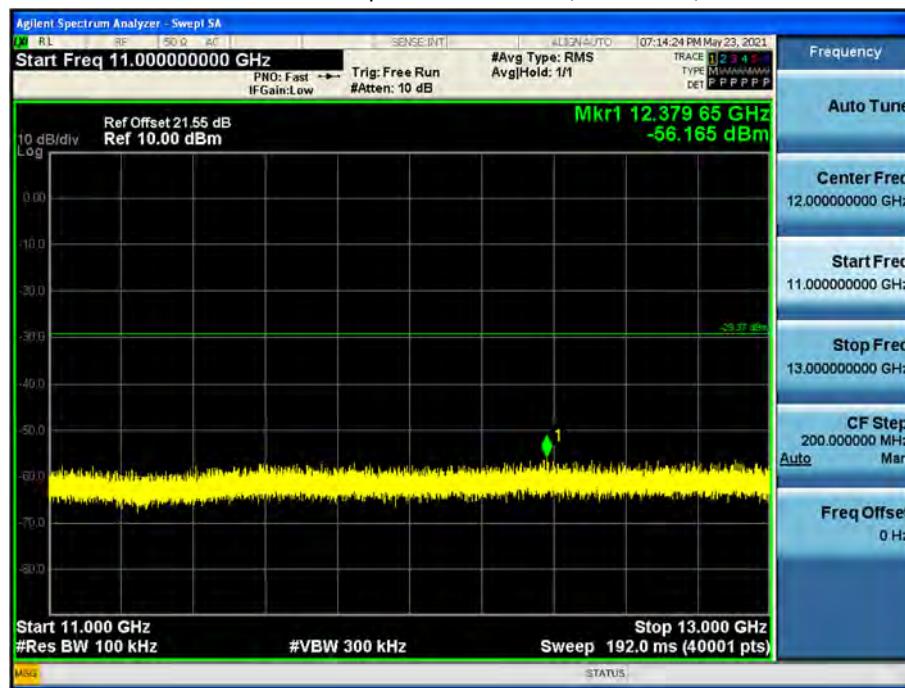


13 GHz ~ 15 GHz

## Conducted Spurious Emission (Low-CH 19)

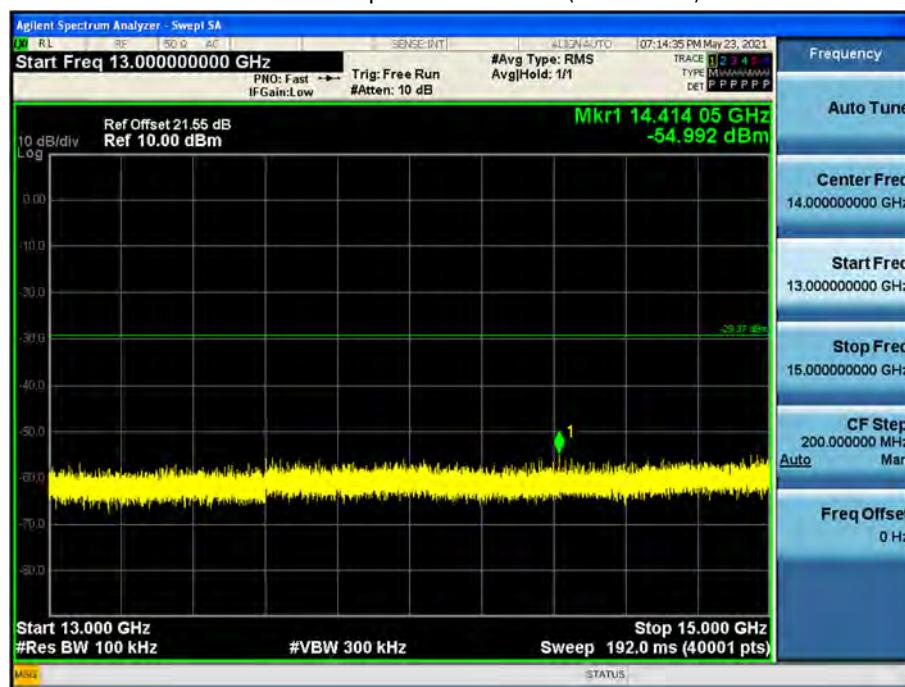


15 GHz ~ 17 GHz

## Conducted Spurious Emission (Low-CH 19)

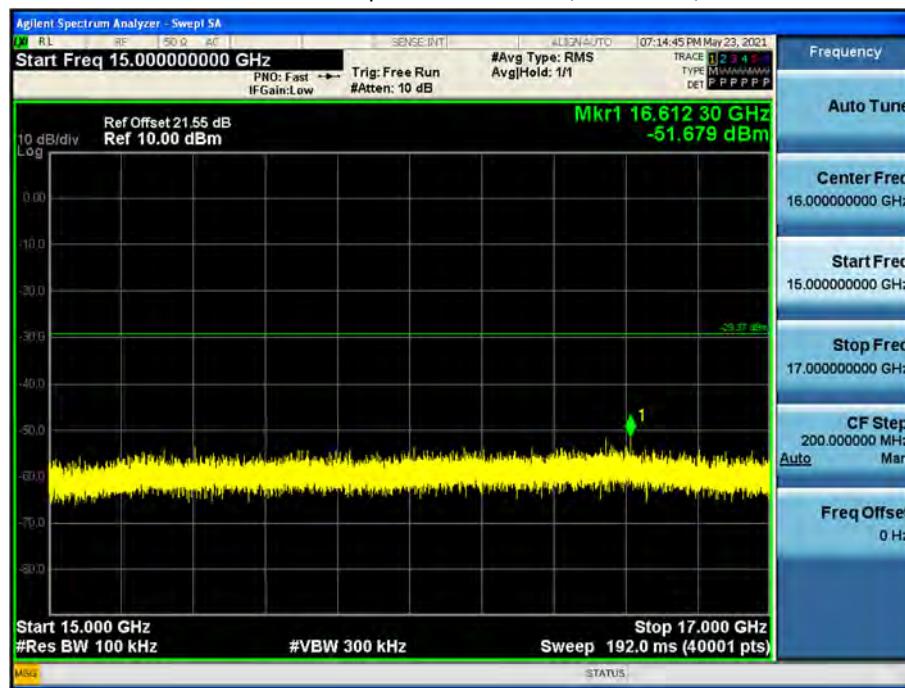


17 GHz ~ 19 GHz

## Conducted Spurious Emission (Low-CH 19)

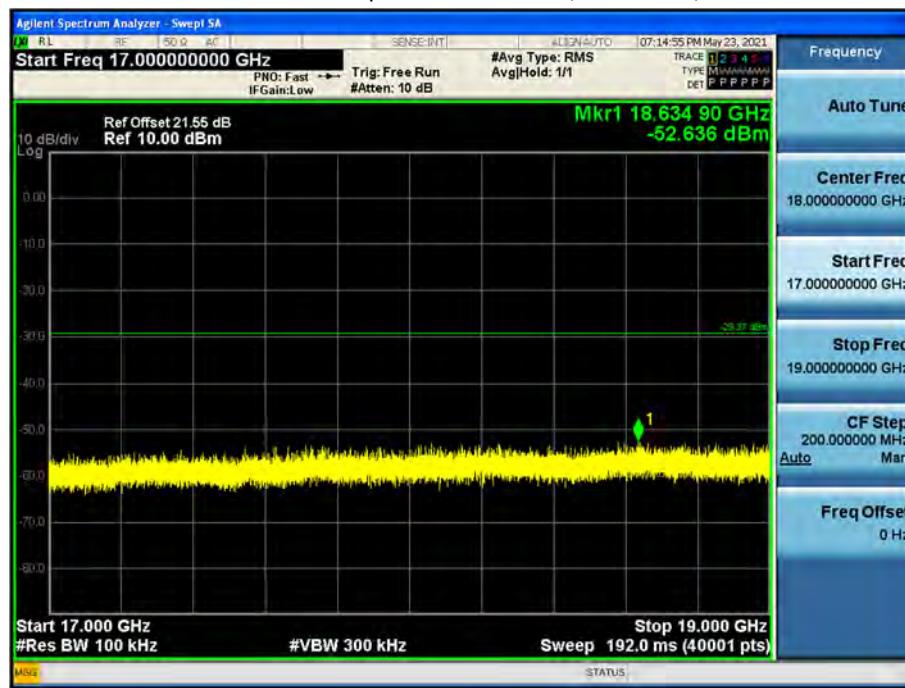

19 GHz ~ 21 GHz

## Conducted Spurious Emission (Low-CH 19)

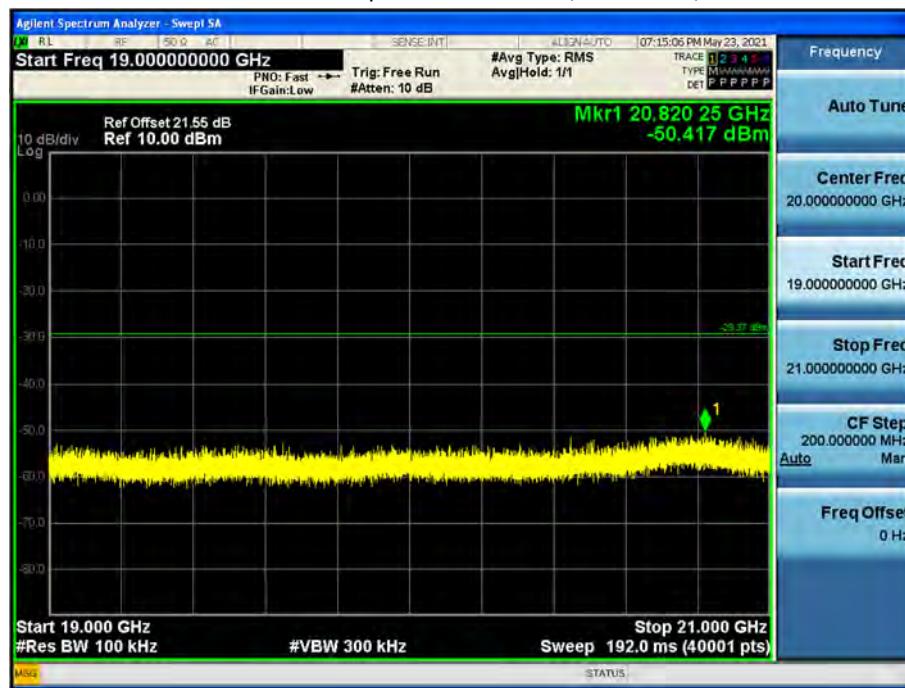


21 GHz ~ 23 GHz

## Conducted Spurious Emission (Low-CH 19)



23 GHz ~ 25 GHz

## Conducted Spurious Emission (Low-CH 19)

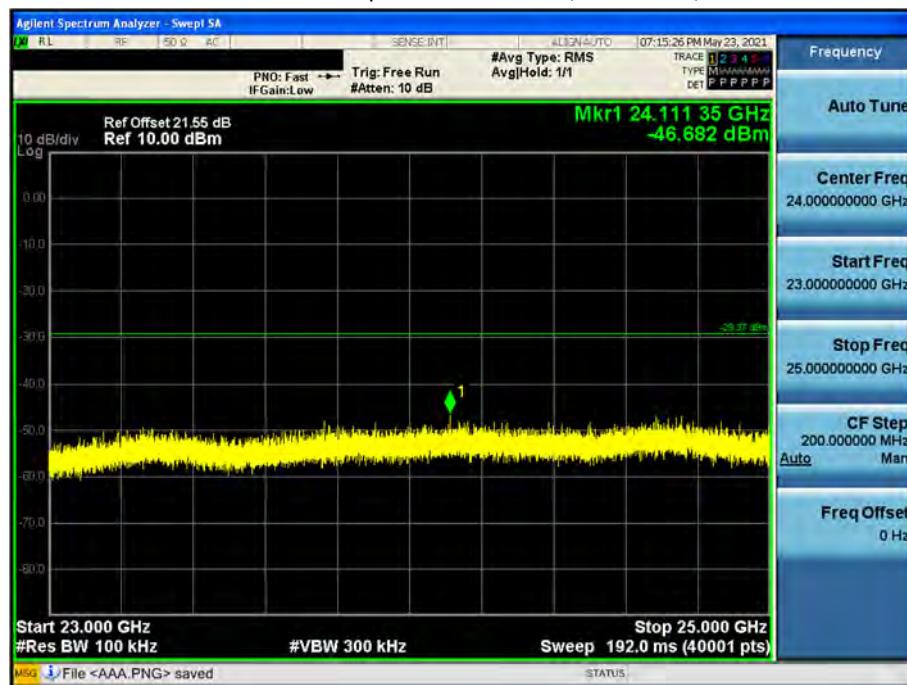

**9.7 RADIATED SPURIOUS EMISSIONS****Frequency Range : 9 kHz – 30MHz**

Frequenc y	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

**Note:**

1. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor =  $40\log(\text{specific distance} / \text{test distance})$  (dB)
3. Limit line = specific Limits (dBuV) + Distance extrapolation factor
4. Radiated test is performed with hopping off.

**Frequency Range : Below 1 GHz**

Frequenc y	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

**Note:**

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

Frequency Range : Above 1 GHz

- FX100(DC)

Mode : 125k Bit/s (37 Byte)

Operation Mode: CH Low

Frequency	Reading	Duty cycle Factor	DCCF Factor	A.F+C.L-A.G+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBuV]	[dB]	[dB]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	
4804	50.98	0.00	0.00	2.98	V	53.96	73.98	20.02	PK
4804	43.58	0.72	-1.12	2.98	V	46.16	53.98	7.82	AV
7206	46.28	0.00	0.00	9.57	V	55.85	73.98	18.13	PK
7206	36.88	0.72	-1.12	9.57	V	46.06	53.98	7.92	AV
4804	51.30	0.00	0.00	2.98	H	54.28	73.98	19.70	PK
4804	44.21	0.72	-1.12	2.98	H	46.79	53.98	7.19	AV
7206	45.81	0.00	0.00	9.57	H	55.38	73.98	18.60	PK
7206	36.07	0.72	-1.12	9.57	H	45.25	53.98	8.73	AV

Operation Mode: CH Mid

Frequency	Reading	Duty cycle Factor	DCCF Factor	A.F+C.L-A.G+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBuV]	[dB]	[dB]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	
4880	53.51	0.00	0.00	3.33	V	56.84	73.98	17.14	PK
4880	46.20	0.72	-1.12	3.33	V	49.13	53.98	4.85	AV
7320	47.66	0.00	0.00	10.20	V	57.86	73.98	16.12	PK
7320	39.09	0.72	-1.12	10.20	V	48.89	53.98	5.09	AV
4880	52.87	0.00	0.00	3.33	H	56.20	73.98	17.78	PK
4880	45.89	0.72	-1.12	3.33	H	48.82	53.98	5.16	AV
7320	48.41	0.00	0.00	10.20	H	58.61	73.98	15.37	PK
7320	39.41	0.72	-1.12	10.20	H	49.21	53.98	4.77	AV

Operation Mode: CH High

Frequency	Reading	Duty cycle	DCCF	A.F+C.L-	ANT.	Total	Limit	Margin	Measurement
		Factor	Factor	A.G+D.F	POL				
[MHz]	[dBuV]	[dB]	[dB]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	
4960	52.01	0.00	0.00	2.36	V	54.37	73.98	19.61	PK
4960	44.30	0.72	-1.12	2.36	V	46.27	53.98	7.71	AV
7440	48.97	0.00	0.00	10.72	V	59.69	73.98	14.29	PK
7440	40.20	0.72	-1.12	10.72	V	50.52	53.98	3.46	AV
4960	50.94	0.00	0.00	2.36	H	53.30	73.98	20.68	PK
4960	42.68	0.72	-1.12	2.36	H	44.65	53.98	9.33	AV
7440	47.50	0.00	0.00	10.72	H	58.22	73.98	15.76	PK
7440	38.66	0.72	-1.12	10.72	H	48.98	53.98	5.00	AV

**Note:** All data Worst case Duty Cycle Correction Factor applied.

## Mode : 2M Bit/s (37 Byte)

## Operation Mode: CH Low

Frequency	Reading	Duty cycle Factor	DCCF Factor	A.F+C.L-A.G+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBuV]	[dB]	[dB]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	
4804	48.19	0.00	0.00	2.98	V	51.17	73.98	22.81	PK
4804	35.85	4.87	-9.61	2.98	V	34.09	53.98	19.89	AV
7206	43.95	0.00	0.00	9.57	V	53.52	73.98	20.46	PK
7206	30.67	4.87	-9.61	9.57	V	35.50	53.98	18.48	AV
4804	48.85	0.00	0.00	2.98	H	51.83	73.98	22.15	PK
4804	36.05	4.87	-9.61	2.98	H	34.29	53.98	19.69	AV
7206	43.58	0.00	0.00	9.57	H	53.15	73.98	20.83	PK
7206	30.51	4.87	-9.61	9.57	H	35.34	53.98	18.64	AV

## Operation Mode: CH Mid

Frequency	Reading	Duty cycle Factor	DCCF Factor	A.F+C.L-A.G+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBuV]	[dB]	[dB]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	
4880	46.79	0.00	0.00	3.33	V	50.12	73.98	23.86	PK
4880	33.68	4.87	-9.61	3.33	V	32.27	53.98	21.71	AV
7320	42.87	0.00	0.00	10.20	V	53.07	73.98	20.91	PK
7320	29.68	4.87	-9.61	10.20	V	35.13	53.98	18.85	AV
4880	46.07	0.00	0.00	3.33	H	49.40	73.98	24.58	PK
4880	32.22	4.87	-9.61	3.33	H	30.81	53.98	23.17	AV
7320	43.76	0.00	0.00	10.20	H	53.96	73.98	20.02	PK
7320	30.79	4.87	-9.61	10.20	H	36.24	53.98	17.74	AV


## Operation Mode: CH High

Frequency	Reading	Duty cycle	DCCF	A.F+C.L-	ANT.	Total	Limit	Margin	Measurement
		Factor	Factor	A.G+D.F	POL				
[MHz]	[dBuV]	[dB]	[dB]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	
4960	46.24	0.00	0.00	2.36	V	48.60	73.98	25.38	PK
4960	33.20	4.87	-9.61	2.36	V	30.82	53.98	23.16	AV
7440	44.56	0.00	0.00	10.72	V	55.28	73.98	18.70	PK
7440	31.87	4.87	-9.61	10.72	V	37.85	53.98	16.13	AV
4960	45.78	0.00	0.00	2.36	H	48.14	73.98	25.84	PK
4960	32.58	4.87	-9.61	2.36	H	30.20	53.98	23.78	AV
7440	45.35	0.00	0.00	10.72	H	56.07	73.98	17.91	PK
7440	32.15	4.87	-9.61	10.72	H	38.13	53.98	15.85	AV

**Note:** All data Worst case Duty Cycle Correction Factor applied.


## ■ Mode : 125k Bit/s (37 Byte) Test Plots (Worst case : Y-H)

Radiated Spurious Emissions plot – Average Reading (Ch.39 3rd Harmonic)

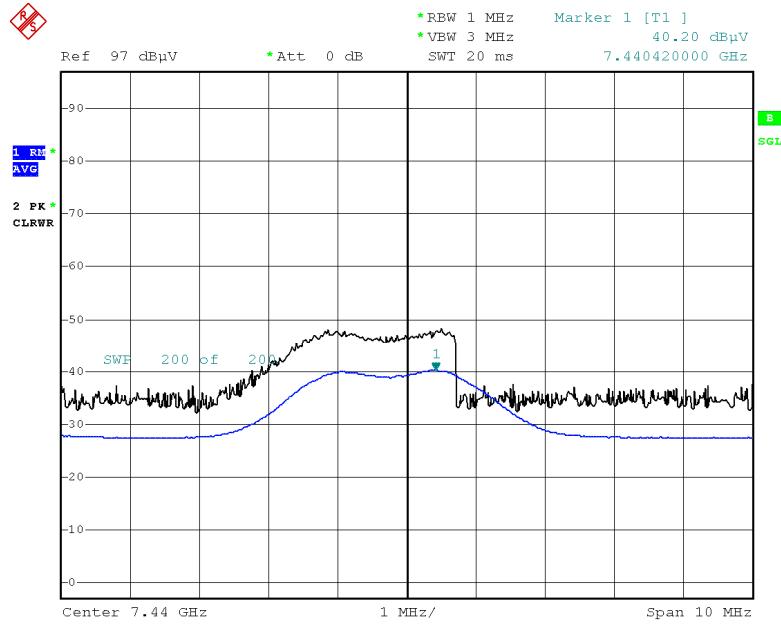

Date: 25.MAY.2021 23:10:21

Radiated Spurious Emissions plot – Peak Reading (Ch.39 3rd Harmonic)

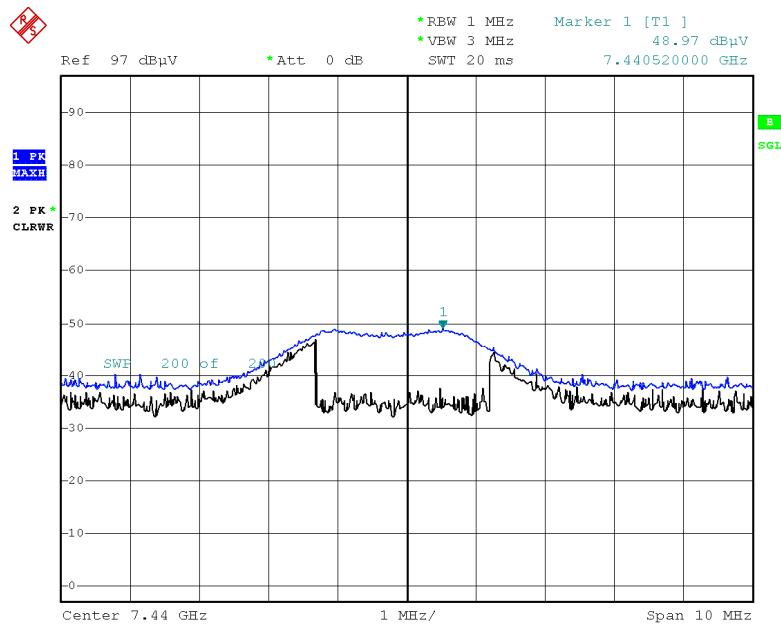


Date: 25.MAY.2021 23:10:35

**Note:**

Plot of worst case are only reported.


**▣ 2M Bit/s (37 Byte) Test Plots (Worst case : Y-H)**

Radiated Spurious Emissions plot – Average Reading (Ch.39 3rd Harmonic)

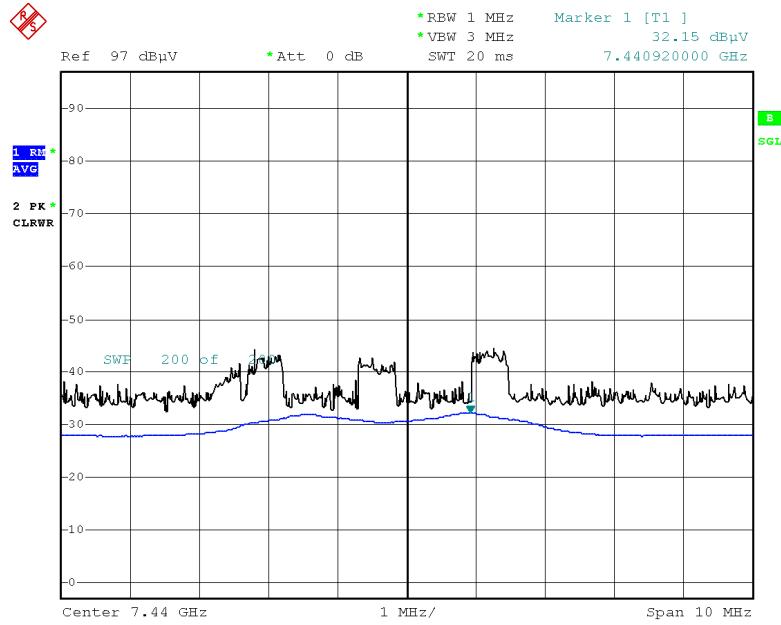

Date: 24.MAY.2021 19:36:17

Radiated Spurious Emissions plot – Peak Reading (Ch.39 3rd Harmonic)

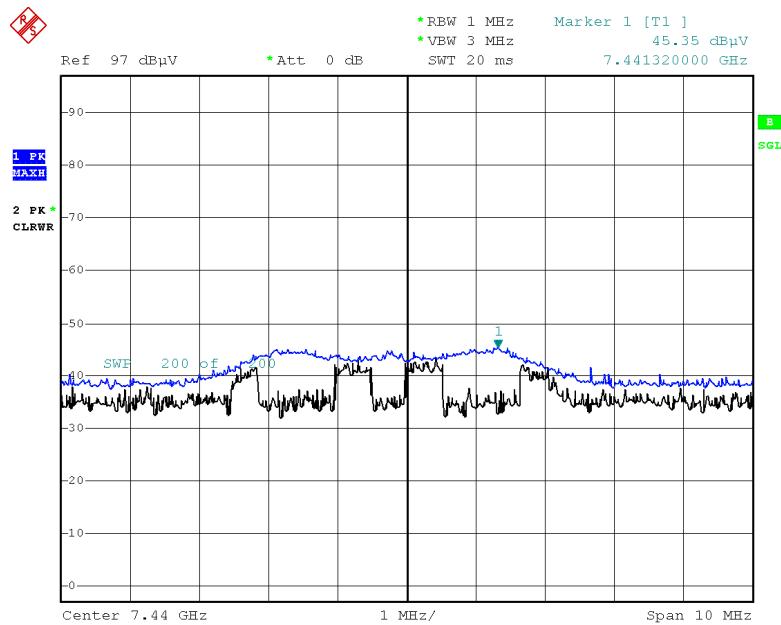

Date: 24.MAY.2021 19:36:31

**Note:**

Plot of worst case are only reported.

## - FX200(AC)

**Mode : 1M Bit/s (37 Byte)**

Operation Mode: CH High

Frequency	Reading	Duty cycle	AN.+CL-AMP G	ANT. POL	Total	Limit	Margin	Detect
[MHz]	dBuV	Factor	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	
7440	41.80	0.00	10.72	V	52.52	73.98	21.46	PK
7440	30.50	2.04	10.72	V	43.26	53.98	10.72	AV


**Mode : 2M Bit/s (37 Byte)**

Operation Mode: CH High

Frequency	Reading	Duty cycle	AN.+CL-AMP G	ANT. POL	Total	Limit	Margin	Detect
[MHz]	dBuV	Factor	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	
7440	42.40	0.00	10.72	V	53.12	73.98	20.86	PK
7440	29.09	4.87	10.72	V	44.68	53.98	9.30	AV


▣ Mode : 1M Bit/s (37 Byte) Test Plots (Worst case : Z-H)

Radiated Spurious Emissions plot – Average Reading (Ch.39 3rd Harmonic)

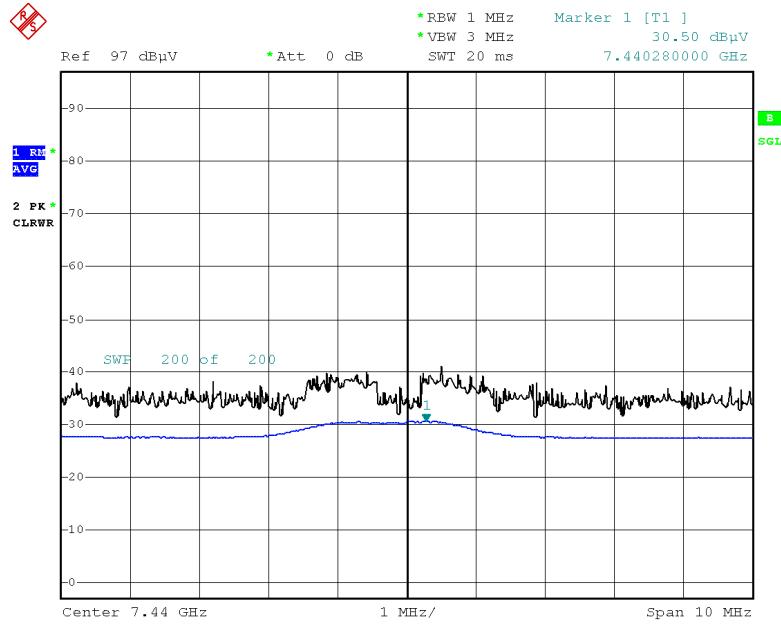

Date: 25.MAY.2021 22:02:48

Radiated Spurious Emissions plot – Peak Reading (Ch.39 3rd Harmonic)

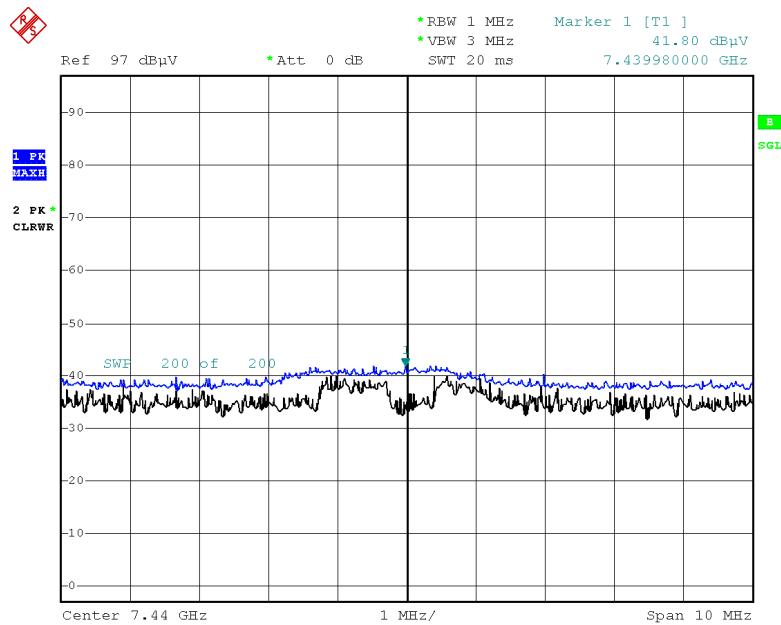


Date: 25.MAY.2021 22:03:04

Note:

Plot of worst case are only reported.


## ▣ 2M Bit/s (37 Byte) Test Plots (Worst case : Z-H)

Radiated Spurious Emissions plot – Average Reading (Ch.39 3rd Harmonic)

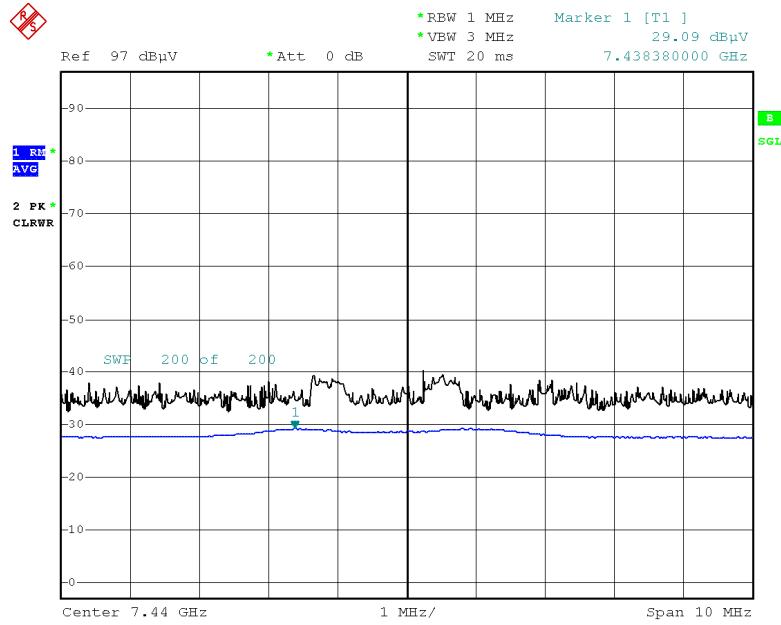

Date: 25.MAY.2021 20:24:41

Radiated Spurious Emissions plot – Peak Reading (Ch.39 3rd Harmonic)

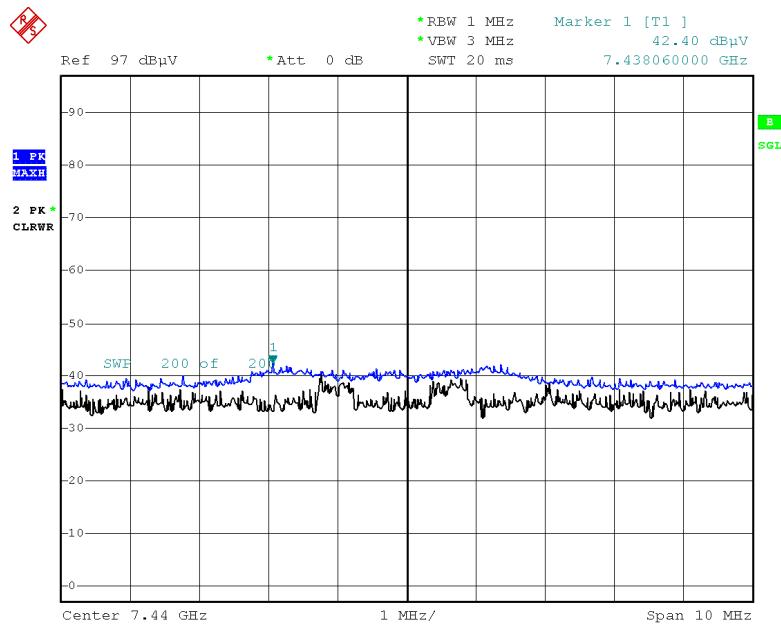

Date: 25.MAY.2021 20:24:54

**Note:**

Plot of worst case are only reported.

**9.8 RADIATED RESTRICTED BAND EDGES**- **FX100(DC)****Mode : Mode : 125k Bit/s (37 Byte)**

Operating Frequency 2402 MHz &amp; 2480 MHz

Channel No. 0 &amp; 39

Frequency	Reading	Duty Cycle Factor	A.F+C.L-A.G+D.F +ATT	Ant. Pol.	Total	Limit	Margin	Measurement Type
[MHz]	[dBuV/m]	[dB]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	
2390.0	47.24	0.94	0.00	H	48.18	73.98	25.80	PK
2390.0	35.78	0.94	0.72	H	37.44	53.98	16.54	AV
2390.0	47.93	0.94	0.00	V	48.87	73.98	25.11	PK
2390.0	36.27	0.94	0.72	V	37.93	53.98	16.05	AV
2483.5	47.27	1.20	0.00	H	48.47	73.98	25.51	PK
2483.5	36.99	1.20	0.72	H	38.91	53.98	15.07	AV
2483.5	46.87	1.20	0.00	V	48.07	73.98	25.91	PK
2483.5	36.15	1.20	0.72	V	38.07	53.98	15.91	AV

**Mode : 2M Bit/s (37 Byte)**


Operating Frequency 2402 MHz &amp; 2480 MHz

Channel No. 0 &amp; 39

Frequency	Reading	Duty Cycle Factor	A.F+C.L-A.G+D.F +ATT	Ant. Pol.	Total	Limit	Margin	Measurement Type
[MHz]	[dBuV/m]	[dB]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	
2390.0	47.88	0.94	0.00	H	48.82	73.98	25.16	PK
2390.0	36.33	0.94	4.87	H	42.14	53.98	11.84	AV
2390.0	47.48	0.94	0.00	V	48.42	73.98	25.56	PK
2390.0	36.21	0.94	4.87	V	42.02	53.98	11.96	AV
2483.5	47.96	1.20	0.00	H	49.16	73.98	24.82	PK
2483.5	36.98	1.20	4.87	H	43.04	53.98	10.94	AV
2483.5	47.75	1.20	0.00	V	48.95	73.98	25.03	PK
2483.5	36.59	1.20	4.87	V	42.65	53.98	11.33	AV


## ■ Mode : 2M Bit/s (37 Byte) Test Plots

Radiated Restricted Band Edges plot – Average Reading (Ch.39, Y-H)

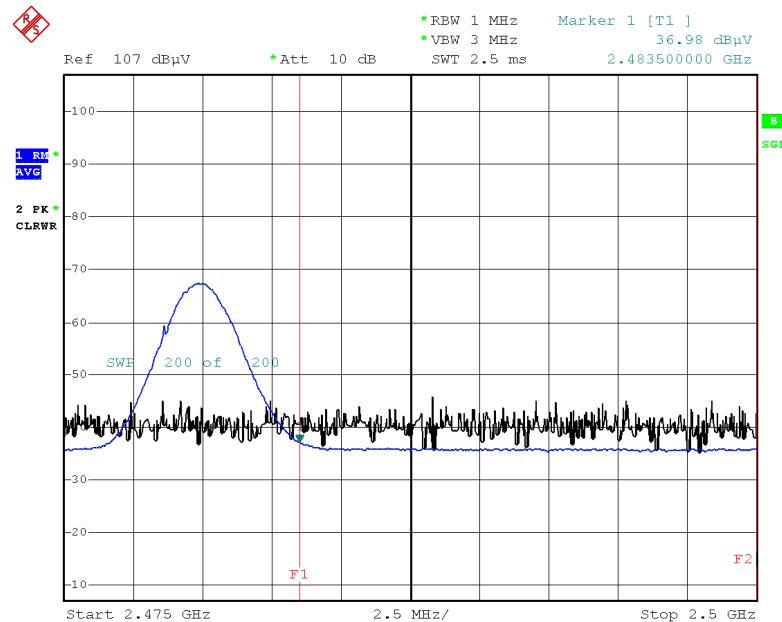

Date: 24.MAY.2021 17:51:38

Radiated Restricted Band Edges plot – Peak Reading (Ch.39, Y-H)

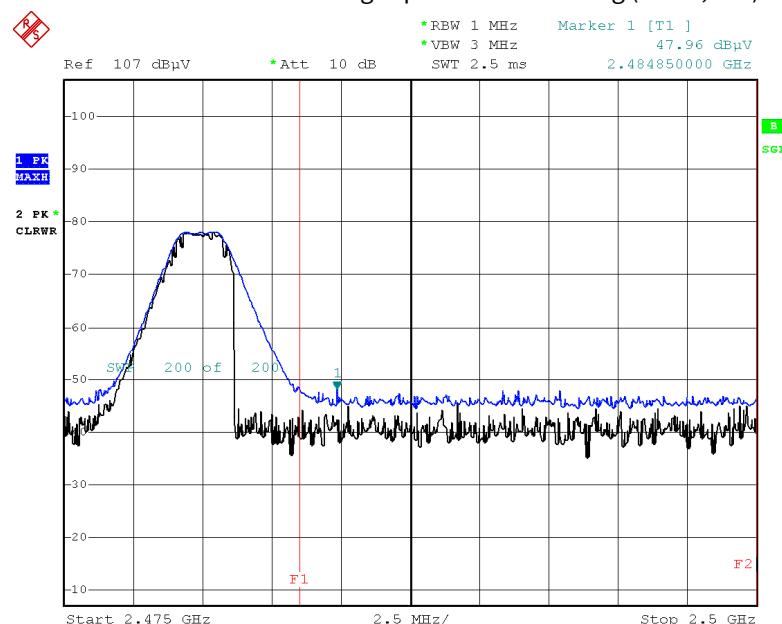

Date: 24.MAY.2021 17:51:57

**Note:**

Plot of worst case are only reported.

## - FX200(AC)

**Mode : Mode : 125k Bit/s (37 Byte)**

Operating Frequency 2480 MHz  
 Channel No. 39

Frequency	Reading	Duty Cycle Factor	A.F+C.L-A.G+D.F +ATT	Ant. Pol.	Total	Limit	Margin	Measurement Type
[MHz]	[dBuV/m]	[dB]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	
2483.5	49.36	1.20	0.00	H	50.56	73.98	23.42	PK
2483.5	38.55	1.20	2.04	H	41.78	53.98	12.20	AV


**Mode : 2M Bit/s (37 Byte)**

Operating Frequency 2480 MHz  
 Channel No. 39

Frequency	Reading	Duty Cycle Factor	A.F+C.L-A.G+D.F +ATT	Ant. Pol.	Total	Limit	Margin	Measurement Type
[MHz]	[dBuV/m]	[dB]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	
2483.5	48.26	1.20	0.00	H	49.46	73.98	24.52	PK
2483.5	37.38	1.20	4.87	H	43.44	53.98	10.54	AV


## ■ Mode : 2M Bit/s (37 Byte) Test Plots

Radiated Restricted Band Edges plot – Average Reading (Ch.39, Y-H)

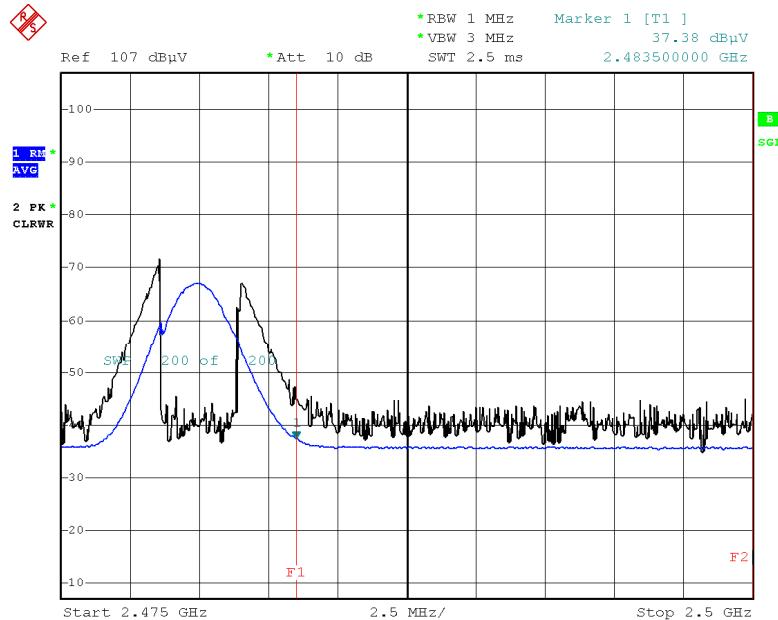

Date: 25.MAY.2021 21:39:41

Radiated Restricted Band Edges plot – Peak Reading (Ch.39, Y-H)

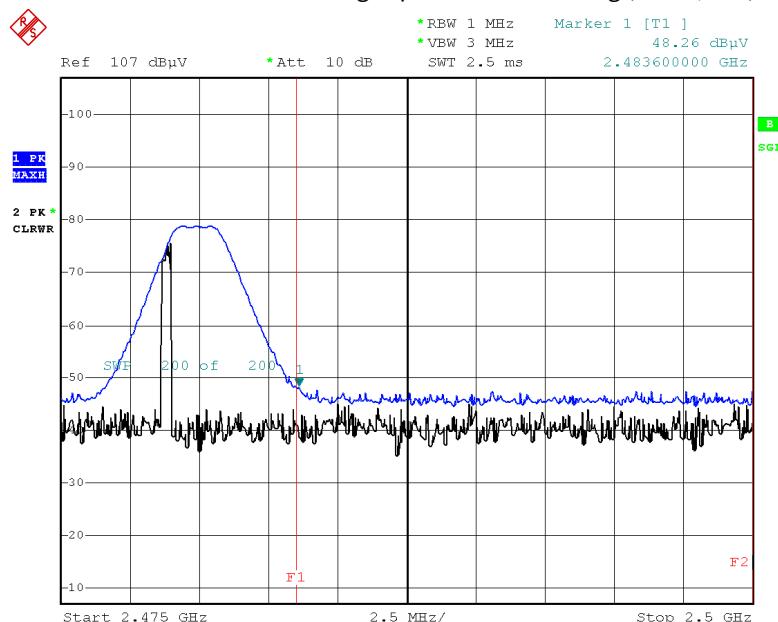

Date: 25.MAY.2021 21:39:59

**Note:**

Plot of worst case are only reported.

## 9.9 POWERLINE CONDUCTED EMISSIONS

Conducted Emissions (Line 1) \_FX200(AC)

Test


1 / 2

## Test Report

## Common Information

EUT : FX200  
 Manufacturer : PASSTECH CO., LTD  
 Test Site: SHIELD ROOM  
 Operating Conditions : BTLE\_L1  
 Operator Name:  
 Comment:

Full Spectrum

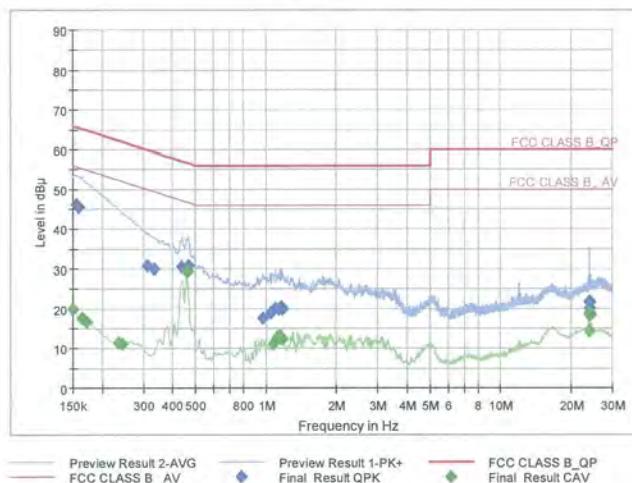

## Final Result QPK

Frequency (MHz)	QuasiPeak	Limit (dBuV)	Margin	Bandwidth	Line	Filter	Corr. (dB)
0.1545	46.06	65.75	19.70	9.000	L1	OFF	9.6
0.1590	45.57	65.52	19.94	9.000	L1	OFF	9.6
0.3120	30.97	59.92	28.95	9.000	L1	OFF	9.6
0.3345	29.94	59.34	29.39	9.000	L1	OFF	9.6
0.4380	30.50	57.10	26.60	9.000	L1	OFF	9.6
0.4650	30.84	56.60	25.76	9.000	L1	OFF	9.6
0.9725	17.73	56.00	38.27	9.000	L1	OFF	9.6
1.0445	19.00	56.00	37.00	9.000	L1	OFF	9.6
1.1008	20.14	56.00	35.86	9.000	L1	OFF	9.6
1.1323	19.85	56.00	36.15	9.000	L1	OFF	9.6
1.1570	20.60	56.00	35.40	9.000	L1	OFF	9.6
1.1795	19.84	56.00	36.16	9.000	L1	OFF	9.6
23.9698	18.83	60.00	41.17	9.000	L1	OFF	10.0
23.9855	21.76	60.00	38.24	9.000	L1	OFF	10.0
24.0035	19.17	60.00	40.83	9.000	L1	OFF	10.0
24.0125	20.28	60.00	39.72	9.000	L1	OFF	10.0
24.0260	21.90	60.00	38.10	9.000	L1	OFF	10.0
24.0350	18.54	60.00	41.46	9.000	L1	OFF	10.0

2021-05-19

오후 2:19:30

Test

2 / 2

**Final Result CAV**

Frequency (MHz)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1500	19.85	56.00	36.15	9.000	L1	OFF	9.6
0.1635	17.45	55.28	37.83	9.000	L1	OFF	9.6
0.1725	16.87	54.84	37.97	9.000	L1	OFF	9.6
0.2355	11.44	52.25	40.81	9.000	L1	OFF	9.6
0.2445	11.30	51.94	40.64	9.000	L1	OFF	9.6
0.4605	29.33	46.68	17.36	9.000	L1	OFF	9.6
1.0693	11.19	46.00	34.81	9.000	L1	OFF	9.6
1.0985	11.91	46.00	34.09	9.000	L1	OFF	9.6
1.1030	11.69	46.00	34.31	9.000	L1	OFF	9.6
1.1278	12.96	46.00	33.04	9.000	L1	OFF	9.6
1.1548	13.33	46.00	32.67	9.000	L1	OFF	9.6
1.1818	12.36	46.00	33.64	9.000	L1	OFF	9.6
23.9608	14.48	50.00	35.52	9.000	L1	OFF	10.0
23.9833	18.72	50.00	31.28	9.000	L1	OFF	10.0
23.9968	14.55	50.00	35.45	9.000	L1	OFF	10.0
24.0215	19.14	50.00	30.86	9.000	L1	OFF	10.0
24.0598	18.74	50.00	31.26	9.000	L1	OFF	10.0
24.1363	18.39	50.00	31.61	9.000	L1	OFF	10.0

2021-05-19

오후 2:19:30


Conducted Emissions (Line 2) \_FX200(AC)

Test

1 / 2

**Test Report****Common Information**

EUT : FX200  
 Manufacturer : PASSTECH CO., LTD  
 Test Site: SHIELD ROOM  
 Operating Conditions : BTLE\_N  
 Operator Name:  
 Comment:

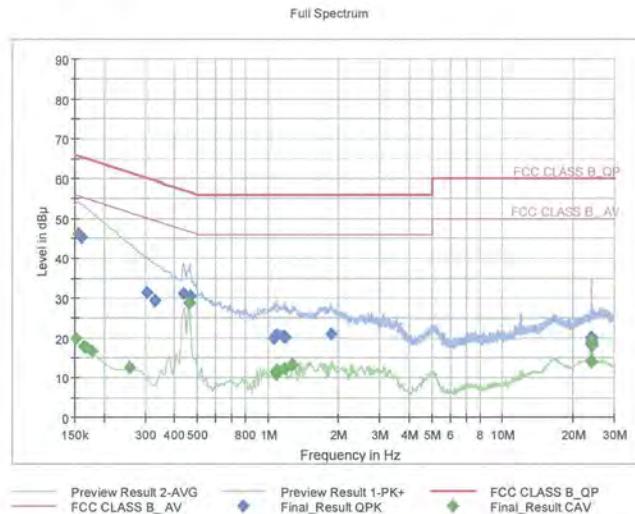**Final Result QPK**

Frequency (MHz)	QuasiPeak	Limit (dBuV)	Margin	Bandwidth	Line	Filter	Corr. (dB)
0.1545	46.01	65.75	19.74	9.000	N	OFF	9.6
0.1613	45.15	65.40	20.25	9.000	N	OFF	9.6
0.3030	31.44	60.16	28.72	9.000	N	OFF	9.6
0.3300	29.54	59.45	29.91	9.000	N	OFF	9.6
0.4358	31.13	57.14	26.01	9.000	N	OFF	9.6
0.4650	30.56	56.60	26.04	9.000	N	OFF	9.6
1.0625	19.90	56.00	36.10	9.000	N	OFF	9.6
1.0693	20.45	56.00	35.55	9.000	N	OFF	9.6
1.0985	20.84	56.00	35.16	9.000	N	OFF	9.6
1.1593	20.47	56.00	35.53	9.000	N	OFF	9.6
1.1863	20.27	56.00	35.73	9.000	N	OFF	9.6
1.8613	21.11	56.00	34.89	9.000	N	OFF	9.6
23.9563	18.44	60.00	41.56	9.000	N	OFF	10.0
23.9878	20.09	60.00	39.91	9.000	N	OFF	10.0
23.9990	18.59	60.00	41.41	9.000	N	OFF	10.0
24.0125	19.89	60.00	40.11	9.000	N	OFF	10.0
24.0283	18.63	60.00	41.37	9.000	N	OFF	10.0
24.0328	18.28	60.00	41.72	9.000	N	OFF	10.0

2021-05-19

오후 2:13:35

Test

2 / 2

**Final Result CAV**

Frequency (MHz)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1523	19.79	55.88	36.09	9.000	N	OFF	9.6
0.1635	17.95	55.28	37.33	9.000	N	OFF	9.6
0.1680	17.53	55.06	37.53	9.000	N	OFF	9.6
0.1770	16.62	54.63	38.01	9.000	N	OFF	9.6
0.2580	12.57	51.50	38.92	9.000	N	OFF	9.6
0.4605	28.93	46.68	17.75	9.000	N	OFF	9.6
1.0693	11.68	46.00	34.32	9.000	N	OFF	9.6
1.0828	10.83	46.00	35.17	9.000	N	OFF	9.6
1.0985	12.12	46.00	33.88	9.000	N	OFF	9.6
1.1053	11.84	46.00	34.16	9.000	N	OFF	9.6
1.1840	12.53	46.00	33.47	9.000	N	OFF	9.6
1.2763	13.40	46.00	32.60	9.000	N	OFF	9.6
23.9450	19.18	50.00	30.82	9.000	N	OFF	10.0
23.9608	14.09	50.00	35.91	9.000	N	OFF	10.0
23.9833	19.30	50.00	30.70	9.000	N	OFF	10.0
24.0215	19.22	50.00	30.78	9.000	N	OFF	10.0
24.0440	14.14	50.00	35.86	9.000	N	OFF	10.0
24.1745	18.29	50.00	31.71	9.000	N	OFF	10.0

2021-05-19

오후 2:13:35

**10. LIST OF TEST EQUIPMENT****Conducted Test**

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Rohde & Schwarz	ENV216 / LISN	09/04/2020	Annual	102245
Rohde & Schwarz	ESCI / Test Receiver	06/05/2020	Annual	100033
ESPAC	SU-642 /Temperature Chamber	03/15/2021	Annual	0093008124
Agilent	N9020A / Signal Analyzer	04/16/2021	Annual	MY50210191
Agilent	N9030A / Signal Analyzer	01/11/2021	Annual	MY49431210
Agilent	N1911A / Power Meter	04/08/2021	Annual	MY45100523
Agilent	N1921A / Power Sensor	06/08/2020	Annual	MY57820067
Agilent	87300B / Directional Coupler	11/10/2020	Annual	3116A03621
Hewlett Packard	11667B / Power Splitter	05/20/2021	Annual	05001
Hewlett Packard	E3632A / DC Power Supply	06/12/2020	Annual	KR75303960
H+S	5910-N-50-010 / Attenuator(10 dB)	10/28/2020	Annual	00801
Rohde & Schwarz	EMC32 / Software	N/A	N/A	N/A
HCT CO., LTD.	FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	N/A	N/A
Rohde & Schwarz	CBT / Bluetooth Tester	05/04/2021	Annual	100422

**Note:**

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

**Radiated Test**

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Innco system	CO3000 / Controller(Antenna mast)	N/A	N/A	CO3000-4p
Innco system	MA4640/800-XP-EP / Antenna Position Tower	N/A	N/A	N/A
Emco	2090 / Controller	N/A	N/A	060520
Ets	Turn Table	N/A	N/A	N/A
Rohde & Schwarz	Loop Antenna	03/19/2020	Biennial	1513-333
Schwarzbeck	VULB 9160 / Hybrid Antenna	08/19/2020	Biennial	9160-3368
Schwarzbeck	VULB 9168 / Hybrid Antenna	09/04/2020	Biennial	9168-0895
Schwarzbeck	BBHA 9120D / Horn Antenna	11/18/2019	Biennial	9120D-1191
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	11/29/2019	Biennial	BBHA9170541
Rohde & Schwarz	FSP(9 kHz ~ 30 GHz) / Spectrum Analyzer	09/14/2020	Annual	836650/016
Rohde & Schwarz	FSV40-N / Spectrum Analyzer	09/22/2020	Annual	101068-SZ
Wainwright Instruments	WRCJV2400/2483.5-2370/2520-60/12SS / Band Reject Filter	01/06/2021	Annual	2
Wainwright Instruments	WRCJV5100/5850-40/50-8EEK / Band Reject Filter	02/08/2021	Annual	1
CERNEX	CBLU1183540B-01/Broadband Bench Top LNA	12/23/2020	Annual	N/A
WEINSCHEL	56-10 / Attenuator(10 dB)			
CERNEX	CBL06185030 / Broadband Low Noise Amplifier	12/23/2020	Annual	N/A
Api tech.	18B-03 / Attenuator (3 dB)			
Wainwright Instruments	WHKX10-2700-3000-18000-40SS / High Pass Filter	12/23/2020	Annual	N/A
Wainwright Instruments	WHKX8-6090-7000-18000-40SS / High Pass Filter	12/23/2020	Annual	N/A
T&M SYSTEM	COAXIAL ATTENUATOR / Thru	12/23/2020	Annual	N/A
CERNEX	CBL18265035 / Power Amplifier	12/04/2020	Annual	22966
CERNEX	CBL26405040 / Power Amplifier	03/23/2021	Annual	25956
TESCOM	TC-3000C / Bluetooth Tester	03/09/2021	Annual	3000C000276

**Note:**

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
3. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5(Version : 2017).

## **11. ANNEX A\_ TEST SETUP PHOTO**

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2105-FC042-P