



243 Jubug-Ri, Yangji-Myeon, Yongin-Si, Gyeonggi-Do, Korea 449-822  
 Tel: +82-31-323-6008 Fax: +82-31-323-6010  
<http://www.ltalab.com>

Dates of Tests: February 12 ~ 25, 2016  
 Test Report S/N: LR500111603D  
 Test Site : LTA CO., LTD.

## CERTIFICATION OF COMPLIANCE

FCC ID

**W6YPT300**

APPLICANT

**PASSTECH CO., LTD**

**FCC Classification** : **Part 15 Low Power Communication Device Transmitter**  
**Manufacturing Description** : **LOCKER LOCK**  
**Manufacturer** : **PASSTECH CO., LTD**  
**Model name** : **ZP200WR**  
**Test Device Serial No.:** : **Identical prototype**  
**Rule Part(s)** : **FCC Part 15.225 Subpart C; ANSI C-63.4-2014**  
**Frequency Range** : **13.56 MHz**  
**RF power** : **60.02 dBuV/m @ 3m**  
**Data of issue** : **February 4, 2016**

This test report is issued under the authority of:

Yong-Cheol, Wang / Manager

The test was supervised by:

Young-jin Lee, Test Engineer

This test result only responds to the tested sample. It is not allowed to copy this report even partly without the allowance of the test laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.



NVLAP LAB Code.: 200723-0

## **TABLE OF CONTENTS**

1. GENERAL INFORMATION -----	3
2. INFORMATION ABOUT TEST ITEM -----	4
3. TEST REPORT -----	5
3.1 SUMMARY OF TESTS -----	5
3.2 TRANSMITTER REQUIREMENTS -----	6
3.2.1 ELECTRIC FIELD STRENGTH -----	6
3.2.1.1 FUNDAMENTAL EMISSION -----	7
3.2.1.2 OUTSIDE the EMISSION -----	8
3.2.1.3 SPURIOUS EMISSION -----	9
3.2.1.4 Emission Bandwidth -----	10
3.2.2 FREQUENCY TOLERANCE -----	12
3.2.6 AC Conducted Emissions -----	13

## **APPENDIX**

APPENDIX TEST EQUIPMENT USED FOR TESTS -----	14
--	----

## 1. General information

### 1-1 Test Performed

Company name : LTA Co., Ltd.  
 Address : 243, Jubug-ri, Yangji-Myeon, Youngin-Si, Kyunggi-Do, Korea. 449-822  
 Web site : <http://www.ltalab.com>  
 E-mail : [chahn@ltalab.com](mailto:chahn@ltalab.com)  
 Telephone : +82-31-323-6008  
 Facsimile : +82-31-323-6010

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which is the “General requirements for the competents of calibration and testing laboratory”.

### 1-2 Accredited agencies

LTA Co., Ltd. is approved to perform EMC testing by the following agencies:

Agency	Country	Accreditation No.	Validity	Reference
NVLAP	U.S.A	200723-0	2016-09-30	ECT accredited Lab.
RRA	KOREA	KR0049	-	EMC accredited Lab.
FCC	U.S.A	610755	2017-04-21	FCC filing
FCC	U.S.A	649054	2017-04-13	FCC CAB
VCCI	JAPAN	R2133(10 m), C2307	2017-06-21	VCCI registration
VCCI	JAPAN	T-2009	2016-12-23	VCCI registration
VCCI	JAPAN	G-563	2018-12-13	VCCI registration
IC	CANADA	5799A-1	UPDATING	IC filing
KOLAS	KOREA	NO.551	2017-01-08	KOLAS accredited Lab.

## 2. Information about test item

### 2-1 Client& Manufacturer

Company name : PASSTECH CO., LTD  
 Address : No. B-402, Geumgang Penterium IT Tower, 215, Galmachi-ro, Jungwon-gu,  
 Seongnam-si, Gyeonggi-do, 13217 Rep. of KOREA  
 Tel / Fax : TEL No : +82-31-743-7277 / FAX No : +82-31-743-7276

### 2-2 Equipment Under Test (EUT)

Trade name : LOCKER LOCK  
 Model name : ZP200WR  
 Serial number : Identical prototype  
 Date of receipt : January 26, 2016  
 EUT condition : Pre-production, not damaged  
 Antenna type : Mag Integrated Loop Antenna  
 Frequency Range : 13.56 MHz  
 RF output power : 60.02 dBuV/m @ 3m  
 Power Source : DC 6V by Battery  
 Firmware Version : V 1.0.0

### 2-3 Tested frequency

	LOW	MID	HIGH
Frequency (MHz)	-	13.56	-

### 3. Test Report

#### 3.1 Summary of tests

FCC Part Section(s)	Parameter	Test Condition	Status (note 1)
15.225(a)	Electric Field Strength - Fundamental Emission	Radiated	C
15.225(b) (c)	Electric Field Strength - Outside the Band		C
15.225(d) / 15.209	Electric Field Strength - Spurious Emission		C
15.225(e)	Frequency Tolerance		C
15.215(c)	20 dB Bandwidth		C
15.207 /15.107	AC Conducted Emissions	Line Conducted	N/A

Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

Note 2: The data in this test report are traceable to the national or international standards.

The sample was tested according to the following specification:

FCC Parts 15.225; ANSI C-63.4-2014

The measurement procedure described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013).

## 3.2 Transmitter requirements

### 3.2.1 Electric Field Strength

#### Procedure: About the Fundamental Emission, Outside the Band and Spurious Emission

The Radiated Electric Field Strength intensity has been measured with a ground plane and at a distance of 3m.

→ From 9 kHz to 30 MHz at distance 3 m

The EUT was placed on a non-conductive table located on a large open test site.

The loop antenna was placed at a location 3m from the EUT. Radiated emissions were measured with the loop antenna both parallel and perpendicular to the plane of the EUT loop antenna and with x, y, z planes in EUT.

→ From 30 MHz to 1000 MHz at distance 3 m

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.3 of ANSI C63.10-2013

Bandwidth settings per frequency range;

	From 9 kHz to 150 kHz	From 150 kHz to 30 MHz	From 30 MHz to 1000 MHz
IF Bandwidth	200 Hz	9 kHz	120 kHz

Part 15 Section 15.31 (f)(2) (9 kHz ~ 30 MHz)

$9 \sim 490 \text{ kHz} [\text{Limit at } 3 \text{ m}] = [\text{Limit at } 300 \text{ m}] - 20\log(3[\text{m}]/300[\text{m}])$

$490 \text{ kHz} \sim 30 \text{ MHz} [\text{Limit at } 3 \text{ m}] = [\text{Limit at } 30 \text{ m}] - 20\log(3[\text{m}]/30[\text{m}])$

### 3.2.1.1 Electric Field Strength - Fundamental Emission

Test method : Part 15.225(a)  
 Tx Frequency : 13.56 MHz  
 Result : **Complies**

#### Measurement data:

Freq (MHz)	Pol.	Reading (dB $\mu$ V/m)	T.F (dB)	Field Strength @3 m (dB $\mu$ V/m)	Limit @3 m (dB $\mu$ V/m)	Margin (dB)
13.56	H	62.15	-2.95	59.20	104	44.80
13.56	V	62.97	-2.95	60.02	104	43.98

-- Note 1--

$$\begin{aligned}
 \text{Field strength of } 13.553 \text{ MHz to } 13.567 \text{ MHz Limit@3m} &= 84 \text{ dBuV/m} + 20\log 30 \text{ m/3 m} \\
 &= 104 \text{ dBuV/m}
 \end{aligned}$$

-- Note 2--


$$\text{T.F(Total Factor)} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amp Gain}$$

$$\text{Field Strength @3 m} = \text{Reading} + \text{T.F}$$

### 3.2.1.2 Electric Field Strength - Outside the Allocated Band

Test method : Part 15.225(b) (c)  
 Tx Frequency : 13.56 MHz  
 Result : **Complies**

#### Measurement Data:

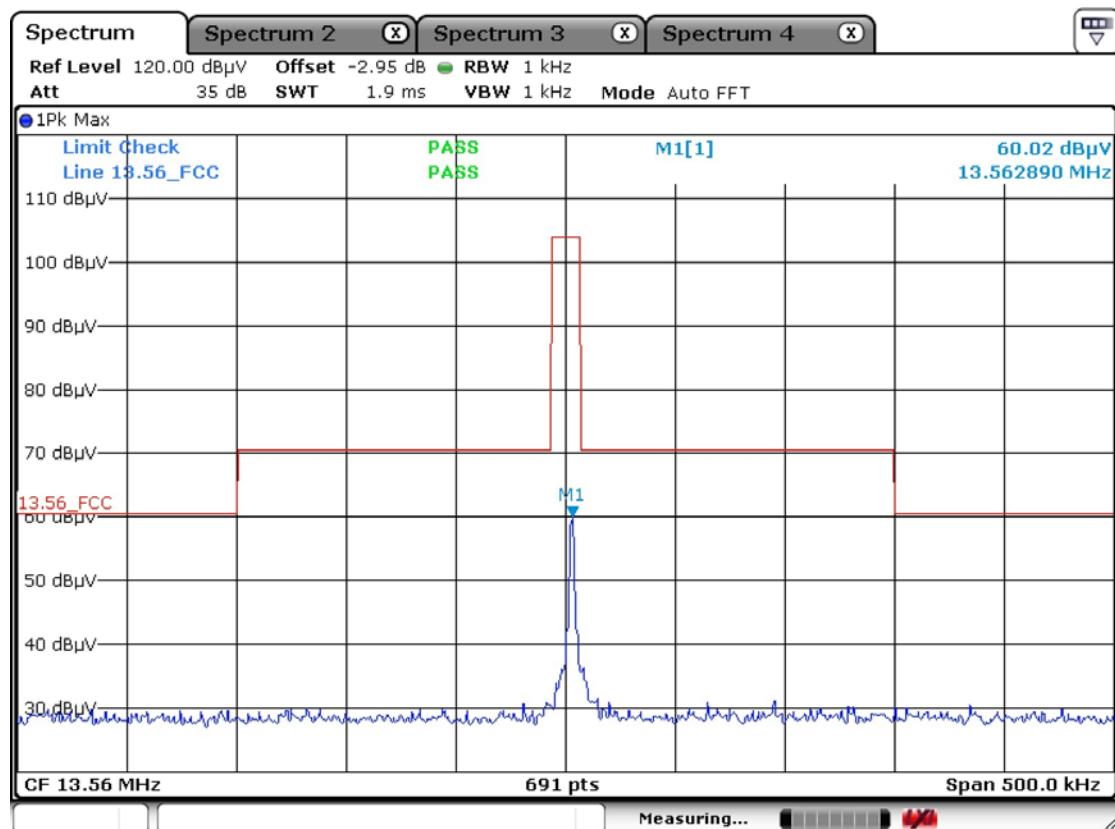

### 3.2.1.3 Electric Field Strength – Spurious Emission

Test method : Part 15.225(d) / Part 15.209  
Tx Frequency : 13.56 MHz  
Result : **Complies**

### Measurement Data:

-- Note 1--

T.F(Total Factor) = Antenna Factor + Cable Loss -Amp Gain

Field Strength @3 m = Reading + T.F

-- Note 2--


No other emissions were detected at a level greater than 20 dB below limit.

### 3.2.1.4 Emission Bandwidth


Test method : Part 15.215 (c)  
Tx Frequency : 13.56 MHz  
Result : **Complies**

Occupied Channel Bandwidth Result			
Modulation Mode	Frequency (MHz)	20 dB Bandwidth (kHz)	99% Bandwidth (kHz)
ASK	13.56	3.01	2.14
Limit		N/A	N/A
Result		PASS	

## 20 dB Bandwidth

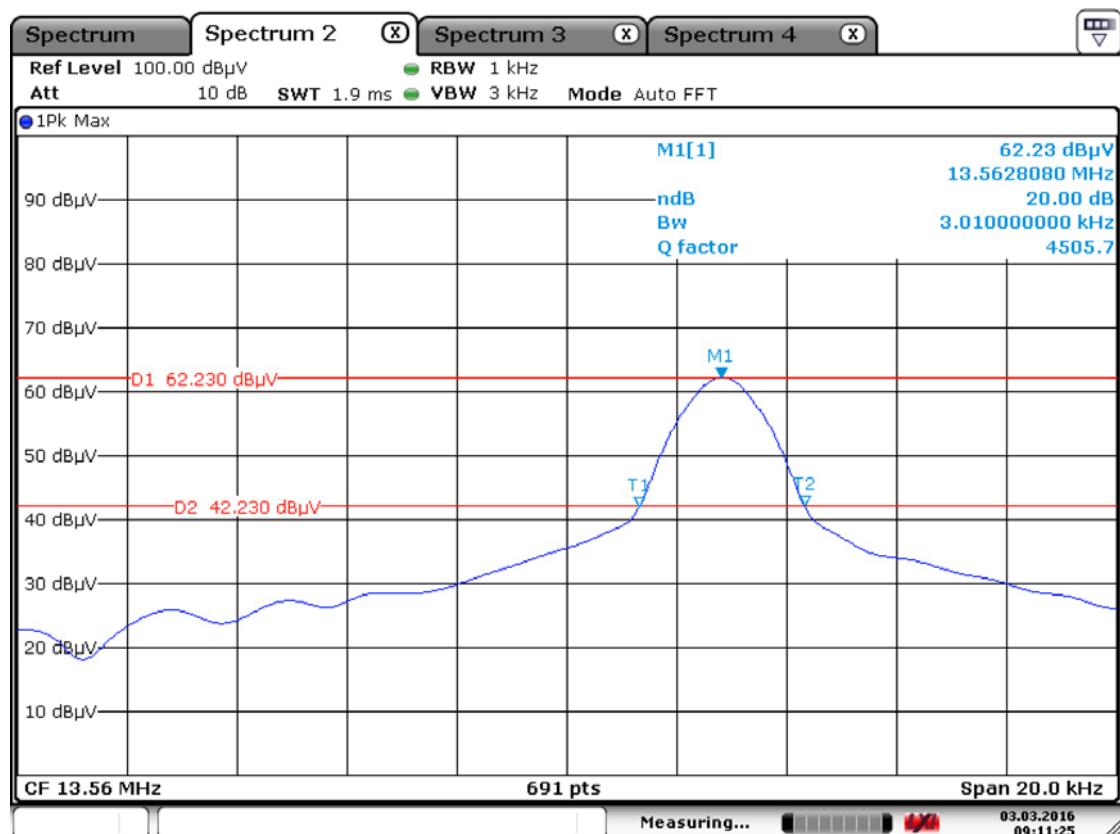

## 99% Bandwidth

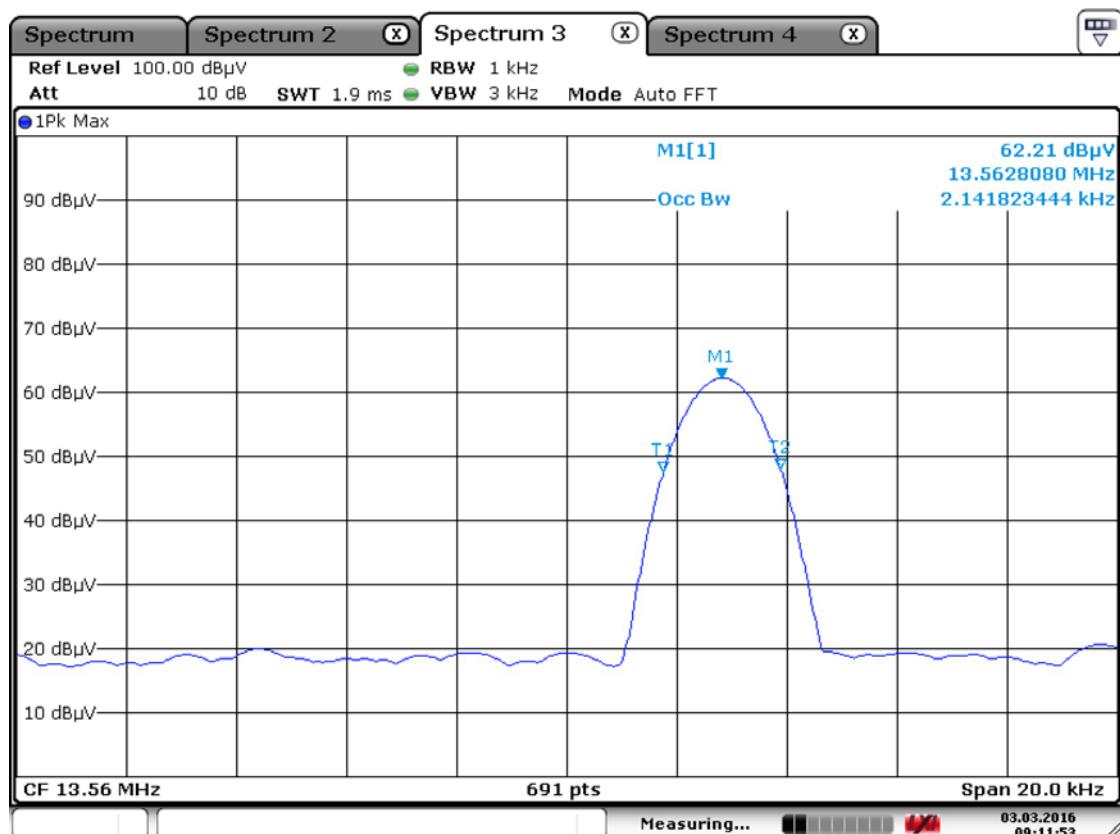

### 3.2.2 Frequency Tolerance

#### Procedure:

The temperature test was started after the temperature stabilization time of 30 minutes.

#### Requirement:

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

Test method : ANSI C63.10-2013


Tx Frequency : 13.56 MHz

Result : **Complies**

#### Measurement Data:

OPERATING FREQUENCY: **13,562,800** Hz  
 Freq. Tolerance Limit: **± 0.01** %

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQ (Hz)	Deviation (%)
100	6.00	-20	13,562,721	0.000006
100		-10	13,562,706	0.000007
100		0	13,562,776	0.000002
100		10	13,562,765	0.000003
100		20	13,562,765	0.000003
100		30	13,562,789	0.000001
100		40	13,562,782	0.000001
100		50	13,562,767	0.000002
85	5.10	20	13,562,785	0.000001
115	6.90	20	13,562,756	0.000003

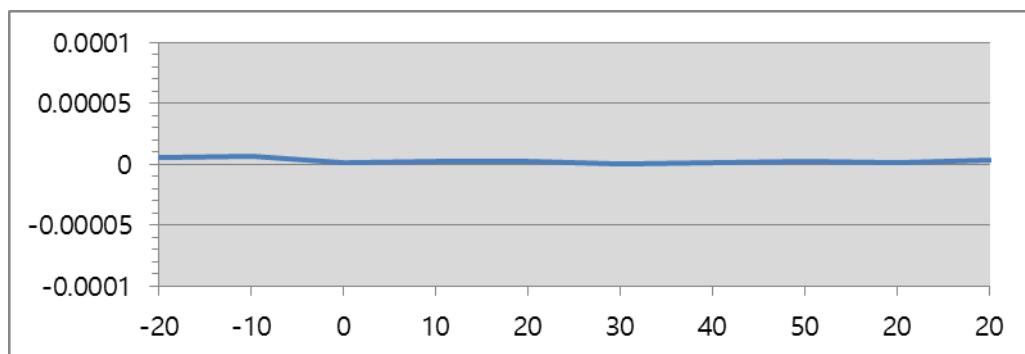

### 3.2.3 AC Conducted Emissions

#### Procedure:

The conducted emissions are measured in the shielded room with a spectrum analyzer in peak hold. While the measurement, EUT had its hopping function disabled at the middle channels in line with Section 15.31(m). Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation and Exerciser operation. The highest emissions relative to the limit are listed.

#### Measurement Data: N/A

- See next pages for actual measured spectrum plots.
- No emissions were detected at a level greater than 20 dB below limit.

#### Minimum Standard: FCC Part 15.207(a) / EN 55022

Class B

Frequency Range	quasi-peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

\* Decreases with the logarithm of the frequency

## APPENDIX

### TEST EQUIPMENT USED FOR TESTS

	Description	Model No.	Serial No.	Manufacturer	Interval	Last Cal. Date
1	Signal Analyzer (9 kHz ~ 30 GHz)	FSV-30	100757	R&S	1 year	2015-03-24
2	Signal Generator (~3.2 GHz)	8648C	3623A02597	HP	1 year	2015-03-23
3	SYNTHESIZED CW GENERATOR	83711B	US34490456	HP	1 year	2015-03-23
4	Attenuator (3 dB)	8491A	37822	HP	1 year	2015-09-14
5	Attenuator (10 dB)	8491A	63196	HP	1 year	2015-09-14
6	Test Receiver (~30 MHz)	ESHS10	828404/009	R&S	1 year	2015-03-23
7	EMI Test Receiver (~7 GHz)	ESCI7	100722	R&S	1 year	2015-09-15
8	RF Amplifier (~1.3 GHz)	8447D OPT 010	2944A07684	HP	1 year	2015-09-14
9	RF Amplifier (1~26.5 GHz)	8449B	3008A02126	HP	1 year	2015-03-23
10	Horn Antenna (1~18 GHz)	3115	00114105	ETS	2 year	2015-04-21
11	DRG Horn (Small)	3116B	81109	ETS-Lindgren	2 year	2014-02-26
12	DRG Horn (Small)	3116B	133350	ETS-Lindgren	2 year	2014-02-26
13	TRILOG Antenna	VULB 9160	9160-3237	SCHWARZBECK	2 year	2015-04-21
14	Temp.Humidity Data Logger	SK-L200TH II A	00801	SATO	1 year	2015-04-03
15	Splitter (SMA)	ZFSC-2-2500	SF617800326	Mini-Circuits	-	-
16	Power Divider	11636A	06243	HP	1 year	2015-09-14
17	DC Power Supply	6674A	3637A01657	Agilent	-	-
18	Frequency Counter	5342A	2826A12411	HP	1 year	2015-03-23
19	Power Meter	EPM-441A	GB32481702	HP	1 year	2015-03-23
20	Power Sensor	8481A	3318A94972	HP	1 year	2016-01-05
21	Audio Analyzer	8903B	3729A18901	HP	1 year	2015-09-14
22	Modulation Analyzer	8901B	3749A05878	HP	1 year	2015-09-15
23	TEMP & HUMIDITY Chamber	YJ-500	LTAS06041	JinYoung Tech	1 year	2015-09-14
24	Stop Watch	HS-3	812Q08R	CASIO	2 year	2014-04-03
25	LISN	KNW-407	8-1430-1	Kyoritsu	1 year	2015-09-14
26	Two-Lime V-Network	ESH3-Z5	893045/017	R&S	1 year	2015-03-23
27	UNIVERSAL RADIO COMMUNICATION TESTER	CMU200	106243	R&S	1 year	2015-03-23
28	Highpass Filter	WHKX1.5/15G-10SS	74	Wainwright Instruments	1 year	2015-03-30
29	Highpass Filter	WHKX3.0/18G-10SS	118	Wainwright Instruments	1 year	2015-03-30
30	Active Loop Antenna	FMZB1519	1519-031	SCHWARZBECK	2 year	2016-01-12
31	OSP120 BASE UNIT	OSP120	101230	R&S	1 year	2015-03-23
32	Signal Generator(100 kHz ~ 40 GHz)	SMB100A03	177621	R&S	1 year	2015-03-24
33	Signal Analyzer (10 Hz ~ 40 GHz)	FSV40	101367	R&S	1 year	2015-03-24