

Electromagnetic Emission

FCC MEASUREMENT REPORT

CERTIFICATION OF **FCC PART 22 & 24 COMPLIANCE**

PRODUCT Universal Wireless Monitoring System

UWMS-01 MODEL/TYPE NO

FCC ID W74UWMS-01

TRADE NAME

SYM Technology, Inc.

APPLICANT 332, Allendale Road Suite 1, Pasadena, CA 91106, USA

FCC CLASSIFICATION PCS Licensed Transmitter(PCB)

FCC RULE PART(S) FCC Part 22(H) & 24(E), Part 15(B)

Certification **FCC PROCEDURE**

DATES OF TEST February 28 to May 7, 2009

TEST REPORT No. : BWS-09-EF-0006

TEST LAB. BWS TECH Inc. (Registration No.: 553281)

This Universal Wireless Monitoring System has been tested in accordance with the measurement procedures specified in ANSI C63.4-2003 at the BWS TECH/EMC Test Laboratory and has been shown to be complied with the electromagnetic emission limits specified in FCC Rule Part15 Subpart B Section15.107 and 15.109

I attest to the accuracy of data. All measurement herein was performed by me or was made under my supervision and is correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them. The results of testing in this report apply to the product/system which was tested only. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

May 08, 2009

Laboratory Division

(Date)

BWS TECH Inc.

www.bws.co.kr

Nam, Tae-Hyun 611-1, Maesan-ri, Mohyeon-myeon, Yongin-si, Gyeonggi-do 449-853, Korea Chief Engineer FAX: +82 31 333 0017

TEL: +82 31 333 5997



TABLE OF CONTENTS

	Pages
1. General Information	3
2. Description of Test Facility	4
3. Product Information	5
4. Description of Tests	6-7
5. Test Condition	8-9
6. Test Results	10-22
7. Sample Calculation and Other Information	23
8. Test Equipment List	24
Appendix 1. Test Setup Photos	
Appendix 2. FCC ID Label and location	
Appendix 3. External Photos of EUT	
Appendix 4. Internal Photos of EUT	
Appendix 5. Block Diagram	
Appendix 6. Operational description	



FCC TEST REPORT

Scope – Measurement and determination of electromagnetic emission(EME) of radio frequency devices including intentional radiators and/or unintentional radiators for compliance with the technical rules and regulations of the U.S Federal Communications Commission(FCC).

1. General Information

Applicant Name : SYM Technology, Inc.

Applicant Address : 332, Allendale Road Suite 1, Pasadena, CA 91106, USA

Manufacturer Name : SYM Technology, Inc.

Manufacturer Address : 332, Allendale Road Suite 1, Pasadena, CA 91106, USA

Contact Person : Vincent Lee

Phone/Fax : Phone : (626)394-6630 / Fax : (626)628-0350

• EUT Type : Universal Wireless Monitoring System

• Model Number : UWMS-01

FCC Identifier : W74UWMS-01

• S/N: : Prototype

• FCC Rule Part(s) : Part 22(H) & 24(E) , Part 15 (B)

Approved Modem : NOVATEL WIRELESS INC.

Module Model: E725 FCC ID: PKRNVWE725

• Tx Frequency Range : 824.70 – 848.31MHz(Cell. CDMA)/ 1851.25-1908.75MHz(PCS CDMA)

Rx Frequency Range : 869.70 – 893.31MHz(Cell. CDMA)/ 1931.25-1988.75MHz(PCS CDMA)

: CDMA Mode : 0.450W (26.54 dBm)

• Max. RF Output Power

PCS CDMA Mode :0.530W (27.25 dBm)

• Test Procedure : ANSI C63.4-2003 (for Radiated Power and Radiated Spurious Tests)

Date of Tests : February 28, 2009 to May 7, 2009

: BWS TECH Inc.

EMC Testing Lab (FCC Registration Number : 553281)

Place of Tests 611-1, Maesan-ri, Mohyeon-myeon, Yongin-si, Gyeonggi-do

449-853, Korea

TEL: +82 31 333 5997 FAX: +82 31 333 0017

• Test Report No. : BWS-09-EF-0006



2. Description of Test Facility

The measurement for radiated emission test were practiced at the open area test site of BWS TECH Inc. Measurement for conducted emission test were practiced at the semi EMC Anechoic Chamber test site of BWS TECH Inc. facility located at *611-1, Maesan-ri, Mohyeon-myeon, Yongin-si, Gyeonggi-do 449-853, Korea*. The site is constructed in conformance with the requirements of the ANSI C63.4-2003 and CISPR Publication 16. The BWS TECH measurement facility has been filed to the Commission with the FCC for 3 and 10 meter site configurations. Detailed description of test facility was found to be in compliance with the requirements of Section 2.948 FCC Rules according to the ANSI C63.4-2003 and registered to the Federal Communications Commission(Registration Number: 553281).

The measurement procedure described in American National Standard for Method of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ANSI C.63.4-2003) was used in determining radiated and conducted emissions from the SYM Technology, Inc. Universal Wireless Monitoring System Model: UWMS-01.



3. Product Information

3.1 Equipment Description

A. Electrical Specifications

Power Supply AC Power Supply

Input: AC 100 ~ 240V 50/60Hz

DC Power Supply (Direct DC Supply)

Input: 12V±1V, 2A **Power Consumption**

12[W] Max

Ethernet

Standard Compatibility: IEEE802.3 CSMA/CD Ethernet Link: MDI/MDI-X, auto-crossover

Data Rate: 10/100MBps Auto Negotiation, half/full-duplex

Address Database Size: 1024 MAC addresses

Switching Capacity: 1Gbps

B. Environmental Specifications

Operating Temperature: 14 ~ 158°F Operating Humidity: 0 ~ 90%

C. Mechanical Specifications

Dimension (inches): W: 10.55 D: 6.22 H: 1.77

Weight (lbs): 3.2

D. CDMA Module

Model: E725

FCC ID: PKRNVWE725

3.2 Variations covered by this report

Model Difference: N/A.

3.3 Additional Information Related to Testing

Test results apply only to the particular sample tested and functionality described in this test report. This report may be reproduced in full. Partial reproduction may only be made with the written permission of the BWS TECH Inc.



4. Description of Tests

4.1 Conducted Emission Measurement

Conducted emissions measurements were made in accordance with section 11, "Measurement of Information Technology Equipment" of ANSI C63.4-2003. The measurement were performed over the frequency range of 0.15MHz to 30MHz using a $50\,\Omega$ /50uH LISN as the input transducer to a Spectrum Analyzer or a Field Intensity Meter. The measurements were made with the detector set for "Peak" amplitude within an bandwidth of 10KHz or for "quasi-peak" within a bandwidth of 9KHz.

The line-conducted emission test is conducted inside a shielded anechoic chamber room with 1m x 1.5m x 0.8m wooden table which is placed 40cm away from the vertical wall and 1.5m away from the side wall of the chamber room. Two LISNs are bonded to bottom plane of the shielded room. The EUT is powered from the FCC LISN and the support equipment is powered from the another Com-power LISN. Power to the LISNs is filtered by a noise cut power line filters. All electrical cables are shielded by braided tinned steel tubing with inner ϕ 1.2cm. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and these supply lines will be connected to the Com-power LISN. All interconnecting cables more than 1m were shortened by non-inductive bundling(serpentine fashion) to a 1m length. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the Test Receiver to determine the frequency producing the max. Emission from the EUT. The frequency producing the max. Level was reexamined using the detector function set to the CISPR Quasi-Peak mode by manual, after scanned by automatic Peak mode from 0.15 to 30MHz. The bandwidth of the Spectrum Analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was maximized by switching power lines, varying the mode of operation or resolution, clock or data exchange speed, if applicable, whichever determined the worst-case emission. Each emission reported was calibrated using self-calibrating mode.

Photographs of the worst-case emission can be seen in photographs of conducted emission test setup.



4.2 Radiated Emission Measurement

Preliminary measurements were made at indoors 3 meter semi EMC Anechoic Chamber using broadband antennas, broadband amplifier, and spectrum analyzer to determine the emission frequencies producing the maximum EME.

Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth with respect to the antenna were noted for each frequency found. The spectrum was scanned from 30 to 1000MHz using bilog antenna and above 1000MHz, linearly polarized double ridge horn antennas were used. Above 1GHz, linearly polarized double ridge horn antennas were used. The measurements were performed with three frequencies which were selected as bottom, middle and top frequency in the operating band. Emission level from the EUT with various configurations were examined on the spectrum analyzer connected with the RF amplifier and plotted graphically.

Final measurements were made outdoors open site at 3-meter test range using bilog antenna. The output from the antenna was connected, via a pre-selector or a preamplifier, to the input of the EMI Measuring Receiver and Spectrum analyzer(for above 1GHz). The detector function was set to the quasi-peak or peak mode as appropriate. The measurement bandwidth on the Field strength receiver was set to at least 120kHz (1MHz for measurement above 1GHz), with all post-detector filtering no less than 10 times the measurement bandwidth. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.

Each frequency found during preliminary measurement was examined and investigated as the same set up and configuration which produced the maximum emission The EUT, support equipment and interconnecting cables were configured to the set-up producing the maximum emission for the frequency and were placed on top of a 0.8-meter high non-metallic 1m x 1.5 meter table. The turntable containing the system was rotated and the antenna height was varied 1 to 4 meters and stopped at the azimuth or height producing the maximum emission.

Each emission was maximized by varying the mode of operating frequencies of the EUT. The system was tested in all the three orthogonal planes and changing the polarity of the antenna. The worst case emissions are recorded in the data tables. If necessary, the radiated emission measurement could be performed at a closer distance to ensure higher accuracy and the results were extrapolated to the specified distance using an inverse linear distance extrapolation factor(20dB/decade) as per section 15.31(f).

Photographs of the worst-case emission test setup can be seen in Appendix 1.



5. Test Condition

5.1 Test Configuration

The device was configured for testing in a typical fashion (as a customer would normally use it). During the tests, the EUT and the supported equipments were installed to meet FCC requirement and operated in a manner which tends to maximize its emission level in a typical application.

Radiated Emission Test

Preliminary radiated emission tests were performed using the procedure in ANSI C63.4/2003 Clause 8.3 to determine the worst operating condition. Final radiated emission tests were conducted at 3 meter open field test site.


5.2 EUT operation

EUT was tested according to the following operation modes provided by the specifications given by the manufacturer, and reported the worst emissions.

Operation Modes	Worst Case Mode
Normal Operating Mode	\boxtimes

5.3 Test System layout on EUT and peripherals

Interface cable _____ Power cable _____

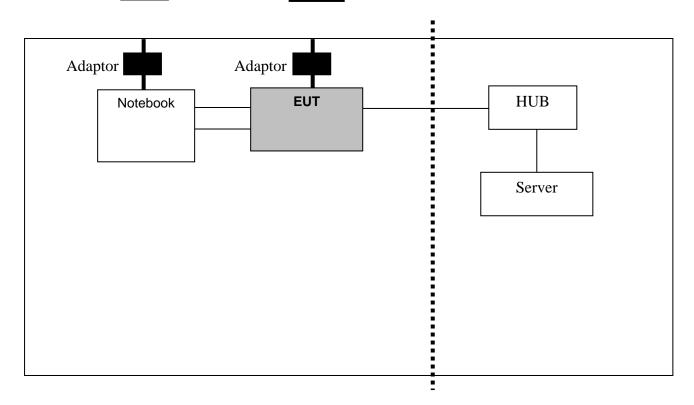



5.4 Peripherals / Support Equipment Used

Following peripheral devices and interface cables were connected during the measurement:

Type of Peripheral Equipment Used:

Description	Model Name	Serial No.	Manufacturer	FCC ID
EUT	UWMS-01	prototype SYM Technology, Inc.		W74UWMS-01
Adaptor	SAD06012-UV	0809001631AB	SI TECH	N/A
Notebook	PP17L	U8327 A02	DELL	N/A
Notebook Adaptor	PA-1050-05K	W7076	DONGGUANG LITE POWER 2nd PLANT	N/A

Type of Cables Used:

Type of Cables of	scu.			
Device from	Device to	Type of Cable	Length(m)	Type of shield
Notebook	Adaptor	DC IN	1.2	Unshielded
EUT	Notebook	USB(DEBUG)	1.2	Shielded
EUT	Notebook	RJ-45	1.5	Unshielded
EUT	HUB	RJ-45	20.0	Unshielded
EUT	Adaptor	DC IN	1.0	Unshielded



6. TEST RESULTS

6.1 Summary of Test Results

The measurement results were obtained with the EUT tested in the conditions described in this report. Detailed measurement data and plots showing the maximum emission of the EUT are reported.

FCC Part Section(s)	Test Description	Description Test Limit								
TRANSMITTER MODE(TX)										
2.1049,22.917(a), 24.238(a)	Occupied Bandwidth	N/A								
22.917(a), 24.238(a)	Band Edge/Conducted Spurious Emission	<43+10log10(P[Watts])at Band Edge and for all out-of band emissions	Refer to attached FCC ID: PKRNVWE725 of Test Report.							
2.1046	Transmitter Conducted Output Power	N/A								
22.913(a)(2)	Effective Radiated Power	< 7Watts max. ERP								
24.232(b)	Equivalent Isotropic Radiated Power	< 2Watts max. ERP	Passed							
2.1051,22.917(a) 24.238(a)	Undesirable Emissions	<43+10log10(P[Watts])at Band Edge and for all out-of band emissions								
2.1055,22.355, 24.235	Frequency Stability	< 2.5ppm	Refer to attached FCC ID: PKRNVWE725 of Test Report.							
RECEIVER MODE(RX))									
15.107(a)	AC Conducted Emission	EN 55022 Class B	Passed by -3.30 dB Passed by -3.74 dB(AV)							
15.109(a)	Radiated Emissions	< FCC 15.209 Limit	Passed by -2.60 dB							



6.2 Conducted Emissions

EUT : Universal Wireless Monitoring System UWMS-01 Limit apply to : FCC Part15 Subpart B Class B Section 15.107(a)

Test Date : February 28, 2009

Operating Condition : Normal Operating Mode

Environment Condition : Temperature : 24 °C Humidity Level : 42 %RH

: Passed by -3.30dB

Passed by -3.74dB(AV)

The following table shows the highest levels of conducted emissions on both phase of Hot and Neutral line.

Tabulated Conducted Emission Test Data

Detector Mode; CISPR Quasi Peak mode (6dB Bandwidth: 9kHz).

Test data sheets follow

	Correcton				Quasi-Pe	eak Mode			Avera	ge Mode	
Freq [MHz]	AMN	C.L	Phase [H/N]	Limit	Reading	n	Margin	Lim it	Reading	Emission Level	Margin
	,	0.1		[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dBuV]
0.150	0.06	0.03	N	66.00	62.61	62.70	-3.30	56.00	52.17	52.26	-3.74
0.222	0.07	0.10	Η	64.00	55.00	55.17	-8.83	54.00	40.44	40.61	-13.39
0.302	0.08	0.22	Н	61.70	48.06	48.36	-13.34	51.70	41.09	41.39	-10.31
0.422	0.08	0.26	Н	58.30	42.51	42.85	-15.45	48.30	36.39	36.73	-11.57
0.542	0.07	0.30	Н		34.50	34.87	-21.13	40.00	27.86	28.23	-17.77
0.782	0.08	0.30	Н	56.00	26.75	27.13	-28.87		18.71	19.09	-26.91
1.382	0.03	0.45	N	36.00	31.03	31.51	-24.49	46.00	25.53	26.01	-19.99
2.282	0.03	0.56	Н		31.79	32.38	-23.62		25.97	26.56	-19.44
6.546	0.04	0.93	Н		25.52	26.49	-33.51		19.43	20.40	-29.60
9.970	0.08	1.03	Н	60.00	37.07	38.18	-21.82	50.00	33.00	34.11	-15.89
13.994	0.07	1.22	Н	60.00	39.86	41.15	-18.85	50.00	32.55	33.84	-16.16
26.610	0.18	1.54	Н		38.68	40.40	-19.60		34.37	36.09	-13.91

NOTES:


- 1. H: Hot Line, N:Neutral Line
- 2. Emission Level = Reading + Correction Factor
- 3. Margin = Emission Level Limit
- 4. Measurement uncertainty estimated at ±1.38 dB.


The measurement uncertainty is given with a confidence of 95.45 % with the coverage factor, k=2.



Plots of Conducted Emission Test





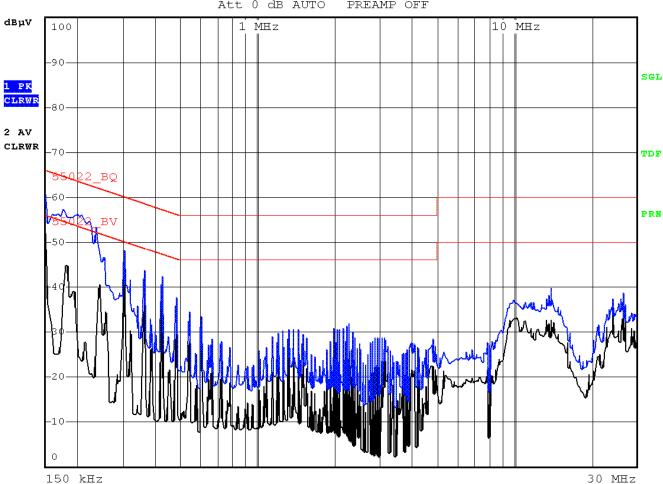

Test Mode: HOT

Model Name: UWMS-01


Classification: FCC Part 15 Subpart B Class B



Plots of Conducted Emission Test



RBW 9 kHz
MT 20 ms
Att 0 dB AUTO PREAMP OFF

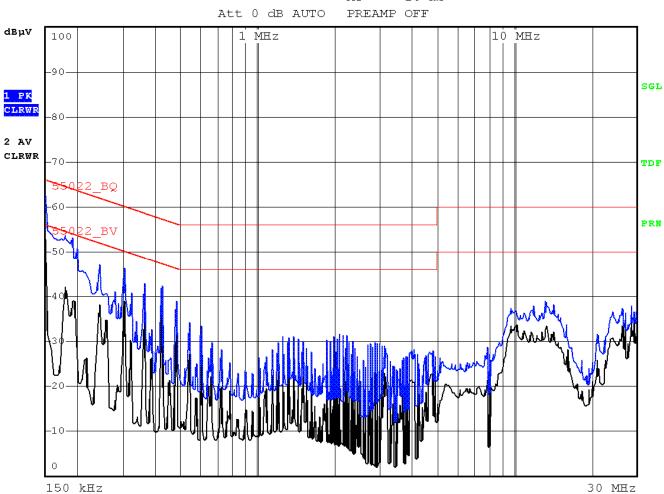

Test Mode: NEUTRAL Model Name: UWMS-01

Classification: FCC Part 15 Subpart B Class B



6.3 Radiated Emissions

EUT : Universal Wireless Monitoring System UWMS-01 Limit apply to : FCC Part15 Subpart B Class B Section 15.109(a)

Test Date : February 28, 2009

Operating Condition : Normal Operating Mode

Environment Condition : Temperature : -1 °C Humidity Level : 52 %RH

Result : Passed by -2.60dB

Radiated Emission Test Data

The following table shows the highest levels of radiated emissions on both polarization of horizontal and vertical.

Detector mode: CISPR Quasi-Peak mode (6dB Bandwidth: 120 kHz)

Measurement Distance: 3 meters

Frequency [MHz]	Reading [dB#V]	Polarization [* H/* *V]	Ant.Factor [dB]	Cable Loss [dB]	Limit [dB#/m]	Emission Level [dB#/m]	Margin [dB]
34.65	23,23	V	11.99	1.32	40.00	36.54	-3.46
48.49	23.61	V	12.22	1.57	40.00	37.40	-2.60
125.01	26.40	Н	11.96	2.44	43.50	40.80	-2.70
138.41	24.03	V	12.85	2.58	43.50	39.47	-4.03
250.02	26.67	Н	11.83	3.51	46.00	42.01	-3.99
375.03	16.94	Н	15.20	4.35	46.00	36.49	-9.51
405.60	19.45	Н	15.92	4.57	46.00	39.94	-6.06
500.03	19.20	Н	17.68	5.09	46.00	41.97	-4.03
625.04	14.45	Н	20.13	5.73	46.00	40.31	-5.69

NOTES:

- 1. * H : Horizontal polarization , ** V : Vertical polarization
- 2. Emission Level = Reading + Antenna factor + Cable loss
- 3. Margin value = Emission Level Limit
- 4. All other emissions not reported were more than 25dB below the permitted limit.
- 5. Measurement uncertainty estimated at ± 4.08 dB.

The measurement uncertainty is given with a confidence of 95.45 % with the coverage factor, k=2.



6.4 Effective Radiated Power Output Data

EUT : Universal Wireless Monitoring System UWMS-01

Limit apply to : FCC Part 22.913(a)(2)

Test Date : May 6, 2009 Operating Condition : CDMA Mode

Environment Condition : Temperature : 25 °C Humidity Level : 65 %RH

Result : Passed

Effective Radiated Power Output Data

The following table shows the highest levels of radiated emissions on both polarization of horizontal and vertical.

Detector mode: Peak detector mode (RBW=VBW=3MHz)

Measurement Distance: 3 meters

Frequency [MHz]	Reading [dBm]	Polarization [*H/**V]	Ant& Cable Loss [dB]	ERP [dBm]	E RP [W]	Limit ERP [W]
824.70	-3.16	V	29.62	26.46	0.442	7.00
836.49	-3.20	V	29.74	26.54	0.450	7.00
848.31	-3.76	V	29.86	26.10	0.407	7.00

NOTES:

- 1. * H : Horizontal polarization , ** V : Vertical polarization
- 2. Emission Level = Reading + Antenna factor + Cable loss
- 3. Measurement uncertainty estimated at ± 4.08 dB. The measurement uncertainty is given with a confidence of 95.45 % with the coverage factor, k=2.



EUT : Universal Wireless Monitoring System UWMS-01

Limit apply to : FCC Part 24.232(b)

Test Date : May 6, 2009

Operating Condition : PCS CDMA Mode

Environment Condition : Temperature : 25 °C Humidity Level : 65 %RH

Result : Passed

Effective Isotropic Radiated Power Output Data

The following table shows the highest levels of radiated emissions on both polarization of horizontal and vertical.

Detector mode: Peak detector mode (RBW=VBW=3MHz)

Measurement Distance: 3 meters

Frequency [MHz]	ERP [dBm]	Polarization [*H/**V]	Antenna Gain (dB)	EI RP [dB m]	EIR P [W]	Limit EIR P [W]
1851.25	27.13	V	2.15	29.28	0.847	2.00
1880.00	27.25	V	2.15	29.40	0.871	2.00
1908.75	27.18	V	2.15	29.33	0.857	2.00

NOTES:

- 1. * H : Horizontal polarization , ** V : Vertical polarization
- 2. ERP Level = Reading + Antenna factor + Cable loss + Amp gain
- 3. Measurement uncertainty estimated at ± 4.08 dB.

The measurement uncertainty is given with a confidence of 95.45 % with the coverage factor, k=2.



6.5 Radiated Spurious Emission Data

EUT : Universal Wireless Monitoring System UWMS-01

Limit apply to : FCC Part 22.917(a)

Test Date : May 6, 2009 Operating Condition : CDMA Mode

Environment Condition : Temperature : 25 °C Humidity Level : 65 %RH

Result : Passed

Radiated Spurious Emission Test Data

The following table shows the highest levels of radiated emissions on both polarization of horizontal and vertical.

Detector mode: Peak detector mode (RBW=VBW=3MHz)

Operating Frequency: 824.70 MHz

Measured Output Power: 26.46 dBm = 0.442 W

Measurement Distance : 3 meters Limit : 43+10log10(W) = **39.45dBc**

Frequency [MHz]	Reading [dBm]	Polarization [*H/**V]	Substitute Antenna Gain [dB]	Measurement [dBm]	Measurement [dBc]	Limit [dBc]
1649.40	-48.10	V	7.60	-40.50	66.96	39.45
2474.10	-53.60	V	7.00	-46.60	73.06	39.45
3298.80	-73.60	V	8.30	-65.30	91.76	39.45
4123.50	-78.00	V	10.50	-67.50	93.96	39.45
4948.20	-88.90	V	13.50	-75.40	101.86	39.45

NOTES:

1. * H : Horizontal polarization , ** V : Vertical polarization

2. Measurement uncertainty estimated at ± 4.08 dB.

The measurement uncertainty is given with a confidence of 95.45 % with the coverage factor, k=2.



EUT : Universal Wireless Monitoring System UWMS-01

Limit apply to : FCC Part 22.917(a)

Test Date : May 6, 2009 Operating Condition : CDMA Mode

Environment Condition : Temperature : 25 °C Humidity Level : 65 %RH

Result : Passed

Radiated Spurious Emission Test Data

The following table shows the highest levels of radiated emissions on both polarization of horizontal and vertical.

Detector mode: Peak detector mode (RBW=VBW=3MHz)

Operating Frequency: 836.49 MHz

Measured Output Power: 26.54 dBm = 0.450 W

Measurement Distance : 3 meters Limit : 43+10log10(W) = **39.53dBc**

Frequency [MHz]	Reading [dBm]	Polarization [*H/**V]	Substitute Antenna Gain [dB]	Measurement [dBm]	Measurement [dBc]	Limit [dBc]
1673.04	-43.40	V	7.60	-35.80	62.34	39.53
2509.56	-51.56	V	7.00	-44.56	71.10	39.53
3346.08	-69.08	V	8.30	-60.78	87.32	39.53
4182.60	-72.28	V	10.50	-61.78	88.32	39.53
5019.12	-79.70	V	13.50	-66.20	92.74	39.53

NOTES:

1. * H : Horizontal polarization , ** V : Vertical polarization

2. Measurement uncertainty estimated at ±4.08 dB.

The measurement uncertainty is given with a confidence of 95.45 % with the coverage factor, k=2.



EUT : Universal Wireless Monitoring System UWMS-01

Limit apply to : FCC Part 22.917(a)

Test Date : May 6, 2009 Operating Condition : CDMA Mode

Environment Condition : Temperature : 25 °C Humidity Level : 65 %RH

Result : Passed

Radiated Spurious Emission Test Data

The following table shows the highest levels of radiated emissions on both polarization of horizontal and vertical.

Detector mode: Peak detector mode (RBW=VBW=3MHz)

Operating Frequency: 848.31 MHz

Measured Output Power: 26.10 dBm = 0.407 W

Measurement Distance : 3 meters Limit : 43+10log10(W) = **39.09 dBc**

Frequency [MHz]	Reading [dBm]	Polarization [*H/**V]	Substitute Antenna Gain [dB]	Measurement [dBm]	Measurement [dBc]	Limit [dBc]
1673.04	-44.40	V	7.60	-36.80	63.34	39.09
2509.56	-52.50	V	7.00	-45.50	72.04	39.09
3346.08	-69.75	V	8.30	-61.45	87.99	39.09
4182.60	-73.28	V	10.50	-62.78	89.32	39.09
5019.12	-80.73	V	13.50	-67.23	93.77	39.09

NOTES:

1. * H : Horizontal polarization , ** V : Vertical polarization

2. Measurement uncertainty estimated at ±4.08 dB.

The measurement uncertainty is given with a confidence of 95.45 % with the coverage factor, k=2.



EUT : Universal Wireless Monitoring System UWMS-01

Limit apply to : FCC Part 24.238(a)

Test Date : May 6, 2009

Operating Condition : PCS CDMA Mode

Environment Condition : Temperature : 25 °C Humidity Level : 65 %RH

Result : Passed

Radiated Spurious Emission Test Data

The following table shows the highest levels of radiated emissions on both polarization of horizontal and vertical.

Detector mode: Peak detector mode (RBW=VBW=3MHz)

Operating Frequency: 1851.25 MHz

Measured Output Power: 27.13 dBm = 0.516 W

Measurement Distance : 3 meters Limit : 43+10log10(W) = **40.12dBc**

Frequency [MHz]	Reading [dBm]	Polarization [*H/**V]	Substitute Antenna Gain [dB]	Measurement [dBm]	Measurement [dBc]	Limit [dBc]
3702.50	-38.00	V	9.30	-28.70	55.16	40.12
5553.75	-51.39	V	11.50	-39.89	66.35	40.12
7405.00	-61.55	V	16.20	-45.35	71.81	40.12
9256.25	-70.42	V	19.10	-51.32	77.78	40.12
11107.50	-92.04	V	24.70	-67.34	93.80	40.12

NOTES:

1. * H : Horizontal polarization , ** V : Vertical polarization

2. Measurement uncertainty estimated at ±4.08 dB.

The measurement uncertainty is given with a confidence of 95.45 % with the coverage factor, k=2.



EUT : Universal Wireless Monitoring System UWMS-01

Limit apply to : FCC Part 24.238(a)

Test Date : May 6, 2009

Operating Condition : PCS CDMA Mode

Environment Condition : Temperature : 25 °C Humidity Level : 65 %RH

Result : Passed

Radiated Spurious Emission Test Data

The following table shows the highest levels of radiated emissions on both polarization of horizontal and vertical.

Detector mode: Peak detector mode (RBW=VBW=3MHz)

Operating Frequency: 1880.00 MHz

Measured Output Power: 27.25 dBm = 0.530 W

Measurement Distance : 3 meters Limit : 43+10log10(W) = **40.24 dBc**

Frequency [MHz]	Reading [dBm]	Polarization [*H/**V]	Substitute Antenna Gain [dB]	Measurement [dBm]	Measurement [dBc]	Limit [dBc]
3760.00	-39.11	V	9.30	-29.81	56.27	40.24
5640.00	-60.71	V	11.50	-49.21	75.67	40.24
7520.00	-65.80	V	16.20	-49.60	76.06	40.24
9400.00	-77.30	V	19.10	-58.20	84.66	40.24
11280.00	-92.24	V	24.70	-67.54	94.00	40.24

NOTES:

1. * H : Horizontal polarization , ** V : Vertical polarization

The measurement uncertainty is given with a confidence of 95.45 % with the coverage factor, k=2.

^{2.} Measurement uncertainty estimated at ±4.08 dB.



EUT : Universal Wireless Monitoring System UWMS-01

Limit apply to : FCC Part 24.238(a)

Test Date : May 6, 2009

Operating Condition : PCS CDMA Mode

Environment Condition : Temperature : 25 ℃ Humidity Level: 65 %RH

Result : Passed

Radiated Spurious Emission Test Data

The following table shows the highest levels of radiated emissions on both polarization of horizontal and vertical.

Detector mode: Peak detector mode (RBW=VBW=3MHz)

Operating Frequency: 1908.75 MHz

Measured Output Power: 27.18 dBm = 0.522 W

Measurement Distance: 3 meters Limit: $43+10\log 10(W) = 40.18 dBc$

Frequency [MHz]	Reading [dBm]	Polarization [*H/**V]	Substitute Antenna Gain [dB]	Measurement [dBm]	Measurement [dBc]	Limit [dBc]
3817.50	-35.48	V	9.83	-25.65	52.11	40.18
5726.25	-57.06	V	11.85	-45.21	71.67	40.18
7635.00	-63.12	V	16.50	-46.62	73.08	40.18
9543.75	-78.80	V	19.60	-59.20	85.66	40.18
11452.50	-88.44	V	24.90	-63.54	90.00	40.18

NOTES:

- 1 * H : Horizontal polarization , ** V : Vertical polarization
- 2. Measurement uncertainty estimated at ± 4.08 dB.

The measurement uncertainty is given with a confidence of 95.45 % with the coverage factor, k=2.

7. Sample Calculation and Other Information

7.1 Sample Calculations

 $dB\mu V = 20 \log 10 (\mu V/m)$ $\mu V = 10^{(dB\mu V/20)}$

EX. 1.

@ 0.150 MHz Class B limit = $66.00 \text{ dB}\mu\text{V}$

Reading = $62.61 \text{ dB}\mu\text{V}$ (calibrated level) AMN factor + Cable Loss = 0.09 dBTotal = $62.70 \text{ dB}\mu\text{V/m}$ Margin = 62.70 - 66.00 = -3.303.30 dB; below limit

EX. 2.

@ 0.150 MHz Class B limit = 66.00 dBμV

Reading = $52.17 \text{ dB}_{\mu}\text{V}$ (calibrated level) AMN factor + Cable Loss = 0.09 dBTotal = $52.26 \text{ dB}_{\mu}\text{V/m}$ Margin = 52.26 - 66.00 = -3.743.74 dB; below limit

EX. 3.

@ 48.49 MHz Class B limit = $40.00 \text{ dB}\mu\text{V/m}$

Reading = $23.61 dB\mu V$ (calibrated level) Antenna factor + Cable Loss = 13.79 dBTotal = $37.40 dB\mu V/m$ $10^{(43.12/20)} = \mu V/m$ Margin = 37.40 -40.00 = -2.60 dB**2,60 dB**; below limit



8. TEST EQUIPMENTS LIST

The listing below denotes the test equipments utilized for the test(s).

Equipment Type	Model	Manufacture	Serial No	Cal Due Date	Use
TEST RECEIVER	ESPI	ROHDE & SCHWARZ	100012	11. 03. 2009	\boxtimes
Conducted Cable	N/A	N/A	N/A	N/A	\boxtimes
LISN	L1-115	Com-Power	241017	01. 10. 2010	\boxtimes
Bilog Antenna	VULB 9160	SCHWARZBECK	9160-3122	01. 24. 2010	\boxtimes
Open Site Cable	OSC-30	N/A	BWS-01	N/A	\boxtimes
Antenna Mast	JAC-3	DAIL EMC	N/A	N/A	
Antenna Turntable Controller	JAC-2	JAEMC	N/A	N/A	\boxtimes
EMI RECEIVER	ESVN30	ROHDE & SCHWARZ	832854/010	07. 25. 2009	\boxtimes
Horn Antenna	BBHA9120D	SCHWARZBECK	234	03. 16. 2011	\boxtimes
RF Amplifier	8348A	Agilent	311A66142	10. 18. 2009	\boxtimes
MXA Signal Analyzer	N9020A	Agilent	US46220101	10. 07. 2009	\boxtimes