



## Certification Test Report

### CFR 47 FCC Part 15, Subpart C Section 15.249 Industry Canada RSS 210, Issue 7

#### BlackLine GPS STINGER / HARPOON

FCC ID: W77BLS  
IC: 8255A-BLS  
Project Code CG-1084

(Report CG-1084-RA-1-2)  
Revision: 2

(This report supersedes CG-1084-RA-1-1)

July 7, 2009

**Prepared for:** Blackline GPS

**Author:** Deniz Demirci  
Senior Wireless / EMC Technologist

---

**Approved by:** Nick Kobrosly  
Director of Canadian Operations

---

**Confidentiality Statement:** This report and the information contained herein represent the results of testing articles/products identified and selected by the client. The tests were performed to specifications and/or procedures approved by the client. National Technical Systems ("NTS") makes no representations expressed or implied that such testing fully demonstrates efficiency, performance, reliability, or any other characteristic of the articles being tested, or similar products. This report should not be relied upon as an endorsement or certification by NTS of the equipment tested, nor does it represent any statement whatsoever as to its merchantability or fitness of the test article or similar products for a particular purpose. This document shall not be reproduced except in full without written approval from National Technical Systems ("NTS") and the customer.

## Report Summary

<b>Test Facility:</b>	<b>National Technical Systems, Canada</b> Product Integrity Laboratory 5151-47 <sup>th</sup> Street, N.E. Calgary Alberta T3J 3R2
<b>Accreditation Numbers:</b>	0214.22 Electrical 0214.23 Mechanical Accredited by A2LA The American Association for Laboratory Accreditation  CLIENTS SERVED: All interested parties FIELDS OF TESTING: Electrical/Electronic, Mechanical/Physical ACCREDITATION DATE:: May 14, 2009 VALID TO: December 31, 2009
<b>Applicant:</b>	BlackLine GPS Suite 101, 1215 13th Street SE Calgary, AB T2G 3J4 Canada
<b>Customer Representative:</b>	Name: Barry Moore Title: VP of product development Phone #: 403-809-8966 Email Address: bmoore@blacklinegps.com

## EUT Description

EUT Description	Manufacturer	Model	Revision	Serial Number
2.4 GHz Wireless transceiver	BlackLine GPS	Stinger / Harpoon	N/A	N/A

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in whole or part without permission from the testing body and the customer.

**Test Summary**

Appendix	Test/Requirement Description	Deviations* from:			Pass / Fail	Applicable FCC Rule Parts	Applicable Industry Canada Rule Parts
		Base Standard	Test Basis	NTS Procedure			
A	20 dB Bandwidth	No	No	No	Pass	FCC Subpart C 15.215 (c)	NA
B	Occupied Bandwidth (99% emission bandwidth)	No	No	No	N/A	N/A	RSS-Gen Issue 2 4.6.1
C	Duty Cycle Correction Factor	No	No	No	N/A	FCC Subpart C 15.35 (c)	RSS-Gen Issue 2 4.5
D	Field Strength of Fundamental	No	No	No	Pass	FCC Subpart C 15.249 (a)	RSS 210 Issue 7 A2.9 (a)
E	Radiated Spurious Emissions Band Edge	No	No	No	Pass	FCC Subpart C 15.249, 15.205	RSS 210 Issue 7 A8.5
F	Radiated Spurious Emissions	No	No	No	Pass	FCC Subpart C 15.249, 15.205	RSS 210 Issue 7 2.7 (Rx), A8.5 (Tx)

Test Result: The product presented for testing complied with test requirements as shown above.

Prepared By: \_\_\_\_\_  
Deniz Demirci  
Senior Wireless/EMC Technologist

Reviewed By: \_\_\_\_\_  
Glen Moore  
Wireless/EMC Manager

Approved By: \_\_\_\_\_  
Alex Mathews  
Quality Management Representative

## Table of Contents

REPORT SUMMARY .....	2
TEST SUMMARY .....	3
REGISTER OF REVISIONS .....	5
1.0 INTRODUCTION .....	6
1.1 PURPOSE .....	6
2.0 EUT DESCRIPTION .....	6
2.1 CONFIGURATION .....	6
2.2 EUT CABLES .....	7
3.0 SUPPORT EQUIPMENT .....	7
3.1 CONFIGURATION .....	7
3.2 TEST BED/PERIPHERAL CABLES .....	7
4.0 TEST ENVIRONMENT .....	7
4.1 NORMAL TEST CONDITIONS .....	7
APPENDICES .....	8
APPENDIX A: 20 DB BANDWIDTH .....	9
APPENDIX B: OCCUPIED BANDWIDTH .....	11
APPENDIX C: DUTY CYCLE CORRECTION FACTOR .....	13
APPENDIX D: FIELD STRENGTH OF FUNDAMENTAL .....	15
APPENDIX E: RADIATED SPURIOUS EMISSIONS BAND EDGE .....	17
APPENDIX F: RADIATED SPURIOUS EMISSIONS .....	20
APPENDIX G: TEST EQUIPMENT LIST .....	23
END OF DOCUMENT .....	24

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in whole or part without permission from the testing body and the customer.

NTS Product Integrity Laboratory, 5151-47<sup>th</sup> Street N.E. Tel: 403-568-6605, Fax: 403-568-6970

## Register of revisions

Revision	Date	Description of Revisions
1	May 14, 2009	Final release
2	July 7, 2009	Changes per ATCB Comments 070709

---

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in whole or part without permission from the testing body and the customer.

NTS Product Integrity Laboratory, 5151-47<sup>th</sup> Street N.E. Tel: 403-568-6605, Fax: 403-568-6970

## 1.0 INTRODUCTION

### 1.1 PURPOSE

The purpose of this document is to describe the tests applied by NTS Canada to demonstrate compliance of the Stinger / Harpoon from BlackLine GPS to FCC Part 15 Subpart C section 15.249 for DXX transmitter and the equivalent sections of Industry Canada's RSS 210, Issue 7

## 2.0 EUT DESCRIPTION

### 2.1 CONFIGURATION

EUT	Name	Model	Revision	Serial Number
	Stinger / Harpoon	Stinger / Harpoon	N/A	N/A
<b>Power Supply</b>	12 V DC Battery powered			
<b>Device Classification</b>	Mobile			
<b>Antenna</b>	4 antennas 1. Stinger quad-band GSM PCB antenna: attached to the Cinterion MC55i module via coax and mounted perpendicular to the main PCB inside the Stinger plastic case. The peak gain of the antenna in the device is -1.8 dBi (880 - 960 MHz) and 0.2 dBi (1850 - 1990 MHz) which meets the module's FCC grant comments of 1.33 dBi at 850 MHz and 2.89 dBi at 1900 MHz. 2. Stinger GPS patch antenna: soldered to the PCB and connected to the GPS module via a PCB trace. The antenna is tuned to 1575 MHz GPS frequency. 3. Stinger 2.4GHz antenna: Internal PCB trace antenna on the main Stinger PCB. This is an inverted F antenna tuned to 2.45 GHz. Connection to the 2.45 GHz radio module is by PCB trace.			
<b>Modulation</b>	GPSK			
<b>EUT Size with Enclosure (H x W x D) (in mm)</b>	120 x 80 x 23			
<b>EUT Weight (in grams)</b>	Less than 300			
<b>Channels/Frequency Range</b>	1 channel, 2450 MHz			
<b>Functional Description</b>	The BlackLine GPS Stinger / Harpoon is a GPS / GSM vehicle security product designed for automotive and marine vehicles. It operates in conjunction with the 2.45 GHz MyPass Key Fob GSM Module in the stinger has a modular approval; FCC# QIPMC55I, IC# 267W-MC55I			

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in whole or part without permission from the testing body and the customer.

---

**2.2 EUT CABLES**

Quantity	Model/Type	Routing		Shielded / Unshielded	Description	Cable Length (m)
		From	To			
1	DC Power Cable	External Battery	EUT	Unshielded	Power Cable	1.9

For all test cases pre-scans were completed in all modes to determine worst case levels.

**3.0 SUPPORT EQUIPMENT**
**3.1 CONFIGURATION**

Agilent Wireless Communication Test Set 8960 was used for configuring co-located GSM850 and PCS channels with maximum power output.

**3.2 TEST BED/PERIPHERAL CABLES**

N/A

**4.0 TEST ENVIRONMENT**
**4.1 NORMAL TEST CONDITIONS**

Temperature: 20 – 23 °C  
 Relative Humidity: 28 – 35 %  
 Atmospheric pressure: 883 – 890 mbar  
 Nominal test voltage: 120 VAC 60Hz / 12 VDC

The values are the limits registered during the test period.

## APPENDICES

---

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in whole or part without permission from the testing body and the customer.

NTS Product Integrity Laboratory, 5151-47<sup>th</sup> Street N.E. Tel: 403-568-6605, Fax: 403-568-6970

## APPENDIX A: 20 DB BANDWIDTH

### A.1. Base Standard & Test Basis

<b>Base Standard</b>	FCC PART 15.215 (c)
<b>Test Basis</b>	FCC PART 15.215 (c)
<b>Test Method</b>	FCC PART 15.215 (c)

### A.2. Specifications

15.215 (c) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

### A.3. Deviations

Deviation Number	Time & Date	Description and Justification of Deviation	Deviation Reference			Approval
			Base Standard	Test Basis	NTS Procedure	
None						

### A.4. Test Procedure

FCC Publication 558074.

### A.5. Test Results

The EUT is in compliance with the requirement as specified above

Frequency (MHz)	20 dB Bandwidth (MHz)
2450	1.122

All final reported values are corrected values.

### A.6. Operating Mode During Test

Stinger 701-0006-AC, L01+, battery charging, 10 ms message period (Duty cycle was set to the highest supported duty cycle of the device, to speed up and simplify measurements), EUT flat on table.  
Set to Max Tx power as 0 dBm

### A.7. Tested By

This testing was conducted in accordance with the ISO 17025:2005 scope of accreditation, table 1;  
Quality Manual.

Name: Spencer Watson  
Function: EMC Technologist


### A.8. Test date

April 22, 2009

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in whole or part without permission from the testing body and the customer.

NTS Product Integrity Laboratory, 5151-47<sup>th</sup> Street N.E. Tel: 403-568-6605, Fax: 403-568-6970

Figure 1 20 dB Bandwidth

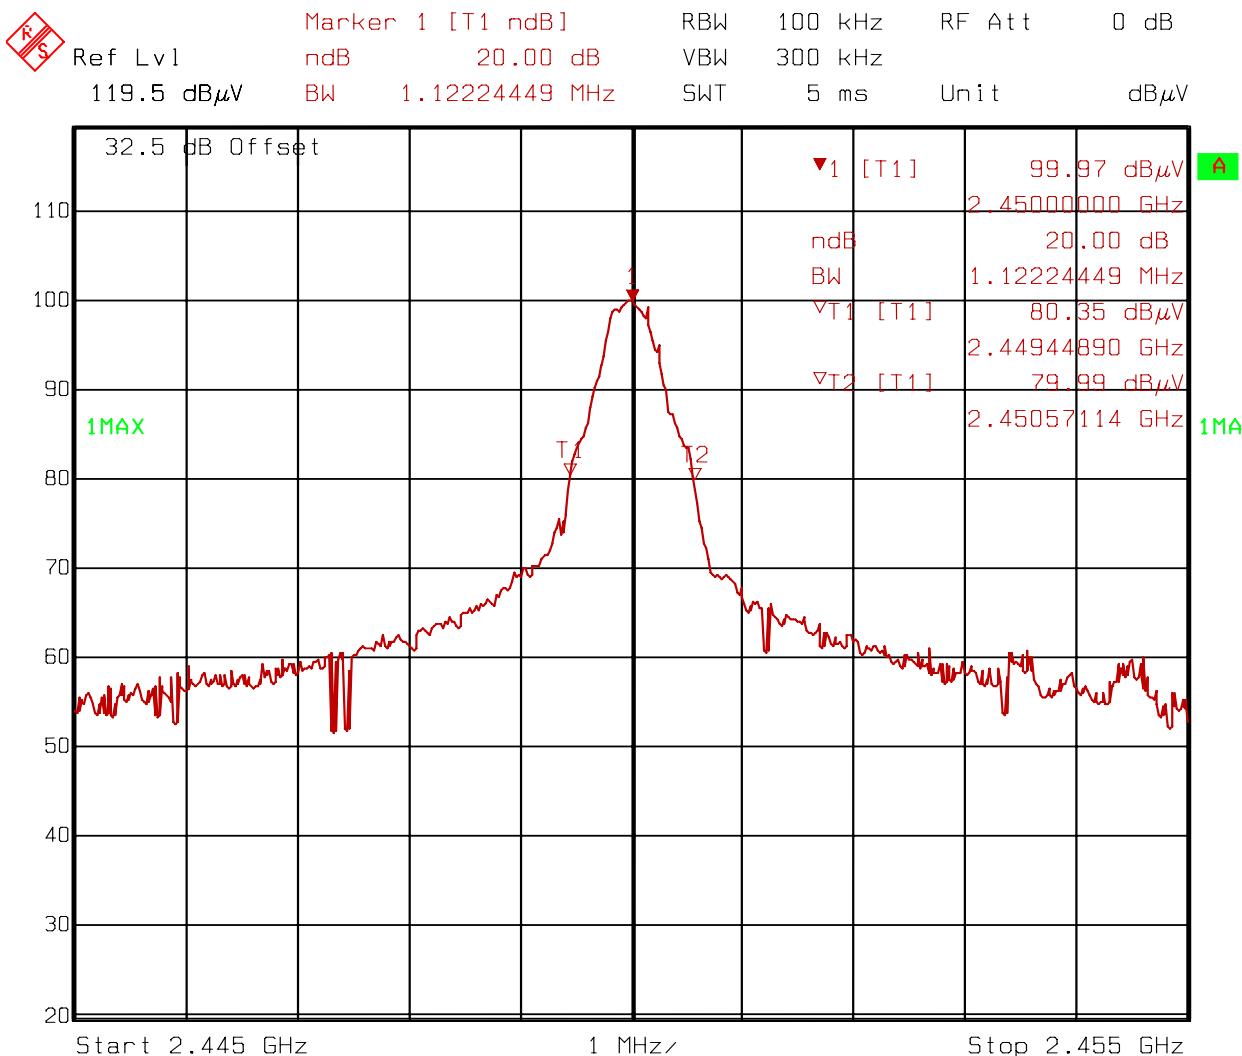

Title: CG-1084 Blackline Stinger Conf39  
 Date: 22.APR.2009 11:38:34

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in whole or part without permission from the testing body and the customer.

NTS Product Integrity Laboratory, 5151-47<sup>th</sup> Street N.E. Tel: 403-568-6605, Fax: 403-568-6970

## APPENDIX B: OCCUPIED BANDWIDTH

### B.1. Base Standard & Test Basis

Base Standard	RSS-Gen Issue 2 4.6.1
Test Basis	RSS-Gen Issue 2 4.6.1
Test Method	RSS-Gen Issue 2 4.6.1

### B.2. Specifications

4.6.1 When an occupied bandwidth value is not specified in the applicable RSS, the transmitted signal bandwidth to be reported is to be its 99% emission bandwidth, as calculated or measured.

### B.3. Test Procedure

RSS-Gen Issue 2

### B.4. Test Results

Frequency (MHz)	Occupied Bandwidth (MHz)
2450	1.042

All final reported values are corrected values

### B.5. Operating Mode During Test

Stinger 701-0006-AC, L01+, battery charging, 10 ms message period (Duty cycle was set to the highest supported duty cycle of the device, to speed up and simplify measurements), EUT flat on table.  
Set to Max Tx power as 0 dBm

### B.6. Tested By


This testing was conducted in accordance with the ISO 17025:2005 scope of accreditation, table 1;  
Quality Manual.

Name: Spencer Watson  
Function: EMC Technologist

### B.7. Test date

April 22, 2009

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in whole or part without permission from the testing body and the customer.

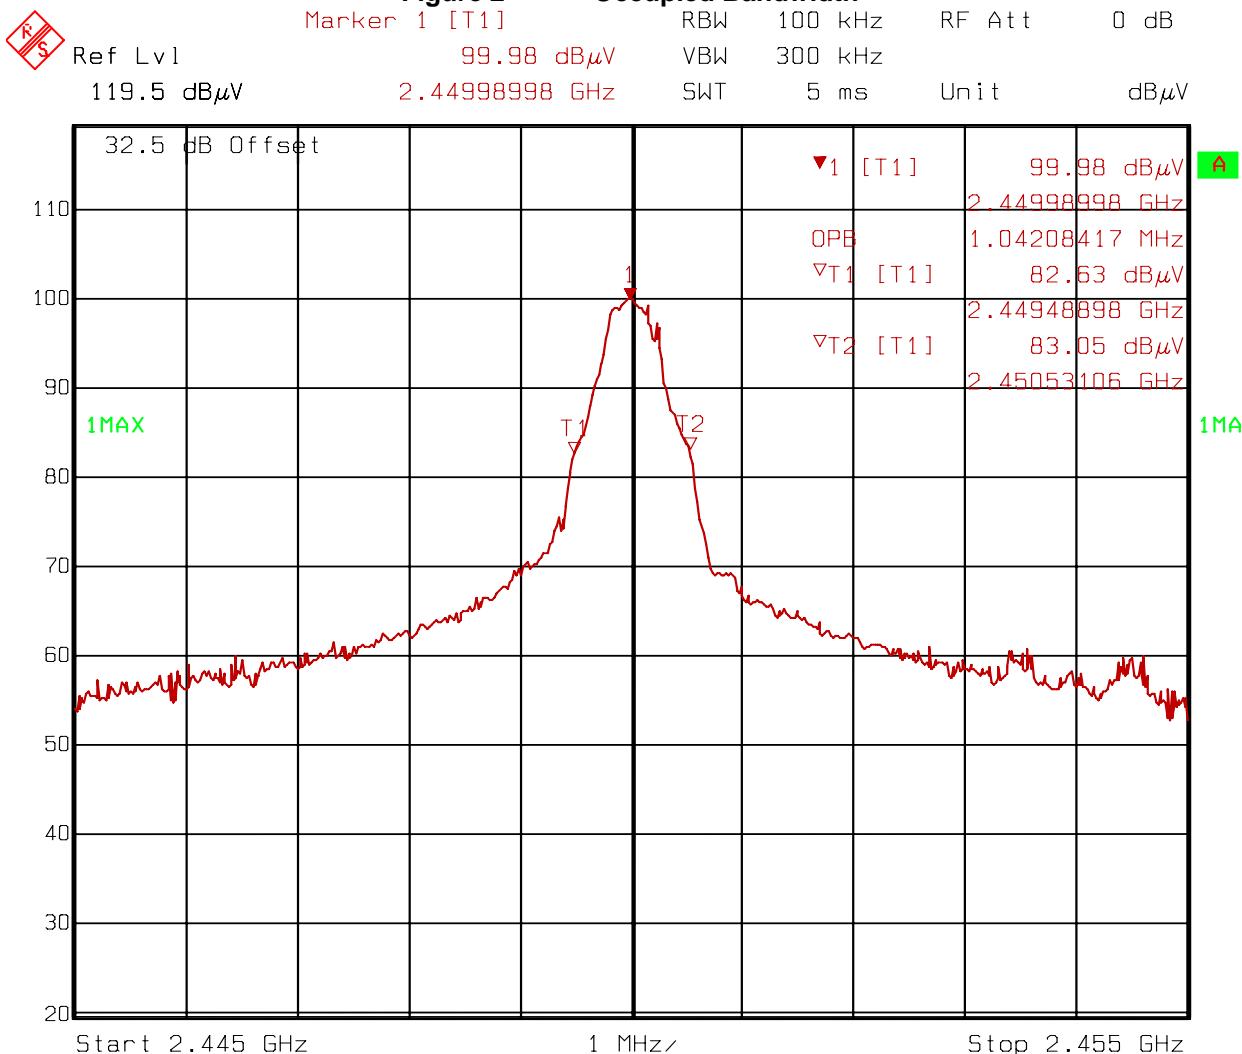**Figure 2 Occupied Bandwidth**

Title: CG-1084 Blackline Stinger Conf39  
 Date: 22.APR.2009 11:42:03

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in whole or part without permission from the testing body and the customer.

## APPENDIX C: DUTY CYCLE CORRECTION FACTOR

### C.1. Base Standard & Test Basis

<b>Base Standard</b>	FCC 15.35 (c) RSS-Gen Issue 2 4.5
<b>Test Basis</b>	FCC 15.35 (c) as per FCC Publication 558074 RSS-Gen Issue 2 4.5
<b>Test Method</b>	NTS Calgary SOP CAG EMC 02 Emission Test Methods and Zero span

### C.2. Specifications

15.35 (c) Unless otherwise specified, e.g. §15.255(b), when the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value. The exact method of calculating the average field strength shall be submitted with any application for certification or shall be retained in the measurement data file for equipment subject to notification or verification.

### C.3. Deviations

Deviation Number	Time & Date	Description and Justification of Deviation	Deviation Reference			Approval
			Base Standard	Test Basis	NTS Procedure	
none						

### C.4. Test Procedure

As per FCC 15.35 with analyzer in Zero span mode.

### C.5. Operating Mode During Test

Stinger normal operating mode

### C.6. Test Results

Duty cycle correction factor =  $20 \times \log (0.197/100) = -54.11 \text{ dB}$

Therefore the maximum allowable Duty cycle correction factor of -20 dB can be applied

### C.7. Tested By

This testing was conducted in accordance with the ISO 17025:2005 scope of accreditation, table 1; Quality Manual.

Name: Deniz Demirci  
Function: Senior EMC / Wireless Technologist


### C.8. Test date

March 6, 2009

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in whole or part without permission from the testing body and the customer.


NTS Product Integrity Laboratory, 5151-47<sup>th</sup> Street N.E. Tel: 403-568-6605, Fax: 403-568-6970

Figure 3

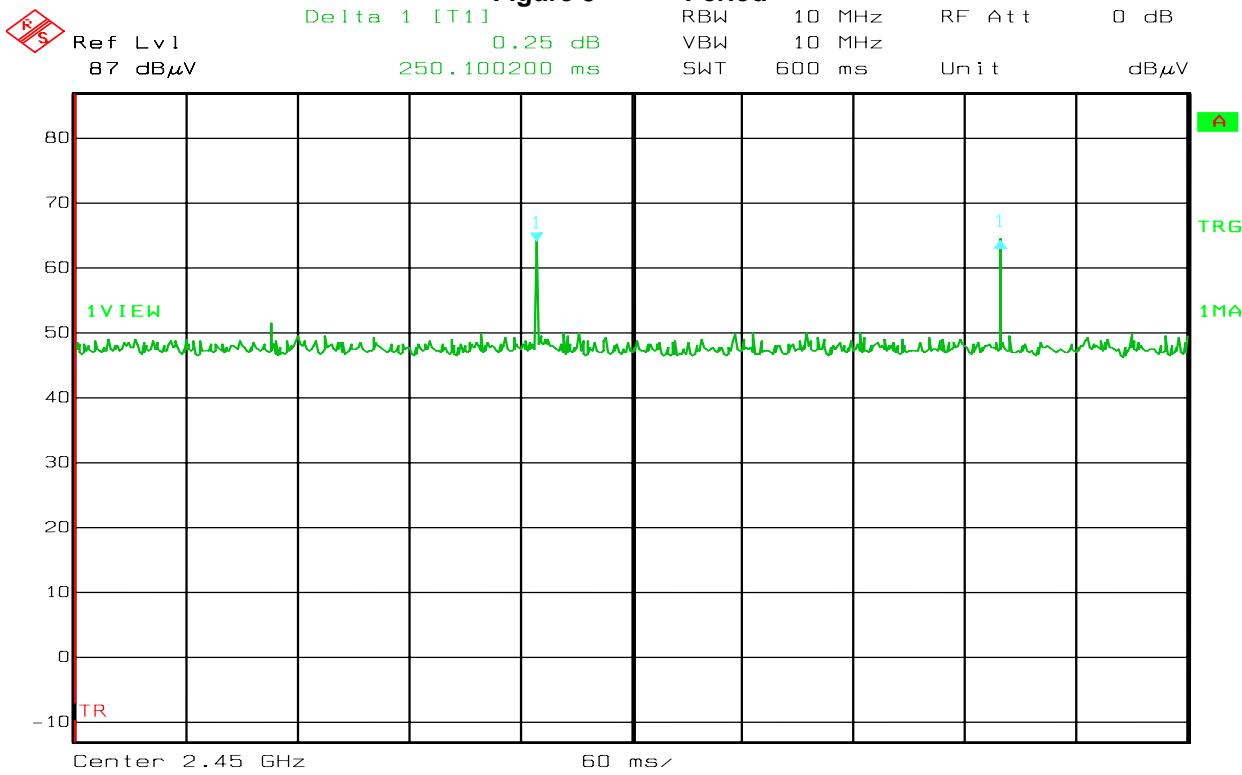

Date: 6.MAR.2009 13:34:13

Figure 4

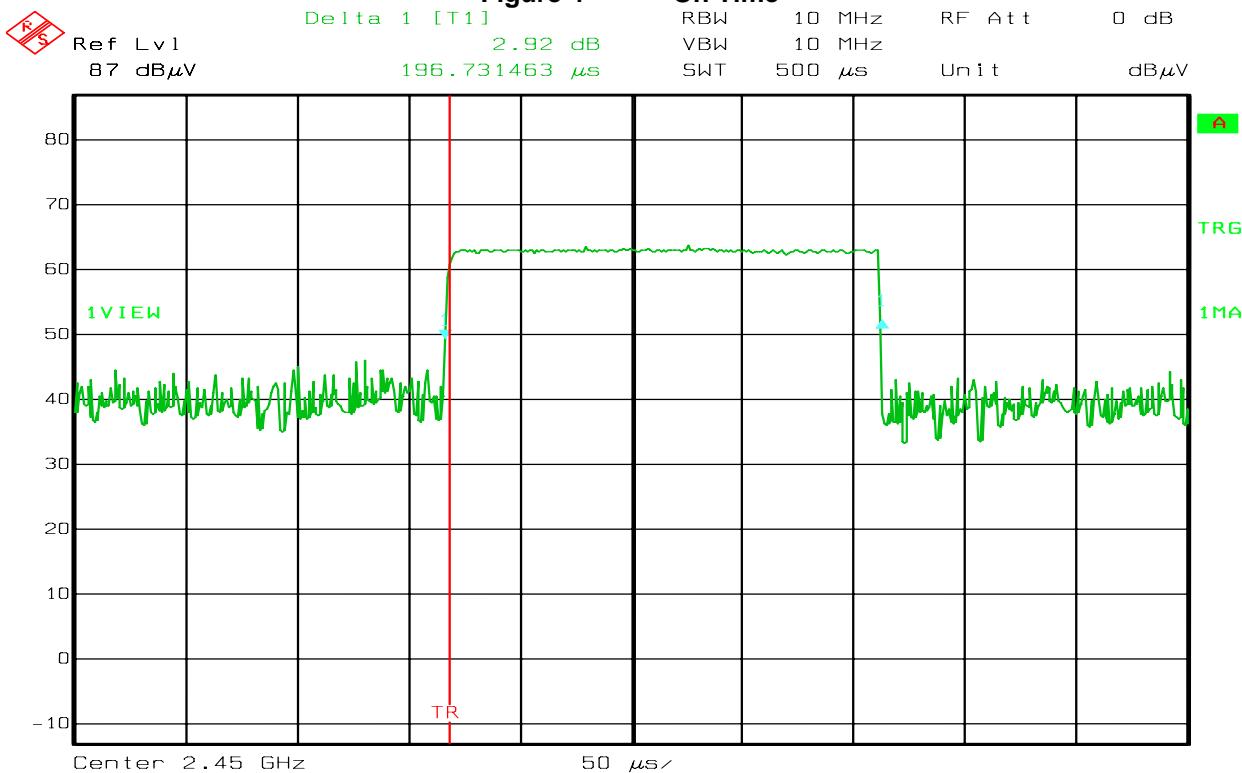

Date: 6.MAR.2009 13:31:51

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in whole or part without permission from the testing body and the customer.

NTS Product Integrity Laboratory, 5151-47<sup>th</sup> Street N.E. Tel: 403-568-6605, Fax: 403-568-6970

## APPENDIX D: FIELD STRENGTH OF FUNDAMENTAL

### D.1. Base Standard & Test Basis

<b>Base Standard</b>	FCC 15.249 (a) RSS 210 Issue 7 A2.9 (a)
<b>Test Basis</b>	FCC 15.247 RSS-Gen Issue 2 4.8
<b>Test Method</b>	NTS Calgary SOP CAG EMC 02 Emission Test Methods

### D.2. Specifications

(a) The maximum field strength shall not exceed 50 millivolts/meter at 3 m distance in the 2400 MHz-2483.5 MHz band

(e) The Field strength limits in this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

### D.3. Operating Mode During Test

Stinger 701-0006-AC, L01+, battery charging, 10 ms message period (Duty cycle was set to the highest supported duty cycle of the device, to speed up and simplify measurements), EUT flat on table.  
Set to Max Tx power as 0 dBm

### D.4. Test Results

Compliant – The maximum Peak field strength of fundamental was 99.75 dB $\mu$ V/m at 3 meter distance. It has 14.23 dB margin to the peak and average limits

### D.5. Test Data Summary

Frequency (MHz)	Peak field strength of fundamental (dB $\mu$ V/m)	Duty Cycle Correction Factor (dB)	Average field strength of fundamental (dB $\mu$ V/m)
2450	99.75	-20	79.75

All final reported values are corrected values

### D.6. Sample Calculations

Average Limit =  $20 \times \log(50000) = 93.98 \text{ dB}\mu\text{V/m}$   
Peak Limit = Average Limit + 20 = 113.98 dB $\mu$ V/m

### D.7. Tested By

This testing was conducted in accordance with the ISO 17025:2005 scope of accreditation, table 1; Quality Manual.


Name: Spencer Watson  
Function: EMC Technologist

### D.8. Test date

April 22, 2009

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in whole or part without permission from the testing body and the customer.

Figure 5 Field Strength of fundamental at 3 m distance

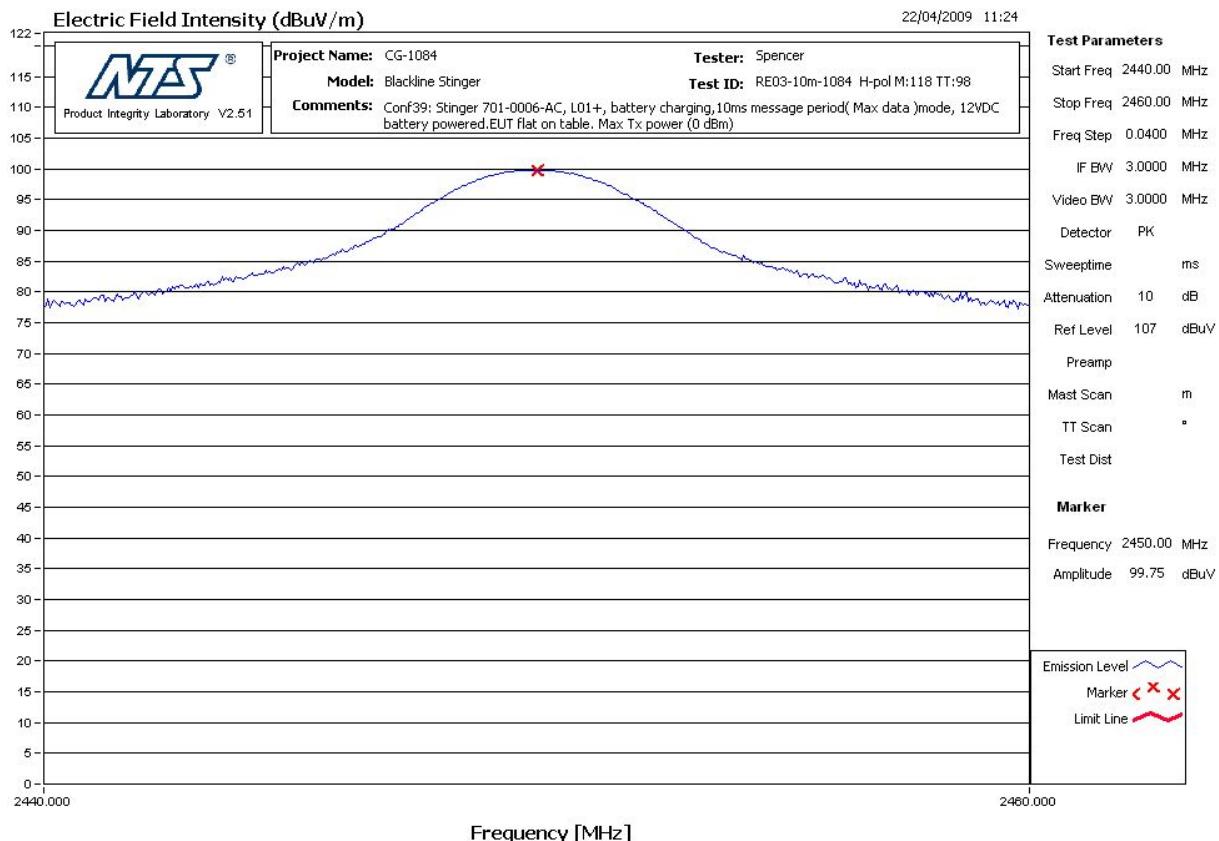

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in whole or part without permission from the testing body and the customer.

NTS Product Integrity Laboratory, 5151-47<sup>th</sup> Street N.E. Tel: 403-568-6605, Fax: 403-568-6970

## APPENDIX E: RADIATED SPURIOUS EMISSIONS BAND EDGE

### E.1. Base Standard & Test Basis

<b>Base Standard</b>	FCC CFR Title 47 – Telecommunications, Chapter I Part 15.209 – Radio Frequency Devices, Part 15.205 – Restricted bands of operation RSS 210 Issue 7 A8.5
<b>Test Basis</b>	ANSI C63.4-2003 Methods of Measurement of Radio Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz,
<b>Test Method</b>	NTS Calgary SOP CAG EMC 02 Emission Test Methods

### E.2. Specifications: FCC 15.205 and RSS 210 Issue 7 2.2 Restricted bands of operation.

MHz	MHz	MHz	GHz
0.090–0.110	16.42–16.423	399.9–410	4.5–5.15
<sup>1</sup> 0.495–0.505	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775	37.5–38.25	1435–1626.5	9.0–9.2
4.20725–4.20775	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225	123–138	2200–2300	14.47–14.5
8.291–8.294	149.9–150.05	2310–2390	15.35–16.2
8.362–8.366	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625–8.38675	156.7–156.9	2690–2900	22.01–23.12
8.41425–8.41475	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293	167.72–173.2	3332–3339	31.2–31.8
12.51975–12.52025	240–285	3345.8–3358	36.43–36.5
12.57675–12.57725	322–335.4	3600–4400	N/A
13.36–13.41	N/A	N/A	N/A

(b) The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in whole or part without permission from the testing body and the customer.

**E.3. Test Procedure**

RF radiated measurement at 3 meters distance.

**E.4. Operating Mode During Test**

Stinger 701-0006-AC, L01+, battery charging, 10 ms message period (Duty cycle was set to the highest supported duty cycle of the device, to speed up and simplify measurements), EUT flat on table.

Set to Max Tx power as 0 dBm

**E.5. Test Results**

Compliant

Frequency (MHz)	Band Edge Peak Emission Level (dB $\mu$ V/m)	Duty cycle Correction Factor (dB)	Band Edge Average Emission Value (dB $\mu$ V/m)	Peak Limit (dB $\mu$ V/m)	Average Limit (dB $\mu$ V/m)	Margin (dB)
2400.0	59.65	-20	39.65	73.98	53.98	14.33
2483.5	61.32	-20	41.32	73.98	53.98	12.66

All final reported values are corrected values

**E.6. Sample Calculations**

Average Limit:  $500 \mu\text{V/m} @ 3\text{m} = 20 * \log(500) = 53.98 \text{ dB}\mu\text{V/m}$ ,  
Peak limit = Average Limit + 20 = 73.98 dB $\mu$ V/m

Band Edge Average Emission value (dB $\mu$ V/m) = Band Edge Peak Emission Level (dB $\mu$ V/m) + Duty cycle correction factor (dB)

**E.7. Tested By**


This testing was conducted in accordance with the ISO 17025:2005 scope of accreditation, table 1; Quality Manual.

Name: Spencer Watson  
Function: EMC Technologist

**E.8. Test date**


March 11, 2009

Figure 6 Band Edge 2400.0 MHz

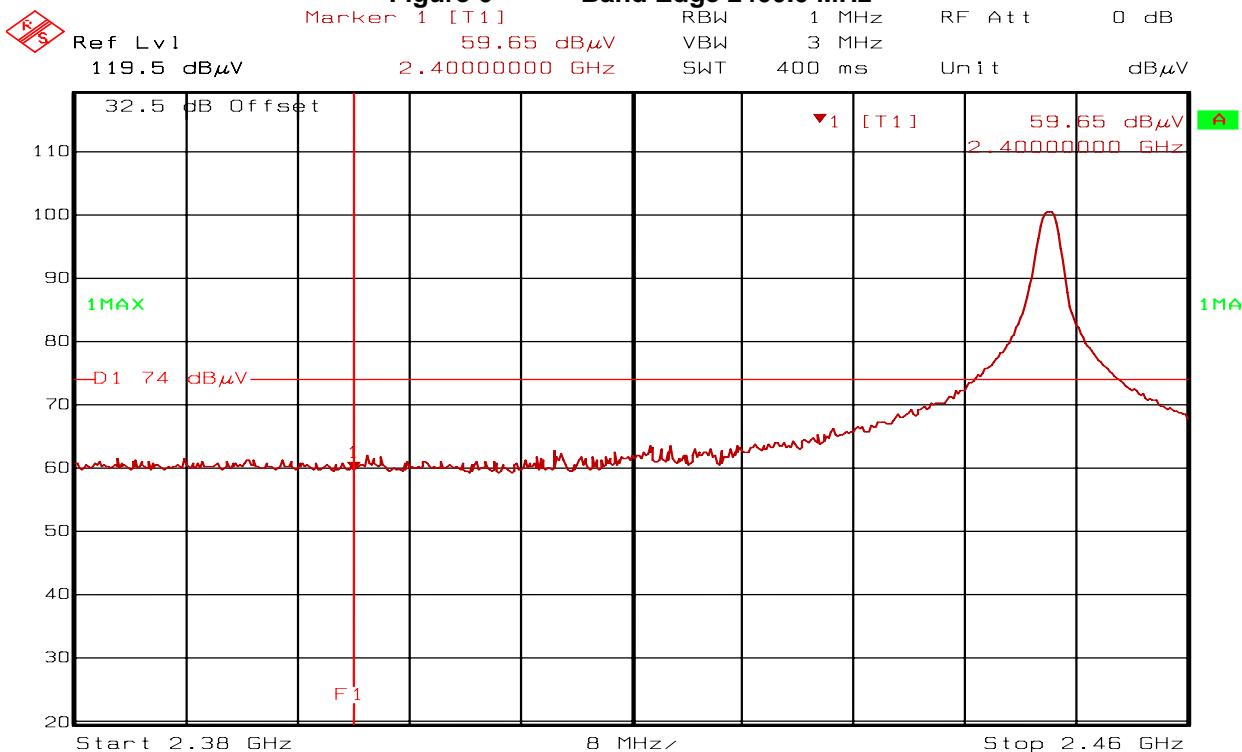

Title: CG-1084 Blackline Stinger Conf39 High Bandedge  
Date: 22.APR.2009 12:16:07

Figure 7 Band Edge 2483.5 MHz

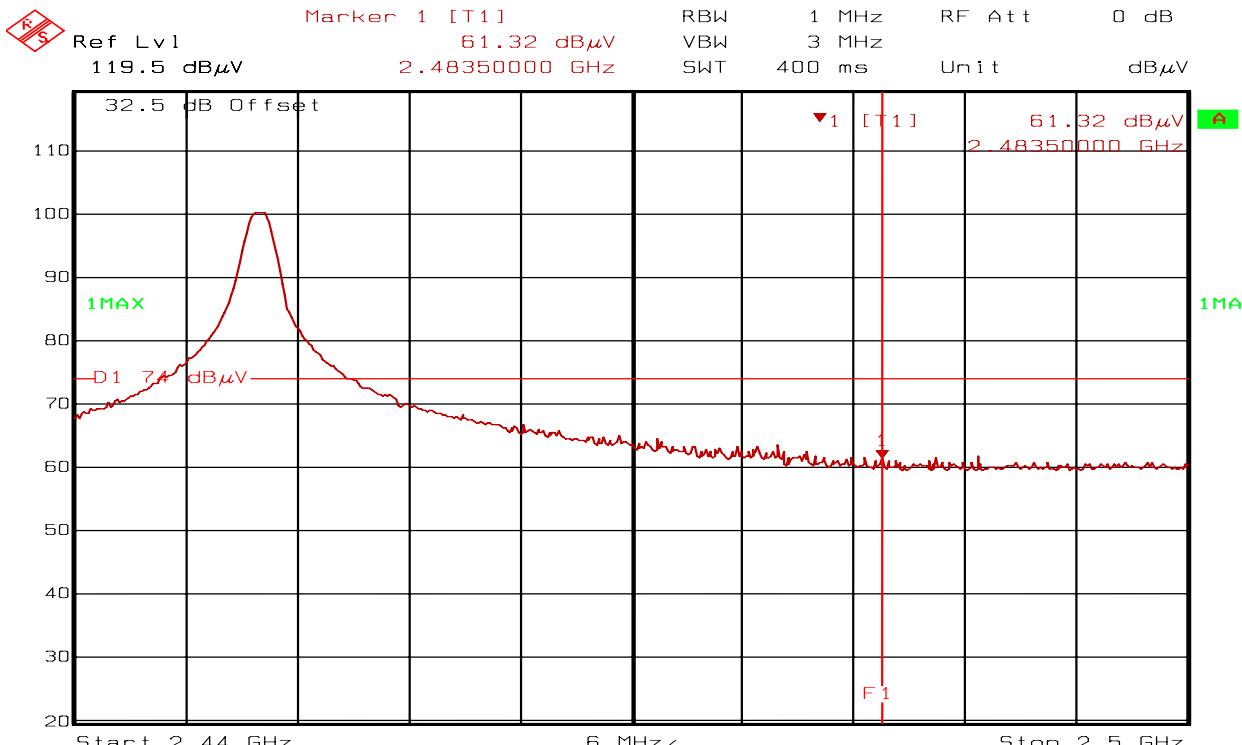

Title: CG-1084 Blackline Stinger Conf39 High Bandedge  
Date: 22.APR.2009 12:13:32

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in whole or part without permission from the testing body and the customer.

NTS Product Integrity Laboratory, 5151-47<sup>th</sup> Street N.E. Tel: 403-568-6605, Fax: 403-568-6970

## APPENDIX F: RADIATED SPURIOUS EMISSIONS

### F.1. Base Standard & Test Basis

<b>Base Standard</b>	FCC CFR Title 47 – Telecommunications, Chapter I Part 15.209 – Radio Frequency Devices, RSS 210 Issue 7 A2.9, 2.7
<b>Test Basis</b>	ANSI C63.4-2003 Methods of Measurement of Radio Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz,
<b>Test Method</b>	NTS Calgary SOP CAG EMC 02 Emission Test Methods

### F.2. Specifications:

FCC 15.205 and RSS 210 Issue 7 2.2 Restricted bands of operation.

MHz	MHz	MHz	GHz
0.090–0.110	16.42–16.423	399.9–410	4.5–5.15
<sup>1</sup> 0.495–0.505	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775	37.5–38.25	1435–1626.5	9.0–9.2
4.20725–4.20775	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225	123–138	2200–2300	14.47–14.5
8.291–8.294	149.9–150.05	2310–2390	15.35–16.2
8.362–8.366	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625–8.38675	156.7–156.9	2690–2900	22.01–23.12
8.41425–8.41475	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293	167.72–173.2	3332–3339	31.2–31.8
12.51975–12.52025	240–285	3345.8–3358	36.43–36.5
12.57675–12.57725	322–335.4	3600–4400	N/A
13.36–13.41	N/A	N/A	N/A

(b) The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in whole or part without permission from the testing body and the customer.

FCC 15.249 and RSS 210 Issue 7 (A2.9)

Fundamental frequency (MHz)	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902-928	50	500
2400-2483.5	50	500
5725-5875	50	500

The field strength of harmonic emissions from intentional radiators operated in this frequency band shall comply with 500 microvolts / meter at 3 meter distance.

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation

RSS 210 Issue 7, 2.7

Table 2: General Field Strength Limits for Transmitters and Receivers at Frequencies Above 30 MHz

Frequency (MHz)	Field Strength microvolts/m at 3 metres (watts, e.i.r.p.)	
	Transmitters	Receivers
30-88	100 (3 nW)	100 (3 nW)
88-216	150 (6.8nW)	150 (6.8nW)
219-960	200 (12nW)	200 (12nW)
Above 960	500 (75 nW)	500 (75 nW)

### F.3. Test Procedure

Radiated Emission per SOP CAG EMC 02.

### F.4. Operating Modes During Test

- Tx mode: Stinger 701-0006-AC, L01+, battery charging, 10 ms message period (Duty cycle was set to the highest supported duty cycle of the device, to speed up and simplify measurements), EUT flat on table. Set to Max Tx power as 0 dBm
- Tx mode co-located with GSM850 and PCS:
  - a) Stinger 701-0006-AC, L01+, battery charging, 10 ms message period (Duty cycle was set to the highest supported duty cycle of the device, to speed up and simplify measurements), EUT flat on table. Set to Max Tx power as 0 dBm. Co-located with GSM850: Ch190 MS Power = 0
  - b) Stinger 701-0006-AC, L01+, battery charging, 10 ms message period (Duty cycle was set to the highest supported duty cycle of the device, to speed up and simplify measurements), EUT flat on table. Set to Max Tx power as 0 dBm. Co-located with PCS: Ch661 MS Power = 0
- Rx mode: Stinger 701-0006-AC Receive mode, 12 VDC battery powered.

Worst case emissions presented

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in whole or part without permission from the testing body and the customer.

## F.5. Test Results

### F.5.1. Tx Mode 30 MHz – 1000 MHz Radiated Emission at 10m distance

Antenna Polarization	Frequency (MHz)	Detector	Radiated Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
Horizontal	157.84	Quasi-Peak	29.89	33.07	3.18
Vertical	38.68	Quasi-Peak	21.19	29.54	8.35
Vertical	160.13	Quasi-Peak	25.50	33.07	7.57
Vertical	186.42	Quasi-Peak	24.77	33.07	8.30

The highest emission measured was 29.89 dB $\mu$ V/m at 157.84 MHz horizontal polarization. It has 3.18 dB margin to the limit. This emission is not related to the transmitter.

### F.5.2 Tx mode 1 GHz to 26 GHz Radiated Emission at 3m distance

There was no measurable spurious emission observed related to the transmitter emission

**Note:**

The transmitter with co-located PCS Ch661 transmitter, 1309.91 MHz Image frequency was measured as 68.17 dB $\mu$ V/m with peak detector at 3 m distance. This emission has more than 14dB margin to The applied limits (FCC rule part 24 and related Industry Canada rule parts)

### F.5.3 Rx mode 30 MHz to 26 GHz Radiated Emission

Antenna Polarization	Frequency (MHz)	Detector	Radiated Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
Horizontal	2802.33	Average	51.82	53.98	2.16
Vertical	2802.33	Average	46.37	53.98	7.61

A narrow band emission was observed in 2802.33 MHz horizontal polarization. Measured level with average detector was 51.82 dB $\mu$ V/m at 3m distance. It has 2.16 dB margin to the limit.

**Notes:**

- All final reported values are corrected values
- Plots were not provided in order to reduce file size

## F.6. Sample Calculations

### Part 15.209

Limit at 38.68 MHz for 10 m =  $20 \cdot \log(100) - 20 \cdot \log(3/10) = 29.54$  dB $\mu$ V/m

Limit at 157.84 MHz for 10 m =  $20 \cdot \log(150) - 20 \cdot \log(3/10) = 33.07$  dB $\mu$ V/m

Average Limit for above 960 MHz = 500  $\mu$ V/m @ 3m =  $20 \cdot \log(500) = 53.98$  dB $\mu$ V/m

Peak Limit for above 960 MHz = Average Limit + 20 (dB) = 73.98 dB $\mu$ V/m

## F.7. Tested By

This testing was conducted in accordance with the ISO 17025:2005 scope of accreditation, table 1; Quality Manual.

Name:	Lixin Wang	Spencer Watson	Deniz Demirci
Function:	EMC Technologist	EMC Technologist	Senior EMC / Wireless Technologist

## F.8. Test dates

Started: April 8, 2009      Ended: May 1, 2009

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in whole or part without permission from the testing body and the customer.

NTS Product Integrity Laboratory, 5151-47<sup>th</sup> Street N.E. Tel: 403-568-6605, Fax: 403-568-6970

## APPENDIX G: TEST EQUIPMENT LIST

Descriptions	Manufacturer	Type/Model	Serial #	Cal Due	Cal Date
Table Top LISN	EMCO	3825	CG0367	18JAN10	18JAN08
Test Receiver	Rohde & Schwarz	ESAI	CG0123 CG0124	26FEB10	26FEB09
Bilog Antenna	Teseq	CBL 6112D	CG1177	10OCT09	10OCT07
HPIB Extender	HP	37204	CG0181	N/A	N/A
Mast Controller	EMCO	2090	CG0179	N/A	N/A
Turntable Controller	EMCO	2090	CG0178	N/A	N/A
Digital Barometer / Thermometer	Cole-Parmer	1870	CG0728	30JUN09	30JUN08
Horn Antenna (Rx) 1 GHz – 18 GHz	EMCO	3115	CG0368	23AUG09	23AUG07
Standard Gain Horn (Rx) 18 GHz – 26.5 GHz	EMCO	3160-09	CG0075	N/A (1)	27NOV01
High pass filter f >1000 MHz	MicroTronics	HPM14576	CG0963	01DEC10	01DEC08
High pass filter f >2800 MHz	MicroTronics	HPM50111	CG0964	01DEC10	01DEC08
LNA 1 GHz - 18 GHz	Miteq	JSD00121	CG0317	01DEC10	01DEC08
LNA 18 GHz - 26.5 GHz	Miteq	JSD00119	CG0482	02OCT09	02OCT07
Spectrum Analyzer 9 kHz – 40 GHz	Rohde & Schwarz	FSEK-20	CG0118	01JUL09	01JUL08
Wireless Communication Test Set	Agilent	8960	N/A	27NOV10	27NOV08
LNA DC Power Supply	Xantrex	LXO 30-2	CG0493	N/A	N/A
HPIB Extender	HP	37204	CG0110	N/A	N/A
Turntable and Mast Controller	EMCO	2090	CG0161	N/A	N/A

(1): As per manufacturer recommend, this item does not require periodic calibration. Its electromagnetic performance is almost exclusively depended on the physical dimension of the horn. A thorough mechanical check is all that is needed to guarantee the antenna performance.

---

## END OF DOCUMENT

---

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in whole or part without permission from the testing body and the customer.

NTS Product Integrity Laboratory, 5151-47<sup>th</sup> Street N.E. Tel: 403-568-6605, Fax: 403-568-6970

Confidential

Page 24 of 24

July 7, 2009