

FCC Test Report

Report No.: AGC03889190601FE03

FCC ID W8D-BT03A

APPLICATION PURPOSE Original Equipment

PRODUCT DESIGNATION Bluetooth receiver

BRAND NAME N/A

BT03A **MODEL NAME**

APPLICANT Shenzhen Onuoda Electronics Technology Co.Ltd

DATE OF ISSUE June 26, 2019

STANDARD(S) FCC Part 15.247

REPORT VERSION V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd

CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.





Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail:agc@agc-cert.com Service Hotline: 400 089 2118



Page 2 of 64

REPORT REVISE RECORD

	Report Version	Revise Time	Issued Date	Valid Version	Notes
ĺ	V1.0	1	June 26, 2019	Valid	Initial Release




 $Attestation\ of\ Global\ Compliance (Shenzhen) Co., Ltd.$



TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	6
2. GENERAL INFORMATION	7
2.1. PRODUCT DESCRIPTION	7
2.2. TABLE OF CARRIER FREQUENCYS	7
2.3. RECEIVER INPUT BANDWIDTH	8
2.4. EXAMPLE OF A HOPPING SEQUENCY IN DATA MODE	8
2.5. EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR	8
2.6. RELATED SUBMITTAL(S) / GRANT (S)	
2.7. TEST METHODOLOGY	9
2.8. SPECIAL ACCESSORIES	9
2.9. EQUIPMENT MODIFICATIONS	
3. MEASUREMENT UNCERTAINTY	10
4. DESCRIPTION OF TEST MODES	11
5. SYSTEM TEST CONFIGURATION	
5.1. CONFIGURATION OF EUT SYSTEM	12
5.2 EQUIPMENT USED IN TESTED SYSTEM	12
5.3. SUMMARY OF TEST RESULTS	12
6. TEST FACILITY	13
7. PEAK OUTPUT POWER	15
7.1. MEASUREMENT PROCEDURE	15
7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	15
7.3. LIMITS AND MEASUREMENT RESULT	16
8. 20DB BANDWIDTH	20
8.1. MEASUREMENT PROCEDURE	20
8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
S S A MATTE AND MEASUREMENT DESUMES	20
9. CONDUCTED SPURIOUS EMISSION	25
9.1. MEASUREMENT PROCEDURE	25







9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	25
9.3. MEASUREMENT EQUIPMENT USED	
9.4. LIMITS AND MEASUREMENT RESULT	
10. RADIATED EMISSION	
10.1. MEASUREMENT PROCEDURE	33
10.2. TEST SETUP	35
10.3. LIMITS AND MEASUREMENT RESULT	
10.4. TEST RESULT	
11. NUMBER OF HOPPING FREQUENCY	
11.1. MEASUREMENT PROCEDURE	
11.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	47
11.3. MEASUREMENT EQUIPMENT USED	
11.4. LIMITS AND MEASUREMENT RESULT	47
12. TIME OF OCCUPANCY (DWELL TIME)	48
12.1. MEASUREMENT PROCEDURE	
12.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	
12.3. MEASUREMENT EQUIPMENT USED	
12.4. LIMITS AND MEASUREMENT RESULT	
13. FREQUENCY SEPARATION	52
13.1. MEASUREMENT PROCEDURE	52
13.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	52
13.3. MEASUREMENT EQUIPMENT USED	
13.4. LIMITS AND MEASUREMENT RESULT	52
13.4. LIMITS AND MEASUREMENT RESULT 14. FCC LINE CONDUCTED EMISSION TEST	53
14.1. LIMITS OF LINE CONDUCTED EMISSION TEST	53
14.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	
14.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	54
14.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	54
14.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	55






Page 5 of 64

APPENDIX A: PHOTOGRAPHS OF TEST SETUP	57
APPENDIX B: PHOTOGRAPHS OF EUT	59



 $Attestation\ of\ Global\ Compliance (Shenzhen) Co., Ltd.$





1. VERIFICATION OF CONFORMITY

Applicant Shenzhen Onuoda Electronics Technology Co.Ltd		
ddress 3F D building Jingfu industry zone Airway(West) Gushu village Xixiang to Bao'an district Shenzhen city Guangdong, China		
Manufacturer	Shenzhen Onuoda Electronics Technology Co.Ltd	
Address 3F D building Jingfu industry zone Airway(West) Gushu village Xixiai Bao'an district Shenzhen city Guangdong,China		
Factory	Shenzhen Onuoda Electronics Technology Co.Ltd	
3F D building Jingfu industry zone Airway(West) Gushu village Xixiang to Bao'an district Shenzhen city Guangdong,China		
Product Designation Bluetooth receiver		
Brand Name N/A		
Test Model BT03A		
Date of test June 12, 2019~June 26, 2019		
Deviation None		
Condition of Test Sample	Normal	
Test Result Pass		
Report Template	AGCRT-US-BR/RF	

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC PART 15.247.

Tested By

Calvin Liu(Liu junchen)

Calvin Liu(Liu junchen)

June 26, 2019

Max Zhang(Zhang Yi)

June 26, 2019

Approved By

Forrest Lei(Lei Yonggang)
Authorized Officer

June 26, 2019



 $Attestation\ of\ Global\ Compliance (Shenzhen) Co., Ltd.$

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,

Xixiang, Bao'an District, Shenzhen, Guangdong, China



Page 7 of 64

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

The EUT is designed as "Bluetooth receiver". It is designed by way of utilizing the GFSK, Pi/4 DQPSK technology to achieve the system operation.

A major technical description of EUT is described as following

7 major toorimoar accomption	To Lot is described as following		
Operation Frequency 2.402 GHz to 2.480GHz			
RF Output Power	3.482dBm(Max)		
Bluetooth Version	V 5.0		
Modulation BR ⊠GFSK, EDR ⊠π /4-DQPSK, □8DPSK BLE □GFSK 1Mbps □GFSK 2Mbps			
Number of channels 79			
Hardware Version V5			
Software Version	V4		
Antenna Designation PCB Antenna(Comply with requirements of the FCC part 15.203)			
Antenna Gain OdBi			
Power Supply DC 3.7V by battery or DC 5V by PC.			


2.2. TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency	
-0	0	2402MHZ	
SO CO	1	2403MHZ	
	38	2440 MHZ	
2402~2480MHZ	39	2441 MHZ	
	40	2442 MHZ	
00	: 100		
D. C.	77	2479 MHZ	
0	78	2480 MHZ	



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,





2.3. RECEIVER INPUT BANDWIDTH

The input bandwidth of the receiver is 1.3MHZ,In every connection one Bluetooth device is the master and the other one is slave. The master determines the hopping sequence. The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master. Additionally the type of connection(e.g. single of multislot packet) is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing according to the packet type of the connection. Also the slave of the connection will use these settings.

Repeating of a packet has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be send on the same frequency, it is send on the next frequency of the hopping sequence.

2.4. EXAMPLE OF A HOPPING SEQUENCY IN DATA MODE

Example of a 79 hopping sequence in data mode: 40,21,44,23,42,53,46,55,48,33,52,35,50,65,54,67 56,37,60,39,58,69,62,71,64,25,68,27,66,57,70,59 72,29,76,31,74,61,78,63,01,41,05,43,03,73,07,75 09,45,13,47,11,77,15,00,64,49,66,53,68,02,70,06 01, 51, 03, 55, 05, 04

2.5. EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR

The generation of the hopping sequence in connection mode depends essentially on two input values:

- 1. LAP/UAP of the master of the connection.
- 2. Internal master clock

The LAP(lower address part) are the 24 LSB's of the 48 BD_ADDRESS. The BD_ADDRESS is an unambiguous number of every Bluetooth unit. The UAP(upper address part) are the 24MSB's of the 48BD ADDRESS

The internal clock of a Bluetooth unit is derived from a free running clock which is never adjusted and is never turned off. For ehavior zation with other units only offset are used. It has no relation to the time of the day. Its resolution is at least half the RX/TX slot length of 312.5us. The clock has a cycle of about one day(23h30). In most case it is implemented as 28 bit counter. For the deriving of the hopping sequence the entire. LAP(24 bits),4LSB's(4bits)(Input 1) and the 27MSB's of the clock(Input 2) are used. With this input values different mathematical procedures(permutations, additions, XOR-operations) are performed to generate te Sequence. This will be done at the beginning of every new transmission.

Regarding short transmissions the Bluetooth system has the following8ehavior:


The first connection between the two devices is established, a hopping sequence was generated. For Transmitting the wanted data the complete hopping sequence was not used. The connection ended. The second connection will be established. A new hopping sequence is generated. Due to the fact the Bluetooth clock has a different value, because the period between the two transmission is longer(and it Cannot be shorter) than the minimum resolution of the clock(312.5us). The hopping sequence will always Differ from the first one.



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,

Xixiang, Bao'an District, Shenzhen, Guangdong, China





2.6. RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for FCC ID: W8D-BT03A filing to comply with the FCC PART 15.247 requirements.

2.7. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10 (2013). Radiated testing was performed at an antenna to EUT distance 3 meters.

2.8. SPECIAL ACCESSORIES

Refer to section 5.2.

2.9. EQUIPMENT MODIFICATIONS


Not available for this EUT intended for grant.



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,

Xixiang, Bao'an District, Shenzhen, Guangdong, China Tel: +86-755 2523 4088 E-mail:agc@agc-cert.com





3. MEASUREMENT UNCERTAINTY


The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

- Uncertainty of Conducted Emission, Uc = ±3.2 dB
- Uncertainty of Radiated Emission below 1GHz, Uc = ±3.9 dB
- Uncertainty of Radiated Emission above 1GHz, Uc = ±4.8 dB
- Uncertainty of total RF power, conducted, Uc = ±0.8dB
- Uncertainty of spurious emissions, conducted, Uc = ±2.7dB
- Uncertainty of Occupied Channel Bandwidth: Uc = ±2 %
- Uncertainty of Dwell Time: Uc = ±2 %
- Uncertainty of Frequency: Uc = ±2 %



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,





4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION		
1	Low channel GFSK		
2	Middle channel GFSK		
3	High channel GFSK		
4	Low channel π/4-DQPSK		
5	Middle channel π/4-DQPSK		
6	High channel π/4-DQPSK		
7	Hopping mode GFSK		
8	Hopping mode π/4-DQPSK		

Note:

- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 3. For Conducted Test method, a temporary antenna connector is provided by the manufacture.
- 4.EUT connects the computer through the serial port tool (USB TO TTL), and then enters the test mode throug h the test software SmartLink FCCAssist_1.5.exe






Page 12 of 64


5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF EUT SYSTEM

Radiated Emission Configure:



Conducted Emission Configure:



5.2 EQUIPMENT USED IN TESTED SYSTEM

Ite	em	Equipment	Model No.	ID or Specification	Remark
1	1 💿	Bluetooth receiver	BT03A	W8D-BT03A	EUT
2	2	Battery	N/A	DC 3.7V 70mAh	AE


5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
15.247 (b)(1)	Peak Output Power	Compliant
15.247 (a)(1)	20 dB Bandwidth	Compliant
15.247 (d)	Conducted Spurious Emission	Compliant
15.209	Radiated Emission	Compliant
15.247 (a)(1)(iii)	Number of Hopping Frequency	Compliant
15.247 (a)(1)(iii)	Time of Occupancy	Compliant
15.247 (a)(1)	Frequency Separation	Compliant
15.207	Conducted Emission	Compliant



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,





5.4. SUPPORT EQUIPMENT IN TEST

Device Type	Manufacturer	Model Name	S/N	Data Cable
PC	XiaoMi	161301-01	N/A	N/A
Speaker	HONGCAI	A10	N/A	N/A
USB-TTL	N/A	N/A	N/A	1.5m
Aux Cable	N/A	N/A	N/A	0.3m
USB Cable	N/A	N/A	N/A	0.4m





Page 14 of 64

6. TEST FACILITY

Test Site Attestation of Global Compliance (Shenzhen) Co., Ltd		
Location	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China	
Designation Number	CN1259	
FCC Test Firm Registration Number	975832	
A2LA Cert. No.	5054.02	
Description	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by A2LA	

TEST EQUIPMENT OF CONDUCTED EMISSION TEST


Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESPI	101206	Jun. 10, 2019	Jun. 09, 2020
LISN	R&S	ESH2-Z5	100086	Aug. 28, 2018	Aug. 27, 2019

TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	Jun. 10, 2019	Jun. 09, 2020
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Dec. 20, 2018	Dec. 19, 2019
2.4GHz Fliter	EM Electronics	2400-2500MHz	N/A	Feb. 27, 2019	Feb. 26, 2020
Attenuator	ZHINAN	E-002	N/A	Aug. 28, 2018	Aug. 27, 2019
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Sep. 21, 2017	Sep. 20, 2020
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	18051	Jun. 14, 2018	Jun. 13, 2020
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	May. 26, 2018	May. 25, 2020
Broadband Preamplifier	ETS LINDGREN	3117PA	00225134	Oct. 25, 2018	Oct. 24, 2019
ANTENNA	SCHWARZBECK	VULB9168	D69250	Sep. 28, 2017	Sep. 27, 2019



Attestation of Global Compliance(Shenzhen)Co.,Ltd.





7. PEAK OUTPUT POWER

7.1. MEASUREMENT PROCEDURE


For peak power test:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
- 3. RBW > 20 dB bandwidth of the emission being measured.
- 4. VBW ≥RBW.
- 5. Sweep: Auto.
- 6. Detector function: Peak.
- 7. Trace: Max hold.

Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external attenuators and cables.

7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

PEAK POWER TEST SETUP

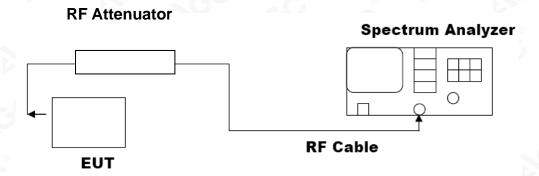





7.3. LIMITS AND MEASUREMENT RESULT

PEAK OUTPUT POWER MEASUREMENT RESULT								
FOR GFSK MOUDULATION								
Frequency (GHz)			Pass or Fail					
2.402	1.822	30	Pass					
2.441	2.196	30	Pass					
2.480	2.821	30	Pass					

CH₀





Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,



CH39




CH78





Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,





PEAK OUTPUT POWER MEASUREMENT RESULT FOR $\, \Pi \,$ /4-DQPSK MODULATION **Applicable Limits** Frequency **Peak Power** Pass or Fail (dBm) (GHz) (dBm) 2.402 2.466 30 **Pass** 2.441 2.839 30 **Pass** 30 2.480 3.482 **Pass**

CH₀







CH39



CH78





Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,




Page 20 of 64

8. 20DB BANDWIDTH

8.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hoping channel The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW; Sweep = auto; Detector function = peak
- 4. Set SPA Trace 1 Max hold, then View.

8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

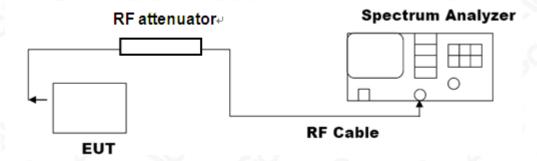

8.3. LIMITS AND MEASUREMENT RESULTS

MEASUREMENT RESULT FOR GFSK MOUDULATION							
Applicable Limits		Measurement Result					
Applicable Limits	Test Data	Test Data (MHz)					
10 10 10	Low Channel	0.9478	PASS				
N/A	Middle Channel	0.9459	PASS				
	High Channel	0.9481	PASS				



Attestation of Global Compliance(Shenzhen)Co.,Ltd.


Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,



TEST PLOT OF BANDWIDTH FOR LOW CHANNEL



TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

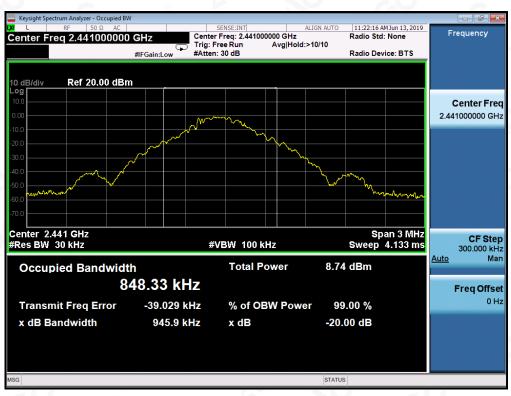



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,

Xixiang, Bao'an District, Shenzhen, Guangdong, China




TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL





Attestation of Global Compliance(Shenzhen)Co.,Ltd.


Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,





MEASUREMENT RESULT FOR II /4-DQPSK MODULATION **Measurement Result Applicable Limits** Criteria Test Data (MHz) Low Channel **PASS** 1.310 N/A Middle Channel 1.307 **PASS** High Channel 1.309 **PASS**

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

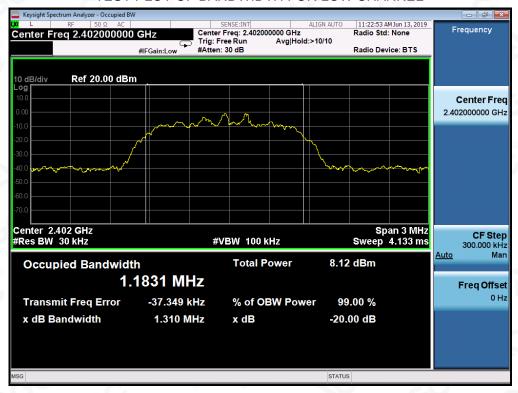






TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL



TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

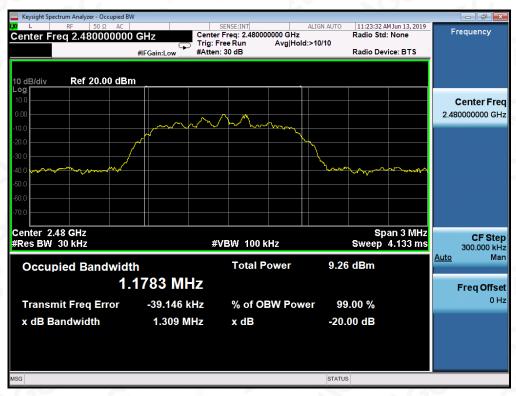



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,

Xixiang, Bao'an District, Shenzhen, Guangdong, China



Page 25 of 64

9. CONDUCTED SPURIOUS EMISSION

9.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the Middle and the bottom operation frequency individually.
- 3. Set the Span = wide enough to capture the peak level of the in-band emission and all spurious emissions from the lowest frequency generated in the EUT up through the 10th harmonic.
 - RBW = 100 kHz; VBW= 300 kHz; Sweep = auto; Detector function = peak.
- 4. Set SPA Trace 1 Max hold, then View.

9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 8.2

9.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6


9.4. LIMITS AND MEASUREMENT RESULT

LIMITS AND MEASUREMENT RESULT							
Annilo al la Limita	Measurement Result						
Applicable Limits	Test Data	Criteria					
In any 100 KHz Bandwidth Outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency	At least -20dBc than the limit Specified on the BOTTOM Channel	PASS					
power that is produce by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest level of the desired power. In addition, radiation emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in§15.209(a))	At least -20dBc than the limit Specified on the TOP Channel	PASS					



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,






TEST RESULT FOR ENTIRE FREQUENCY RANGE

TEST PLOT OF OUT OF BAND EMISSIONS WITH THE WORST CASE OF GFSK MODULATION IN LOW CHANNEL



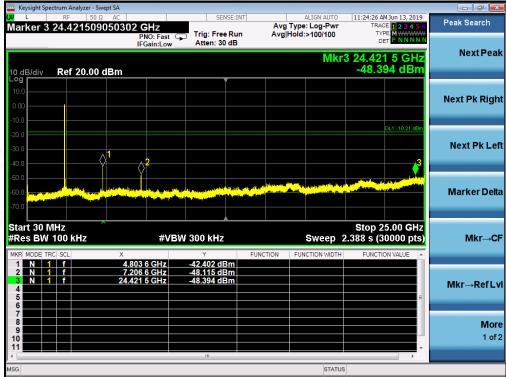



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,


Xixiang, Bao'an District, Shenzhen, Guangdong, China Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com

E-mail: agc@agc-cert.com Service Hotline: 400 089 2118



TEST PLOT OF OUT OF BAND EMISSIONS OF GFSK MODULATION IN MIDDLE CHANNEL



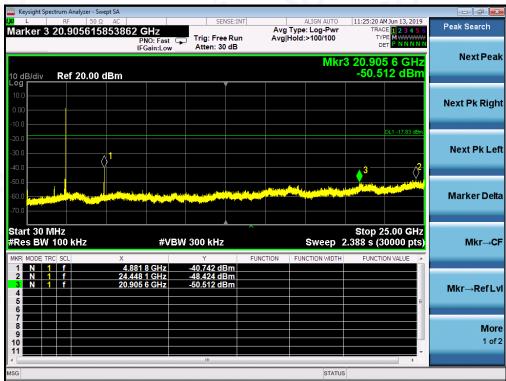



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,


Xixiang, Bao'an District, Shenzhen, Guangdong, China Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com

E-mail: agc@agc-cert.com Service Hotline: 400 089 2118



TEST PLOT OF OUT OF BAND EMISSIONS OF GFSK MODULATION IN HIGH CHANNEL



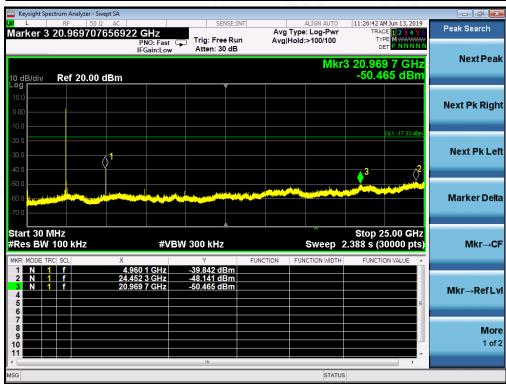

Note: The peak emissions without marker on the above plots are fundamental wave and need not to compare with the limit. The GFSK modulation is the worst case and only those data recorded in the report.



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,


Xixiang, Bao'an District, Shenzhen, Guangdong, China Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com

E-mail:agc@agc-cert.com Service Hotline: 400 089 2118



TEST RESULT FOR BAND EDGE

GFSK MODULATION IN LOW CHANNEL Hopping off

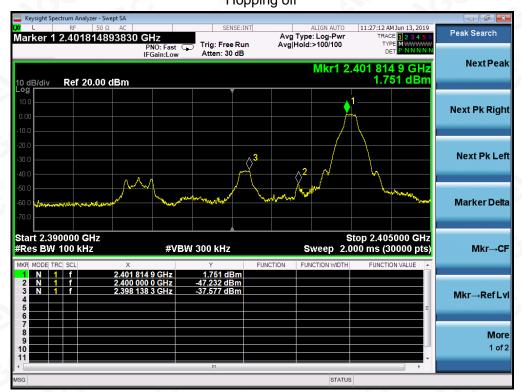

Hopping on






Attestation of Global Compliance(Shenzhen)Co.,Ltd.


Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,



GFSK MODULATION IN HIGH CHANNEL Hopping off

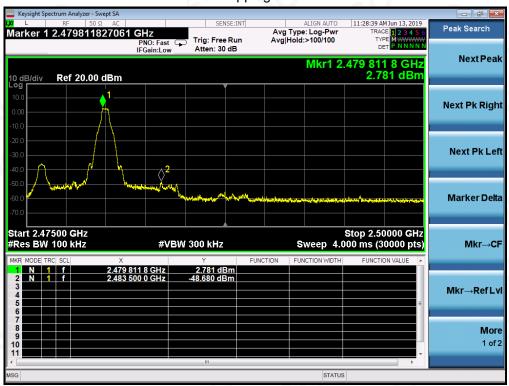

Hopping on

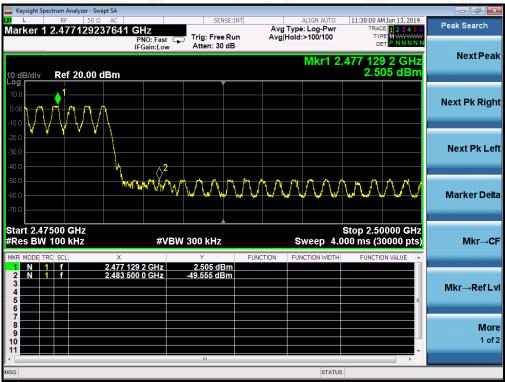



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,



π /4-DQPSK MODULATION IN LOW CHANNEL Hopping off



Hopping on





Attestation of Global Compliance(Shenzhen)Co.,Ltd.


Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,



π /4-DQPSK MODULATION IN HIGH CHANNEL Hopping off



Hopping on

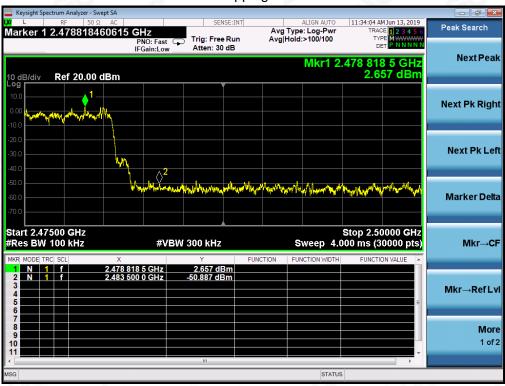



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,



Page 33 of 64

10. RADIATED EMISSION

10.1. MEASUREMENT PROCEDURE

- The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case.



Xixiang, Bao'an District, Shenzhen, Guangdong, China



Page 34 of 64

The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	1GHz~26.5GHz 1MHz/3MHz for Peak, 1MHz/3MHz for Average


Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP






10.2. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

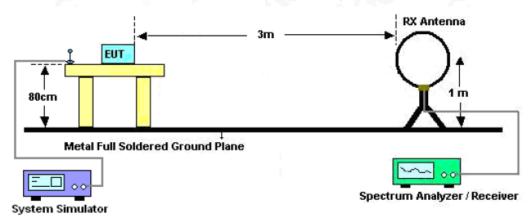

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

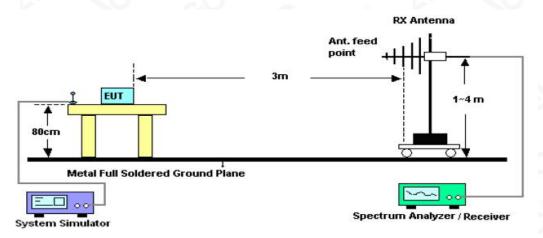

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

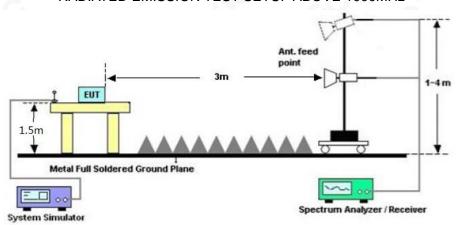



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,



Page 36 of 64

10.3. LIMITS AND MEASUREMENT RESULT

15.209 Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3


Note: All modes were tested For restricted band radiated emission, the test records reported below are the worst result compared to other modes.

10.4. TEST RESULT

RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.








RADIATED EMISSION BELOW 1GHZ

EUT	Bluetooth receiver Model Name		BT03A
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna	Horizontal

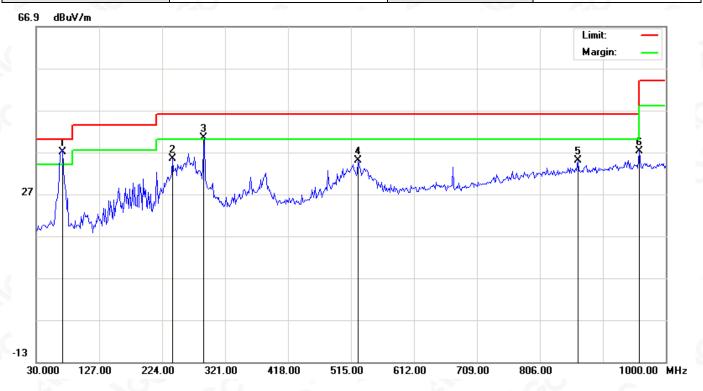


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
	-	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	70.4167	19.91	17.02	36.93	40.00	-3.07	QP			
2		240.1667	16.68	18.66	35.34	46.00	-10.66	peak			
3	İ	288.6666	20.74	19.74	40.48	46.00	-5.52	peak			
4		526.3167	9.43	25.51	34.94	46.00	-11.06	peak			
5		864.2000	3.84	31.24	35.08	46.00	-10.92	peak			
6		959.5833	5.05	32.21	37.26	46.00	-8.74	peak			

RESULT: PASS




 $Attestation\ of\ Global\ Compliance (Shenzhen) Co., Ltd.$

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,





EUT	Bluetooth receiver Model Name		Bluetooth receiver Model Name		Bluetooth receiver Model Name		ВТ03А
Temperature	25°C	Relative Humidity	55.4%				
Pressure	960hPa	Test Voltage	Normal Voltage				
Test Mode	Mode 4	Antenna	Vertical				

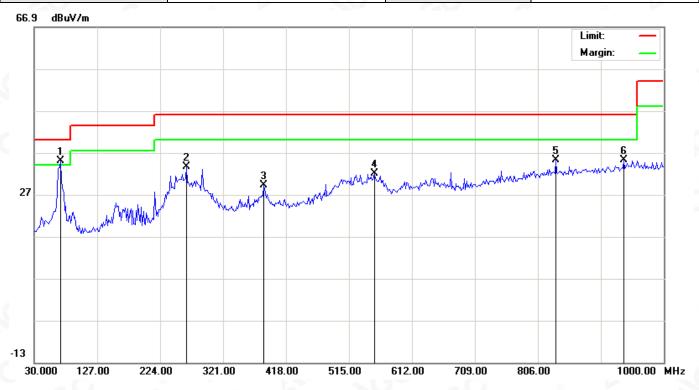

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	•	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	70.4167	18.00	17.02	35.02	40.00	-4.98	peak			
2		264.4166	14.95	18.67	33.62	46.00	-12.38	peak			
3		384.0500	6.74	22.42	29.16	46.00	-16.84	peak			
4		553.8000	5.88	26.04	31.92	46.00	-14.08	peak			
5		833.4833	4.36	30.84	35.20	46.00	-10.80	peak			
6		938.5667	3.10	32.03	35.13	46.00	-10.87	peak			

RESULT: PASS


Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

- 2. All test modes had been pre-tested. The mode 4 is the worst case and recorded in the report.
- 3. When the test is discharged, the external audio accessories do not affect the test results, and the single EUT fixed-frequency emission result is the worst working condition.



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,





RADIATED EMISSION ABOVE 1GHZ

EUT	Bluetooth Transmitter and Receiver	Model Name	ВТ03А			
Temperature	25°C	Relative Humidity	55.4%			
Pressure	960hPa	Test Voltage	Normal Voltage			
Test Mode	Mode 1	Antenna	Horizontal			


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	\/alua Tima
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4804.022	50.29	0.08	50.37	74.00	-23.63	peak
4804.022	48.03	0.08	48.11	54.00	-5.89	AVG
7206.033	42.22	2.21	44.43	74.00	-29.57	peak
7206.033	41.01	2.21	43.22	54.00	-10.78	AVG
	700		©			
			8			
emark:		< O	- G	8		
actor = Anter	nna Factor + Cab	le Loss – Pre	-amplifier.	<i>z</i> .C		

EUT	Bluetooth Transmitter and Receiver	Model Name	BT03A
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Trac
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4804.022	51.95	0.08	52.03	74.00	-21.97	peak
4804.022	48.45	0.08	48.53	54.00	-5.47	AVG
7206.033	45.43	2.21	47.64	74.00	-26.36	peak
7206.033	42.00	2.21	44.21	54.00	-9.79	AVG
	@			C	(9)	
					G .	(S)
emark:						
actor = Anter	nna Factor + Cable	Loss – Pre-	amplifier.			- (4)



 $Attestation\ of\ Global\ Compliance (Shenzhen) Co., Ltd.$






EUT	Bluetooth Transmitter and Receiver	Model Name	ВТ03А
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Time
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4882.022	51.11	0.14	51.25	74.00	-22.75	peak
4882.022	46.20	0.14	46.34	54.00	-7.66	AVG
7323.033	42.89	2.36	45.25	74.00	-28.75	peak
7323.033	41.06	2.36	43.42	54.00	-10.58	AVG
emark:	-C			10	×60	

EUT	Bluetooth Transmitter and Receiver	Model Name	ВТ03А
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Time
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4882.022	51.41	0.14	51.55	74.00	-22.45	peak
4882.022	49.49	0.14	49.63	54.00	-4.37	AVG
7323.033	46.39	2.36	48.75	74.00	-25.26	peak
7323.033	44.98	2.36	47.34	54.00	-6.66	AVG
	· ·		100	C		
emark:	a.C	©		- 0	0	(6)
actor = Anter	nna Factor + Cable	Loss - Pre-a	amplifier.		< 6	







EUT	Bluetooth Transmitter and Receiver	Model Name	BT03A
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Time
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4960.022	50.20	0.22	50.42	74.00	-23.58	peak
4960.022	46.14	0.22	46.36	54.00	-7.64	AVG
7440.033	43.60	2.64	46.24	74.00	-27.76	peak
7440.033	28.36	2.64	31.00	54.00	-23.00	AVG
- 6	8			- 0	8	
						(9)

EUT	Bluetooth Transmitter and Receiver	Model Name	ВТ03А
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Tree
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4960.022	51.42	0.22	51.64	74.00	-22.37	peak
4960.022	48.30	0.22	48.52	54.00	-5.48	AVG
7440.033	44.70	2.64	47.34	74.00	-26.66	peak
7440.033	42.51	2.64	45.15	54.00	-8.85	AVG
	©		GU A	C		
Remark:	a.C	©		_ (3		
actor = Anter	nna Factor + Cable	e Loss – Pre-a	mplifier.		- C)	

RESULT: PASS



 $Attestation\ of\ Global\ Compliance (Shenzhen) Co., Ltd.$



Page 42 of 64

Note:

- 1. Other emissions from 1G to 25 GHz are considered as ambient noise. No recording in the test report.
- 2. Factor = Antenna Factor + Cable loss Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

- 3. All test modes had been tested. The GFSK modulation is the worst case and recorded in the report.
- 4. When the test is discharged, the external audio accessories do not affect the test results, and the single EUT fixed-frequency emission result is the worst working condition.



Xixiang, Bao'an District, Shenzhen, Guangdong, China Tel: +86-755 2523 4088 E-mail:agc@agc-cert.com