

DATE: 18 January 2011

I.T.L. (PRODUCT TESTING) LTD.
FCC Radio Test Report
for
Orpak Systems Ltd.

Equipment under test:

Wireless Programmer Home Base

800920910

Written by:




D. Shidowsky, Documentation

Approved by:



A. Sharabi, Test Engineer

Approved by:



I. Raz, EMC Laboratory Manager

This report must not be reproduced, except in full, without the written permission of I.T.L. (Product Testing) Ltd.

This report relates only to items tested.

Measurement/Technical Report for Orpak Systems Ltd.

Wireless Programmer Home Base

800920910

FCC ID: W8F800920910

This report concerns: Original Grant:

Class I Change:

Class II Change:

Equipment type: Digital Transmission System

Limits used:
47CFR15 Section 15.209; 15.247

Measurement procedure used is ANSI C63.4-2003.

Application for Certification
prepared by:
Ishaishou Raz
ITL (Product Testing) Ltd.
Kfar Bin Nun
D.N. Shimshon 99780
Israel
e-mail Sraz@itl.co.il

Applicant for this device:
(different from "prepared by")
Gideon Segal
Orpak Systems Ltd.
31 Lechi St.
P.O.B. 1461
Bnei-Brak 5114
Israel
Tel: +972- 3 - 577 - 6868
Fax: +972- 6 - 579 - 6310
e-mail: gidi@orpak .com

TABLE OF CONTENTS

1. GENERAL INFORMATION -----	5
1.1 Administrative Information.....	5
1.2 List of Accreditations	6
1.3 Product Description	7
1.4 Test Methodology.....	7
1.5 Test Facility	7
1.6 Measurement Uncertainty	7
2. SYSTEM TEST CONFIGURATION-----	8
2.1 Justification.....	8
2.2 EUT Exercise Software	8
2.3 Special Accessories	8
2.4 Equipment Modifications	8
2.5 Configuration of Tested System.....	8
3. 6DB MINIMUM BANDWIDTH-----	9
3.1 Test Specification	11
3.2 Test procedure	11
3.3 Test Results	13
3.4 Test Equipment Used.....	14
4. RADIATED POWER OUTPUT-----	15
4.1 Test Specification	15
4.2 Test procedure	15
4.3 Results.....	17
4.4 Test Equipment Used.....	18
5. BAND EDGE -----	19
5.1 Test procedure	19
5.2 Results table.....	20
5.3 Test Equipment Used.....	21
6. RADIATED EMISSION, 9 KHZ – 30 MHZ -----	22
6.1 Test Specification	22
6.2 Test Procedure.....	22
6.3 Measured Data.....	22
6.4 Test Instrumentation Used, Radiated Measurements	23
6.5 Field Strength Calculation	23
7. SPURIOUS RADIATED EMISSION 30 – 25000 MHZ -----	24
7.1 Test Specification	24
7.2 Test Procedure.....	24
7.3 Test Data.....	25
7.4 Test Instrumentation Used, Radiated Measurements	28
7.5 Field Strength Calculation 30 – 1000 MHz	29
8. RADIATED POWER SPECTRAL DENSITY -----	30
8.1 Test procedure	30
8.2 Results table.....	32
8.3 Test Equipment Used.....	33
9. ANTENNA GAIN/INFORMATION-----	34
10. R.F EXPOSURE/SAFETY-----	35
11. AVERAGE FACTOR CALCULATION 125 KHZ TRANSMITTER	
ANTENNA MODEL 110MM -----	36
12. FIELD STRENGTH OF FUNDAMENTAL 125 KHZ TRANSMITTER	
ANTENNA MODEL 110MM -----	38

13. RADIATED EMISSION, 9 KHZ – 30 MHZ 125 KHZ TRANSMITTER ANTENNA MODEL 110MM -----	41
14. RADIATED EMISSION 30 -1000 MHZ 125 KHZ TRANSMITTER ANTENNA MODEL 110MM -----	44
15. AVERAGE FACTOR CALCULATION 125 KHZ TRANSMITTER ANTENNA MODEL 70MM -----	46
16. FIELD STRENGTH OF FUNDAMENTAL 125 KHZ TRANSMITTER ANTENNA MODEL 70MM -----	48
17. RADIATED EMISSION, 9 KHZ – 30 MHZ 125 KHZ TRANSMITTER ANTENNA MODEL 70MM -----	51
18. RADIATED EMISSION 30 -1000 MHZ 125 KHZ TRANSMITTER ANTENNA MODEL 70MM -----	54
19. APPENDIX B - CORRECTION FACTORS -----	56
19.1 Correction factors for CABLE	56
19.2 Correction factors for CABLE	57
19.3 Correction factors for CABLE	58
19.4 Correction factors for CABLE	59
12.6 Correction factors for LOG PERIODIC ANTENNA	60
19.5 Correction factors for LOG PERIODIC ANTENNA	61
19.6 Correction factors for BICONICAL ANTENNA	62
19.7 Correction factors for BICONICAL ANTENNA	63
19.8 Correction factors for Double-Ridged Waveguide Horn	64
19.9 Correction factors for Horn Antenna	65
19.10 Correction factors for Horn Antenna	66
19.11 Correction factors for ACTIVE LOOP ANTENNA	67

1. General Information

1.1 Administrative Information

Manufacturer: Orpak Systems Ltd.

Manufacturer's Address: 31 Lechi St.
Bnei-Brak 51114
Israel
Tel: +972-3-577-6868
Fax: +972-3-579-6310

Manufacturer's Representative: Rami Zamir

Equipment Under Test (E.U.T): Wireless Programmer Home Base

Equipment Part No.: 800920910

Equipment Serial No.: 99001457

Date of Receipt of E.U.T: 22.12.10

Start of Test: 22.12.10

End of Test: 23.12.10

Test Laboratory Location: I.T.L (Product Testing) Ltd.
Kfar Bin Nun,
ISRAEL 99780

Test Specifications: FCC Part 15 Subpart C

1.2 List of Accreditations

The EMC laboratory of I.T.L. is accredited by the following bodies:

1. The American Association for Laboratory Accreditation (A2LA) (U.S.A.), Certificate No. 1152.01.
2. The Federal Communications Commission (FCC) (U.S.A.), Registration No. 90715.
3. The Israel Ministry of the Environment (Israel), Registration No. 1104/01.
4. The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) (Japan), Registration Numbers: C-1350, R-1285.
5. Industry Canada (Canada), IC File No.: 46405-4025; Site No. IC 4025B-1.
6. TUV Product Services, England, ASLLAS No. 97201.

I.T.L. Product Testing Ltd. is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this test report have been determined in accordance with I.T.L.'s terms of accreditation unless stated otherwise in the report.

1.3 Product Description

The Orpak **Wireless Programmer Home-Base (WP)** is a wireless handheld programmer within plastic enclosure. The WP is constructed as combination of a battery operated terminal with keyboard, display and RS232 communication port and two wireless Transmitters. The WP is used as an installation tool by trained installers who download vehicle information data from the main server via RS232 and program the FUELOPASS RFID/RFID Cards via 125 kHz transceiver and program the Datapass/uDatapass via the 2.4 GHz transceiver.

WP transmitters (125 kHz & 2.4 GHz) do not operate simultaneously.

1.4 Test Methodology

Radiated testing was performed according to the procedures in ANSI C63.4: 2003. Radiated testing was performed at an antenna to EUT distance of 3 meters.

1.5 Test Facility

The radiated emissions tests were performed at I.T.L.'s testing facility at Kfar Bin-Nun, Israel. This site is a FCC listed test laboratory (FCC Registration No. 90715, date of listing August 22, 2006).

I.T.L.'s EMC Laboratory is also accredited by A2LA, certificate No. 1152.01.

1.6 Measurement Uncertainty

Radiated Emission

The Open Site complies with the ± 4 dB Normalized Site Attenuation requirements of ANSI C63.4-2003. In accordance with Paragraph 5.4.6.1 of this standard, this tolerance includes instrumentation calibration errors, measurement technique errors, and errors due to site anomalies.

2. System Test Configuration

2.1 ***Justification***

Radiated emission screening was performed in 3 orthogonal orientations. The worst case orientation was the horizontal position with the external antenna in the vertical position.

2.2 ***EUT Exercise Software***

The following software was used for the tests:

819839392 |F/W AVR, WGT RF (AT) TEST
819820940 |F/W WIRELESS PROGRAM TESTER

2.3 ***Special Accessories***

No special accessories were required.

2.4 ***Equipment Modifications***

No modifications were needed in order to achieve compliance

2.5 ***Configuration of Tested System***

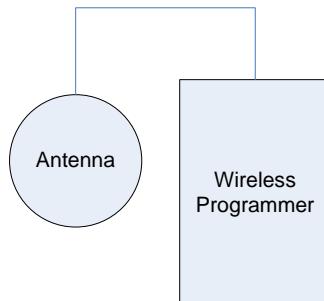


Figure 1. Configuration of Tested System

3. Test Set-up Photos

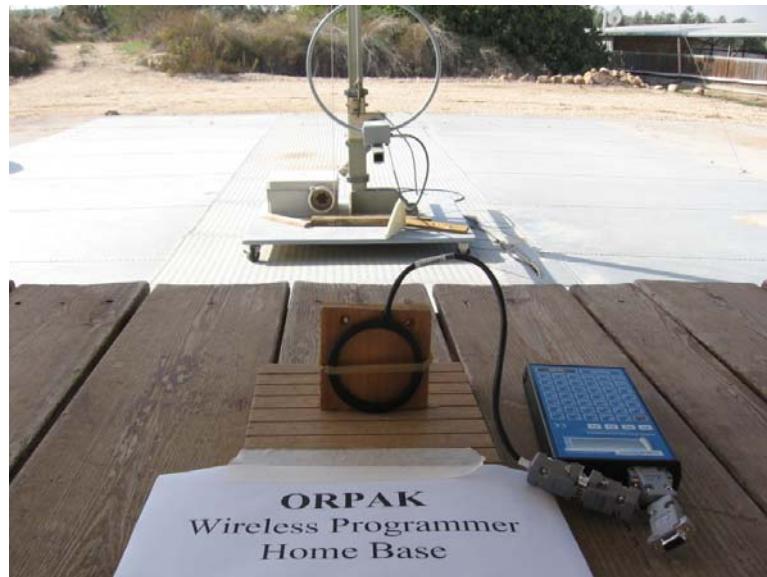


Figure 2. Radiated Emission Test- 70mm Antenna



Figure 3. Radiated Emission Test 80 mm Antenna



Figure 4. Radiated Emission Test- 30 MHz – 25 GHz

4. 6dB Minimum Bandwidth

4.1 Test Specification

F.C.C. Part 15, Subpart C: 15.247(a)(2)

4.2 Test procedure

The E.U.T was placed on a non-metallic table, 0.8 meters above the ground plane, on a remote-controlled turntable in the OATS. The test distance was 3 meters. The transmitter unit operated with normal modulation. The EMI receiver was set to 100 kHz resolution BW. The spectrum bandwidth of the transmitter unit was measured and recorded. The test was performed to measure the transmitter occupied bandwidth. The EUT was set up as shown in Figure 3, and its proper operation was checked. The transmitter occupied bandwidth was measured with the EMI receiver as frequency delta between reference points on modulation envelope. The E.U.T. was tested in 3 operating channels at frequency 2.405 GHz, 2.440GHz, 2.480GHz.

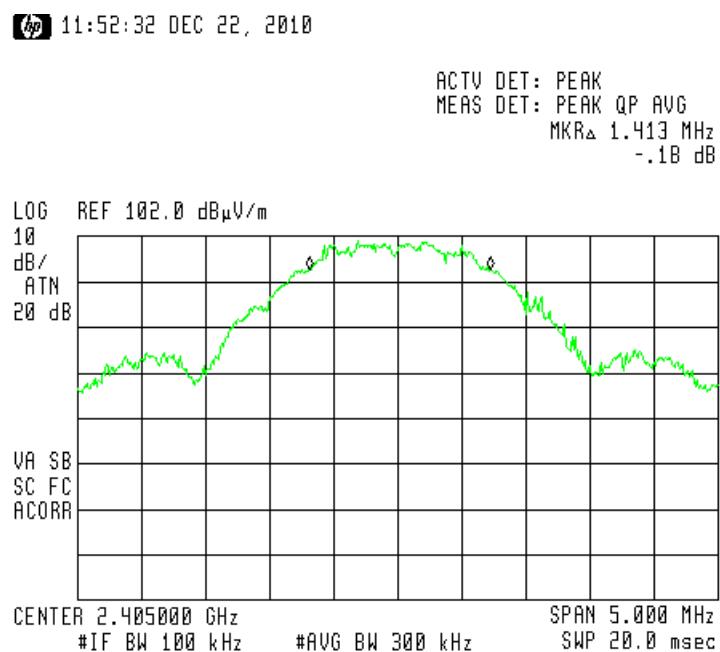


Figure 4. 2405 MHz

13:22:16 DEC 22, 2010

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR_A 1.613 MHz
.13 dB

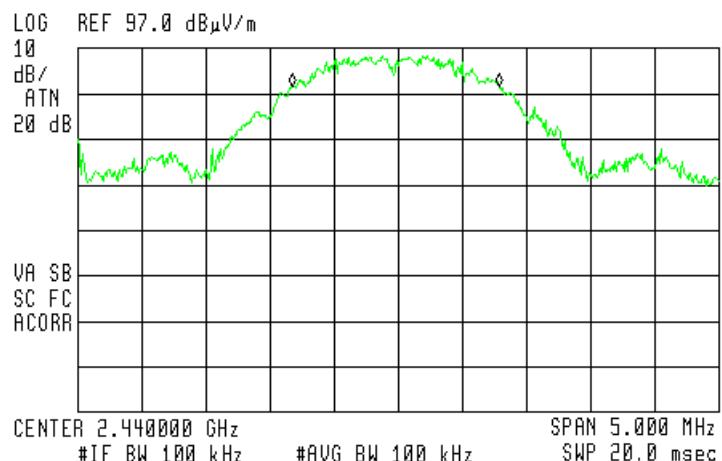


Figure 5. 2440 MHz

13:34:06 DEC 22, 2010

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR_A 1.550 MHz
.54 dB

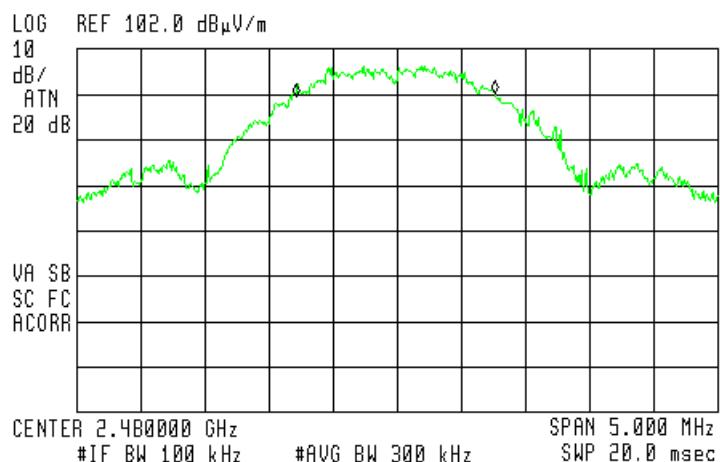


Figure 6. 2480 MHz

4.3 Test Results

E.U.T Description: Wireless Programmer Home Base

Part Number: 800920910

Serial Number: 99001457

Operation Frequency (MHz)	Bandwidth Reading (MHz)	Specification (MHz)
2405	1.413	>0.5
2440	1.613	>0.5
2480	1.550	>0.5

Figure 7 Test Results

JUDGEMENT: Passed

TEST PERSONNEL:

Tester Signature:  Date: 09.01.11

Typed/Printed Name: A. Sharabi

4.4 **Test Equipment Used.**

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 25, 2010	1 year
RF Section	HP	85420E	3705A00248	November 25, 2010	1 year
Antenna Log Periodic	A.H. Systems	SAS-200/511	253	January 29, 2009	2 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A

Figure 8 Test Equipment Used

5. Radiated Power Output

5.1 ***Test Specification***

F.C.C. Part 15, Subpart C: 15.247(b)

5.2 ***Test procedure***

The E.U.T was placed on a non-metallic table, 0.8 meters above the ground plane, on a remote-controlled turntable in the OATS. The test distance was 3 meters.

The transmitter unit operated with normal modulation. The EMI receiver was set to 1 MHz resolution BW. The EUT was set up as shown in Figure 3, and its proper operation was checked.

The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization.

The E.U.T. was tested in three operating channels and frequencies (11 (2.405 GHz); 18 (2.440 GHz); 26 (2.480 GHz)).

Radiated output power levels were measured at selected operation frequencies and the results were converted to power level according to the formula as shown below:

$$P = \frac{(E_{V/m} \times d)^2}{(30 \times G)} [\text{W}]$$

The E.U.T. was tested at 2405, 2440, and 2480 MHz with QPSK modulation.

11:45:00 DEC 22, 2010

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 2.405350 GHz
105.18 dB μ V/m

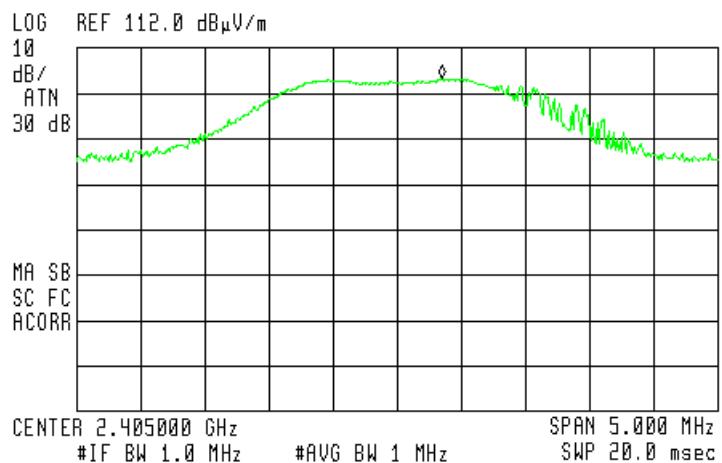


Figure 9 MHz

13:20:35 DEC 22, 2010

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 2.439463 GHz
102.39 dB μ V/m

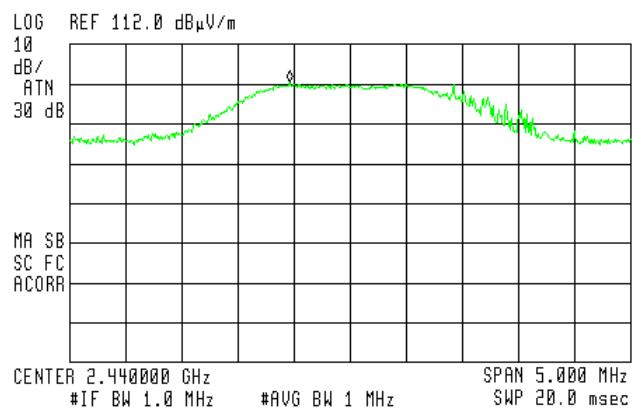


Figure 10 2440 MHz

13:32:49 DEC 22, 2010

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 2.479463 GHz
102.86 dB μ V/m

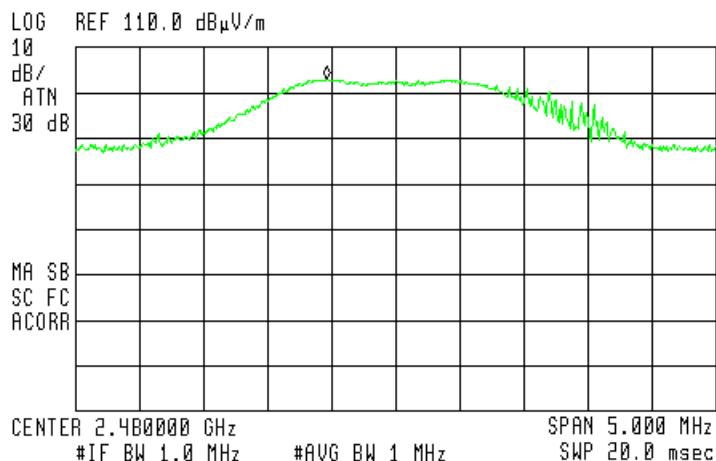


Figure 11 MHz

5.3 Results

E.U.T. Description: Wireless Programmer Home Base

Part Number: 800920910

Serial Number: 99001457

Specification: F.C.C. Part 15, Subpart C

Frequency (MHz)	E (dB μ V/m)	E (V/m)	Antenna Gain (dBi)	Antenna Distance (m)	Calculated Results (mW)	Limit (W)
2405.00	105.18	0.18	1	3	9.72	1.0
2440.00	102.39	0.13	1	3	5.07	1.0
2480.00	102.86	0.14	1	3	5.88	1.0

JUDGEMENT: Passed

TEST PERSONNEL:

Tester Signature: 

Date: 09.01.11

Typed/Printed Name: A. Sharabi

5.4 **Test Equipment Used.**

Radiated Maximum Power Output

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
Receiver	HP	85422E	3906A00276	November 25, 2010	1 year
RF Section	HP	85420E	3705A00248	November 25, 2010	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A
Antenna-Log Periodic	A.H.System	SAS-200/511	253	January 29, 2009	2 years

Figure 12 Test Equipment Used

6. Band Edge

[In Accordance with section 15.247(d)]

6.1 Test procedure

The E.U.T was placed on a non-metallic table, 0.8 meters above the ground plane, on a remote-controlled turntable in the OATS. The test distance was 3 meters.

The transmitter unit operated with normal modulation. The EMI receiver was set to 1 MHz resolution BW. The EUT was set up as shown in Figure 3, and its proper operation was checked.

The EMI receiver was adjusted to the transmission channel at the maximum radiated level. The display line was set to 20 dBc and the EMI receiver was set to the band edge frequencies.

Maximum power level below 2400 MHz and above 2483.5 MHz was measured relative to power level at 2405 MHz, and 2480 MHz correspondingly.

The E.U.T. was tested in 2 operating channels and frequencies (11 (2.405 GHz); 26 (2.480 GHz)).

The E.U.T. was tested at 2405 and 2480 MHz with QPSK modulation.

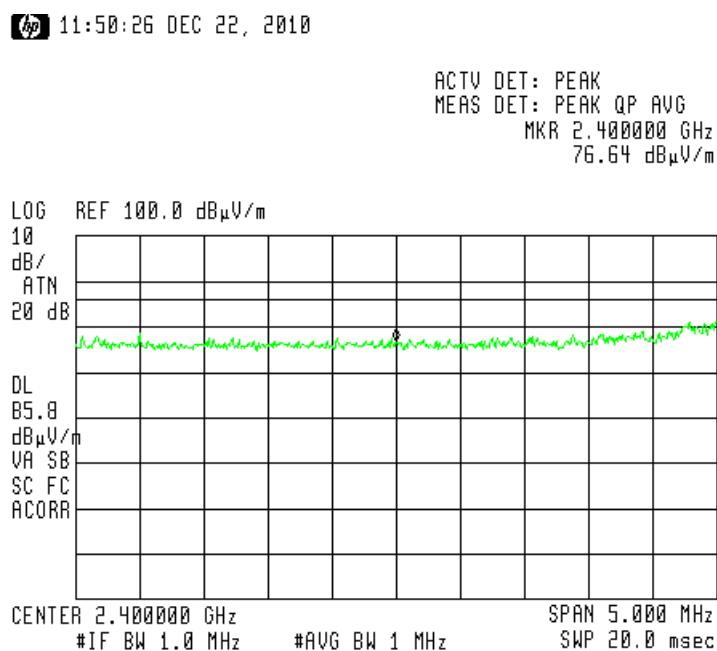


Figure 13 — 2400 MHz

13:38:18 DEC 22, 2010

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKA 2.483500000 GHz
67.15 dB μ V/m

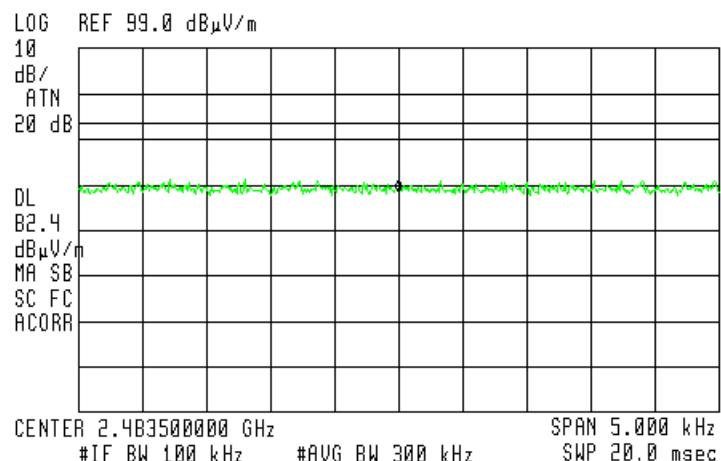


Figure 14 — 2480 MHz

6.2 Results table

E.U.T. Description: Wireless Programmer Home Base

Part Number: 800920910

Serial Number: 99001457

Specification: F.C.C. Part 15, Subpart C (15.247 (d))

Operation Frequency (MHz)	Band Edge Frequency (MHz)	Spectrum Level (dB μ V/m)	Specification (dB μ V/m)	Margin (dB)
2400	2400	76.64	85.8	-9.16
2480	2483.5	67.15	82.4	-15.25

Figure 15 Band Edge

JUDGEMENT: Passed by dB

TEST PERSONNEL:

Tester Signature: 

Date: 09.01.11

Typed/Printed Name: A. Sharabi

6.3 **Test Equipment Used.**

Band edge Spectrum

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
Receiver	HP	85422E	3906A00276	November 25, 2010	1 year
RF Section	HP	85420E	3705A00248	November 25, 2010	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A
Antenna-Log Periodic	A.H.System	SAS-200/511	253	January 29, 2009	2 years

Figure 16 Test Equipment Used

7. Radiated Emission, 9 kHz – 30 MHz

7.1 ***Test Specification***

9 kHz-30 MHz, FCC, Part 15, Subpart C, Section 209

7.2 *Test Procedure*

The E.U.T. operation mode and test set-up are as described in Section 3.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in Figure 3.1.

The frequency range 9 kHz-30 MHz was scanned.

The emissions were measured using a computerized EMI receiver complying to CISPR 16 requirements. The specification limits and applicable correction factors are loaded to the receiver via a 3.5" floppy disk.

In the frequency range 9 kHz-30MHz, the loop antenna was rotated on its vertical axis. The antenna height (center of loop) was 1 meter at a distance of 3 meters.

The E.U.T. was tested in three operating channels and frequencies (11 (2.405 GHz); 18 (2.440 GHz); 26 (2.480 GHz)).

7.3 *Measured Data*

JUDGEMENT: Passed

The EUT met the requirements of the F.C.C. Part 15, Subpart C, Section 209 specification.

The results for all three channels were the same.

No signals were detected in the frequency range of 9 kHz – 30 MHz.

TEST PERSONNEL:

Tester Signature: John Doe

Date: 09.01.11

Typed/Printed Name: A. Sharabi

7.4 Test Instrumentation Used, Radiated Measurements

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 25, 2010	1 year
RF Section	HP	85420E	3705A00248	November 25, 2010	1 year
Active Loop Antenna	EMCO	6502	9506-2950	October 19, 2010	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A

7.5 Field Strength Calculation

The field strength is calculated directly by the EMI Receiver software, and a "Correction Factors" data disk, using the following equation:

$$FS = RA + AF + CF$$

FS: Field Strength [dB μ V/m]
 RA: Receiver Amplitude [dB μ V]
 AF: Receiving Antenna Correction Factor [dB/m]
 CF: Cable Attenuation Factor [dB]

Example: $FS = 30.7 \text{ dB}\mu\text{V (RA)} + 14.0 \text{ dB (AF)} + 0.9 \text{ dB (CF)} = 45.6 \text{ dB}\mu\text{V}$

No external pre-amplifiers are used.

8. Spurious Radiated Emission 30 – 25000 MHz

8.1 ***Test Specification***

30 MHz-25000 MHz, F.C.C., Part 15, Subpart C

8.2 ***Test Procedure***

The E.U.T. operation mode and test set-up are as described in Section 3.

See Section 3.1 Justification of the System Test Configuration concerning the E.U.T. orientation for this test.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground..

The frequency range 30 MHz-25000 MHz was scanned, and the list of the highest emissions was verified and updated accordingly.

The levels of the emissions within the frequency ranges of the restricted bands (Section 15.205 of FCC Part 15) were compared to the limits of the table in Section 15.209 (a), General Requirements.

In the frequency range 30 MHz -2.9 GHz, a computerized EMI receiver complying to CISPR 16 requirements was used. The specification limits and applicable correction factors are loaded to the receiver via a 3.5" floppy disk. In the frequency range 2.9-25.0 GHz, a spectrum analyzer including a low noise amplifier was used. During average measurements, the IF bandwidth was 1 MHz and the video bandwidth was 100Hz. During peak measurements, the IF bandwidth was 1 MHz and the video bandwidth was 3 MHz.

The test distance was 3 meters.

The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization. Verification of the E.U.T emissions was based on the following methods: turning the E.U.T on and off; using a frequency span less than 10 MHz; observation of the signal level during turntable rotation. (Background noise is not affected by the rotation of the E.U.T.)

The E.U.T. was tested in three operating channels and frequencies (11 (2.405 GHz); 18 (2.440 GHz); 26 (2.480 GHz)).

8.3 **Test Data**

JUDGEMENT: Passed


The EUT met the requirements of the F.C.C. Part 15, Subpart C, specification.

For the operation channel 11 (2.405 GHz), the margin between the emission level and the specification limit is 9.3 in the worst case at the frequency of 2390 MHz, horizontal and vertical polarizations.

For the operation channel 18 (2.440 GHz), the margin between the emission level and the specification limit is 12.4 in the worst case at the frequency of 4880 MHz, horizontal and vertical polarizations.

For the operation channel 26 (2.480 GHz), the margin between the emission level and the specification limit is 9.3 in the worst case at the frequency of 2483.5 MHz, horizontal and vertical polarizations.

TEST PERSONNEL:

Tester Signature:  Date: 09.01.11

Typed/Printed Name: A. Sharabi

Radiated Emission Above 1 GHz

E.U.T Description: Wireless Programmer Home Base
 Part Number: 800920910
 Serial Number: 99001457

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 25.0 GHz
 Test Distance: 3 meters Detector: Peak

Operation Frequency (MHz)	Freq. (MHz)	Polarity (H/V)	Peak Reading (dB μ V/m)	Peak Specification (dB μ V/m)	Peak Margin (dB)
2405.00	2390.00	H	57.8	74.0	-16.2
2405.00	2390.00	V	57.6	74.0	-16.4
2405.00	4810.00	H	55.5	74.0	-18.5
2405.00	4810.00	V	56.2	74.0	-17.8
2440.00	4880.00	H	59.6	74.0	-14.4
2440.00	4880.00	V	61.2	74.0	-12.8
2480.00	2483.5	H	57.8	74.0	-16.2
2480.00	2483.5	V	57.6	74.0	-16.4
2480.00	4960.00	H	62.5	74.0	-11.5
2480.00	4960.00	V	61.5	74.0	-12.5

**Figure 17. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL.
Detector: Peak**

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Peak Reading” includes correction factor.

“Correction Factor” = Antenna Factor + Cable Loss- Low Noise Amplifier Gain

Radiated Emission Above 1 GHz

E.U.T Description Wireless Programmer Home Base
 Part Number 800920910
 Serial Number: 99001457

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 25.0 GHz
 Test Distance: 3 meters Detector: Average
 Operation Frequency: MHz

Operation Frequency (MHz)	Freq. (MHz)	Polarity (H/V)	Average Reading (dB μ V/m)	Average Specification (dB μ V/m)	Average Margin (dB)
2405.00	2390.00	H	44.7	54.0	-9.3
2405.00	2390.00	V	44.7	54.0	-9.3
2405.00	4810.00	H	38.7	54.0	-15.3
2405.00	4810.00	V	39.6	54.0	-14.4
2440.00	4880.00	H	41.6	54.0	-12.4
2440.00	4880.00	V	41.6	54.0	-12.4
2480.00	2483.5	H	44.7	54.0	-9.3
2480.00	24835.5	V	44.7	54.0	-9.3
2480.00	4960.00	H	42.5	54.0	-11.5
2480.00	4960.00	V	41.6	54.0	-12.4

**Figure 18. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL.
Detector: Average**

Notes:

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Average Amp” includes correction factor.

* Correction Factor = Antenna Factor + Cable Loss- Low Noise Amplifier Gain

8.4 Test Instrumentation Used, Radiated Measurements

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Period
EMI Receiver	HP	85422E	3906A00276	November 25, 2010	1 Year
RF Filter Section	HP	85420E	3705A00248	November 25, 2010	1 Year
Antenna Biconical	ARA	BCD 235/B	1041	August 01, 2010	1 Year
Antenna Log Periodic	ARA	LPD-2010/A	1038	March 24, 2010	1 Year
Antenna Log Periodic	A.H. Systems	SAS-200/511	253	January 29, 2009	2 Years
Double Ridged Waveguide Horn Antenna	EMCO	3115	29845	March 14, 2010	2 Years
Horn Antenna	ARA	SWH-28	1008	December 23, 2008	2 Years
Horn Antenna	Narda	V637	0410	December 23, 2008	2 Years
Low Noise Amplifier	DBS MICROWAVE	LNA-DBS-0411N313	013	January 13, 2010	1 Year
Low Noise Amplifier	Sophia Wireless	LNA 28-B	232	January 13, 2010	1 Year
Low Noise Amplifier	MK Milliwave	MKT6-3000 4000-30-13P	A0399	January 14, 2010	1 Year
Spectrum Analyzer	HP	8592L	3826A01204	March 14, 2010	1 Year
Spectrum Analyzer	HP	8546E	3442A00275	January 11, 2010	1 Year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKG19982	N/A	N/A

8.5 **Field Strength Calculation 30 – 1000 MHz**

The field strength is calculated directly by the EMI Receiver software, and a "Correction Factors" data disk, using the following equation:

$$[\text{dB}\mu\text{v}/\text{m}] \text{ FS} = \text{RA} + \text{AF} + \text{CF}$$

FS: Field Strength [dB μ v/m]

RA: Receiver Amplitude [dB μ v]

AF: Receiving Antenna Correction Factor [dB/m]

CF: Cable Attenuation Factor [dB]

Example: FS = 30.7 dB μ V (RA) + 14.0 dB (AF) + 0.9 dB (CF) = 45.6 dB μ V

No external pre-amplifiers are used.

9. Radiated Power Spectral Density

[In accordance with section 15.247(d)]

9.1 Test procedure

The E.U.T was placed on a non-metallic table, 0.8 meters above the ground plane, on a remote-controlled turntable in the OATS. The test distance was 3 meters.

The transmitter unit operated with normal modulation. The EMI receiver was set to 1 MHz resolution BW. The EUT was set up as shown in Figure 3, and its proper operation was checked.

The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization.

The E.U.T. was tested in three operating channels and frequencies (11 (2.405 GHz); 18 (2.440 GHz); 26 (2.480 GHz)).

Then the EMI receiver was set to 3 kHz resolution BW, span of 300.0 kHz, and sweep time of 100 seconds. The spectrum peaks were located at each of the 3 operating frequencies.

Radiated peak output power levels were converted to power level according to the formula as shown below:

$$P = \frac{(E_{V/m} \times d)^2}{(30 \times G)} [\text{W}]$$

14:17:46 DEC 22, 2010

ACTV DET: PEAK
 MEAS DET: PEAK QP AVG
 MKR 2.4050455 GHz
 92.59 dB μ V/m

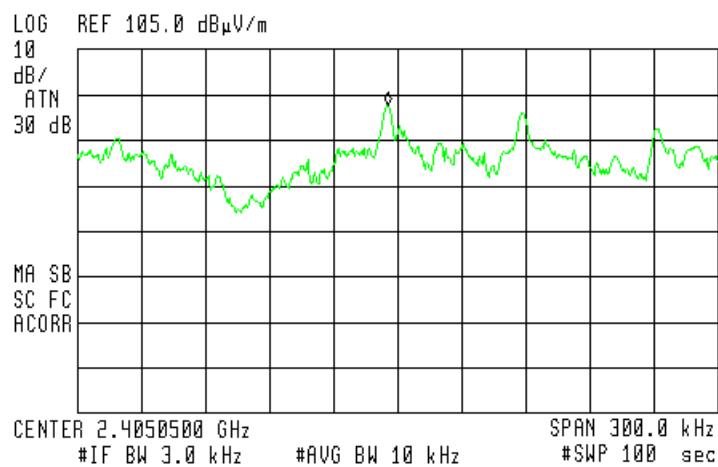


Figure 19 — 2405 MHz

13:27:49 DEC 22, 2010

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKA 2.4404198 GHz
89.10 dB μ V/m

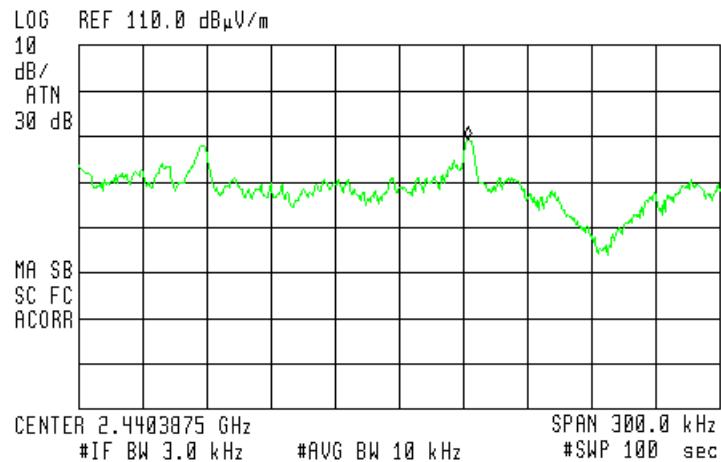


Figure 20 — 2440 MHz

13:56:45 DEC 22, 2010

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKA 2.4800420 GHz
92.43 dB μ V/m

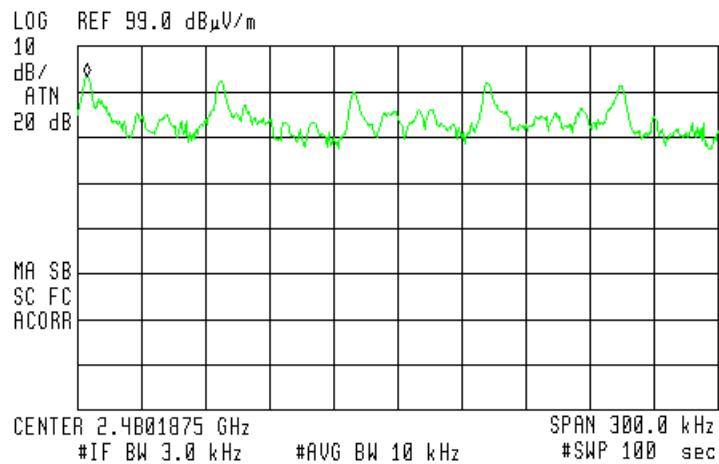


Figure 21 — 2480 MHz

9.2 Results table

E.U.T. Description: Wireless Programmer Home Base

Part Number: 800920910

Serial Number: 99001457

Specification: F.C.C. Part 15, Subpart C (15.247(d))

Frequency (MHz)	E (db μ V/m)	Spectral Density Result (V/m)	Antenna Gain (dBi)	Antenna Distance (m)	Calculated Results (mW)	Spec. (mW)	Margi n (mW)
2405	92.59	0.04	0	3	0.48	6.3	-5.82
2440	89.10	0.03	0	3	0.27	6.3	-6.03
2480	92.43	0.04	0	3	0.48	6.3	-5.82

Figure 22 Test Results

JUDGEMENT: Passed

TEST PERSONNEL:

Tester Signature:  Date: 09.01.11

Typed/Printed Name: A. Sharabi

9.3 **Test Equipment Used.**

Transmitted Power Density

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 25, 2010	1 year
RF Section	HP	85420E	3705A00248	November 25, 2010	1 year
Antenna Log Periodic	A.H. Systems	SAS-200/511	253	January 29, 2009	2 years
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A

Figure 23 Test Equipment Used

10. Antenna Gain/Information

The antenna gain is 1 dBi.

11. R.F Exposure/Safety

The E.U.T. is used to program FUELOPASS RFID cards and Datapass/µDataPass units. The E.U.T. is handheld. The typical distance between the E.U.T. antennas and the user's hand in the worst case application, is 2.5cm .

Calculation of Maximum Permissible Exposure (MPE)

Based on Section 1.1307(b)(1) Requirements

(a) FCC limits at MHz is: $1 \frac{mW}{cm^2}$

Using table 1 of Section 1.1310 limit for general population/uncontrolled exposures, the above level is an average over 30 minutes.

(b) The power density produced by the E.U.T. is

$$S = \frac{P_t G_t}{4\pi R^2}$$

S – Peak power density according to the limit $1 \frac{mW}{cm^2}$

P_t- Transmitted Power 9.72 mw (Peak)

G_T- Antenna Gain, 1 dBi (Included in the power measurement)

R- Minimum safety distance from Transmitter

(c) Minimum RF safety distance is: :

$$R = \sqrt{\frac{P \times G}{S \times \pi \times 4}} = \sqrt{\frac{9.72}{4\pi}} = 0.879cm$$

12. Average Factor Calculation 125 kHz Transmitter Antenna Model 110mm

1. Burst duration = 102msec
2. Time between bursts = 9.5msec

3. Average Factor = $20 \log \left[\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{burst duration}}{100\text{msec}} \times \text{Num of burst within 100msec} \right]$

$$\text{Average Factor} = 20 \log[1 \times 1] = 0 \text{dB}$$

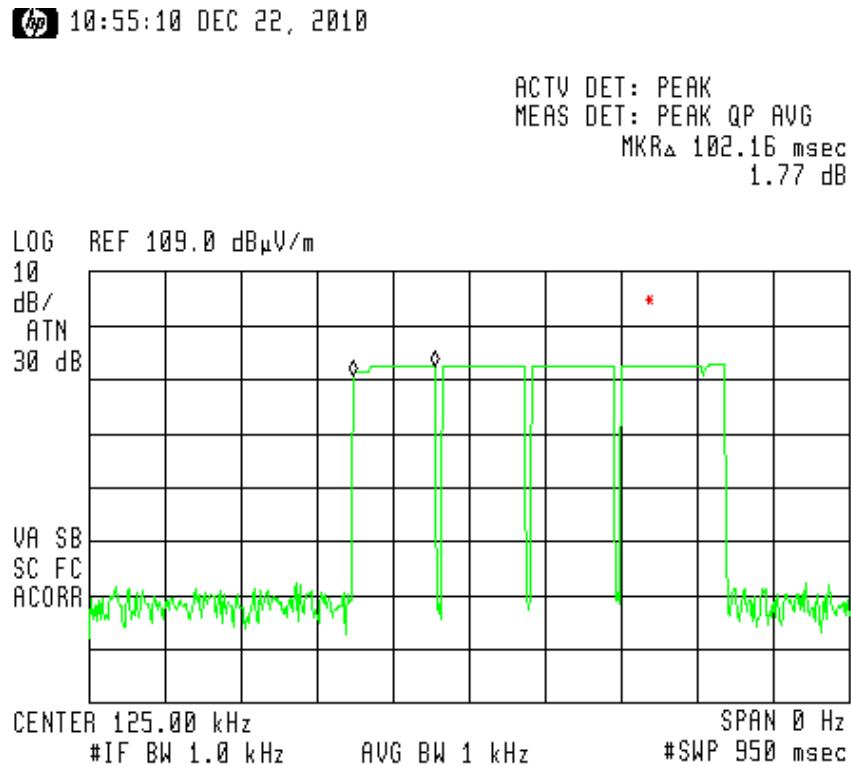


Figure 24. Transmission Burst Duration = 102 msec

12.1 Test Instrumentation Used

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 25, 2010	1 year
RF Section	HP	85420E	3705A00248	November 25, 2010	1 year
Active Loop Antenna	EMCO	6502	9506-2950	October 19, 2010	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A

13. Field Strength of Fundamental 125 kHz Transmitter Antenna Model 110mm

13.1 **Test Specification**

F.C.C., Part 15, Subpart C

13.2 **Test Procedure**

The E.U.T. operation mode and test set-up are as described in Section 3.

The E.U.T. was placed on a non-conductive table, 0.8 meters above the O.A.T.S. ground plane.

The EMI receiver was set to the E.U.T. Fundamental Frequency (125 kHz) and Peak Detection.

The distance between the E.U.T. and test antenna was 3 meters.

The turntable and antenna were adjusted for maximum level reading on the EMI receiver. The loop antenna was rotated on its vertical axis. The antenna height (center of loop) was 1 meter.

The average result is:

Peak Level(dB μ V/m) + Average Factor (dB)


13.3 **Measured Data**

JUDGEMENT: Passed by 3.85 dB

The EUT met the FCC Part 15, Subpart C specification requirements.

The details of the highest emissions are given in *Figure 23*.

TEST PERSONNEL:

Tester Signature:  Date: 09.01.11

Typed/Printed Name: A. Sharabi

Field Strength of Fundamental

E.U.T Description Wireless Programmer Home Base
 Part Number 800920910
 Serial Number: 99001457

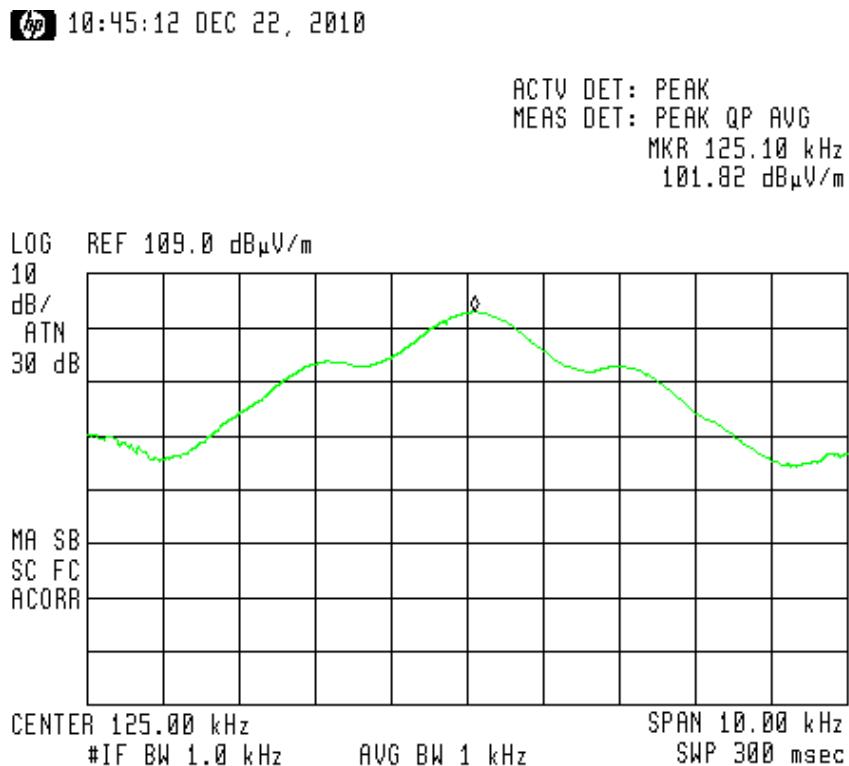


Figure 25. Field Strength of Fundamental.

Detector: Peak

Average Limit = 105.67dB μ V/m

13.4 **Test Instrumentation Used, Field Strength of Fundamental**

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 25, 2010	1 year
RF Section	HP	85420E	3705A00248	November 25, 2010	1 year
Active Loop Antenna	EMCO	6502	9506-2950	October 19, 2010	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A

14. Radiated Emission, 9 kHz – 30 MHz 125 kHz Transmitter Antenna Model 110mm

14.1 **Test Specification**

9 kHz-30 MHz, FCC, Part 15, Subpart C, Section 209

14.2 **Test Procedure**

The E.U.T. operation mode and test set-up are as described in Section 3.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in Figure 3.1.

The frequency range 9 kHz-30 MHz was scanned.

The emissions were measured using a computerized EMI receiver complying to CISPR 16 requirements. The specification limits and applicable correction factors are loaded to the receiver via a 3.5" floppy disk.

In the frequency range 9 kHz-30MHz, the loop antenna was rotated on its vertical axis. The antenna height (center of loop) was 1 meter at a distance of 10 meters.

The E.U.T. was operated at the frequency of 125 kHz. This frequency was measured using a peak detector.

14.3 **Measured Data**

JUDGEMENT: Passed by 13.58 dB

The EUT was tested and it met the requirements of the FCC Part 15, Subpart C, specification.

TEST PERSONNEL:

Tester Signature: 

Date: 09.01.11

Typed/Printed Name: A. Sharabi

Radiated Emission

E.U.T Description: Wireless Programmer Home Base
 Part Number: 800920910
 Serial Number: 99001457

Specification: FCC Part 15, Subpart C

Antenna: 3 meters distance Frequency range: 9 kHz to 30 MHz
 Detector: Peak

Frequency (kHz)	Peak Reading (dB μ V/m)	Average Factor (dB)	Average Result (dB μ V/m)	Average Specification (dB μ V/m)	Margin (dB)
375.00	68.14	0	68.14	96.12	-27.98
625.00	58.11	0	58.11	71.69	-13.58
875.00	52.54	0	52.54	68.73	-16.19
1125.00	47.74	0	47.74	66.58	-18.84

**Figure 26. Radiated Emission. Antenna Polarization: HORIZONTAL.
Detector: Peak**

1. Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.
2. “Peak Reading.” (dB μ V/m) included the “Correction Factors”.
3. “Correction Factors” (dB) = Test Antenna Correction Factor(dB) + Cable Loss.
4. “Average Result” (dB μ V/m) = Peak Reading (dB μ V/m) + Average Factor (dB)

14.4 Test Instrumentation Used, Radiated Measurements

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 25, 2010	1 year
RF Section	HP	85420E	3705A00248	November 25, 2010	1 year
Active Loop Antenna	EMCO	6502	9506-2950	October 19, 2010	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A

14.5 Field Strength Calculation

The field strength is calculated directly by the EMI Receiver software, and a "Correction Factors" data disk, using the following equation:

$$FS = RA + AF + CF$$

FS: Field Strength [dB μ V/m]
 RA: Receiver Amplitude [dB μ V]
 AF: Receiving Antenna Correction Factor [dB/m]
 CF: Cable Attenuation Factor [dB]

Example: $FS = 30.7 \text{ dB}\mu\text{V (RA)} + 14.0 \text{ dB (AF)} + 0.9 \text{ dB (CF)} = 45.6 \text{ dB}\mu\text{V}$

No external pre-amplifiers are used.

15. Radiated Emission 30 -1000 MHz 125 kHz Transmitter Antenna Model 110mm

15.1 **Test Specification**

30 - 1000 MHz, F.C.C., Part 15, Subpart C

15.2 **Test Procedure**

The E.U.T. operation mode and test set-up are as described in Section 3. See Section 3.1 Justification of the System Test Configuration concerning the E.U.T. orientation for this test.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in

The signals from the list of the highest emissions were verified and the list was updated accordingly.

The levels of the emissions within the frequency ranges of the restricted bands (Section 15.205 of FCC Part 15) were compared to the limits of the table in Section 15.209 (a), General Requirements.

The emissions were measured using a computerized EMI receiver complying to CISPR 16 requirements. The specification limits and applicable correction factors are loaded to the receiver via a 3.5" floppy disk.

The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization.

Verification of the E.U.T emissions was based on the following methods: turning the E.U.T on and off; using a frequency span less than 10 MHz; observation of the signal level during turntable rotation. (Background noise is not affected by the rotation of the E.U.T.)

The emissions were measured at a distance of 3 meters.


15.3 **Test Data**

JUDGEMENT: Passed

The EUT met the requirements of the F.C.C. Part 15, Subpart C, specification.

No signals were detected in the frequency range of 30 -1000 MHz.

TEST PERSONNEL:

Tester Signature: 

Date: 09.01.11

Typed/Printed Name: A. Sharabi

15.4 Test Instrumentation Used, Radiated Measurements

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 25, 2010	1 year
RF Section	HP	85420E	3705A00248	November 25, 2010	1 year
Antenna Bioconical	ARA	BCD 235/B	1041	August 1, 2010	1 year
Antenna Log Periodic	ARA	LPD-2010/A	1038	March 24, 2010	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A

16. Average Factor Calculation 125 kHz Transmitter Antenna Model 70mm

1. Burst duration = 102msec

2. Time between bursts = 9.5msec

3. Average Factor = $20 \log \left[\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{burst duration}}{100\text{msec}} \times \text{Num of burst within 100msec} \right]$

$$\text{Average Factor} = 20 \log[1 \times 1] = 0 \text{dB}$$

10:55:10 DEC 22, 2010

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR_A 102.16 msec
1.77 dB

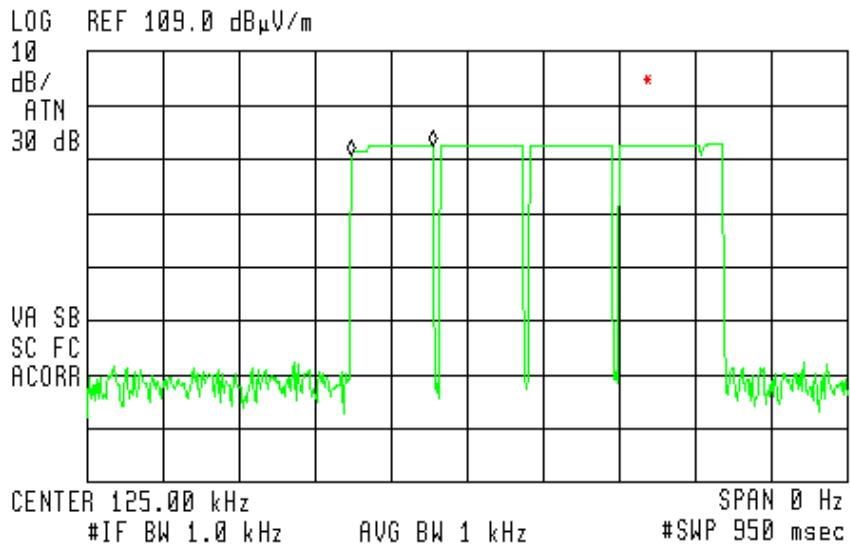


Figure 27. Transmission Burst Duration = 102 msec

16.1 Test Instrumentation Used

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 25, 2010	1 year
RF Section	HP	85420E	3705A00248	November 25, 2010	1 year
Active Loop Antenna	EMCO	6502	9506-2950	October 19, 2010	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A

17. Field Strength of Fundamental 125 kHz Transmitter Antenna Model 70mm

17.1 ***Test Specification***

F.C.C., Part 15, Subpart C

17.2 ***Test Procedure***

The E.U.T. operation mode and test set-up are as described in Section 3.

The E.U.T. was placed on a non-conductive table, 0.8 meters above the O.A.T.S. ground plane.

The EMI receiver was set to the E.U.T. Fundamental Frequency (125 kHz) and Peak Detection.

The distance between the E.U.T. and test antenna was 3 meters.

The turntable and antenna were adjusted for maximum level reading on the EMI receiver. The loop antenna was rotated on its vertical axis. The antenna height (center of loop) was 1 meter.

The average result is:

Peak Level(dB μ V/m) + Average Factor (dB)

17.3 ***Measured Data***

JUDGEMENT: Passed by 8.35 dB

The EUT met the FCC Part 15, Subpart C specification requirements.

The details of the highest emissions are given in *Figure 23*.

TEST PERSONNEL:

Tester Signature:  Date: 09.01.11

Typed/Printed Name: A. Sharabi

Field Strength of Fundamental

E.U.T Description Wireless Programmer Home Base
 Part Number 800920910
 Serial Number: 99001457

11:18:25 DEC 22, 2010

ACTV DET: PEAK
 MEAS DET: PEAK QP AVG
 MKR 125.10 kHz
 97.32 dB μ V/m

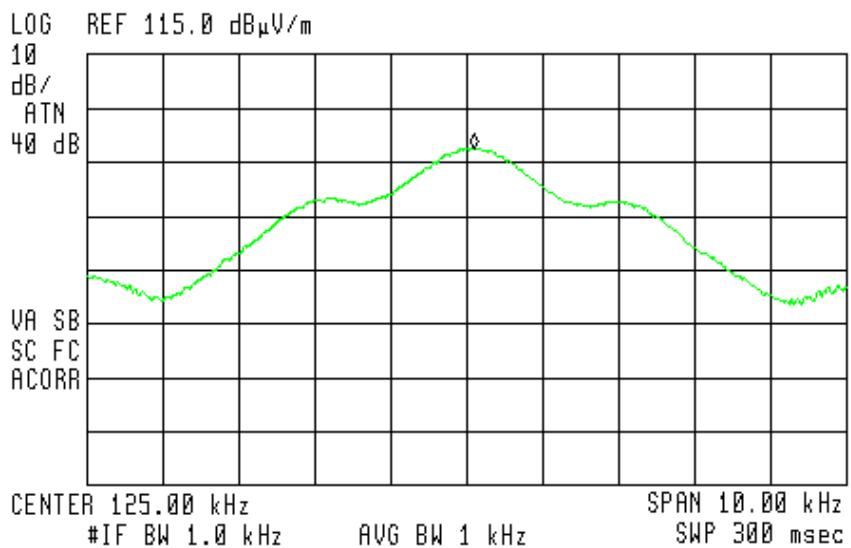


Figure 28. Field Strength of Fundamental.

Detector: Peak

Average Limit = 105.67dB μ V/m

17.4 **Test Instrumentation Used, Field Strength of Fundamental**

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 25, 2010	1 year
RF Section	HP	85420E	3705A00248	November 25, 2010	1 year
Active Loop Antenna	EMCO	6502	9506-2950	October 19, 2010	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A

18. Radiated Emission, 9 kHz – 30 MHz 125 kHz Transmitter Antenna Model 70mm

18.1 ***Test Specification***

9 kHz-30 MHz, FCC, Part 15, Subpart C, Section 209

18.2 ***Test Procedure***

The E.U.T. operation mode and test set-up are as described in Section 3.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in Figure 3.1.

The frequency range 9 kHz-30 MHz was scanned.

The emissions were measured using a computerized EMI receiver complying to CISPR 16 requirements. The specification limits and applicable correction factors are loaded to the receiver via a 3.5" floppy disk.

In the frequency range 9 kHz-30MHz, the loop antenna was rotated on its vertical axis. The antenna height (center of loop) was 1 meter at a distance of 10 meters.

The E.U.T. was operated at the frequency of 125 kHz. This frequency was measured using a peak detector.

18.3 ***Measured Data***

JUDGEMENT: Passed by 19.92 dB

The EUT was tested and it met the requirements of the FCC Part 15, Subpart C, specification.

TEST PERSONNEL:

Tester Signature: 

Date: 09.01.11

Typed/Printed Name: A. Sharabi

Radiated Emission

E.U.T Description Wireless Programmer Home Base
 Part Number 800920910
 Serial Number: 99001457

Specification: FCC Part 15, Subpart C

Antenna: 3 meters distance Frequency range: 9 kHz to 30 MHz
 Detectors: Peak

Frequency (kHz)	Peak Reading (dB μ V/m)	Average Factor (dB)	Average Result (dB μ V/m)	Average Specification (dB μ V/m)	Margin (dB)
375.0	61.32	0	61.32	96.12	-34.80
625.0	51.77	0	51.77	71.69	-19.92
875.0	46.23	0	46.23	68.73	-22.50
1.125	42.06	0	42.06	66.58	-24.52

**Figure 29. Radiated Emission. Antenna Polarization: HORIZONTAL.
Detectors: Peak, Quasi-peak**

1. Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.
2. “Peak Reading.” (dB μ V/m) included the “Correction Factors”.
3. “Correction Factors” (dB) = Test Antenna Correction Factor(dB) + Cable Loss.
4. “Average Result” (dB μ V/m) = Peak Reading (dB μ V/m) + Average Factor (dB)

18.4 Test Instrumentation Used, Radiated Measurements

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 25, 2010	1 year
RF Section	HP	85420E	3705A00248	November 25, 2010	1 year
Active Loop Antenna	EMCO	6502	9506-2950	October 19, 2010	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A

18.5 Field Strength Calculation

The field strength is calculated directly by the EMI Receiver software, and a "Correction Factors" data disk, using the following equation:

$$FS = RA + AF + CF$$

FS: Field Strength [dB μ V/m]
 RA: Receiver Amplitude [dB μ V]
 AF: Receiving Antenna Correction Factor [dB/m]
 CF: Cable Attenuation Factor [dB]

Example: $FS = 30.7 \text{ dB}\mu\text{V (RA)} + 14.0 \text{ dB (AF)} + 0.9 \text{ dB (CF)} = 45.6 \text{ dB}\mu\text{V}$

No external pre-amplifiers are used.

19. Radiated Emission 30 -1000 MHz 125 kHz Transmitter Antenna Model 70mm

19.1 **Test Specification**

30 - 1000 MHz, F.C.C., Part 15, Subpart C

19.2 **Test Procedure**

The E.U.T. operation mode and test set-up are as described in Section 3. See Section 3.1 Justification of the System Test Configuration concerning the E.U.T. orientation for this test.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in

The signals from the list of the highest emissions were verified and the list was updated accordingly.

The levels of the emissions within the frequency ranges of the restricted bands (Section 15.205 of FCC Part 15) were compared to the limits of the table in Section 15.209 (a), General Requirements.

The emissions were measured using a computerized EMI receiver complying to CISPR 16 requirements. The specification limits and applicable correction factors are loaded to the receiver via a 3.5" floppy disk.

The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization.

Verification of the E.U.T emissions was based on the following methods: turning the E.U.T on and off; using a frequency span less than 10 MHz; observation of the signal level during turntable rotation. (Background noise is not affected by the rotation of the E.U.T.)

The emissions were measured at a distance of 3 meters.


19.3 **Test Data**

JUDGEMENT: Passed

The EUT met the requirements of the F.C.C. Part 15, Subpart C, specification.

No signals were detected in the frequency range of 30 -1000 MHz.

TEST PERSONNEL:

Tester Signature: 

Date: 09.01.11

Typed/Printed Name: A. Sharabi

19.4 Test Instrumentation Used, Radiated Measurements

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 25, 2010	1 year
RF Section	HP	85420E	3705A00248	November 25, 2010	1 year
Antenna Bioconical	ARA	BCD 235/B	1041	August 1, 2010	1 year
Antenna Log Periodic	ARA	LPD-2010/A	1038	March 24, 2010	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A

20. APPENDIX B - CORRECTION FACTORS

20.1 Correction factors for CABLE

from EMI receiver
to test antenna
at 3 meter range.

FREQUENCY (MHz)	CORRECTION FACTOR (dB)	FREQUENCY (MHz)	CORRECTION FACTOR (dB)
10.0	0.3	1200.0	7.3
20.0	0.6	1400.0	7.8
30.0	0.8	1600.0	8.4
40.0	0.9	1800.0	9.1
50.0	1.1	2000.0	9.9
60.0	1.2	2300.0	11.2
70.0	1.3	2600.0	12.2
80.0	1.4	2900.0	13.0
90.0	1.6		
100.0	1.7		
150.0	2.0		
200.0	2.3		
250.0	2.7		
300.0	3.1		
350.0	3.4		
400.0	3.7		
450.0	4.0		
500.0	4.3		
600.0	4.7		
700.0	5.3		
800.0	5.9		
900.0	6.3		
1000.0	6.7		

NOTES:

1. The cable type is RG-214.
2. The overall length of the cable is 27 meters.
3. The above data is located in file 27MO3MO.CBL on the disk marked "Radiated Emission Tests EMI Receiver".

20.2 Correction factors for CABLE

from EMI receiver
to test antenna
at 3 meter range.

FREQUENCY (GHz)	CORRECTION FACTOR (dB)
1.0	1.2
2.0	1.6
3.0	2.0
4.0	2.4
5.0	3.0
6.0	3.4
7.0	3.8
8.0	4.2
9.0	4.6
10.0	5.0
12.0	5.8

NOTES:

1. The cable type is RG-8.
2. The overall length of the cable is 10 meters.

20.3 Correction factors for CABLE

from spectrum analyzer
to test antenna above 2.9 GHz

FREQUENCY (GHz)	CORRECTION FACTOR (dB)	FREQUENCY (GHz)	CORRECTION FACTOR (dB)
1.0	1.9	14.0	9.1
2.0	2.7	15.0	9.5
3.0	3.5	16.0	9.9
4.0	4.2	17.0	10.2
5.0	4.9	18.0	10.4
6.0	5.5	19.0	10.7
7.0	6.0	20.0	10.9
8.0	6.5	21.0	11.2
9.0	7.0	22.0	11.6
10.0	7.5	23.0	11.9
11.0	7.9	24.0	12.3
12.0	8.3	25.0	12.6
13.0	8.7	26.0	13.0

NOTES:

1. The cable type is SUCOFLEX 104 E manufactured by SUHNER.
2. The cable is used for measurements above 2.9 GHz.
3. The overall length of the cable is 10 meters.

20.4 Correction factors for CABLE

from EMI receiver
to test antenna
at 10 meter range.

FREQUENCY (MHz)	CORRECTION FACTOR (dB)	FREQUENCY (MHz)	CORRECTION FACTOR (dB)
10.0	0.3	1200.0	9.8
20.0	0.8	1400.0	10.0
30.0	0.9	1600.0	11.3
40.0	1.2	1800.0	12.2
50.0	1.4	2000.0	13.1
60.0	1.6	2300.0	14.5
70.0	1.8	2600.0	15.9
80.0	1.9	2900.0	16.4
90.0	2.0		
100.0	2.1		
150.0	2.6		
200.0	3.2		
250.0	3.8		
300.0	4.2		
350.0	4.6		
400.0	5.1		
450.0	5.3		
500.0	5.6		
600.0	6.3		
700.0	7.0		
800.0	7.6		
900.0	8.0		
1000.0	8.7		

NOTES:

1. The cable type is RG-214.
2. The overall length of the cable is 34 meters.
3. The above data is located in file 34M10MO.CBL on the disk marked "Radiated Emissions Tests EMI Receiver".

12.6 Correction factors for LOG PERIODIC ANTENNA
Type LPD 2010/A
at 3 and 10 meter ranges.

Distance of 3 meters		Distance of 10 meters	
FREQUENCY (MHz)	AFE (dB/m)	FREQUENCY (MHz)	AFE (dB/m)
200.0	9.1	200.0	9.0
250.0	10.2	250.0	10.1
300.0	12.5	300.0	11.8
400.0	15.4	400.0	15.3
500.0	16.1	500.0	15.6
600.0	19.2	600.0	18.7
700.0	19.4	700.0	19.1
800.0	19.9	800.0	20.2
900.0	21.2	900.0	21.1
1000.0	23.5	1000.0	23.2

NOTES:

1. Antenna serial number is 1038.
2. The above lists are located in file number 38M30.ANT for a 3 meter range, and file number 38M100.ANT for a 10 meter range.
3. The files mentioned above are located on the disk marked "Radiated Emission Test EMI Receiver".

20.5 Correction factors for LOG PERIODIC ANTENNA
Type SAS-200/511
at 3 meter range.

FREQUENCY (GHz)	ANTENNA FACTOR (dB)
1.0	24.9
1.5	27.8
2.0	29.9
2.5	31.2
3.0	32.8
3.5	33.6
4.0	34.3
4.5	35.2
5.0	36.2
5.5	36.7
6.0	37.2
6.5	38.1

FREQUENCY (GHz)	ANTENNA FACTOR (dB)
7.0	38.6
7.5	39.2
8.0	39.9
8.5	40.4
9.0	40.8
9.5	41.1
10.0	41.7
10.5	42.4
11.0	42.5
11.5	43.1
12.0	43.4
12.5	44.4
13.0	44.6

NOTES:

1. Antenna serial number is 253.
2. The above lists are located in file number SAS3M0.ANT for a 3 meter range.
3. The files mentioned above are located on the disk marked "Antenna Factors".

20.6 Correction factors for BICONICAL ANTENNA

Type BCD-235/B,
at 3 meter range

FREQUENCY (MHz)	AFE (dB/m)
20.0	19.4
30.0	14.8
40.0	11.9
50.0	10.2
60.0	9.1
70.0	8.5
80.0	8.9
90.0	9.6
100.0	10.3
110.0	11.0
120.0	11.5
130.0	11.7
140.0	12.1
150.0	12.6
160.0	12.8
170.0	13.0
180.0	13.5
190.0	14.0
200.0	14.8
210.0	15.3
220.0	15.8
230.0	16.2
240.0	16.6
250.0	17.6
260.0	18.2
270.0	18.4
280.0	18.7
290.0	19.2
300.0	19.9
310	20.7
320	21.9
330	23.4
340	25.1
350	27.0

NOTES:

1. Antenna serial number is 1041.
2. The above list is located in file 19BC10M1.ANT on the disk marked "Radiated Emissions Tests EMI Receiver".

20.7 Correction factors for BICONICAL ANTENNA

Type BCD-235/B,
10 meter range

FREQUENCY (MHz)	AFE (dB/m)
30.0	12.1
40.0	10.6
50.0	10.6
60.0	8.9
70.0	8.5
80.0	9.6
90.0	9.4
100.0	9.6
110.0	10.3
120.0	10.7
130.0	12.6
140.0	12.7
150.0	12.7
160.0	13.8
170.0	13.7
180.0	14.9
190.0	13.4
200.0	13.1
210.0	14.0
220.0	14.5
230.0	15.8
240.0	16.0
250.0	16.6
260.0	16.7
270.0	18.3
280.0	18.5
290.0	19.3
300.0	20.9

NOTES:

1. Antenna serial number is 1041.
2. The above list is located in file 41BC10M1.ANT on the disk marked "Radiated Emissions Tests EMI Receiver".

20.8 Correction factors for Double-Ridged Waveguide Horn

**Model: 3115, S/N 29845
at 3 meter range.**

FREQUENCY (GHz)	ANTENNA FACTOR (dB 1/m)	ANTENN A Gain (dBi)	FREQUENCY (GHz)	ANTENNA FACTOR (dB 1/m)	ANTENNA Gain (dBi)
1.0	24.8	5.4	10.0	38.8	11.4
1.5	26.1	7.6	10.5	38.9	11.8
2.0	28.6	7.7	11.0	39.0	12.1
2.5	29.8	8.4	11.5	39.6	11.8
3.0	31.4	8.4	12.0	39.8	12.0
3.5	32.4	8.7	12.5	39.6	12.5
4.0	33.7	8.6	13.0	40.0	12.5
4.5	33.4	9.9	13.5	39.8	13.0
5.0	34.5	9.7	14.0	40.2	13.0
5.5	35.1	9.9	14.5	40.6	12.9
6.0	35.4	10.4	15.0	41.3	12.4
6.5	35.6	10.8	15.5	39.5	14.6
7.0	36.2	10.9	16.0	38.8	15.5
7.5	37.3	10.4	16.5	40.0	14.6
8.0	37.7	10.6	17.0	41.4	13.4
8.5	38.3	10.5	17.5	44.8	10.3
9.0	38.5	10.8	18.0	47.2	8.1
9.5	38.7	11.1			

20.9 Correction factors for

Horn Antenna

**Model: SWH-28
at 1 meter range.**

FREQUENCY (GHz)	AFE (dB /m)	Gain (dB1)
18.0	40.3	16.1
19.0	40.3	16.3
20.0	40.3	16.1
21.0	40.3	16.3
22.0	40.4	16.8
23.0	40.5	16.4
24.0	40.5	16.6
25.0	40.5	16.7
26.0	40.6	16.4

20.10 Correction factors for

**Horn Antenna
Model: V637**

FREQUENCY (GHz)	AFE (dB /m)	Gain (dB1)
26.0	43.6	14.9
27.0	43.7	15.1
28.0	43.8	15.3
29.0	43.9	15.5
30.0	43.9	15.8
31.0	44.0	16.0
32.0	44.1	16.2
33.0	44.1	16.4
34.0	44.1	16.7
35.0	44.2	16.9
36.0	44.2	17.1
37.0	44.2	17.4
38.0	44.2	17.6
39.0	44.2	17.8
40.0	44.2	18.0

20.11 Correction factors for ACTIVE LOOP ANTENNA

Model 6502
S/N 9506-2950

FREQUENCY (MHz)	Magnetic Antenna Factor (dB)	Electric Antenna Factor (dB)
.009	-35.1	16.4
.010	-35.7	15.8
.020	-38.5	13.0
.050	-39.6	11.9
.075	-39.8	11.8
.100	-40.0	11.6
.150	-40.0	11.5
.250	-40.0	11.6
.500	-40.0	11.5
.750	-40.1	11.5
1.000	-39.9	11.7
2.000	-39.5	12.0
3.000	-39.4	12.1
4.000	-39.7	11.9
5.000	-39.7	11.8
10.000	40.2	11.3
15.000	-40.7	10.8
20.000	-40.5	11.0
25.000	-41.3	10.2
30.000	42.3	9.2