

849 NW State Road 45 Newberry, FL 32669 USA

Ph: 888.472.2424 or 352.472.5500

Fax: 352.472.2030

Email: <u>info@timcoengr.com</u>
Website: <u>www.timcoengr.com</u>

FCC PART 15.249 TEST REPORT UNLICENSED INTENTIONAL RADIATOR

Applicant	QUIKSILVER TECHNICAL DIVISION		
Address	114 ROUTE DES VANNIERS		
	HOSSEGOR LA LANDES 40150 FRANCE		
FCC ID	W8NFL502		
Model Number	FL502		
Product Description	DONGLE		
Date Sample Received	5/28/2009		
Date Tested	5/29/2009		
Tested By	JOE SCOGLIO		
Approved By	MARIO DE ARANZETA		
Report Number	775ZAT9TestReport.doc		
Test Results			

THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.





TABLE OF CONTENT

GENERAL REMARKS	3
GENERAL INFORMATION	4
EMC EQUIPMENT LIST	5
TEST PROCEDURES	6
RADIATION INTERFERENCE	7
OCCUPIED BANDWIDTH	8
BAND EDGE COMPLIANCE	9
POWER LINE CONDUCTED INTERFERENCE	. 12

APPLICANT: QUIKSILVER TECHNICAL DIVISION

FCC ID: W8NFL502



GENERAL REMARKS

The attached report shall not be reproduced except in full without the written permission of Timco Engineering Inc.

Summary

The device under test does:

fulfill the general approval requirements as identified in this test report not fulfill the general approval requirements as identified in this test report

Attestations

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025 requirements.

Certificate # 0955-01

I attest that the necessary measurements were made, under my supervision, at:

Timco Engineering Inc. 849 NW State Road 45 Newberry, Fl 32669



Authorized Signatory Name:

Mario de Aranzeta C.E.T. Compliance Engineer/ Lab. Supervisor

Date: 5/29/2009

APPLICANT: QUIKSILVER TECHNICAL DIVISION

FCC ID: W8NFL502



GENERAL INFORMATION

DUT Specification

The test results relate only to the items tested.					
Applicable Standard	Part 15.249				
DUT Description	DONGLE				
FCC ID	W8NFL502				
Model Number	FL502				
Operating Frequency	TX: 2409-2472 MHz		RX: Same	e	
	☐ 110-120Vac/50- 60Hz				
DUT Power Source	☐ DC Power				
	☐ Battery Operated Exc	lusively			
Test Item	☐ Prototype	⊠ Pre-Pr	oduction	☐ Production	
Type of Equipment	Fixed	☐ Mobile	e	□ Portable	
Antenna Connector	None Internal antenna				
Test Facility	Timco Engineering Inc. located at 849 NW State Road 45 Newberry, FL 32669 USA.				
Test Conditions	Temperature: 26°C				
Test Exercise	Relative humidity: 50% The DUT was placed in o	ontinuous	transmit	mode of operation.	

Test Supporting Equipment

Supporting Device	Manufacturer	Model / FCC ID	Serial Number
Laptop Computer	DELL	PP01L	

APPLICANT: QUIKSILVER TECHNICAL DIVISION

FCC ID: W8NFL502



EMC EQUIPMENT LIST

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
3/10-Meter OATS	TEI	N/A	N/A	Listed 3/20/07	3/19/10
3-Meter OATS	TEI	N/A	N/A	Listed 2/5/09	2/5/12
3-Meter Semi- Anechoic Chamber	Panashield	N/A	N/A	Listed 5/11/07	5/11/10
AC Voltmeter	HP	400FL	2213A14499	CAL 3/23/09	3/23/11
Analyzer Tan Tower Quasi-Peak Adapter	НР	85650A	3303A01690	CAL 11/30/07	11/30/09
Analyzer Tan Tower RF Preselector	НР	85685A	3221A01400	CAL 11/30/07	11/30/09
Analyzer Tan Tower Spectrum Analyzer	НР	8566B Opt 462	3138A07786 3144A20661	CAL 11/30/07	11/30/09
Analyzer Tan Tower Preamplifier	НР	8449B-H02	3008A00372	CAL 11/30/07	11/30/09
Frequency Counter	HP	5352B	2632A00165	CAL 3/23/09	3/22/11
Hygro- Thermometer	Extech	445703	0602	CAL 11/15/07	11/15/09
Antenna: Log- Periodic	Electro-Metrics	96005	1243	CAL 12/13/07	12/13/09
Measuring Tape- 7.5M	Kraftixx	7.5M PROFI		CHAR 11/13/07	11/13/09
Digital Multimeter	Fluke	FLUKE-77- 3	79510405	CAL 5/18/09	5/18/11
System One	Audio Precision	System One	SYS1-45868	CHAR 2/27/08	2/27/10
Temperature Chamber	Tenney Engineering	TTRC	11717-7	CHAR 4/25/08	4/25/10

APPLICANT: QUIKSILVER TECHNICAL DIVISION

FCC ID: W8NFL502



TEST PROCEDURES

Radiation Interference: ANSI C63.4-2003 using a spectrum analyzer, a preselector, a quasipeak adapter, and an appropriate antenna. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The resolution bandwidth was 100 kHz with an appropriate sweep speed and the video bandwidth was 300 kHz up to 1 GHz and 1 MHz with a video BW of 3 MHz above 1 GHz. When an emission was found, the table was rotated to produce the maximum signal strength. The antenna was placed in both the horizontal and vertical planes and the worse case emissions were reported. The spectrum was searched to at least the tenth (10) harmonic of the fundamental.

Formula Of Conversion Factors: The field strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBµV) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB. The gain of the preselector was accounted for in the spectrum analyzer meter reading.

Example:

Freq (MHz) Meter Reading + ACF + CL = FS

33 20 dB μ V + 10.36 dB + 0.5 = 30.86 dB μ V/m @ 3m

Power Line Conducted Interference: The procedure used was ANSI C63.4-2003 using a 50uH LISN. Both lines were observed. The bandwidth of the spectrum analyzer was 10kHz with an appropriate sweep speed. The spectrum was scanned from 0.15 to 30 MHz.

Occupied Bandwidth: A small sample of the transmitter output was fed into the spectrum analyzer and the attached plot was printed. The vertical scale is set to -10 dBm per division.

ANSI C63.4-2003 10.1 Measurement Procedures: The DUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The DUT was placed in the center of the table (1.5m side). The table used for radiated measurements is capable of continuous rotation.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes. Emissions attenuated more than 20 dB below the permissible value are not reported.

APPLICANT: QUIKSILVER TECHNICAL DIVISION

FCC ID: W8NFL502



RADIATION INTERFERENCE

Rules Part No.: 15.249, 15.209

Requirements:

Frequency	Limits
Pa	rt 15.209
9 to 490 kHz	2400/F (kHz) μV/m @ 300 meters
490 to 1705 kHz	24000/F (kHz) μV/m @ 30 meters
1705 kHz to 30 MHz	29.54 dBμV/m @ 30 meters
30 – 88	40.0 dBμV/m @ 3 meters
80 – 216	43.5 dBμV/m @ 3 meters
216 – 960	46.0 dBμV/m @ 3 meters
Above 960	54.0 dBµV/m @ 3 meters
Pa	rt 15.249
Fundamental 902 – 928 MHz	94.0 dBμV/m @ 3 meters
Fundamental 2.4 – 2.4835 MHz	94.0 dBµV/m @ 3 meters
Harmonics	54.0 dBµV/m @ 3 meters

Test Data:

Tuned	Emission	Meter	Ant.	Coax	Correction	Field	Margin
Frequency	Frequency	Reading	Po1	Loss	Factor	Strength	dB
MHz	MHz	dΒμV		dB	dB	$dB\mu V/m$	
2,410.0	2,410.00	47.1	V	3.19	32.27	82.56	11.44
2,410.0	2,410.00	51.9	H	3.19	32.27	87.36	6.64
2,410.0	4,820.00	6.5	V	4.91	34.10	45.51	8.49
2,410.0	4,820.00	8.6	H	4.91	34.10	47.61	6.39
2,442.0	2,442.00	50.0	V	3.21	32.35	85.56	8.44
2,442.0	2,442.00	51.8	H	3.21	32.35	87.36	6.64
2,442.0	4,884.00	9.2	V	4.94	34.10	48.24	5.76
2,442.0	4,884.00	10.1	H	4.94	34.10	49.14	4.86
2,472.0	2,472.00	48.8	V	3.23	32.43	84.46	9.54
2,472.0	2,472.00	49.5	H	3.23	32.43	85.16	8.84
2,472.0	4,944.00	8.8	V	4.97	34.10	47.87	6.13
2,472.0	4,944.00	9.9	Н	4.97	34.10	48.97	5.03

APPLICANT: QUIKSILVER TECHNICAL DIVISION

FCC ID: W8NFL502




OCCUPIED BANDWIDTH

Rules Part No.: 15.249 (d)

Requirements: The field strength of any emissions appearing outside the bandedges and up to 10 kHz above and below the band edges shall be attenuated at least 50 dB below the level of the carrier or to the general limits of 15.249.

Test Data:

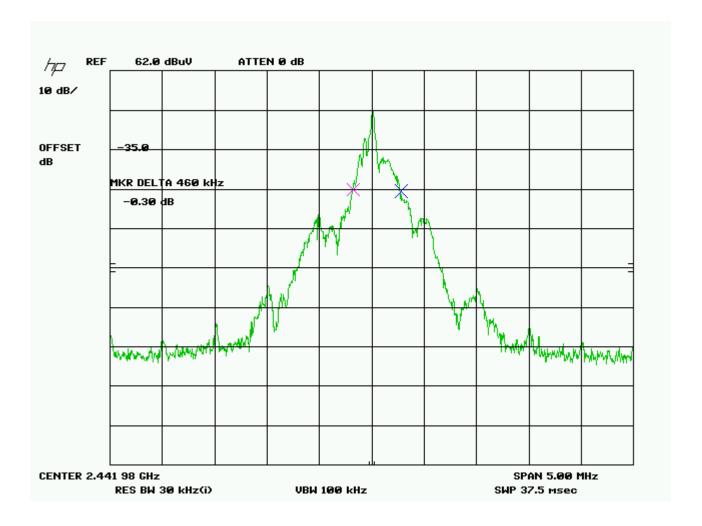

APPLICANT: QUIKSILVER TECHNICAL DIVISION

FCC ID: W8NFL502




BAND EDGE COMPLIANCE

Rules Part No.: 15.249 (d)

Requirements: 40 dBc or in the case of restricted bands 54 dB μ V/m.

Test Data:

Lower bandedge

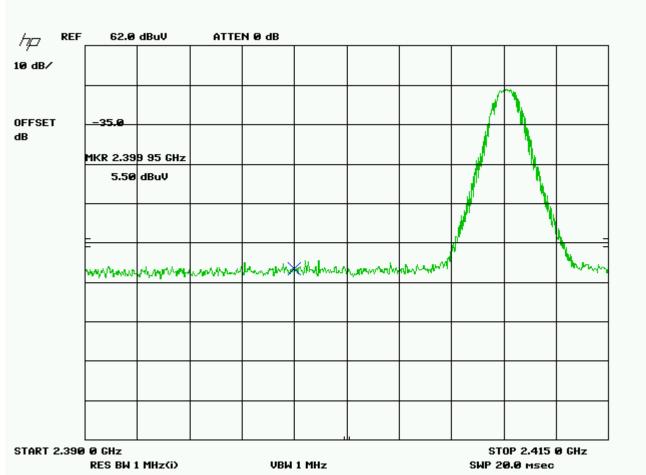

Peak Plot


Tuned Frequen		Meter Reading dBμV	Ant. Pol V/H	Coax Loss dB	Correction Factor dB/m	Field Strength dBµV/m	Margin dB
2,410.	2,400.00	5.5	H	3.18	32.24	40.92	13.08

APPLICANT: QUIKSILVER TECHNICAL DIVISION

FCC ID: W8NFL502



Lower non-adjacent restricted band

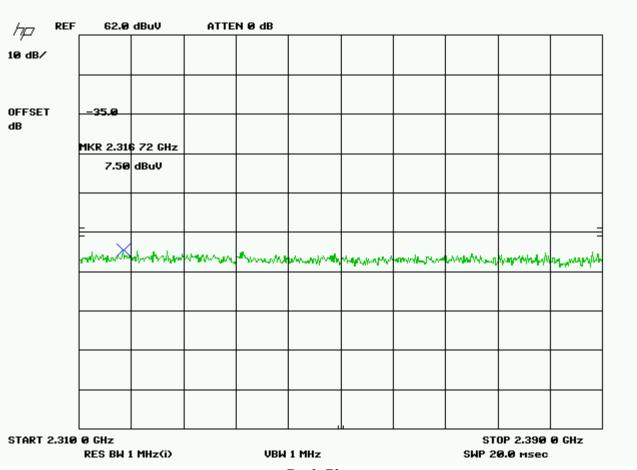

Peak Plot


Tuned Frequency	Emission Frequency	Meter Reading	Ant. Pol	Coax	Correction Factor	Field Strength	Margin
MHz	MHz	dΒμV	V/H	dB	dB/m	dBμV/m	dB
2410.00	2316.70	7.5	H	3.12	32.02	42.64	11.36

APPLICANT: QUIKSILVER TECHNICAL DIVISION

FCC ID: W8NFL502



Upper bandedge

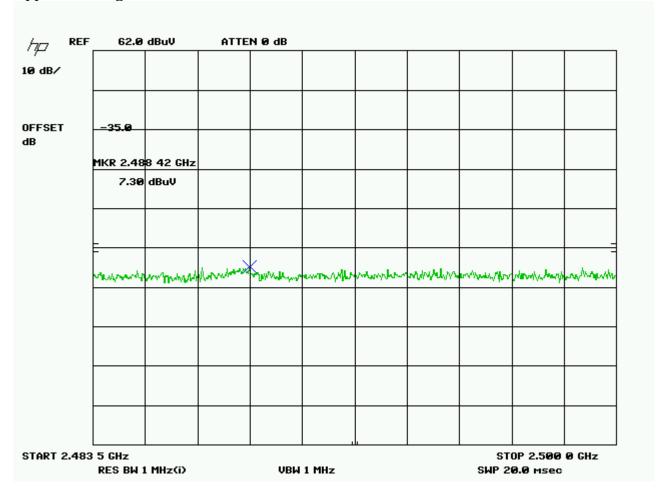

Peak Plot

Tuned Frequency MHz	Emission Frequency MHz	Meter Reading dB _µ V	Ant. Pol	Coax Loss dB	Correction Factor dB	Field Strength dBµV/m	Margin dB
2,472.0	2,488.42	7.3	V	3.24	32.44	42.98	11.02

APPLICANT: QUIKSILVER TECHNICAL DIVISION

FCC ID: W8NFL502



POWER LINE CONDUCTED INTERFERENCE

Rules Part No.: 15.207

Requirements:

Frequency (MHz)	Quasi Peak Limits (dBμV)	Average Limits (dBµV)
0.15 - 0.5	66 – 56	56 – 46
0.5 – 5.0	56	46
5.0 – 30	60	50

Test Data: The attached graphs represent the emissions read for power line conducted for this device. Both lines were observed.

APPLICANT: QUIKSILVER TECHNICAL DIVISION


FCC ID: W8NFL502



NOTES:

ac line conducted line 1

FCC 15.107 Mask Class B

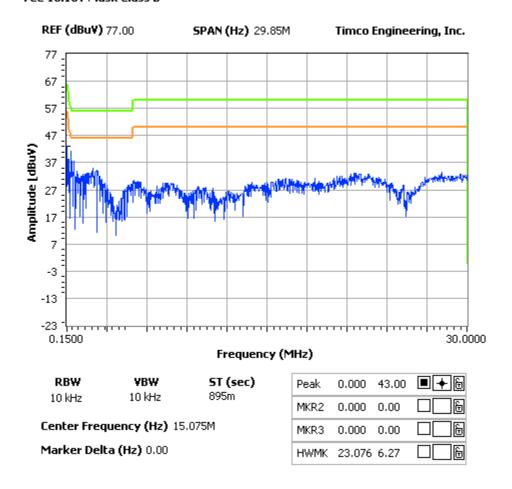

APPLICANT: QUIKSILVER TECHNICAL DIVISION


FCC ID: W8NFL502



NOTES:

ac line conducted line 2

FCC 15.107 Mask Class B

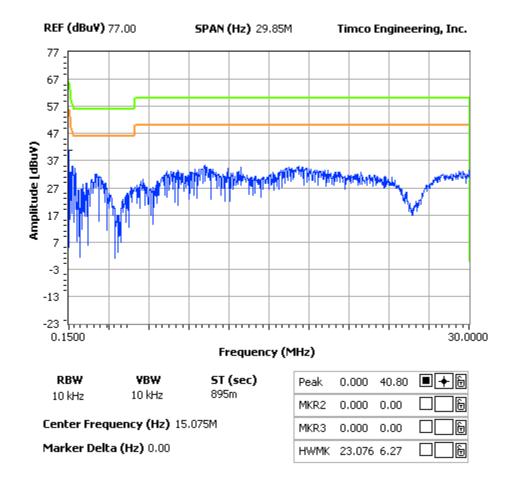

APPLICANT: QUIKSILVER TECHNICAL DIVISION

FCC ID: W8NFL502