



# FCC Test Report

**EQUIPMENT** : Vehicle Tracking system  
**BRAND NAME** : iTTrac Gold  
**MODEL NAME** : iTTrac  
**FCC ID** : W8SITRACGOLD  
**STANDARD** : 47 CFR Part 2, 22(H), 24(E)  
**CLASSIFICATION** : PCS Licensed Transmitter (PCB)  
**Tx/Rx FREQUENCY RANGE** : **GSM850** : 824.2 ~ 848.8 MHz /  
869.2 ~ 893.8 MHz  
**GSM1900** : 1850.2 ~ 1909.8 MHz /  
1930.2 ~ 1989.8 MHz  
**MAX. ERP/EIRP POWER** : **GSM850(GPRS)** : 1.25 W  
**GSM1900(GPRS)** : 0.72 W  
**EMISSION DESIGNATOR** : 244KGXW  
**APPLICANT** : **Cheng Holin Technology Corp.**  
10F., No. 15, Lane 155, Bei Shen Road Sec. 3, Shen Keng,  
Taipei, Taiwan 222, R.O.C.

The product sample received on Mar. 02, 2009 and completely tested on Mar. 22, 2009. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.4-2003 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Roy Wu / Manager



**SPORTON INTERNATIONAL INC.**  
No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



## TABLE OF CONTENTS

<b>REVISION HISTORY.....</b>	<b>3</b>
<b>SUMMARY OF TEST RESULT .....</b>	<b>4</b>
<b>1 GENERAL DESCRIPTION.....</b>	<b>5</b>
1.1    Applicant.....	5
1.2    Manufacturer .....	5
1.3    Feature of Equipment Under Test.....	5
1.4    1Testing Site .....	6
1.5    Applied Standards .....	6
1.6    Ancillary Equipment List.....	6
<b>2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....</b>	<b>7</b>
2.1    Test Mode.....	7
2.2    Connection Diagram of Test System .....	7
<b>3 TEST RESULT.....</b>	<b>8</b>
3.1    Conducted Output Power Measurement.....	8
3.2    Effective Radiated Power and Effective Isotropic Radiated Power Measurement .....	10
3.3    Occupied Bandwidth and Band Edge Measurement .....	13
3.4    Conducted Emission Measurement .....	18
3.5    Field Strength of Spurious Radiation Measurement .....	24
3.6    Frequency Stability Measurement.....	31
<b>4 LIST OF MEASURING EQUIPMENT.....</b>	<b>34</b>
<b>5 UNCERTAINTY OF EVALUATION.....</b>	<b>35</b>
<b>6 CERTIFICATION OF TAF ACCREDITATION .....</b>	<b>36</b>
<b>APPENDIX A. PHOTOGRAPHS OF EUT</b>	
<b>APPENDIX B. SETUP PHOTOGRAPHS</b>	



# REVISION HISTORY



## SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result
3.1	§2.1046	N/A	Conducted Output Power	N/A	PASS
3.2	§22.913(a)(2)	RSS-132(4.4) SRSP-503(5.1.3)	Effective Radiated Power	< 7 Watts for FCC (<6.3 Watts for IC)	PASS
3.2	§24.232(c)	RSS-133 (6.4) SRSP-510(5.1.2)	Equivalent Isotropic Radiated Power	< 2 Watts	PASS
3.3	§2.1049 §22.917(a) §24.238(a)	N/A	Occupied Bandwidth	N/A	PASS
3.3	§2.1051 §22.917(a) §24.238(a)	RSS-132 (4.5.1) RSS-133 (6.5.1)	Band Edge Measurement	< $43+10\log_{10}(P[\text{Watts}])$	PASS
3.4	§2.1051 §22.917(a) §24.238(a)	RSS-132 (4.5.1) RSS-133 (6.5.1)	Conducted Emission	< $43+10\log_{10}(P[\text{Watts}])$	PASS
3.5	§2.1053 §22.917(a) §24.238(a)	RSS-132 (4.5.1) RSS-133 (6.5.1)	Field Strength of Spurious Radiation	< $43+10\log_{10}(P[\text{Watts}])$	PASS
3.6	§2.1055 §22.355 §24.235	RSS-132(4.3) RSS-133(6.3)	Frequency Stability for Temperature & Voltage	< 2.5 ppm	PASS



## 1 General Description

### 1.1 Applicant

**Cheng Holin Technology Corp.**

10F., No. 15, Lane 155, Bei Shen Road Sec. 3, Shen Keng, Taipei, Taiwan 222, R.O.C.

### 1.2 Manufacturer

**Cheng Holin Technology Corp.**

10F., No. 15, Lane 155, Bei Shen Road Sec. 3, Shen Keng, Taipei, Taiwan 222, R.O.C.

### 1.3 Feature of Equipment Under Test

Product Feature & Specification	
<b>Equipment</b>	Vehicle Tracking system
<b>Brand Name</b>	iTrac Gold
<b>Model Name</b>	iTrac
<b>FCC ID</b>	W8SITRACGOLD
<b>Tx Frequency</b>	GSM850 : 824 MHz ~ 849 MHz GSM1900 : 1850 MHz ~ 1910 MHz
<b>Rx Frequency</b>	GSM850 : 869 MHz ~ 894 MHz GSM1900 : 1930 MHz ~ 1990 MHz
<b>Maximum Output Power to Antenna</b>	GSM850 : 32.03 dBm GSM1900 : 29.77 dBm
<b>Maximum ERP/EIRP</b>	GSM850(GPRS) : 1.25 W ( 30.97 dBm ) GSM1900(GPRS) : 0.72 W ( 28.57 dBm )
<b>Antenna Type</b>	Dipole Antenna
<b>HW Version</b>	V2.0
<b>SW Version</b>	V081217
<b>Type of Modulation</b>	GMSK
<b>Type of Emission</b>	244KGXW
<b>EUT Stage</b>	Production Unit



## 1.4 1 Testing Site

Test Site	SPORTON INTERNATIONAL INC.		
Test Site Location	No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978		
Test Site No.	Sportun Site No.		FCC/IC Registration No.
	TH02-HY	03CH07-HY	TW1022/4086B-1

## 1.5 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- Preliminary Guidance for Receiving Applications for Certification of 3G Device. May 9, 2006.
- 47 CFR Part 2, 22(H), 24(E)
- ANSI C63.4-2003
- ANSI / TIA / EIA-603-C-2004
- IC RSS-132 Issue 2
- IC RSS-133 Issue 5

### Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B (DoC), recorded in a separate test report.

## 1.6 Ancillary Equipment List

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU200	N/A	N/A	Unshielded, 1.8 m
2.	DC Power Supply	GW	GPC-60300	N/A	N/A	Unshielded, 1.8 m
3.	GSM Antenna	N/A	MGA300	N/A	N/A	N/A
4.	GPS Antenna	N/A	GAA13	N/A	N/A	N/A
5.	I/O cable	N/A	IO4000L3M	N/A	N/A	N/A
6.	Backup battery	N/A	MC-18500L	N/A	N/A	N/A

## 2 Test Configuration of Equipment Under Test

### 2.1 Test Mode


During all testing, EUT is in link mode with base station emulator at maximum power level. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT is rotated on three test planes to find out the worst emission.

Frequency range investigated for radiated emission is as follows:

1. 30 MHz to 9000 MHz for GSM850.
2. 30MHz to 19000 MHz for GSM1900.

Test Modes		
Band	Radiated TCs	Conducted TCs
GSM 850	■ GPRS Link	■ GPRS Link
GSM 1900	■ GPRS Link	■ GPRS Link

### 2.2 Connection Diagram of Test System

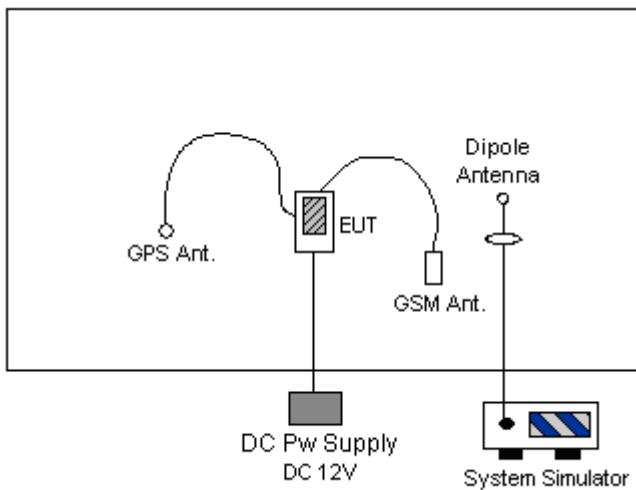

## 3 Test Result

### 3.1 Conducted Output Power Measurement

#### 3.1.1 Description of the Conducted Output Power Measurement

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.


#### 3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.1.3 Test Procedures

1. The transmitter output port was connected to base station.
2. Set EUT at maximum power through base station.
3. Select lowest, middle, and highest channels for each band and different modulation.

#### 3.1.4 Test Setup

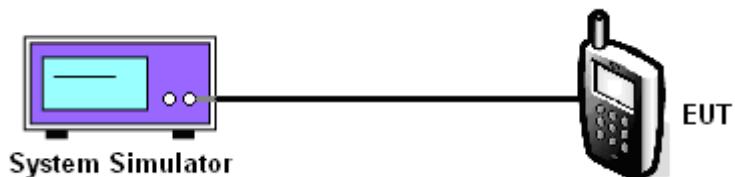



### 3.1.5 Test Result of Conducted Output Power

Cellular Band				
Modes	Channel	Frequency (MHz)	Conducted Power	
			(dBm)	(Watts)
GPRS	128 (Low)	824.2	31.75	1.50
	189 (Mid)	836.4	31.96	1.57
	251 (High)	848.8	32.03	1.60

PCS Band				
Modes	Channel	Frequency (MHz)	Conducted Power	
			(dBm)	(Watts)
GPRS	512 (Low)	1850.2	29.77	0.95
	661 (Mid)	1880.0	29.42	0.87
	810 (High)	1909.8	29.18	0.83



## **3.2 Effective Radiated Power and Effective Isotropic Radiated Power Measurement**

### **3.2.1 Description of the ERP/EIRP Measurement**

ERP/EIRP is measured by substitution method according to ANSI / TIA / EIA-603-C-2004. The ERP of mobile transmitters must not exceed 7 Watts and the EIRP of mobile transmitters are limited to 2 Watts.

### **3.2.2 Measuring Instruments**

See list of measuring instruments of this test report.

### **3.2.3 Test Procedures**

1. The EUT was placed on a turntable with 1.0 meter height in a fully anechoic chamber.
2. The EUT was set at 1.2 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiated power.
4. The height of the receiving antenna is adjusted to look for the maximum ERP/EIRP.
5. Taking the record of maximum ERP/EIRP.
6. A dipole antenna was substituted in place of the EUT and was driven by a signal generator.
7. The conducted power at the terminal of the dipole antenna is measured.
8. Repeat step 3 to step 5 to get the maximum ERP/EIRP of the substitution antenna.
9.  $ERP/EIRP = Ps + Et - Es + Gs = Ps + Rt - Rs + Gs$

$Ps$  (dBm) : Input power to substitution antenna.

$Gs$  (dBi or dBd) : Substitution antenna Gain.

$Et = Rt + AF$


$Es = Rs + AF$

$AF$  (dB/m) : Receive antenna factor

$Rt$  : The highest received signal in spectrum analyzer for EUT.

$Rs$  : The highest received signal in spectrum analyzer for substitution antenna.

### 3.2.4 Test Setup

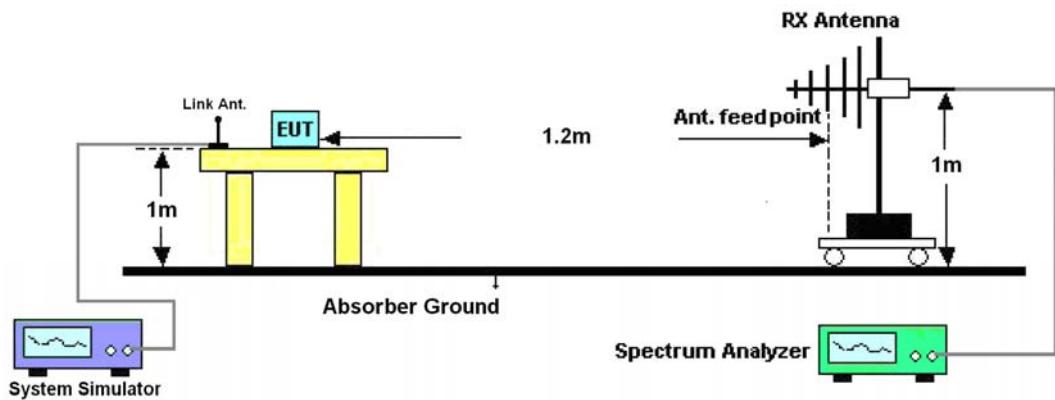



### 3.2.5 Test Result of ERP

GSM850 (GPRS) Radiated Power ERP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
824.20	-19.39	-48.12	0.00	-1.08	27.65	0.58
836.40	-22.11	-48.28	0.00	-0.93	25.24	0.33
848.80	-22.53	-48.35	0.00	-0.76	25.06	0.32

Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
824.20	-15.92	-47.97	0.00	-1.08	30.97	1.25
836.40	-19.11	-48.01	0.00	-0.93	27.97	0.63
848.80	-18.97	-48.05	0.00	-0.76	28.32	0.68

### 3.2.6 Test Result of EIRP

GSM1900 (GPRS) Radiated Power EIRP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1850.20	-30.47	-51.88	0.00	1.96	23.37	0.22
1880.00	-32.74	-52.99	0.00	2.00	22.25	0.17
1909.80	-34.34	-54.28	0.00	1.98	21.92	0.16

Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1850.20	-25.52	-52.13	0.00	1.96	28.57	0.72
1880.00	-28.46	-53.17	0.00	2.00	26.71	0.47
1909.80	-30.71	-54.13	0.00	1.98	25.40	0.35

### 3.3 Occupied Bandwidth and Band Edge Measurement

#### 3.3.1 Description of Occupied Bandwidth and Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


#### 3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.3.3 Test Procedures


1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The 99% and 26 dB occupied bandwidth (BW) of the middle channel for the highest RF powers were measured.
3. The band edges of low and high channels for the highest RF powers were measured. Setting RBW as roughly BW/100.
4. The RBW was replaced by 10 kHz, due to the spectrum analyzer IF-Filter including an excess of the limit. A worst case correction factor of  $10 \log (1\% \text{ BW}/\text{measurement RBW})$  was implemented.

#### 3.3.4 Test Setup

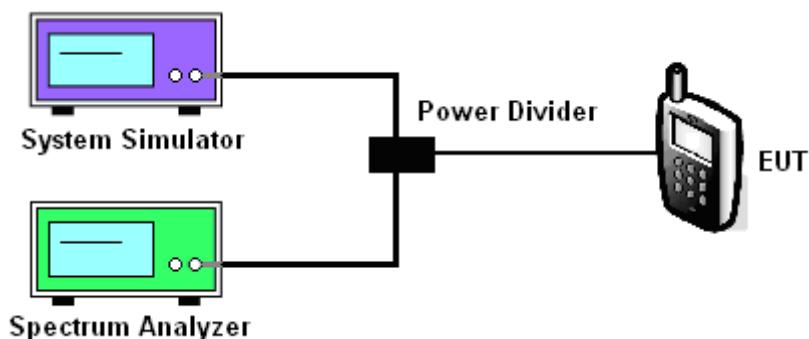


### 3.3.5 Test Result (Plots) of Occupied Bandwidth

<b>Band :</b>	GSM 850	<b>Power Stage :</b>	High
<b>Test Mode :</b>	GPRS Link		

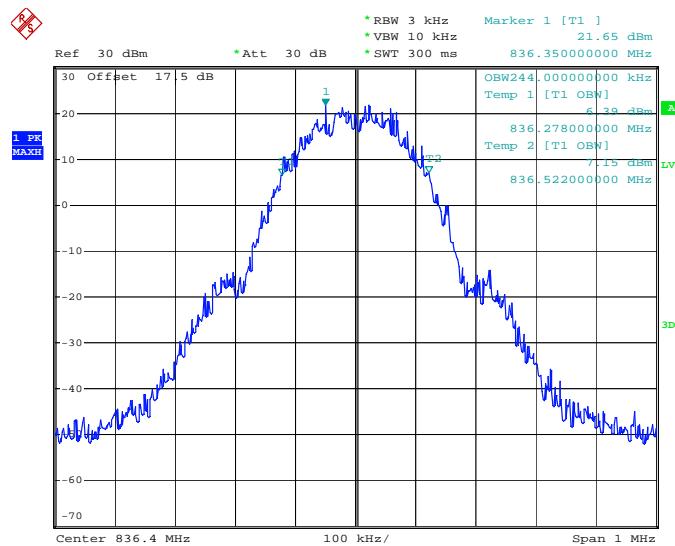**99% Occupied Bandwidth Plot on Channel 189**


HAC-189-E  
Date: 13.MAR.2009 19:48:02

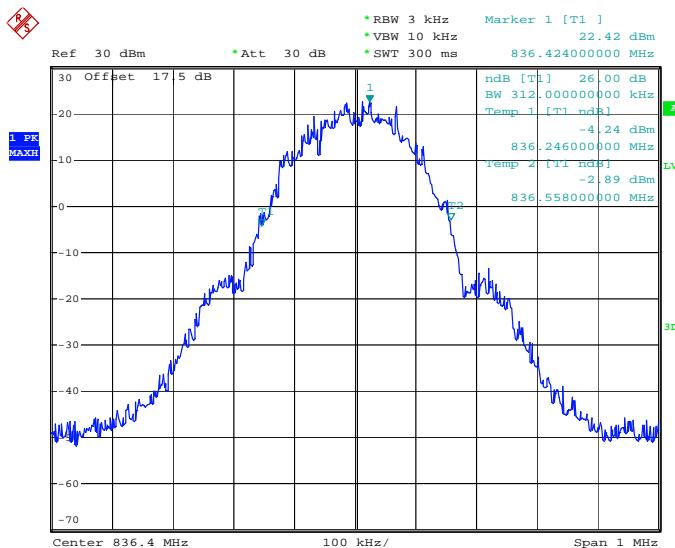
**26dB Bandwidth Plot on Channel 189**


HAC-189-E  
Date: 13.MAR.2009 19:46:08




Band :	GSM 1900	Power Stage :	High
Test Mode :	GPRS Link		

## 99% Occupied Bandwidth Plot on Channel 661

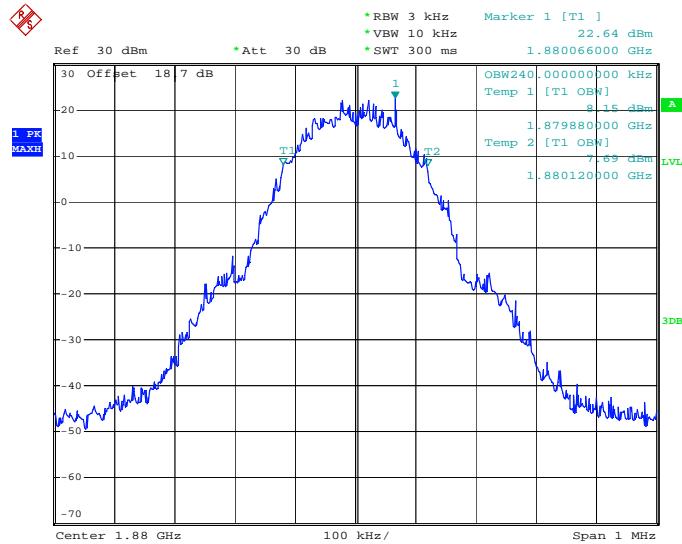

HAC-189-E  
Date: 13.MAR.2009 20:21:57


## 26dB Bandwidth Plot on Channel 661

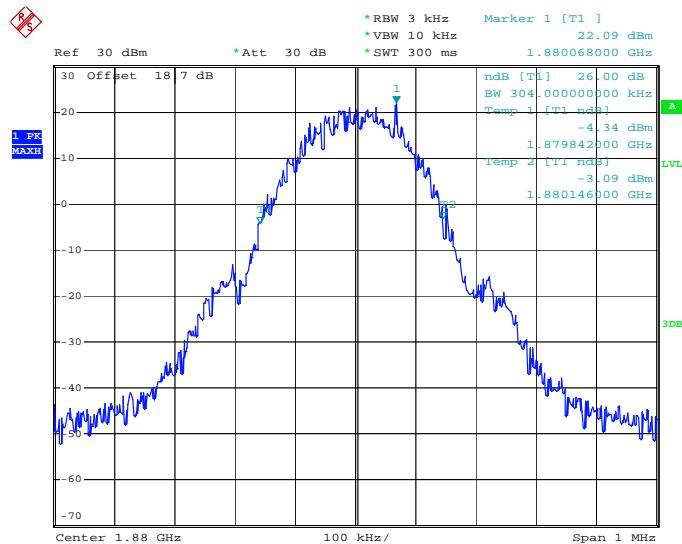


HAC-189-E  
Date: 13.MAR.2009 20:19:40

### 3.3.6 Test Result (Plots) of Conducted Band Edges

<b>Band :</b>	GSM850	<b>Power Stage :</b>	High
<b>Test Mode :</b>	GPRS Link		

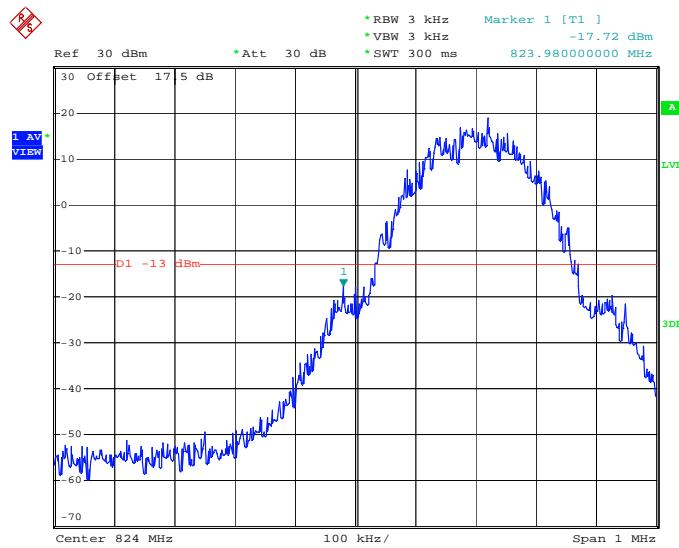
**Lower Band Edge Plot on Channel 128**


HAC-189-E  
Date: 13.MAR.2009 19:50:48

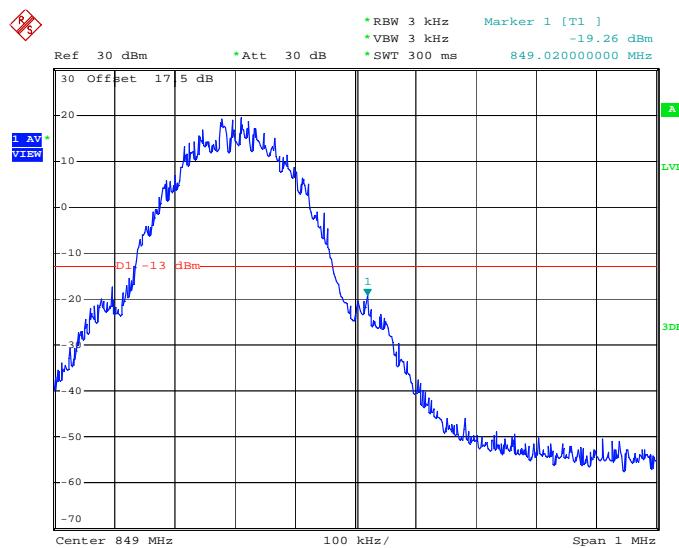
**Higher Band Edge Plot on Channel 251**


HAC-189-E  
Date: 13.MAR.2009 19:53:12

<b>Band :</b>	GSM1900	<b>Power Stage :</b>	High
<b>Test Mode :</b>	GPRS Link		

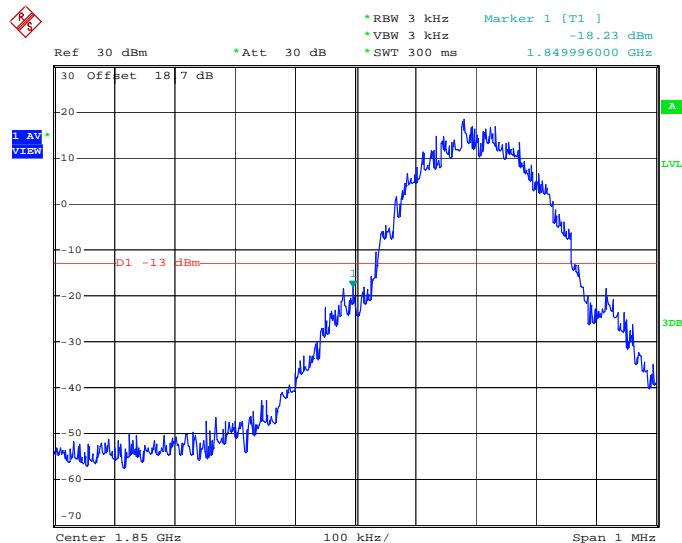**Lower Band Edge Plot on Channel 512**


HAC-189-E  
Date: 13.MAR.2009 20:24:17

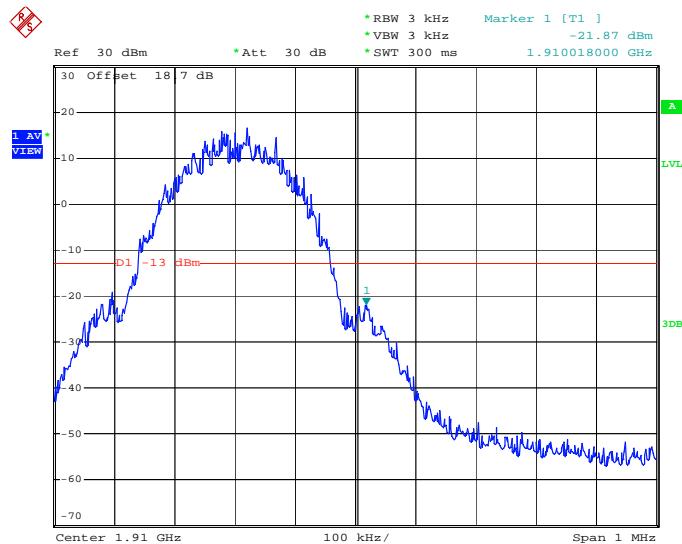**Higher Band Edge Plot on Channel 810**


HAC-189-E  
Date: 13.MAR.2009 20:27:47

### 3.4 Conducted Emission Measurement

#### 3.4.1 Description of Conducted Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10<sup>th</sup> harmonic.


#### 3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.4.3 Test Procedures


1. The EUT was connected to spectrum analyzer and base station via power divider.
2. The middle channel for the highest RF power within the transmitting frequency was measured.
3. The conducted spurious emission for the whole frequency range was taken.

#### 3.4.4 Test Setup

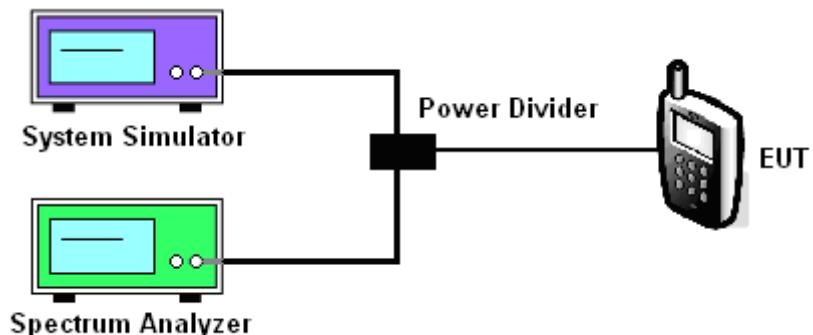


### 3.4.5 Test Result (Plots) of Conducted Emission


<b>Band :</b>	GSM850	<b>Channel :</b>	CH189
<b>Test Mode :</b>	GPRS Link		

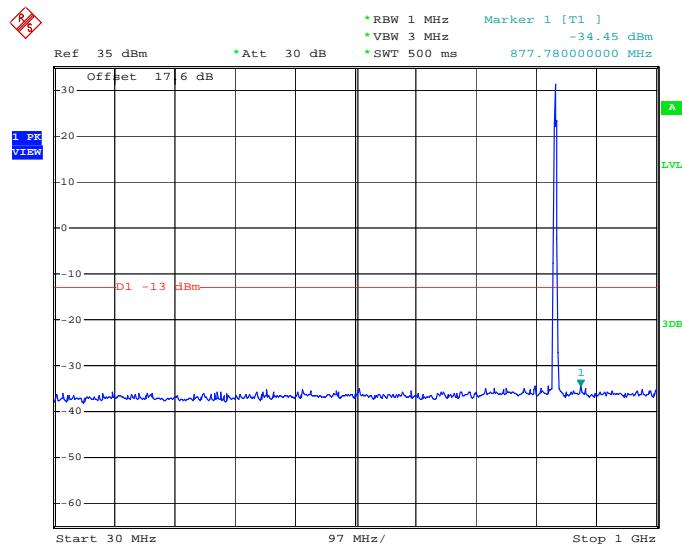**Conducted Emission Plot between 30M-1G**


HAC-189-E  
Date: 13.MAR.2009 20:00:48

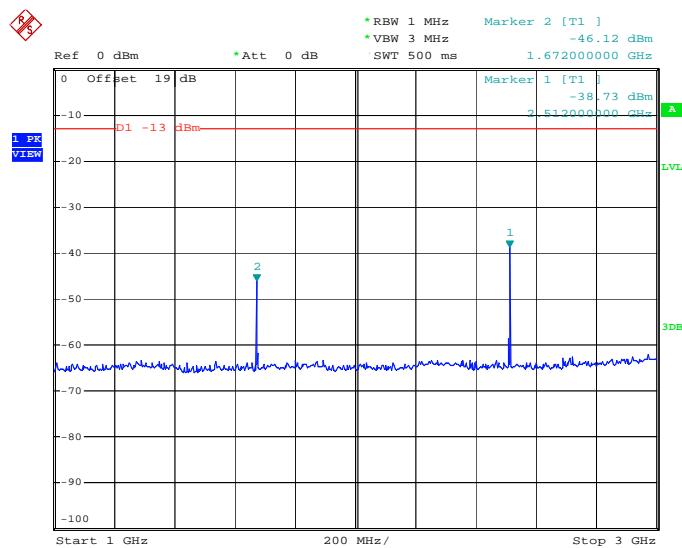
**Conducted Emission Plot between 1GHz ~ 3GHz**


HAC-189-E  
Date: 13.MAR.2009 20:02:26

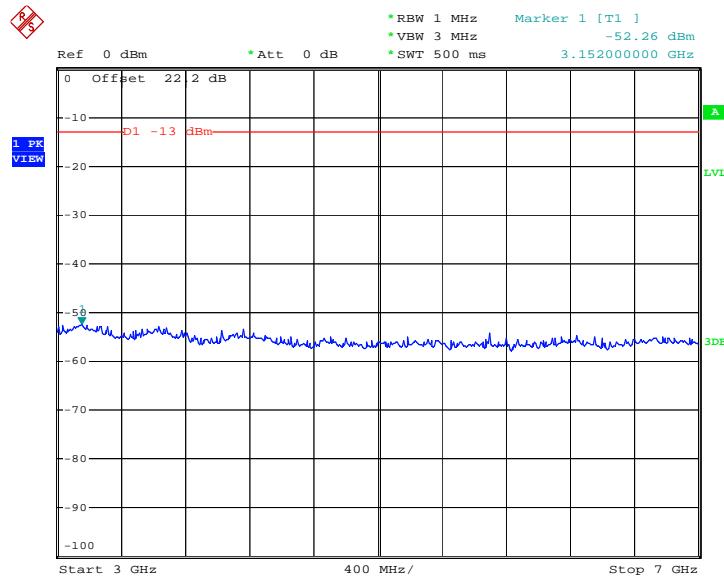**Conducted Emission Plot between 3GHz ~ 7GHz**


HAC-189-E

Date: 13.MAR.2009 20:02:59

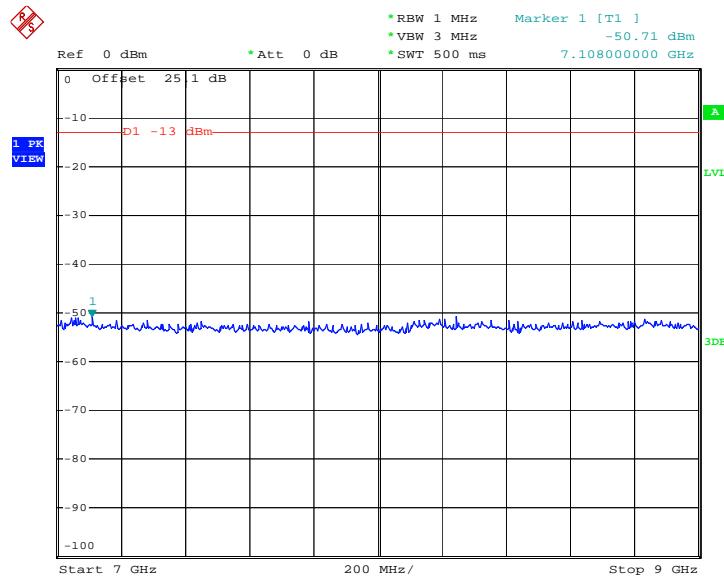**Conducted Emission Plot between 7GHz ~ 9GHz**


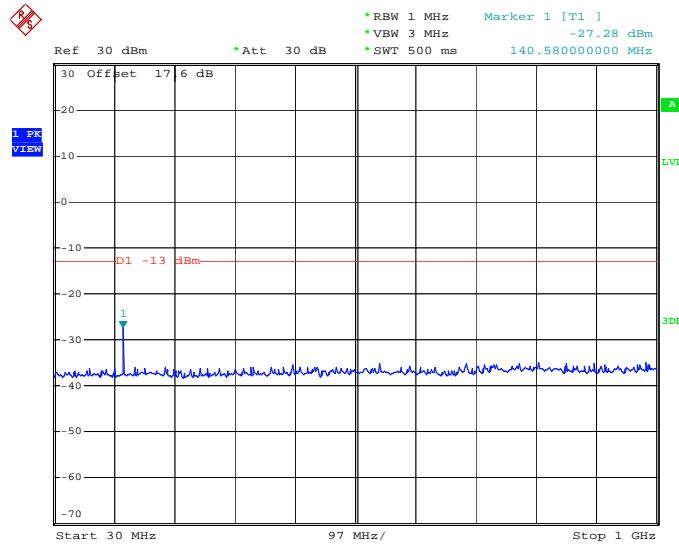
HAC-189-E

Date: 13.MAR.2009 20:03:35




Band :	GSM1900	Channel :	CH661
Test Mode :	GPRS Link		

## Conducted Emission Plot between 30M-1G




HAC-189-E  
Date: 13.MAR.2009 20:14:26

## Conducted Emission Plot between 1GHz ~ 3GHz

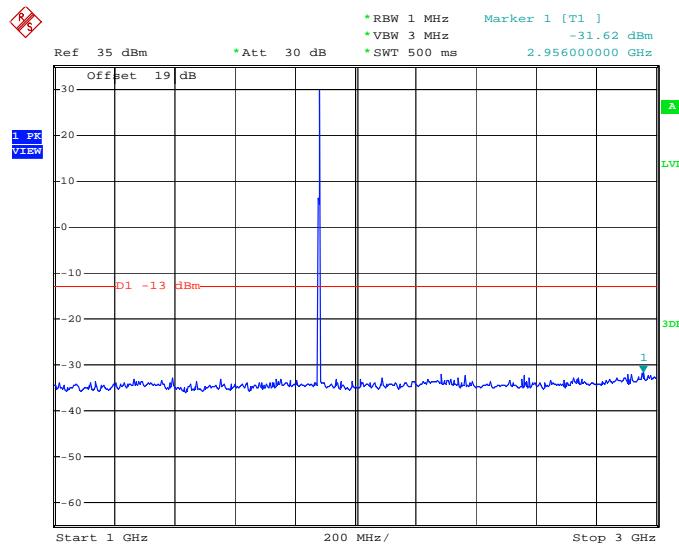


HAC-189-E  
Date: 13.MAR.2009 20:13:13

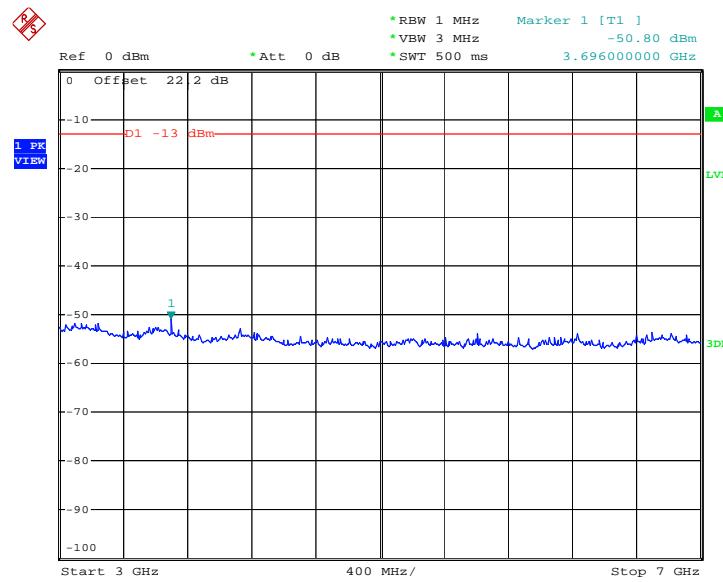**Conducted Emission Plot between 3G-7G**


HAC-189-E

Date: 13.MAR.2009 20:09:41

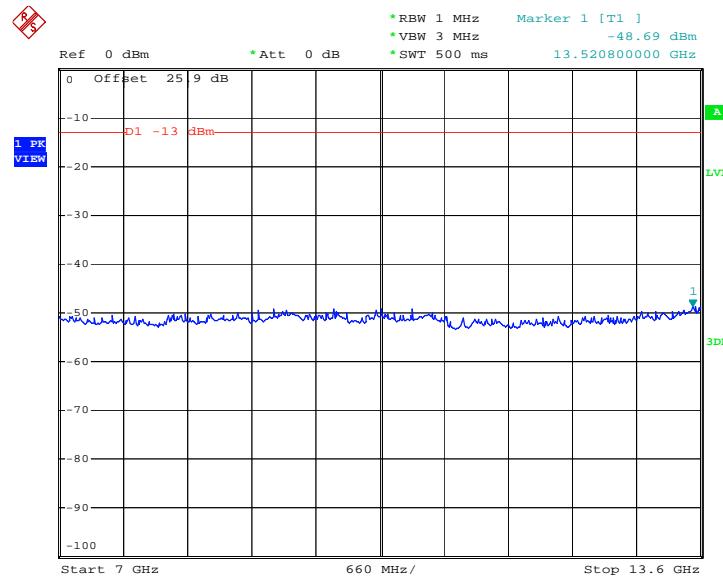
**Conducted Emission Plot between 7G-13.6G**


HAC-189-E

Date: 13.MAR.2009 20:10:31



## Conducted Emission Plot between 13.6G-19.1G

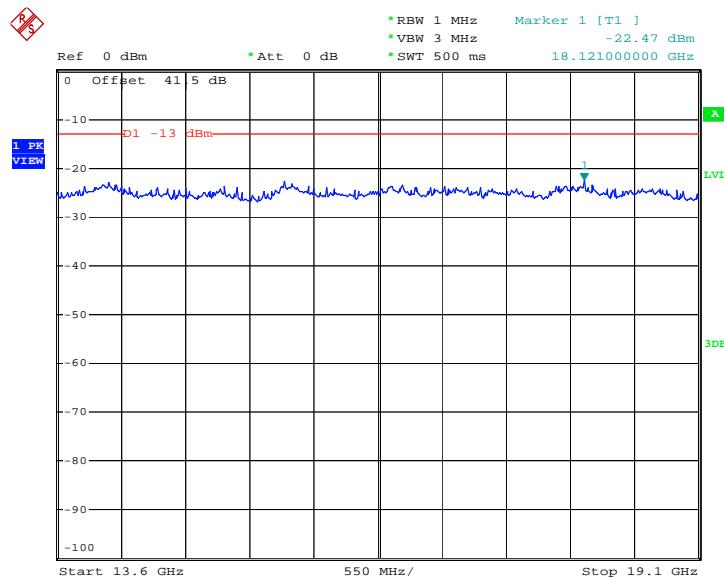

HAC-189-E

Date: 13.MAR.2009 20:11:38



## **3.5 Field Strength of Spurious Radiation Measurement**

### **3.5.1 Description of Field Strength of Spurious Radiated Measurement**

The radiated spurious emission was measured by substitution method according to ANSI / TIA / EIA-603-C-2004. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB. The spectrum is scanned from 9kHz up to a frequency including its 10th harmonic.

### **3.5.2 Measuring Instruments**


See list of measuring instruments of this test report.

### **3.5.3 Test Procedures**


1. The EUT was placed on a rotatable wooden table with 0.8 meter about ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Taking the record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. Emission level (dBm) = output power + substitution Gain.

### 3.5.4 Test Setup

For radiated emissions below 30MHz

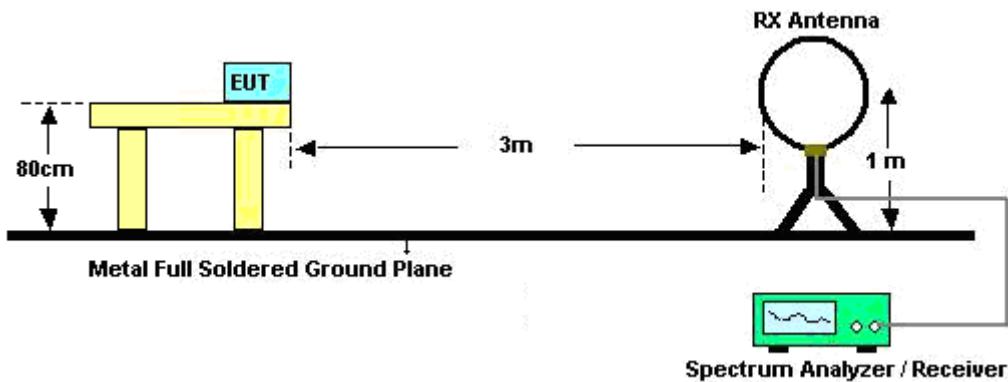

For radiated emissions above 30MHz

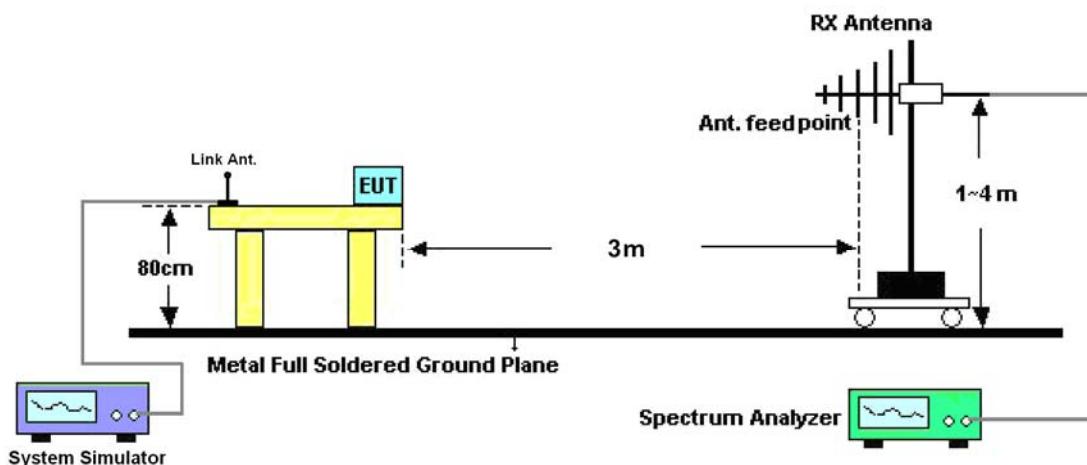



### 3.5.5 Test Results of Radiated Emissions (9kHz ~ 30MHz)

Test Engineer :	Kay Wu	Temperature :	21~22°C	
		Relative Humidity :	30~31%	
Frequency (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.


3.5.6 Test Result of Field Strength of Spurious Radiated (30MHz ~ 10<sup>th</sup> harmonic)

Band :	GSM850	Temperature :	21~22°C																				
Test Mode :	GPRS Link	Relative Humidity :	30~31%																				
Test Engineer :	Kay Wu	Polarization :	Horizontal																				
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.																						
<p>Level (dBm)</p> <p>Date: 2009-03-14</p> <p>FCC PART22/24</p> <p>6dB</p> <p>0</p> <p>-35</p> <p>-70</p> <p>1824.</p> <p>3618.</p> <p>5412.</p> <p>7206.</p> <p>9000</p> <p>Frequency (MHz)</p> <p>Trace: (Discrete)</p> <p>Site : 03CH07-HY</p> <p>Condition : FCC PART22/24 HF-EIRP(080306) HORIZONTAL</p> <p>Project : 930208</p> <p>Mode : Mode 1</p>																							
<table border="1"><thead><tr><th>Frequency (MHz)</th><th>ERP (dBm)</th><th>Limit (dBm)</th><th>Over Limit (dB)</th><th>SPA Reading (dBm)</th><th>S.G. Power (dBm)</th><th>TX Cable loss (dB)</th><th>TX Antenna Gain (dBi)</th><th>Polarization (H/V)</th><th>Result</th></tr></thead><tbody><tr><td>1669</td><td>-49.07</td><td>-13</td><td>-36.07</td><td>-55.58</td><td>-48.08</td><td>3.39</td><td>4.55</td><td>H</td><td>Pass</td></tr></tbody></table>				Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result	1669	-49.07	-13	-36.07	-55.58	-48.08	3.39	4.55	H	Pass
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result														
1669	-49.07	-13	-36.07	-55.58	-48.08	3.39	4.55	H	Pass														



Band :	GSM850	Temperature :	21~22°C																				
Test Mode :	GPRS Link	Relative Humidity :	30~31%																				
Test Engineer :	Kay Wu	Polarization :	Vertical																				
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.																						
<p>Level (dBm)</p> <p>Date: 2009-03-14</p> <p>FCC PART22/24</p> <p>6dB</p> <p>Frequency (MHz)</p> <p>Trace: (Discrete)</p> <p>Site : 03CH07-HY Condition : FCC PART22/24 HF-EIRP(080306) VERTICAL Project : 930208 Mode : Mode 1</p>																							
<table border="1"><thead><tr><th>Frequency (MHz)</th><th>ERP (dBm)</th><th>Limit (dBm)</th><th>Over Limit (dB)</th><th>SPA (dBm)</th><th>S.G. (dBm)</th><th>TX Cable loss (dB)</th><th>TX Antenna Gain (dBi)</th><th>Polarization (H/V)</th><th>Result</th></tr></thead><tbody><tr><td>1669</td><td>-51.36</td><td>-13</td><td>-38.36</td><td>-55.68</td><td>-49.98</td><td>3.39</td><td>4.16</td><td>V</td><td>Pass</td></tr></tbody></table>				Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA (dBm)	S.G. (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result	1669	-51.36	-13	-38.36	-55.68	-49.98	3.39	4.16	V	Pass
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA (dBm)	S.G. (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result														
1669	-51.36	-13	-38.36	-55.68	-49.98	3.39	4.16	V	Pass														

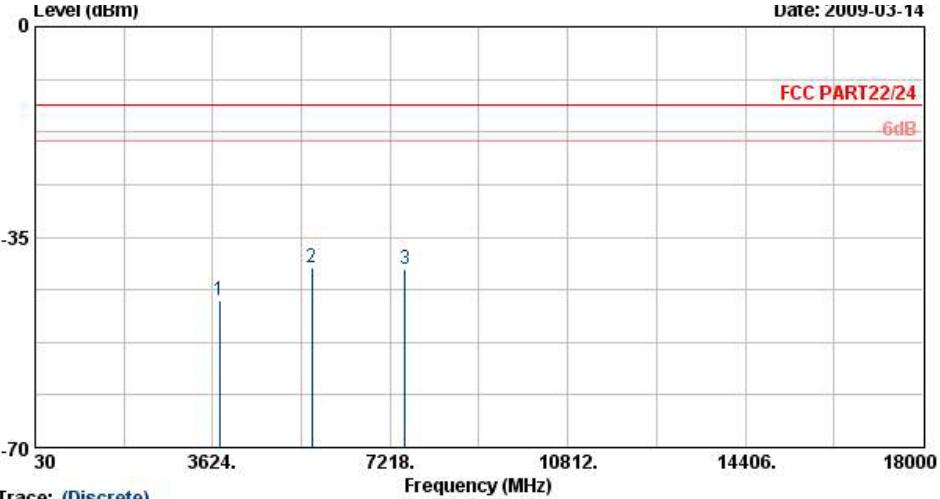

Band :	GSM1900	Temperature :	21~22°C																																					
Test Mode :	GPRS Link	Relative Humidity :	30~31%																																					
Test Engineer :	Kay Wu	Polarization :	Horizontal																																					
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.																																							
	Trace: (Discrete) Site : 03CH07-HY Condition : FCC PART22/24 HF-EIRP(080306) HORIZONTAL Project : 930208 Mode : Mode 1	Frequency (MHz)	Result																																					
<table border="1"><thead><tr><th>Frequency (MHz)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Over Limit (dB)</th><th>SPA (dBm)</th><th>S.G. Power (dBm)</th><th>TX Cable loss (dB)</th><th>TX Antenna Gain (dBi)</th><th>Polarization (H/V)</th><th>Result</th></tr></thead><tbody><tr><td>3760</td><td>-45.60</td><td>-13</td><td>-32.60</td><td>-59.54</td><td>-48.97</td><td>4.03</td><td>7.40</td><td>H</td><td>Pass</td></tr><tr><td>5636</td><td>-40.01</td><td>-13</td><td>-27.01</td><td>-60.61</td><td>-44.95</td><td>3.87</td><td>8.81</td><td>H</td><td>Pass</td></tr><tr><td>7520</td><td>-40.36</td><td>-13</td><td>-27.36</td><td>-62.67</td><td>-44.24</td><td>5.83</td><td>9.71</td><td>H</td><td>Pass</td></tr></tbody></table>				Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result	3760	-45.60	-13	-32.60	-59.54	-48.97	4.03	7.40	H	Pass	5636	-40.01	-13	-27.01	-60.61	-44.95	3.87	8.81	H	Pass	7520	-40.36	-13	-27.36	-62.67	-44.24	5.83
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result																															
3760	-45.60	-13	-32.60	-59.54	-48.97	4.03	7.40	H	Pass																															
5636	-40.01	-13	-27.01	-60.61	-44.95	3.87	8.81	H	Pass																															
7520	-40.36	-13	-27.36	-62.67	-44.24	5.83	9.71	H	Pass																															



Band :	GSM1900	Temperature :	21~22°C																																								
Test Mode :	GPRS Link	Relative Humidity :	30~31%																																								
Test Engineer :	Kay Wu	Polarization :	Vertical																																								
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.																																										
<p>Level (dBm)</p> <p>Date: 2009-03-14</p> <p>FCC PART22/24</p> <p>-6dB</p> <p>Trace: (Discrete)</p> <p>Site : 03CH07-HY Condition : FCC PART22/24 HF-EIRP(080306) VERTICAL Project : 930208 Mode : Mode 1</p> <p>Frequency (MHz)</p>																																											
<table border="1"><thead><tr><th>Frequency (MHz)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Over Limit (dB)</th><th>SPA Reading (dBm)</th><th>S.G. Power (dBm)</th><th>TX Cable loss (dB)</th><th>TX Antenna Gain (dBi)</th><th>Polarization (H/V)</th><th>Result</th></tr></thead><tbody><tr><td>3760</td><td>-38.30</td><td>-13</td><td>-25.30</td><td>-55.88</td><td>-42.18</td><td>4.03</td><td>7.91</td><td>V</td><td>Pass</td></tr><tr><td>5636</td><td>-35.37</td><td>-13</td><td>-22.37</td><td>-57.8</td><td>-41.27</td><td>3.87</td><td>9.77</td><td>V</td><td>Pass</td></tr><tr><td>7520</td><td>-37.35</td><td>-13</td><td>-24.35</td><td>-60.36</td><td>-42.33</td><td>5.83</td><td>10.81</td><td>V</td><td>Pass</td></tr></tbody></table>				Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result	3760	-38.30	-13	-25.30	-55.88	-42.18	4.03	7.91	V	Pass	5636	-35.37	-13	-22.37	-57.8	-41.27	3.87	9.77	V	Pass	7520	-37.35	-13	-24.35	-60.36	-42.33	5.83	10.81	V	Pass
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result																																		
3760	-38.30	-13	-25.30	-55.88	-42.18	4.03	7.91	V	Pass																																		
5636	-35.37	-13	-22.37	-57.8	-41.27	3.87	9.77	V	Pass																																		
7520	-37.35	-13	-24.35	-60.36	-42.33	5.83	10.81	V	Pass																																		

## 3.6 Frequency Stability Measurement

### 3.6.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5\text{ppm}$ ) of the center frequency.

### 3.6.2 Measuring Instruments

See list of measuring instruments of this test report.


### 3.6.3 Test Procedures for Temperature Variation

1. The EUT was set up in the thermal chamber and connected with the base station.
2. With power OFF, the temperature was decreased to  $-30^\circ\text{C}$  and the EUT was stabilized for three hours. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in  $10^\circ\text{C}$  step up to  $50^\circ\text{C}$ . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.
4. If the EUT can not be turned on at  $-30^\circ\text{C}$ , the testing lowest temperature will be raised in  $10^\circ\text{C}$  step until the EUT can be turned on.

### 3.6.4 Test Procedures for Voltage Variation

1. The EUT was placed in a temperature chamber at  $25\pm 5^\circ\text{C}$  and connected with the base station.
2. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

### 3.6.5 Test Setup

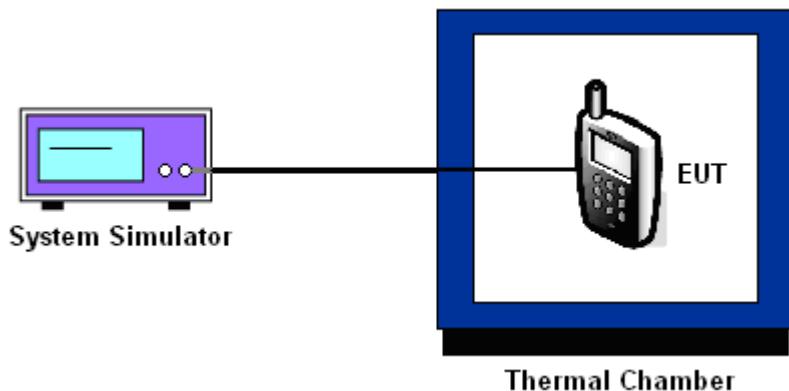



## 3.6.6 Test Result of Temperature Variation

Band :	GSM 850	Channel :	189
Limit (ppm) :	2.5		

Temperature (°C)	GPRS		Result
	Freq. Dev. (Hz)	Deviation (ppm)	
-30	11	0.01	PASS
-20	15	0.02	
-10	12	0.01	
0	-8	-0.01	
10	-9	-0.01	
20	-11	-0.01	
30	-9	-0.01	
40	7	0.01	
50	-10	-0.01	

Band :	GSM 1900	Channel :	661
Limit (ppm) :	2.5		

Temperature (°C)	GPRS		Result
	Freq. Dev. (Hz)	Deviation (ppm)	
-30	29	0.02	PASS
-20	22	0.01	
-10	27	0.01	
0	-21	-0.01	
10	26	0.01	
20	20	0.01	
30	-24	-0.01	
40	36	0.02	
50	-27	-0.01	



### 3.6.7 Test Result of Voltage Variation

Band & Channel	Mode	Voltage (Volt)	Freq. Dev. (Hz)	Deviation (ppm)	Limit (ppm)	Result
GSM 850 CH189	GPRS	3.7	-24	-0.03	2.5	PASS
		BEP	-33	-0.04		
		4.3	-14	-0.02		
GSM 1900 CH661	GPRS	3.7	22	0.01		
		BEP	28	0.01		
		4.3	20	0.01		

Remark:

1. Normal Voltage = 3.7V.
2. Battery End Point (BEP) = 3.2 V.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Due Date	Remark
System Simulator	R&S	CMU200	105934	N/A	Nov. 08, 2008	Nov. 07, 2009	Conducted (TH02-HY)
Spectrum Analyzer	R&S	FSP40	100055	9kHz~40GHz	Jun. 26, 2008	Jun. 25, 2009	Conducted (TH02-HY)
Thermal Chamber	TEN BILLION	TTH-D35P	TBN-930701	N/A	Aug. 01, 2008	Jul. 31, 2009	Conducted (TH02-HY)
Bilog Antenna	SCHAFFNER	CBL6111C	2726	30MHz~1GHz	Nov. 20, 2008	Nov. 19, 2009	Radiation (03CH07-HY)
Spectrum Analyzer	R&S	FSP	101067	9kHz~30GHz	Dec. 02, 2008	Dec. 01, 2009	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	75962	1G~18GHz	Aug. 13, 2008	Aug. 12, 2009	Radiation (03CH07-HY)
Pre Amplifier	Agilent	8449B	3008A02362	1G~26.5GHz	Dec. 17, 2008	Dec. 16, 2009	Radiation (03CH07-HY)
Pre Amplifier	COM-POWER	PA-103A	161241	10~1000MHz. 32dB.GAIN	Mar. 31, 2008	Mar. 30, 2009	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	66584	1G~18GHz	Aug. 06, 2008	Aug. 05, 2009	Radiation (03CH07-HY)
System Simulator	R&S	CMU200	116457	N/A	Jun. 04, 2008	Jun. 03, 2009	Radiation (03CH07-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz~30 MHz	May 22, 2008	May 21, 2010	Radiation (03CH07-HY)



## 5 Uncertainty of Evaluation

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Contribution	Uncertainty of $x_i$		$u(x_i)$
	dB	Probability Distribution	
Receiver reading	0.41	Normal(k=2)	0.21
Antenna factor calibration	0.83	Normal(k=2)	0.42
Cable loss calibration	0.25	Normal(k=2)	0.13
Pre Amplifier Gain calibration	0.27	Normal(k=2)	0.14
RCV/SPA specification	2.50	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1.00	Rectangular	0.29
Site imperfection	1.43	Rectangular	0.83
Mismatch	+0.39/-0.41	U-shaped	0.28
<b>Combined standard uncertainty <math>U_c(y)</math></b>	<b>1.27</b>		
<b>Measuring uncertainty for a level of confidence of 95% <math>U=2U_c(y)</math></b>	<b>2.54</b>		

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Contribution	Uncertainty of $x_i$		$u(x_i)$	$Ci$	$Ci * u(x_i)$
	dB	Probability Distribution			
Receiver reading	±0.10	Normal(k=1)	0.10	1	0.10
Antenna factor calibration	±1.70	Normal(k=2)	0.85	1	0.85
Cable loss calibration	±0.50	Normal(k=2)	0.25	1	0.25
Receiver Correction	±2.00	Rectangular	1.15	1	1.15
Antenna Factor Directional	±1.50	Rectangular	0.87	1	0.87
Site imperfection	±2.80	Triangular	1.14	1	1.14
Mismatch Receiver VSWR $\Gamma 1 = 0.197$ Antenna VSWR $\Gamma 2 = 0.194$ Uncertainty=20log(1- $\Gamma 1 * \Gamma 2$ )	+0.34/-0.35	U-shaped	0.244	1	0.244
<b>Combined standard uncertainty <math>U_c(y)</math></b>	<b>2.36</b>				
<b>Measuring uncertainty for a level of confidence of 95% <math>U=2U_c(y)</math></b>	<b>4.72</b>				



## 6 Certification of TAF Accreditation



Certificate No. : L1190-081212

財團法人全國認證基金會  
Taiwan Accreditation Foundation

### Certificate of Accreditation

This is to certify that

**Sporton International Inc.**  
**EMC & Wireless Communications Laboratory**  
No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,  
Taiwan, R.O.C.

**is accredited in respect of laboratory**

**Accreditation Criteria** : ISO/IEC 17025:2005  
**Accreditation Number** : 1190  
**Originally Accredited** : December 15, 2003  
**Effective Period** : January 10, 2007 to January 09, 2010  
**Accredited Scope** : Testing Field, see described in the Appendix  
**Specific Accreditation Program** : Accreditation Program for Designated Testing Laboratory  
for Commodities Inspection  
Accreditation Program for Telecommunication Equipment  
Testing Laboratory  
Accreditation Program for BSMI Mutual Recognition  
Arrangement with Foreign Authorities

Jay-San Chen  
President, Taiwan Accreditation Foundation  
Date : December 12, 2008

PI, total 18 pages

The Appendix forms an integral part of this Certificate, which shall be invalid when use without the Appendix



## **Appendix A. Photographs of EUT**

Please refer to Sporton report number EP930208 as below.