

TTE Technology, Inc. (dba TCL North America)

TEST REPORT

SCOPE OF WORK

FCC TESTING—55S425, 55S421, 55S4, 55S423, 55S427, 55S425-MX, 55S427-MX, 55S425-CA, 55S427-CA, 55S4followed by one character; may be followed by -MX or -CA.

REPORT NUMBER

180822006SZN-001

ISSUE DATE

[REVISED DATE]

03 September 2018

[-----]

PAGES

37

DOCUMENT CONTROL NUMBER

FCC ID JBP_B

© 2017 INTERTEK



TTE Technology, Inc. (dba TCL North America)

Application
For
Certification
FCC ID: W8U55S421

LED TV

Model: 55S425

**Additional Models: 55S421, 55S4, 55S423, 55S427, 55S425-MX,
55S427-MX, 55S425-CA, 55S427-CA, 55S4followed by one character;
may be followed by -MX or -CA.**

Brand Name: TCL

Computer Peripheral

Report No.: 180822006SZN-001

Prepared and Checked by:

Ryan Chen
Engineer

Approved by:

Kidd Yang
Technical Supervisor
Date: 03 September 2018

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Intertek Testing Service Shenzhen Ltd. Longhua Branch

1F/2F, Building B, QiaoAn Scientific Technology Park, Shangkeng Community, Guanhua Subdistrict, Longhua District, Shenzhen, P.R. China.
Tel: (86 755) 8601 6288 Fax: (86 755) 8601 6751

LIST OF EXHIBITS***INTRODUCTION***

<i>EXHIBIT 1:</i>	General Description
<i>EXHIBIT 2:</i>	System Test Configuration
<i>EXHIBIT 3:</i>	Emission Results
<i>EXHIBIT 4:</i>	Equipment Photographs
<i>EXHIBIT 5:</i>	Product Labeling
<i>EXHIBIT 6:</i>	Technical Specifications
<i>EXHIBIT 7:</i>	Instruction Manual
<i>EXHIBIT 8:</i>	Miscellaneous Information
<i>EXHIBIT 9:</i>	Test Equipment List

MEASUREMENT / TECHNICAL REPORT

TTE Technology, Inc. (dba TCL North America)

MODEL: 55S425

Additional Models: 55S421, 55S4, 55S423, 55S427, 55S425-MX, 55S427-MX, 55S425-CA, 55S427-CA, 55S4followed by one character; may be followed by -MX or -CA.

FCC ID: W8U55S421

This report concerns (check one): Original Grant Class II Change _____

Equipment Type: JBP-Class B Computing Device Peripheral

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)? Yes _____ No _____ X

If yes, defer until: _____
date

Company Name agrees to notify the Commission by: _____
date

of the intended date of announcement of the product so that the grant can be issued on
that date.

Transition Rules Request per 15.37? Yes _____ No _____ X

If no, assumed Part 15, Subpart B for unintentional radiator – the new 47 CFR [10-01-17
Edition] provision.

Report prepared by:

Ryan Chen
Intertek Testing Services Shenzhen Ltd.
Longhua Branch
1F/2F, Building B, QiaoAn Scientific
Technology Park, Shangkeng Community,
Guanhu Subdistrict, Longhua District,
Shenzhen, P.R. China
Phone: 86-20-8614 0682
Fax: 86-20-3205 7538

Table of Contents

1.0 General Description	7
1.1 Product Description.....	7
1.2 Related Submittal(s) Grants	7
1.3 Test Methodology.....	8
1.4 Test Facility	8
2.0 System Test Configuration	10
2.1 Justification	10
2.2 EUT Exercising Software	10
2.3 Special Accessories	10
2.4 Equipment Modification.....	10
2.5 Measurement Uncertainty	11
2.6 Support Equipment List and Description	11
3.0 Emission Results	13
3.1 Field Strength Calculation	14
3.2 Field Strength Calculation (cont'd)	15
3.3 Radiated Emission Configuration Photograph	16
3.4 Radiated Emission Data.....	17
3.5 Conducted Emission at Mains Terminal.....	20
3.6 Conducted Emission Data.....	21
4.0 Equipment Photographs	25
5.0 Product Labelling	27
6.0 Technical Specifications	29
7.0 Instruction Manual	31
8.0 Miscellaneous Information	33
8.1 Emissions Test Procedures	34
8.2 Emissions Test Procedures (cont'd).....	35
9.0 Test Equipment List	37

List of attached files

Exhibit Type	File Description	Filename
Test Report	Test Report	report.pdf
Test Setup Photo	Radiated photos	radiated photos.pdf
Test Setup Photo	Conducted photos	conducted photos.pdf
External Photo	External Photos	external photos.pdf
Internal Photo	Internal Photos	internal photos.pdf
Block Diagram	Block Diagram	block.pdf
ID Label / Location	Label Artwork and Location	label.pdf
User Manual	User Manual	manual.pdf
Cover Letter	Confidential Letter	request.pdf
Cover Letter	Letter of Agency	agency.pdf



Total Quality. Assured.

Test Report

Intertek Report No.: 180822006SZN-001

EXHIBIT 1

GENERAL DESCRIPTION

1.0 General Description

1.1 Product Description

The Equipment Under Test (EUT) is a LED TV. The device can be used to connect PC by HDMI port. The EUT is powered by AC 120V, 60Hz.

The EUT contains a module which can be operated in the frequency band of 2412MHz to 2462MHz in 802.11b, 802.11g and 802.11n-HT20 modes, 2422MHz to 2452MHz in 802.11n-HT40 mode, and 5180MHz to 5240MHz, 5745MHz to 5825MHz in 802.11a, 802.11n (20MHz, 40MHz) and 11ac (80MHz) modes.

The Model: 55S421, 55S4, 55S423, 55S427, 55S425-MX, 55S427-MX, 55S425-CA, 55S427-CA, 55S4 followed by one character; may be followed by -MX or -CA. are the same as the Model: 55S425 in hardware aspect. The models are difference in packaging and marketing purpose only.

1.2 Related Submittal(s) Grants

This is an application for certification of a computer peripheral. Other digital functions were reported in the verification report: 180822006SZN-002.

The host contains a WIFI module, which has been granted under the FCC ID: 2AC23-WC0HR2601.

1.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.4 (2014). Radiated emission measurement was performed in Semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Justification Section**" of this Application.

1.4 Test Facility

The Semi-anechoic chamber and shielding room used to collect the radiated data and conducted data are **Intertek Testing Services Shenzhen Ltd. Longhua Branch** and located at 1F/2F, Building B, QiaoAn Scientific Technology Park, Shangkeng Community, Guanhu Subdistrict, Longhua District, Shenzhen, P.R. China. This test facility and site measurement data have been fully placed on file with the FCC (Registration Number: CN1188).

EXHIBIT 2**SYSTEM TEST CONFIGURATION**

2.0 System Test Configuration

2.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.4 (2014).

The device was powered by AC 120V/60Hz during the test. The host device contains a Wi-Fi module which was installed and operating during the test, and only the worst-case data was reported in this report.

For maximizing emissions, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. The step by step procedure for maximizing emissions led to the data reported in Exhibit 3.0.

The rear of unit shall be flushed with the rear of the table.

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT was placed on turn table, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes.

The frequency ranges from 30MHz to 29.125GHz was searched for spurious emissions from the device. Only those emissions reported were detected. All other emissions were at least 20 dB below the applicable limits.

2.2 EUT Exercising Software

N/A

2.3 Special Accessories

N/A

2.4 Equipment Modification

Any modifications installed previous to testing by TTE Technology, Inc. (dba TCL North America) will be incorporated in each production model sold / leased in the United States.

No modifications were installed by Intertek Testing Services Shenzhen Ltd. Longhua Branch.

2.5 Measurement Uncertainty

When determining the test conclusion, the Measurement Uncertainty of test has been considered.

2.6 Support Equipment List and Description

This product was tested in the following configuration:

Refer List:

Description	Manufacturer	Model No.
Laptop	HP	Compaq 2510p
Hard Disk	Smart.drive	HD-003
USB Cable	Smart.drive	Unshielded, Length 155cm
USB Memory	SanDisk	SDCZ36-002G-P36
Dummy Load	N/A	N/A
HDMI Cable*3	N/A	Unshielded, Length 180cm
AV Cable Adapter	N/A	Unshielded, Length 15cm
AV Cable	N/A	Unshielded, Length 120cm
Tuner Resister	N/A	75ohm
Remote controller	TCL	N/A
Headphone	Sony	Unshielded, Length 110cm
Coaxial cable	/	Shielded, Length 500cm
Optical cable	/	Unshielded, Length 130cm
RJ45 Cable	N/A	Unshielded, Length 450cm



Total Quality. Assured.

Test Report

Intertek Report No.: 180822006SZN-001

EXHIBIT 3
EMISSION RESULTS

3.0 Emission Results

Data is included worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

3.1 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG$$

where FS = Field Strength in $\text{dB}\mu\text{V}/\text{m}$

RA = Receiver Amplitude (including preamplifier) in $\text{dB}\mu\text{V}$

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB/m

AG = Amplifier Gain in dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG$$

3.2 Field Strength Calculation (cont'd)**Example**

Assume a receiver reading of 62.0dB μ V is obtained. The antenna factor of 7.4dB/m and cable factor of 1.6dB is added. The amplifier gain of 29dB is subtracted. The net field strength for comparison to the appropriate emission limit is 42dB μ V/m. This value in dB μ V/m was converted to its corresponding level in μ V/m.

$$RA = 62.0\text{dB}\mu\text{V}$$

$$AF = 7.4\text{dB/m}$$

$$CF = 1.6\text{dB}$$

$$AG = 29.0\text{dB}$$

$$FS = 62 + 7.4 + 1.6 - 29 = 42\text{dB}\mu\text{V/m}$$

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(42\text{dB}\mu\text{V/m})/20] = 125.9\mu\text{V/m}$$

3.3 Radiated Emission Configuration Photograph

Worst Case Radiated Emission
At
76MHz (HDMI In (4K) Mode)

For electronic filing, the worst case radiated emission configuration photograph is saved with filename: radiated photos.pdf.

3.4 Radiated Emission Data

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Judgement: Passed by 3.4dB margin (HDMI In (4K) Mode)

TEST PERSONNEL:

Sign on file

Ryan Chen, Engineer
Typed/Printed Name

28 August 2018
Date

Applicant: TTE Technology, Inc. (dba TCL North America)
 Date of Test: 28 August 2018 Model: 55S425
 Worst Case Operating Mode: HDMI In (4K)

Table 1**Radiated Emissions****Below 1GHz**

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	75.1	46.2	20.0	7.6	33.8	43.5	-9.7
Horizontal	190.0	47.1	20.0	10.0	37.1	46.0	-8.9
Horizontal	890.2	36.4	20.0	23.4	39.8	46.0	-6.2
Vertical	76.0	49.0	20.0	7.6	36.6	40.0	-3.4
Vertical	188.1	47.2	20.0	10.1	37.3	43.5	-6.2
Vertical	890.4	33.9	20.0	23.4	37.3	46.0	-8.7

Above 1GHz

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Limit at 3m (dB μ V/m)	Margin (dB)	Detector
Horizontal	1592.3	76.9	36.6	24.7	65.0	74.0	-9.0	PK
Horizontal	2076.7	61.3	36.3	28.4	53.4	74.0	-20.6	PK
Horizontal	3167.8	66.8	36.4	29.0	59.4	74.0	-14.6	PK
Horizontal	1592.3	58.7	36.6	24.7	46.8	54.0	-7.2	AV
Horizontal	2076.7	51.1	36.3	28.4	43.2	54.0	-10.8	AV
Horizontal	3167.8	51.9	36.4	29.0	44.5	54.0	-9.5	AV
Vertical	1591.2	76.4	36.3	24.7	64.8	74.0	-9.2	PK
Vertical	2076.7	60.0	36.5	28.4	51.9	74.0	-22.1	PK
Vertical	3167.8	64.2	36.4	28.9	56.7	74.0	-17.3	PK
Vertical	1591.2	57.2	36.3	24.7	45.6	54.0	-8.4	AV
Vertical	2076.7	49.4	36.5	28.4	41.3	54.0	-12.7	AV
Vertical	3167.8	51.3	36.4	28.9	43.8	54.0	-10.2	AV

NOTES:

1. Quasi-Peak detector is used for frequency up to 1GHz, Peak detector and Average detector are used for frequency from 1GHz to 29.125GHz.
2. All measurements were made at 3 meters.
3. Negative value in the margin column shows emission below limit.
4. All other emissions were at least 20 dB below the applicable limits.

Test Engineer: Ryan Chen

3.5 Conducted Emission at Mains Terminal

3.5.1 Conducted Emission Configuration Photograph

Worst Case Conducted Configuration
at
0.186 MHz (HDMI In Mode)

For electronic filing, the worst case conducted emission configuration photograph is saved with filename: conducted photos.pdf.

3.6 Conducted Emission Data

Judgement: Passed by 8.1 dB margin(HDMI In Mode)

TEST PERSONNEL:

Sign on file

Ryan Chen, Engineer
Typed/Printed Name

23 August 2018
Date

Test Report

Intertek Report No.: 180822006SZN-001

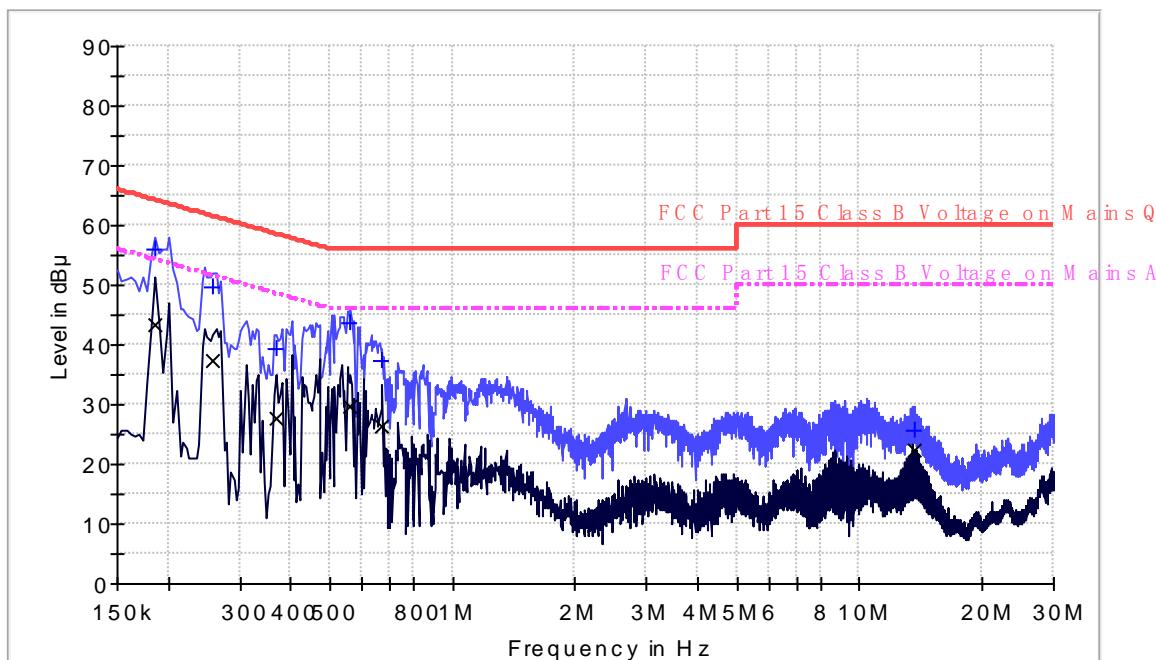
Company: TTE Technology, Inc. (dba TCL North America)

Date of Test: 23 August 2018

Model: 55S425

Operating Mode: HDMI in with antenna grounded

Phase: Live

Conducted Emission Test - FCC**Result Table QP**

Frequency (MHz)	QuasiPeak (dB μ V)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.186000	56.1	L1	9.7	8.1	64.2
0.258000	49.6	L1	9.7	11.9	61.5
0.370000	39.4	L1	9.7	19.1	58.5
0.562000	43.7	L1	9.7	12.3	56.0
0.670000	37.5	L1	9.7	18.5	56.0
13.630000	25.8	L1	10.0	34.2	60.0

Result Table AV

Frequency (MHz)	Average (dB μ V)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.186000	43.2	L1	9.7	11.0	54.2
0.258000	37.3	L1	9.7	14.2	51.5
0.370000	27.5	L1	9.7	21.0	48.5
0.562000	29.6	L1	9.7	16.4	46.0
0.670000	26.2	L1	9.7	19.8	46.0
13.630000	22.3	L1	10.0	27.7	50.0

Test Engineer: Ryan Chen

Test Report

Intertek Report No.: 180822006SZN-001

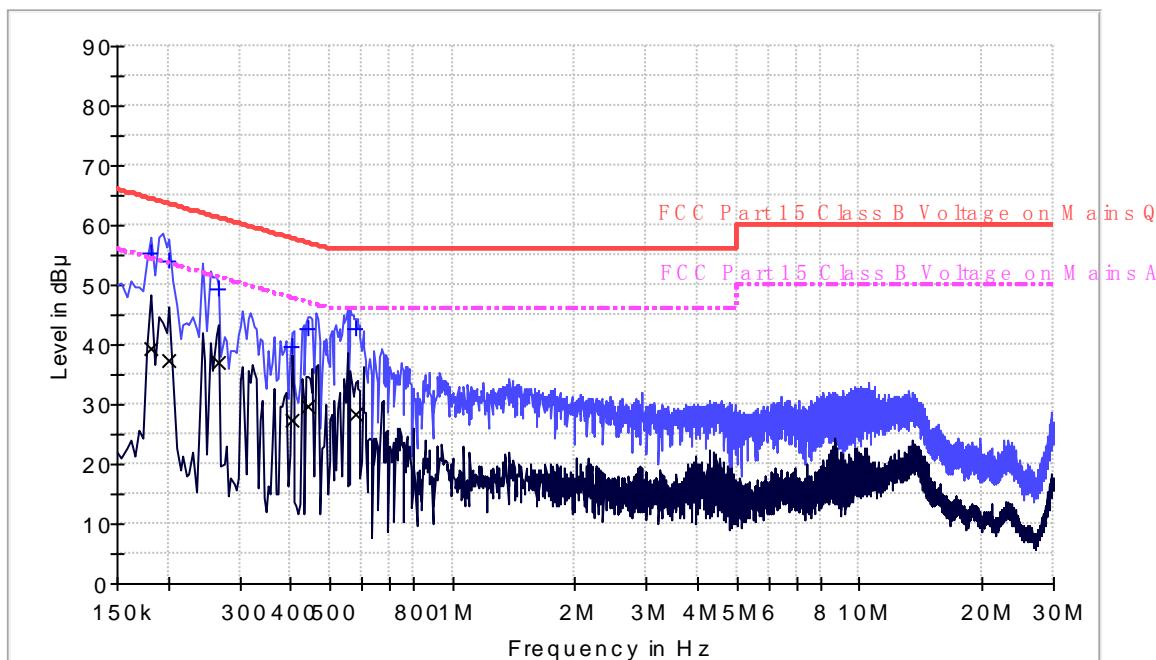
Company: TTE Technology, Inc. (dba TCL North America)

Date of Test: 23 August 2018

Model: 55S425

Operating Mode: HDMI in with antenna grounded

Phase: Neutral

Conducted Emission Test - FCC**Result Table QP**

Frequency (MHz)	QuasiPeak (dB μ V)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.182000	55.2	N	9.7	9.2	64.4
0.202000	54.0	N	9.7	9.5	63.5
0.266000	49.4	N	9.7	11.8	61.2
0.402000	39.8	N	9.7	18.0	57.8
0.442000	42.5	N	9.7	14.5	57.0
0.578000	42.7	N	9.7	13.3	56.0

Result Table AV

Frequency (MHz)	Average (dB μ V)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.182000	39.4	N	9.7	15.0	54.4
0.202000	37.4	N	9.7	16.1	53.5
0.266000	37.0	N	9.7	14.2	51.2
0.402000	27.5	N	9.7	20.3	47.8
0.442000	29.8	N	9.7	17.2	47.0
0.578000	28.5	N	9.7	17.5	46.0

Test Engineer: Ryan Chen

EXHIBIT 4**EQUIPMENT PHOTOGRAPHS**

4.0 Equipment Photographs

For electronic filing, photographs of the tested EUT are saved with filename: external photos.pdf and internal photos.pdf.



Total Quality. Assured.

Test Report

Intertek Report No.: 180822006SZN-001

EXHIBIT 5

PRODUCT LABELLING

5.0 Product Labelling

For electronics filing, the FCC ID label artwork and the label location are saved with filename: label.pdf.



Total Quality. Assured.

Test Report

Intertek Report No.: 180822006SZN-001

EXHIBIT 6

TECHNICAL SPECIFICATIONS

6.0 Technical Specifications

For electronic filing, the block diagram of the tested EUT is saved with filename: block.pdf.



Total Quality. Assured.

Test Report

Intertek Report No.: 180822006SZN-001

EXHIBIT 7

INSTRUCTION MANUAL

7.0 Instruction Manual

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold / leased in the United States.



Total Quality. Assured.

Test Report

Intertek Report No.: 180822006SZN-001

EXHIBIT 8

MISCELLANEOUS INFORMATION

8.0 Miscellaneous Information

This miscellaneous information includes emission measuring procedure.

8.1 Emissions Test Procedures

The following is a description of the test procedure used by Intertek Testing Services in the measurements of computer peripheral operating under Part 15, Subpart B rules.

The test set-up and procedures described below are designed to meet the requirements of ANSI C63.4 – 2014.

The computer peripheral equipment under test (EUT) is placed on a styrene turntable which is four feet in diameter and approximately 0.8 meter in height above the ground plane. During the radiated emissions test, the turntable is rotated and any cables leaving the EUT are manipulated to find the configuration resulting in maximum emissions. The antenna height and polarization are varied during the testing to search for maximum signal levels. The height of the antenna is varied from one to four meters.

Detector function for radiated emissions are in QP mode from the frequency band 30MHz to 1GHz with RBW setting 120kHz and in PK & AV mode from frequency band 1GHz to 29.125GHz with RBW setting 1MHz. Detector function for conducted emissions are in QP & AV mode and IFBW setting is 9kHz from the frequency band 150kHz to 30MHz.

For radiated emission, the frequency range scanned is 30MHz to 29.125GHz. For line-conducted emissions, the range scanned is 150kHz to 30MHz with RBW setting 9KHz.

8.2 Emissions Test Procedures (cont'd)

The EUT is warmed up for 15 minutes prior to the test.

Conducted measurements are made as described in ANSI C63.4 – 2014.



Total Quality. Assured.

Test Report

Intertek Report No.: 180822006SZN-001

EXHIBIT 9

TEST EQUIPMENT LIST

9.0 Test Equipment List

Equipment No.	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
SZ061-12	Biconilog Antenna	ETS	3142E	001661 58	20-Sep-2017	20-Sep-2018
SZ061-08	Horn Antenna	ETS	3115	000923 46	20-Sep-2017	20-Sep-2018
SZ061-07	Pyramidal Horn Antenna	ETS	3160-09	000830 67	17-Mar-2018	17-Mar-2019
SZ056-03	Spectrum Analyzer	R&S	FSP30	101148	05-Jun-2018	05-Jun-2019
SZ185-01	EMI Receiver	R & S	ESCI	100547	24-Jan-2018	24-Jan-2019
SZ181-04	Preamplifier	Agilent	8449B	3008A0 2474	24-Jan-2018	24-Jan-2019
SZ188-01	Anechoic Chamber	ETS	RFD-F/A-100	4102	16-Jan-2017	16-Jan-2019
SZ062-02	RF Cable	RADIALL	RG 213U	--	02-Jul-2018	02-Jan-2019
SZ062-05	RF Cable	RADIALL	0.04-26.5GHz	--	06-Mar-2018	06-Sep-2018
SZ062-12	RF Cable	RADIALL	0.04-26.5GHz	--	06-Mar-2018	06-Sep-2018
SZ185-02	EMI Test Receiver	R&S	ESCI	100692	30-Oct-2017	30-Oct-2018
SZ187-01	Two-Line V-Network	R&S	ENV216	100072	30-Oct-2017	30-Oct-2018
SZ187-02	Two-Line V-Network	R&S	ENV216	100073	04-Jul-2018	04-Jul-2019
SZ188-03	Shielding Room	ETS	RFD-100	4100	16-Jan-2017	16-Jan-2019
SZ061-07	Pyramidal Horn Antenna	ETS	3160-09	000830 67	17-Mar-2018	17-Mar-2019
SZ062-16	RF Cable	HUBER+SUHNE R	CBL2-BN-1m	--	06-Mar-2018	06-Sep-2018

*****End of Report*****