


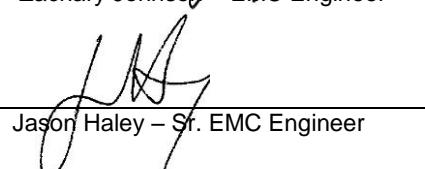

Test Report

CURTIS-STRAS Curtis-Straus LLC, a wholly owned subsidiary of BV CPS

Report No	ER3478-1
Client	Signal Fire Telemetry Josh Schadel
Address	43 Broad St, Suite A-403 Hudson, MA 01749
Phone	978-212-2869
Items tested	0129 500mW Radio
FCC ID	W8V-SFTS500
IC	8373A-SFTS500
FRN	0018614347
Equipment Type	Part 15 Spread Spectrum Transmitter
Equipment Code	DSS
FCC/IC Rule Parts	CFR Title 47 FCC 15.247, ISED Canada RSS-247 Issue 2
Test Dates	December 13 thru 20, 2017
Results	As detailed within this report
Prepared by	 Zachary Johnson – EMC Engineer
Authorized by	 Jason Haley – Sr. EMC Engineer
Issue Date	1/29/2018
Conditions of Issue	This Test Report is issued subject to the conditions stated in the 'Conditions of Testing' section on page 33 of this report.

Curtis-Straus LLC is accredited to ISO/IEC 17025 by A2LA for the specific scope of accreditation under Certificate Number 1627-01. This report may contain data which is not covered by the A2LA accreditation. See our scope of accreditation at the end of this test report. Any opinions or interpretations expressed in this report are outside the scope of our A2LA accreditation as A2LA only accredits testing.

Testing Cert. No. 1627-01

Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



page 1 of 34

Testing Cert. No. 1627-01

Contents

Contents.....	2
Summary.....	3
Test Methodology.....	4
Product Tested - Configuration Documentation	5
Statement of Conformity	6
Test Results	7
20dB Bandwidth.....	7
Channel Separation	9
Number of Channels	12
Dwell Time	14
Peak Output Power.....	16
Conducted Bandedges.....	18
Radiated Spurious Emissions	22
<i>Measurement Uncertainty</i>	32
Conditions Of Testing	33

Form Final Report REV 7-20-07 (DW)



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



page 2 of 34

Summary

This test report supports an application for certification of a transmitter operating pursuant to:
CFR Title 47 FCC 15.247, ISED Canada RSS-247 Issue 2

The 0129 500mW Radio is a frequency hopping transmitter that operates in the frequency range of 905-925MHz. It has two available external SMA antennas noted in the report as white antenna and black antenna with 5 dBi peak gain and 5.8dBi peak gain, respectively. It is powered by 3.6V DC Battery. Details on the two antennas are below:

Black antenna: San Jose Technology, ISM Antenna, Un-detachable Design, Model: EEH-915
White antenna: Signal Fire Telemetry, Outdoor 915 MHz Antenna, Model: SFTS 9-4

We found that the product met the above requirements without modification. The test sample was received in good condition.

Release Control Record

Issue No.	Reason for change	Date Issued
1	Original Release	January 29, 2018

Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



page 3 of 34

Test Methodology

All the testing was performed according to the following rules/procedures/documents; CFR Title 47 FCC 15.247, ISED Canada RSS-247 Issue 2, RSS-Gen Issue 4 and ANSI C63.10-2013.

Radiated emissions were maximized around 3 orthogonal planes. EUT antenna is integral and therefore could not be maximized separately.

Conducted emissions testing at the antenna port was performed.

AC mains conducted emissions testing was not performed since the device is battery powered only.

3 channels were tested as follows:

Low channel = 905 MHz

Middle channel = 915 MHz

High channel = 925 MHz

When hopping, the product was configured for the transmission to be either in the range of 905-914.8MHz (Low Band), or 915-924.8MHz (High Band) respectively.

Following bandwidths were used during radiated spurious emissions testing.

Frequency	RBW	VBW
30-1000MHz	120kHz	1MHz
1-10GHz	1MHz	3MHz



Product Tested - Configuration Documentation

EUT Configuration										
Work Order:	R3478									
Company:	Signal Fire Telemetry									
Company Address:	43 Broad St, Suite A-403									
	Hudson, MA, 01749									
Contact:	Josh Schadel									
EUT:	MN				PN				SN	
	0129 500mW Radio				--				Sample 1	
EUT Description:	SignalFire 500mW Radio Module									
EUT Max Frequency:	925 MHz									
EUT Min Frequency:	905 MHz									
Port Label	Port Type	# ports	# populated	cable type	shielded	ferrites	length (m)	in/out	under test	comment
~								in	yes	
Software Operating Mode Description:										
Tx test firmware										
Performance Criteria:										
Emissions only										

Clock Frequencies										
freqencies (MHz)	925, 915, 905									



Statement of Conformity

RSS-GEN	RSP-100	RSS 247	Part 15	Comments
6.3			15.15(b)	There are no controls accessible to the user that varies the output power to operate in violation of the regulatory requirements.
	3.1		15.19	The label is shown in the label exhibit.
	4		15.21	Information to the user is shown in the instruction manual exhibit.
			15.27	No special accessories are required for compliance.
3, 6.1			15.31	The EUT was tested in accordance with the measurement standards in this section.
6.13			15.33	Frequency range was investigated according to this section, unless noted in specific rule section under which the equipment operates.
8.1			15.35	The EUT emissions were measured using the measurement detector and bandwidth specified in this section, unless noted in specific rule section under which the equipment operates.
8.3			15.203	The antenna for this device is internal PCB chip antenna with 2dBi gain.
8.10			15.205 15.209	The fundamental is not in a Restricted band and the spurious and harmonic emissions in the Restricted bands comply with the general emission limits of 15.209 or RSS-Gen as applicable
8.8			15.207	The unit complies with the requirements of 15.207
			15.247	The unit complies with the requirements of 15.247
		RSS 247		The unit complies with the requirements of RSS-247
6.6				Occupied Bandwidth measurements were made.



Test Results

20dB Bandwidth


REQUIREMENT

15.247(a)(1)(i): The maximum allowed 20dB bandwidth of the hopping channel is 500kHz
 RSS-247 Issue 2 Section 5.1: The maximum 20 dB bandwidth of the hopping channel shall be 500 kHz.


MEASUREMENTS / RESULTS

20dB Bandwidth				
Date: 12/13/2017	Company: Signal Fire Telemetry	Work Order: R3478		
Engineer: Zac Johnson	EUT: 0129 500mW Radio	Operating Voltage/Frequency: 3.6V DC		
Temp: 20.8°C	Humidity: 30%	Pressure: 983mBar		
Frequency Range: 905-925 MHz	Measurement Type: Conducted			
	Measurement Method: FCC KDB 558074 D01 DTS Meas Guidance V04			
Notes:				
Frequency (MHz)	Reading (kHz)	20dB Bandwidth		
(MHz)	(kHz)	Limit (kHz)	Margin (kHz)	Result (Pass/Fail)
905	54.6	≥500	-445	Pass
915	54.7	≥500	-445	Pass
925	54.7	≥500	-445	Pass
Test Site: EMC-3 Analyzer: 118472 SA	Cable: 2289 Cbl	Attenuator: 2107 Pad		
		Copyright Curtis-Straus LLC 2000		


PLOTS

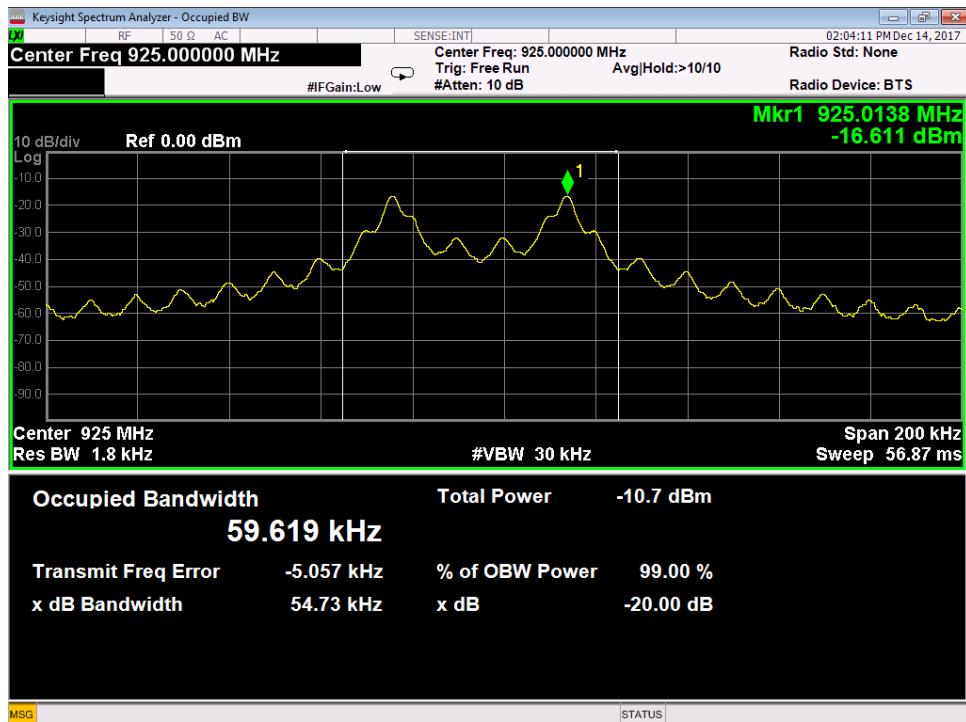

925MHz High Channel

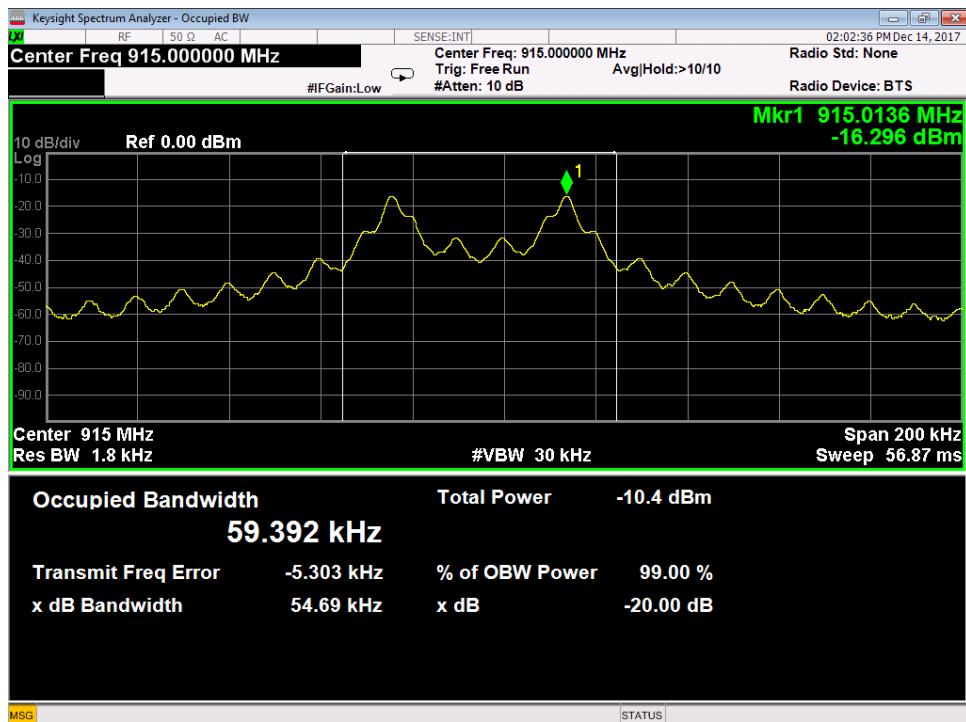

915MHz Mid Channel

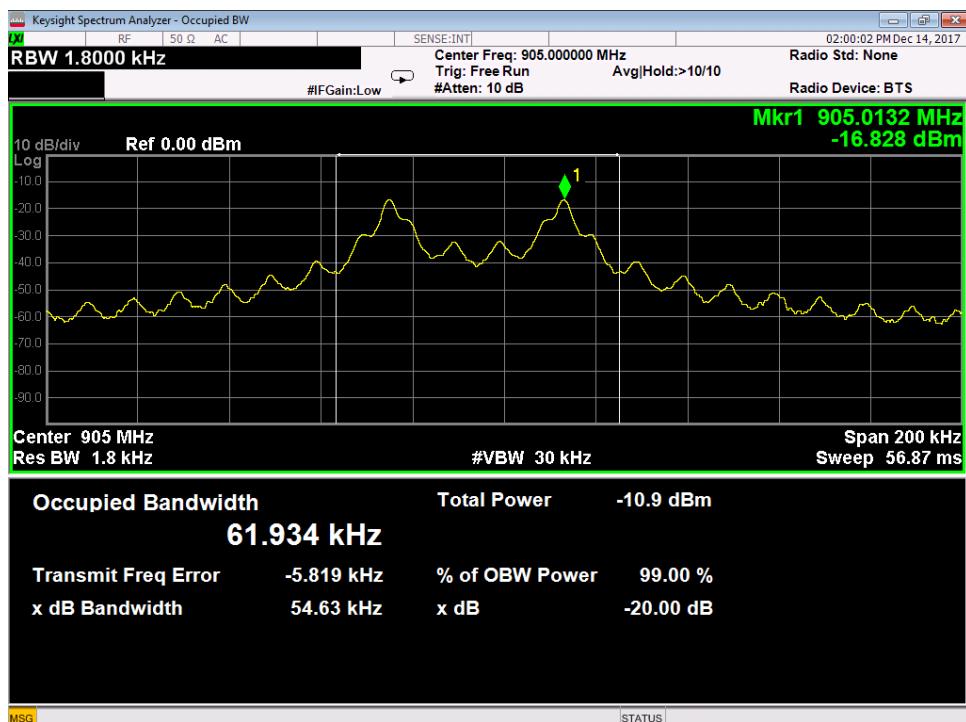

905MHz Low Channel




Channel Separation



Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. [15.247 (a) (1)]


MEASUREMENTS / RESULTS

Channels are spaced by 200kHz as seen in the following plots. This is higher than both 25kHz and the 20dB bandwidth of the product.

Plots

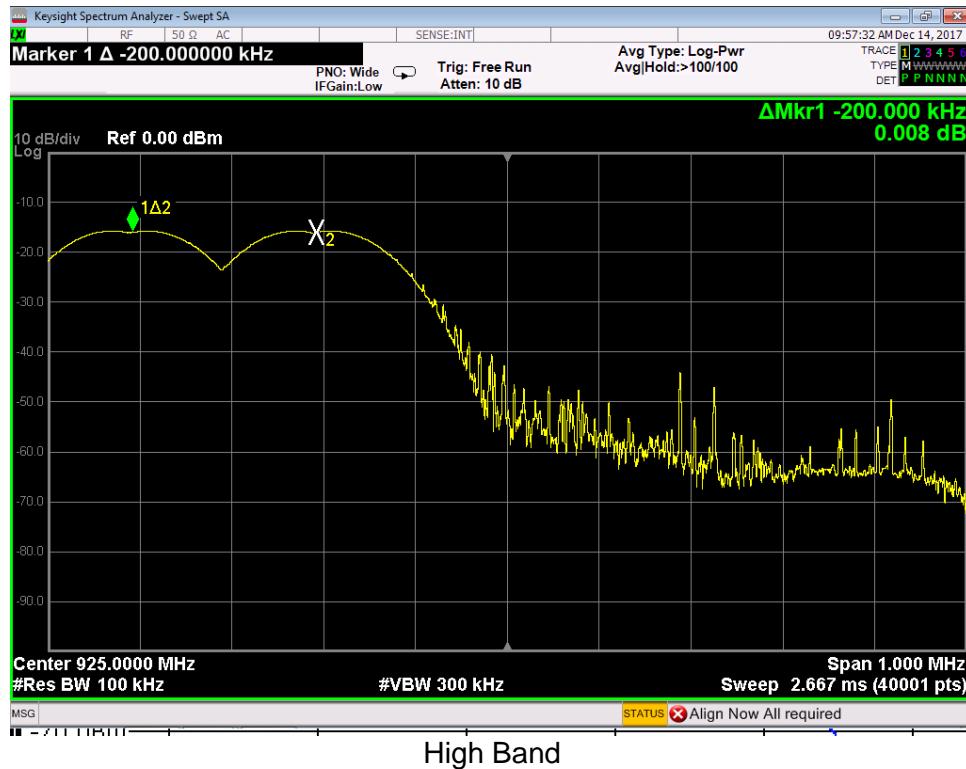

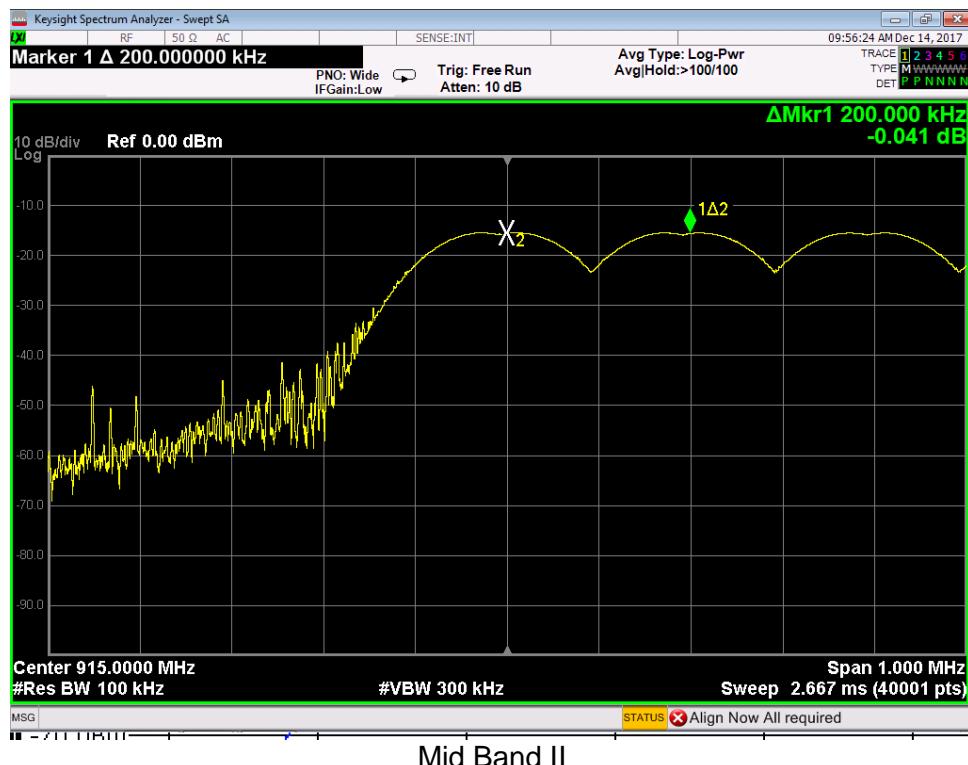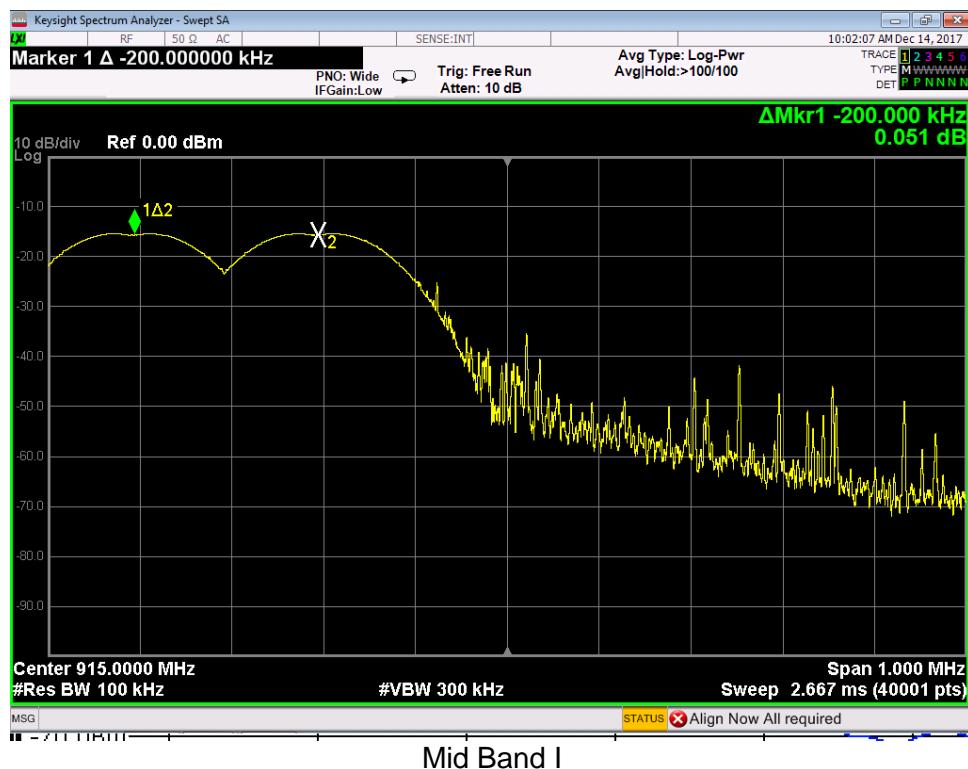

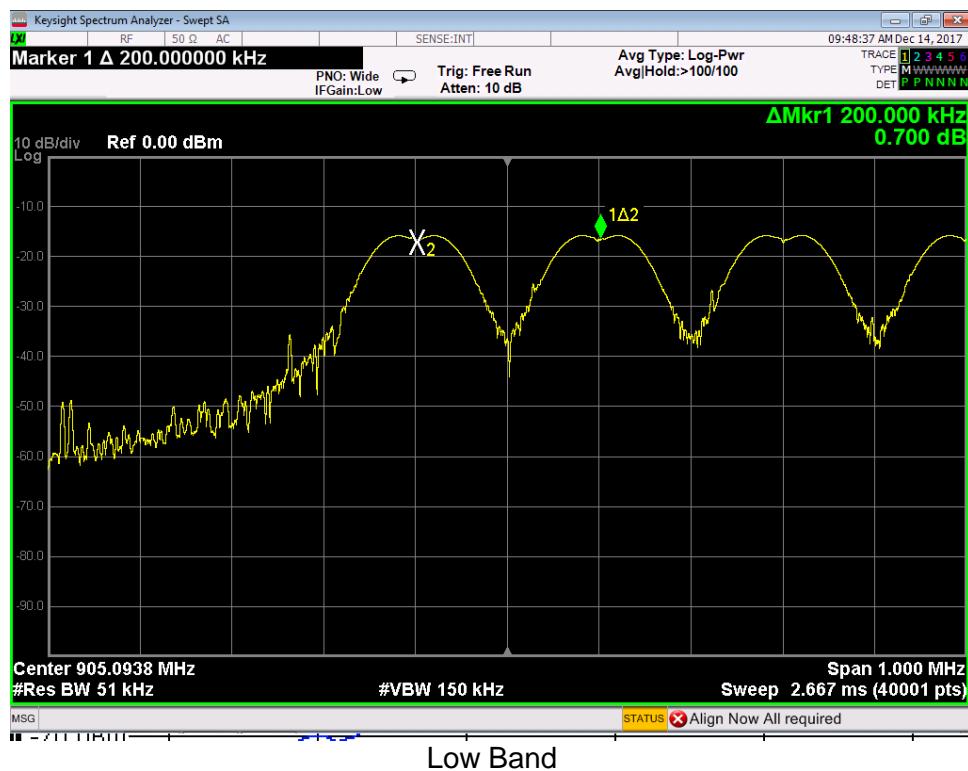


Number of Channels

For frequency hopping systems operating in the 902-928MHz band: if the 20dB bandwidth of the hopping channel is less than 250kHz, the system shall use at least 50 hopping frequencies [15.247 (a) (1) (i)]


MEASUREMENTS / RESULTS

PLOTS

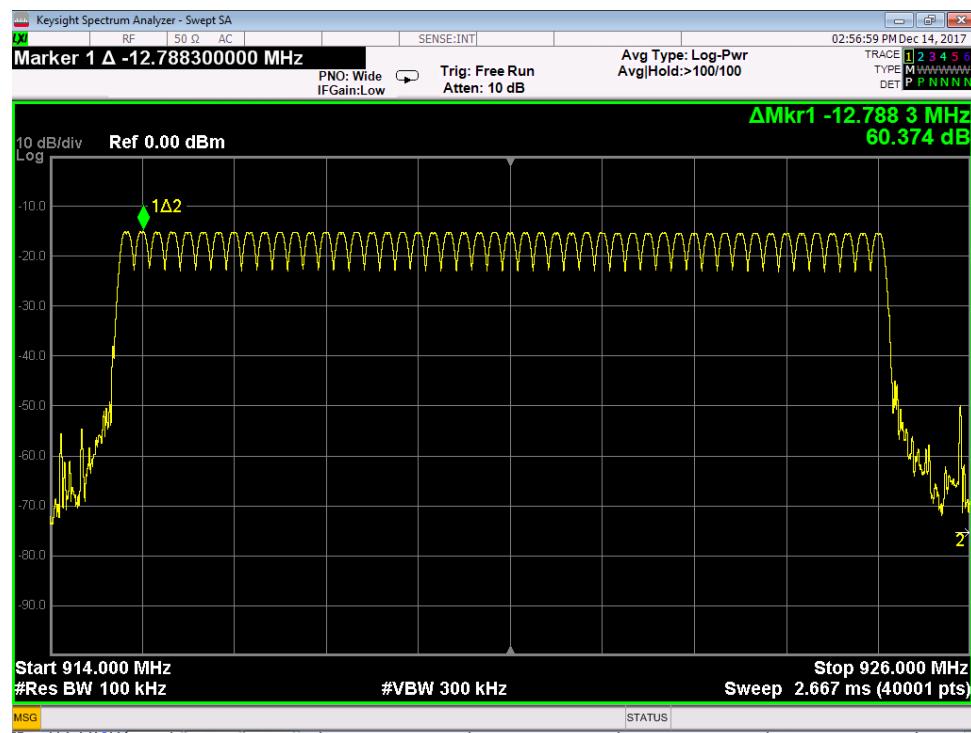

50 Channels – High Band



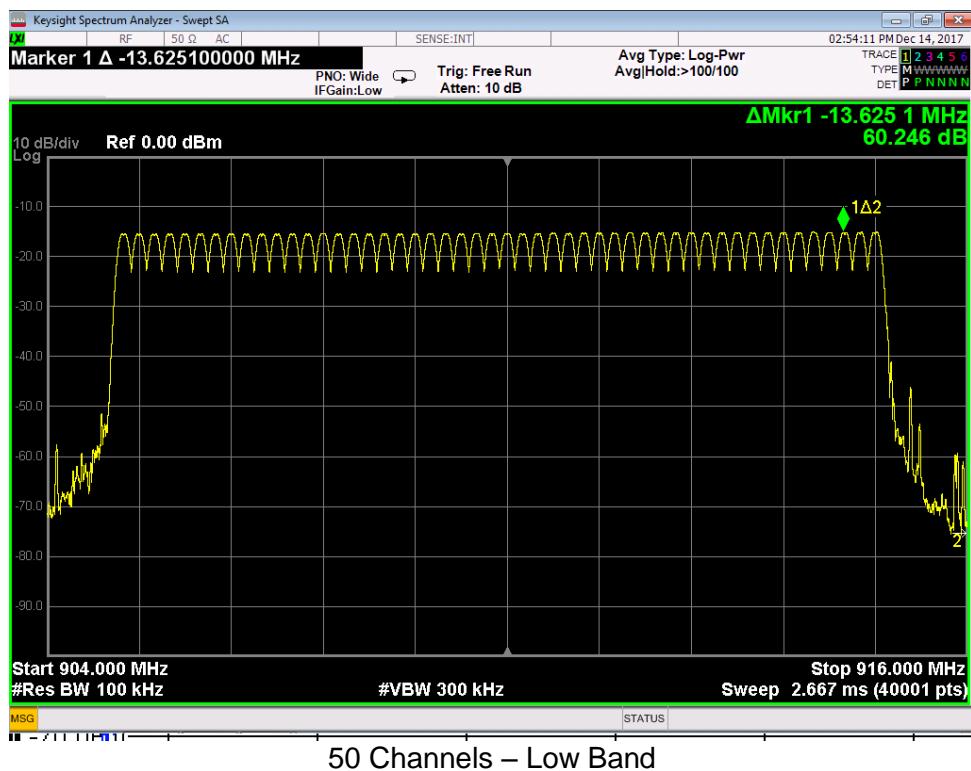


Dwell Time


For frequency hopping systems operating in the 902-928MHz band: if the 20dB bandwidth of the hopping channel is less than 250 kHz ...the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period;

[15.247 (a) (1) (i)]

MEASUREMENTS / RESULTS

Plots

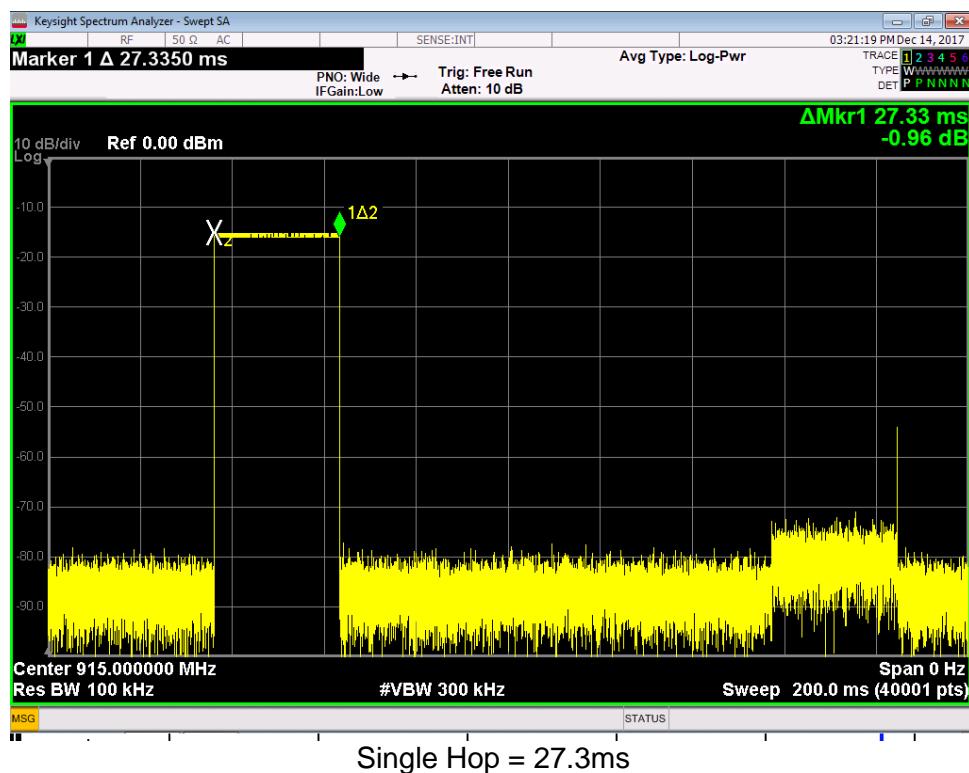

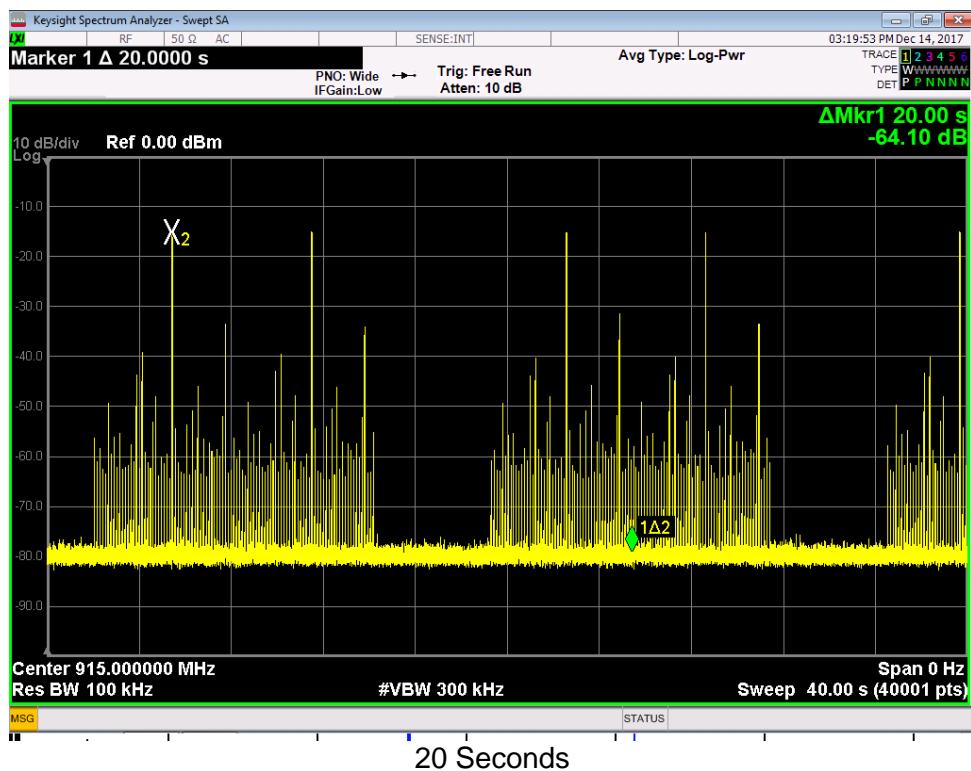

Dwell time in a 20sec period = $5 \times 27.3\text{ms} = 136.5\text{ms}$. Limit (maximum) = 400ms



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828

page 15 of 34



Peak Output Power


LIMIT

Conducted Output Power: 1 Watt [15.247(b) (2)]

MEASUREMENTS / RESULTS

Peak Output Power													
Date: 12/13/2017	Company: Signal Fire Telemetry		Work Order: R3478		Operating Voltage/Frequency: 3.6V DC								
Engineer: Zac Johnson	EUT: 0129 500mW Radio												
Temp: 20.8°C	Humidity: 30%		Pressure: 983mBar										
Frequency Range: 905-925 MHz		Measurement Type: Conducted											
Notes:													
Frequency	Peak Reading	Cable Loss	Attenuator Loss	Peak Output Power	Limit	Margin	Result						
(MHz)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dB)	(Pass/Fail)						
905	-16.7	0.28	40.0	23.58	30.0	-6.42	Pass						
915	-16.3	0.28	40.0	23.98	30.0	-6.02	Pass						
925	-16.6	0.28	40.0	23.68	30.0	-6.32	Pass						
Test Site: EMC-3		Cable: 2289 Cbl		Attenuator: 2107 Pad									
Analyzer: 118472 SA													
Peak Output Power (dBm)= Peak Reading (dBm) + Cable Loss (dB) + Attenuator Loss (dB)													

PLOTS

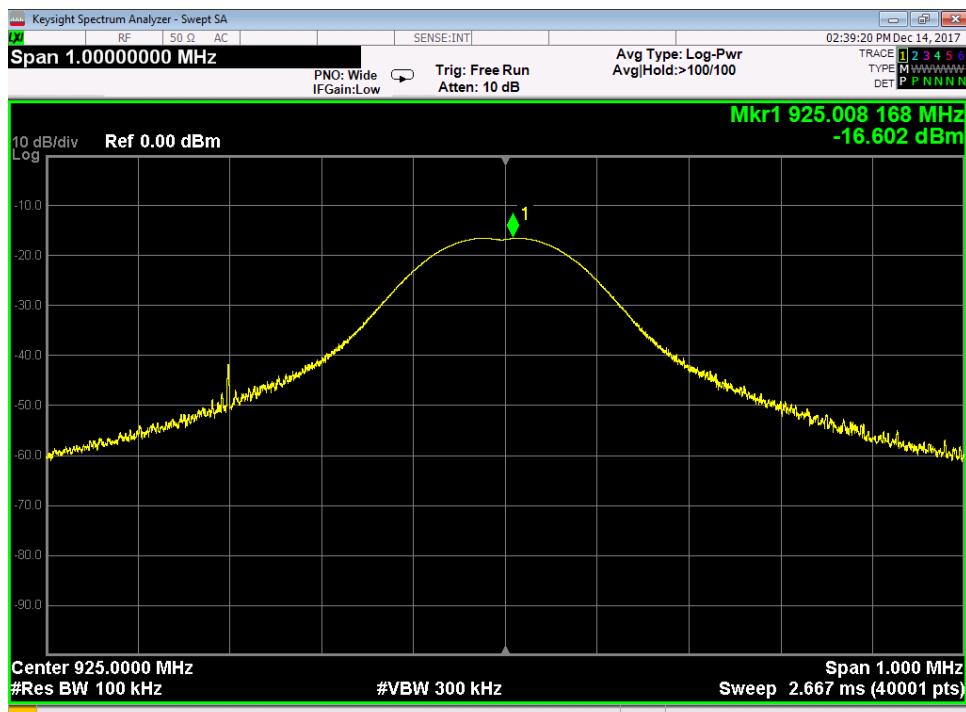

924.8MHz High Channel




Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
 One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828


page 16 of 34



Testing Cert. No. 1627-01

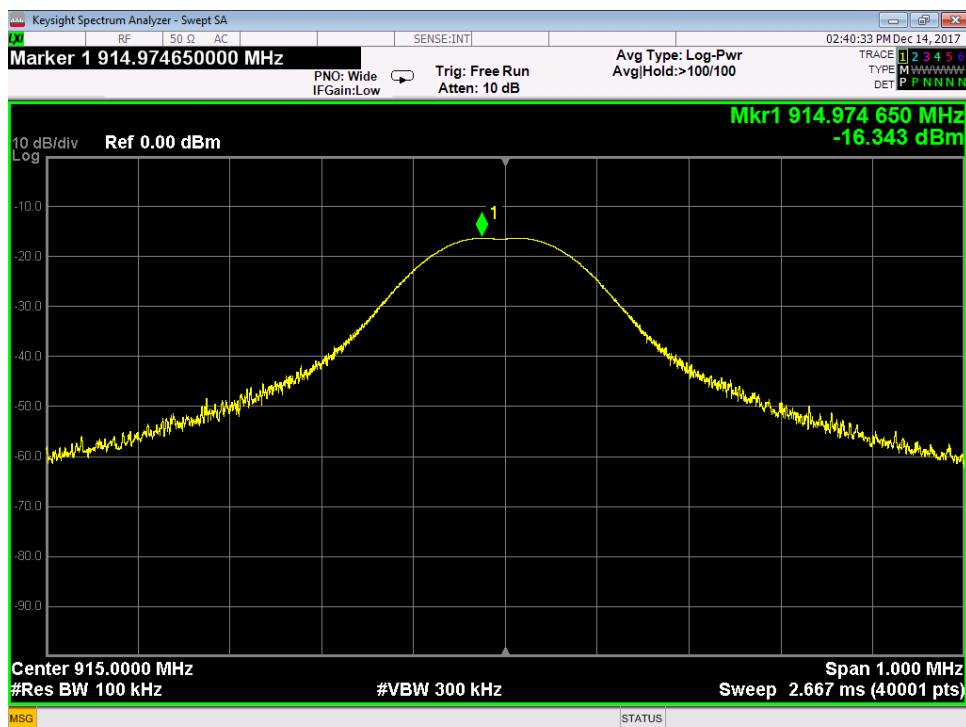

915MHz Mid Channel

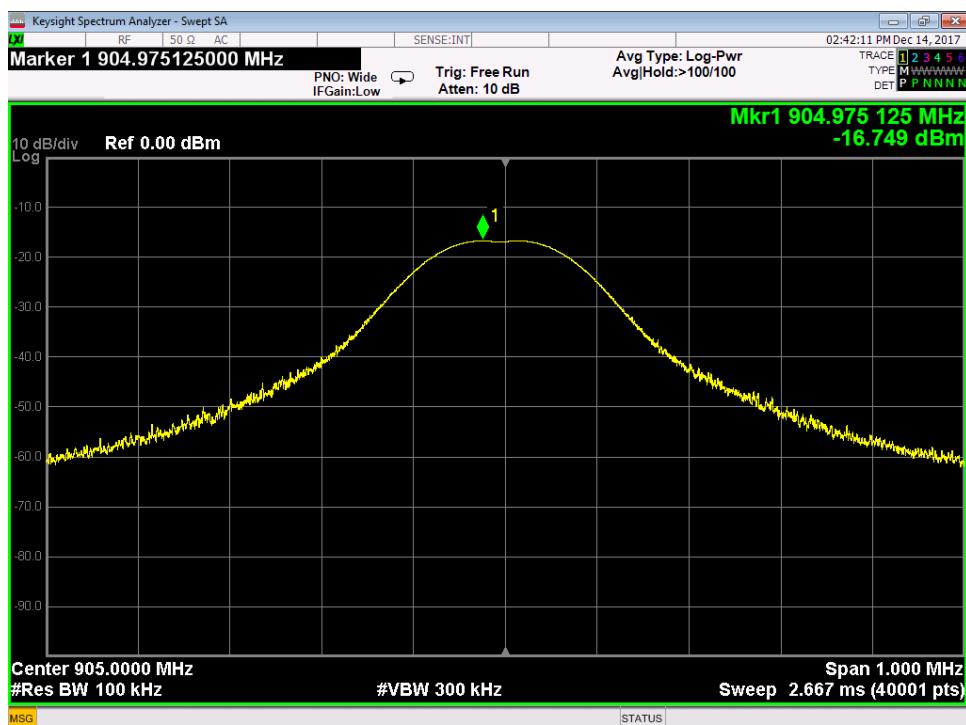


905MHz Low Channel




Conducted Bandedges


All band edges over 20dB from peak

Conducted Bandedge			
Date: 12/13/2017	Company: Signal Fire Telemetry	Work Order: R3478	
Engineer: Zac Johnson	EUT: 0129 500mW Radio	Operating Voltage/Frequency: 3.6V DC	
Temp: 20.8°C	Humidity: 30%	Pressure: 983mBar	
Frequency Range: 905-925 MHz	Measurement Type: Conducted		
	Measurement Method: FCC KDB 558074 D01 DTS Meas Guidance V04		
Notes:			
	Delta to Peak (dBm)	Limit (dB)	Limit (Pass/Fail)
Low Bandedge	57.19	≥ 20	Pass
High Bandedge	58.20	≥ 20	Pass
Low Bandedge Hopping	60.25	≥ 20	Pass
High Bandedge Hopping	61.70	≥ 20	Pass
Test Site: EMC-3	Cable: 2289 Cbl	Attenuator: 2107 Pad	
Analyzer: 118472 SA			Copyright Curtis-Straus LLC 2000

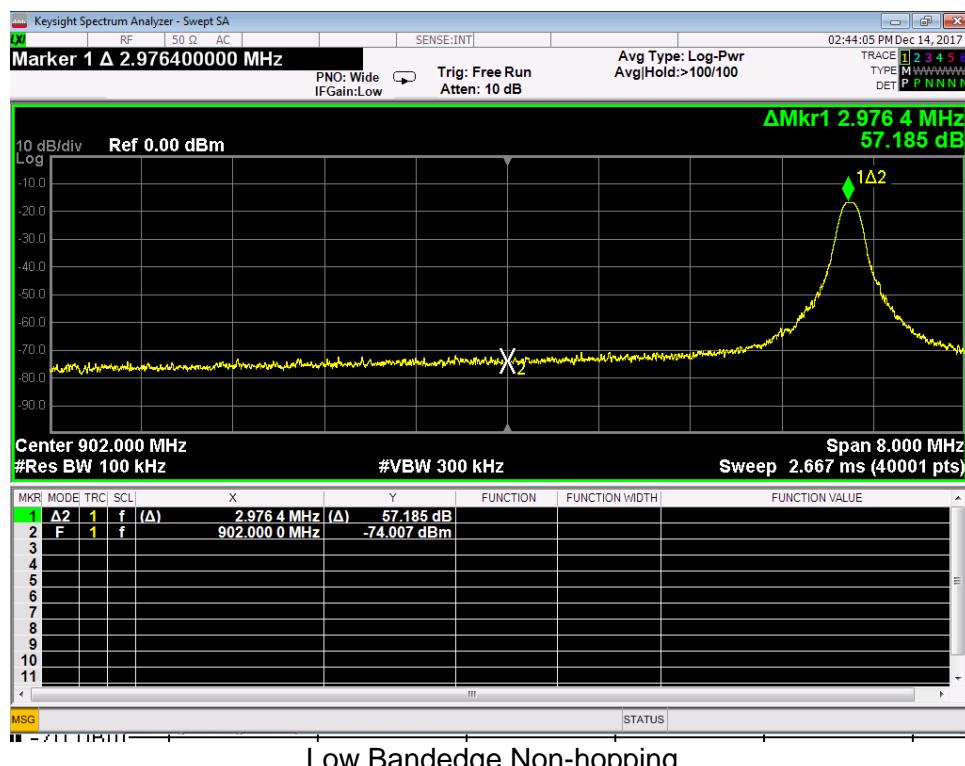

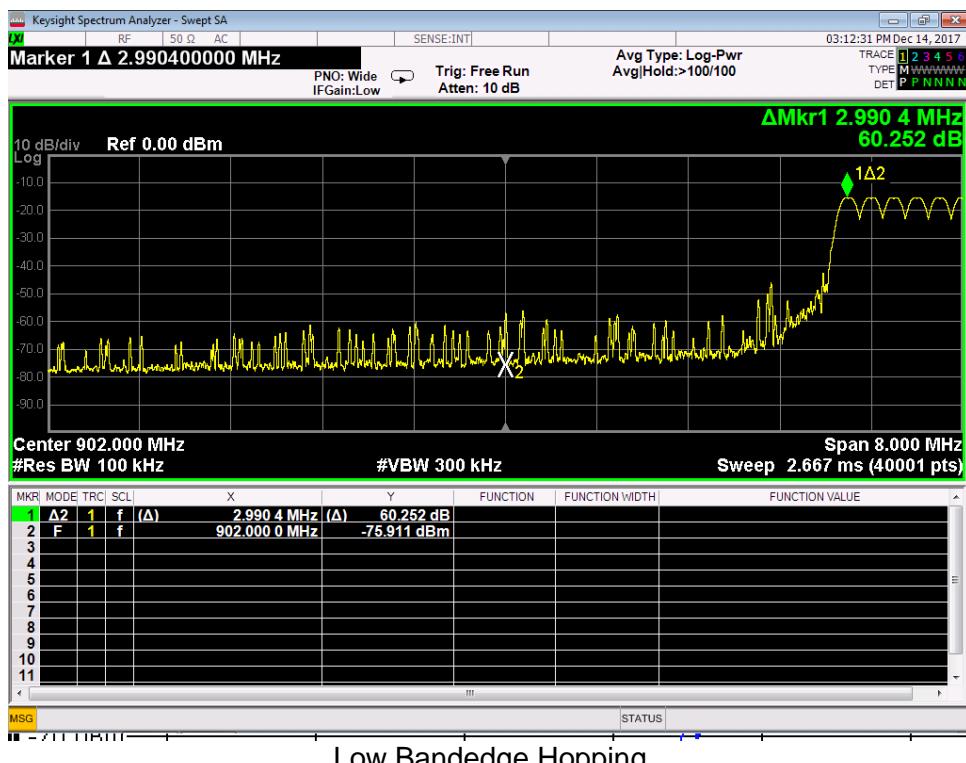


Low Bandedge Hopping

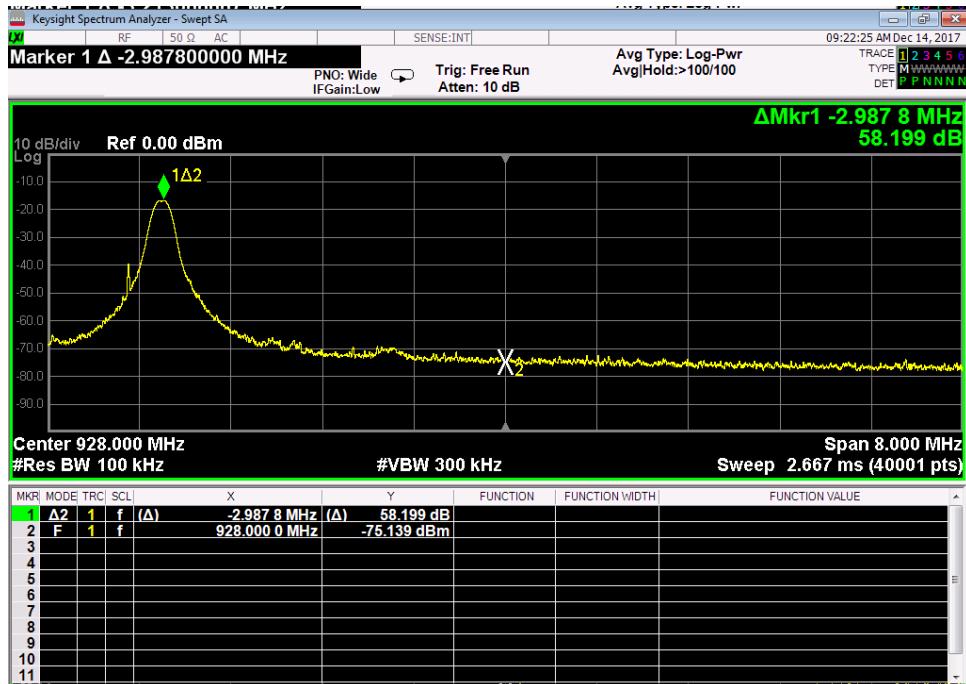

High Bandedge Non-hopping



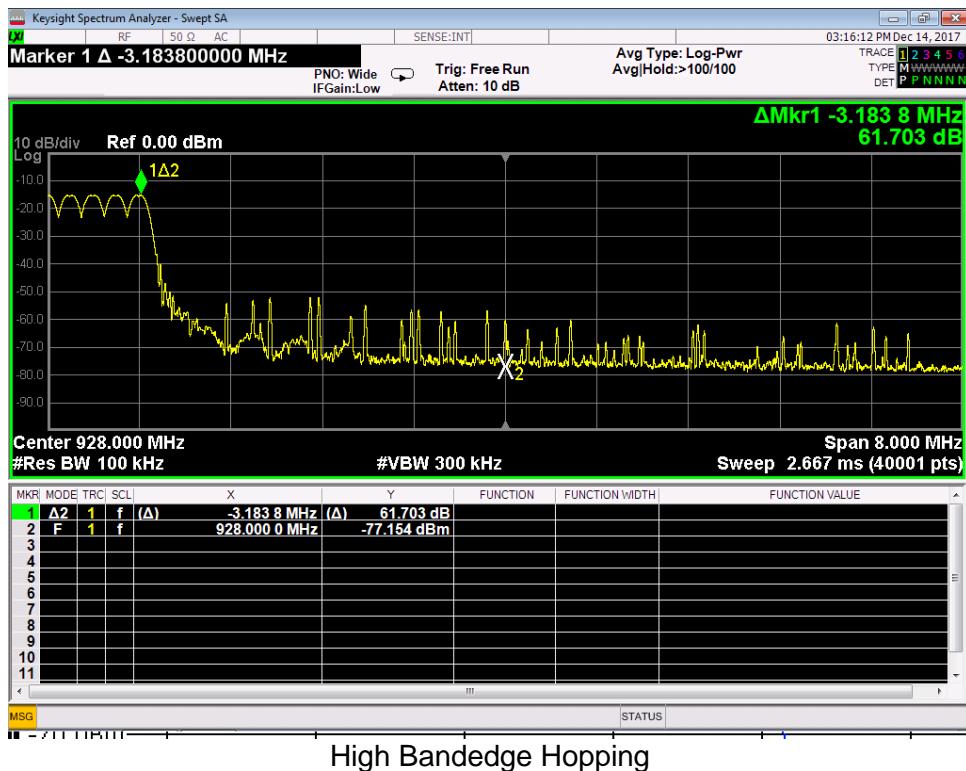

Rev. 12/10/2017

Spectrum Analyzers / Receivers /Preselectors		Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
Rental EXA Signal Analyzer(1118472)		9KHz-26.5GHz	N9010A-526;K	AT	MY51170010	1118472	I	7/25/2018	7/25/2017
Preamps/Couplers Attenuators / Filters	API - 40dB 100W Attenuator	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
		0.009-18GHz	48-40-34	API Weinschel	CG7990	2107	II	10/4/2018	10/4/2017
Cables	Asset #2289	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
		9KHz-26.5GHz	FLC-1.5FT-SMSM+	Mini-Circuits	16021039		II	1/27/2018	1/27/2017
Meteorological Meters/Chambers		MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on	
Weather Clock (Pressure Only)		BA928	Oregon Scientific	C3166-1	831	I	4/28/2018	4/28/2016	
TH A#2077		HTC-1	HDE		2077	II	3/23/2018	3/23/2017	

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.

Equipment used for the following tests:

20dB Bandwidth

Channel Separation


Number of Hopping Channels

Dwell Time

Peak Output Power

Conducted Bandedges



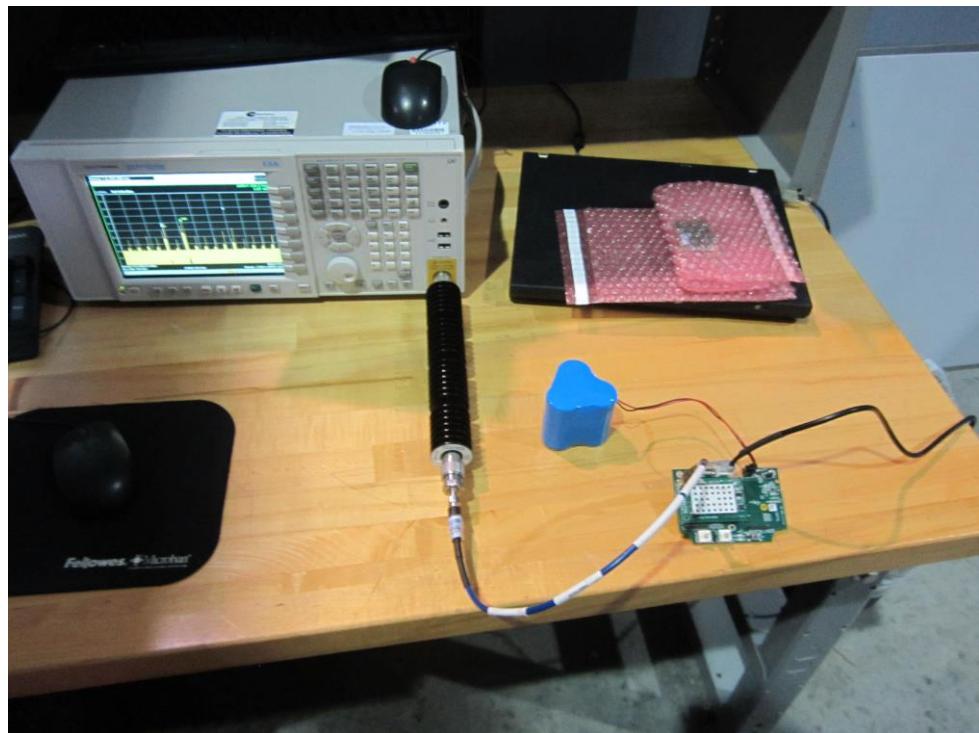

Conducted Test Setup Photo



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828

page 21 of 34



Radiated Spurious Emissions

LIMITS

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a). [15.247(d)]

**Two antenna setups were used for radiated emissions, and are noted with either a 'black antenna' label or a 'white antenna' label where applicable

Radiated Emissions Table

Date: 13-Dec-17		Company: Signal Fire Telemetry		Work Order: R3478							
Engineer: Zac Johnson		EUT Desc: 0129 500mW Radio		EUT Operating Voltage/Frequency: 3.6V DC							
Temp: 20.8°C		Humidity: 30%		Pressure: 983mBar							
Frequency Range: 915MHz				Measurement Distance: 3 m							
Notes: X: Laying Flat Y: Straight Up											
Antenna Polarization (H / V)	EUT Antenna Orientation (X / Y / Z)	Frequency (MHz)	Reading (dB μ V)	Attenuator Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Reading (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result (Pass/Fail)	
White Antenna		915.0		6.1		22.6		1.9		114.7	
H	X	915.0	96.3	6.1	22.6	1.9	114.7	---	---	---	---
V	X	915.0	82.5	6.1	22.6	1.9	100.9	---	---	---	---
H	Y	915.0	77.4	6.1	22.6	1.9	95.8	---	---	---	---
V	Y	915.0	94.4	6.1	22.6	1.9	112.8	---	---	---	---
Black Antenna		915.0		---		---		---		---	
H	X	915.0	94.7	6.1	22.6	1.9	113.1	---	---	---	---
V	X	915.0	91.7	6.1	22.6	1.9	110.1	---	---	---	---
H	Y	915.0	87.6	6.1	22.6	1.9	106.0	---	---	---	---
V	Y	915.0	90.9	6.1	22.6	1.9	109.3	---	---	---	---
Table Result:		by --- dB		Worst Freq:		--- MHz					
Test Site: EMI Chamber 2		Cable 1: 2458 Cbl		Cable 2: 2459 Cbl		Cable 3: ---					
Analyzer: 2093 SA		Preamp: none		Antenna: Red-Brown		Preselector: ---					
CSsoft Radiated Emissions Calculator v 1.017.190		Attenuator: 2490 6dB				Copyright Curtis-Straus LLC 2000					
Adjusted Reading = Reading - Preamp Factor + Antenna Factor + Cable Factor											



MEASUREMENTS / RESULTS**White Antenna:**

Curtis Straus - a Bureau Veritas Company	Work Order - R3478
Radiated Emissions Electric Field 3m Distance	EUT Power Input - battery
Top Peaks Horizontal 30-1000MHz	Test Site - CH-1
Operator: AKZ	Conditions - 22°C; 31%RH; 1010mBar
Notes:	EUT Maximum Frequency - 915MHz

Data Taken at 03:39:09 PM, Thursday, December 14, 2017

Frequency (MHz)	Peak Reading (dB μ V)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dB μ V/m)	Lim1: FCC_pt15_109_Class_B (dB μ V/m)	Lim1 Margin (dB)	Lim1 Test Results (Pass/Fail)	Worst Margin Lim1 (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
116.766	57.1	-15.5	41.6	43.5	-1.9	PASS	-1.9	100	0
141.041	52.4	-15.5	36.9	43.5	-6.6	PASS		200	45
146.812	56.6	-16	40.6	43.5	-3	PASS		150	45
152.778	54	-16.1	37.9	43.5	-5.7	PASS		100	45
705.193	36.8	-4.9	31.9	46	-14.1	PASS		150	45
784.903	36.8	-2.5	34.3	46	-11.8	PASS		200	180

Curtis Straus - a Bureau Veritas Company	Work Order - R3478
Radiated Emissions Electric Field 3m Distance	EUT Power Input - battery
Top Peaks Vertical 30-1000MHz	Test Site - CH-1
Operator: AKZ	Conditions - 22°C; 31%RH; 1010mBar
Notes:	EUT Maximum Frequency - 915MHz

Data Taken at 03:39:09 PM, Thursday, December 14, 2017

Frequency (MHz)	Peak Reading (dB μ V)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dB μ V/m)	Lim1: FCC_pt15_109_Class_B (dB μ V/m)	Lim1 Margin (dB)	Lim1 Test Results (Pass/Fail)	Worst Margin Lim1 (dB)	Antenna Height (cm)	Turntable Azimuth (degrees)
123.678	44.5	-14.5	30	43.5	-13.5	PASS	-13.5	200	135
711.425	33.4	-4.7	28.7	46	-17.3	PASS		100	135
816.816	31.6	-1.7	29.9	46	-16.1	PASS		200	135
819.095	37	-8.6	28.3	46	-17.7	PASS		100	90
820.38	37.8	-12.5	25.3	46	-20.7	PASS		200	45
999.952	30.7	1	31.8	54	-22.2	PASS		200	180

30-1000MHz



Curtis Straus - a Bureau Veritas Company Radiated Emissions Electric Field 3m Distance 1-6GHz Vertical Data Operator: ZJ				Work Order - R3478 EUT Power Input - 3.6V DC Test Site - CH-2 Conditions - 20.8°C; 30.4%RH; 983mBar EUT Maximum Frequency - 925MHz 1850MHz not in restricted band; 20dB down from fundamental limit was used											
Frequency	Raw Peak Reading	Raw Avg Reading	Correction Factor	Adjusted Peak Amplitude	Pk Lim: FCC_pt15_109_ClassB_Peak	Peak Margin	Peak Results	Worst Peak Margin	Adjusted Avg Amplitude	Av Lim: FCC_pt15_109_ClassB_AVG	Avg Margin	Avg Results	Worst Avg Margin	Antenna Height	EUT Azimuth
(MHz)	(dB μ V)	(dB μ V)	(dB/m)	(dB μ V/m)	(dB μ V/m)	(dB)	(Pass/Fail)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	(Pass/Fail)	(dB)	(cm)	(degrees)
1850	65.7	65	-10.3	55.3	94.7	-39.4	PASS		54.7	94.7	-40	PASS		292	166
2774.8	53.7	50.5	-8.9	44.7	74	-29.2	PASS		41.5	54	-12.5	PASS	-12.5	196	185
2956.3	47.8	38.4	-7.9	39.9	74	-34.1	PASS		30.5	54	-23.5	PASS		294	102
3706.1	45.5	36.8	-4.8	40.6	74	-33.3	PASS		32	54	-22	PASS		100	91
4624.9	49.8	43.1	-3.5	46.3	74	-27.7	PASS	-27.7	39.6	54	-14.4	PASS		188	33
5309.9	44.6	35.3	-1.6	43	74	-30.9	PASS		33.7	54	-20.3	PASS		115	59

Curtis Straus - a Bureau Veritas Company Radiated Emissions Electric Field 3m Distance 1-6GHz Horizontal Data Operator: ZJ				Work Order - R3478 EUT Power Input - 3.6V DC Test Site - CH-2 Conditions - 20.8°C; 30.4%RH; 983mBar EUT Maximum Frequency - 925MHz 1850MHz not in restricted band; 20dB down from fundamental limit was used											
Frequency	Raw Peak Reading	Raw Avg Reading	Correction Factor	Adjusted Peak Amplitude	Pk Lim: FCC_pt15_109_ClassB_Peak	Peak Margin	Peak Results	Worst Peak Margin	Adjusted Avg Amplitude	Av Lim: FCC_pt15_109_ClassB_AVG	Avg Margin	Avg Results	Worst Average Margin	Antenna Height	EUT Azimuth
(MHz)	(dB μ V)	(dB μ V)	(dB/m)	(dB μ V/m)	(dB μ V/m)	(dB)	(Pass/Fail)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	(Pass/Fail)	(dB)	(cm)	(degrees)
1850	70.7	70.4	-10.3	60.3	94.7	-34.4	PASS		60.1	94.7	-34.6	PASS		207	141
2265.6	49.3	39	-10.2	39	74	-34.9	PASS		28.8	54	-25.2	PASS		175	141
2774.9	57.1	54.4	-8.9	48.1	74	-25.8	PASS	-25.8	45.4	54	-8.5	PASS	-8.5	175	271
3055.1	47.5	38.6	-7.3	40.2	74	-33.8	PASS		31.2	54	-22.8	PASS		188	129
3703.6	44.3	36.8	-4.8	39.5	74	-34.5	PASS		32	54	-21.9	PASS		300	109
5494.2	43.3	34.2	-1.1	42.2	74	-31.8	PASS		33.1	54	-20.9	PASS		125	48

1GHz-6GHz - 924.8MHz High Channel

Curtis Straus - a Bureau Veritas Company Radiated Emissions Electric Field 3m Distance 1-6GHz Vertical Data Operator: ZJ				Work Order - R3478 EUT Power Input - 3.6V DC Test Site - CH-2 Conditions - 20.8°C; 30.4%RH; 983mBar White antenna, center channel EUT Maximum Frequency - 925MHz 1830MHz not in restricted band; 20dB down from fundamental limit was used											
Frequency	Raw Peak Reading	Raw Avg Reading	Correction Factor	Adjusted Peak Amplitude	Pk Lim: FCC_pt15_109_ClassB_Peak	Peak Margin	Peak Results	Worst Peak Margin	Adjusted Avg Amplitude	Av Lim: FCC_pt15_109_ClassB_AVG	Avg Margin	Avg Results	Worst Avg Margin	Antenna Height	EUT Azimuth
(MHz)	(dB μ V)	(dB μ V)	(dB/m)	(dB μ V/m)	(dB μ V/m)	(dB)	(Pass/Fail)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	(Pass/Fail)	(dB)	(cm)	(degrees)
1830	67.1	66.6	-10.4	56.6	94.7	-38.1	PASS		56.2	94.7	-38.5	PASS		100	216
2195.8	47.9	38.3	-9.9	38	74	-36	PASS		28.4	54	-25.6	PASS		197	214
2745	55.6	53.4	-9.1	46.5	74	-27.5	PASS	-27.5	44.3	54	-9.7	PASS	-9.7	182	243
4032.6	45.4	35.5	-4.4	41	74	-33	PASS		31.1	54	-22.9	PASS		285	182
4575.3	49.6	44.2	-3.7	45.9	74	-28.1	PASS		40.5	54	-13.5	PASS		103	14
5490.1	46.8	41.1	-1.1	45.7	74	-28.2	PASS		40.1	54	-13.9	PASS		186	111

Curtis Straus - a Bureau Veritas Company Radiated Emissions Electric Field 3m Distance 1-6GHz Horizontal Data Operator: ZJ				Work Order - R3478 EUT Power Input - 3.6V DC Test Site - CH-2 Conditions - 20.8°C; 30.4%RH; 983mBar White Antenna, center channel EUT Maximum Frequency - 925MHz 1830MHz not in restricted band; 20dB down from fundamental limit was used											
Frequency	Raw Peak Reading	Raw Avg Reading	Correction Factor	Adjusted Peak Amplitude	Pk Lim: FCC_pt15_109_ClassB_Peak	Peak Margin	Peak Results	Worst Peak Margin	Adjusted Avg Amplitude	Av Lim: FCC_pt15_109_ClassB_AVG	Avg Margin	Avg Results	Worst Average Margin	Antenna Height	EUT Azimuth
(MHz)	(dB μ V)	(dB μ V)	(dB/m)	(dB μ V/m)	(dB μ V/m)	(dB)	(Pass/Fail)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	(Pass/Fail)	(dB)	(cm)	(degrees)
1830	72.1	71.8	-10.4	61.7	94.7	-33	PASS		61.4	94.7	-33.3	PASS		225	134
2745	56	53.7	-9.1	46.9	74	-27.1	PASS	-27.3	44.7	54	-9.3	PASS	-9.3	275	272
3057.1	47.6	38.5	-7.3	40.3	74	-33.7	PASS		31.2	54	-22.8	PASS		275	239
3968.5	47.6	36.3	-4.5	43.1	74	-30.9	PASS		31.8	54	-22.2	PASS		282	131
4595.7	45	36.1	-3.6	41.4	74	-32.6	PASS		32.5	54	-21.5	PASS		224	147
5975.6	43.5	34.1	-0.6	42.8	74	-31.2	PASS		33.4	54	-20.6	PASS		125	216

1GHz-6GHz – 915MHz Mid Channel



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



Curtis Straus - a Bureau Veritas Company										Work Order - R3478									
Radiated Emissions Electric Field 3m Distance										EUT Power Input - 3.6V DC									
1-6GHz Vertical Data										Test Site - CH-2									
Operator: ZJ										Conditions - 20.8°C; 30.4%RH; 983mBar									
Low Channel, White antenna										EUT Maximum Frequency - 925MHz									
1810MHz not in restricted band; 20dB down from fundamental limit was used																			
Frequency	Raw Peak Reading	Raw Avg Reading	Correction Factor	Adjusted Peak Amplitude	Pk Lim: FCC_pt15_109 ClassB_Peak	Peak Margin	Peak Results	Worst Peak Margin	Adjusted Avg Amplitude	Av Lim: FCC_pt15_109 ClassB_AVG	Avg Margin	Avg Results	Worst Avg Margin	Antenna Height	EUT Azimuth				
(MHz)	(dB μ V)	(dB μ V)	(dB/m)	(dB μ V/m)	(dB μ V/m)	(dB)	(Pass/Fail)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	(Pass/Fail)	(dB)	(cm)	(degrees)				
1810	64.9	64.1	-10.6	54.4	94.7	-40.3	PASS		53.6	94.7	-41.1	PASS		284	168				
2715	51.3	47	-9.2	42.1	74	-31.9	PASS		37.8	54	-16.1	PASS		-16.1	127	292			
3045.6	47.6	38.6	-7.4	40.2	74	-33.8	PASS		31.1	54	-22.8	PASS			193	195			
3741.4	45.5	36.5	-5	40.5	74	-33.5	PASS		31.5	54	-22.5	PASS			275	25			
4714.3	43.7	35.2	-3.1	40.7	74	-33.3	PASS		32.1	54	-21.9	PASS			127	49			
5403.5	43.4	34.6	-1.2	42.2	74	-31.8	PASS	-31.8	33.4	54	-20.6	PASS			286	267			

Curtis Straus - a Bureau Veritas Company										Work Order - R3478									
Radiated Emissions Electric Field 3m Distance										EUT Power Input - 3.6V DC									
1-6GHz Horizontal Data										Test Site - CH-2									
Operator: ZJ										Conditions - 20.8°C; 30.4%RH; 983mBar									
White antenna, low channel										EUT Maximum Frequency - 925MHz									
1810MHz not in restricted band; 20dB down from fundamental limit was used																			
Frequency	Raw Peak Reading	Raw Avg Reading	Correction Factor	Adjusted Peak Amplitude	Pk Lim: FCC_pt15_109 ClassB_Peak	Peak Margin	Peak Results	Worst Peak Margin	Adjusted Avg Amplitude	Av Lim: FCC_pt15_109 ClassB_AVG	Avg Margin	Avg Results	Worst Avg Margin	Antenna Height	EUT Azimuth				
(MHz)	(dB μ V)	(dB μ V)	(dB/m)	(dB μ V/m)	(dB μ V/m)	(dB)	(Pass/Fail)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	(Pass/Fail)	(dB)	(cm)	(degrees)				
1810	82.1	65.4	-10.6	71.6	94.7	-23.1	PASS	-23.1	54.9	94.7	-39.8	PASS		100	288				
2715	53	50.6	-9.2	43.8	74	-30.2	PASS		41.4	54	-12.6	PASS		-12.6	225	312			
3052.5	47.4	38.5	-7.4	40.1	74	-33.9	PASS		31.1	54	-22.9	PASS			299	339			
3702.4	45.4	36.2	-4.8	40.6	74	-33.4	PASS		31.4	54	-22.5	PASS			116	204			
4600.8	45.3	36	-3.6	41.7	74	-32.2	PASS		32.4	54	-21.6	PASS			205	141			
5402.7	46.8	34.2	-1.2	45.6	74	-28.4	PASS		33	54	-21	PASS			117	70			

1GHz-6GHz – 905MHz Low Channel

Curtis Straus - a Bureau Veritas Company										Work Order - R3478									
Radiated Emissions Electric Field 1m Distance										EUT Power Input - 3.6V DC									
6-18GHz Vertical Data										Test Site - CH-2									
Operator: ZJ										Conditions - 20.8°C; 30.4%RH; 983mBar									
High Channel White Antenna										EUT Maximum Frequency - 925MHz									
11:56:24 PM	Wednesday	December 20 2017																	
Frequency	Raw Peak Reading	Raw Avg Reading	Correction Factor	Adjusted Peak Amplitude	Pk Lim: FCC_pt15_109 ClassB_Peak	Peak Margin	Peak Results	Worst Peak Margin	Adjusted Avg Amplitude	Av Lim: FCC_pt15_109 ClassB_AVG	Avg Margin	Avg Results	Worst Avg Margin	Antenna Height	EUT Azimuth				
(MHz)	(dB μ V)	(dB μ V)	(dB/m)	(dB μ V/m)	(dB μ V/m)	(dB)	(Pass/Fail)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	(Pass/Fail)	(dB)	(cm)	(degrees)				
6475.3	28.1	18.7	23.2	51.3	83.5	-32.2	PASS		41.9	63.5	-21.6	PASS			100	32			
7117.3	26	16.3	24	50	83.5	-33.5	PASS		40.3	63.5	-23.2	PASS			146	120			
7400	31.7	27	24.7	56.4	83.5	-27.1	PASS	-27.1	51.7	63.5	-11.8	PASS		-11.8	164	128			
8225.9	26.1	16	24.8	50.9	83.5	-32.6	PASS		40.8	63.5	-22.7	PASS			100	71			
9589.8	25.1	16.1	26.5	51.6	83.5	-31.9	PASS		42.6	63.5	-20.9	PASS			100	25			

Curtis Straus - a Bureau Veritas Company										Work Order - R3478									
Radiated Emissions Electric Field 1m Distance										EUT Power Input - 3.6V DC									
6-18GHz Horizontal Data										Test Site - CH-2									
Operator: ZJ										Conditions - 20.8°C; 30.4%RH; 983mBar									
White Antenna										EUT Maximum Frequency - 925MHz									
11:56:24 PM	Wednesday	December 20 2017																	
Frequency	Raw Peak Reading	Raw Avg Reading	Correction Factor	Adjusted Peak Amplitude	Pk Lim: FCC_pt15_109 ClassB_Peak	Peak Margin	Peak Results	Worst Peak Margin	Adjusted Avg Amplitude	Av Lim: FCC_pt15_109 ClassB_AVG	Avg Margin	Avg Results	Worst Avg Margin	Antenna Height	EUT Azimuth				
(MHz)	(dB μ V)	(dB μ V)	(dB/m)	(dB μ V/m)	(dB μ V/m)	(dB)	(Pass/Fail)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	(Pass/Fail)	(dB)	(cm)	(degrees)				
6475	30.1	24.3	23.2	53.3	83.5	-30.2	PASS		47.5	63.5	-16	PASS			150	43			
7103	26.1	16.3	24.1	50.2	83.5	-33.3	PASS		40.4	63.5	-23.1	PASS			122	120			
7399.8	31.1	27.9	24.7	55.8	83.5	-27.7	PASS	-27.7	52.6	63.5	-10.9	PASS		-10.9	167	118			
9608.4	24.5	16	26.5	51	83.5	-32.5	PASS		42.5	63.5	-21	PASS			100	53			

6GHz-10GHz - 924.8MHz High Channel



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



Curtis Straus - a Bureau Veritas Company Radiated Emissions Electric Field 1m Distance 6-18GHz Vertical Data Operator: ZJ Mid Channel White Antenna 11:38:17 PM Wednesday December 2 2017				Work Order - R3478 EUT Power Input - 3.6V DC Test Site - CH-2 Conditions - 20.8°C; 30.4%RH; 983mBar EUT Maximum Frequency - 925MHz											
Frequency	Raw Peak Reading	Raw Avg Reading	Correction Factor	Adjusted Peak Amplitude	Pk Lim: FCC_pt15_109	Peak Margin	Peak Results	Worst Peak Margin	Adjusted Avg Amplitude	Av Lim: FCC_pt15_109	Avg Margin	Avg Results	Worst Avg Margin	Antenna Height	EUT Azimuth
(MHz)	(dB μ V)	(dB μ V)	(dB/m)	(dB μ V/m)	(dB μ V/m)	(dB)	(Pass/Fail)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	(Pass/Fail)	(dB)	(cm)	(degrees)
7319.8	29.5	23.5	24	53.5	83.5	-30	PASS	-30	47.5	63.5	-16	PASS	-16	100	60
8235.1	25.9	16	24.7	50.6	83.5	-32.9	PASS	40.7	63.5	-22.8	PASS	100	42		
9578.2	24.7	16.1	26.5	51.2	83.5	-32.3	PASS	42.6	63.5	-20.9	PASS	200	266		

Curtis Straus - a Bureau Veritas Company Radiated Emissions Electric Field 1m Distance 6-18GHz Horizontal Data Operator: ZJ Mid Channel White Antenna 11:38:17 PM Wednesday December 2 2017				Work Order - R3478 EUT Power Input - 3.6V DC Test Site - CH-2 Conditions - 20.8°C; 30.4%RH; 983mBar EUT Maximum Frequency - 925MHz											
Frequency	Raw Peak Reading	Raw Avg Reading	Correction Factor	Adjusted Peak Amplitude	Pk Lim: FCC_pt15_109	Peak Margin	Peak Test Results	Worst Peak Margin	Adjusted Avg Amplitude	Av Lim: FCC_pt15_109	Avg Margin	Avg Test Results	Worst Avg Margin	Antenna Height	EUT Azimuth
(MHz)	(dB μ V)	(dB μ V)	(dB/m)	(dB μ V/m)	(dB μ V/m)	(dB)	(Pass/Fail)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	(Pass/Fail)	(dB)	(cm)	(degrees)
7076.7	25.1	16.3	24	49.1	83.5	-34.4	PASS	40.3	63.5	-23.2	PASS	200	309		
7319.9	33.1	30	24	57.1	83.5	-26.4	PASS	-26.4	54	63.5	-9.5	PASS	-9.5	148	81
7641.2	25.1	16.1	24.6	49.7	83.5	-33.8	PASS	40.7	63.5	-22.8	PASS	172	164		
8235.3	24.5	16	24.7	49.2	83.5	-34.3	PASS	40.7	63.5	-22.8	PASS	148	269		
9541.2	23.1	16	26.4	49.5	83.5	-34	PASS	42.4	63.5	-21.1	PASS	156	7		

6GHz-10GHz - 915MHz Mid Channel

Curtis Straus - a Bureau Veritas Company Radiated Emissions Electric Field 1m Distance 6-18GHz Vertical Data Operator: ZJ				Work Order - R3478 EUT Power Input - 3.6V DC Test Site - CH-2 Conditions - 20.8°C; 30.4%RH; 983mBar White antenna, Low channel EUT Maximum Frequency - 925MHz											
Frequency	Raw Peak Reading	Raw Avg Reading	Correction Factor	Adjusted Peak Amplitude	Pk Lim: FCC_pt15_109	Peak Margin	Peak Results	Worst Peak Margin	Adjusted Avg Amplitude	Av Lim: FCC_pt15_109	Avg Margin	Avg Results	Worst Avg Margin	Antenna Height	EUT Azimuth
(MHz)	(dB μ V)	(dB μ V)	(dB/m)	(dB μ V/m)	(dB μ V/m)	(dB)	(Pass/Fail)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	(Pass/Fail)	(dB)	(cm)	(degrees)
7239.9	50.3	46.9	1	51.3	83.5	-32.2	PASS	-32.2	47.9	63.5	-15.6	PASS	-15.6	157	140
7713.5	41.9	33.9	1.7	43.6	83.5	-39.9	PASS	35.6	63.5	-27.9	PASS	194	227		
8144.9	48	41.6	2.8	50.8	83.5	-32.7	PASS	44.4	63.5	-19.1	PASS	132	157		
9326.6	41.9	33.6	3.3	45.2	83.5	-38.3	PASS	36.9	63.5	-26.6	PASS	200	339		
9955.2	45	36.1	3.4	48.4	83.5	-35.1	PASS	39.5	63.5	-24	PASS	169	169		

Curtis Straus - a Bureau Veritas Company Radiated Emissions Electric Field 1m Distance 6-18GHz Horizontal Data Operator: ZJ				Work Order - R3478 EUT Power Input - 3.6V DC Test Site - CH-2 Conditions - 20.8°C; 30.4%RH; 983mBar White antenna, Low channel EUT Maximum Frequency - 925MHz											
Frequency	Raw Peak Reading	Raw Avg Reading	Correction Factor	Adjusted Peak Amplitude	Pk Lim: FCC_pt15_109	Peak Margin	Peak Test Results	Worst Peak Margin	Adjusted Avg Amplitude	Av Lim: FCC_pt15_109	Avg Margin	Avg Test Results	Worst Avg Margin	Antenna Height	EUT Azimuth
(MHz)	(dB μ V)	(dB μ V)	(dB/m)	(dB μ V/m)	(dB μ V/m)	(dB)	(Pass/Fail)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	(Pass/Fail)	(dB)	(cm)	(degrees)
7239.9	48.4	42.6	1	49.3	83.5	-34.2	PASS	-34.2	43.5	63.5	-20	PASS	-20	125	52
7654.4	43.4	34.1	1.7	45.1	83.5	-38.4	PASS	35.8	63.5	-27.7	PASS	114	25		
8523.7	42.6	34	2.8	45.4	83.5	-38.1	PASS	36.8	63.5	-26.7	PASS	150	51		
9329.5	43.8	33.7	3.2	47.1	83.5	-36.4	PASS	37	63.5	-26.5	PASS	100	225		
9986.1	41.2	33	3.7	44.9	83.5	-38.6	PASS	36.8	63.5	-26.7	PASS	140	330		

6GHz-10GHz – 905MHz Low Channel



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



Black Antenna:

Curtis Straus - a Bureau Veritas Company	Work Order - R3478
Radiated Emissions Electric Field 3m Distance	EUT Power Input - Battery
Top Peaks Horizontal 30-1000MHz	Test Site - CH-1
Operator: AKZ	Conditions - 22°C; 25%RH; 1010mBar
Notes:	
Mid Channel	

Data Taken at 03:26:18 PM, Friday, December 15, 2017

Frequency (MHz)	Peak Reading (dB μ V)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dB μ V/m)	Lim1: FCC_pt15_109_Class_B (dB μ V/m)	Lim1 Margin (dB)	Lim1 Test Results (Pass/Fail)	Worst Margin Lim1 (dB)	Lim2: FCC_pt15_109_Class_B (dB μ V/m)	Lim2 Margin (dB)	Lim2 Test Results (Pass/Fail)	Worst Margin Lim2 (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
30.679	32.7	-8.3	24.3	40	-15.7	PASS		40	-15.7	PASS		250	135
155.833	39.2	-16.1	23.1	43.5	-20.5	PASS		43.5	-20.5	PASS		100	0
193.615	39.7	-17.1	22.7	43.5	-20.9	PASS		43.5	-20.9	PASS		100	225
194.657	40	-17.1	22.9	43.5	-20.7	PASS		43.5	-20.7	PASS		100	225
195.846	37.9	-16.7	21.2	43.5	-22.3	PASS		43.5	-22.3	PASS		100	225
815.361	32.6	-1.7	30.9	46	-15.1	PASS	-15.1	46	-15.1	PASS	-15.1	200	315

Curtis Straus - a Bureau Veritas Company	Work Order - R3478
Radiated Emissions Electric Field 3m Distance	EUT Power Input - Battery
Top Peaks Vertical 30-1000MHz	Test Site - CH-1
Operator: AKZ	Conditions - 22°C; 25%RH; 1010mBar
Notes:	
Mid Channel	

Data Taken at 03:26:18 PM, Friday, December 15, 2017

Frequency (MHz)	Peak Reading (dB μ V)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dB μ V/m)	Lim1: FCC_pt15_109_Class_B (dB μ V/m)	Lim1 Margin (dB)	Lim1 Test Results (Pass/Fail)	Worst Margin Lim1 (dB)	Lim2: FCC_pt15_109_Class_B (dB μ V/m)	Lim2 Margin (dB)	Lim2 Test Results (Pass/Fail)	Worst Margin Lim2 (dB)	Antenna Height (cm)	Turntable Azimuth (degrees)
30.024	31.4	-7.7	23.8	40	-16.2	PASS		40	-16.2	PASS		200	45
120.258	38.3	-15	23.3	43.5	-20.2	PASS		43.5	-20.2	PASS		100	90
126.466	37.6	-14.5	23.1	43.5	-20.5	PASS		43.5	-20.5	PASS		150	90
132.917	38.8	-14.5	24.3	43.5	-19.2	PASS		43.5	-19.2	PASS		200	90
143.878	39.2	-15.8	23.4	43.5	-20.1	PASS		43.5	-20.1	PASS		150	135
815.167	31.5	-1.7	29.8	46	-16.2	PASS	-16.2	46	-16.2	PASS	-16.2	150	315

30-1000MHz

Curtis Straus - a Bureau Veritas Company	Work Order - R3478														
Radiated Emissions Electric Field 3m Distance	EUT Power Input - 3.6V DC														
1-6GHz Vertical Data	Test Site - CH-2														
Operator: ZJ	Conditions - 20.8°C; 30.4%RH; 983mBar														
	Black antenna, High channel														
	EUT Maximum Frequency - 925MHz														
1850MHz not in restricted band; 20dB down from fundamental limit was used															
Frequency (MHz)	Raw Peak Reading (dB μ V)	Raw Avg Reading (dB μ V)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dB μ V/m)	Pk Lim: FCC_pt15_109_ClassB_Peak (dB μ V/m)	Peak Margin (dB)	Peak Results (Pass/Fail)	Worst Peak Margin (dB)	Adjusted Avg Amplitude (dB μ V/m)	Av Lim: FCC_pt15_109_Avg_ClassB_AVG (dB μ V/m)	Avg Results (Pass/Fail)	Worst Avg Margin (dB)	Antenna Height (cm)	EUT Azimuth (degrees)	
(MHz)	(dB μ V)	(dB μ V)		(dB μ V/m)	(dB μ V/m)	(dB)	(dB)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	(dB)	(cm)	(degrees)	
1850	42.3	78.8	-10.3	32	93.1	-61.1	PASS		68.5	93.1	-24.6	PASS		206	16
2774.8	53.3	51.5	-8.9	44.3	74	-29.6	PASS		42.6	54	-11.4	PASS		102	54
3055.6	47.7	38.4	-7.3	40.3	74	-33.6	PASS		31	54	-22.9	PASS		117	204
3700.1	50.4	43.1	-4.8	45.6	74	-28.4	PASS		38.3	54	-15.7	PASS		205	34
4625	51.7	46.9	-3.5	48.2	74	-25.7	PASS	-25.7	43.4	54	-10.6	PASS		187	48
5431.2	44.6	34.6	-1.2	43.4	74	-30.5	PASS		33.5	54	-20.5	PASS		116	190



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
 One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828

page 27 of 34



Curtis Straus - a Bureau Veritas Company Radiated Emissions Electric Field 3m Distance 1-6GHz Horizontal Data Operator: ZJ				Work Order - R3478 EUT Power Input - 3.6V DC Test Site - CH-2 Conditions - 20.8°C; 30.4%RH; 983mBar Black antenna, High channel EUT Maximum Frequency - 925MHz 1850MHz not in restricted band; 20dB down from fundamental limit was used												
Frequency	Raw Peak Reading	Raw Avg Reading	Correction Factor	Adjusted Peak Amplitude	Pk Lim: FCC_pt15_109	Peak Margin	Peak Results	Worst Peak Margin	Adjusted Avg Amplitude	Av Lim: FCC_pt15_109	ClassB_AVG	Avg Margin	Avg Results	Worst Average Margin	Antenna Height	EUT Azimuth
(MHz)	(dB μ V)	(dB μ V)	(dB/m)	(dB μ V/m)	(dB μ V/m)	(dB)	(Pass/Fail)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	(Pass/Fail)	(dB)	(cm)	(degrees)	
1463.4	48.9	39	-12.1	36.8	74	-37.2	PASS	26.8	54	-27.1	PASS			184	44	
1850	81.6	58	-10.3	71.3	93.1	-21.8	PASS	-21.8	47.6	93.1	-45.5	PASS		211	240	
2241.2	50.7	38.9	-10.1	40.6	74	-33.4	PASS		28.7	54	-25.2	PASS		225	86	
2775	53.9	51.3	-8.9	45	74	-29	PASS		42.4	54	-11.6	PASS	-11.6	275	0	
2973.3	47.3	38.6	-7.8	39.5	74	-34.5	PASS		30.8	54	-23.2	PASS		114	24	
5211.4	43.2	34.6	-1.4	41.8	74	-32.2	PASS		33.2	54	-20.8	PASS		217	137	

1GHz-6GHz - 924.8MHz High Channel

Curtis Straus - a Bureau Veritas Company Radiated Emissions Electric Field 3m Distance 1-6GHz Vertical Data Operator: ZJ				Work Order - R3478 EUT Power Input - 3.6V DC Test Site - CH-2 Conditions - 20.8°C; 30.4%RH; 983mBar Black antenna, Mid channel EUT Maximum Frequency - 925MHz 1830MHz not in restricted band; 20dB down from fundamental limit was used												
Frequency	Raw Peak Reading	Raw Avg Reading	Correction Factor	Adjusted Peak Amplitude	Pk Lim: FCC_pt15_109	Peak Margin	Peak Results	Worst Peak Margin	Adjusted Avg Amplitude	Av Lim: FCC_pt15_109	ClassB_AVG	Avg Margin	Avg Results	Worst Avg Margin	Antenna Height	EUT Azimuth
(MHz)	(dB μ V)	(dB μ V)	(dB/m)	(dB μ V/m)	(dB μ V/m)	(dB)	(Pass/Fail)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	(Pass/Fail)	(dB)	(cm)	(degrees)	
1830	75.9	75.8	-10.4	65.5	93.1	-27.6	PASS	-27.6	65.3	93.1	-27.8	PASS		275	170	
2220.8	48.3	38.8	-10	38.3	74	-35.7	PASS		28.8	54	-25.2	PASS		225	266	
2745	58.4	36.3	-9.1	49.3	74	-24.7	PASS		27.2	54	-26.8	PASS		225	328	
3090.2	47.6	37.9	-7.1	40.5	74	-33.5	PASS		30.8	54	-23.2	PASS		102	29	
4574.9	46.1	48	-3.7	42.4	74	-31.6	PASS		44.4	54	-9.6	PASS	-9.6	175	24	
5489.9	44.9	42.4	-1.1	43.9	74	-30.1	PASS		41.3	54	-12.7	PASS		202	51	

Curtis Straus - a Bureau Veritas Company Radiated Emissions Electric Field 3m Distance 1-6GHz Horizontal Data Operator: ZJ				Work Order - R3478 EUT Power Input - 3.6V DC Test Site - CH-2 Conditions - 20.8°C; 30.4%RH; 983mBar Black antenna, Mid channel EUT Maximum Frequency - 925MHz 1830MHz not in restricted band; 20dB down from fundamental limit was used												
Frequency	Raw Peak Reading	Raw Avg Reading	Correction Factor	Adjusted Peak Amplitude	Pk Lim: FCC_pt15_109	Peak Margin	Peak Results	Worst Peak Margin	Adjusted Avg Amplitude	Av Lim: FCC_pt15_109	ClassB_AVG	Avg Margin	Avg Results	Worst Avg Margin	Antenna Height	EUT Azimuth
(MHz)	(dB μ V)	(dB μ V)	(dB/m)	(dB μ V/m)	(dB μ V/m)	(dB)	(Pass/Fail)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	(Pass/Fail)	(dB)	(cm)	(degrees)	
1830	82.4	82.3	-10.4	72	93.1	-21.1	PASS	-21.1	71.8	93.1	-21.3	PASS		104	260	
2744.8	52.7	50.5	-9.1	43.6	74	-30.4	PASS		41.4	54	-12.6	PASS	-12.6	175	321	
3025.7	47.3	38.6	-7.6	39.8	74	-34.2	PASS		31.1	54	-22.9	PASS		100	154	
3931.8	44.8	36.1	-4.6	40.2	74	-33.8	PASS		31.5	54	-22.5	PASS		275	286	
4575	47.9	40.2	-3.7	44.2	74	-29.8	PASS		36.5	54	-17.4	PASS		225	100	
5330.8	43.8	34.8	-1.5	42.3	74	-31.7	PASS		33.3	54	-20.6	PASS		125	286	

1GHz-6GHz – 915MHz Mid Channel



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



Curtis Straus - a Bureau Veritas Company												Work Order - R3478											
Radiated Emissions Electric Field 3m Distance												EUT Power Input - 3.6V DC											
1-6GHz Vertical Data												Test Site - CH-2											
Operator: ZJ												Conditions - 20.8°C; 30.4%RH; 983mBar											
Black antenna, Low channel												EUT Maximum Frequency - 925MHz											
1810MHz not in restricted band; 20dB down from fundamental limit was used																							
Frequency	Raw Peak Reading	Raw Avg Reading	Correction Factor	Adjusted Peak Amplitude	Pk Lim: FCC_pt15_109 ClassB_Peak	Peak Margin	Peak Results	Worst Peak Margin	Adjusted Avg Amplitude	Av Lim: FCC_pt15_109 ClassB_AVG	Avg Margin	Avg Results	Worst Avg Margin	Antenna Height	EUT Azimuth								
(MHz)	(dB μ V)	(dB μ V)	(dB/m)	(dB μ V/m)	(dB μ V/m)	(dB)	(Pass/Fail)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	(Pass/Fail)	(dB)	(cm)	(degrees)								
1810	79.6	79.5	-10.6	69.1	93.1	-24	PASS	-24	68.9	93.1	-24.2	PASS		225	25								
2715	52.9	50.2	-9.2	43.7	74	-30.2	PASS		41	54	-13	PASS		-13	205	78							
2999.4	48.1	38.4	-7.8	40.4	74	-33.6	PASS		30.7	54	-23.3	PASS		190	147								
4604.2	44.9	35.7	-3.6	41.3	74	-32.7	PASS		32.1	54	-21.9	PASS		297	11								
5430	47.3	41.3	-1.2	46.1	74	-27.8	PASS		40.2	54	-13.8	PASS		275	24								
5998.7	43.7	33.9	-0.6	43.1	74	-30.9	PASS		33.3	54	-20.7	PASS		102	130								

Curtis Straus - a Bureau Veritas Company												Work Order - R3478											
Radiated Emissions Electric Field 3m Distance												EUT Power Input - 3.6V DC											
1-6GHz Horizontal Data												Test Site - CH-2											
Operator: ZJ												Conditions - 20.8°C; 30.4%RH; 983mBar											
Black antenna, Low channel												EUT Maximum Frequency - 925MHz											
1810MHz not in restricted band; 20dB down from fundamental limit was used																							
Frequency	Raw Peak Reading	Raw Avg Reading	Correction Factor	Adjusted Peak Amplitude	Pk Lim: FCC_pt15_109 ClassB_Peak	Peak Margin	Peak Results	Worst Peak Margin	Adjusted Avg Amplitude	Av Lim: FCC_pt15_109 ClassB_AVG	Avg Margin	Avg Results	Worst Avg Margin	Antenna Height	EUT Azimuth								
(MHz)	(dB μ V)	(dB μ V)	(dB/m)	(dB μ V/m)	(dB μ V/m)	(dB)	(Pass/Fail)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	(Pass/Fail)	(dB)	(cm)	(degrees)								
1810	82.1	65.4	-10.6	71.6	93.1	-21.5	PASS	-21.5	54.9	93.1	-38.2	PASS		100	288								
2715	53	50.6	-9.2	43.8	74	-30.2	PASS		41.4	54	-12.6	PASS		-12.6	225	312							
3052.5	47.4	38.5	-7.4	40.1	74	-33.9	PASS		31.1	54	-22.9	PASS		299	339								
3702.4	45.4	36.2	-4.8	40.6	74	-33.4	PASS		31.4	54	-22.5	PASS		116	204								
4600.8	45.3	36	-3.6	41.7	74	-32.2	PASS		32.4	54	-21.6	PASS		205	141								
5402.7	46.8	34.2	-1.2	45.6	74	-28.4	PASS		33	54	-21	PASS		117	70								

1GHz-6GHz – 905MHz Low Channel

Curtis Straus - a Bureau Veritas Company												Work Order - R3478											
Radiated Emissions Electric Field 1m Distance												EUT Power Input - 3.6V DC											
6-18GHz Vertical Data												Test Site - CH-2											
Operator: ZJ												Conditions - 20.8°C; 30.4%RH; 983mBar											
Black Antenna												EUT Maximum Frequency - 925MHz											
11:47:18 PM Wednesday December 2 2017																							
Frequency	Raw Peak Reading	Raw Avg Reading	Correction Factor	Adjusted Peak Amplitude	Pk Lim: FCC_pt15_109 ClassB_Peak	Peak Margin	Peak Results	Worst Peak Margin	Adjusted Avg Amplitude	Av Lim: FCC_pt15_109 ClassB_AVG	Avg Margin	Avg Results	Worst Avg Margin	Antenna Height	EUT Azimuth								
(MHz)	(dB μ V)	(dB μ V)	(dB/m)	(dB μ V/m)	(dB μ V/m)	(dB)	(Pass/Fail)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	(Pass/Fail)	(dB)	(cm)	(degrees)								
6474.6	25.4	17.7	23.2	48.6	83.5	-34.9	PASS		40.9	63.5	-22.6	PASS		100	37								
7113.5	25.2	16.3	24.1	49.3	83.5	-34.2	PASS		40.4	63.5	-23.1	PASS		200	245								
7399.8	27.9	21.4	24.7	52.6	83.5	-30.9	PASS	-30.9	46.1	63.5	-17.4	PASS		-17.4	200	254							
9402.5	25	15.8	25.8	50.8	83.5	-32.7	PASS		41.6	63.5	-21.9	PASS		102	71								

Curtis Straus - a Bureau Veritas Company												Work Order - R3478											
Radiated Emissions Electric Field 1m Distance												EUT Power Input - 3.6V DC											
6-18GHz Horizontal Data												Test Site - CH-2											
Operator: ZJ												Conditions - 20.8°C; 30.4%RH; 983mBar											
Black Antenna												EUT Maximum Frequency - 925MHz											
11:47:18 PM Wednesday December 2 2017																							
Frequency	Raw Peak Reading	Raw Avg Reading	Correction Factor	Adjusted Peak Amplitude	Pk Lim: FCC_pt15_109 ClassB_Peak	Peak Margin	Peak Results	Worst Peak Margin	Adjusted Avg Amplitude	Av Lim: FCC_pt15_109 ClassB_AVG	Avg Margin	Avg Results	Worst Avg Margin	Antenna Height	EUT Azimuth								
(MHz)	(dB μ V)	(dB μ V)	(dB/m)	(dB μ V/m)	(dB μ V/m)	(dB)	(Pass/Fail)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	(Pass/Fail)	(dB)	(cm)	(degrees)								
7319.8	35.3	32.1	24	59.3	83.5	-24.2	PASS	-24.2	56.1	63.5	-7.4	PASS		-7.4	175	50							
8208.3	24.8	16.1	25.1	49.9	83.5	-33.6	PASS		41.2	63.5	-22.3	PASS		146	195								
9581.6	23.8	16.1	26.5	50.3	83.5	-33.2	PASS		42.6	63.5	-20.9	PASS		156	37								

6GHz-10GHz - 924.8MHz High Channel



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution

Curtis Straus - a Bureau Veritas Company				Work Order - R3478											
Radiated Emissions Electric Field 1m Distance				EUT Power Input - 3.6V DC											
6-18GHz Vertical Data				Test Site - CH-2											
Operator: ZJ				Conditions - 20.8°C; 30.4%RH; 983mBar											
Mid Channel Black Antenna				EUT Maximum Frequency - 925MHz											
11:31:42 PM Wednesday December 2 2017															
Frequency	Raw Peak Reading	Raw Avg Reading	Correction Factor	Adjusted Peak Amplitude	Pk Lim: FCC_pt15_109 ClassB_Peak	Peak Margin	Peak Results	Worst Peak Margin	Adjusted Avg Amplitude	Av Lim: FCC_pt15_109 ClassB_AVG	Avg Margin	Avg Results	Worst Avg Margin	Antenna Height	EUT Azimuth
(MHz)	(dB μ V)	(dB μ V)	(dB/m)	(dB μ V/m)	(dB μ V/m)	(dB)	(Pass/Fail)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	(Pass/Fail)	(dB)	(cm)	(degrees)
7319.8	29.5	23.5	24	53.5	83.5	-30	PASS	-30	47.5	63.5	-16	PASS	-16	100	60
8235.1	25.9	16	24.7	50.6	83.5	-32.9	PASS	40.7	63.5	-22.8	PASS	-22.8	100	42	
9578.2	24.7	16.1	26.5	51.2	83.5	-32.3	PASS	42.6	63.5	-20.9	PASS	-20.9	200	266	

Curtis Straus - a Bureau Veritas Company				Work Order - R3478											
Radiated Emissions Electric Field 1m Distance				EUT Power Input - 3.6V DC											
6-18GHz Horizontal Data				Test Site - CH-2											
Operator: ZJ				Conditions - 20.8°C; 30.4%RH; 983mBar											
Mid Channel Black Antenna				EUT Maximum Frequency - 925MHz											
11:31:42 PM Wednesday December 2 2017															
Frequency	Raw Peak Reading	Raw Avg Reading	Correction Factor	Adjusted Peak Amplitude	Pk Lim: FCC_pt15_109 Peak Margin	Peak Margin	Peak Test Results	Worst Peak Margin	Adjusted Avg Amplitude	Av Lim: FCC_pt15_109 ClassB_AVG	Avg Margin	Avg Results	Worst Avg Margin	Antenna Height	EUT Azimuth
(MHz)	(dB μ V)	(dB μ V)	(dB/m)	(dB μ V/m)	(dB μ V/m)	(dB)	(Pass/Fail)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	(Pass/Fail)	(dB)	(cm)	(degrees)
7319.8	35.3	32.1	24	59.3	83.5	-24.2	PASS	-24.2	56.1	63.5	-7.4	PASS	-7.4	175	50
8208.3	24.8	16.1	25.1	49.9	83.5	-33.6	PASS	41.2	63.5	-22.3	PASS	-22.3	146	195	
9581.6	23.8	16.1	26.5	50.3	83.5	-33.2	PASS	42.6	63.5	-20.9	PASS	-20.9	156	37	

6GHz-10GHz - 915MHz Mid Channel

Curtis Straus - a Bureau Veritas Company				Work Order - R3478											
Radiated Emissions Electric Field 1m Distance				EUT Power Input - 3.6V DC											
6-18GHz Vertical Data				Test Site - CH-2											
Operator: ZJ				Conditions - 20.8°C; 30.4%RH; 983mBar											
Low Channel Black Antenna				EUT Maximum Frequency - 925MHz											
5:37:19 PM Wednesday December 2 2017															
Frequency	Raw Peak Reading	Raw Avg Reading	Correction Factor	Adjusted Peak Amplitude	Pk Lim: FCC_pt15_109 ClassB_Peak	Peak Margin	Peak Results	Worst Peak Margin	Adjusted Avg Amplitude	Av Lim: FCC_pt15_109 ClassB_AVG	Avg Margin	Avg Results	Worst Avg Margin	Antenna Height	EUT Azimuth
(MHz)	(dB μ V)	(dB μ V)	(dB/m)	(dB μ V/m)	(dB μ V/m)	(dB)	(Pass/Fail)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	(Pass/Fail)	(dB)	(cm)	(degrees)
7082.7	25.5	16.3	24.1	49.6	83.5	-33.9	PASS	40.4	63.5	-23.1	PASS	-23.1	100	96	
7239.8	27	22	23.7	50.7	83.5	-32.8	PASS	45.7	63.5	-17.8	PASS	-17.8	100	35	
8188.1	25.7	16.1	25	50.7	83.5	-32.8	PASS	41.1	63.5	-22.4	PASS	-22.4	169	169	
9290.8	25	16	25.9	50.9	83.5	-32.6	PASS	41.9	63.5	-21.6	PASS	-21.6	152	120	
9806.1	24.8	15.2	26.7	51.5	83.5	-32	PASS	41.9	63.5	-21.6	PASS	-21.6	161	143	

Curtis Straus - a Bureau Veritas Company				Work Order - R3478											
Radiated Emissions Electric Field 1m Distance				EUT Power Input - 3.6V DC											
6-18GHz Horizontal Data				Test Site - CH-2											
Operator: ZJ				Conditions - 20.8°C; 30.4%RH; 983mBar											
Low Channel Black Antenna				EUT Maximum Frequency - 925MHz											
Monday 20-Dec 2017															
Frequency	Raw Peak Reading	Raw Avg Reading	Correction Factor	Adjusted Peak Amplitude	Pk Lim: FCC_pt15_109 ClassB_Peak	Peak Margin	Peak Test Results	Worst Peak Margin	Adjusted Avg Amplitude	Av Lim: FCC_pt15_109 ClassB_AVG	Avg Margin	Avg Results	Worst Avg Margin	Antenna Height	EUT Azimuth
(MHz)	(dB μ V)	(dB μ V)	(dB/m)	(dB μ V/m)	(dB μ V/m)	(dB)	(Pass/Fail)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	(Pass/Fail)	(dB)	(cm)	(degrees)
7240.1	50.8	47.8	6.8	57.6	83.5	-25.9	PASS	-25.9	54.6	63.5	-8.9	PASS	-8.9	159	41
9331.1	43.2	34	9.5	52.7	83.5	-30.8	PASS	43.5	63.5	-20	PASS	-20	168	212	
9980.9	43.1	33.3	11.7	54.8	83.5	-28.7	PASS	45	63.5	-18.5	PASS	-18.5	100	71	

6GHz-10GHz - 905MHz Low Channel

**Different Preamps used for Horizontal and Vertical on this scan



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
 One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



Test Equipment Used for 30-1000MHz:

Rev. 1/3/2018

Spectrum Analyzers / Receivers /Preselectors		Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
Rental MXE EMI Receiver(1168255)		20Hz-8.4GHz	N9038A	Agilent	MY53290009	1168255	I	8/15/2018	8/15/2017
Preamps /Couplers Attenuators / Filters	2310 PA	1-1000MHz	PAM-103	COM-POWER	441175	2310	II	10/29/2018	10/29/2017
Antennas	Red-Brown Biog	30-2000MHz	JB1	Sunol	A0032406	1218	I	1/13/2019	1/13/2017
Meteorological Meters/Chambers	Weather Clock (Pressure Only) TH A#2084		BA928 HTC-1	Oregon Scientific HDE	C3166-1 831 2084	Asset 831 2084	Cat I II	Calibration Due 4/28/2018 3/23/2018	Calibrated on 4/28/2016 3/23/2017
Cables	Asset #2456 Asset #2457 Asset #2465	9KHz-18GHz 9KHz-18GHz 9KHz-18GHz		MegaPhase MegaPhase MegaPhase			Cat II II II	Calibration Due 10/29/2018 10/29/2018 10/29/2018	Calibrated on 10/29/2017 10/29/2017 10/29/2017

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.

Test Equipment Used for 1-18GHz:

Rev. 1/3/2018

Spectrum Analyzers / Receivers /Preselectors		Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
2093 MXE EMI Receiver Rental MXE EMI Receiver(1168255)		20Hz-26.5GHz 20Hz-8.4GHz	N9038A N9038A	Agilent Agilent	MY51210181 MY53290009	2093 1168255	I I	11/16/2018 8/15/2018	11/16/2017 8/15/2017
Radiated Emissions Sites	EMI Chamber 2	FCC Code 719150	IC Code 2762A-7	VCCI Code A-0015	Range 1-18GHz	Asset 1686	Cat I	Calibration Due 12/21/2018	Calibrated on 12/21/2016
Preamps /Couplers Attenuators / Filters	2111 HF Preamp Brown	Range 0.5-18GHz 1-10GHz	MN PAM-118A CS	Mfr COM-POWER CS	SN 551063 N/A	Asset 2111 1523	Cat II II	Calibration Due 11/19/2018 10/18/2018	Calibrated on 11/19/2017 10/18/2017
Antennas	Orange Horn	Range 1-18GHz	MN 3115	Mfr EMCO	SN 0004-6123	Asset 390	Cat I	Calibration Due 10/13/2018	Calibrated on 10/13/2016
Meteorological Meters/Chambers	Weather Clock (Pressure Only) TH A#2084		MN BA928 HTC-1	Mfr Oregon Scientific HDE	SN C3166-1 831 2084	Asset 831 2084	Cat I II	Calibration Due 4/28/2018 3/23/2018	Calibrated on 4/28/2016 3/23/2017
Cables	Asset #2458 Asset #2459 Asset #2464	Range 9KHz-18GHz 9KHz-18GHz 9KHz-18GHz		Mfr MegaPhase MegaPhase MegaPhase			Cat II II II	Calibration Due 10/29/2018 10/29/2018 10/29/2018	Calibrated on 10/29/2017 10/29/2017 10/29/2017

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.



Measurement Uncertainty

The listed uncertainties are the worst case uncertainty for the entire range of measurement. Please note that the uncertainty values are provided for informational purposes only and are not used in determining the PASS/FAIL results.

Measurement	Expanded Uncertainty k=2	Maximum allowable uncertainty
Radiated Emissions (30-1000MHz) NIST CISPR	5.6dB 4.6dB	N/A 5.2dB (Ucispqr)
Radiated Emissions (1-26.5GHz)	4.6dB	N/A
Radiated Emissions (above 26.5GHz)	4.9dB	N/A
Magnetic Radiated Emissions	5.6dB	N/A
Conducted Emissions NIST CISPR	3.9dB 3.6dB	N/A 3.6dB (Ucispqr)
Telco Conducted Emissions (Current)	2.9dB	N/A
Telco Conducted Emissions (Voltage)	4.4dB	N/A
Electrostatic Discharge	11.5%	N/A
Radiated RF Immunity (Uniform Field)	1.6dB	N/A
Electrical Fast Transients	23.1%	N/A
Surge	23.1%	N/A
Conducted RF Immunity	3dB	N/A
Magnetic Immunity	12.8%	N/A
Dips and Interrupts	2.3V	N/A
Harmonics	3.5%	N/A
Flicker	3.5%	N/A
Radio frequency (@ 2.4GHz)	3.23×10^{-8}	1×10^{-7}
RF power, conducted	0.40dB	0.75dB
Maximum frequency deviation:		
• Within 300Hz and 6kHz of audio frequency / Within 6kHz and 25kHz of audio frequency	3.4% 0.3dB	5% 3dB
Adjacent channel power	1.9dB	3dB
Conducted spurious emission of transmitter, valid up to 12.75GHz	2.39dB	3dB
Conducted emission of receivers	1.3dB	3dB
Radiated emission of transmitter, valid up to 26.5GHz	3.9dB	6dB
Radiated emission of transmitter, valid up to 80GHz	3.3dB	6dB
Radiated emission of receiver, valid up to 26.5GHz	3.9dB	6dB
Radiated emission of receiver, valid up to 80GHz	3.3dB	6dB
Humidity	2.37%	5%
Temperature	0.7°C	1.0°C
Time	4.1%	10%
RF Power Density, Conducted	0.4dB	3dB
DC and low frequency voltages	1.3%	3%
Voltage (AC, <10kHz)	1.3%	2%
Voltage (DC)	0.62%	1%
The above reflects a 95% confidence level		



Conditions Of Testing

[Bureau Veritas Consumer Products Services, Inc., a Massachusetts corporation], and/or its affiliates (collectively, the "Company") will conduct, at the request of the Submitter ("Client"), the tests specified on the submitted Test Request Form or equivalent in accordance with, and subject to, the following terms and conditions (collectively, "Conditions"):

1. All orders for tests are subject to acceptance by the Company, and no order will constitute a binding commitment of the Company unless and until such order is accepted by it, as evidenced by the issuance of a written report ("Test Report") by the Company. The Test Report is issued solely by the Company, is intended for the exclusive use of Client and shall not be published, used for advertising purposes, copied or replicated for distribution to any other person or entity or otherwise publicly disclosed without the prior written consent of the Company. By submitting a request for services to the Company, Client consents to the disclosure to accreditation bodies of those records of Client relevant to the accreditation body's assessment of the Company's competence and compliance with relevant accreditation criteria. The Company shall not be liable for any loss or damage whatsoever resulting from the failure of the Company to provide its services within any time period for completion estimated by the Company. If Client anticipates using the Test Report in any legal proceeding, arbitration, dispute resolution forum or other proceeding, it shall so notify the Company prior to submitting the Test Report in such proceeding. The Company has no obligation to provide a fact or expert witness at such proceeding unless the Company agrees in advance to do so for a separate and additional fee.
2. The Test Report will set forth the findings of the Company solely with respect to the test samples identified therein. Unless specifically and expressly indicated in the Test Report, the results set forth in such Test Report are not intended to be indicative or representative of the quality or characteristics of the lot from which a test sample is taken, and Client shall not rely upon the Test Report as being so indicative or representative of the lot or of the tested product in general. The Test Report will reflect the findings of the Company at the time of testing only, and the Company shall have no obligation to update the Test Report after its issuance. The Test Report will set forth the results of the tests performed by the Company based upon the written information provided to the Company. The Test Report will be based solely on the samples and written information submitted to the Company by Client, and the Company shall not be obligated to conduct any independent investigation or inquiry with respect thereto.
3. The Company may, in its sole discretion, destroy samples which have been furnished to the Company for testing and which have not been destroyed in the course of testing. The Company may delegate the performance of all or a portion of the services contemplated hereunder to an affiliate, agent or subcontractor of the Company, and Client consents to such delegation.
4. These Conditions and the Test Report represent the entire understanding of the parties hereto with respect to the subject matter hereof and of the Test Report, and no modification, variance or extrapolation with respect thereto shall be permitted without the prior written consent of the Company.
5. The names, service marks, trademarks and copyrights of the Company and its affiliates, including the names "BUREAU VERITAS," "BUREAU VERITAS CONSUMER PRODUCTS SERVICES," "BVCPS", "MTL", "ACTS", "MTL-ACTS" and CURTIS-STRAUSS (collectively, the "Marks") are and shall remain the sole property of the Company or its affiliates and shall not be used by Client except solely to the extent that Client obtains the prior written approval of the Company and then only in the manner prescribed by the Company. Client shall not contest the validity of the Marks or take any action that might impair the value or goodwill associated with the Marks or the image or reputation of the Company or its affiliates.
6. Payment in full shall be due 30 days after the date of invoice. Interest shall be due on overdue amounts from the due date until paid at an interest rate of 1.5% per month or, if less, the maximum rate permitted by law. The Company reserves the right, at any time and from time to time, to revoke any credit extended to Client. Client shall reimburse the Company for any costs it incurs in collecting past due amounts, including court costs and fees and expenses of attorneys and collection agencies. The Test Report may not be used or relied upon by Client if and for so long as Client fails to pay when due any invoice issued by the Company or any affiliate of it to Client or any affiliate or subsidiary of Client together with interest and penalties, if any, accrued thereon.
7. The Company disclaims any and all responsibility or liability arising out of or in connection with e-mail transmissions of such information.
8. Client understands and agrees that the Company is neither an insurer nor a guarantor, that the Company does not take the place of Client or any designer, manufacturer, agent, buyer, distributor or transportation or shipping company, and that the Company disclaims all liability in such capacities. Client further understands that if it seeks assurance against loss or damage, it should obtain appropriate insurance.
9. Client agrees that the Company, by providing the services, does not take the place of Client nor any third party, nor does the Company release them from any of their obligations, nor does the Company otherwise assume, abridge, abrogate or undertake to discharge any duty of any third party to Client or any duty of Client or any third party to any other third party, and Client will not release any third party from its obligations and duties with respect to the tested goods.
10. Client shall, on a timely basis, (a) provide adequate instructions to the Company in order to enable the Company to perform properly its services, (b) provide, or cause Client's suppliers and contractors to provide, the Company with all documents necessary to enable the Company to perform its services, (c) furnish the Company with all relevant information regarding Client's intended use and purposes of the tested goods, (d) advise the Company of essential dates and deadlines relevant to the tested goods and (e) fully exercise all rights and remedies available to Client against third parties in respect of the tested goods.
11. The Company shall undertake due care and ordinary skill in the performance of its services to Client, and the Company shall accept responsibility only were such skill has not been exercised and, even in such event, only to the extent of the limitation of liability set forth herein.
12. If Client desires to assert a claim arising from or relating to (i) the performance, purported performance or non-performance of any services by the Company or (ii) the sale, resale, manufacture, distribution or use of any tested goods, it must submit that claim to the Company in a writing that sets forth with particularity the basis for such claim within 60 days from discovery of the potential claim and not more than six months after the date of issuance of the Test Report to Client. Client waives any and all such claims



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828

page 33 of 34



including, without limitation, claims that the Test Report is inaccurate, incomplete or misleading or that additional or different testing is required, unless and then only to the extent that Client submits a written claim to the Company within both such time periods.

13. CLIENT SHALL, EXCEPT TO THE EXTENT OF COMPANY'S LIABILITY TO CLIENT HEREUNDER (WHICH IN NO EVENT SHALL EXCEED THE LIMITATION OF LIABILITY HEREIN), HOLD HARMLESS AND INDEMNIFY THE COMPANY, ITS AFFILIATES AND THEIR RESPECTIVE DIRECTORS, OFFICERS, EMPLOYEES, AGENTS AND SUBCONTRACTORS AGAINST ALL ACTUAL OR ALLEGED THIRD PARTY CLAIMS FOR LOSS, DAMAGE OR EXPENSE OF WHATSOEVER NATURE AND HOWSOEVER ARISING FROM OR RELATING TO (i) THE PERFORMANCE, PURPORTED PERFORMANCE OR NON-PERFORMANCE OF ANY SERVICES BY THE COMPANY OR (ii) THE SALE, RESALE, MANUFACTURE, DISTRIBUTION OR USE OF ANY TESTED GOODS.

14. EXCEPT AS MAY OTHERWISE BE EXPRESSLY AGREED TO IN WRITING BY THE COMPANY AND NOTWITHSTANDING ANY PROVISION TO THE CONTRARY CONTAINED HEREIN OR IN ANY TEST REPORT, NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR USE, IS MADE.

15. (A) IN NO EVENT WHATSOEVER SHALL THE COMPANY BE LIABLE FOR ANY CONSEQUENTIAL, SPECIAL, INCIDENTAL, EXEMPLARY OR PUNITIVE DAMAGES IN CONNECTION WITH, RELATING TO OR ARISING OUT OF THE TEST REPORT OR THE SERVICES PROVIDED BY THE COMPANY HEREUNDER, INCLUDING WITHOUT LIMITATION LOSS OF OR DAMAGE TO PROPERTY; LOSS OF INCOME, PROFIT OR USE; OR ANY CLAIMS OR DEMANDS MADE AGAINST CLIENT OR ANY OTHER PERSON BY ANY THIRD PARTY IN CONNECTION WITH, RELATING TO OR ARISING OUT OF THE SERVICES PROVIDED BY THE COMPANY HEREUNDER.

(B) NOTWITHSTANDING ANY PROVISION TO THE CONTRARY CONTAINED HEREIN, AND IN RECOGNITION OF THE RELATIVE RISKS AND BENEFITS TO CLIENT AND THE COMPANY ASSOCIATED WITH THE TESTING SERVICES CONTEMPLATED HEREBY, THE RISKS HAVE BEEN ALLOCATED SUCH THAT UNDER NO CIRCUMSTANCES WHATSOEVER SHALL THE LIABILITY OF THE COMPANY TO CLIENT OR ANY THIRD PARTY IN RESPECT OF ANY CLAIM FOR LOSS, DAMAGE OR EXPENSE, OF WHATSOEVER NATURE OR MAGNITUDE, AND HOWSOEVER ARISING, EXCEED AN AMOUNT EQUAL TO FIVE (5) TIMES THE AMOUNT OF THE FEES PAID TO THE COMPANY FOR THE SPECIFIC SERVICES WHICH GAVE RISE TO SUCH CLAIM OR U.S.\$10,000, WHICHEVER IS THE LESSER AMOUNT.

16. The Company shall not be liable for any loss or damage resulting from any delay or failure in performance of its obligations hereunder resulting directly or indirectly from any event of force majeure or any event outside the control of the Company. If any such event occurs, the Company may immediately cancel or suspend its performance hereunder without incurring any liability whatsoever to Client.

17. Company's services, including these Conditions, shall be governed by, and construed in accordance with, the local laws of the country where the Company performs the tests or, in the case of tests performed in the United States of America, the laws of Massachusetts without regard to conflicts of laws principles. If any aspect(s) of these Conditions is found to be illegal or unenforceable, the validity, legality and enforceability of all remaining aspects of these Conditions shall not in any way be affected or impaired thereby. Any proceeding related to the subject matter hereof shall be brought, if at all, in the courts of the country where the Company performs the tests or, in the case of tests performed in the United States of America, in the courts of Massachusetts. Client waives the right to interpose any counterclaim or setoffs of any nature in any litigation arising hereunder.

Rev.160009121(2) #684340 v13CS



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828

page 34 of 34

