


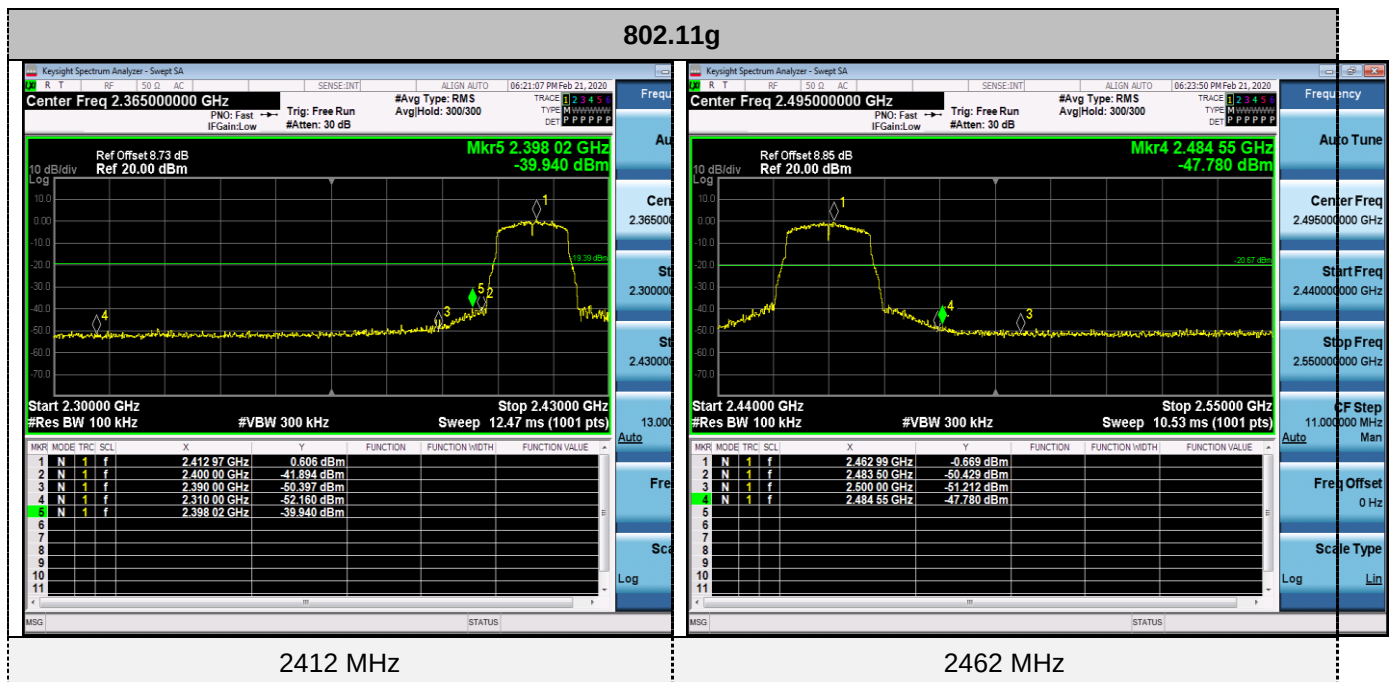
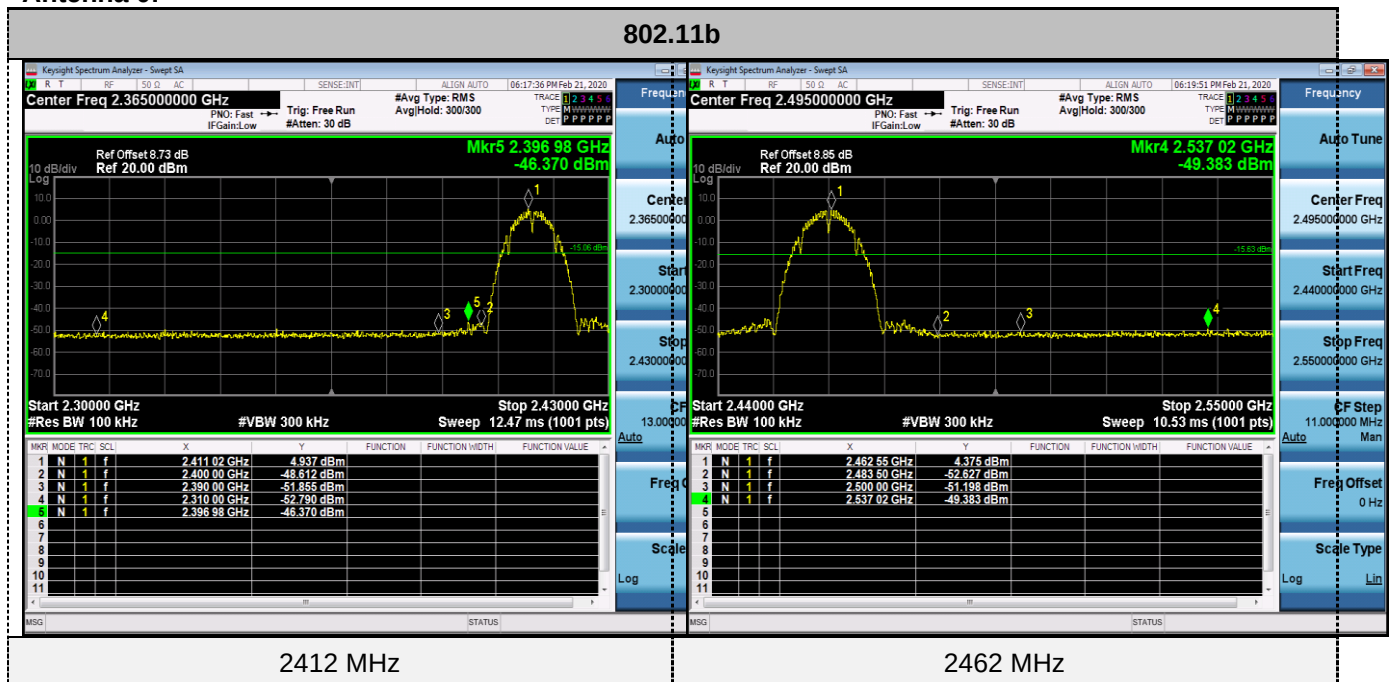
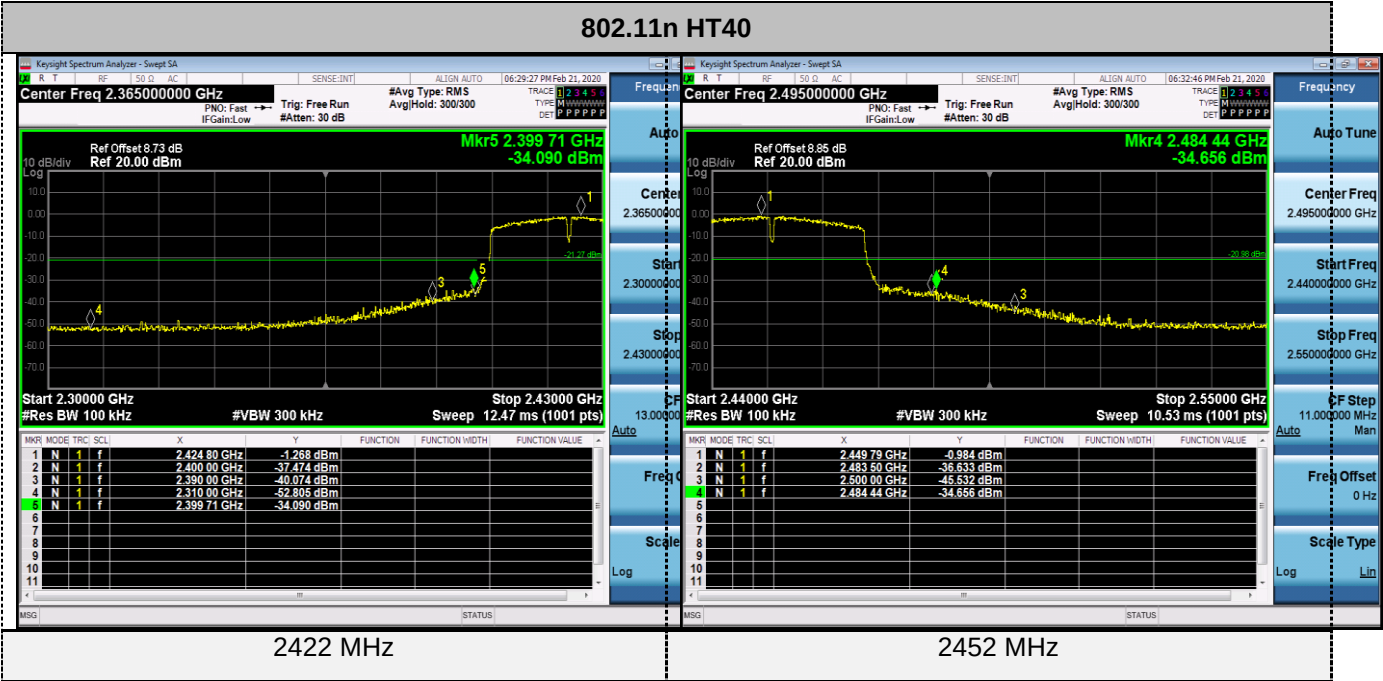


4.6.2 For Conducted Bandedge Measurement Antenna 0:

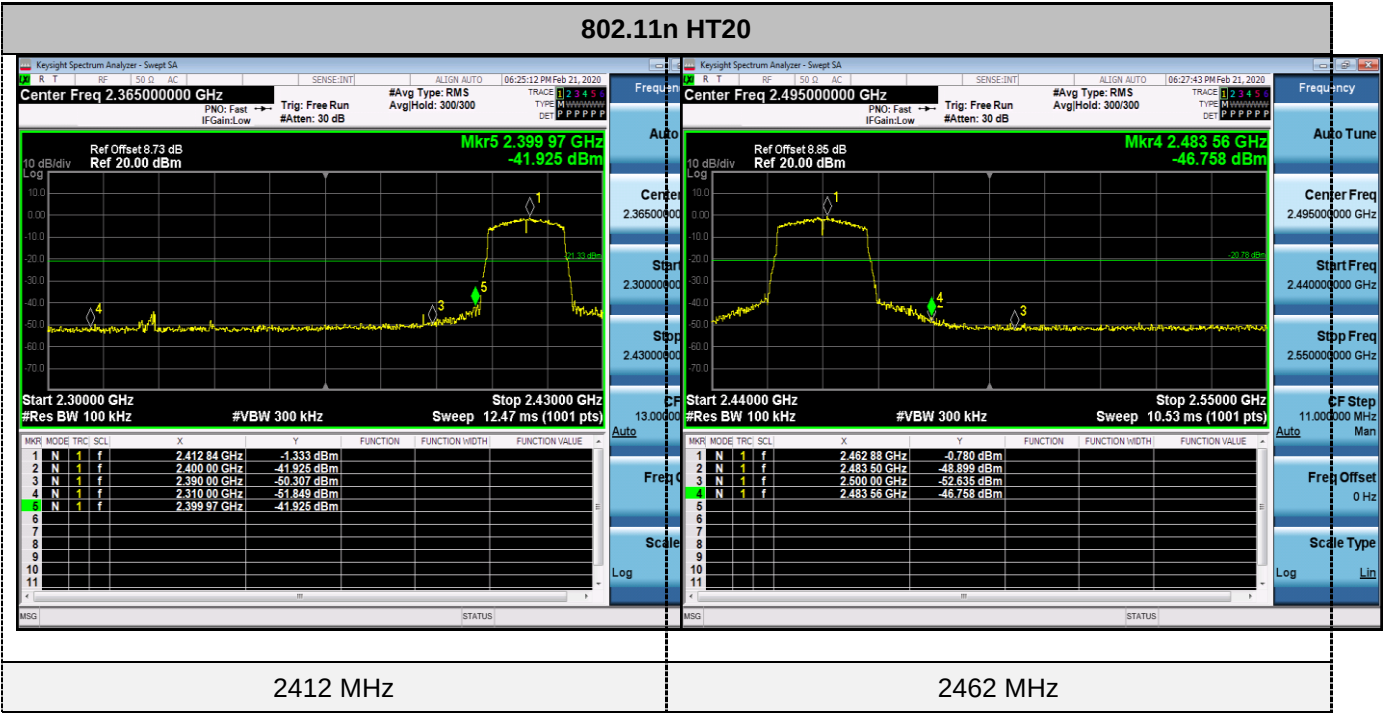

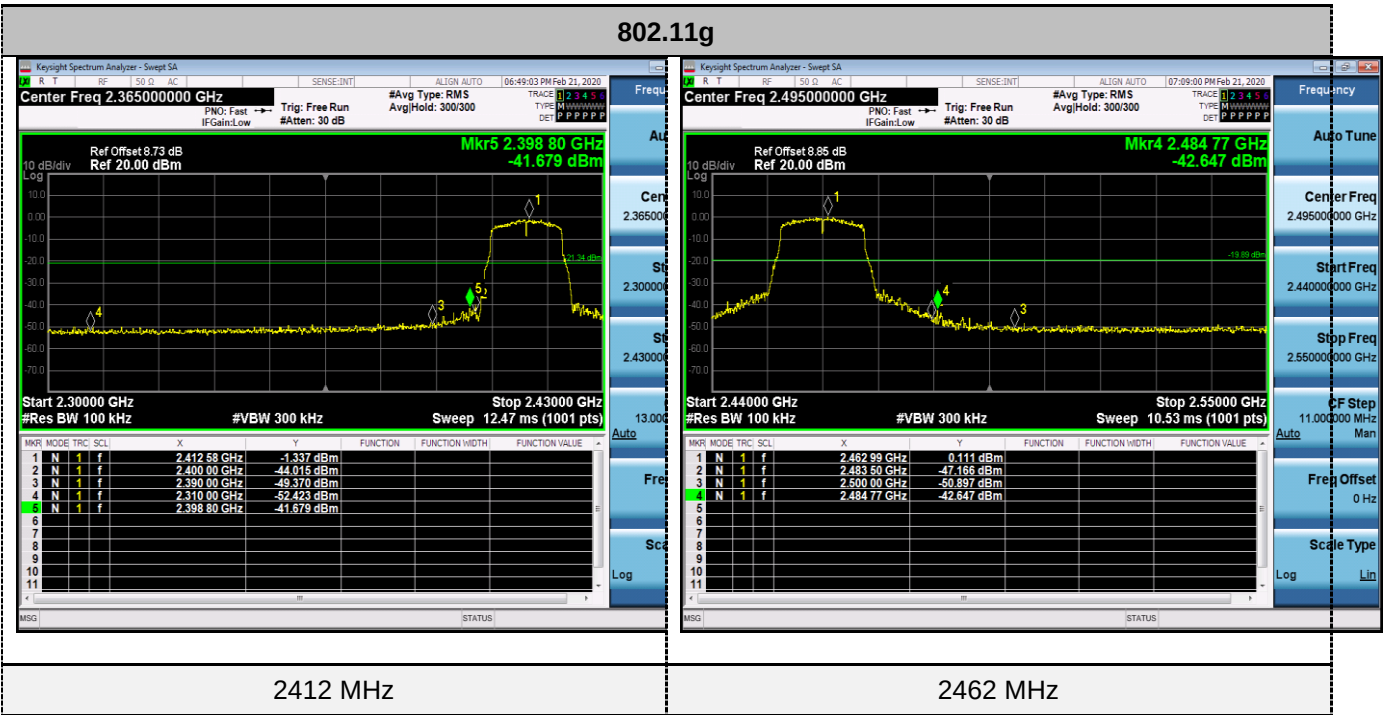

Antenna 1:

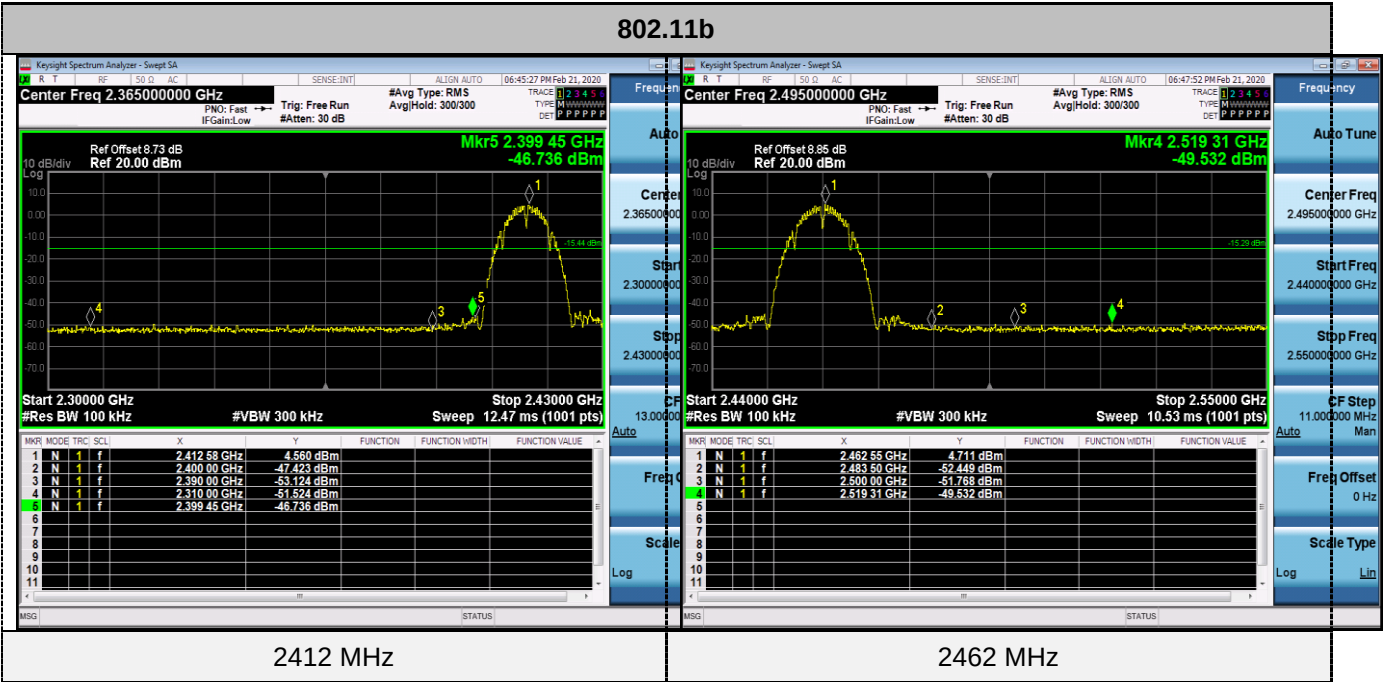

802.11n HT20



4.7. Antenna Requirement


Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Antenna Information

The antenna is PCB antenna, through the buckle stretched out, The directional gains of antenna used for transmitting is 1.8dBi.

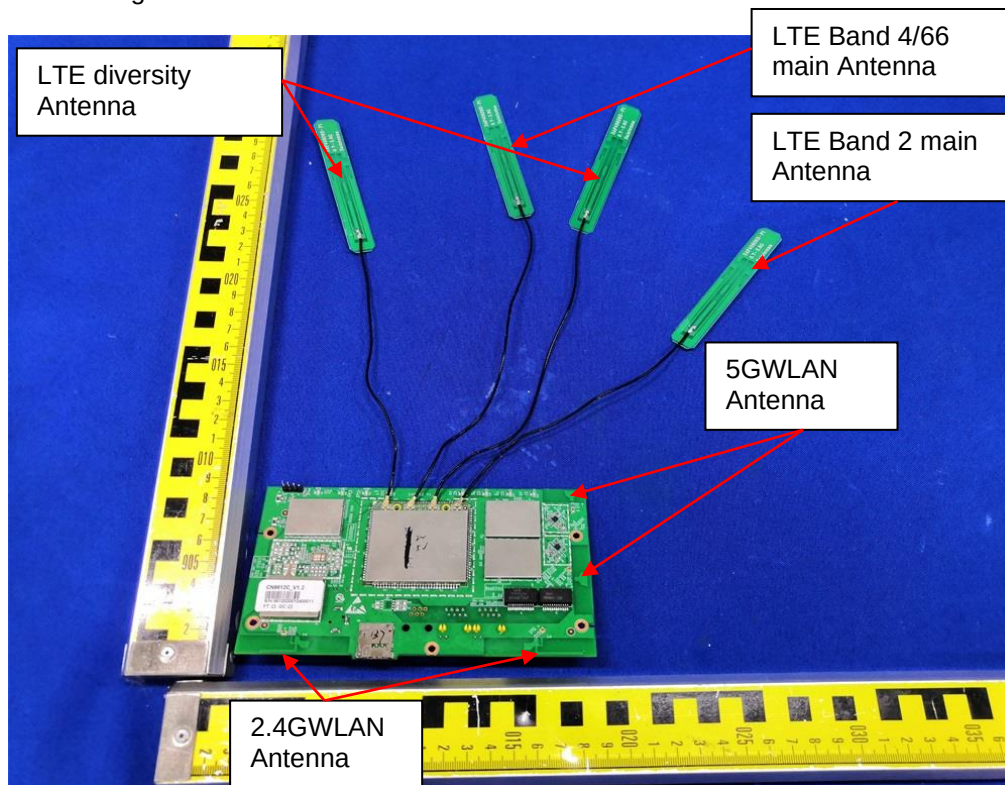


5. TEST SETUP PHOTOS OF THE EUT

Conducted Emission(AC Mains)



Radiated Emission(30MHz -1000MHz)

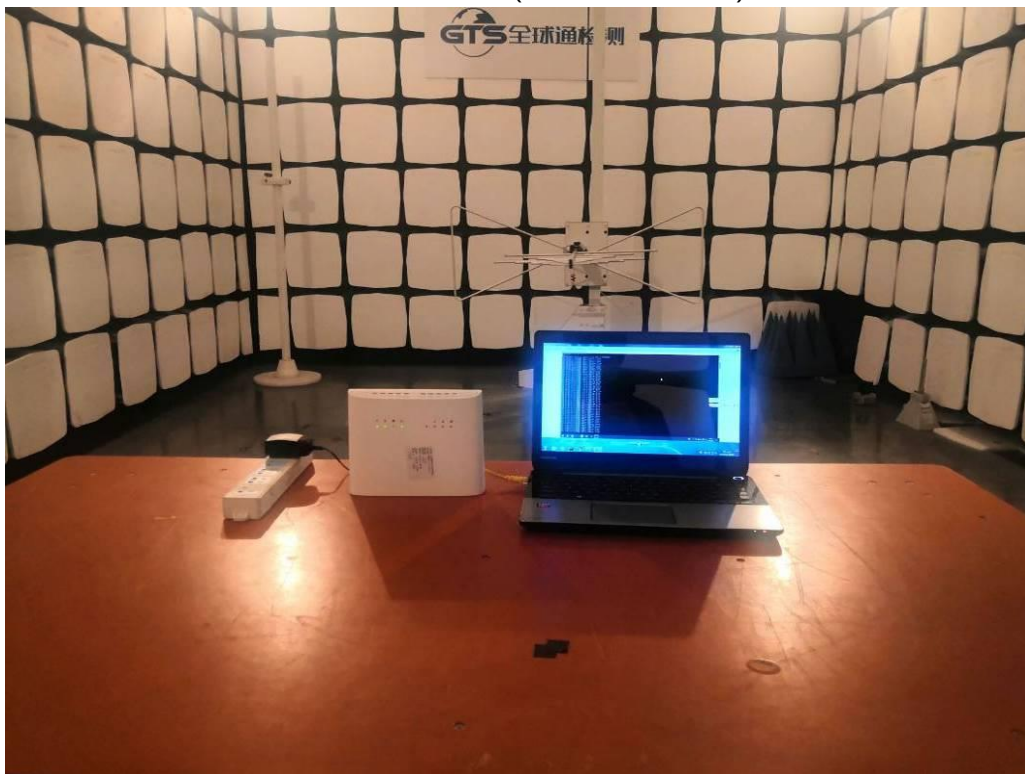

Radiated Emission(above 1GHz)



6. EXTERNAL AND INTERNAL PHOTOS OF THE EUT



Fig. 1

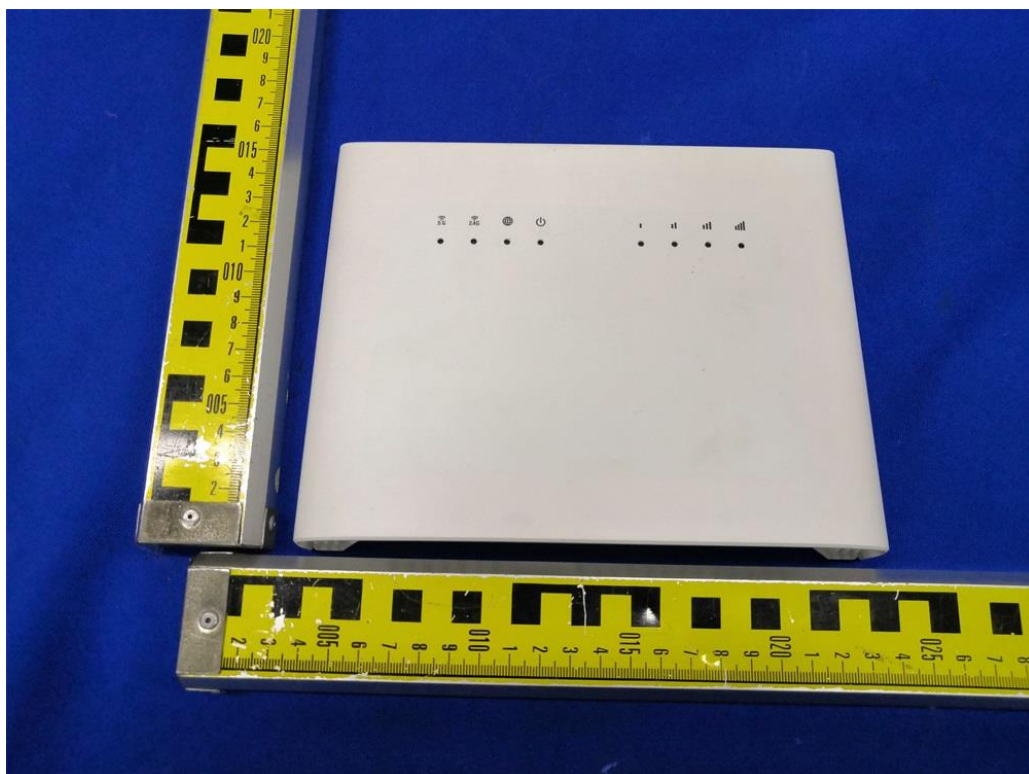


Fig. 2



Fig. 3



Fig. 4



Fig. 5



Fig. 6



Fig. 7



Fig. 8

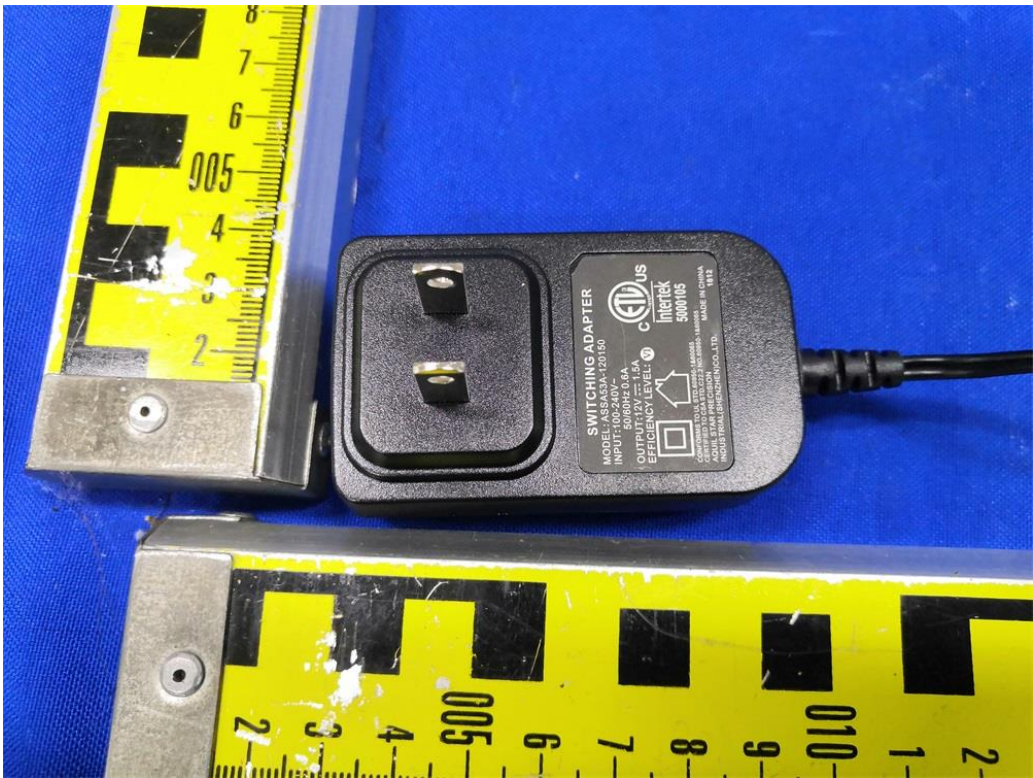


Fig. 9



Fig. 10

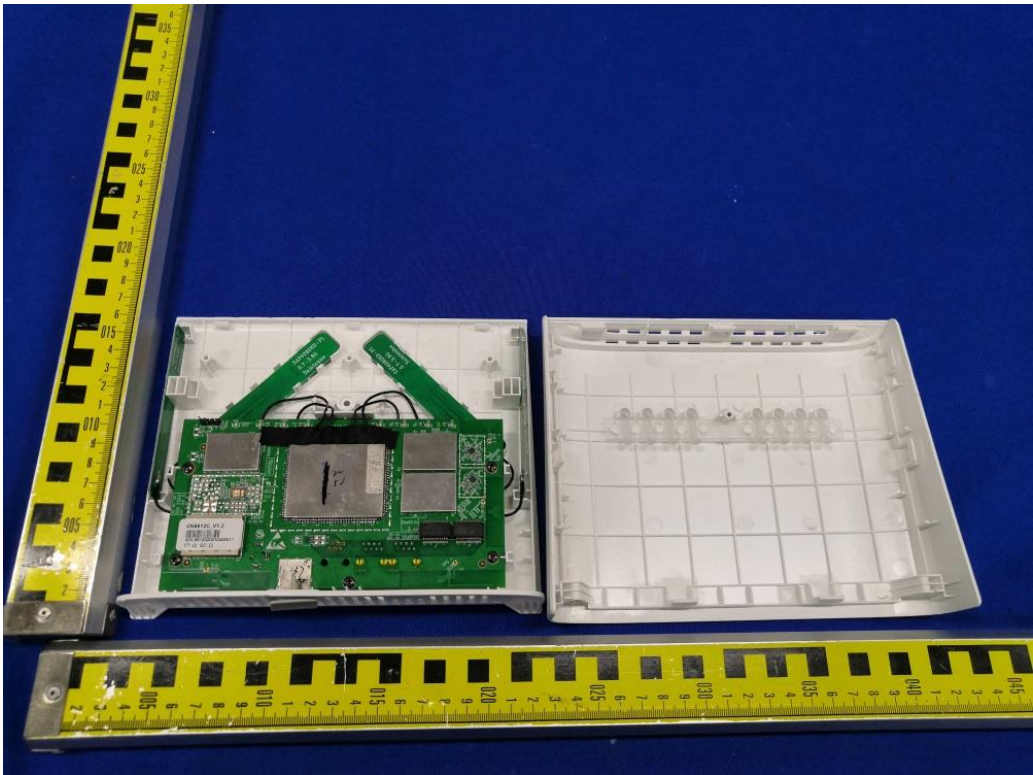


Fig. 11

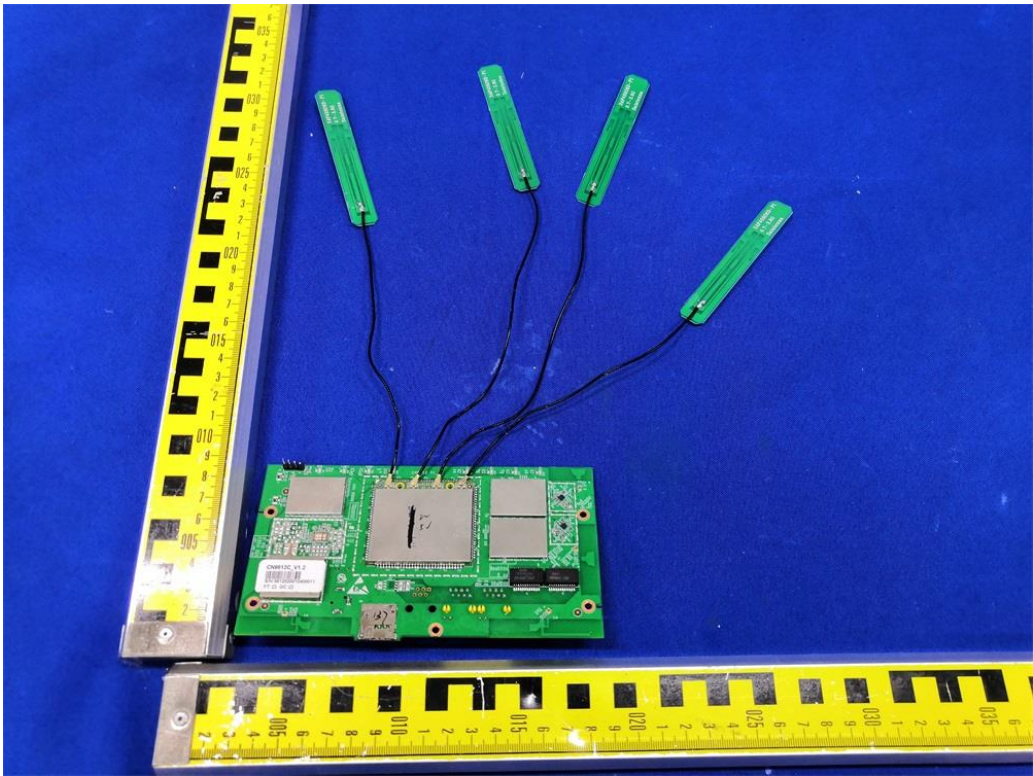


Fig. 12

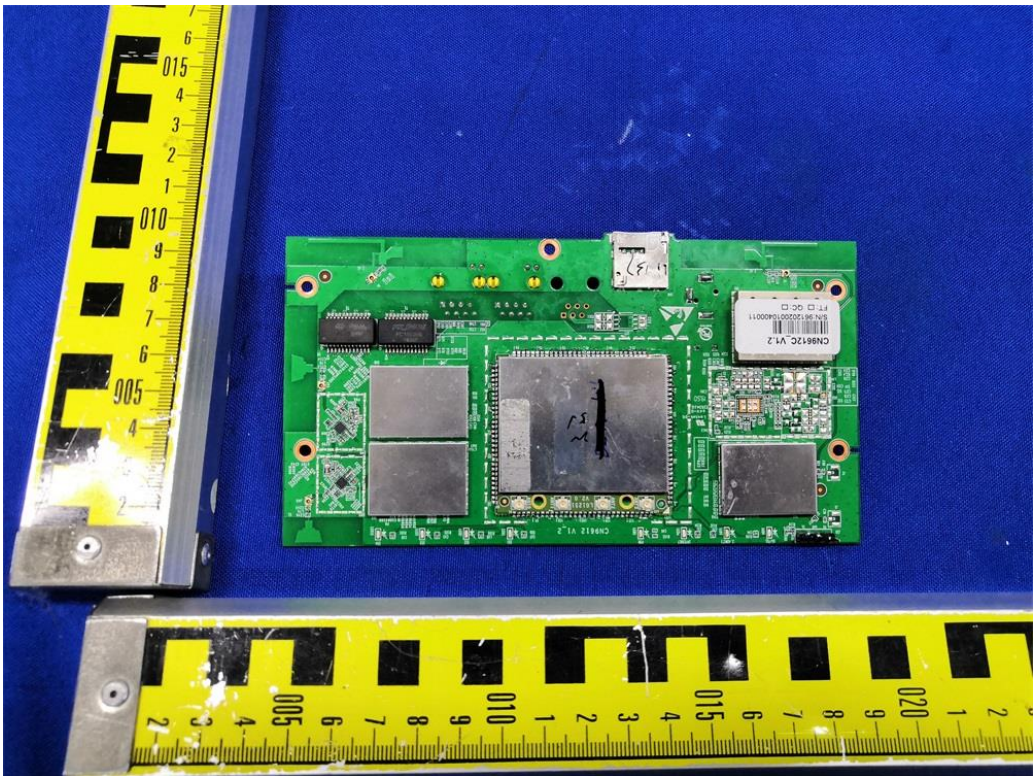


Fig. 13

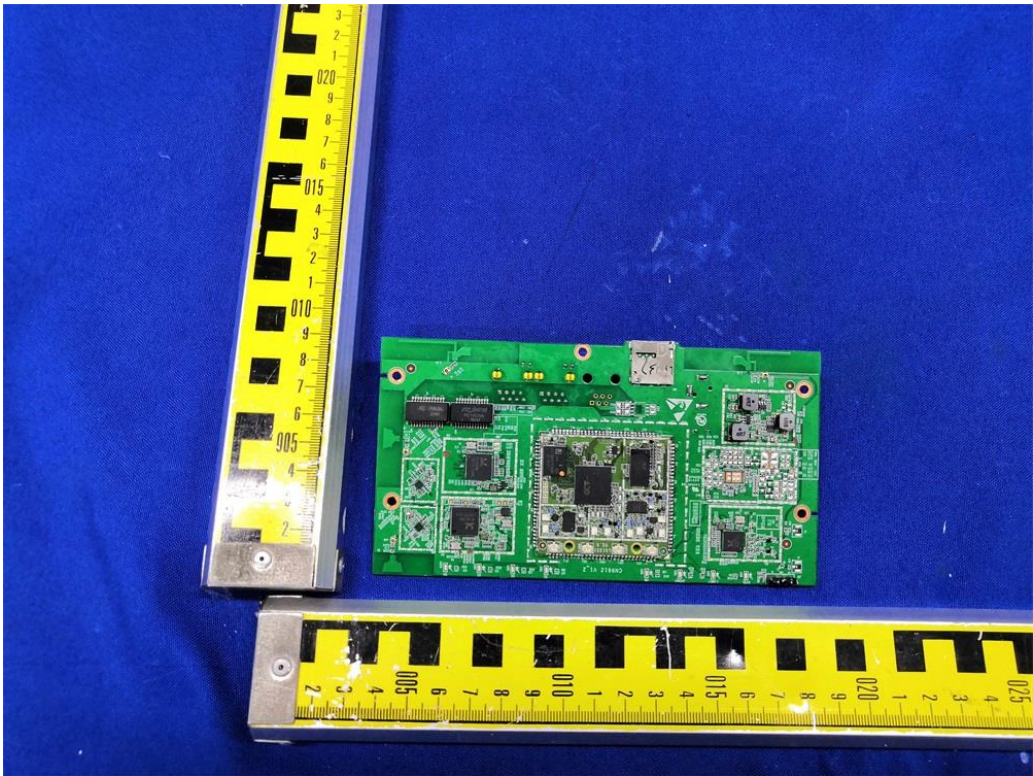


Fig. 14

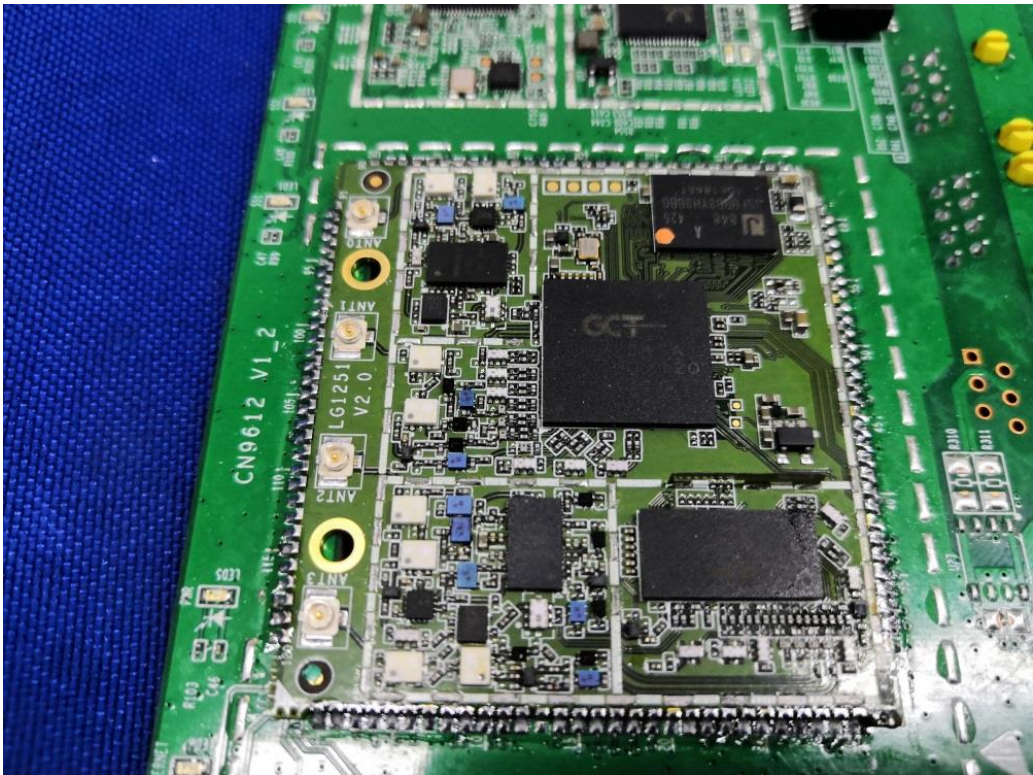


Fig. 15



Fig. 16

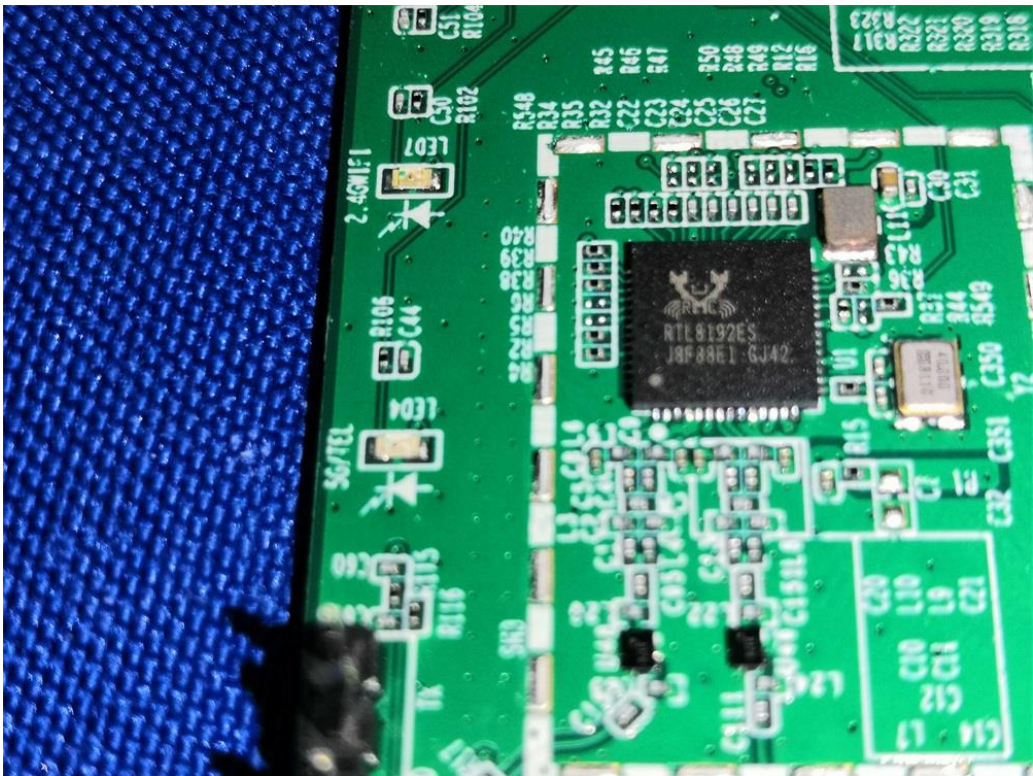


Fig. 17

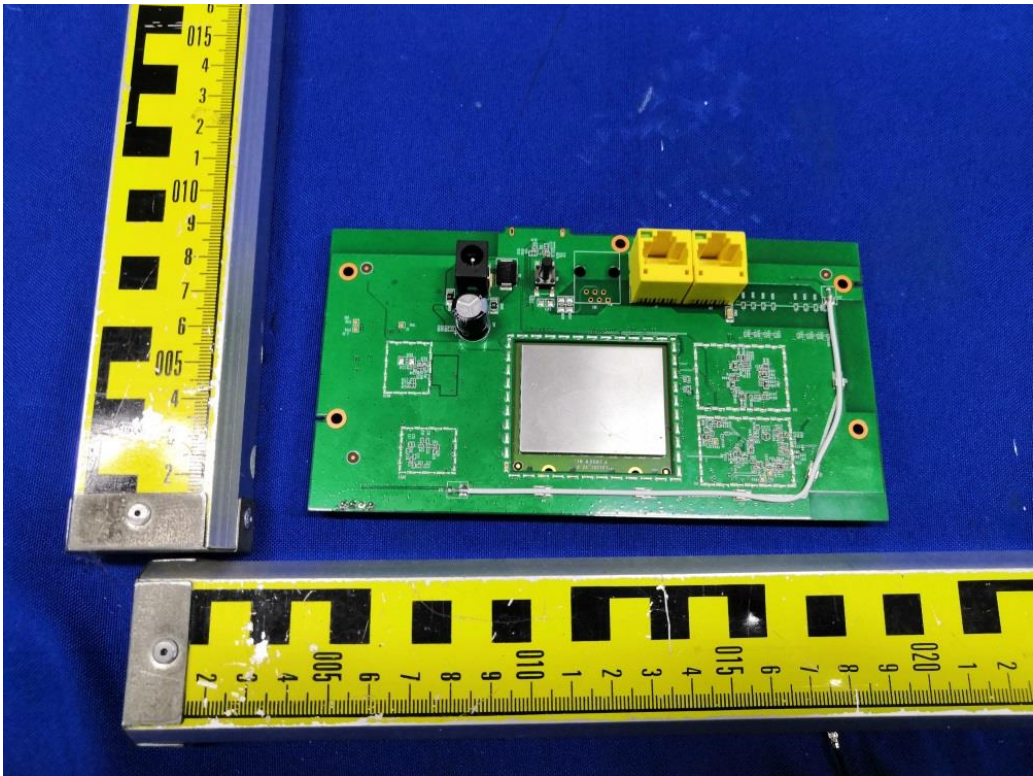


Fig. 18

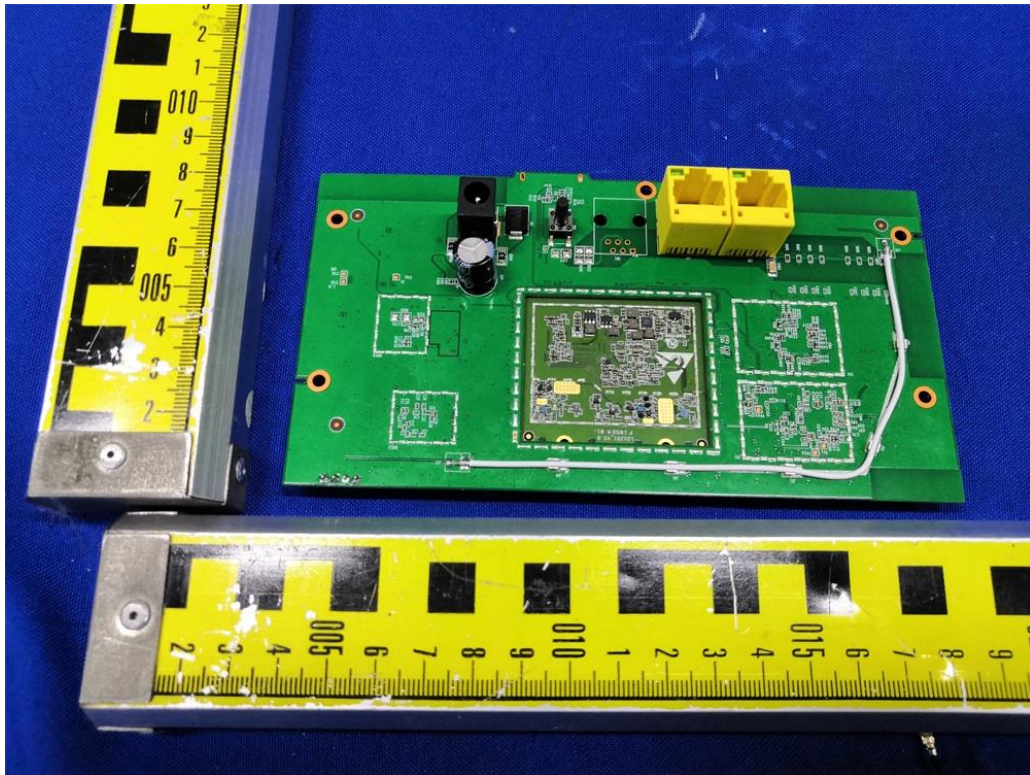


Fig. 19

.....End of Report.....