

FCC Radio Test Report FCC ID: WA5WH32G

This report concerns (check one): ⊠Original Grant □Class II Change

Project No. : 1605C203 Equipment : Weather Station

Model Name : WH32G

Applicant: Fine Offset Electronics Co., LTD

Address: 2/F., Building no.3, Ping Shan Mingqi Industrial Park,

Xili Town, Nanshan Distri. Shenzhen, Guangdong,

China

Date of Receipt : May 24, 2016

Date of Test : May 24, 2016 ~ Jun. 08, 2016

Issued Date : Jun. 14, 2016 Tested by : BTL Inc.

Testing Engineer : Shawn

(Shawn Xiao)

Technical Manager : Savid Mao

(David Mao)

Authorized Signatory : ______

(Steven Lu)

BTL INC.

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000

Report No.: BTL-FCCP-1-1605C203 Page 1 of 35



Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL**'s authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Report No.: BTL-FCCP-1-1605C203 Page 2 of 35



Page 3 of 35

Table of Contents	Page
1 . CERTIFICATION	6
2 . SUMMARY OF TEST RESULTS	7
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
3 . GENERAL INFORMATION	9
3.1 GENERAL DESCRIPTION OF EUT	9
3.2 DESCRIPTION OF TEST MODES	10
3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTE	D 10
3.4 DESCRIPTION OF SUPPORT UNITS	10
4 . EMC EMISSION TEST	11
4.1 CONDUCTED EMISSION MEASUREMENT	11
4.1.1 POWER LINE CONDUCTED EMISSION	11
4.1.2 TEST PROCEDURE 4.1.3 DEVIATION FROM TEST STANDARD	11 11
4.1.4 TEST SETUP	12
4.1.5 EUT OPERATING CONDITIONS	12
4.1.6 EUT TEST CONDITIONS 4.1.7 TEST RESULTS	12 12
4.2 RADIATED EMISSION MEASUREMENT	13
4.2.1 RADIATED EMISSION LIMITS	13
4.2.2 TEST PROCEDURE	15
4.2.3 DEVIATION FROM TEST STANDARD 4.2.4 TEST SETUP	15 16
4.2.5 EUT OPERATING CONDITIONS	16 17
4.2.6 EUT TEST CONDITIONS	17
4.2.7 TEST RESULTS (BELOW 30MHz)	17
4.2.8 TEST RESULTS (30 TO 1000 MHz) 4.2.9 TEST RESULTS (ABOVE 1000 MHz)	17 17
·	
5 . BANDWIDTH TEST 5.1 TEST PROCEDURE	18 18
5.2 DEVIATION FROM STANDARD	18
5.3 TEST SETUP	18
5.4 EUT OPERATION CONDITIONS	18
5.5 EUT TEST CONDITIONS 5.6 TEST RESULTS	18 18
6 . MEASUREMENT INSTRUMENTS LIST AND SETTING	19
7 . EUT TEST PHOTO	20
ATTACHMENT A - CONDUCTED EMISSION	23

Report No.: BTL-FCCP-1-1605C203



Table	e of Contents	Page
ATTACHMENT B - RADIATED EN	MISSION (9KHZ to 30MHZ)	24
ATTACHMENT C - RADIATED EI	VISSION (30MHZ TO 1000MHZ)	26
ATTACHMENT D - RADIATED EI	VISSION (ABOVE 1000MHZ)	29
ATTACHMENT E - BANDWIDTH		34

Report No.: BTL-FCCP-1-1605C203 Page 4 of 35



REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCP-1-1605C203	Original Issue.	Jun. 14, 2016

Report No.: BTL-FCCP-1-1605C203 Page 5 of 35



1. CERTIFICATION

Equipment : Weather Station

Brand Name : N/A Model Name : WH32G

Applicant : Fine Offset Electronics Co., LTD Manufacturer : Fine Offset Electronics Co., LTD

Address : 2/F., Building no.3, Ping Shan Mingqi Industrial Park, Xili Town, Nanshan

Distri. Shenzhen, Guangdong, China

Date of Test : May 24, 2016 ~ Jun. 08, 2016

Test Sample : Engineering Sample

Standard(s) : FCC Part15, Subpart C(15.249)/ ANSI C63.10-2013

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-1-1605C203) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

Report No.: BTL-FCCP-1-1605C203 Page 6 of 35



2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC Part15, Subpart C (15.249)				
StandardSection	Judgment	Remark		
15.207	207 Conducted Emission		Note (1)	
15.209 15.249	Radiated Spurious Emission	PASS		
-	Bandwidth	PASS		

NOTE:

- (1)"N/A" denotes test is not applicable in this test report.
- (2) EUT is used new battery.

Report No.: BTL-FCCP-1-1605C203 Page 7 of 35



2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

BTL's test firm number for FCC: 319330

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{cispr} requirement.

The reported uncertainty of measurement $\mathbf{y} \pm \mathbf{U}$, where expanded uncertainty \mathbf{U} is based on astandard uncertainty multiplied by a coverage factor of $\mathbf{k=2}$, providing a level of confidence of approximately $\mathbf{95}\%$.

A. Radiated Measurement:

Test Site	Method	Method Measurement Frequency Range		U,(dB)	NOTE
		9KHz~30MHz	V	3.79	
		9KHz~30MHz	Н	3.57	
		30MHz ~ 200MHz	V	3.82	
		30MHz ~ 200MHz	Н	3.78	
DG-CB03	B03 CISPR	200MHz ~ 1,000MHz	V	4.10	
DG-CB03		200MHz ~ 1,000MHz	Н	4.06	
		1GHz~18GHz	V	3.12	
		1GHz~18GHz	Н	3.68	
		18GHz~40GHz	V	4.15	
		18GHz~40GHz	Н	4.14	

Report No.: BTL-FCCP-1-1605C203 Page 8 of 35



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Weather Station		
Brand Name	NA		
Model Name	WH32G		
Model Difference	N/A		
Draduat Deceriation	Operation Frequency	915 MHz	
	Modulation Technology	FSK	
Product Description	Data rate	17.2Kbps	
	Field Strength	90.59 dBuV/m	
Power Source	Supplied from 2*AA battery		
Power Rating	DC 3V		

Note

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. Channel List:

Channe	Frequency (MHz)	
01	915	

Table for Filed Antenna:

3.	Ant.	Manufacturer	Model Name	Antenna Type	Connector	Gain (dBi)
	1	N/A	N/A	Internel	N/A	2.15

Report No.: BTL-FCCP-1-1605C203 Page 9 of 35



3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX Mode

Final Test Mode	Description
Mode 1	TX Mode

3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

EUT	

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
-	-	-	-	-	-

Item	Shielded Type	Ferrite Core	Length	Note
-	-	-	-	-

Report No.: BTL-FCCP-1-1605C203 Page 10 of 35



4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION (FREQUENCY RANGE 150KHZ-30MHZ)

Fraguency of Emission (MUz)	Conducted Limit (dBµV)			
Frequency of Emission (MHz)	Quasi-peak	Average		
0.15 -0.5	66 to 56*	56 to 46*		
0.50 -5.0	56	46		
5.0 -30.0	60	50		

Note:

(1) The limit of " * " decreases with the logarithm of the frequency

The following table is the setting of the receiver

Receiver Parameters	Setting		
Attenuation	10 dB		
Start Frequency	0.15 MHz		
Stop Frequency	30 MHz		
IF Bandwidth	9 kHz		

4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.


4.1.3 DEVIATION FROM TEST STANDARD

No deviation

Report No.: BTL-FCCP-1-1605C203 Page 11 of 35



4.1.4 TEST SETUP

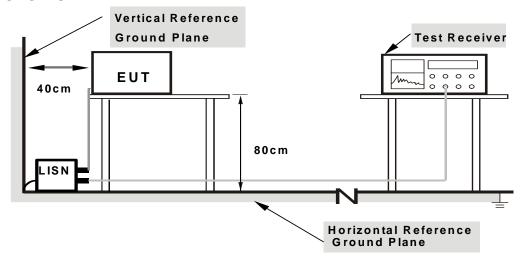

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

The EUT was programmed to be in continuously transmitting mode.

4.1.6 EUT TEST CONDITIONS

Temperature: N/A Relative Humidity: N/A Test Voltage: N/A

4.1.7 TEST RESULTS

Please refer to the Attachment A.

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of Note . If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform in this case, a "*" marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150KHz to 30MHz.

Report No.: BTL-FCCP-1-1605C203 Page 12 of 35



4.2 RADIATED EMISSION MEASUREMENT

4.2.1 RADIATED EMISSION LIMITS (FCC 15.209)

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

Harmonic emissions limits comply with below 54 dBuV/m at 3m. Other emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or comply with the radiated emissions limits specified in section 15.209(a) limit in the table below has to be followed.

Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission level (dBuV/m)=20log Emission level (uV/m).

LIMITS OF RADIATED EMISSION MEASUREMENT (FCC 15.209)

EDECLIENCY (MH-)	(dBuV/m) (at 3m)			
FREQUENCY (MHz)	PEAK	AVERAGE		
Above 1000	74	54		

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting		
Attenuation	Auto		
Start Frequency	1000 MHz		
Stop Frequency	10th carrier harmonic		

Receiver Parameter	Setting		
Attenuation	Auto		
Start ~ Stop Frequency	9kHz~90kHz for PK/AVG detector		
Start ~ Stop Frequency	90kHz~110kHz for QP detector		
Start ~ Stop Frequency	110kHz~490kHz for PK/AVG detector		
Start ~ Stop Frequency	490kHz~30MHz for QP detector		
Start ~ Stop Frequency	30MHz~1000MHz for QP detector		

Report No.: BTL-FCCP-1-1605C203 Page 13 of 35



DWELL TIME OF PERIODIC OPERATION MEASUREMENT

Duty Cycle = On Time/Total Time


T_{ON}:28.80 ms

T_{ON}+ T_{OFF}:(total time):100 ms

Duty cycle: 28.80%

Average Reading = Peak value + 20log(Duty cycle), AV=Peak-10.81

On Time

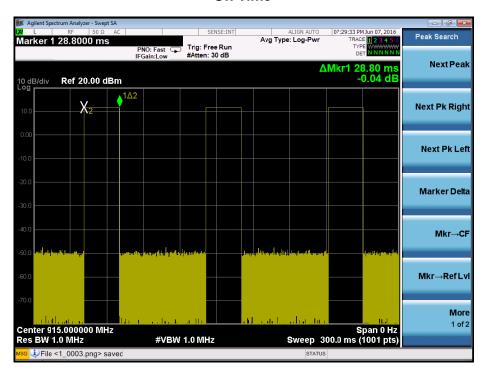

Total Time



Report No.: BTL-FCCP-1-1605C203 Page 14 of 35



4.2.2 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8 m or 1.5m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)


h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz) i. For the actual test configuration, please refer to the related Item –EUT Test Photos. 4.2.3 DEVIATION FROM TEST STANDARD No deviation

Report No.: BTL-FCCP-1-1605C203 Page 15 of 35




4.2.4 TEST SETUP

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

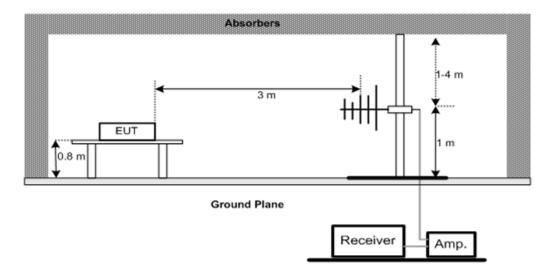


(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

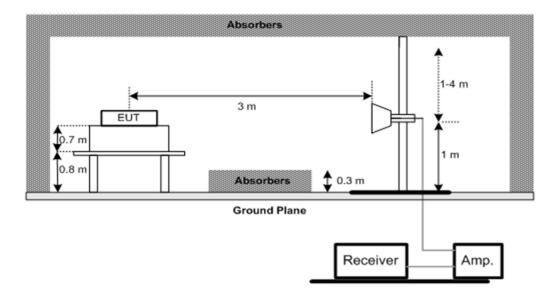

Report No.: BTL-FCCP-1-1605C203 Page 16 of 35



(C) For radiated emissions below 30MHz

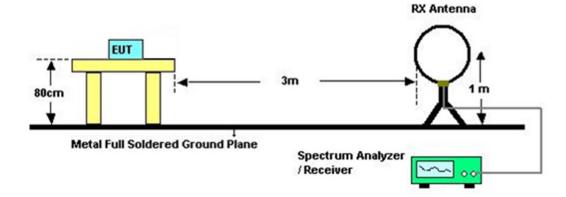

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

4.2.6 EUT TEST CONDITIONS

Temperature: 24°C Relative Humidity: 52% Test Voltage: DC 3V

4.2.7 TEST RESULTS (BELOW 30MHz)

Please refer to the Attachment B.

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor = 40 log (specific distance / test distance) (dB);.
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor..

4.2.8 TEST RESULTS (30 TO 1000 MHz)

Please refer to the Attachment C

4.2.9 TEST RESULTS (ABOVE 1000 MHz)

Please refer to the Attachment D

Remark:

- (1) EUT Orthogonal Axis:
 - "X" denotes Laid on Table; "Y" denotes Vertical Stand; "Z" denotes Side Stand
- (2) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna

Report No.: BTL-FCCP-1-1605C203 Page 17 of 35



5. BANDWIDTH TEST

5.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 3kHz, VBW=3kHz, Sweep time = Auto.

5.2 DEVIATION FROM STANDARD

No deviation.

5.3 TEST SETUP



5.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

5.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: DC 3V

5.6 TEST RESULTS

Please refer to the Attachment E

Report No.: BTL-FCCP-1-1605C203 Page 18 of 35



6. MEASUREMENT INSTRUMENTS LIST AND SETTING

	Radiated Emission Measurement									
Item Kind of Equipment Mar		Manufacturer	Type No.	Serial No.	Calibrated until					
1	Antenna	Schwarbeck	VULB9160	9160-3232	Mar. 27, 2017					
2	Amplifier	HP	8447D	2944A09673	Nov. 09, 2016					
3	Receiver	AGILENT	N9038A	MY52130039	Oct. 11, 2016					
4	4 Test Cable emci		LMR-400(30MHz- 1GHz)	C-01	Jun. 28, 2016					
5	5 Antenna ETS		3115	3115 00075789						
6	Amplifier Agilent		8449B	3008A02274	Nov. 01, 2016					
7	Receiver AGILENT		N9038A	MY52130039	Oct. 11, 2016					
8	3 Test Cable emci		EMC104-SM-SM- 10000(1GHz- 26.5GHz)	C-68	Jun. 28, 2016					
9	9 Controller CT		SC100	N/A	N/A					
10	Position Control	MF	MF-7802	MF780208416	N/A					
11	1 Active Loop R&S		HFH2-Z2 830749/020		Sep. 07, 2016					
12	12 Measurement Farad		EZ-EMC Ver.NB-03A1-01	N/A	N/A					

	Bandwidth								
Item	Item Kind of Equipment Manufacturer Type No. Serial No. Calibrated un								
1	EXA Spectrum Analyzer	Agilent	N9010A	MY50520044	Mar. 27, 2017				
2	Test Cable	emci	EMC104-SM-SM- 9000(0.01GHz- 26.5GHz)	C-100	N/A				

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

Report No.: BTL-FCCP-1-1605C203 Page 19 of 35



7. EUT TEST PHOTO

Radiated Measurement Photos

9KHz to 30MHz






Report No.: BTL-FCCP-1-1605C203 Page 20 of 35



Radiated Measurement Photos

30MHz to 1000MHz



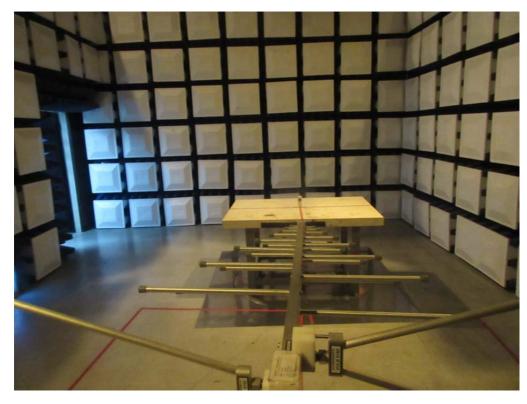


Report No.: BTL-FCCP-1-1605C203 Page 21 of 35



Radiated Measurement Photos

Above 1000MHz



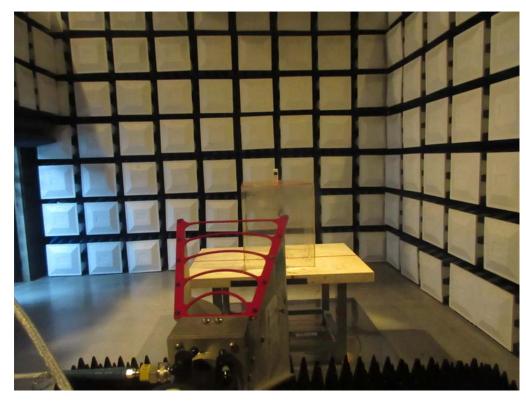

Report No.: BTL-FCCP-1-1605C203 Page 22 of 35




ATTACHMENT A - CONDUCTED EMISSION

Test Mode: N/A

Note: "N/A" denotes test is not applicable to this device.

Report No.: BTL-FCCP-1-1605C203 Page 23 of 35



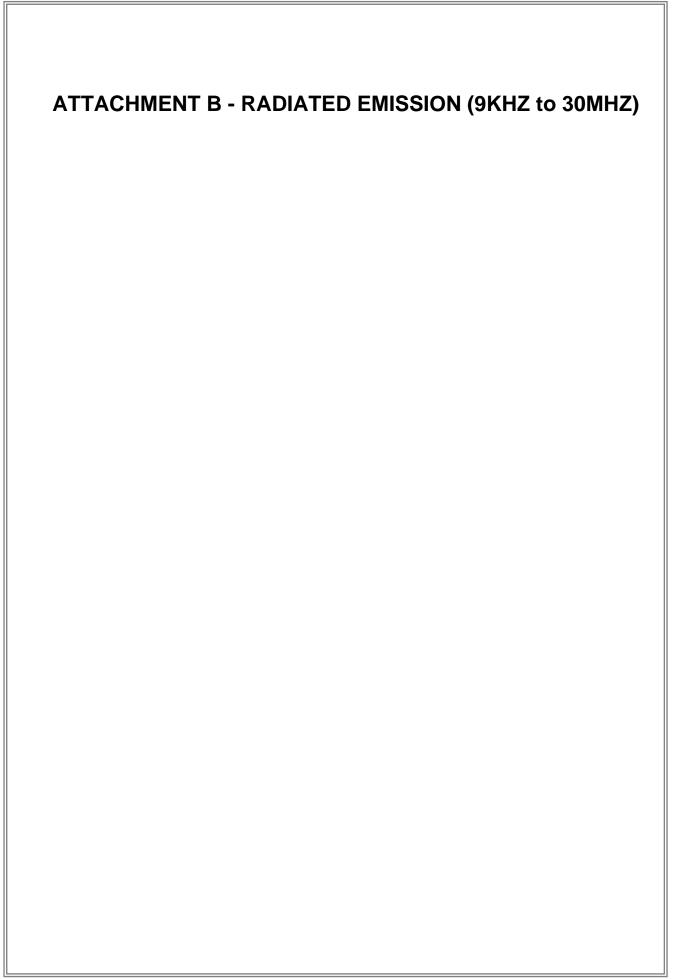

Report No.: BTL-FCCP-1-1605C203 Page 24 of 35




Test Mode: TX Mode

	I						
Frequency	Ant	Read level	Factor	Measured(FS)	Limit(QP)	Margin	Note
(MHz)	0°/90°	dBuV/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	Note
0.0094	0°	13.33	24.97	38.30	128.14	-89.84	AVG
0.0094	0°	14.30	24.97	39.27	148.14	-108.87	PEAK
0.0281	0°	6.76	23.79	30.55	118.63	-88.08	AVG
0.0281	0°	8.25	23.79	32.04	138.63	-106.59	PEAK
0.0365	0°	3.36	23.26	26.62	116.36	-89.74	AVG
0.0365	0°	5.57	23.26	28.83	136.36	-107.53	PEAK
0.0580	0°	1.42	22.24	23.66	112.34	-88.68	AVG
0.0580	0°	2.58	22.24	24.82	132.34	-107.52	PEAK
0.5089	0°	19.43	19.83	39.26	73.47	-34.21	QP
1.9519	0°	23.78	19.50	43.28	69.54	-26.26	QP

Frequency	Ant	Read level	Factor	Measured(FS)	Limit(QP)	Margin	
(MHz)	0°/90°	dBuV/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	Note
0.0119	90°	13.15	24.30	37.45	126.09	-88.64	AVG
0.0119	90°	14.80	24.30	39.10	146.09	-106.99	PEAK
0.0260	90°	7.21	23.92	31.13	119.30	-88.17	AVG
0.0260	90°	8.88	23.92	32.80	139.30	-106.50	PEAK
0.0431	90°	5.20	22.84	28.04	114.91	-86.88	AVG
0.0431	90°	6.15	22.84	28.99	134.91	-105.93	PEAK
0.0579	90°	1.48	22.24	23.72	112.35	-88.63	AVG
0.0579	90°	2.79	22.24	25.03	132.35	-107.32	PEAK
0.6211	90°	22.26	20.19	42.45	71.74	-29.29	QP
2.0540	90°	24.47	19.47	43.94	69.54	-25.60	QP


Report No.: BTL-FCCP-1-1605C203 Page 25 of 35



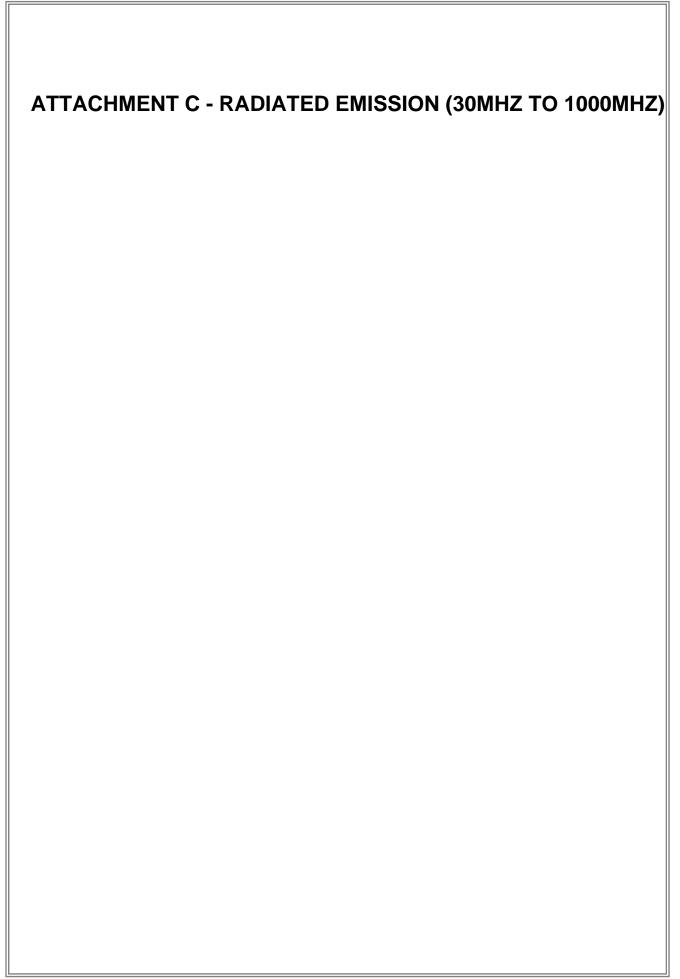


Report No.: BTL-FCCP-1-1605C203 Page 26 of 35



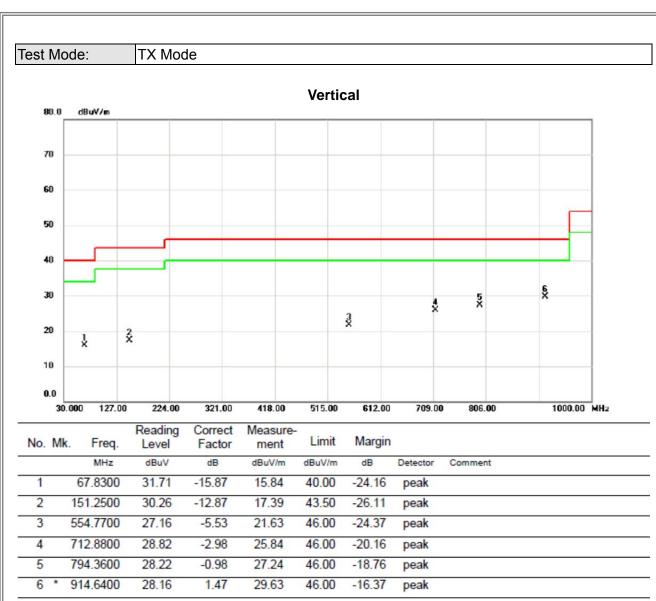


Report No.: BTL-FCCP-1-1605C203 Page 27 of 35



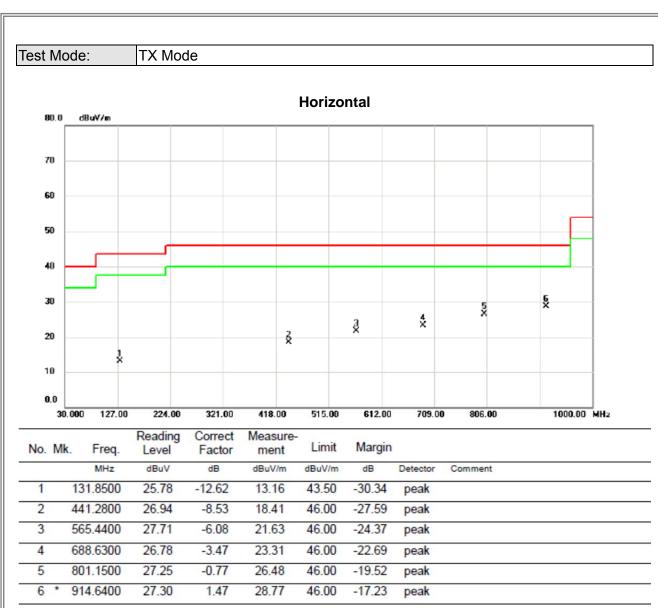

Report No.: BTL-FCCP-1-1605C203 Page 28 of 35




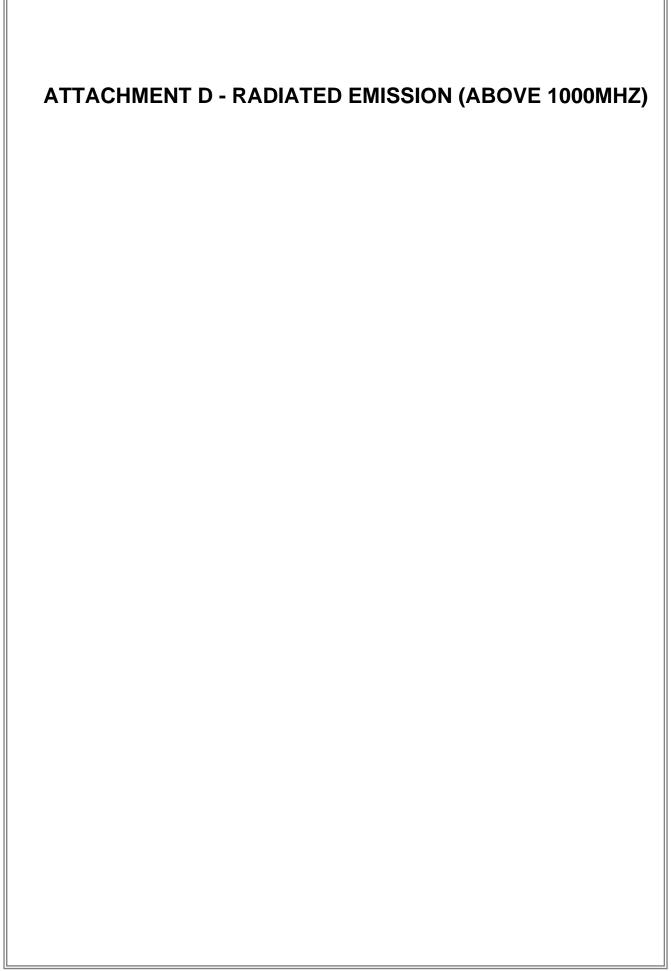

Report No.: BTL-FCCP-1-1605C203 Page 29 of 35



Orthogonal Axis: X
Test Mode: TX Mode

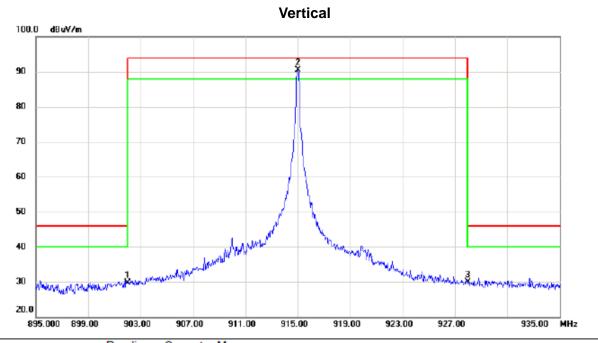


	No.	Mk.	Freq.		Correct Factor	Measure- ment	Limit	Margin		
			MHz	dBu∀	dB	dBuV/m	dBu\//m	dB	Detector	Comment
	1		902.0000	27.11	2.64	29.75	46.00	-16.25	peak	
•	2	*	915.0400	88.01	2.58	90.59	94.00	-3.41	peak	
	3		928.0000	27.35	2.52	29.87	46.00	-16.13	peak	

Report No.: BTL-FCCP-1-1605C203 Page 30 of 35



Orthogonal Axis: X
Test Mode: TX Mode



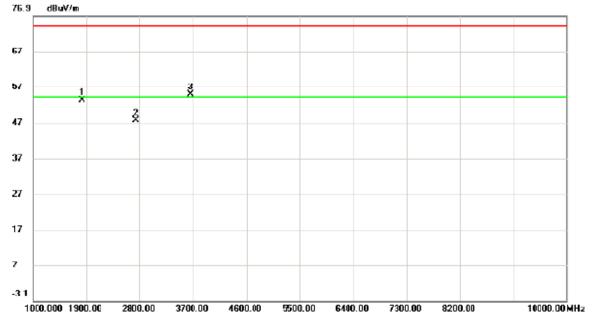

	No.	M	k. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
			MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
-	1		1828 000	57 55	-4 36	53 19	74 00	-20 81	peak	
-	2		2746.000	47.70	-0.03	47.67	74.00	-26.33	peak	
	3	*	3659.500	53.09	1.67	54.76	74.00	-19.24	peak	

Remark:

- (1) QP value is much lower than the limit, so AV value isn't shown on this test item.
- (2) The average value of fundamental frequency is:

 Average Reading = Peak value + 20log(Duty cycle), AV=Peak-10.81

Frequency	Peak value	AV value	AV Limit	Result
(MHz)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
3659.500	54.76	43.95	54.00	PASS

Report No.: BTL-FCCP-1-1605C203 Page 31 of 35



Orthogonal Axis: X
Test Mode: TX Mode


Horizontal 100.0 dBuV/m 90 80 70 60 50 40 20.0 935.00 MHz 895.000 899.00 903.00 907.00 911.00 915.00 919.00 923.00 927.00

	No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
			MHz	dBu∀	dB	dBuV/m	dBuV/m	dB	Detector	Comment
_	1		902.0000	26.50	2.64	29.14	46.00	-16.86	peak	
_	2	*	914.9600	87.02	2.58	89.60	94.00	-4.40	peak	
	3		928.0000	26.71	2.52	29.23	46.00	-16.77	peak	

Report No.: BTL-FCCP-1-1605C203 Page 32 of 35



Orthogonal Axis: X
Test Mode: TX Low Channel

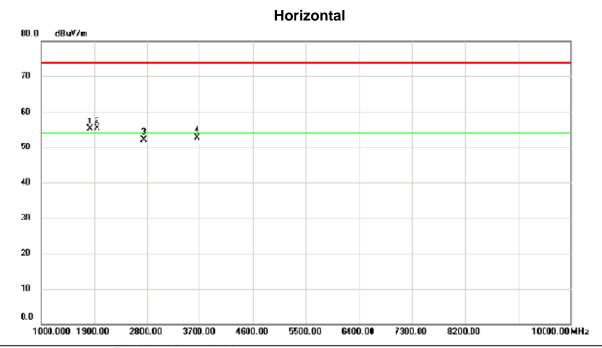

No.	М	k. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dΒ	Detector	Comment
1		1828.000	59.42	-4.36	55.06	74.00	-18.94	peak	
2	*	1949.500	58.72	-3.42	55.30	74.00	-18.70	peak	
3		2746.000	52.17	-0.03	52.14	74.00	-21.86	peak	
4		3659.500	50.99	1.67	52.66	74.00	21.34	peak	

Remark:

- (1) QP value is much lower than the limit, so AV value isn't shown on this test item.
- (2) The average value of fundamental frequency is:
 Average Reading = Peak value + 20log(Duty cycle), AV=Peak-10.81

Frequency	Peak value	AV value	AV Limit	Result	
(MHz)	(dBuV/m)	(dBuV/m)	(dBuV/m)		
1828.000	55.06	44.25	54.00	PASS	
1949.500	55.30	44.49	54.00	PASS	

Report No.: BTL-FCCP-1-1605C203 Page 33 of 35



ATTACHMENT E - BANDWIDTH	


Report No.: BTL-FCCP-1-1605C203 Page 34 of 35



Test Mode : TX Mode

Frequency	20dB Bandwidth	99% Occupied BW
(MHz)	(MHz)	(MHz)
915	0.841	

TX Mode

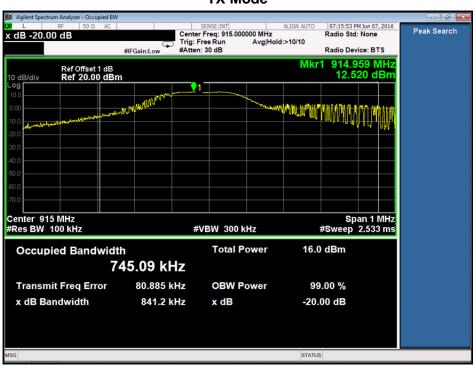

Report No.: BTL-FCCP-1-1605C203 Page 35 of 35