

APPLICATION CERTIFICATION
On Behalf of

Shenzhen Fine Offset Electronics Co., Ltd.

Weather Station (Transmitter)
Model No.: WS69CN, WH69

FCC ID: WA5WS69CN

Prepared for : Shenzhen Fine Offset Electronics Co., Ltd.
Address : 2/F., Building no.3, Ping Shan Minqi Industrial Park, Xili
Town, Nanshan District, Shenzhen City, China

Prepared by : Shenzhen Accurate Technology Co., Ltd.
Address : 1/F., Building A, Changyuan New Material Port, Science &
Industry Park, Nanshan District, Shenzhen, Guangdong, P.R.
China

Tel: (0755) 26503290
Fax: (0755) 26503396

Report Number : ATE20190313
Date of Test : March 16-27, 2019
Date of Report : March 27, 2019

TABLE OF CONTENTS

Description	Page
Test Report Certification	
1. GENERAL INFORMATION	4
1.1. Description of Device (EUT).....	4
1.2. Accessory and Auxiliary Equipment	4
1.3. Description of Test Facility	5
1.4. Measurement Uncertainty	5
2. MEASURING DEVICE AND TEST EQUIPMENT	6
3. SUMMARY OF TEST RESULTS.....	7
4. THE FIELD STRENGTH OF RADIATION EMISSION	8
4.1. Block Diagram of Test Setup.....	8
4.2. The Field Strength of Radiation Emission Measurement Limits.....	9
4.3. Configuration of EUT on Measurement	10
4.4. Operating Condition of EUT	10
4.5. Test Procedure	10
4.6. The Field Strength of Radiation Emission Measurement Results	10
5. 20DB OCCUPIED BANDWIDTH	13
5.1. Block Diagram of Test Setup.....	13
5.2. The Bandwidth of Emission Limit According To FCC Part 15 Section 15.231(c)	13
5.3. EUT Configuration on Measurement	13
5.4. Operating Condition of EUT	13
5.5. Test Procedure	13
5.6. Measurement Result	14
6. RELEASE TIME MEASUREMENT.....	15
6.1. Block Diagram of Test Setup.....	15
6.2. Release Time Measurement According To FCC Part 15 Section 15.231(e)	15
6.3. EUT Configuration on Measurement	15
6.4. Operating Condition of EUT	15
6.5. Test Procedure	15
6.6. Measurement Result	16
7. AVERAGE FACTOR MEASUREMENT	17
7.1. Block Diagram of Test Setup.....	17
7.2. Average factor Measurement according to ANSI C63.10-2013.....	17
7.3. EUT Configuration on Measurement	17
7.4. Operating Condition of EUT	17
7.5. Test Procedure	18
7.6. Measurement Result	18
8. ANTENNA REQUIREMENT.....	19
8.1. The Requirement	19
8.2. Antenna Construction	19

Test Report Certification

Applicant& address	Fine Offset Electronics Co., Ltd 2/F., Building no.3, Ping Shan Minqi Industrial Park, Xili Town, Nanshan District, Shenzhen City, China.
Manufacturer& address	Fine Offset Electronics Co., Ltd 2/F., Building no.3, Ping Shan Minqi Industrial Park, Xili Town, Nanshan District, Shenzhen City, China.
EUT Description	Weather Station (Transmitter)
Model No.	WS69CN, WH69

Measurement Procedure Used:

**FCC Rules and Regulations Part 15 Subpart C Section 15.231e
ANSI C63.10-2013**

The device described above is tested by Shenzhen Accurate Technology Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C Section 15.231a. The measurement results are contained in this test report and Shenzhen Accurate Technology Co., Ltd. is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Shenzhen Accurate Technology Co., Ltd.


Date of Test :

March 16-27, 2019

Date of Report :

March 27, 2019

Prepared by :



Approved & Authorized Signer :

(Sean Liu, Manager)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT : Weather Station (Transmitter)

Model Number : WS69CN, WH69
(Note: These samples are same except their appearance is different. So we prepare WS69CN for test only.)

Power Supply : DC 3V (Powered by Battery)

Modulation Mode : FSK

Operation Frequency : 433.92MHz

Antenna type : Integral Antenna

Antenna gain : 2.15dBi

RF power setting in test : Max power

Applicant : Shenzhen Fine Offset Electronics Co., Ltd.

Address : 2/F., Building no.3, Ping Shan Minqi Industrial Park, Xili Town, Nanshan District, Shenzhen City, China

Manufacturer : Shenzhen Fine Offset Electronics Co., Ltd.

Address : 2/F., Building no.3, Ping Shan Minqi Industrial Park, Xili Town, Nanshan District, Shenzhen City, China

Date of sample received : March 14, 2019

Date of Test : March 16-27, 2019

Sample No. : 1900244

1.2. Accessory and Auxiliary Equipment

N/A

1.3. Description of Test Facility

EMC Lab	: Recognition of accreditation by Federal Communications Commission (FCC) The Designation Number is CN1189 The Registration Number is 708358
	Listed by Innovation, Science and Economic Development Canada (ISED) The Registration Number is 5077A-2
	Accredited by China National Accreditation Service for Conformity Assessment (CNAS) The Registration Number is CNAS L3193
	Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 4297.01
Name of Firm	: Shenzhen Accurate Technology Co., Ltd.
Site Location	: 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China

1.4. Measurement Uncertainty

Conducted Emission Expanded Uncertainty	=	2.23dB, k=2
Radiated emission expanded uncertainty (9kHz-30MHz)	=	3.08dB, k=2
Radiated emission expanded uncertainty (30MHz-1000MHz)	=	4.42dB, k=2
Radiated emission expanded uncertainty (Above 1GHz)	=	4.06dB, k=2

2. MEASURING DEVICE AND TEST EQUIPMENT

Table 1: List of Test and Measurement Equipment

Kind of equipment	Manufacturer	Type	S/N	Calibrated dates	Cal. Interval
EMI Test Receiver	Rohde&Schwarz	ESCS30	100307	Jan. 05, 2019	One Year
EMI Test Receiver	Rohde&Schwarz	ESPI3	101526/003	Jan. 05, 2019	One Year
Spectrum Analyzer	Agilent	E7405A	MY45115511	Jan. 05, 2019	One Year
Pre-Amplifier	Rohde&Schwarz	CBLU118354 0-01	3791	Jan. 05, 2019	One Year
Loop Antenna	Schwarzbeck	FMZB1516	1516131	Jan. 05, 2019	One Year
Bilog Antenna	Schwarzbeck	VULB9163	9163-323	Jan. 05, 2019	One Year
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-655	Jan. 05, 2019	One Year
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1067	Jan. 05, 2019	One Year
LISN	Rohde&Schwarz	ESH3-Z5	100305	Jan. 05, 2019	One Year
LISN	Schwarzbeck	NSLK8126	8126431	Jan. 05, 2019	One Year
Highpass Filter	Wainwright Instruments	WHKX3.6/18 G-10SS	N/A	Jan. 05, 2019	One Year
Band Reject Filter	Wainwright Instruments	WRCG2400/2 485-2375/2510 -60/11SS	N/A	Jan. 05, 2019	One Year

3. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
Section 15.207	Conducted Emission	N/A
Section 15.231(e)	Radiated Emission	Compliant
Section 15.231(c)	20dB Bandwidth	Compliant
Section 15.231(e)	Release Time Measurement	Compliant
Section 15.203	Antenna Requirement	Compliant

The product is a automatic operated Weather Station (Transmitter).

Note: The power supply mode of the EUT is DC 3V, According to the FCC standard requirements, conducted emission is not applicable

All normal using modes of the normal function were tested but only the worst test data of the worst mode is recorded by this report.

4. THE FIELD STRENGTH OF RADIATION EMISSION

4.1. Block Diagram of Test Setup


4.1.1. Block diagram of connection between the EUT and simulators




(EUT: Weather Station (Transmitter))

4.1.2. Semi-Anechoic Chamber Test Setup Diagram


(A) Radiated Emission Test Set-Up, Frequency below 30MHz

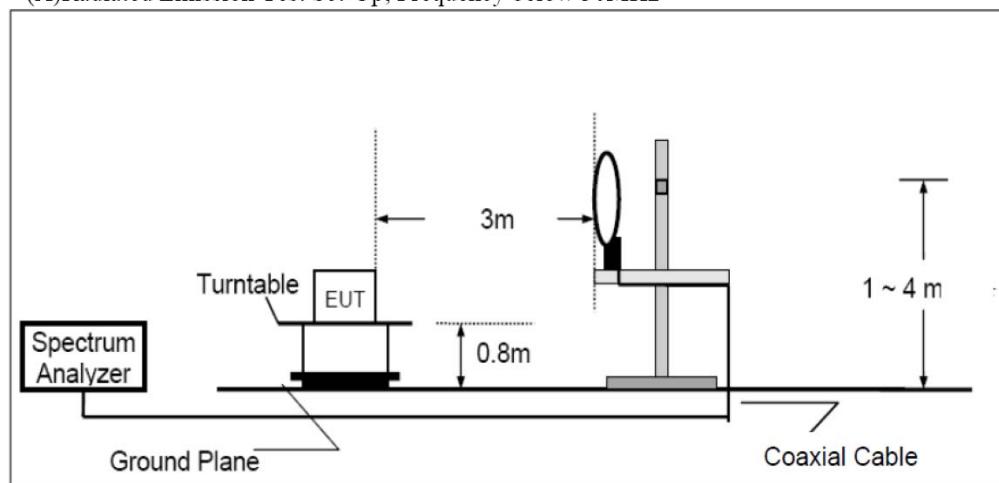

(B) Radiated Emission Test Set-Up, Frequency 30-1000MHz

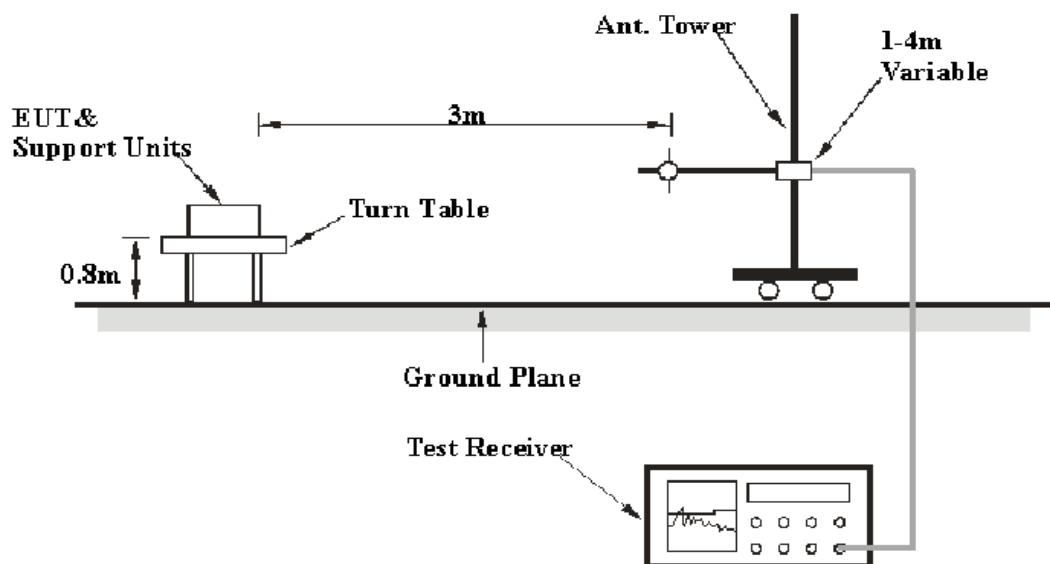

(C) Radiated Emission Test Set-Up, Frequency above 1GHz

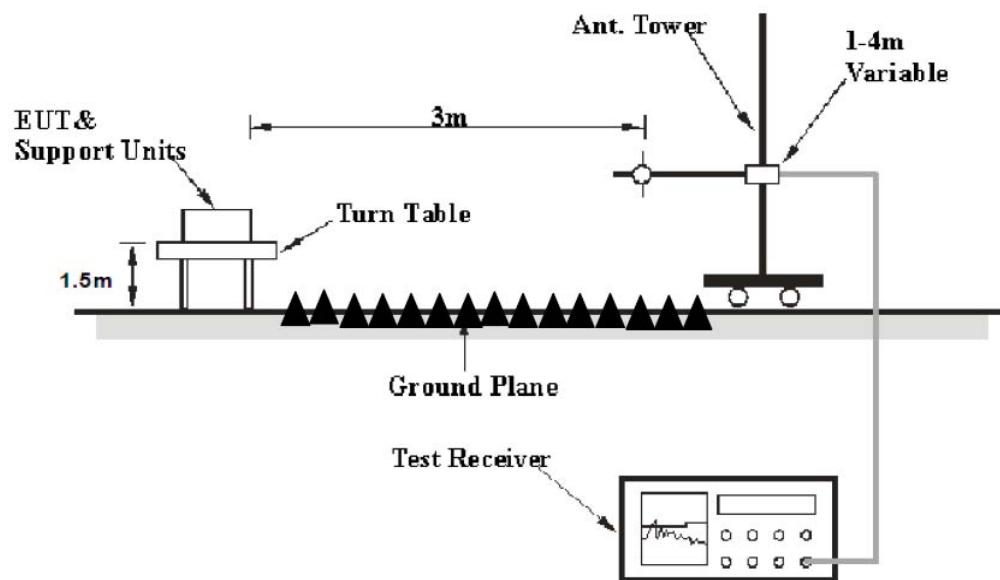

4.2. The Field Strength of Radiation Emission Measurement Limits

4.2.1. Radiation Emission Measurement Limits According to FCC Part 15 Section 15.231(e)

Fundamental frequency (MHz)	Field strength of fundamental (microvolts/meter)	Field strength of spurious emission (microvolts/meter)
40.66–40.70	1,000	100
70–130	500	50
130–174	500 to 1,500 ¹	50 to 150 ¹
174–260	1,500	150
260–470	1,500 to 5,000 ¹	150 to 500 ¹
Above 470	5,000	500

¹ Linear interpolations.

Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follows: for the band 130-174 MHz, $\text{uV/m at 3 meters} = 22.73(F) - 2454.55$; for the band 260-470 MHz, $\text{uV/m at 3 meters} = 16.67(F) - 2833.33$. The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.

4.2.2. Restricted Band Radiation Emission Measurement Limits According to FCC part 15 Section 15.205 and Section15.209.

4.3. Configuration of EUT on Measurement

The equipment is installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

4.4. Operating Condition of EUT

4.4.1. Setup the EUT and simulator as shown as Section 4.1.

4.4.2. Turn on the power of all equipment.

4.4.3. Let the EUT work in TX mode measure it.

4.5. Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground(Below 1GHz). The EUT and its simulators are placed on a turntable, which is 1.5 meter high above ground(Above 1GHz). The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bi-log antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the EUT location must be manipulated according to ANSI C63.10:2013 on radiated emission measurement. This EUT was tested in 3 orthogonal positions and the worst case position data was reported.

The bandwidth of test receiver is set at 120 kHz in 30-1000 MHz, and 1 MHz in 1000 MHz.

4.6. The Field Strength of Radiation Emission Measurement Results

PASS.

The frequency range from 30 MHz to 10GHz is checked.

EUT :		Weather Station (Transmitter)							
Model No. :		WS69CN				Power Supply :		DC 3V	
Test Mode :		TX				Test Engineer :		Frank	
Frequency (MHz)	Reading (dB μ V/m)	Factor Corr.	Average Factor	Result(dB μ V/m)		Limit(dB μ V/m)		Margin(dB)	
	PEAK			AV	PEAK	AV	PEAK	AV	PEAK
433.92	96.61	-17.78	-17.33	61.50	78.83	72.87	92.87	-11.37	-14.04
867.84	48.69	-7.98	-17.33	23.38	40.71	52.87	72.87	-29.49	-32.16
1301.76	54.45	-8.43	-17.33	28.69	46.02	52.87	72.87	-24.18	-26.85
1735.68	53.23	-7.28	-17.33	30.62	45.95	52.87	72.87	-22.25	-26.92
2603.52	50.98	-3.46	-17.33	30.19	47.52	52.87	72.87	-22.68	-25.35
3471.36	48.10	0.02	-17.33	30.79	48.12	52.87	72.87	-22.08	-24.75
3905.28	47.74	0.95	-17.33	31.36	48.69	52.87	72.87	-21.51	-24.18
4339.20	47.04	1.52	-17.33	31.32	48.56	52.87	72.87	-21.64	-24.31
433.92	94.87	-17.78	-17.33	59.76	77.09	72.87	92.87	-13.11	-15.78
867.84	46.70	-7.98	-17.33	21.39	38.72	52.87	72.87	-31.48	-34.15
1301.76	55.95	-8.43	-17.33	30.19	47.52	52.87	72.87	-22.68	-25.35
1735.68	54.23	-7.28	-17.33	26.62	46.95	52.87	72.87	-23.25	-25.92
2169.60	53.15	-5.43	-17.33	30.39	47.72	52.87	72.87	-22.48	-25.15
2603.52	51.98	-3.46	-17.33	31.19	48.52	52.87	72.87	-21.68	-24.35
3474.36	47.60	0.02	-17.33	30.29	47.62	52.87	72.87	-22.58	-25.25
4339.20	47.04	1.52	-17.33	31.23	48.56	52.87	72.87	-21.64	-24.31

Note:

1. 9 kHz~30 MHz Field Strength of Unwanted Emissions. Peak or Quasi-Peak measurement. The measurements with active loop antenna were greater than 20dB below the limit, so the test data were not recorded in the test report.
2. Emissions attenuated more than 20 dB below the permissible value are not reported.
3. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor

Where Corrected Factor = Antenna Factor + Cable Loss + High Pass Filter Loss – Amplifier Gain

4. FCC Limit for Average Measurement = $16.67 * (433.92) - 2833.33 = 4400.1164 \mu\text{V/m} = 72.87 \text{ dB}\mu\text{V/m}$

5. The spectral diagrams in appendix I display the measurement of peak values.

6. Average value= PK value + Average Factor (duty factor)

7. If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

8. The EUT is tested radiation emission in three axes(X,Y,Z). The worst emissions are reported in three axes.

9. Pulse Desensitization Correction Factor

Pulse Width (PW) = 13.6ms


$2/PW = 2/13.6ms = 0.15kHz$

RBW (100kHz) > 2/PW (5kHz)

Therefore PDCF is not needed.

5. 20DB OCCUPIED BANDWIDTH

5.1. Block Diagram of Test Setup



(EUT: Weather Station (Transmitter))

5.2. The Bandwidth of Emission Limit According To FCC Part 15 Section

15.231(c)

The bandwidth of emission shall be no wider than 0.25% of the center frequency. Therefore, the bandwidth of the emission limit is $433.92\text{MHz} \times 0.25\% = 1.0848\text{MHz}$. Bandwidth is determined at the two points 20 dB down from the top of modulated carrier.

5.3. EUT Configuration on Measurement

The equipment are installed on the bandwidth of emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

5.4. Operating Condition of EUT

5.4.1. Setup the EUT and simulator as shown as Section 5.1.

5.4.2. Turn on the power of all equipment.

5.4.3. Let the EUT work in TX mode measure it.

5.5. Test Procedure

5.5.1. Set SPA Center Frequency = Fundamental frequency, RBW = 10 kHz, VBW = 30 kHz.

5.5.2. Set SPA Max hold, Mark peak, -20 dB.

5.6.Measurement Result


The EUT does meet the FCC requirement.

-20 dB bandwidth =0.116MHz <1.0848MHz.

The spectral diagrams in appendix I.

6. RELEASE TIME MEASUREMENT

6.1. Block Diagram of Test Setup



(EUT: Weather Station (Transmitter))

6.2. Release Time Measurement According To FCC Part 15 Section 15.231(e)

Section 15.231(e) devices operated under the provisions of this paragraph shall be provided with a means for automatically limiting operation so that the duration of each transmission shall not be greater than one second and the silent period between transmissions shall be at least 30 times the duration of the transmission but in no case less than 10 seconds.

6.3. EUT Configuration on Measurement

The equipment are installed on Release Time Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

6.4. Operating Condition of EUT

6.4.1. Setup the EUT and simulator as shown as Section 6.1.

6.4.2. Turn on the power of all equipment.

6.4.3. Let the EUT work in TX mode measure it.

6.5. Test Procedure

6.5.1. Set SPA Center Frequency = Fundamental frequency, RBW = 100 kHz, VBW = 300 kHz, Span = 0 Hz.

6.5.2. Set EUT as normal operation and press Transmitter button.

6.5.3. Set SPA View. Delta Mark time.

6.6. Measurement Result

Test result: pass

Total period between transmission = 16.1s

Transmission Period = 13.6ms = 0.0136s


Silent Period = (16.1s-0.0136s) = 16.0864s

Silent period complies with 15.231(e) limits , as silent period = 16.0864 > 30*0.0136s and > 10s

The spectral diagrams in appendix I.

7. AVERAGE FACTOR MEASUREMENT

7.1. Block Diagram of Test Setup



(EUT: Weather Station (Transmitter))

7.2. Average factor Measurement according to ANSI C63.10-2013

ANSI C63.10-2013 Section 7.5 Unless otherwise specified, when the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 s (100 ms). In cases where the pulse train exceeds 0.1 s, the measured field strength shall be determined during a 0.1 s interval.⁶⁴ The following procedure is an example of how the average value may be determined. The average field strength may be found by measuring the peak pulse amplitude (in log equivalent units) and determining the duty cycle correction factor (in dB) associated with the pulse modulation as shown in Equation (10):

$$\text{Average factor in dB} = 20 \log (\text{duty cycle})$$

7.3. EUT Configuration on Measurement

The equipment are installed on average factor Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

7.4. Operating Condition of EUT

7.4.1. Setup the EUT and simulator as shown as Section 7.1.

7.4.2. Turn on the power of all equipment.

7.4.3. Let the EUT work in TX mode measure it.

7.5. Test Procedure

7.5.1. The time period over which the duty cycle is measured is 100 milliseconds, or the repetition cycle, whichever is a shorter time frame. The worst case (highest percentage on) duty cycle is used for the calculation.

7.5.2. Set SPA Center Frequency = Fundamental frequency, RBW = 100 kHz, VBW = 300 kHz, Span = 0 Hz.

7.5.3. Set EUT as normal operation.

7.5.4. Set SPA View. Delta Mark time.

7.6. Measurement Result

The duty cycle is simply the on time divided by the period:

Effective period of the cycle = 13.6ms

DC = 13.6ms/100ms = 0.136 = 13.6%

Therefore, the average factor is found by $20\log 0.136 = -17.33\text{dB}$

The spectral diagrams in appendix I.


8. ANTENNA REQUIREMENT

8.1. The Requirement

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

8.2. Antenna Construction

Device is equipped with permanent attached antenna, which isn't displaced by other antenna. The Antenna gain of EUT is 2.15dBi. Therefore, the equipment complies with the antenna requirement of Section 15.203.

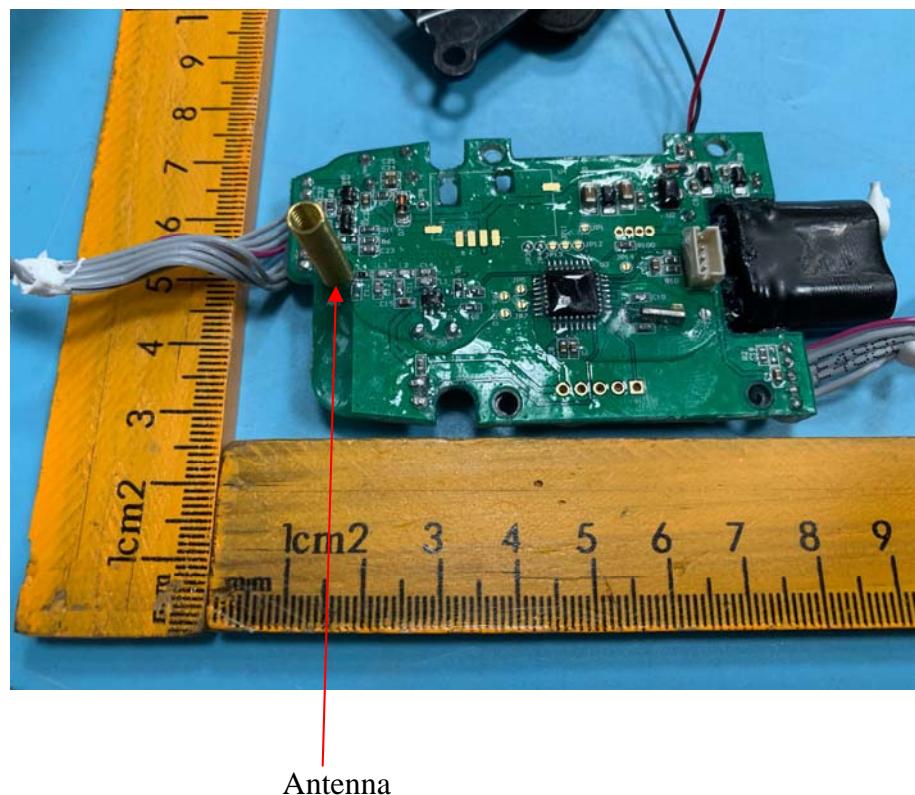

APPENDIX I

(Test Curves)



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Bob #26	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 3V
Test item: Radiation Test	Date: 19/03/26/
Temp. (C)/Hum.(%) 25 C / 55 %	Time: 10/25/15
EUT: Weather Station (Transmitter)	Engineer Signature: Bob
Mode: TX433.92MHz	Distance: 3m
Model: WS69CN	
Manufacturer: Fine Offset	

Note: Report NO.:ATE20190313

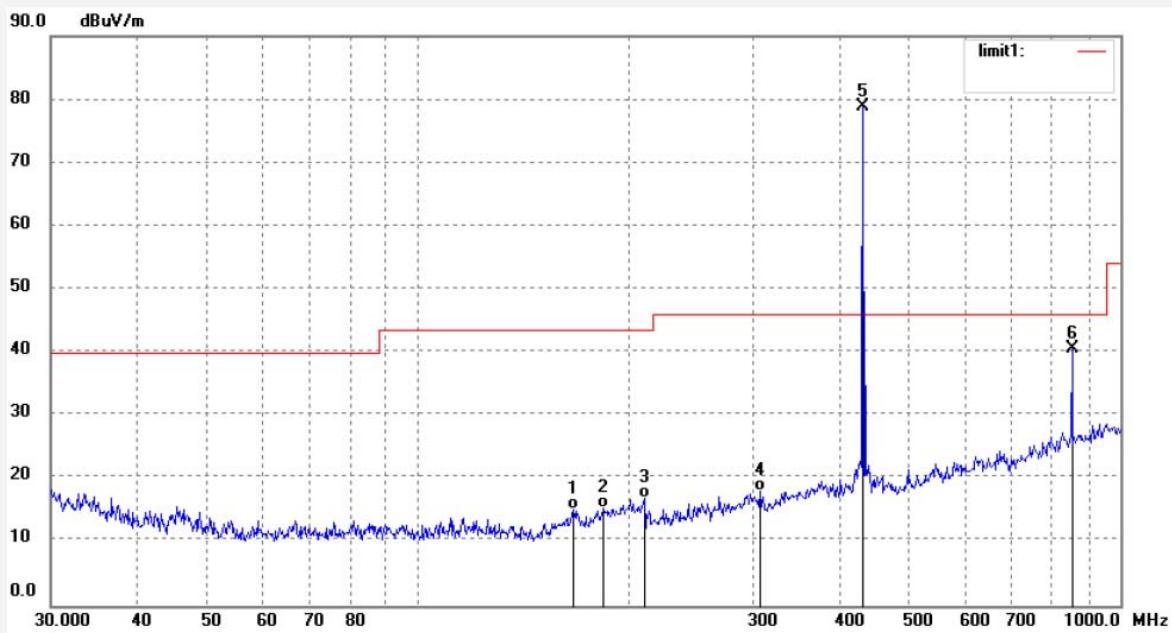

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	166.6384	41.61	-26.36	15.25	43.50	-28.25	QP	100	102	
2	183.8660	41.10	-25.65	15.45	43.50	-28.05	QP	100	38	
3	210.1294	41.11	-24.11	17.00	43.50	-26.50	QP	100	197	
4	307.1051	39.03	-21.02	18.01	46.00	-27.99	QP	100	249	
5	433.9200	96.61	-17.78	78.83			peak	100	154	
6	867.8400	48.69	-7.98	40.71			peak	100	24	



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Bob #27

Polarization: Vertical

Standard: FCC Class B 3M Radiated

Power Source: DC 3V

Test item: Radiation Test

Date: 19/03/26/

Temp. (C)/Hum.(%) 25 C / 55 %

Time: 10/28/45

EUT: Weather Station (Transmitter)

Engineer Signature: Bob


Mode: TX433.92MHz

Distance: 3m

Model: WS69CN

Manufacturer: Fine Offset

Note: Report NO.:ATE20190313

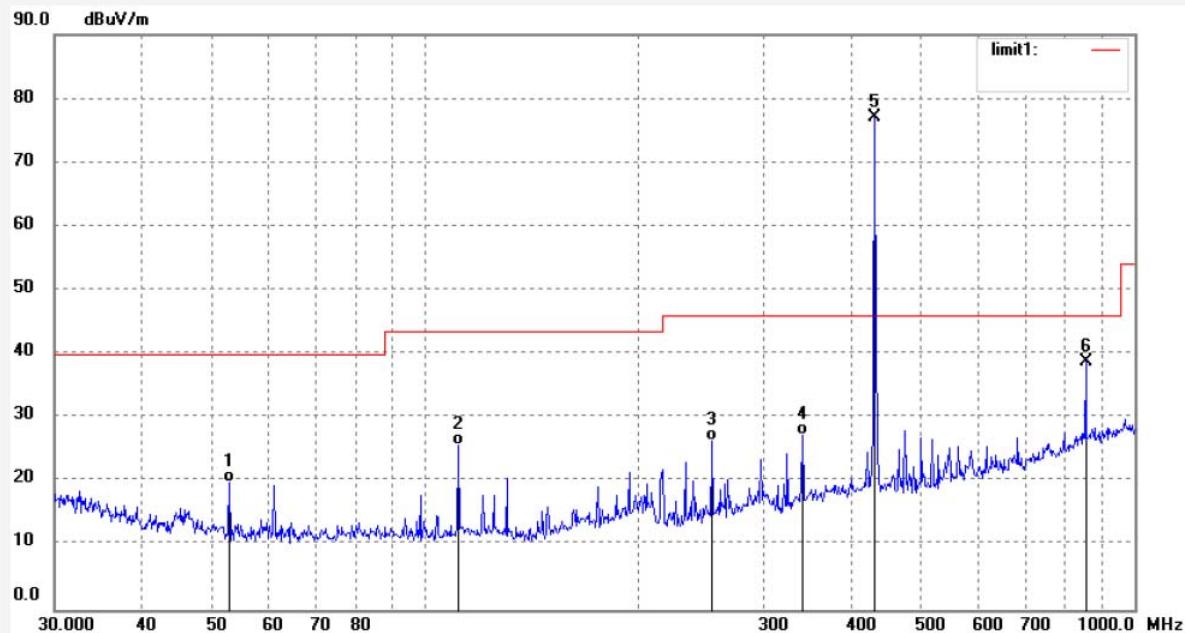

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	53.0056	46.64	-26.69	19.95	40.00	-20.05	QP	100	125	
2	111.2483	52.96	-27.29	25.67	43.50	-17.83	QP	100	97	
3	254.0312	49.82	-23.41	26.41	46.00	-19.59	QP	100	101	
4	340.0473	47.15	-19.75	27.40	46.00	-18.60	QP	100	327	
5	433.9200	94.87	-17.78	77.09			peak	100	157	
6	867.8400	46.70	-7.98	38.72			peak	100	222	




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Bob #28	Polarization: Vertical
Standard: FCC PK	Power Source: DC 3V
Test item: Radiation Test	Date: 19/03/26/
Temp.(C)/Hum.(%) 25 C / 55 %	Time: 10/32/19
EUT: Weather Station (Transmitter)	Engineer Signature: Bob
Mode: TX433.92MHz	Distance: 3m
Model: WS69CN	
Manufacturer: Fine Offset	

Note: Report NO.:ATE20190313

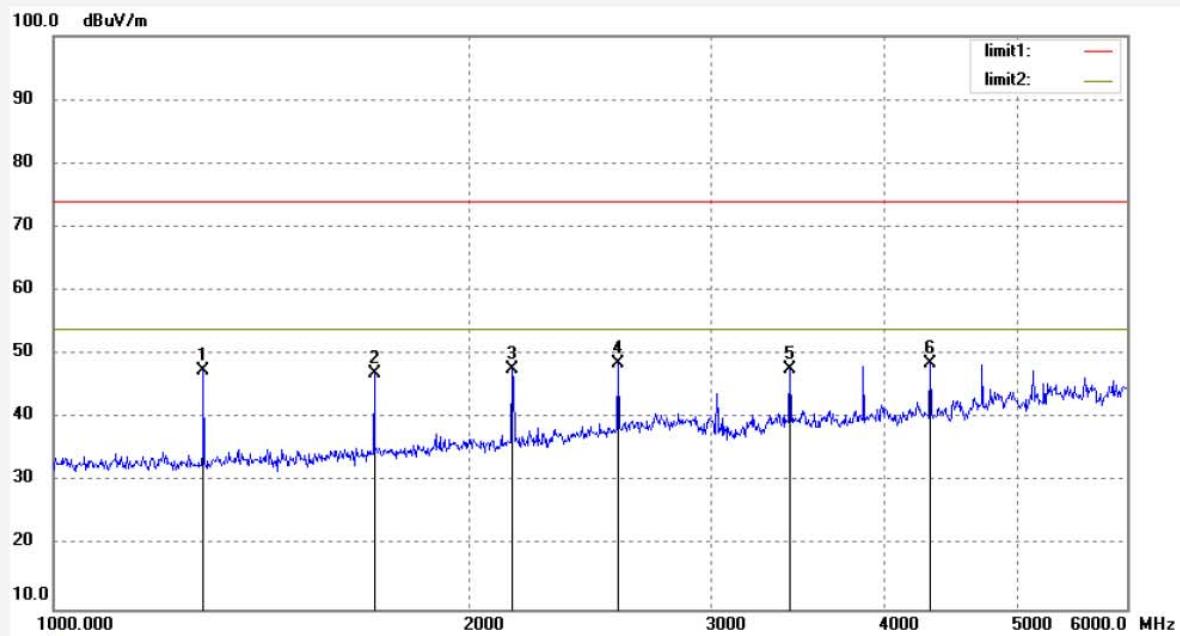

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1301.760	55.95	-8.43	47.52	80.82	-25.35	peak	150	113	
2	1735.680	54.23	-7.28	46.95	80.82	-25.92	peak	150	244	
3	2169.600	53.15	-5.43	47.72	80.82	-25.15	peak	150	321	
4	2603.520	51.98	-3.46	48.52	80.82	-24.35	peak	150	114	
5	3474.360	47.60	0.02	47.62	80.82	-25.25	peak	150	47	
6	4339.200	47.04	1.52	48.56	80.82	-24.31	peak	150	264	




ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396


Job No.: Bob #29	Polarization: Horizontal
Standard: FCC PK	Power Source: DC 3V
Test item: Radiation Test	Date: 19/03/26/
Temp.(C)/Hum.(%) 25 C / 55 %	Time: 10/35/26
EUT: Weather Station (Transmitter)	Engineer Signature: Bob
Mode: TX433.92MHz	Distance: 3m
Model: WS69CN	
Manufacturer: Fine Offset	
Note: Report NO.:ATE20190313	

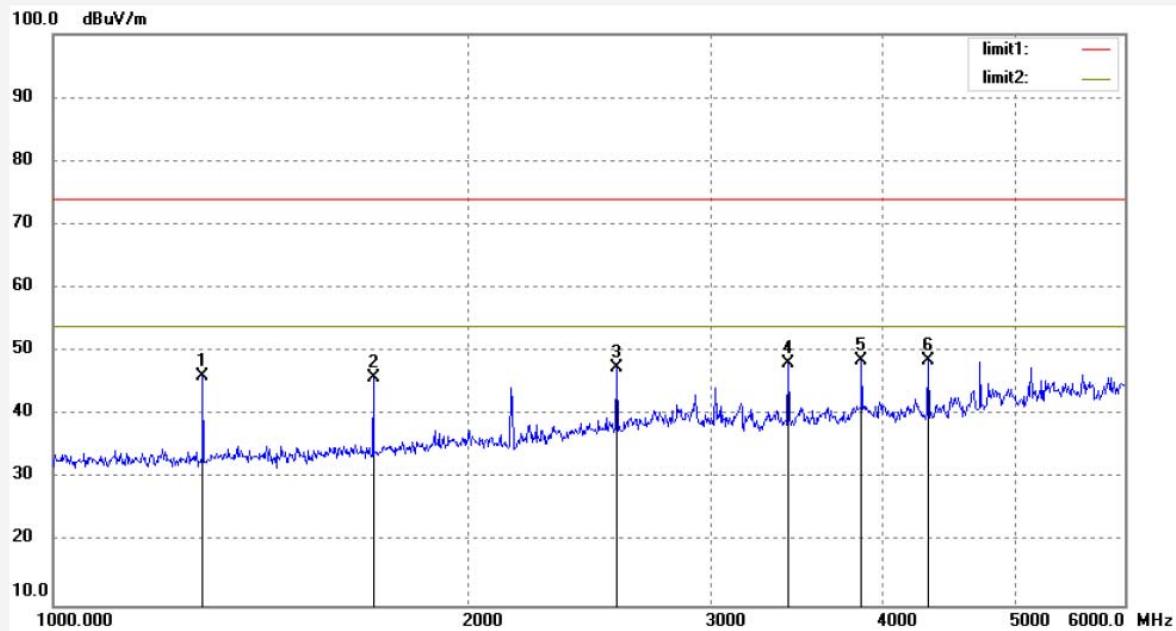


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1301.760	54.45	-8.43	46.02	72.87	-26.85	peak	150	46	
2	1735.680	53.23	-7.28	45.95	72.87	-26.92	peak	150	135	
3	2603.520	50.98	-3.46	47.52	72.87	-25.35	peak	150	36	
4	3471.360	48.10	0.02	48.12	72.87	-24.75	peak	150	222	
5	3905.280	47.74	0.95	48.69	72.87	-24.18	peak	150	147	
6	4339.200	47.04	1.52	48.56	72.87	-24.31	peak	150	358	

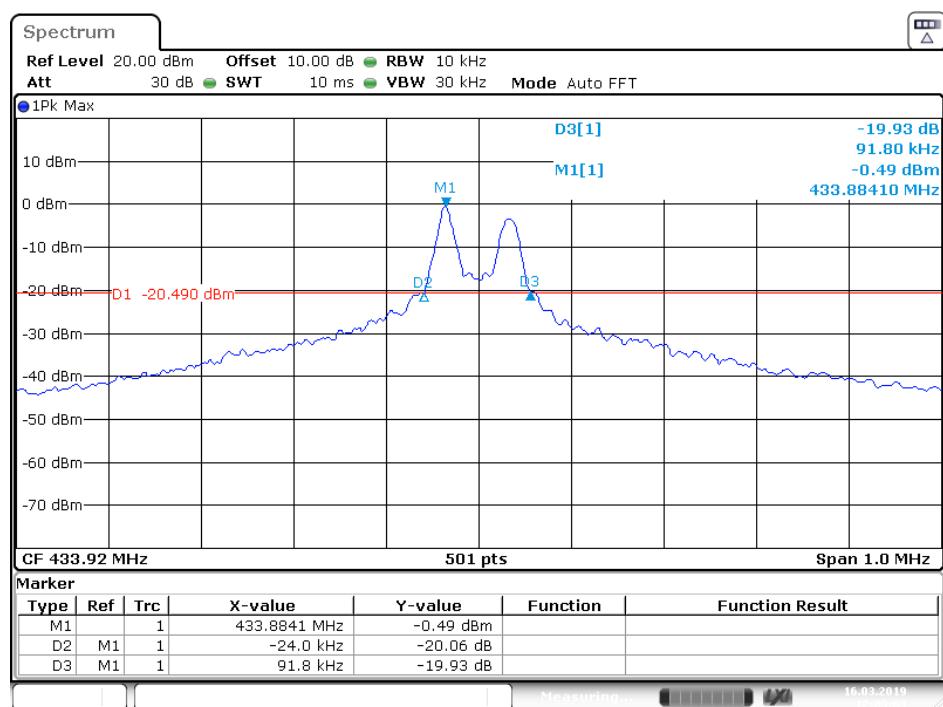

Date: 16.MAR.2019 12:03:03

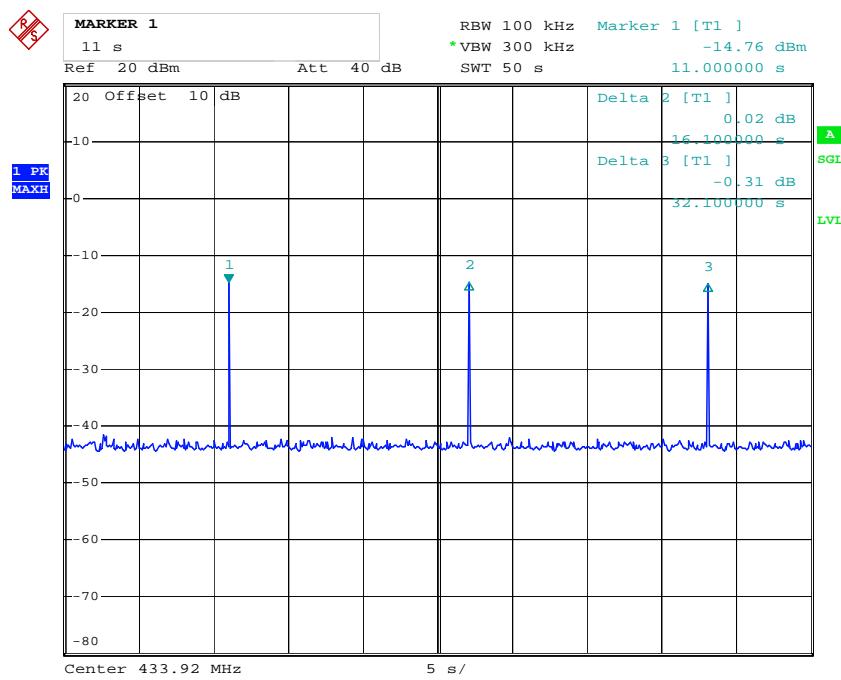

The period between transmissions =16.1s

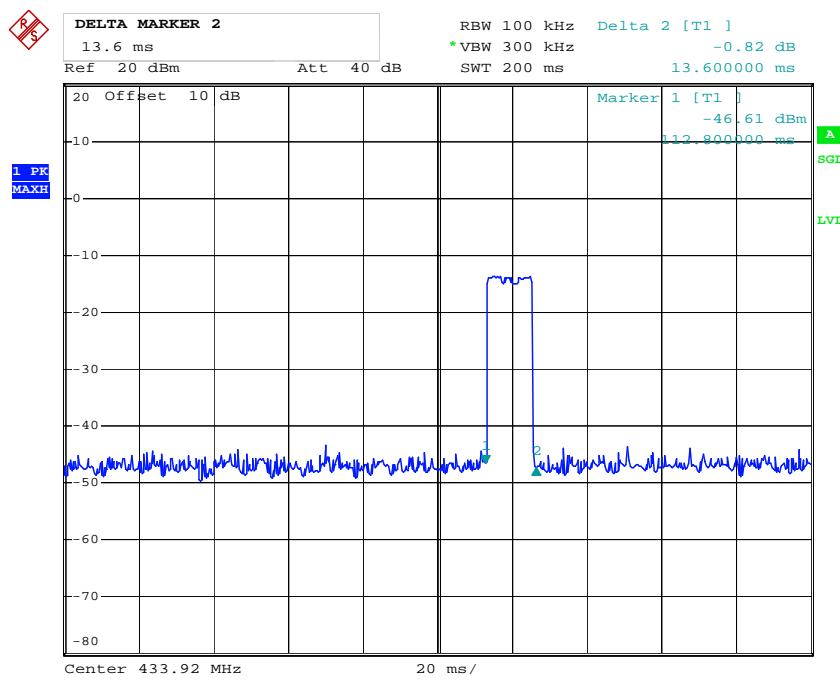

Comment A:
Date: 27.MAR.2019 12:22:19

The graph shows the duration of 'on' signal. From marker 1 to Delta 1, duration is 13.6ms.

***** End of Test Report *****