

FCC Part 15C

Measurement and Test Report

For

VeryKool USA Inc

3636 Nobel Drive, Suite 325, San Diego, CA 92122 USA

FCC ID: WA6I121

FCC Rules:	<u>FCC Part 15.247</u>
Product Description:	<u>Mobile Phone</u>
Tested Model:	<u>I121C</u>
Report No.:	<u>STR12098241I-2</u>
Tested Date:	<u>2012-09-27 to 2012-10-18</u>
Issued Date:	<u>2012-10-22</u>
Tested By:	<u>Susan Su / Engineer</u>
Reviewed By:	<u>Lahm Peng / EMC Manager</u>
Approved & Authorized By:	<u>Jandy so / PSQ Manager</u>
Prepared By:	SEM.Test Compliance Service Co., Ltd 3/F, Jinbao Commerce Building, Xin'an Fanshen Road, Bao'an District, Shenzhen, P.R.C. (518101) Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permission by SEM.Test Compliance Service Co., Ltd

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
1.2 TEST STANDARDS.....	5
1.3 TEST METHODOLOGY.....	5
1.4 TEST FACILITY	5
1.5 EUT SETUP AND TEST MODE.....	6
2. SUMMARY OF TEST RESULTS	7
3. ANTENNA REQUIREMENT	8
3.1 STANDARD APPLICABLE.....	8
3.2 EVALUATION INFORMATION	8
4. FREQUENCY HOPPING SYSTEM REQUIREMENTS	9
4.1 STANDARD APPLICABLE.....	9
4.2 EUT PSEUDORANDOM FREQUENCY HOPPING SEQUENCE	9
4.3 FREQUENCY HOPPING SYSTEM.....	10
5. QUANTITY OF HOPPING CHANNELS AND CHANNEL SEPARATION	11
5.1 STANDARD APPLICABLE.....	11
5.2 TEST EQUIPMENT LIST AND DETAILS	11
5.3 TEST PROCEDURE.....	11
5.4 ENVIRONMENTAL CONDITIONS	11
5.5 SUMMARY OF TEST RESULTS/PLOTS	12
6. DWELL TIME OF HOPPING CHANNEL.....	17
6.1 STANDARD APPLICABLE.....	17
6.2 TEST EQUIPMENT LIST AND DETAILS	17
6.3 TEST PROCEDURE.....	17
6.4 ENVIRONMENTAL CONDITIONS	17
6.5 SUMMARY OF TEST RESULTS/PLOTS	18
7. 20DB BANDWIDTH	28
7.1 STANDARD APPLICABLE.....	28
7.2 TEST EQUIPMENT LIST AND DETAILS	28
7.3 TEST PROCEDURE.....	28
7.4 ENVIRONMENTAL CONDITIONS	28
7.5 SUMMARY OF TEST RESULTS/PLOTS	28
8. RF OUTPUT POWER	32
8.1 STANDARD APPLICABLE.....	32
8.2 TEST EQUIPMENT LIST AND DETAILS	32
8.3 TEST PROCEDURE.....	32
8.4 ENVIRONMENTAL CONDITIONS	32
8.5 SUMMARY OF TEST RESULTS/PLOTS	33
9. FIELD STRENGTH OF SPURIOUS EMISSIONS	34
9.1 MEASUREMENT UNCERTAINTY	34
9.2 STANDARD APPLICABLE.....	34
9.3 TEST EQUIPMENT LIST AND DETAILS	34
9.4 TEST PROCEDURE.....	35
9.5 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	35
9.6 ENVIRONMENTAL CONDITIONS	35
9.7 SUMMARY OF TEST RESULTS/PLOTS	36
10. OUT OF BAND EMISSIONS.....	51
10.1 STANDARD APPLICABLE.....	51
10.2 TEST EQUIPMENT LIST AND DETAILS	51
10.3 TEST PROCEDURE.....	51
10.4 ENVIRONMENTAL CONDITIONS	52
10.5 SUMMARY OF TEST RESULTS/PLOTS	52
11. CONDUCTED EMISSIONS	58

11.1 MEASUREMENT UNCERTAINTY	58
11.2 TEST EQUIPMENT LIST AND DETAILS	58
11.3 TEST PROCEDURE.....	58
11.4 BASIC TEST SETUP BLOCK DIAGRAM.....	58
11.5 ENVIRONMENTAL CONDITIONS	59
11.6 TEST RECEIVER SETUP	59
11.7 SUMMARY OF TEST RESULTS/PLOTS	59
11.8 CONDUCTED EMISSIONS TEST DATA.....	59

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: VeryKool USA Inc
Address of applicant: 3636 Nobel Drive, Suite 325, San Diego, CA 92122
USA
Manufacturer: Wingtech Group
Address of manufacturer: 1-3f Yinfeng Mansion, No.5097, Luosha Road,
Luohu District, Shenzhen, China

General Description of EUT	
Product Name:	Mobile Phone
Trade Name:	Verykool
Model No.:	I121C
Adding Model(s):	I121
Rated Voltage:	DC 3.7V Li-ion Battery
Power Adapter Model:	i121 (Input: AC 100-240V, Output: DC 5V)
<i>Note: The test data is gathered from a production sample, provided by the manufacturer. Adding model: I121C basis of the tested model I121, This model is identical circuit and PCB Layout to the original model except I121C has only one SIM socket and I121 has no camera and only one SIM socket.</i>	

Technical Characteristics of EUT	
Support Standards:	Bluetooth: V2.1+EDR
Frequency Range:	2402-2480MHz
RF Output Power:	4.657 dBm (Conducted)
Data Rate:	1Mbps, 2Mbps, 3Mbps
Modulation:	GFSK, Pi/4 QDPSK, 8DPSK
Quantity of Channels:	79
Channel Separation:	1MHz
Antenna Type:	Integral Antenna
Antenna Gain:	-1 dBi
Lowest Internal Frequency of EUT:	32.768KHz
Device Category:	Portable Device

1.2 Test Standards

The following report is prepared on behalf of the VeryKool USA Inc in accordance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 of the Federal Communication Commissions rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. The public notice DA 00-705 for frequency hopping spread spectrum systems shall be performed also.

1.4 Test Facility

- **FCC – Registration No.: 994117**

SEM.Test Compliance Services Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 994117.

- **Industry Canada (IC) Registration No.: 7673A**

The 3m Semi-anechoic chamber of SEM.Test Compliance Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 7673A.

- **CNAS Registration No.: L4062**

Shenzhen SEM.Test Electronics Service Co., Ltd. is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L4062. All measurement facilities used to collect the measurement data are located at 3/F, Jinbao Commerce Building, Xin'an Fanshen Road, Bao'an District, Shenzhen, P.R.C (518101)

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List			
Test Mode	Description	Remark	
TM1	Low Channel	2402MHz	
TM2	Middle Channel	2441MHz	
TM3	High Channel	2480MHz	
TM4	Hopping	2402-2480MHz	

Modulation Configure			
Modulation	Packet	Packet Type	Packet Size
GFSK	DH1	4	27
	DH3	11	183
	DH5	15	339
Pi/4 QDPSK	2DH1	20	54
	2DH3	26	367
	2DH5	30	379
8DPSK	3DH1	24	83
	3DH3	27	552
	3DH5	31	1021
Normal mode: the Bluetooth has been tested on the modulation of GFSK			
EDR mode: the Bluetooth has been tested on the modulation of (Pi/4)QDPSK and 8DPSK, compliance test and record the worst case on 8DPSK			

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
USB Cable	1.0	Shielded	Without Ferrite

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 15.203; § 15.247(b)(4)(i)	Antenna Requirement	Compliant
§ 15.205	Restricted Band of Operation	Compliant
§ 15.207(a)	Conducted Emission	Compliant
§ 15.209(a)(f)	Radiated Spurious Emissions	Compliant
§ 15.247(a)(1)(iii)	Quantity of Hopping Channel	Compliant
§ 15.247(a)(1)	Channel Separation	Compliant
§ 15.247(a)(1)(iii)	Time of Occupancy (Dwell time)	Compliant
§ 15.247(a)	20dB Bandwidth	Compliant
§ 15.247(b)(1)	Power Output	Compliant
§ 15.247(d)	Band Edge (Out of Band Emissions)	Compliant
§ 15.247(a)(1)	Frequency Hopping Sequence	Compliant
§ 15.247(g), (h)	Frequency Hopping System	Compliant

N/A: not applicable

3. Antenna Requirement

3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Evaluation Information

This product has a permanent antenna, fulfill the requirement of this section.

4. Frequency Hopping System Requirements

4.1 Standard Applicable

According to FCC Part 15.247(a)(1), The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

(g) Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.

(h) The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.


4.2 EUT Pseudorandom Frequency Hopping Sequence

The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage, and the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.


Number of shift register stages: 9

Length of pseudo-random sequence: $2^9 - 1 = 511$ bits

Longest sequence of zeros: 8 (non-inverted signal)

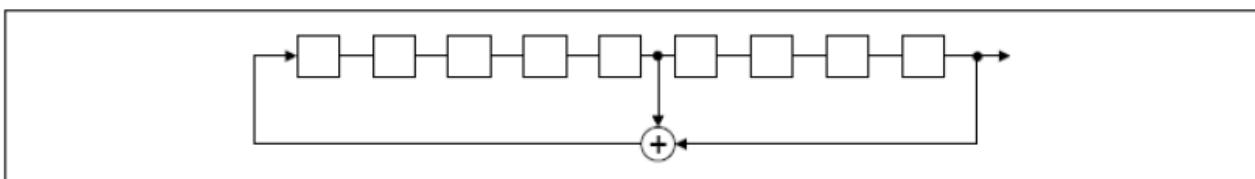

Linear Feedback Shift Register for Generation of the PRBS sequence

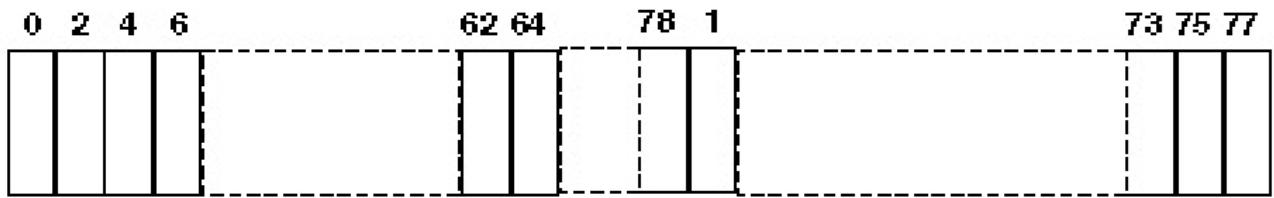

Each frequency used equally on the average by each transmitter.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

4.3 Frequency Hopping System

This transmitter device is frequency hopping device, and complies with FCC part 15.247 rule.

This device uses Bluetooth radio which operates in 2400-2483.5 MHz band. Bluetooth uses a radio technology called frequency-hopping spread spectrum, which chops up the data being sent and transmits chunks of it on up to 79 bands (1 MHz each; centred from 2402 to 2480 MHz) in the range 2,400-2,483.5 MHz. The transmitter switches hop frequencies 1,600 times per second to assure a high degree of data security. All Bluetooth devices participating in a given piconet are synchronized to the frequency-hopping channel for the piconet. The frequency hopping sequence is determined by the master's device address and the phase of the hopping sequence (the frequency to hop at a specific time) is determined by the master's internal clock. Therefore, all slaves in a piconet must know the master's device address and must synchronize their clocks with the master's clock.

Adaptive Frequency Hopping (AFH) was introduced in the Bluetooth specification to provide an effective way for a Bluetooth radio to counteract normal interference. AFH identifies "bad" channels, where either other wireless devices are interfering with the Bluetooth signal or the Bluetooth signal is interfering with another device. The AFH-enabled Bluetooth device will then communicate with other devices within its piconet to share details of any identified bad channels. The devices will then switch to alternative available "good" channels, away from the areas of interference, thus having no impact on the bandwidth used.

This device was tested with an bluetooth system receiver to check that the device maintained hopping synchronization, and the device complied with these requirements for DA 00-705 and FCC Part 15.247 rule.

5. Quantity of Hopping Channels and Channel Separation

5.1 Standard Applicable

According to FCC 15.247(a)(1), frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, and frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

5.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	Agilent	E4402B	US41192821	2012-03-28	2013-03-27
Attenuator	ATTEN	ATS100-4-20	/	2012-03-28	2013-03-27

5.3 Test Procedure

According to the DA 00-705, the number of hopping frequencies test method as follows.

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Set span = the frequency band of operation (2400MHz to 2483.5MHz)

RBW = 100kHz, VBW = 100kHz

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize, observed the band of 2400MHz to 2483.5MHz, than count it out the number of channels for comparing with the FCC rules.

The channel spacing test method as follows:

Set span = wide enough to capture the peaks of two adjacent channels

Other setting as above


Allow the trace to stabilize, Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

5.4 Environmental Conditions

Temperature:	24 °C
Relative Humidity:	54%
ATM Pressure:	1011 mbar


5.5 Summary of Test Results/Plots

No. of Channel = 79

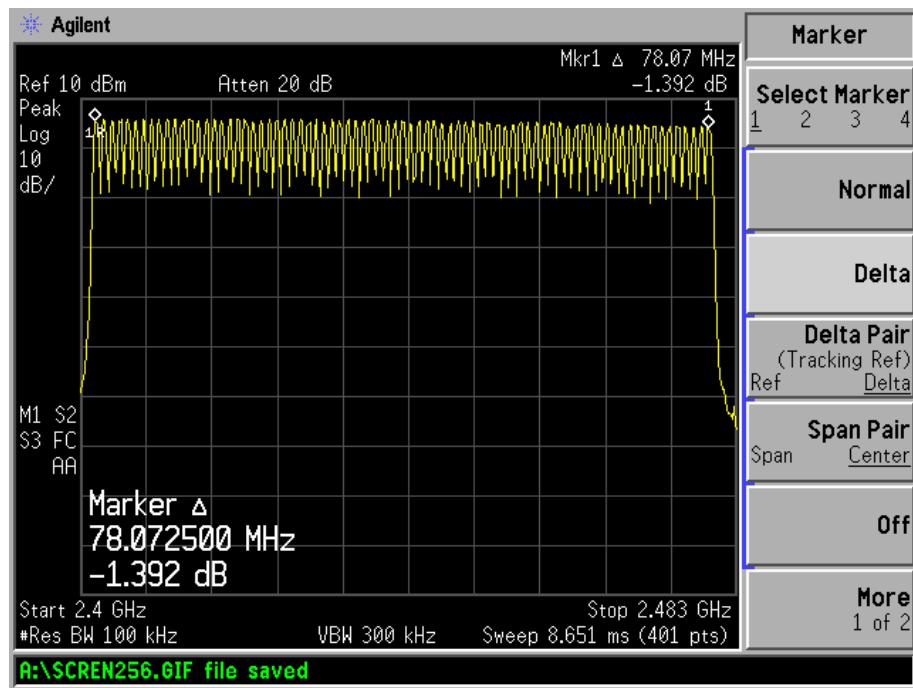


Test mode: GFSK


Channel Spacing (Low CH=1MHz)

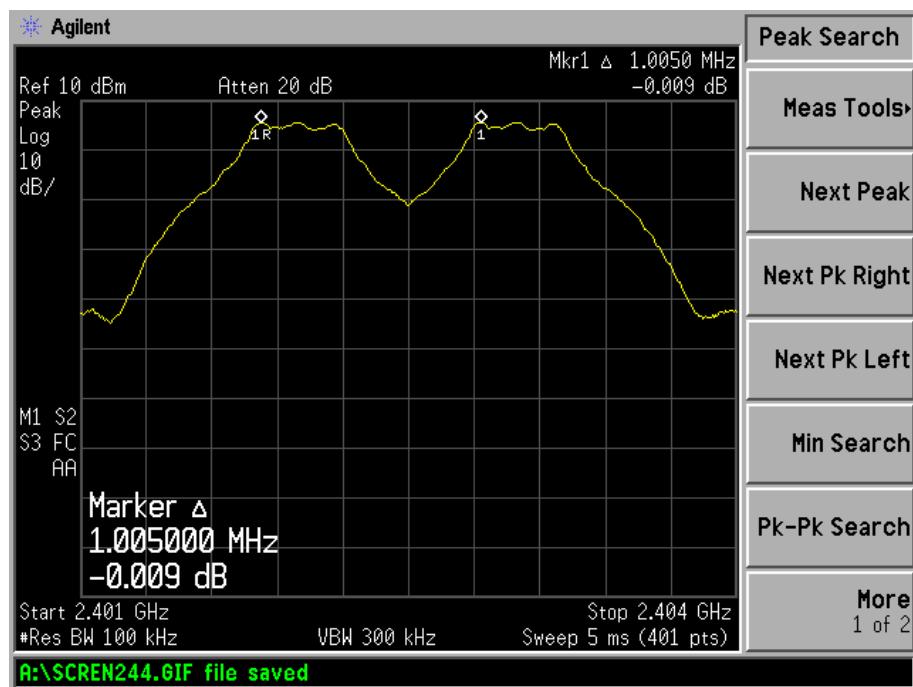


Channel Spacing (Middle CH=1MHz)

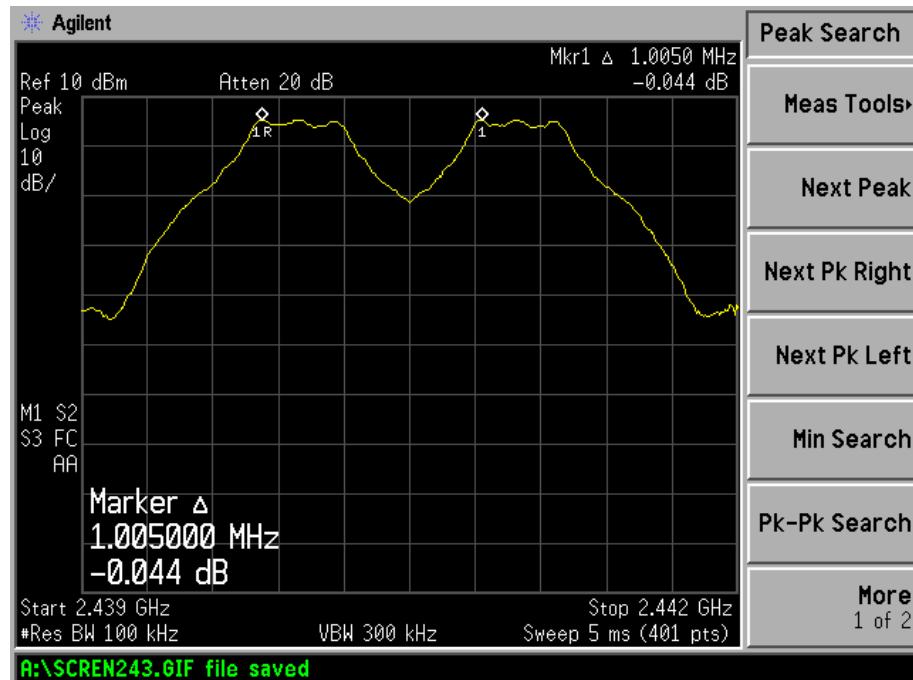


Channel Spacing (High CH=1MHz)

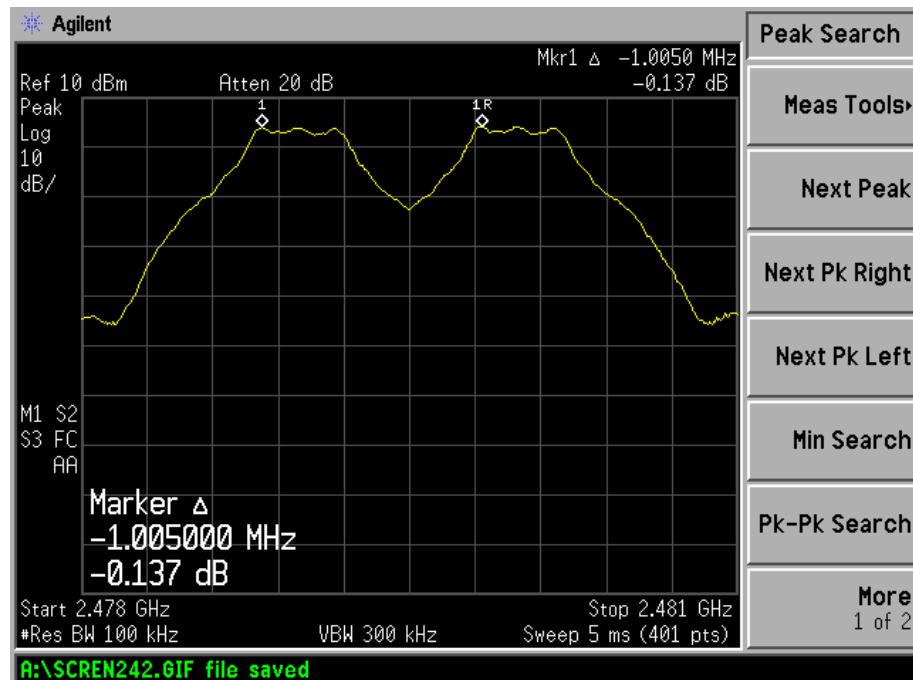


Test mode: Pi/4 QDPSK
Channel Spacing (Low CH=1MHz)

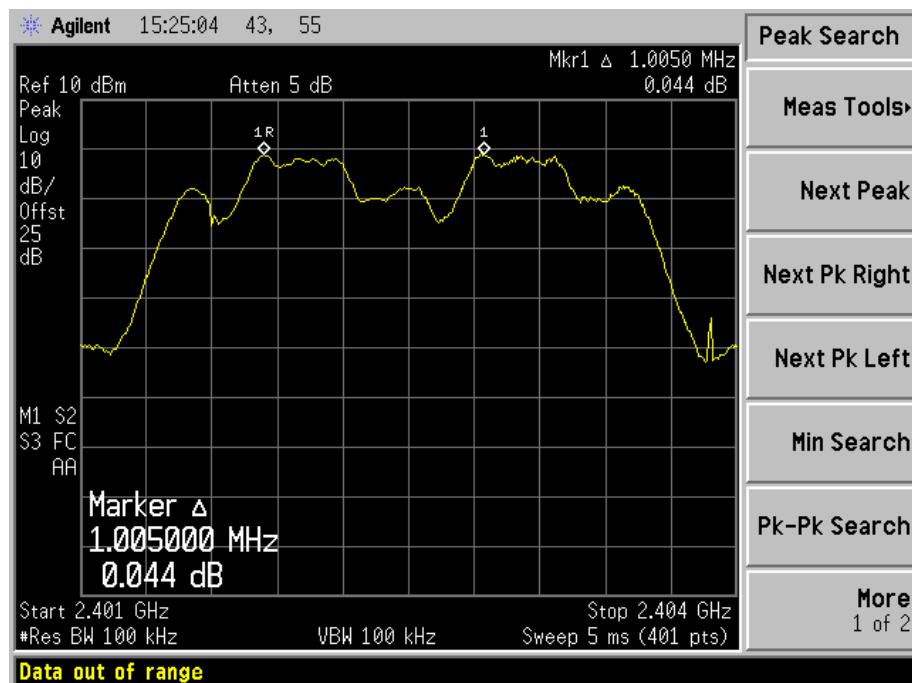

Channel Spacing (Middle CH=1MHz)

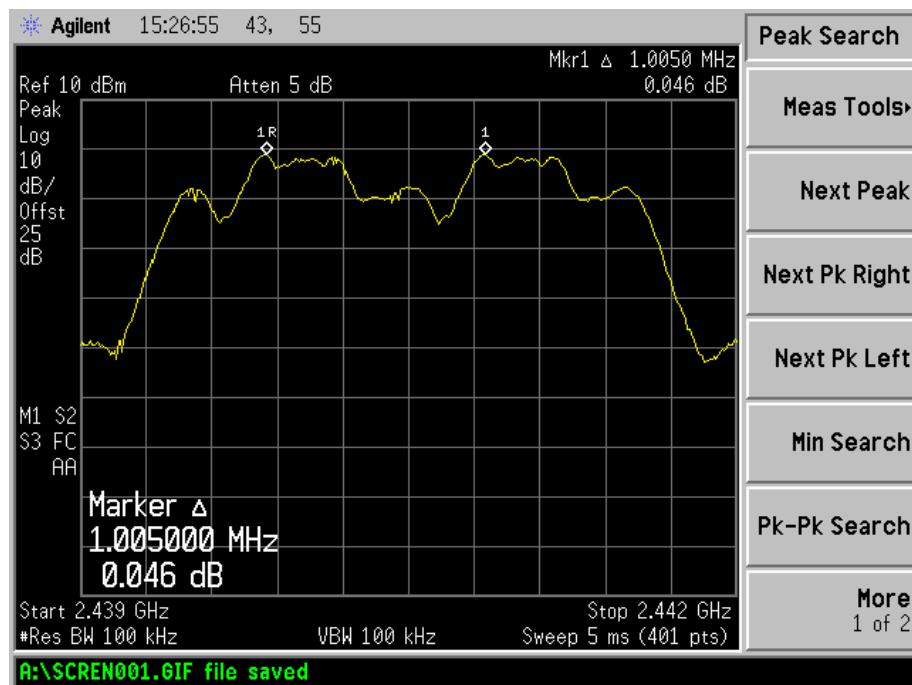


Channel Spacing (High CH=1MHz)

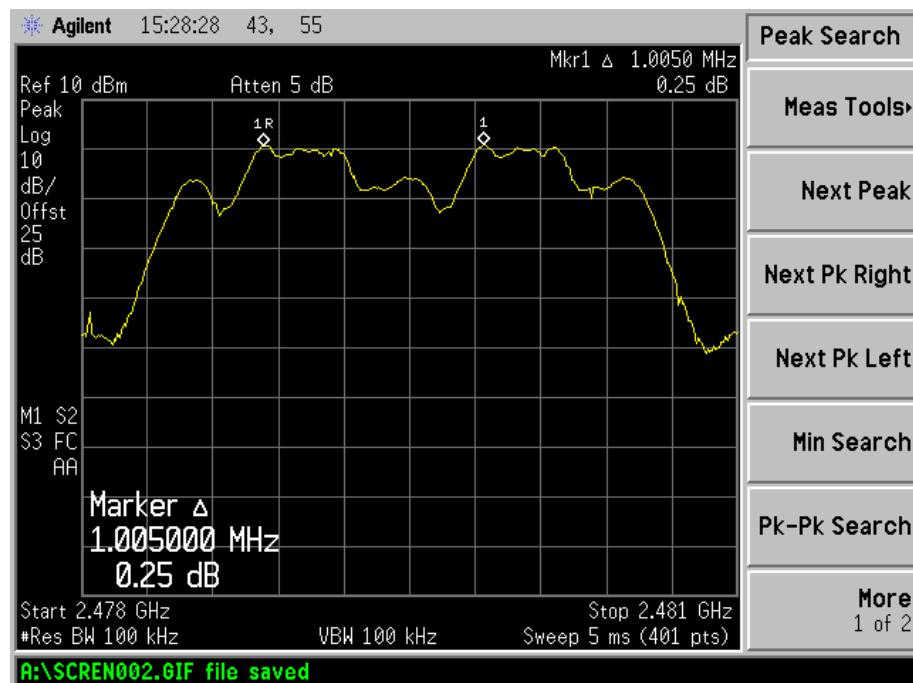


Test mode: 8DPSK


Channel Spacing (Low CH=1MHz)

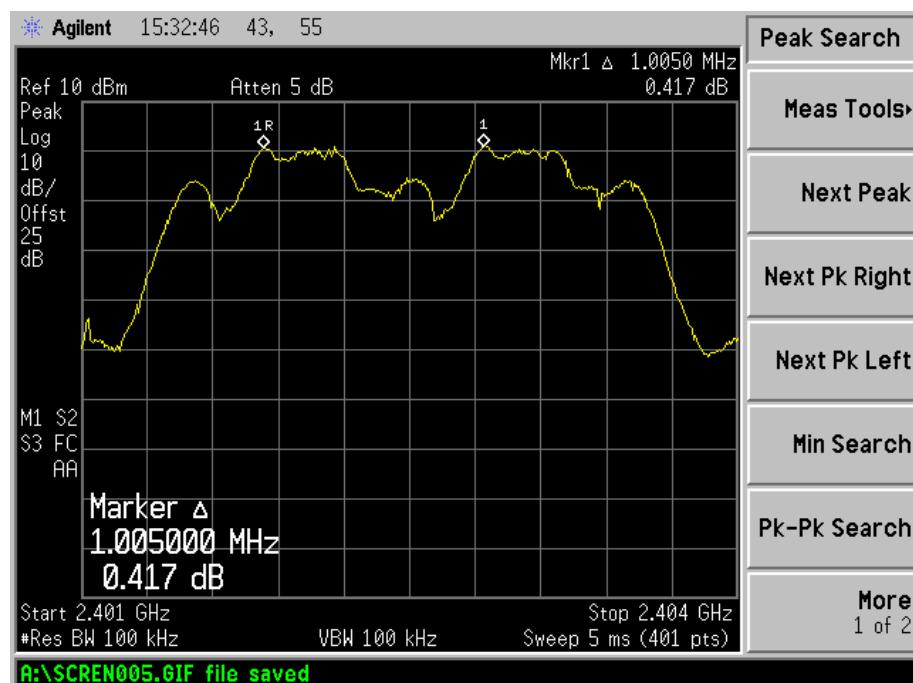

Channel Spacing (Middle CH=1MHz)

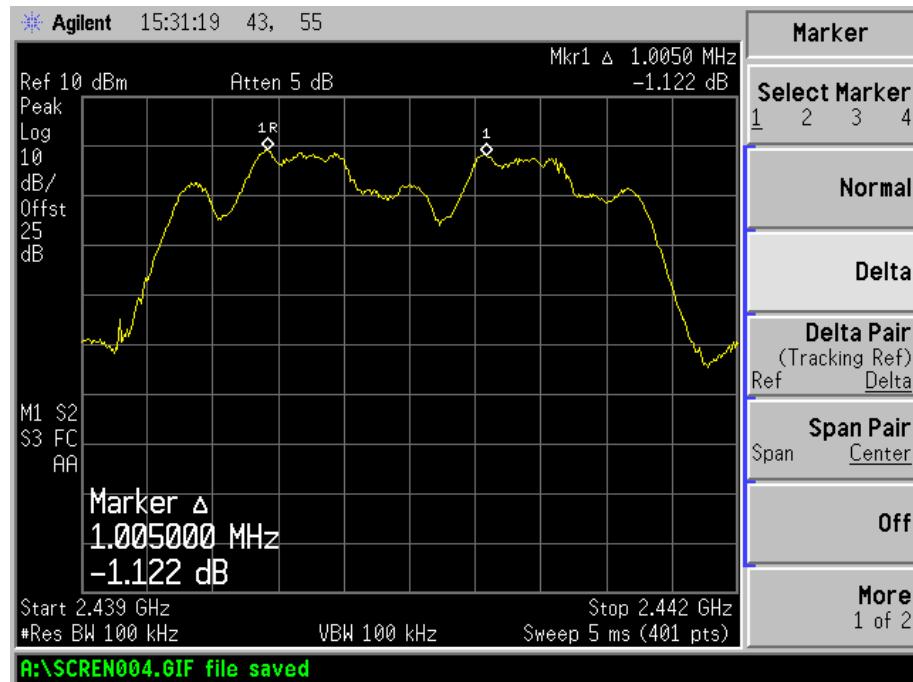

Channel Spacing (High CH=1MHz)

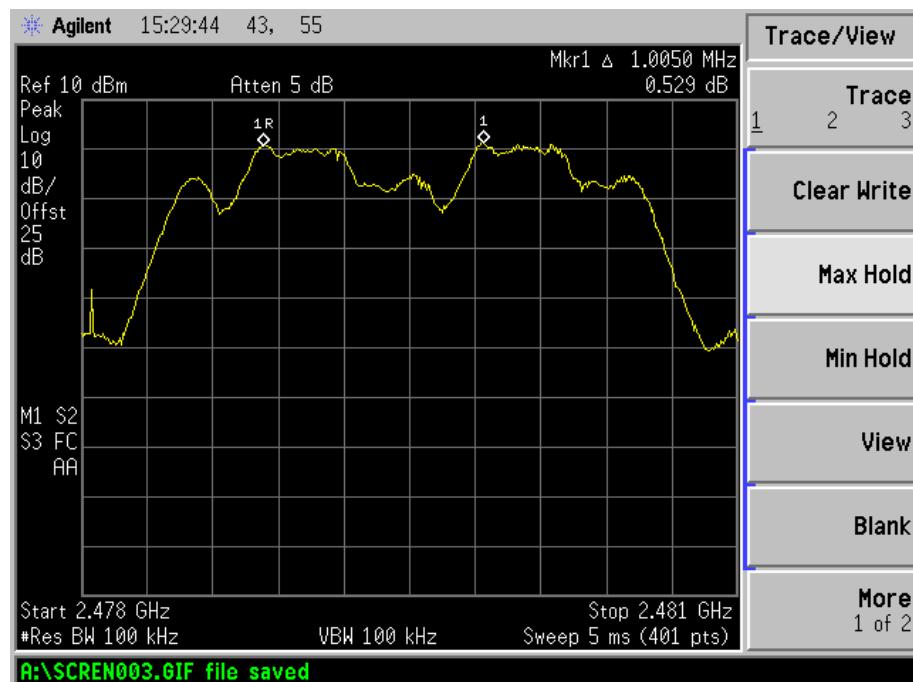

6. Dwell Time of Hopping Channel

6.1 Standard Applicable

According to 15.247(a)(1)(iii), Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

6.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	Agilent	E4402B	US41192821	2012-03-28	2013-03-27
Attenuator	ATTEN	ATS100-4-20	/	2012-03-28	2013-03-27

6.3 Test Procedure

According to the DA 00-705, the dwell time of a hopping channel test method as follows.

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Set span = zero span, centered on a hopping channel

RBW = 1MHz, VBW = 1MHz

Sweep = auto

Detector function = peak

Trace = max hold

Use the marker-delta function to determine the dwell time

6.4 Environmental Conditions

Temperature:	24 °C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

6.5 Summary of Test Results/Plots

The dwell time within a period in data mode is independent from the packet type (packet length).

Test data is corrected with the worse case, which the packet length is DH1, DH3, DH5, 3DH1, 3DH3, 3DH5.



The test period: $T = 0.4 \text{ Second} * 79 \text{ Channel} = 31.6 \text{ s}$


Dwell time = time slot length * (Hopping rate / Number of hopping channels) * Period

Modulation	Test Channel	Packet	Time Slot Length	Dwell Time	Limit
			ms	ms	ms
GFSK	2402MHz	DH1	0.4100	131.2	400
		DH3	1.6750	268.0	400
		DH5	2.9625	316.0	400
	2441MHz	DH1	0.4100	131.2	400
		DH3	1.6750	268.0	400
		DH5	2.9625	316.0	400
	2480MHz	DH1	0.4100	131.2	400
		DH3	1.6750	268.0	400
		DH5	2.9625	316.0	400
8DPSK	2402MHz	3DH1	0.4400	140.8	400
		3DH3	1.7000	272.0	400
		3DH5	3.0000	320.0	400
	2441MHz	3DH1	0.4400	140.8	400
		3DH3	1.7000	272.0	400
		3DH5	3.0000	320.0	400
	2480MHz	3DH1	0.4400	140.8	400
		3DH3	1.700	272.0	400
		3DH5	3.0000	320.0	400


Please refer to the test plots as below:



DH1 time slot (Low, Middle, High Channels)

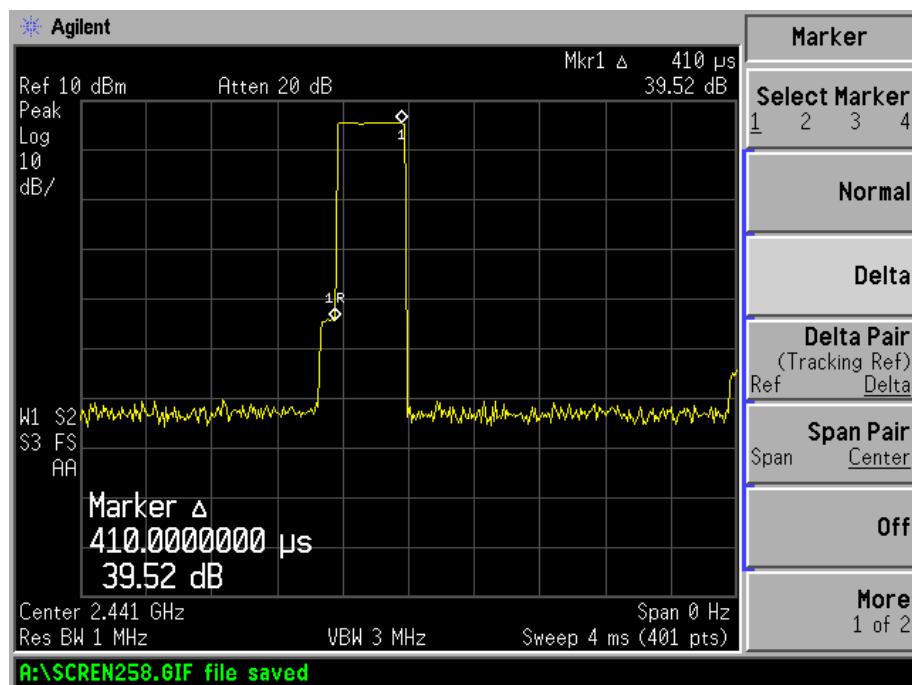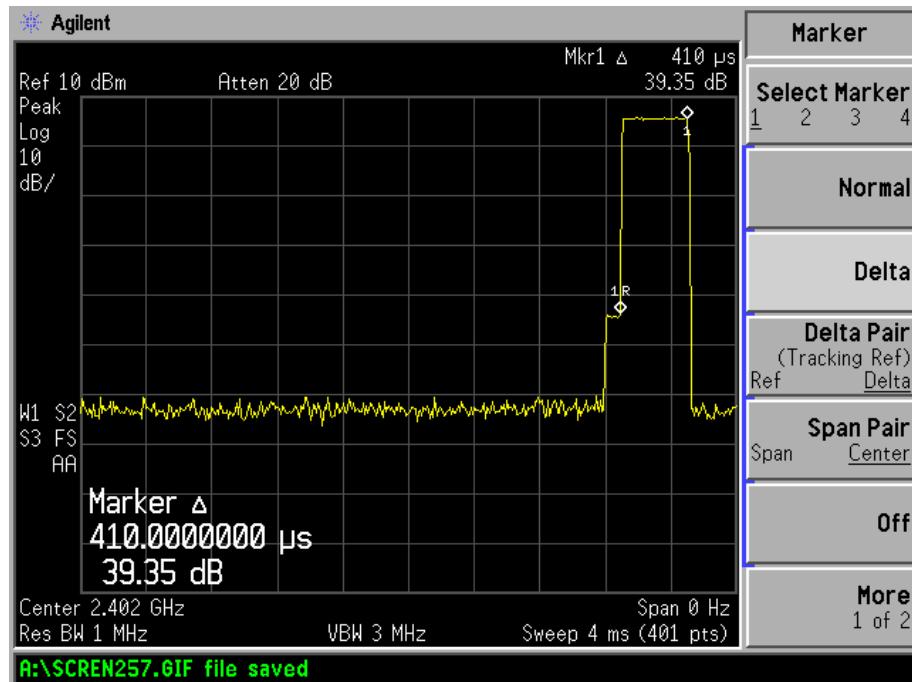


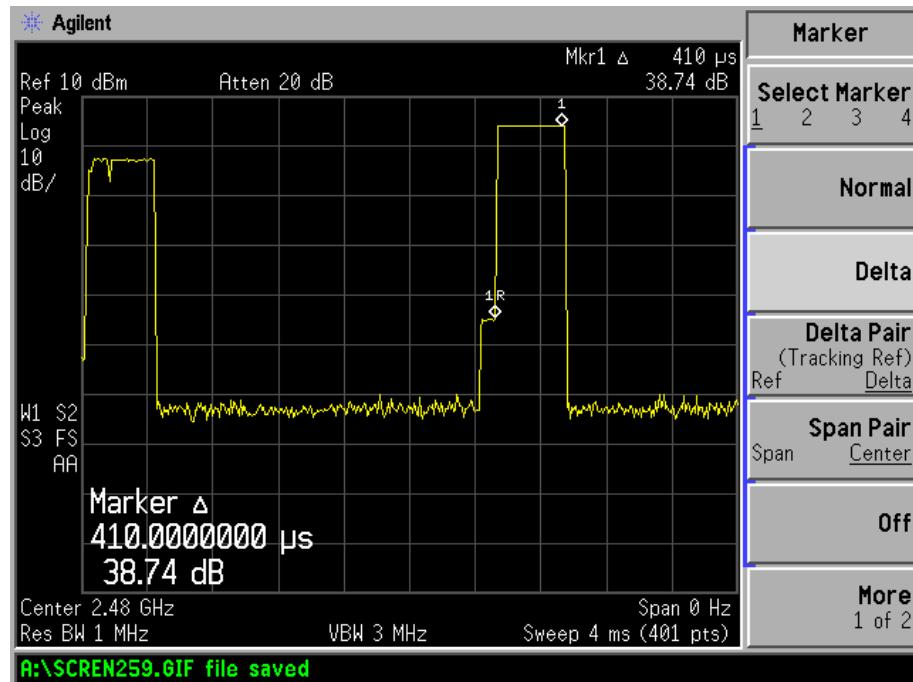



DH3 time slot (Low, Middle, High Channels)

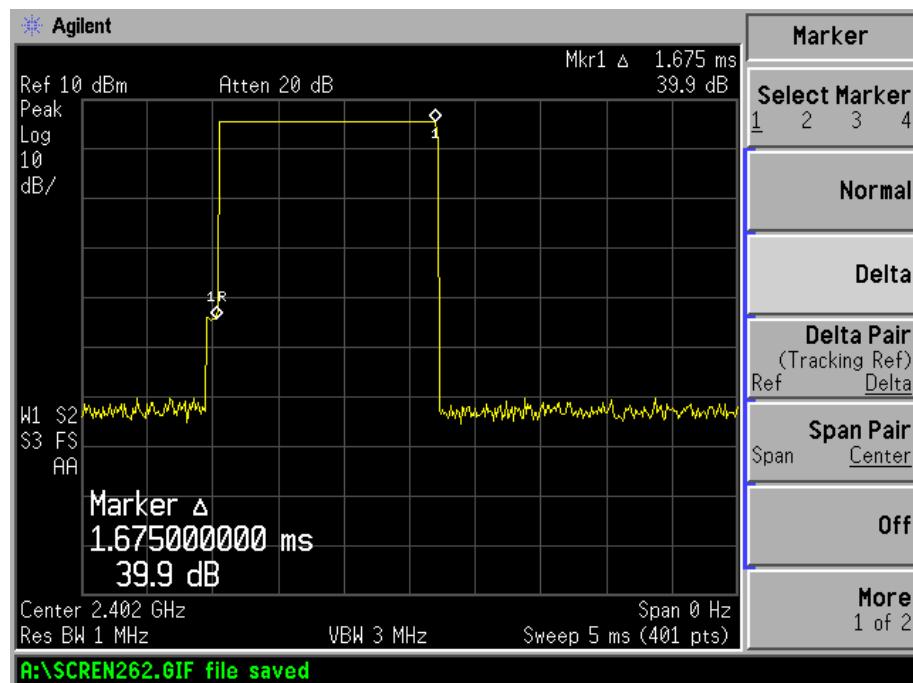

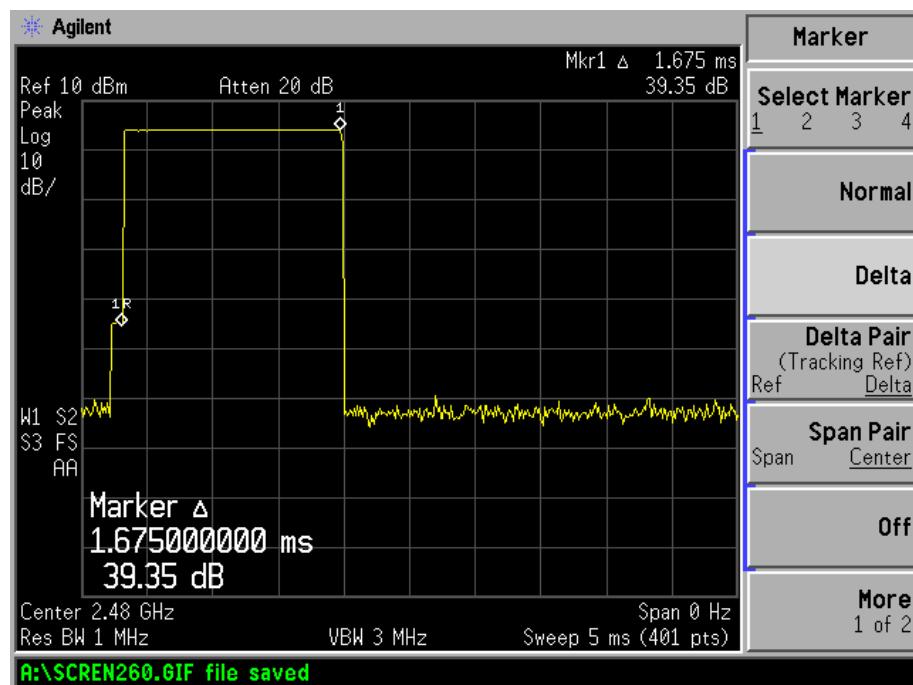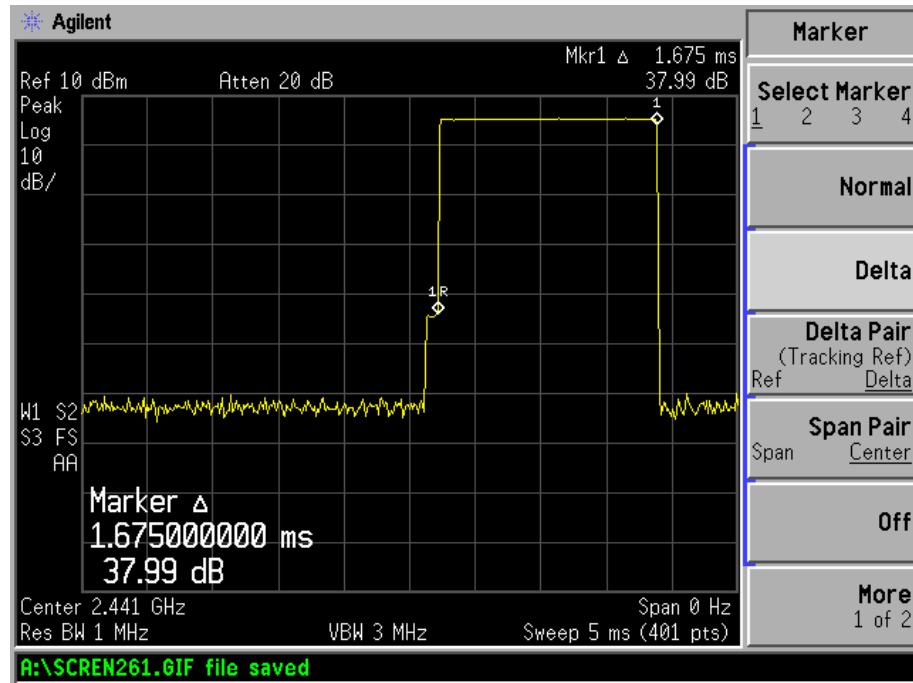




DH5 time slot (Low, Middle, High Channels)

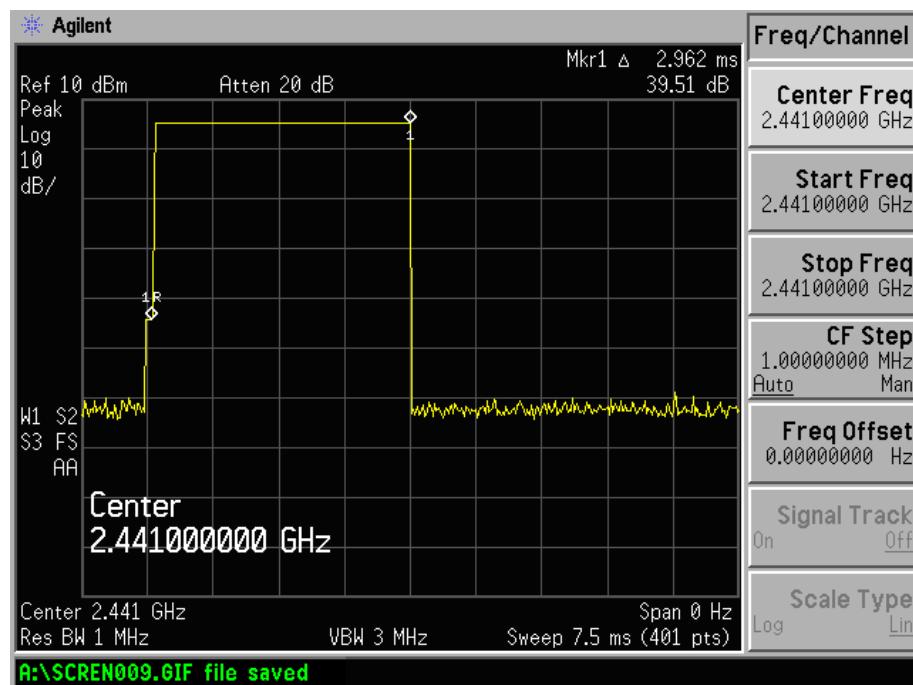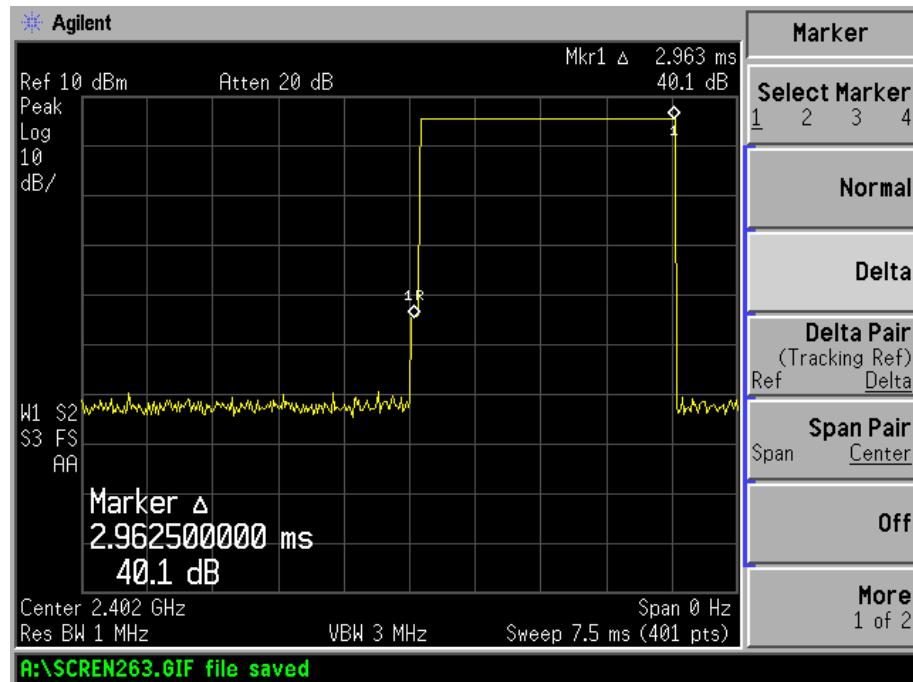


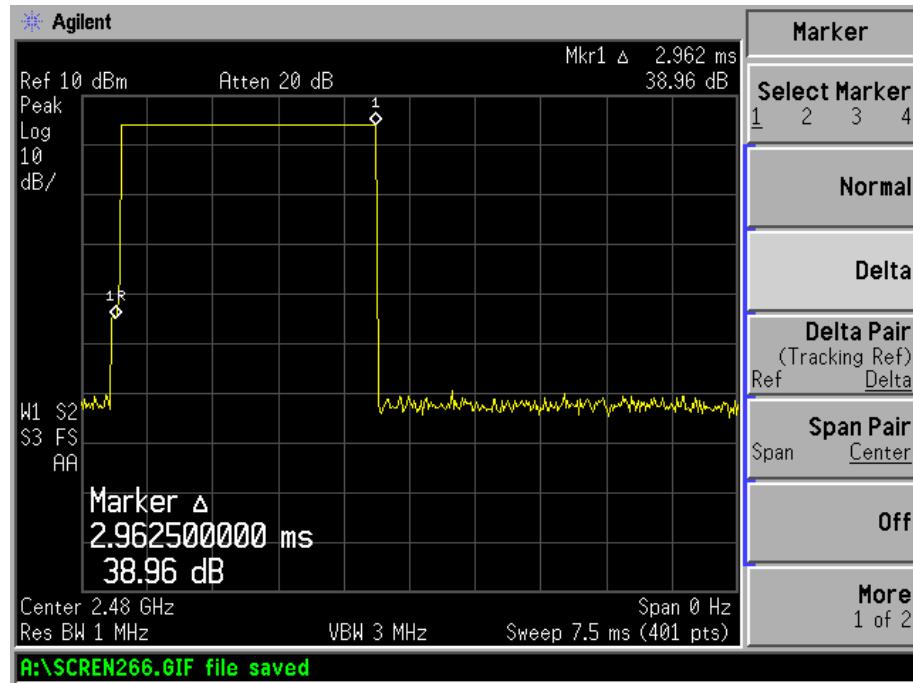



3DH1 time slot (Low, Middle, High Channels)

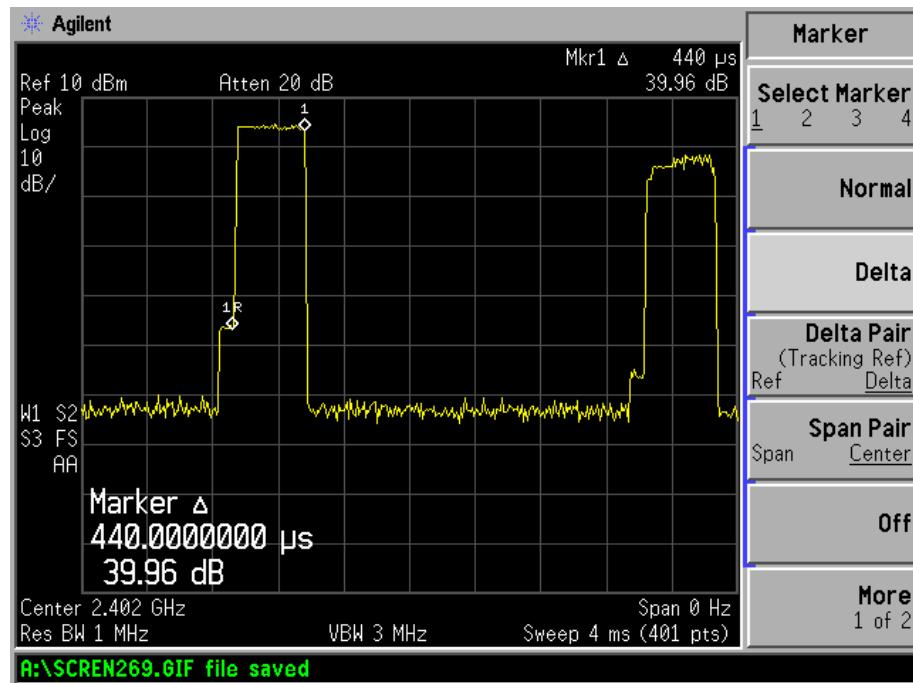

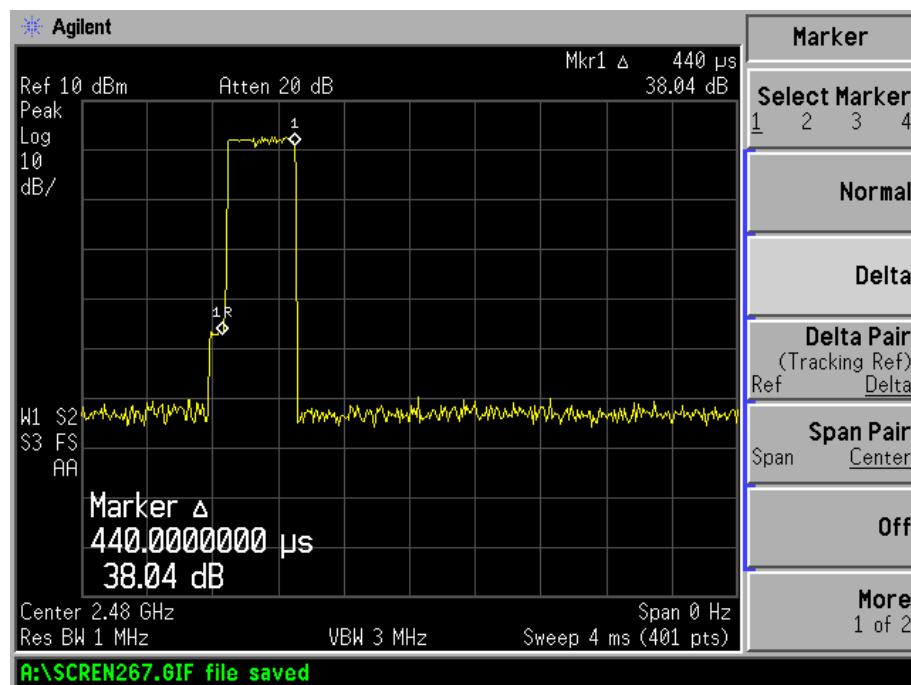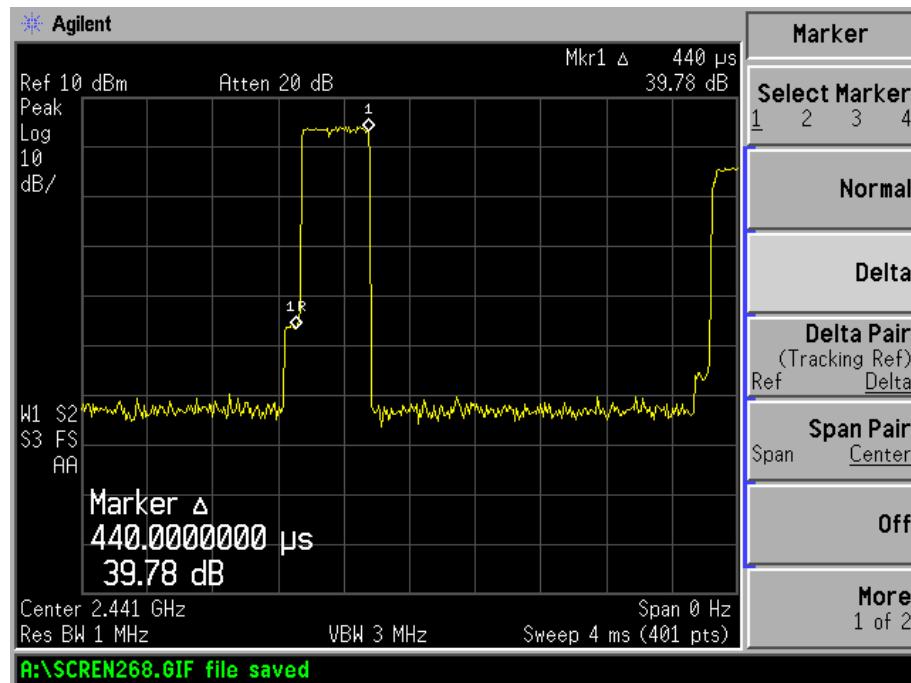




3DH3 time slot (Low, Middle, High Channels)

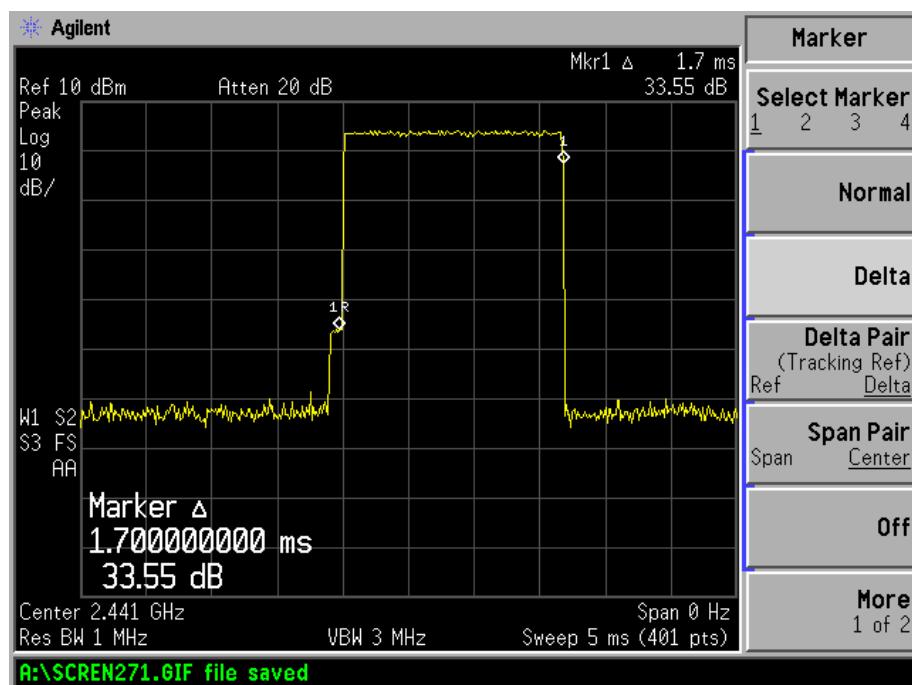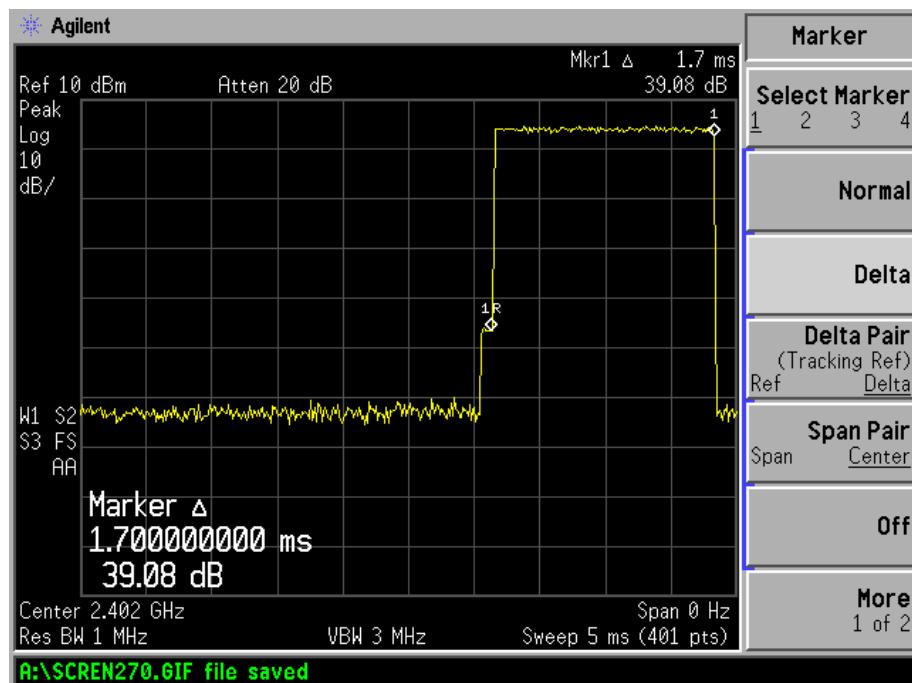

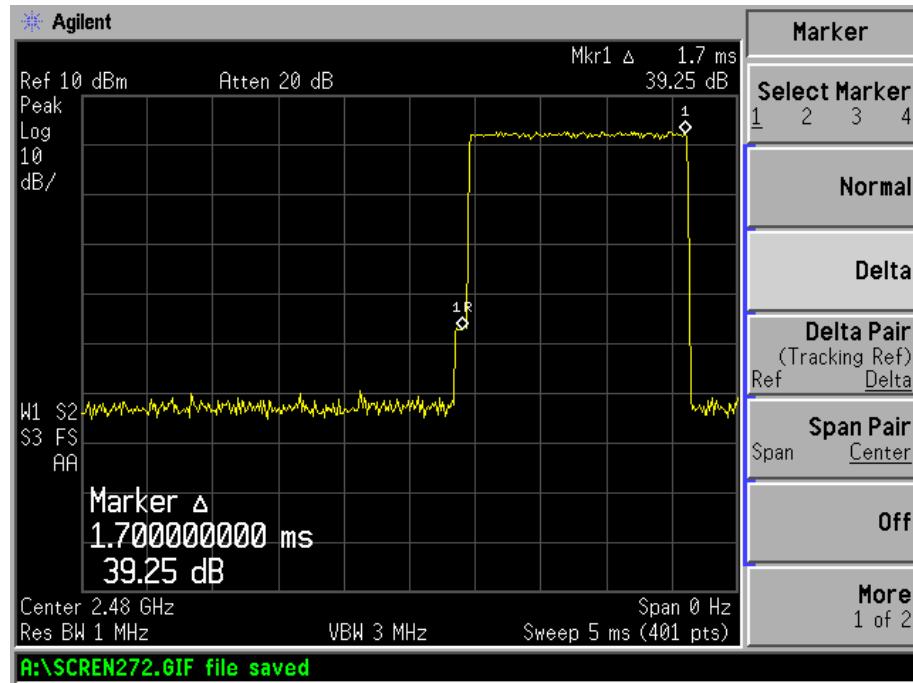

3DH5 time slot (Low, Middle, High Channels)

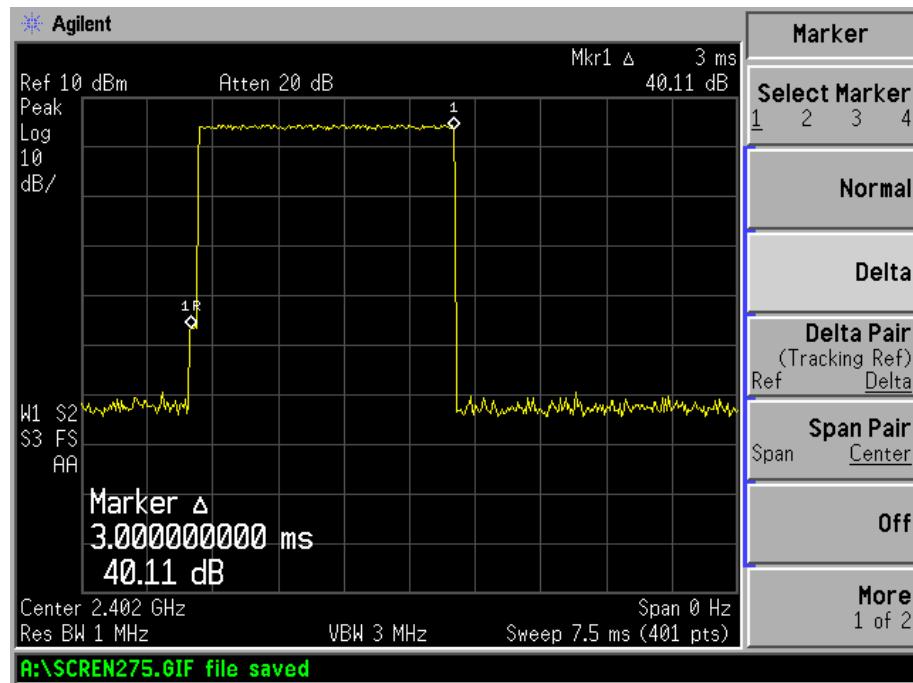

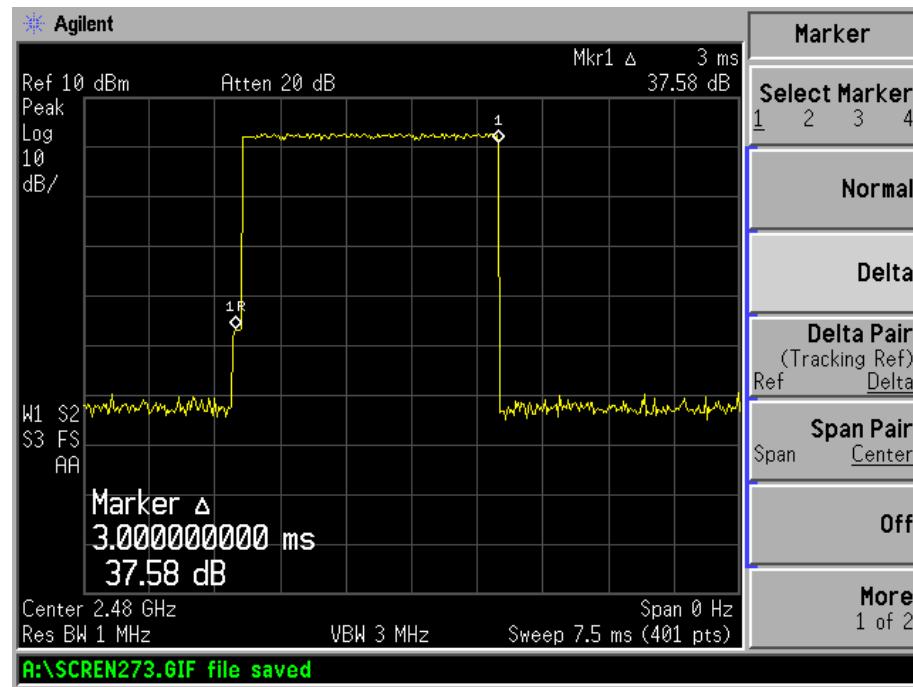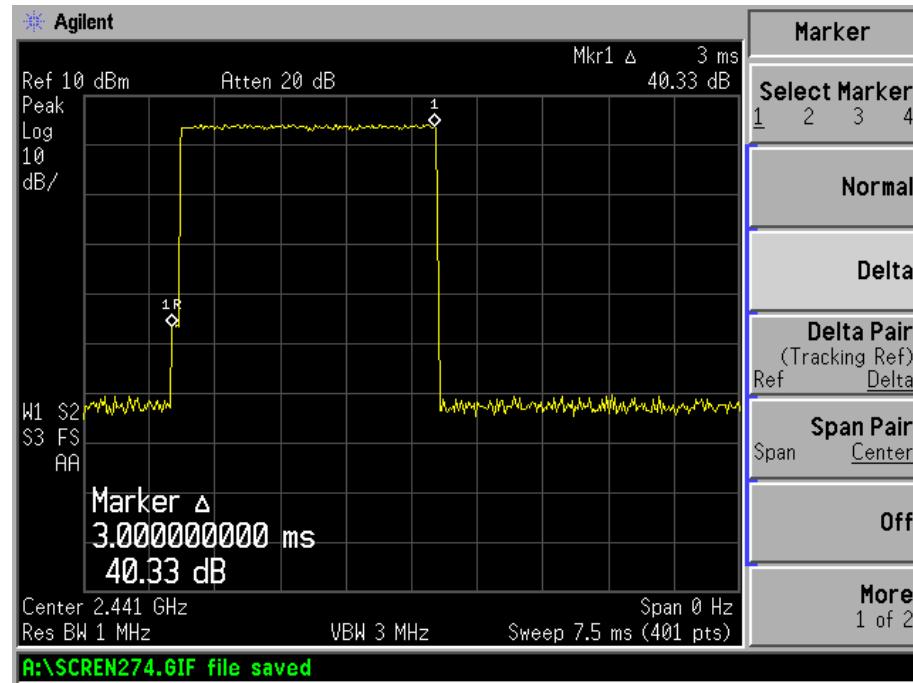

7. 20dB Bandwidth

7.1 Standard Applicable

According to 15.247(a)(1)(iii). For frequency hopping systems operating in the 2400MHz-2483.5 MHz no limit for 20dB bandwidth.

7.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	Agilent	E4402B	US41192821	2012-03-28	2013-03-27
Attenuator	ATTEN	ATS100-4-20	/	2012-03-28	2013-03-27

7.3 Test Procedure

According to the DA 00-705, the 20dB bandwidth test method as follows.

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Set span = 2MHz, centered on a hopping channel

RBW \geq 1% 20dB Bandwidth, VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

All the trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission, use the marker-delta function to measure and record the 20dB down bandwidth of the emission.

7.4 Environmental Conditions


Temperature:	25 °C
Relative Humidity:	53%
ATM Pressure:	1018 mbar

7.5 Summary of Test Results/Plots

Channel	Frequency MHz	20dB Bandwidth (GFSK) kHz	20dB Bandwidth (8DPSK) kHz
Low Channel	2402	805.088	1279
Middle Channel	2441	879.795	1302
High Channel	2480	849.591	1296

GFSK Mode

Low Channel:

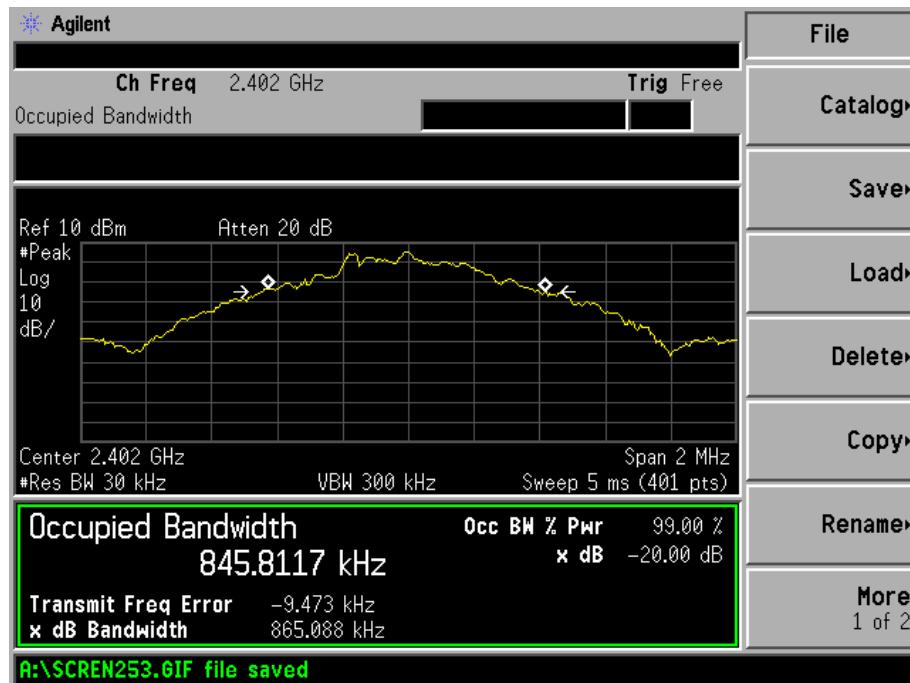

Middle Channel:




High Channel:




8DPSK Mode


Low Channel:

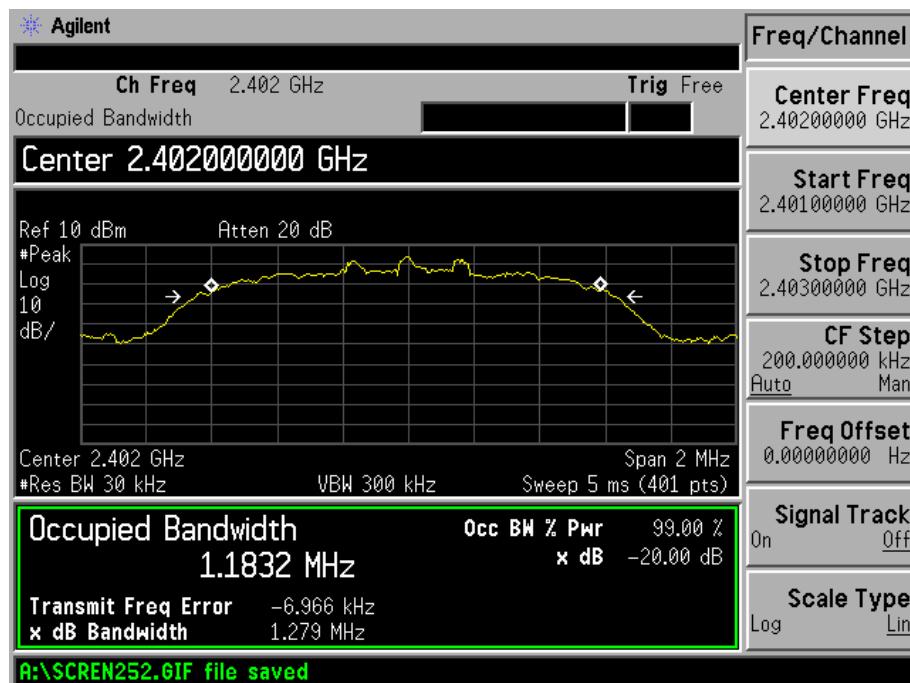

Middle Channel:

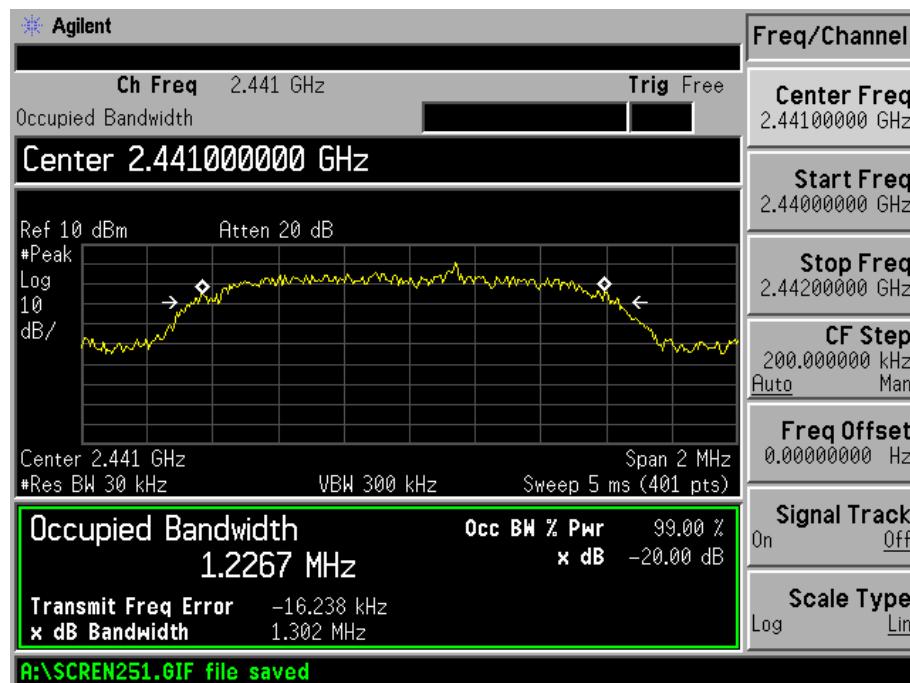

High Channel:

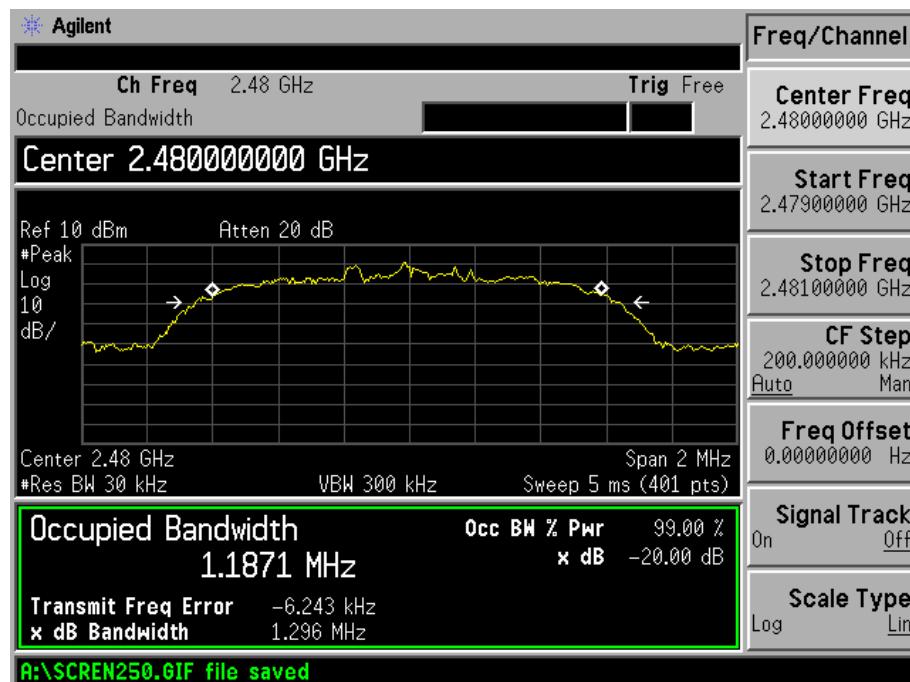

8. RF Output Power

8.1 Standard Applicable

According to 15.247(b)(1). For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

8.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	Agilent	E4402B	US41192821	2012-03-28	2013-03-27
Attenuator	ATTEN	ATS100-4-20	/	2012-03-28	2013-03-27

8.3 Test Procedure

According to the DA 00-705, the peak output power test method as follows.

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Set span = 5MHz, centered on a hopping channel

RBW = 1MHz, VBW = 1MHz

Sweep = auto

Detector function = peak

Trace = max hold

All the trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission, the indicated level is the peak output power (the external attenuation and cable loss shall be considered).

8.4 Environmental Conditions

Temperature:	24 °C
Relative Humidity:	55%
ATM Pressure:	1011 mbar

8.5 Summary of Test Results/Plots

Maximum Output Power Under Worst Case:

Channel	Frequency MHz	Measured Value dBm	Output Power mW	Limit mW
Low Channel	2402	4.657	2.9221	1000
Middle Channel	2441	4.325	2.7071	1000
High Channel	2480	3.217	2.0975	1000

Note: the antenna gain of -1dBi less than 6dBi maximum permission antenna gain value based on 1 watt peak output power limit.

9. Field Strength of Spurious Emissions

9.1 Measurement Uncertainty

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement is ± 5.10 dB.

9.2 Standard Applicable

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

9.3 Test Equipment List and Details


Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	R&S	FSP	836079/035	2012-03-28	2013-03-27
EMI Test Receiver	R&S	ESVB	825471/005	2012-03-28	2013-03-27
Pre-amplifier	Agilent	8447F	3113A06717	2012-03-28	2013-03-27
Pre-amplifier	Compliance Direction	PAP-0118	24002	2012-03-28	2013-03-27
Trilog Broadband Antenna	SCHWARZBECK	VULB9163	9163-333	2012-02-25	2013-02-24
Horn Antenna	ETS	3117	00086197	2012-02-25	2013-02-24
Horn Antenna	ETS	3116B	00088203	2012-02-25	2013-02-24
Loop Antenna	SCHWARZECK	HFRA 5165	9365	2012-02-25	2013-02-24

9.4 Test Procedure

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

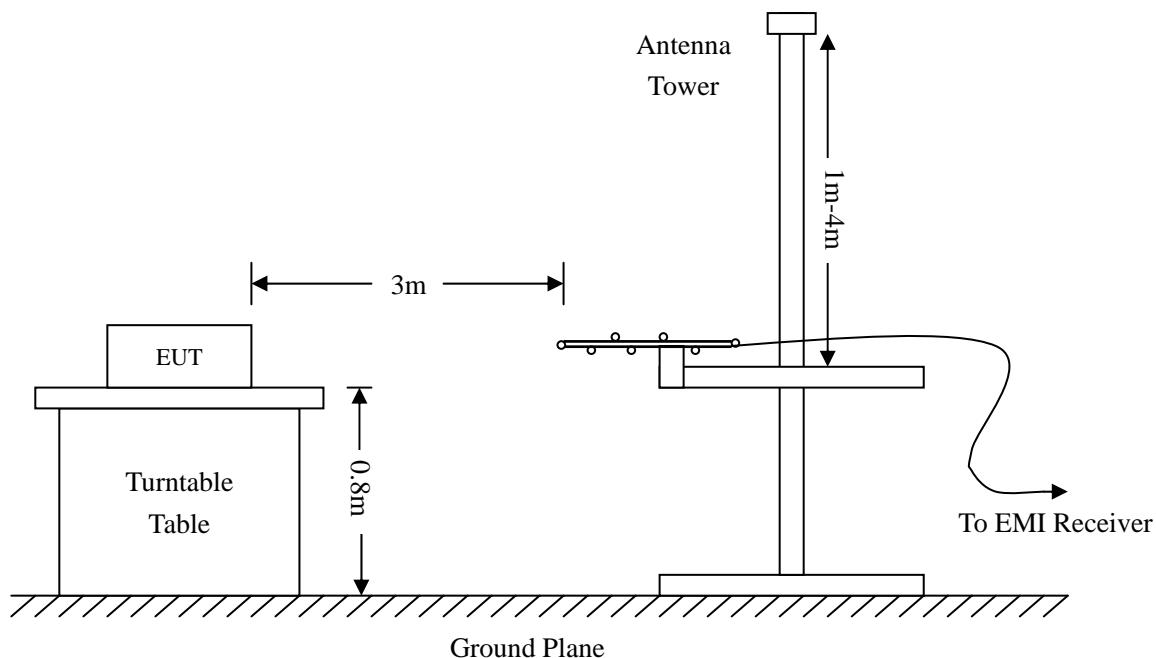

9.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

9.6 Environmental Conditions


Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

9.7 Summary of Test Results/Plots

According to the data below, the FCC Part 15.205, 15.209 and 15.247 standards, and had the worst margin of:


-1.33 dB μ V at 35.7491 MHz in the Vertical polarization at low channel, 9 kHz to 25 GHz, 3 Meters

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

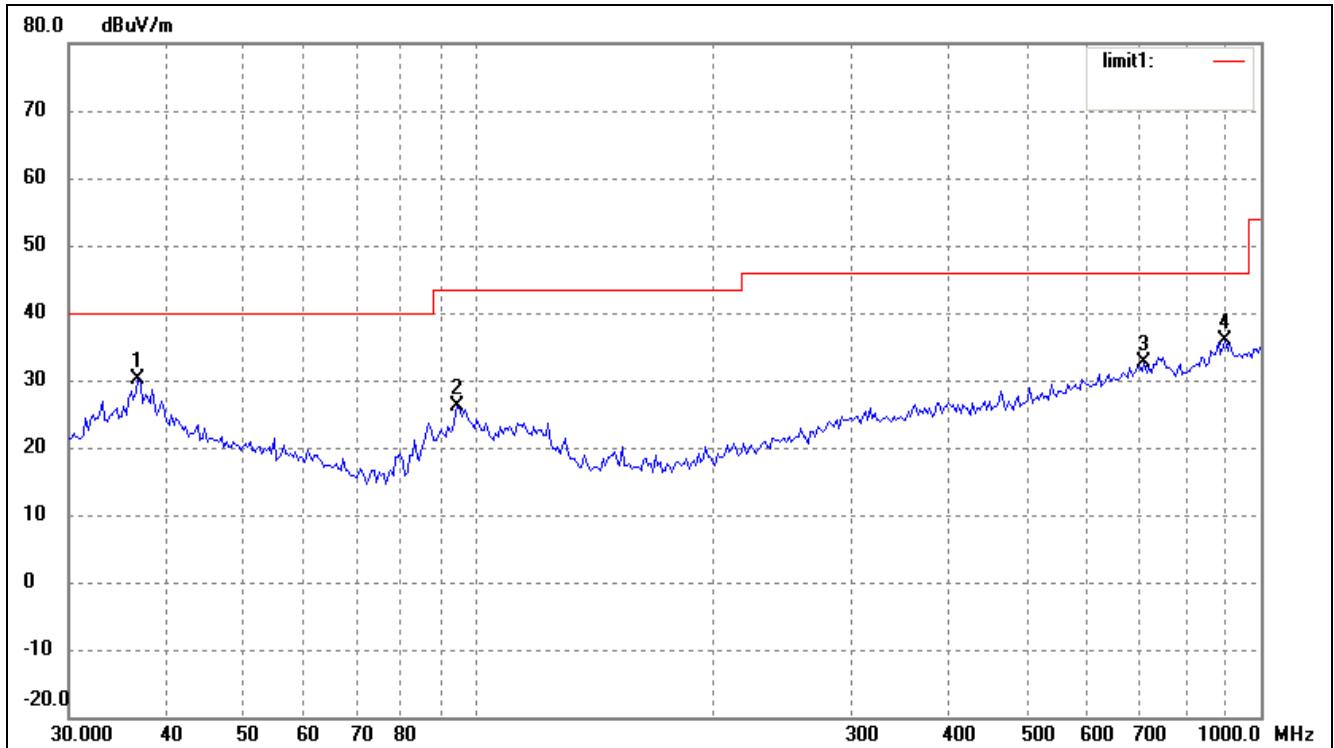Plot of Radiated Emissions Test Data (30MHz to 1GHz)EUT: *Mobile Phone*Tested Model: *I121C*Operating Condition: *Transmitting Low Channel (2402MHz)*Comment: *DC 3.7V Battery*Test Specification: *Horizontal*

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	36.7662	20.96	9.16	30.12	40.00	-9.88	225	100	peak
2	94.0979	20.80	5.37	26.17	43.50	-17.33	44	100	peak
3	709.1823	16.52	16.15	32.67	46.00	-13.33	65	100	peak
4	900.1474	16.41	19.38	35.79	46.00	-10.21	240	100	peak


Test Specification: Vertical

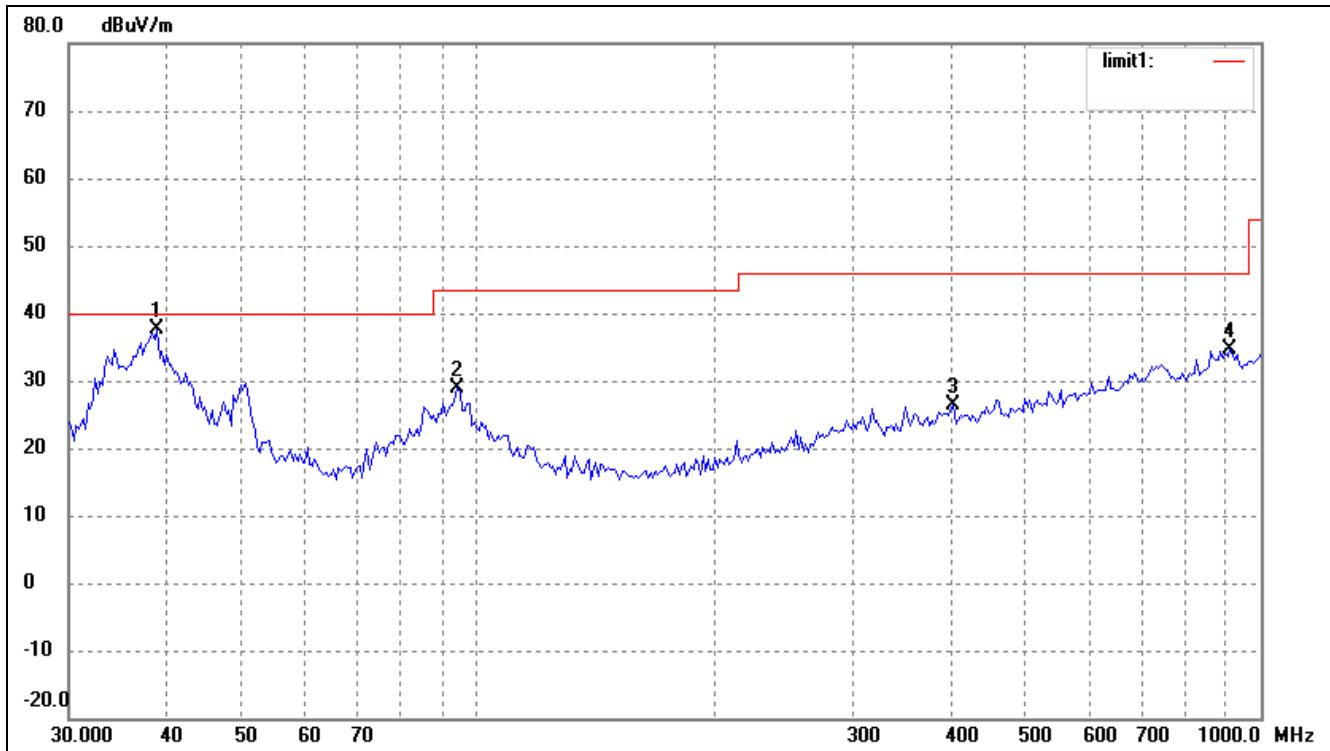

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	38.8879	28.02	9.50	37.52	40.00	-2.48	124	100	peak
2	94.0979	23.45	5.37	28.82	43.50	-14.68	76	100	peak
3	404.6665	15.05	11.35	26.40	46.00	-19.60	65	100	peak
4	912.8620	15.60	18.93	34.53	46.00	-11.47	24	100	peak


Operating Condition: Transmitting Middle Channel (2441MHz)
Comment: DC 3.7V Battery

Test Specification: Horizontal

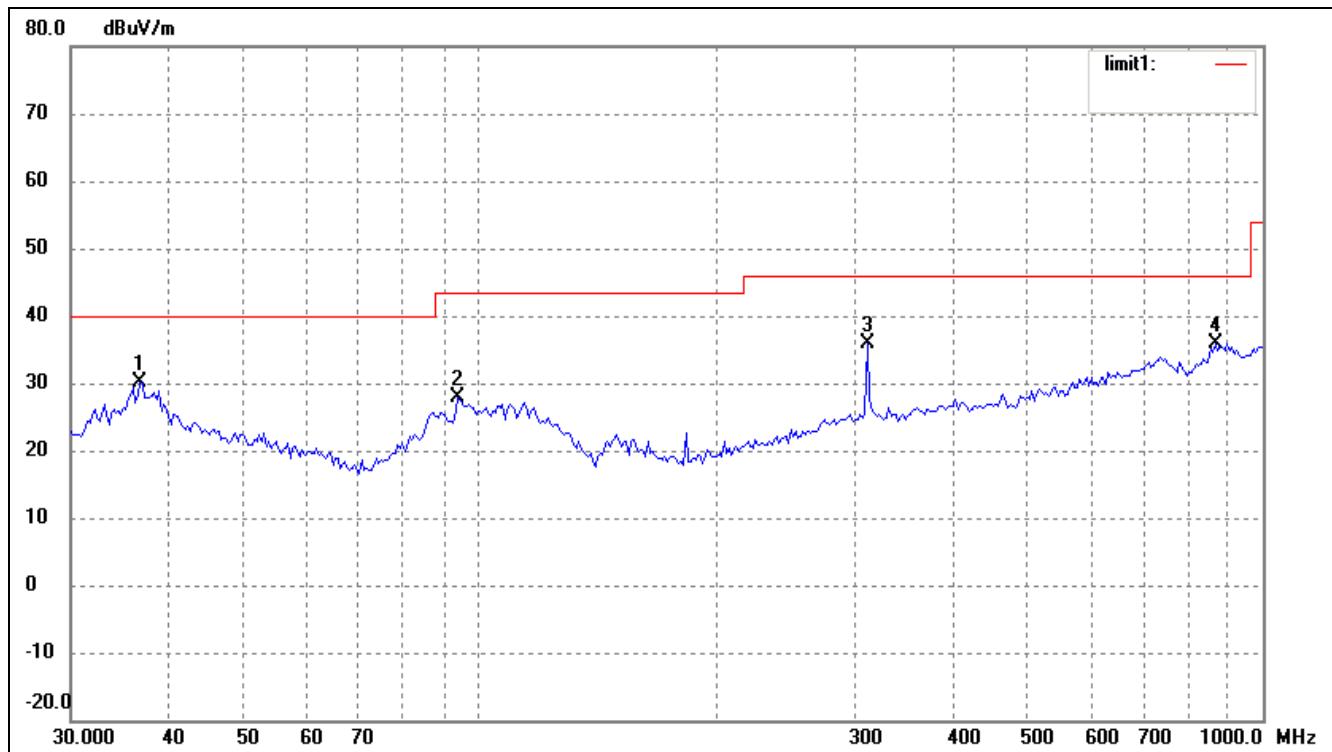

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	36.7662	20.96	9.16	30.12	40.00	-9.88	33	100	peak
2	93.4402	22.58	5.22	27.80	43.50	-15.70	44	100	peak
3	312.1794	25.58	10.36	35.94	46.00	-10.06	258	100	peak
4	869.1302	17.45	18.54	35.99	46.00	-10.01	206	100	peak


Test Specification: Vertical

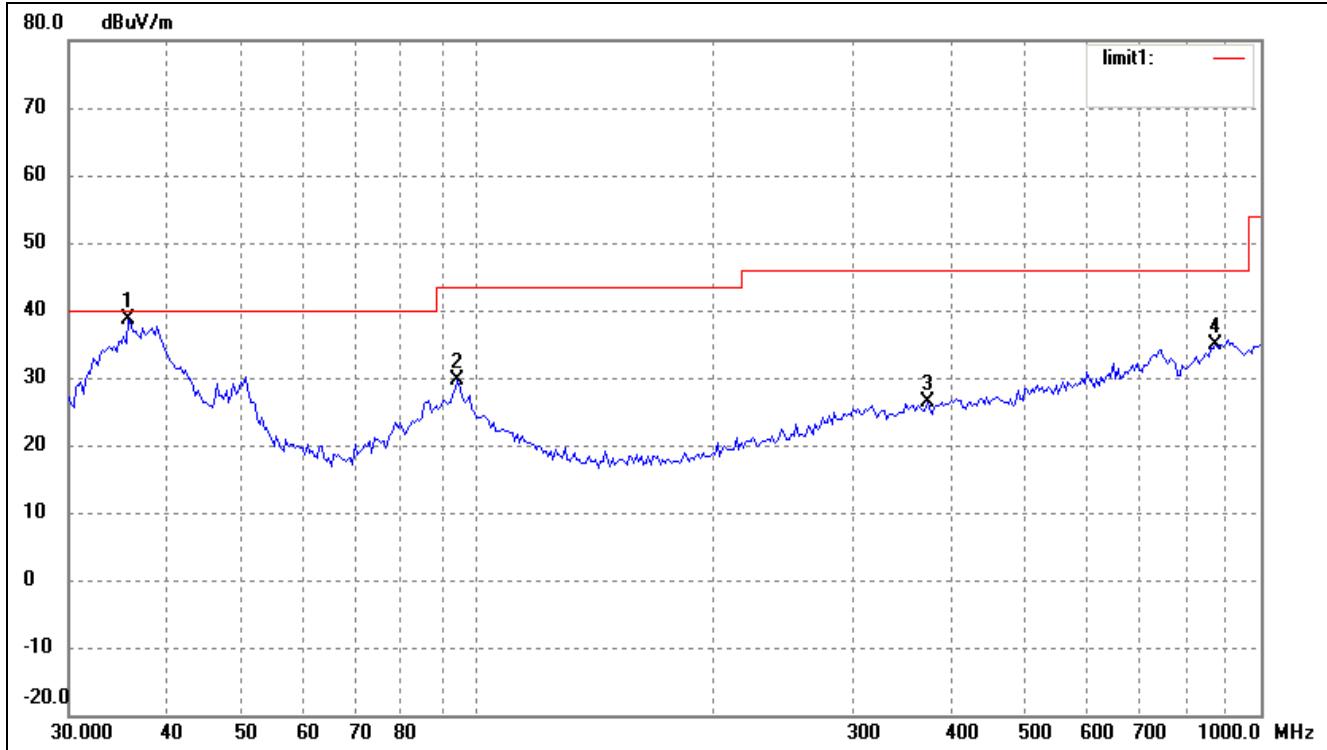

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	35.7491	29.67	9.00	38.67	40.00	-1.33	255	100	peak
2	94.0979	24.36	5.37	29.73	43.50	-13.77	34	100	peak
3	374.6226	15.87	10.63	26.50	46.00	-19.50	44	100	peak
4	875.2470	16.18	18.80	34.98	46.00	-11.02	7	100	peak


Operating Condition: Transmitting High Channel (2480MHz)
Comment: DC 3.7V Battery

Test Specification: Horizontal

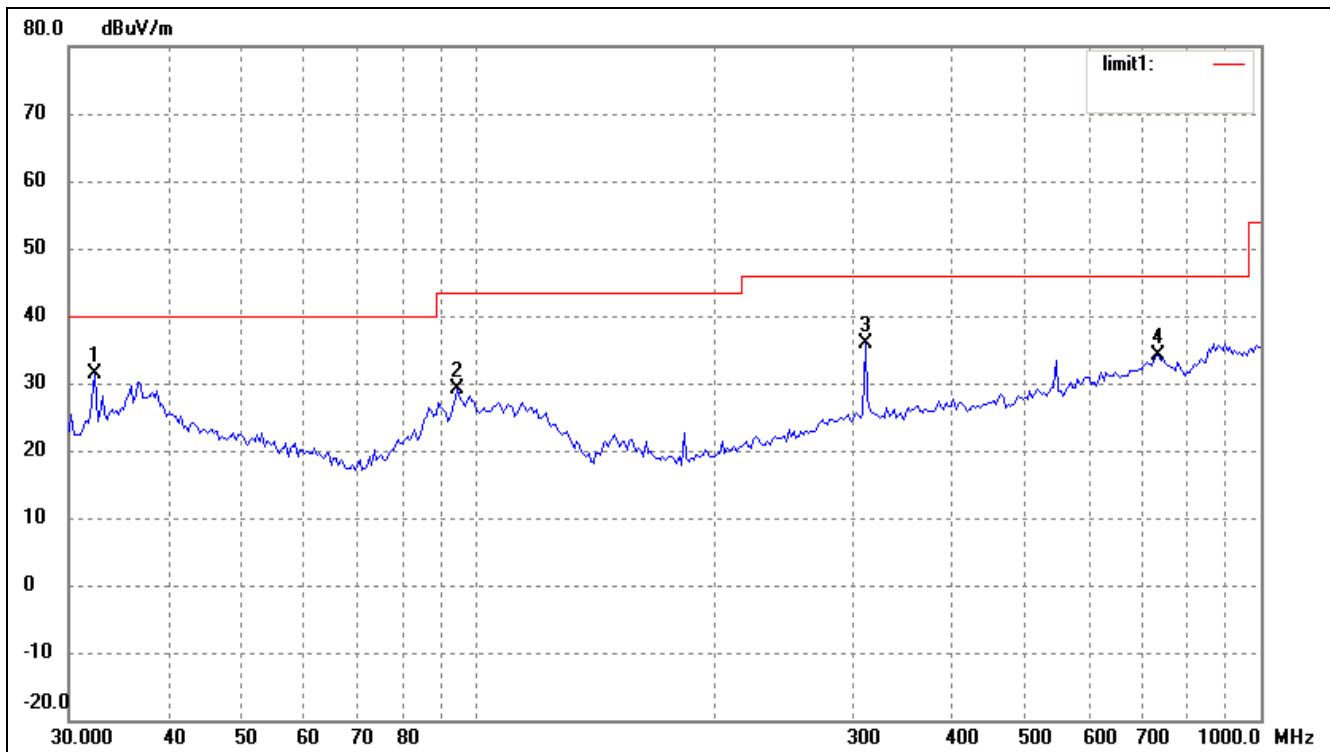

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	32.4059	22.88	8.44	31.32	40.00	-8.68	355	100	peak
2	94.0979	23.69	5.37	29.06	43.50	-14.44	155	100	peak
3	312.1794	25.58	10.36	35.94	46.00	-10.06	79	100	peak
4	739.6605	16.08	18.07	34.15	46.00	-11.85	25	100	peak

Test Specification: Vertical

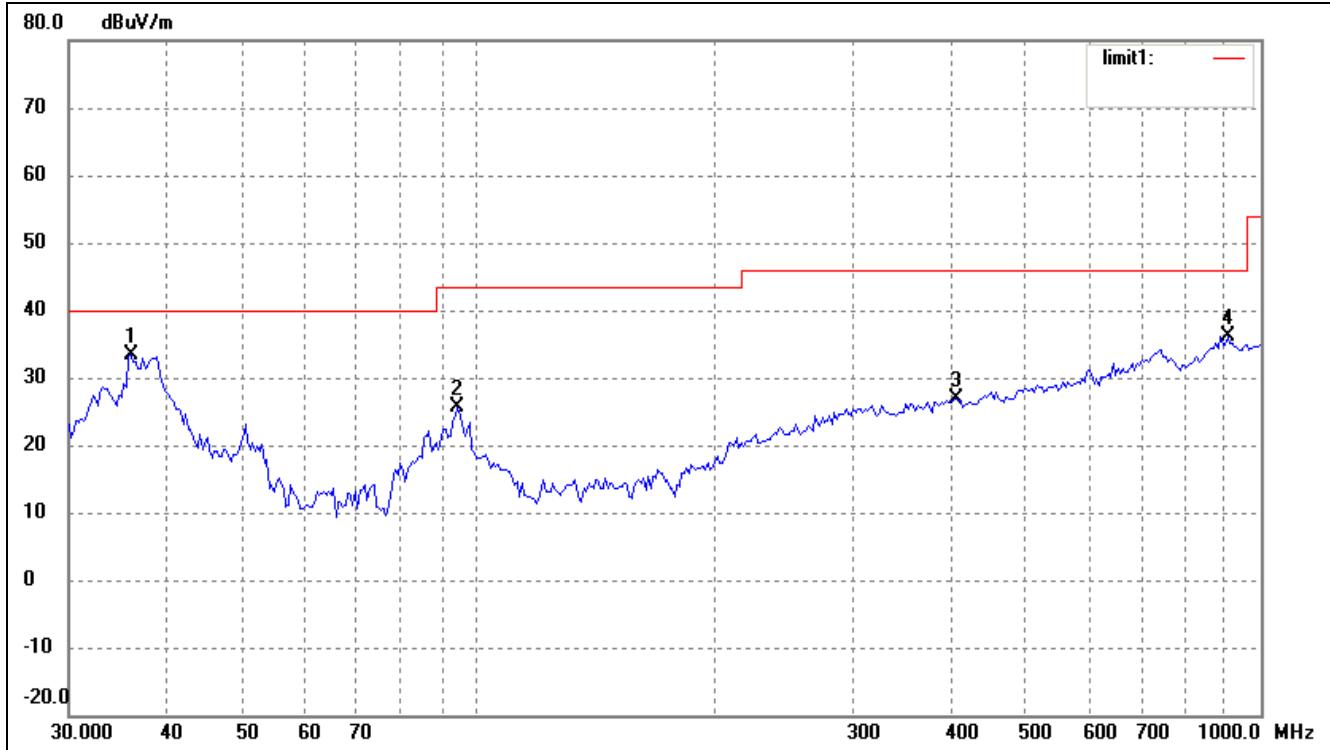


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	36.0007	24.25	9.04	33.29	40.00	-6.71	206	100	peak
2	94.0979	20.36	5.37	25.73	43.50	-17.77	44	100	peak
3	407.5145	15.54	11.22	26.76	46.00	-19.24	336	100	peak
4	906.4824	16.92	19.15	36.07	46.00	-9.93	24	100	peak

Spurious Emissions Above 1GHz

Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel-2402MHz							
4804	53.67	-3.92	49.75	74.00	-24.25	H	PK
4804	40.38	-3.92	36.46	54.00	-23.54	H	AV
7206	47.05	3.62	50.65	74.00	-23.35	H	PK
7206	34.96	3.62	38.58	54.00	-15.42	H	AV
4804	51.27	-3.92	49.98	74.00	-24.02	V	PK
4804	38.76	-3.92	33.51	54.00	-16.49	V	AV
7206	47.18	3.62	50.80	74.00	-23.20	V	PK
7206	35.03	3.62	38.65	54.00	-15.35	V	AV
Middle Channel-2441MHz							
4882	50.71	-3.74	46.97	74.00	-27.03	H	PK
4882	37.15	-3.74	33.41	54.00	-20.59	H	AV
7323	47.30	3.62	50.92	74.00	-23.08	H	PK
7323	35.01	3.62	38.63	54.00	-15.37	H	AV
4882	49.97	-3.74	46.23	74.00	-27.77	V	PK
4882	37.26	-3.74	33.52	54.00	-20.48	V	AV
7323	46.93	3.62	50.55	74.00	-23.45	V	PK
7323	33.88	3.62	37.50	54.00	-16.50	V	AV
High Channel-2480MHz							
4960	49.68	-3.48	46.20	74.00	-27.80	H	PK
4960	36.82	-3.48	33.34	54.00	-20.66	H	AV
7440	34.75	3.71	38.56	54.00	-15.44	H	PK
7440	47.12	3.71	50.83	74.00	-23.17	H	AV
4960	49.17	-3.48	45.69	74.00	-28.31	V	PK
4960	36.87	-3.48	33.39	54.00	-20.61	V	AV
7440	47.14	3.71	50.85	54.00	-23.15	V	PK
7440	34.87	3.71	38.58	74.00	-15.42	V	AV


Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, which above 5th Harmonics are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

The measurements greater than 20dB below the limit from 9kHz to 30MHz..

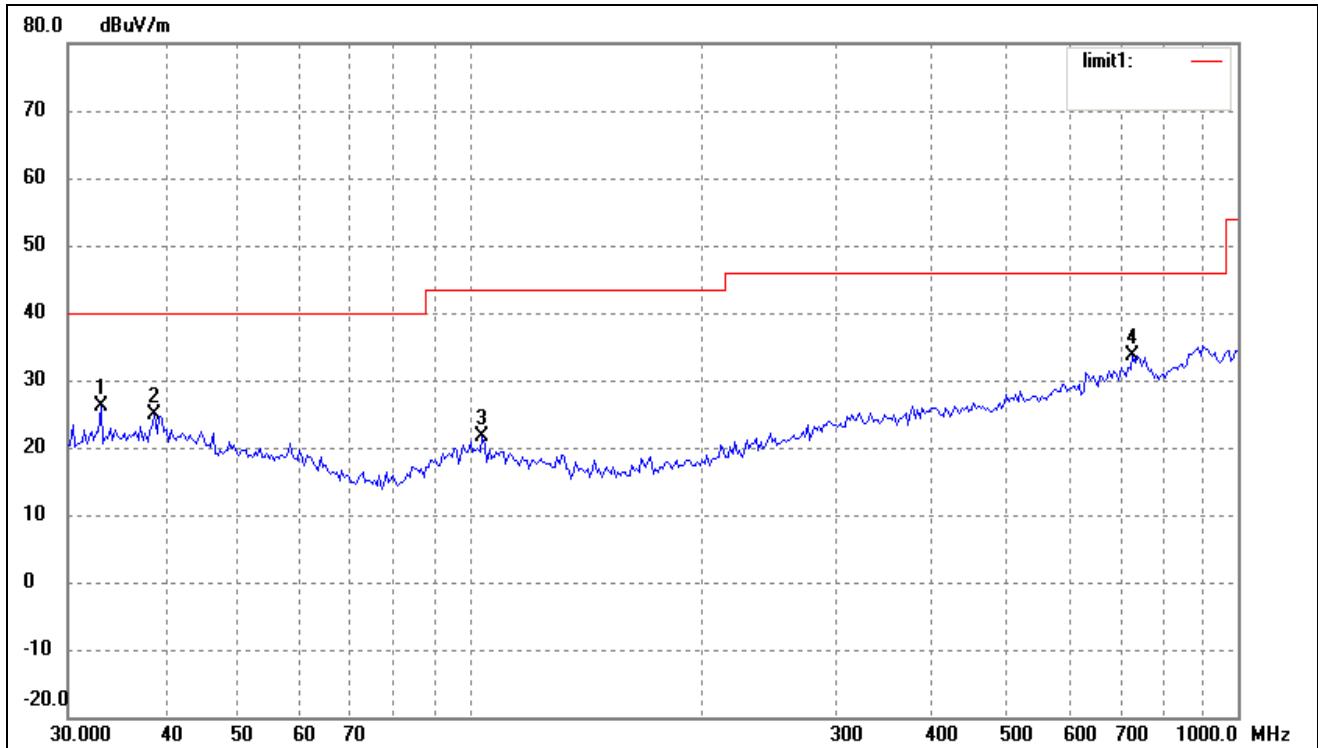Plot of Radiated Emissions Test Data (30MHz to 1GHz)EUT: *Mobile Phone*Tested Model: *I121*Operating Condition: *Transmitting Low Channel (2402MHz)*Comment: *DC 3.7V Battery*Test Specification: *Horizontal*

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	33.0950	17.54	8.56	26.10	40.00	-13.90	36	100	peak
2	38.8879	15.28	9.50	24.78	40.00	-15.22	15	100	peak
3	103.8055	15.06	6.46	21.52	43.50	-21.98	61	100	peak
4	729.3583	16.28	17.31	33.59	46.00	-12.41	0	100	peak


Test Specification: Vertical

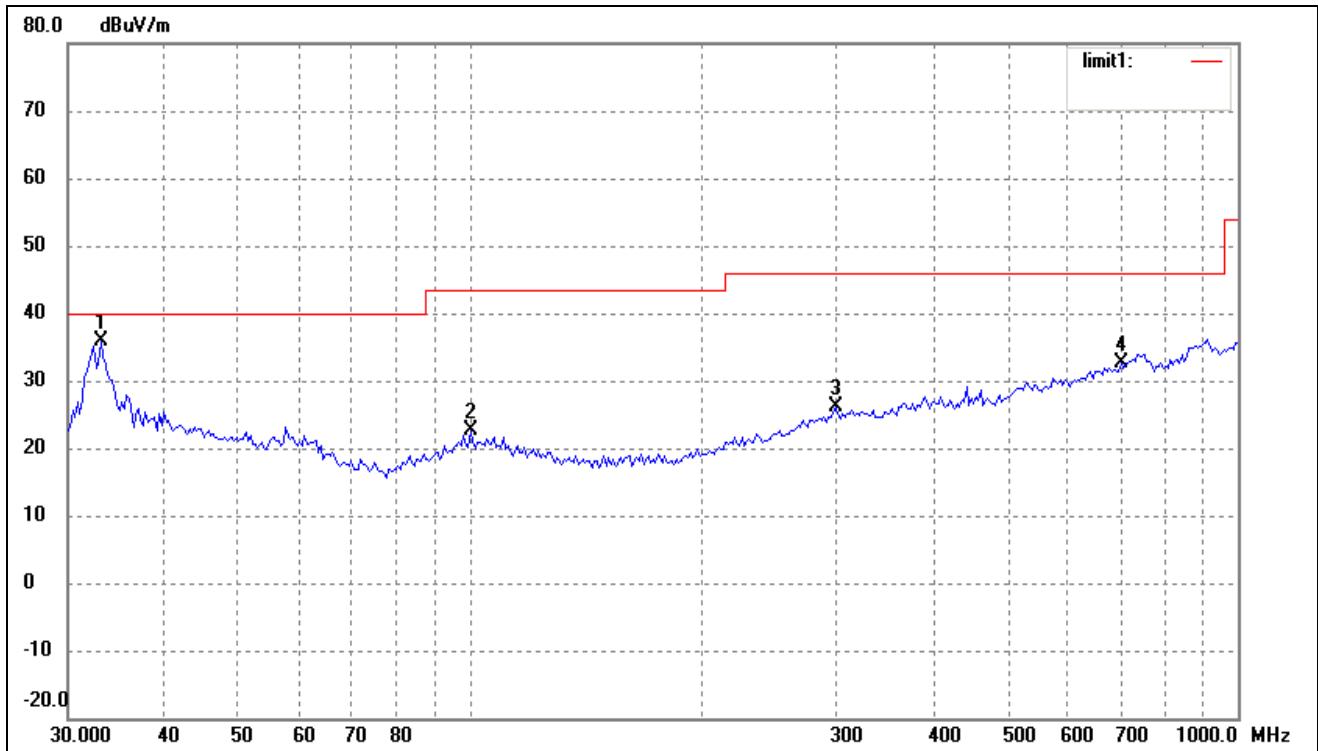

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	33.0950	27.28	8.56	35.84	40.00	-4.16	0	100	peak
2	100.2286	15.82	6.81	22.63	43.50	-20.87	0	100	peak
3	299.3158	16.06	10.15	26.21	46.00	-19.79	0	100	peak
4	704.2261	16.72	15.93	32.65	46.00	-13.35	0	100	peak


Operating Condition: Transmitting Middle Channel (2441MHz)
Comment: DC 3.7V Battery

Test Specification: Horizontal

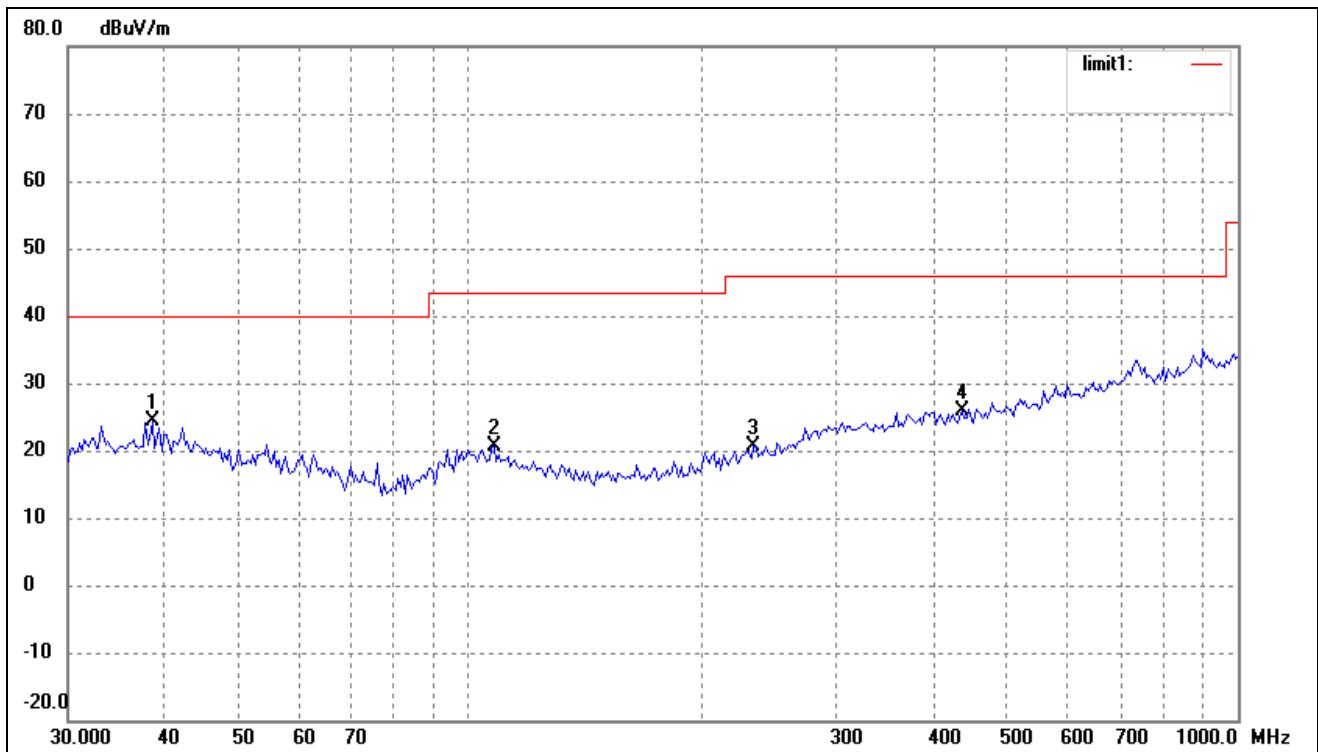

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	38.6161	15.02	9.46	24.48	40.00	-15.52	12	100	peak
2	107.5101	14.49	6.10	20.59	43.50	-22.91	40	100	peak
3	234.1684	13.99	6.69	20.68	46.00	-25.32	14	100	peak
4	437.1199	14.60	11.18	25.78	46.00	-20.22	12	100	peak


Test Specification: Vertical

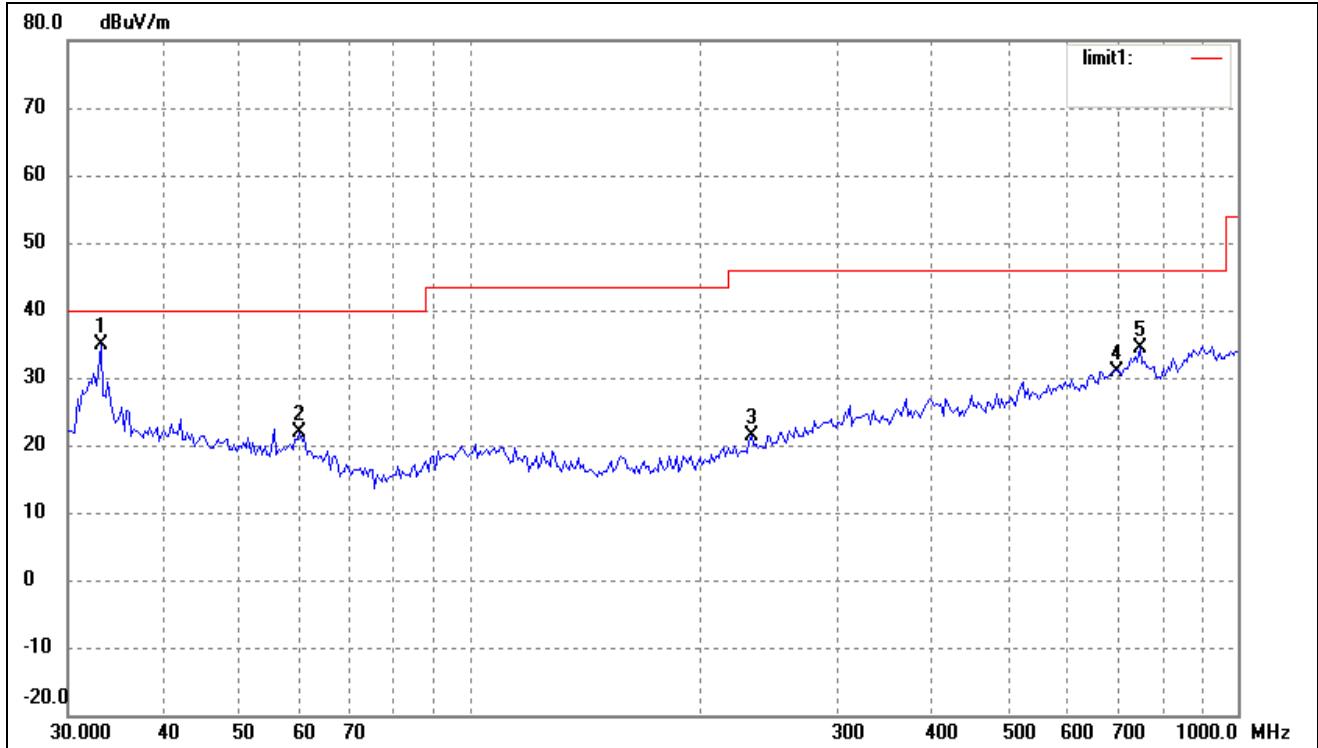

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	33.0950	26.42	8.56	34.98	40.00	-5.02	15	100	peak
2	60.0691	16.30	5.67	21.97	40.00	-18.03	4	100	peak
3	232.5318	14.68	6.59	21.27	46.00	-24.73	13	100	peak
4	694.4174	15.31	15.69	31.00	46.00	-15.00	0	100	peak
5	744.8661	16.50	17.95	34.45	46.00	-11.55	111	100	peak


Operating Condition: Transmitting High Channel (2480MHz)
Comment: DC 3.7V Battery

Test Specification: Horizontal

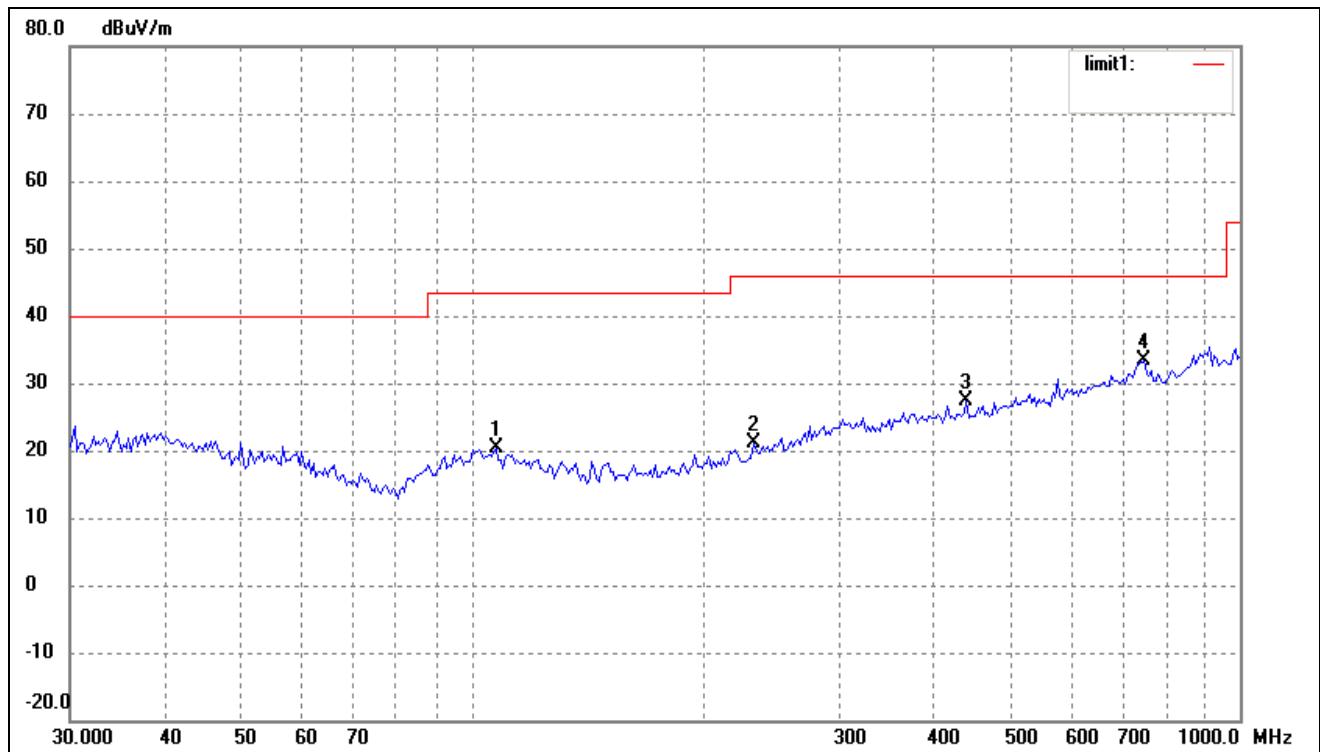

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	107.5101	14.34	6.10	20.44	43.50	-23.06	12	100	peak
2	232.5318	14.48	6.59	21.07	46.00	-24.93	0	100	peak
3	440.1963	16.02	11.27	27.29	46.00	-18.71	1	100	peak
4	750.1083	15.51	17.78	33.29	46.00	-12.71	191	100	peak

Test Specification: Vertical

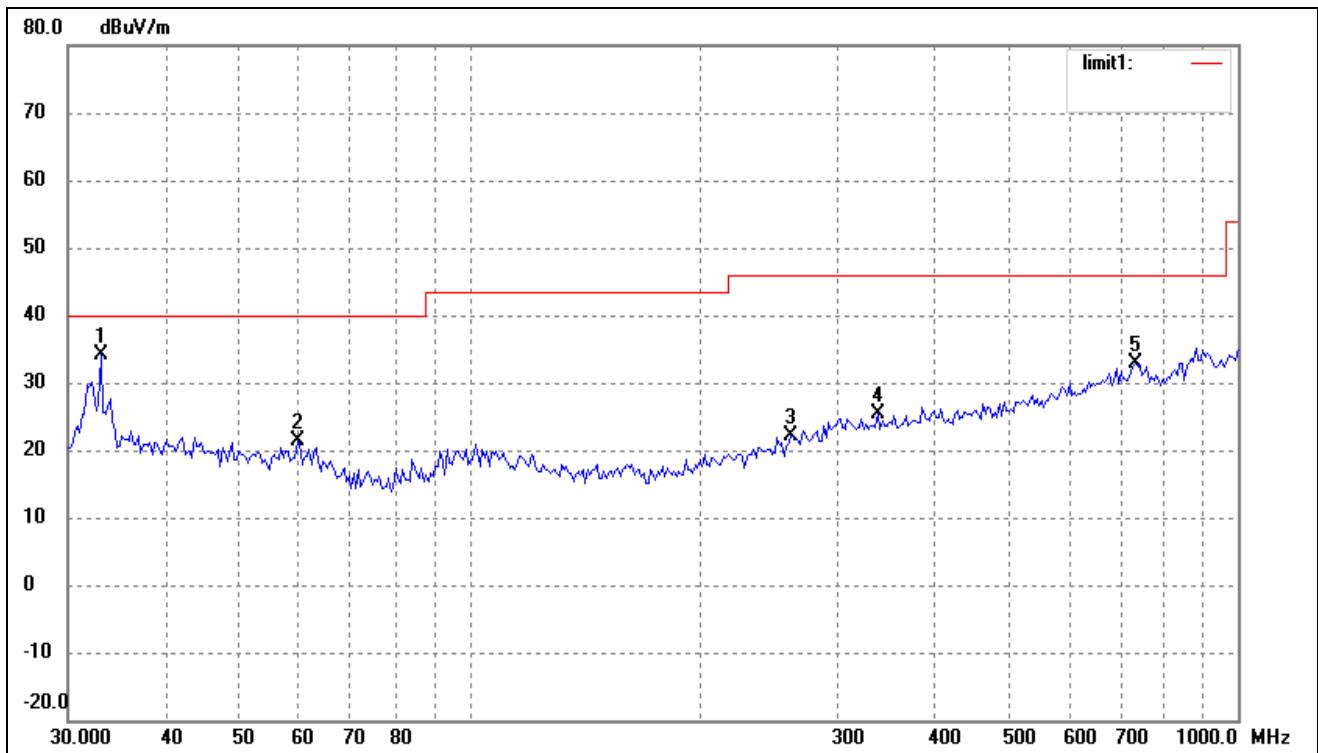

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	33.0950	25.53	8.56	34.09	40.00	-5.91	222	100	peak
2	59.6493	15.58	5.72	21.30	40.00	-18.70	159	100	peak
3	261.9753	14.26	7.86	22.12	46.00	-23.88	4	100	peak
4	339.5888	15.39	10.10	25.49	46.00	-20.51	326	100	peak
5	734.4913	15.23	17.68	32.91	46.00	-13.09	1	100	peak

Spurious Emissions Above 1GHz

Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel-2402MHz							
4804	50.50	-3.92	46.58	74.00	-27.42	H	PK
4804	36.62	-3.92	32.70	54.00	-21.30	H	AV
7206	46.33	3.62	49.95	74.00	-24.05	H	PK
7206	34.32	3.62	37.94	54.00	-16.06	H	AV
4804	53.37	-3.92	49.45	74.00	-24.55	V	PK
4804	38.20	-3.92	34.28	54.00	-19.72	V	AV
7206	47.01	3.62	50.63	74.00	-23.37	V	PK
7206	34.27	3.62	37.89	54.00	-16.11	V	AV
Middle Channel-2441MHz							
4882	51.55	-3.74	47.81	74.00	-26.19	H	PK
4882	37.88	-3.74	34.14	54.00	-19.86	H	AV
7323	45.89	3.62	49.51	74.00	-24.49	H	PK
7323	34.11	3.62	37.73	54.00	-16.27	H	AV
4882	43.61	-3.74	39.87	54.00	-14.13	V	PK
4882	55.89	-3.74	52.15	74.00	-21.85	V	AV
7323	46.16	3.62	49.78	74.00	-24.22	V	PK
7323	32.90	3.62	36.52	54.00	-17.48	V	AV
High Channel-2480MHz							
4960	53.05	-3.48	49.57	74.00	-24.43	H	PK
4960	41.02	-3.48	37.54	54.00	-16.46	H	AV
7440	48.35	3.71	52.06	74.00	-21.94	H	PK
7440	36.12	3.71	39.83	54.00	-14.17	H	AV
4960	57.36	-3.48	53.88	74.00	-20.12	V	PK
4960	43.16	-3.48	39.68	54.00	-14.32	V	AV
7440	46.30	3.71	50.01	74.00	-23.99	V	PK
7440	34.14	3.71	37.85	54.00	-16.15	V	AV

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, which above 5th Harmonics are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

The measurements greater than 20dB below the limit from 9kHz to 30MHz..

10. Out of Band Emissions

10.1 Standard Applicable

According to §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

10.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	R&S	FSP	836079/035	2012-03-28	2013-03-27
EMI Test Receiver	R&S	ESVB	825471/005	2012-03-28	2013-03-27
Pre-amplifier	Agilent	8447F	3113A06717	2012-03-28	2013-03-27
Pre-amplifier	Compliance Direction	PAP-0118	24002	2012-03-28	2013-03-27
Trilog Broadband Antenna	SCHWARZBECK	VULB9163	9163-333	2012-02-25	2013-02-24
Horn Antenna	ETS	3117	00086197	2012-02-25	2013-02-24
Spectrum Analyzer	Agilent	E4402B	US41192821	2012-03-28	2013-03-27
Attenuator	ATTEN	ATS100-4-20	/	2012-03-28	2013-03-27

10.3 Test Procedure

According to the DA 00-705, the band-edge radiated test method as follows.

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2410MHz for low bandedge, 2470MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205.

According to the DA 00-705, the band-edge conducted test method as follows:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2380MHz to 2410MHz for low bandedge, 2470MHz to 2500MHz for the high bandedge)

RBW = 100kHz, VBW = 300kHz

Sweep = auto; Detector function = peak; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the limit specified in this section (at least 20dB attenuation).

10.4 Environmental Conditions

Temperature:	23°C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

10.5 Summary of Test Results/Plots


Test mode	Frequency	Limit	Result
	MHz	dBuV / dBc	
Lowest	2310.00	<54 dBuV	Pass
	2390.00	<54 dBuV	Pass
	2400.00	>20 dBc	Pass
Highest	2483.50	<54 dBuV	Pass
	2500.00	<54 dBuV	Pass

The edge emissions are below the FCC 15.209 Limits or complies with the 15.247(d) requirements.

Please refer to the test plots as below.


Bandedge (Radiated)

Lowest Bandedge

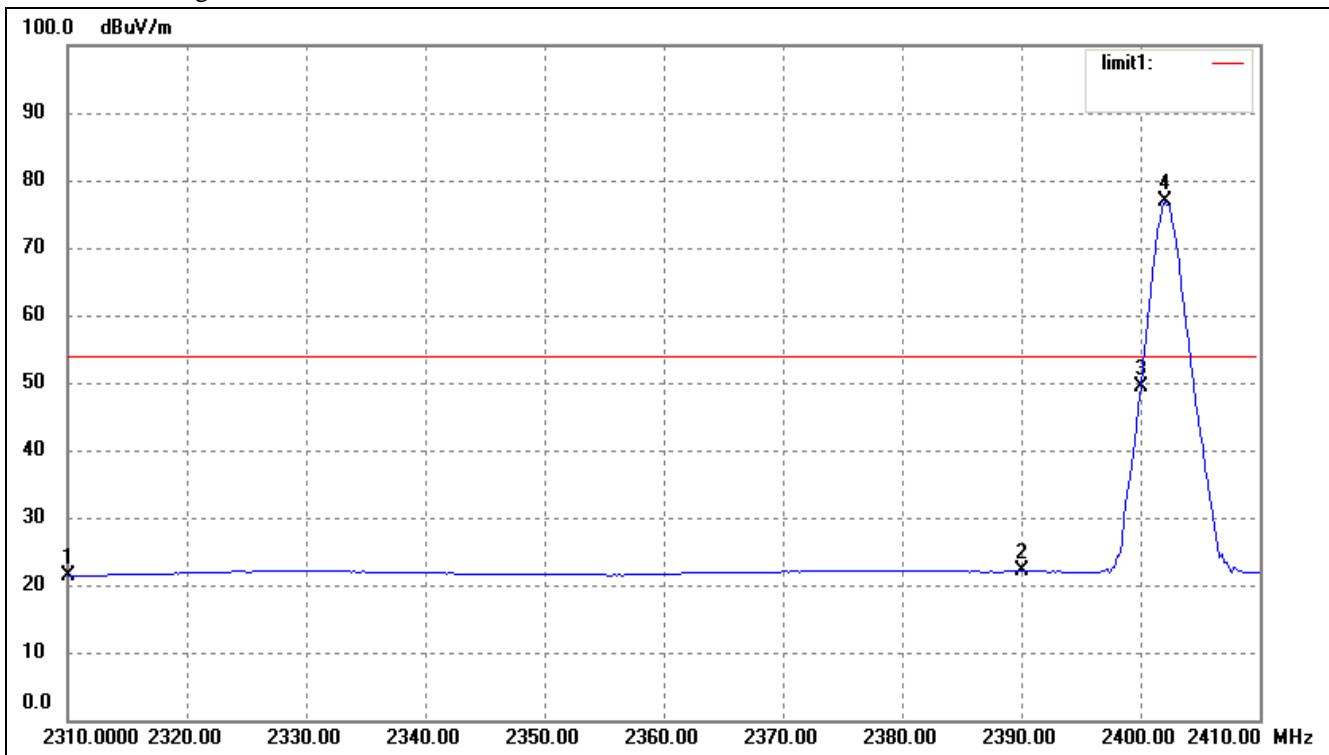

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	33.15	-11.72	21.43	54.00	-32.57	Average Detector
	2310.000	46.69	-11.72	34.97	74.00	-39.03	Peak Detector
2	2390.000	33.80	-11.75	22.05	54.00	-31.95	Average Detector
	2390.000	49.33	-11.75	37.58	74.00	-36.42	Peak Detector
3	2400.000	61.05	-11.75	49.30	/	/	Average Detector
4	2402.000	88.72	-11.75	76.97	/	/	Average Detector


Highest Bandedge

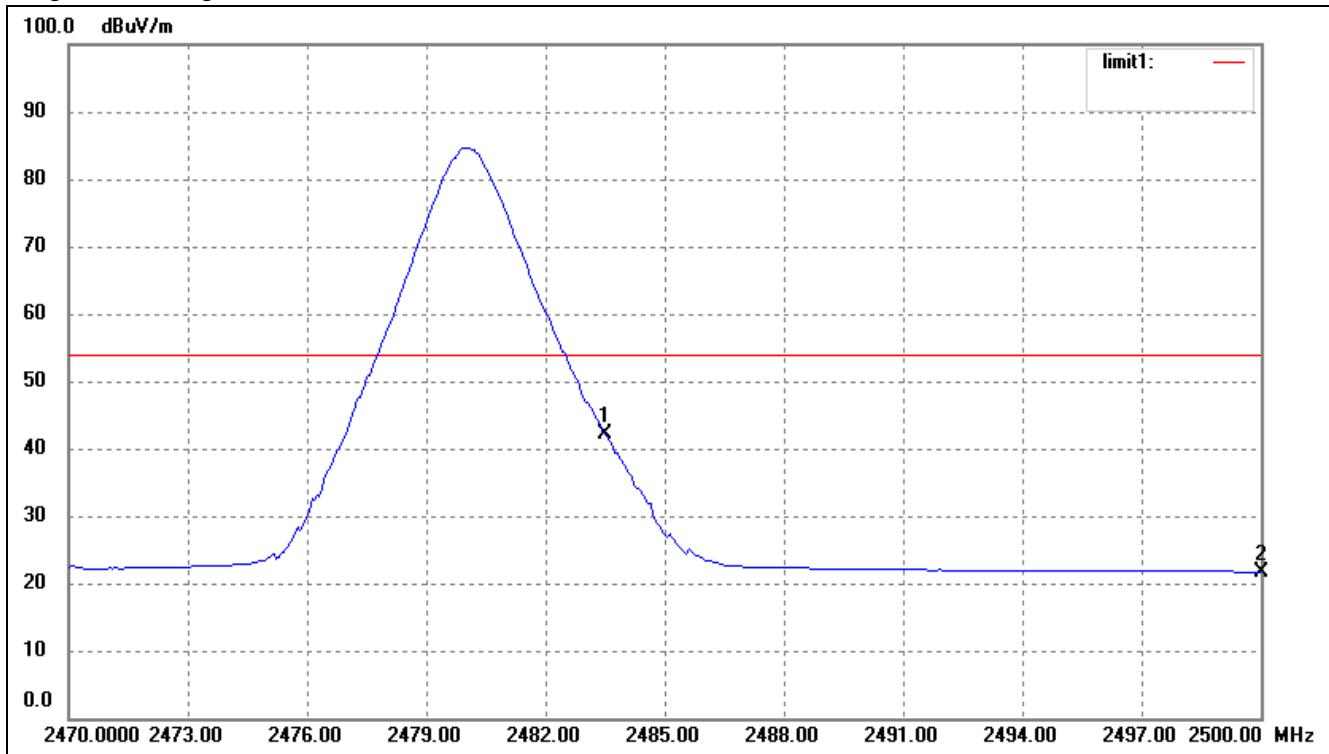


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	54.02	-11.78	42.24	54.00	-11.76	Average Detector
	2483.500	47.74	-11.78	35.96	74.00	-38.04	Peak Detector
2	2500.000	33.48	-11.78	21.70	54.00	-32.30	Average Detector
	2500.000	46.84	-11.78	35.06	74.00	-38.94	Peak Detector

Bandedge (Conducted)

Lowest

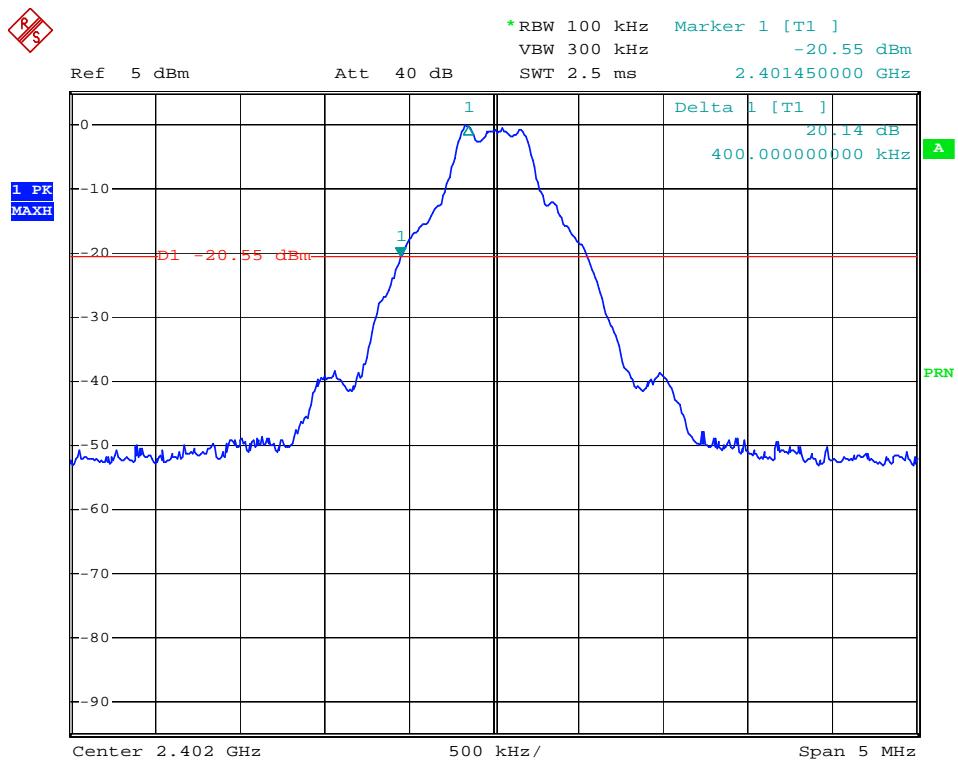


Highest

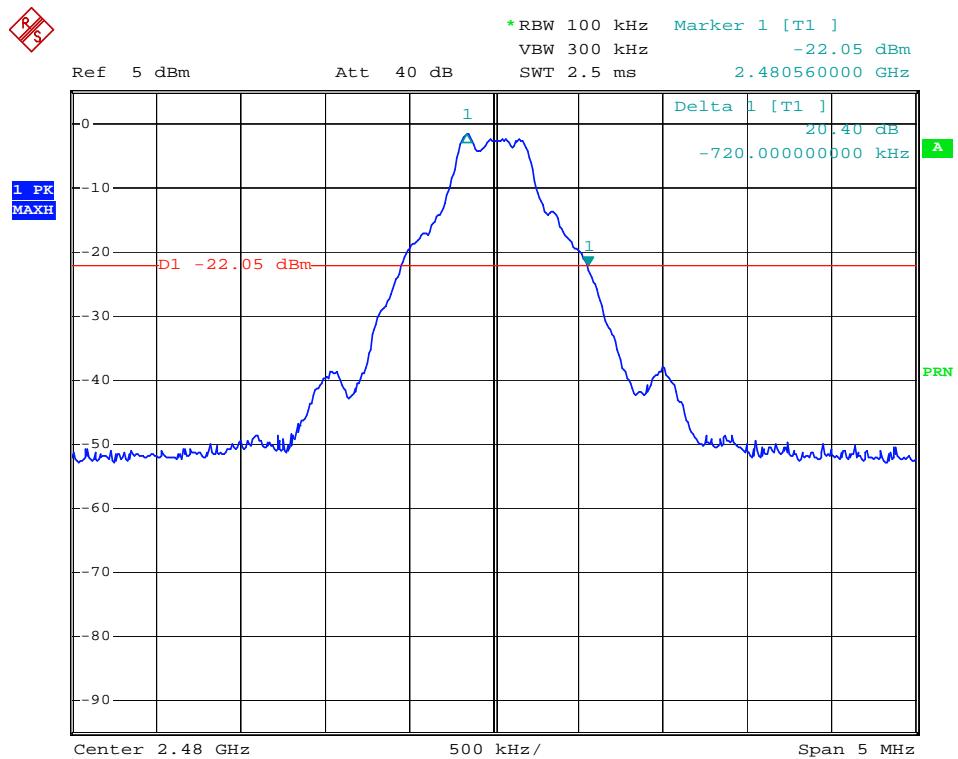


Conducted Spurious Emissions


Low Channel:

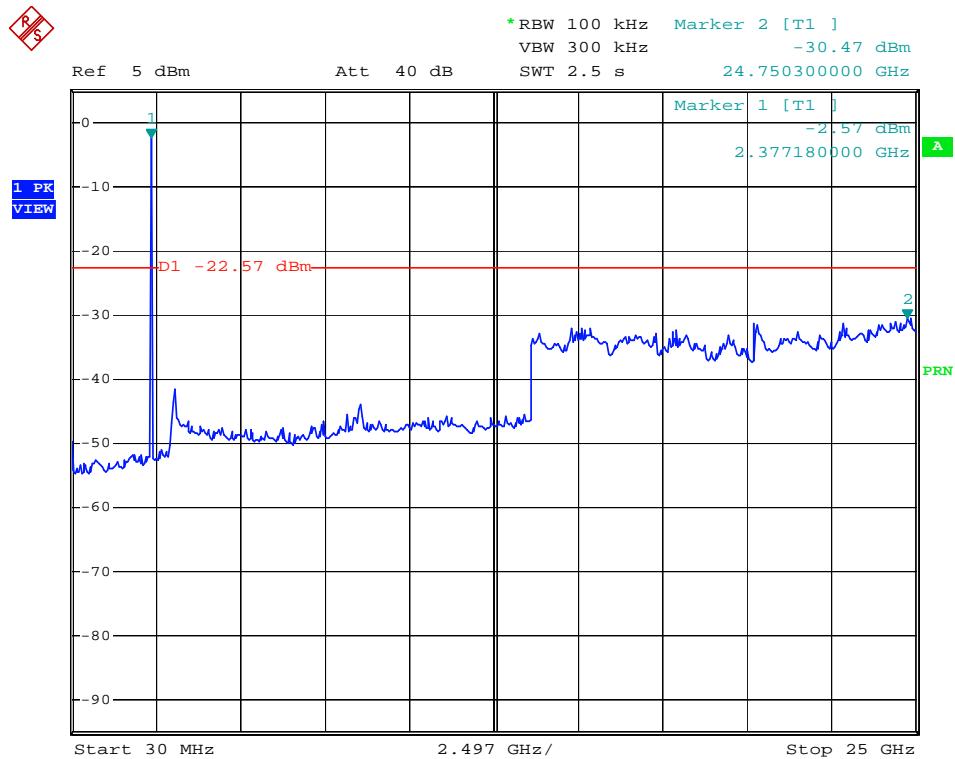

Middle Channel:

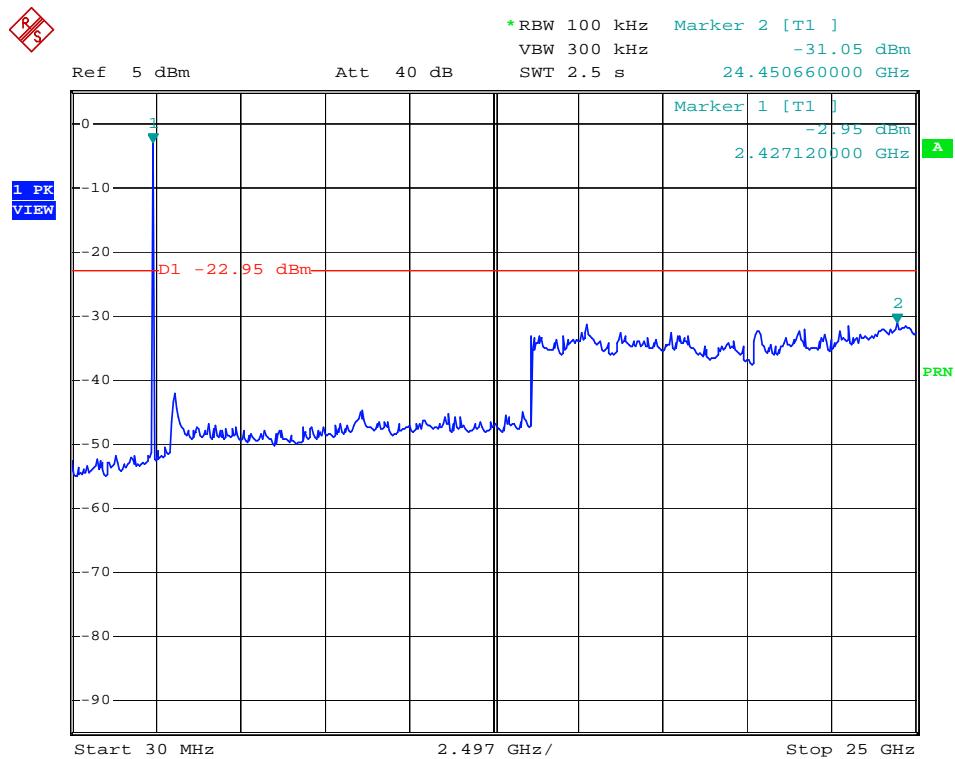

High Channel:

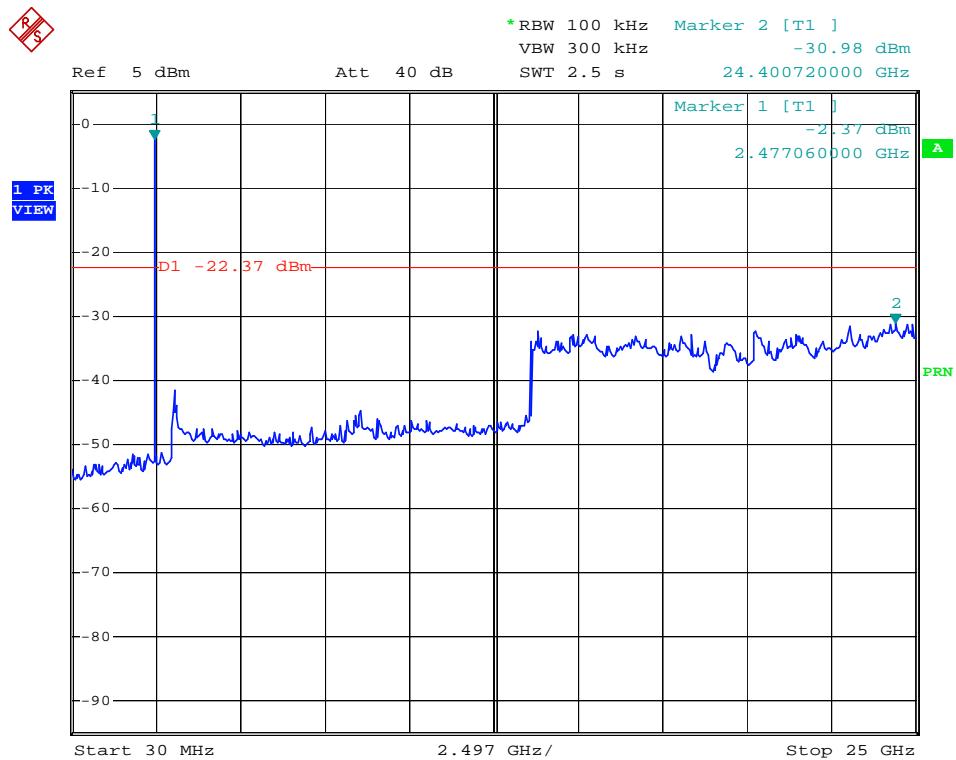

11. Conducted Emissions

11.1 Measurement Uncertainty

Base on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement is ± 2.88 dB.

11.2 Test Equipment List and Details


Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2012-03-28	2013-03-27
L.I.S.N	Schwarz beck	NSLK8126	8126-224	2012-03-28	2013-03-27
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2012-03-28	2013-03-27

11.3 Test Procedure

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

11.4 Basic Test Setup Block Diagram

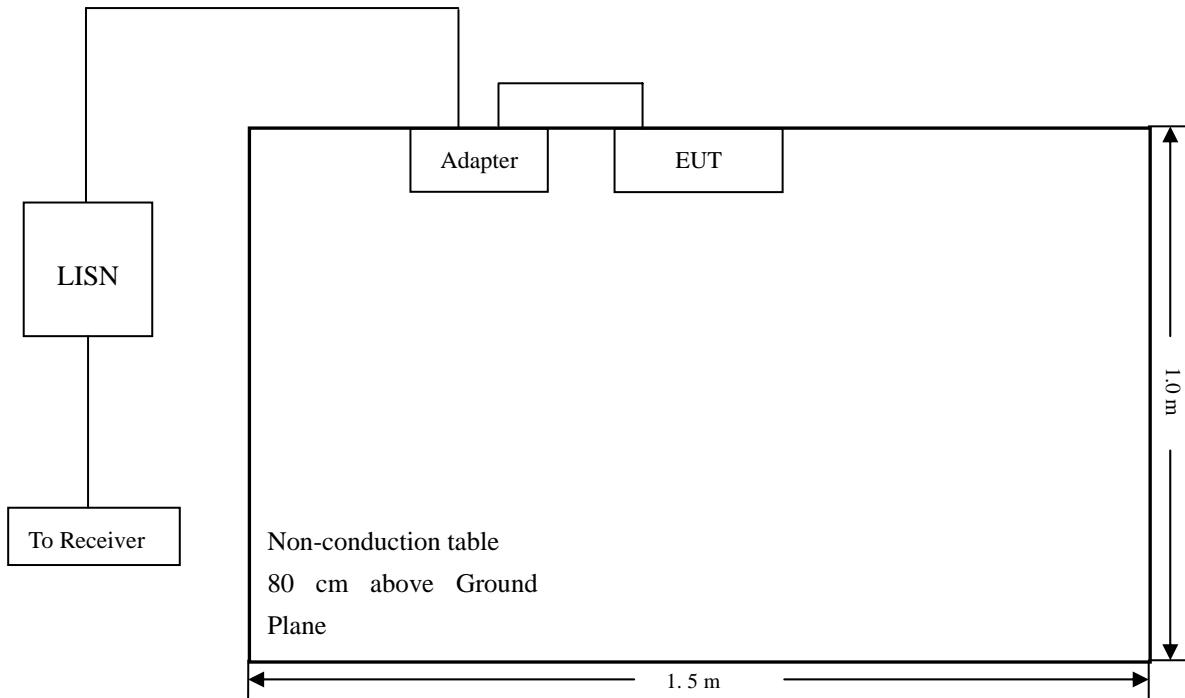

11.5 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

11.6 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency 150 kHz
Stop Frequency..... 30 MHz
Sweep Speed Auto
IF Bandwidth..... 10 kHz
Quasi-Peak Adapter Bandwidth 9 kHz
Quasi-Peak Adapter Mode Normal

11.7 Summary of Test Results/Plots

According to the data in section 3.8, the EUT complied with the FCC Part 15.207 Conducted margin for a Class B device, with the *worst* margin reading of:


-8.21 dB μ V at 0.186 MHz in the Line mode, Peak detector, 0.15-30MHz

11.8 Conducted Emissions Test Data

Plot of Conducted Emissions Test Data


EUT: Mobile Phone
Tested Model: I121C
Operating Condition: Charging & Transmitting
Comment: AC120V/60Hz adapter

Test Specification: Neutral

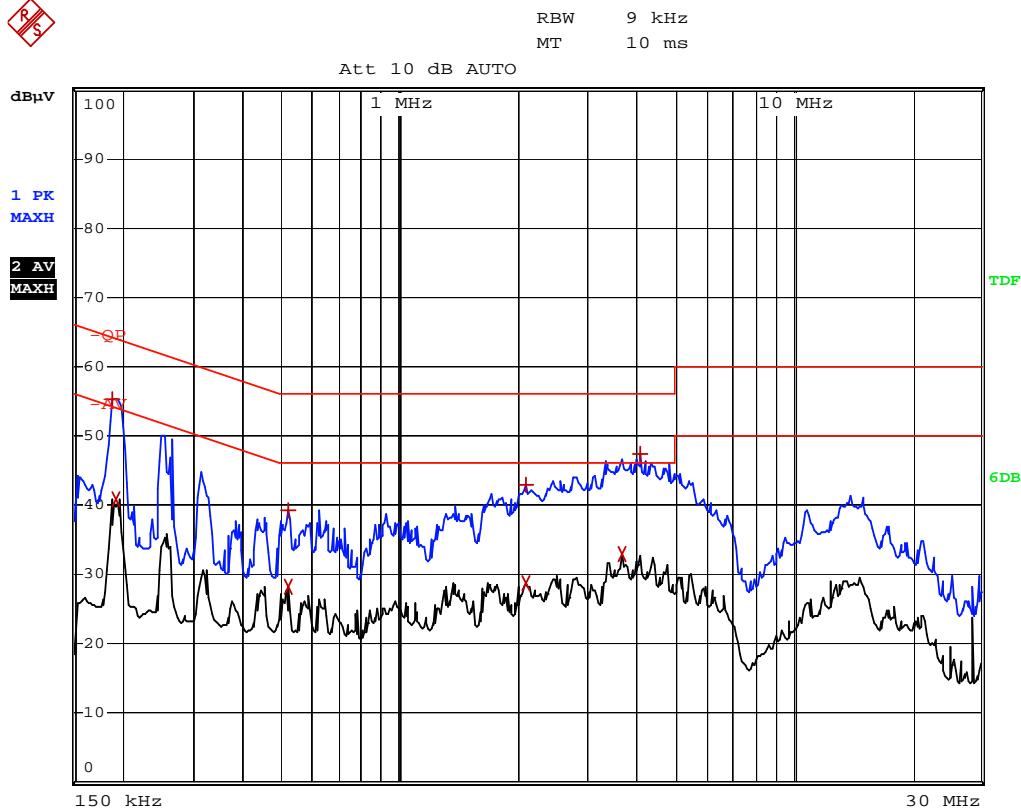

EDIT PEAK LIST (Prescan Results)				
Trace1:	-QP			
Trace2:	-AV			
Trace3:	---			
TRACE	FREQUENCY	LEVEL dB μ V	DELTA	LIMIT dB
1 Max Peak	190 kHz	55.37	-8.66	
2 Average	194 kHz	40.83	-13.03	
2 Average	518 kHz	28.31	-17.68	
1 Max Peak	522 kHz	39.21	-16.78	
1 Max Peak	2.086 MHz	42.80	-13.19	
2 Average	2.086 MHz	28.85	-17.14	
2 Average	3.69 MHz	33.00	-12.99	
1 Max Peak	4.078 MHz	47.44	-8.55	

Test Specification: Line

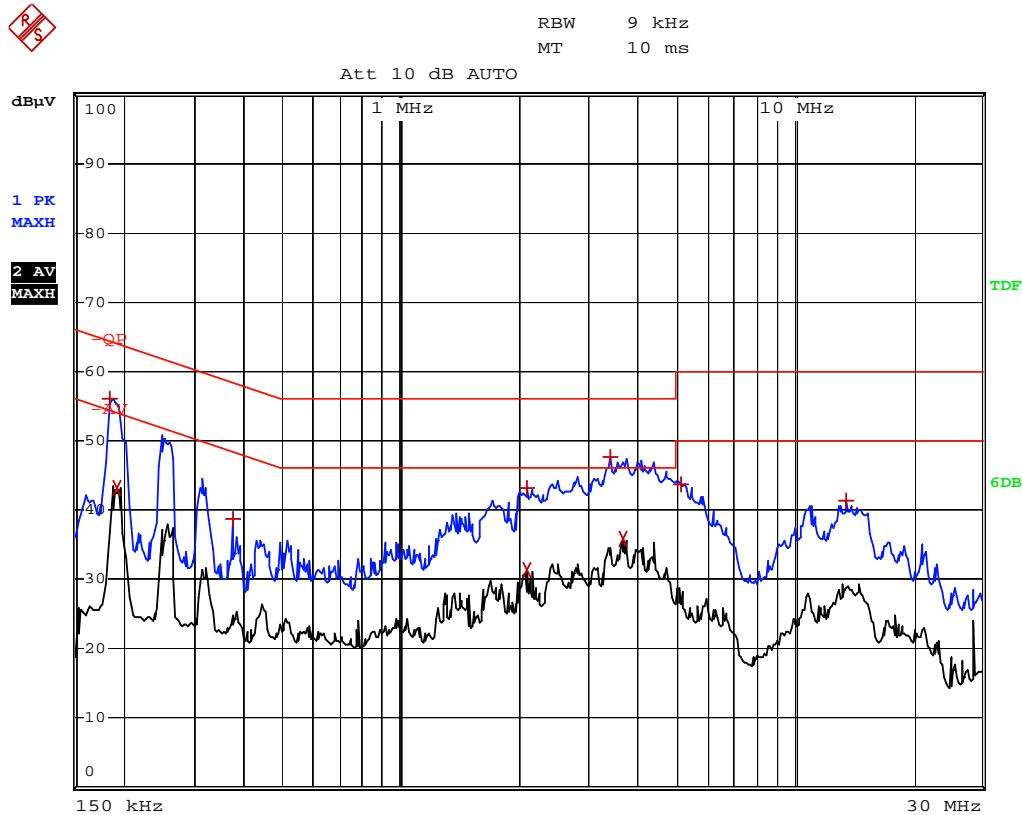

EDIT PEAK LIST (Prescan Results)				
Trace1:	-QP			
Trace2:	-AV			
Trace3:	---			
TRACE	FREQUENCY	LEVEL dBμV	DELTA	LIMIT dB
1 Max Peak	186 kHz	55.99	-8.21	
2 Average	194 kHz	43.29	-10.56	
1 Max Peak	374 kHz	38.83	-19.58	
2 Average	2.102 MHz	31.29	-14.70	
1 Max Peak	2.106 MHz	43.06	-12.93	
1 Max Peak	3.418 MHz	47.53	-8.46	
2 Average	3.682 MHz	35.88	-10.11	
1 Max Peak	5.158 MHz	43.71	-16.28	
1 Max Peak	13.566 MHz	41.27	-18.72	

***** END OF REPORT *****