### FCC 47 CFR PART 15 SUBPART C

### **TEST REPORT**

For

# GSM/GPRS/EGPRS Digital Mobile Phone

Model: i270

Trade Name: VeryKool

VeryKool USA, Inc.
4350 Executive Drive. Suite 100, San Diego, CA 92121, USA

Issued by

# COMPLIANCE CERTIFICATION SERVICES (KUNSHAN) INC.

10#Weiye Rd, Innovation Park Eco. & Tec. Development Zone Kunshan city JiangSu, (215300) CHINA

TEL: 86-512-57355888

FAX: 86-512-57370818



**Note:** This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.

Date of Issue: July 30, 2009

# TABLE OF CONTENTS

TEST RESULT CERTIFICATION	3
EUT DESCRIPTION	4
TEST METHODOLOGY	5
EUT CONFIGURATION	5
EUT EXERCISE	
GENERAL TEST PROCEDURES	5
FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS	
DESCRIPTION OF TEST MODES	
INSTRUMENT CALIBRATION	6
FACILITIES AND ACCREDITATIONS	7
FACILITIES	7
EQUIPMENT	7
LABORATORY ACCREDITATIONS AND LISTING	7
TABLE OF ACCREDITATIONS AND LISTINGS	8
SETUP OF EQUIPMENT UNDER TEST	9
SETUP CONFIGURATION OF EUT	9
SUPPORT EQUIPMENT	
FCC PART 15.247 REQUIREMENTS	10
PEAK POWER	10
BAND EDGES MEASUREMENT	12
PEAK POWER SPECTRAL DENSITY	18
FREQUENCY SEPARATION	21
NUMBER OF HOPPING FREQUENCY	
TIME OF OCCUPANCY (DWELL TIME)	
RADIO FREQUENCY EXPOSURE	31
SPURIOUS EMISSIONS	
DOWEDLINE CONDUCTED EMISSIONS	

Date of Issue: July 30, 2009

# TEST RESULT CERTIFICATION

**Applicant:** 

VeryKool USA, Inc.

4350 Executive Drive. Suite 100, San Diego, CA 92121, USA

**Equipment Under Test:** 

GSM/GPRS/EGPRS Digital Mobile Phone

**Trade Name:** 

VeryKool

Model:

i270

Date of Test:

July 28, 2009~July 29, 2009

APPLICABLE STANDARDS					
STANDARD	TEST RESULT				
FCC 47 CFR Part 15 Subpart C	No non-compliance noted				

# We here by certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2003 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Miro Chueh

**EMC** Manager

Compliance Certification Services Inc.

Reviewed by:

Lin Zhang

**EMC Section Manager** 

Compliance Certification Services Inc.

# **EUT DESCRIPTION**

EUI DESCRII IION	
Product	GSM/GPRS/EGPRS Digital Mobile Phone
Trade Name	VeryKool
Model Number	i270
Model Discrepancy	N/A
Power Supply	AC to DC charger Trade Name :verykool Model Number :P-032B Input: 100-240V, 50/60Hz, 0.2A Output: 5.0V,500mA Battery: Li-ion Battery: 3.7V 3.1wh Limited charge vvoltage:4.2V
Frequency Range	2402 ~ 2480 MHz
Transmit Power	1.50dBm
Modulation Technique	FHSS
Transmit Data Rate	GFSK(1Mbps)
Number of Channels	79 Channels
Antenna Specification	PIFA Antenna / Gain: 1.27 dBi

**Remark:** This submittal(s) (test report) is intended for FCC ID: <u>WA6I270</u> filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.

Page 4 Rev. 00

#### **TEST METHODOLOGY**

The tests documented in this report were performed in accordance with ANSI C63.4:2003 and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, 15.207, 15.209 and 15.247.

Date of Issue: July 30, 2009

#### **EUT CONFIGURATION**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

#### **EUT EXERCISE**

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

#### GENERAL TEST PROCEDURES

#### **Conducted Emissions**

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4:2003 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

#### **Radiated Emissions**

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4:2003.

Page 5 Rev. 00

#### FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

Date of Issue: July 30, 2009

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	$\binom{2}{}$
13.36 - 13.41	322 - 335.4		

<sup>&</sup>lt;sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

# **DESCRIPTION OF TEST MODES**

The EUT has been tested under operating condition.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz, which worst case was in normal link mode only. The field strength of spurious emission was measured as EUT stand-up position (H mode) and lie-down position (E1, E2 mode) with power adaptors. The worst emission was found in stand-up position (H mode) and the worst case was recorded.

Then, the worst case is GFSK(1M) Channel Low (2402MHz)  $\cdot$  Mid (2441MHz) and High (2480MHz), these were chosen for full testing.

#### INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

Page 6 Rev. 00

<sup>&</sup>lt;sup>2</sup> Above 38.6

#### **FACILITIES AND ACCREDITATIONS**

#### **FACILITIES**

All measurement facilities used to collect the measurement data are located at CCS China Kunshan Lab at 10#Weiye Rd, Innovation Park Eco. & Tec. Development Zone Kunshan city JiangSu, (215300), CHINA.

The sites are constructed in conformance with the requirements of ANSI C63.4:2003 and CISPR Publication 22.

Date of Issue: July 30, 2009

# **EQUIPMENT**

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

#### LABORATORY ACCREDITATIONS AND LISTING

The test facilities used to perform radiated and conducted emissions tests are accredited by American Association for Laboratory Accreditation Program for the specific scope accreditation under Lab Code: 2541.01 to perform Electromagnetic Interference tests according to FCC Part 15 and CISPR 22 requirements. In addition, the test facilities are listed with Industry Canada, Certification and Engineering Bureau, IC 2324E-1 for 3/10m Chamber.

Page 7 Rev. 00

# TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	A2LA	47 CFR FCC Part 15/18 (using ANSI C63.4 2003); VCCI V3; CNS 13438; CNS 13439; CNS 13803; CISPR 11; EN 55011; CISPR 13; EN 55013; CISPR 22:2005; CISPR 22:1997 +A1:2000+A2:2002; EN 55022:2006; EN55022:1998 +A1:2001+A2:2003; EN 61000-6-3 (excluding discontinuous interference); EN 61000-6-4; AS/NZS CISPR 22; CAN/CSA-CEI/IEC CISPR 22; EN 61000-3-2; EN 61000-3-3; EN550024; EN 61000-4-2; EN 61000-4-3; EN61000-4-4; EN 61000-4-5; EN 61000-4-6; IEC 61000-4-8; EN 61000-4-11; IEC61000-3-2; IEC61000-3-3; IEC 61000-4-2; IEC 61000-4-6; IEC 61000-4-4; IEC 61000-4-5; IEC 61000-4-6; IEC 61000-4-8; IEC 61000-4-11; EN 300 220-3; EN 300 328; EN 300 330-2; EN 300 440-1; EN 300-440-2; EN 300 893; EN 301 489-01; EN 301 489-3; EN 301 489-07; EN 301 489-17, 301 489-19, 301 489-24, 301 489-25, 301 511clause4.2.2and clause4.2.3 and clause5.3.1 and clause5.3.2; EN 301 908-2 clause 4.2.4 and clause 4.2.10 and clause5.3.9; 47 CFR FCC Part 15, 22, 24	ACCREDITED TESTING CERT #2541.01
USA	FCC	3/10 meter Sites to perform FCC Part 15/18 measurements	<b>FC</b> 238958, 424105
Japan	VCCI	3/10 meter Sites and conducted test sites to perform radiated/conducted measurements	VCCI R-1600 C-1707 T-1499

<sup>\*</sup> No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.

Page 8 Rev. 00

# SETUP OF EQUIPMENT UNDER TEST

### **SETUP CONFIGURATION OF EUT**

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

# SUPPORT EQUIPMENT

No.	Equipment	Model No.	Serial No.	FCC ID	Trade Name	Data Cable	Power Cord
1	NA	NA	NA	NA	NA	NA	NA

Date of Issue: July 30, 2009

#### Remark:

- 1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- 2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

Page 9 Rev. 00

# FCC PART 15.247 REQUIREMENTS

#### **PEAK POWER**

# **LIMIT**

The maximum peak output power of the intentional radiator shall not exceed the following:


- According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier
  frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel,
  whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5
  MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or
  two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the
  systems operate with an output power no greater than 125 mW.
- 2. According to \$15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
- 3. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

# MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due	
Spectrum Analyzer	Agilent	E4446A	MY44020154	11/16/2009	
Peak and Avg Power Sensor	Agilent	E9327A	US40441788	07/29/2010	
EPM-P Series Power Meter	Agilent	E4416A	QB41292714	07/29/2010	

**Remark:** Each piece of equipment is scheduled for calibration once a year.

# **Test Configuration**



# **TEST PROCEDURE**

The transmitter output is connected to the Power Meter.

Page 10 Rev. 00

# **TEST RESULTS**

No non-compliance noted

# **Test Data**

Channel	Frequency (MHz)	Reading Power	Factor (dB)	Power (dRm)	Output Power (W)	Limit (W)	Result
Low	2402	-7.50	9.00	1.50	0.00141		PASS
Mid	2441	-7.60	9.00	1.40	0.00138	1	PASS
High	2480	-7.64	9.00	1.36	0.00137		PASS

Date of Issue: July 30, 2009

Page 11 Rev. 00

#### BAND EDGES MEASUREMENT

# **LIMIT**

According to §15.247(c), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in15.209(a).


Date of Issue: July 30, 2009

# MEASUREMENT EQUIPMENT USED

977 Chamber (3m)										
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due						
Spectrum Analyzer	Agilent	E4446A	MY44020154	11/16/2009						
Pre-Amplfier	Miteq	NSP4000-NF	870731	01/21/2010						
Horn Antenna	Austriah	BBHA9120D	D267	02/03/2010						
Turn Table	CT	CT123	4162	N.C.R						
Antenna Tower	CT	CTERG23	3253	N.C.R						
Controller	CT	CT100	95635	N.C.R						
Coax Switch	Anitsu	MP 598	M 80094	N/A						
Site NSA	CCS Lab.	N/A	N/A	02/15/2010						

**Remark:** Each piece of equipment is scheduled for calibration once a year.

#### **Test Configuration**

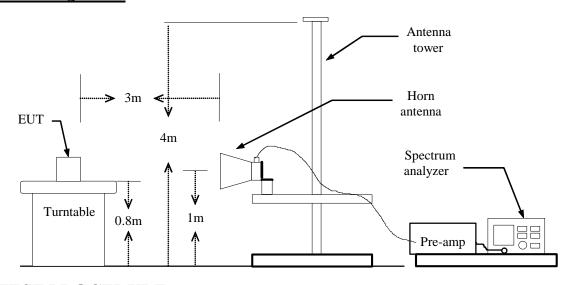

# **TEST PROCEDURE**

- 1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
- 2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
- 3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out

Page 12 Rev. 00

the highest emission.

4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:

Date of Issue: July 30, 2009

- (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
- (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
- 5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

# **TEST RESULTS**

# **CH LOW**

Freq. (MHz)	Ant. Pol H/V	Peak Reading	AV Reading	Ant. / CL CF	Actu	ial Fs	Peak Limit	AV Limit	Peak Margin	AV Margin
		(dBuV)	(dBuV)	(dB)	Peak (dBuV/m)	AV (dBuV/m)	(aBuv/m	(dBuV/m)	(dB)	(dB)
2390.10	V	45.62	32.75	4.50	50.12	37.25	74	54	-23.88	-16.75
2390.10	Н	43.09	33.16	4.50	47.59	37.66	74	54	-26.41	-16.34

# **CH HIGH**

Freq. (MHz)	Ant. Pol H/V	Peak Reading	AV Reading	Ant. / CL CF	Actu	ıal Fs	Peak Limit	AV Limit	Peak Margin	AV Margin
		(dBuV)	(dBuV)	(dB)	Peak (dBuV/m)	AV (dBuV/m)	(aBuv/m	(dBuV/m)	(dB)	(dB)
2483.50	V	46.72	30.55	4.50	51.22	35.05	74	54	-22.78	-18.95
2483.50	Н	44.85	32.73	4.50	49.35	37.23	74	54	-24.65	-16.77


Refer to attach spectrum analyzer data chart.

Page 13 Rev. 00


Date of Issue: July 30, 2009

**Band Edges (CH Low)** 

**Detector mode: Peak Polarity: Vertical** 

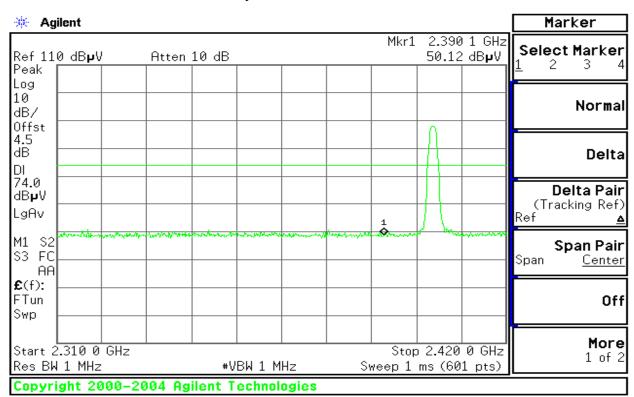


**Detector mode: Average Polarity: Vertical** 

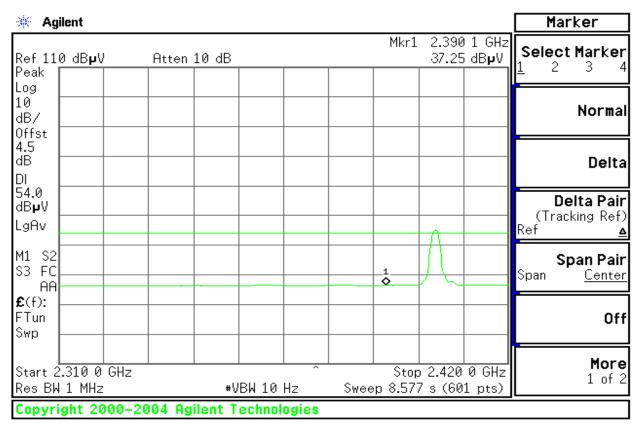


Page 14 Rev. 00

CC ID: WA6I270 Date of Issue: July 30, 2009

Detector mode: Peak Polarity: Horizontal

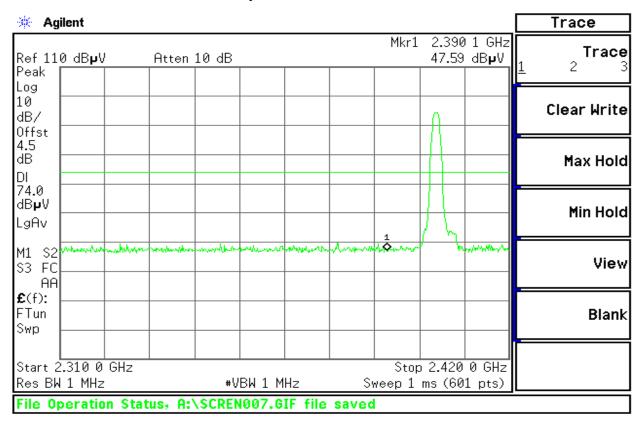

**Detector mode: Average** Polarity: Horizontal

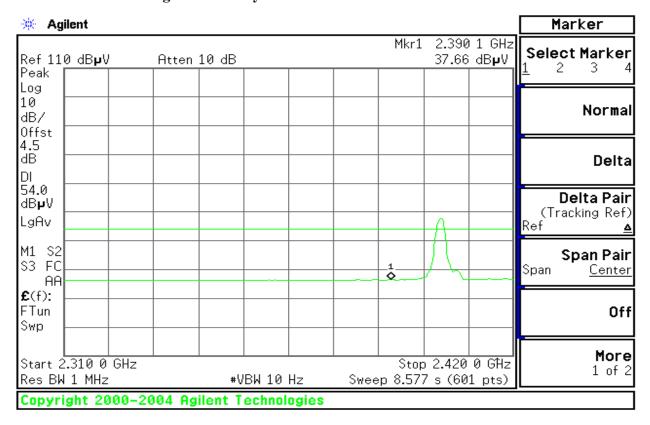


Page 15 Rev. 00

Date of Issue: July 30, 2009

### **Band Edges (CH High)**

Detector mode: Peak Polarity: Vertical

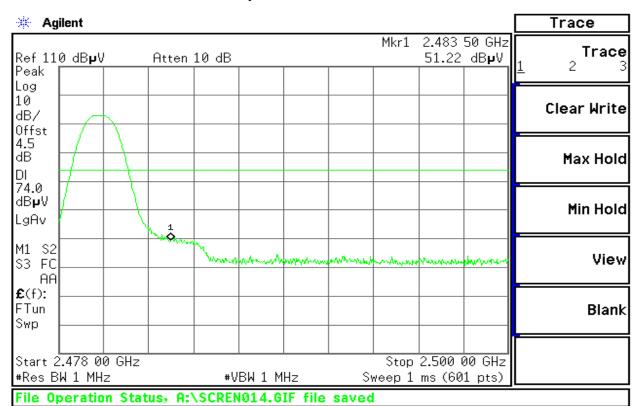

**Detector mode: Average** Polarity: Vertical




Page 16 Rev. 00

CC ID: WA6I270 Date of Issue: July 30, 2009

Detector mode: Peak Polarity: Horizontal



**Detector mode: Average** Polarity: Horizontal

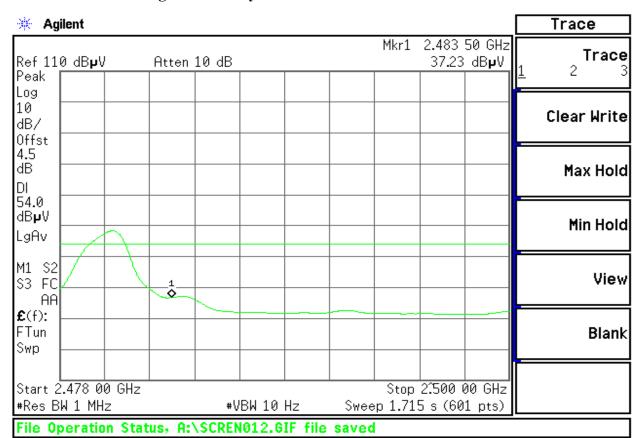

Page 17 Rev. 00

#### PEAK POWER SPECTRAL DENSITY

# **LIMIT**

1. For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

Date of Issue: July 30, 2009


2. The direct sequence operating of the hybrid system, with the frequency hopping operation turned off, shall comply with the power density requirements of paragraph (d) of this section.

# **MEASUREMENT EQUIPMENT USED**

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due	
Spectrum Analyzer	Agilent	E4446A	MY44020154	11/16/2009	

**Remark:** Each piece of equipment is scheduled for calibration once a year.

### **Test Configuration**



# **TEST PROCEDURE**

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set the spectrum analyzer as RBW = 3kHz, VBW = 10kHz, Span = 300kHz, Sweep=100s
- 4. Record the max. reading.
- 5. Repeat the above procedure until the measurements for all frequencies are completed.

# TEST RESULTS

No non-compliance noted


#### **Test Data**

Channel	Frequency	Reading (dBm)	Factor (dB)	PPSD (dBm)	Limit (dBm)	Result
Low	2402	-18.53	9.00	-9.53		PASS
Mid	2 4 4 1	-18.37	9.00	-9.37	8.00	PASS
High	2480	-18.59	9.00	-9.59		PASS


Page 18 Rev. 00

#### **Test Plot**

#### PPSD (CH Low)

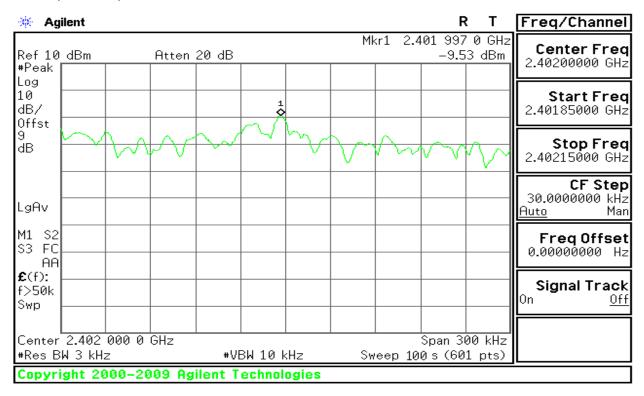


# PPSD (CH Mid)

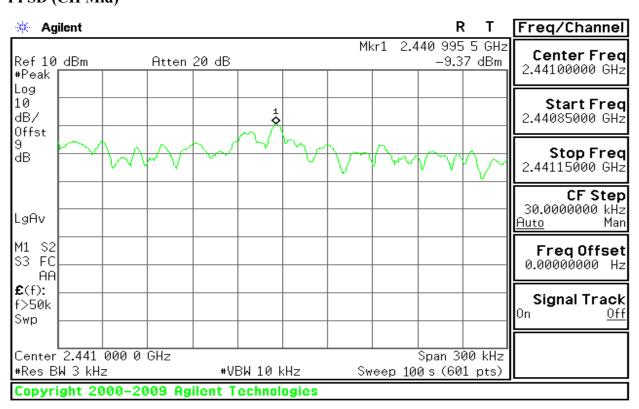

Page 19 Rev. 00

PPSD (CH High)

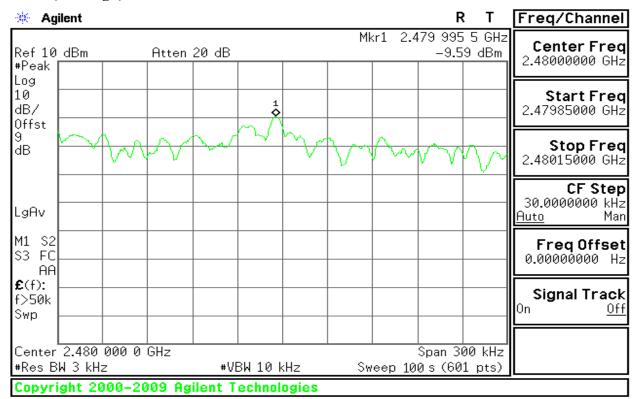

Page 20 Rev. 00

# FREQUENCY SEPARATION

# **LIMIT**

According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.


Date of Issue: July 30, 2009

# MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY44020154	11/16/2009

**Remark:** Each piece of equipment is scheduled for calibration once a year.

# **Test Configuration**



# **TEST PROCEDURE**

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set center frequency of spectrum analyzer = middle of hopping channel.
- 4. Set the spectrum analyzer as RBW = 30kHz, VBW = 100kHz, Span = 3MHz, Sweep = auto.
- 5. Max hold, mark 2 peaks of hopping channel and record the 2 peaks frequency.

#### TEST RESULTS

No non-compliance noted

# **Test Data**

Channel Separation (MHz)	20dB Bandwith (kHz)	Limit (kHz)	Result
1.000	832. 338	>554.892	Pass


Page 21 Rev. 00

C ID: WA6I270 Date of Issue: July 30, 2009


#### **Test Plot**

# **Measurement of Channel Separation**

#### **Channel Low**

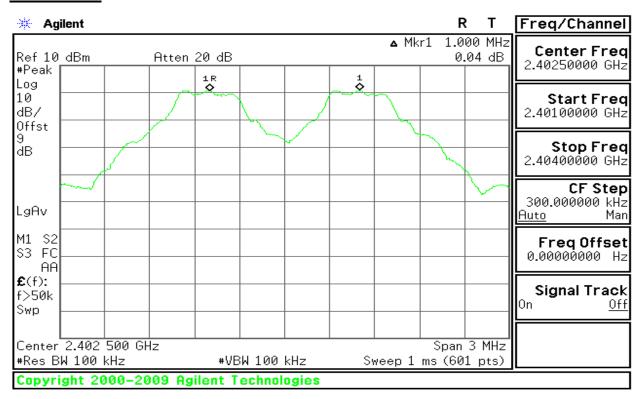


#### Channel middle

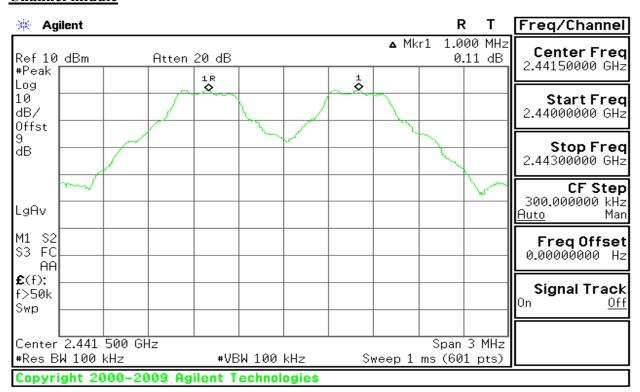


Page 22 Rev. 00

### **Channel high**

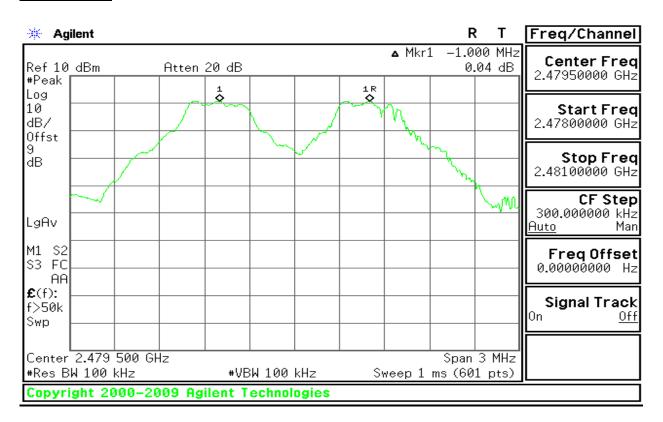


#### Measurement of 20dB Bandwidth

#### **Channel low**

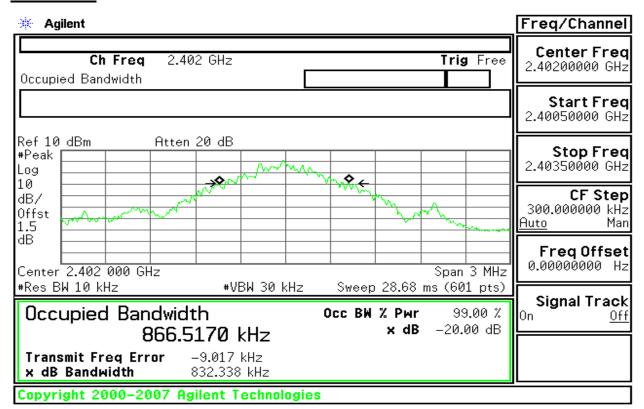


Page 23 Rev. 00

### **Channel middle**

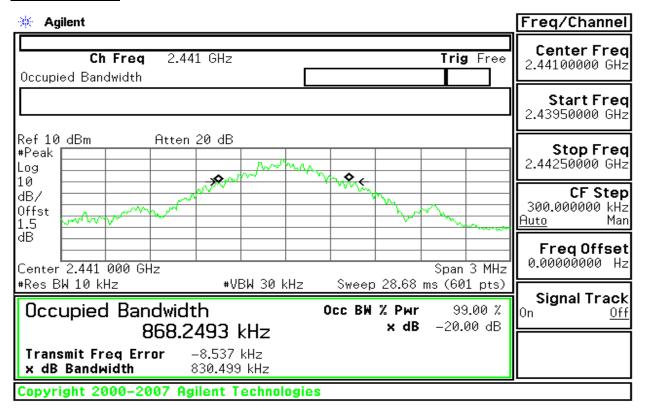

#### Channel high

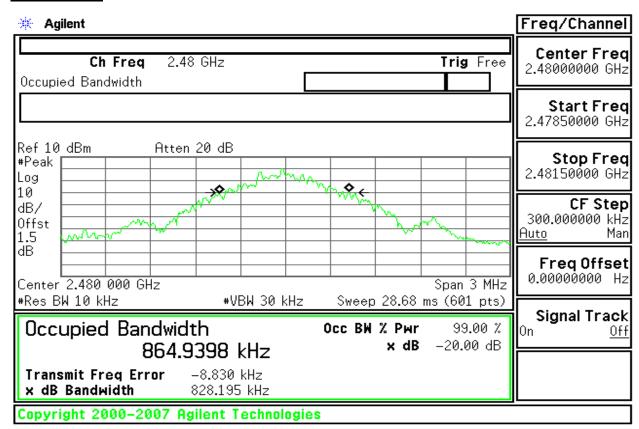

Page 24 Rev. 00

# NUMBER OF HOPPING FREQUENCY

# **LIMIT**

According to §15.247(a)(1)(ii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 75 hopping frequencies.


Date of Issue: July 30, 2009

# MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	<b>Calibration Due</b>
Spectrum Analyzer	Agilent	E4446A	MY44020154	11/16/2009

**Remark:** Each piece of equipment is scheduled for calibration once a year.

### **Test Configuration**



# **TEST PROCEDURE**

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set spectrum analyzer Start=2400MHz, Stop = 2441.5MHz, Sweep = auto and Start=2441.5MHz, Stop = 2483.5MHz, Sweep = auto.
- 4. Set the spectrum analyzer as RBW, VBW=100kHz.
- 5. Max hold, view and count how many channel in the band.

### **TEST RESULTS**

No non-compliance noted

### **Test Data**

Result (No. of CH)	Limit (No. of CH)	Result
79	>75	PASS


Page 25 Rev. 00

C ID: WA6I270 Date of Issue: July 30, 2009


### **Test Plot**

#### **Channel Number**

### 2.4 GHz – 2.4415 GHz

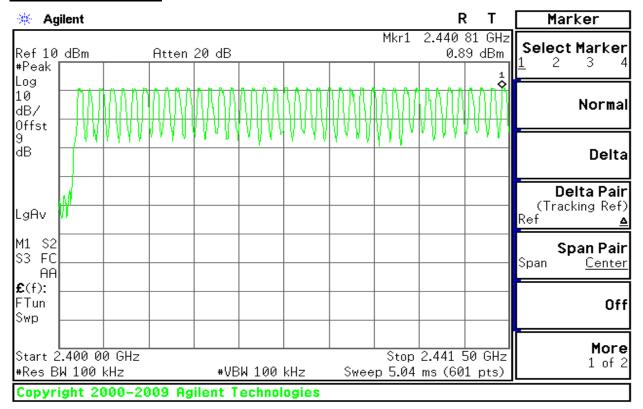

#### <u>2.4415 GHz – 2.4835 GHz</u>

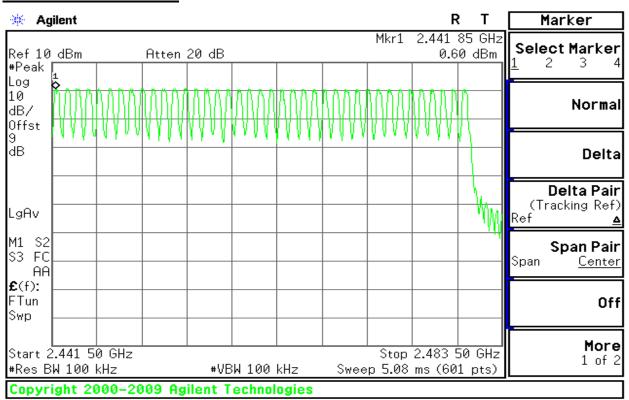

Page 26 Rev. 00

# TIME OF OCCUPANCY (DWELL TIME)

# **LIMIT**

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands. The average time of occupancy on any channels shall not greater than 0.4 s within a period 0.4 s multiplied by the number of hopping channels employed.


Date of Issue: July 30, 2009

# **MEASUREMENT EQUIPMENT USED**

Name of Equipment	Manufacturer	Model	Serial Number	<b>Calibration Due</b>
Spectrum Analyzer	Agilent	E4446A	MY44020154	11/16/2009

**Remark:** Each piece of equipment is scheduled for calibration once a year.

# **Test Configuration**



### **TEST PROCEDURE**

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set center frequency of spectrum analyzer = operating frequency.
- 4. Set the spectrum analyzer as RBW, VBW=1MHz, Span = 0Hz, Sweep = auto.
- 5. Repeat above procedures until all frequency measured were complete.

Page 27 Rev. 00

# **TEST RESULTS**

No non-compliance noted

# **Test Data**

# <u>DH 1</u>

0.433 \* (1600/2)/79 \* 31.6 = 138.56 (ms)

Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
0.433	138.56	31.60	400	PASS

# **DH 3**

1.7 \* (1600/4)/79 \* 31.6 = 272.00 (ms)

Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
1.7	272.00	31.60	400	PASS

# <u>DH 5</u>


 $\overline{2.967}$ \* (1600/6)/79 \* 31.6 = 316.48 (ms)

Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
2.967	316.48	31.60	400	PASS


Page 28 Rev. 00

# **Test Plot**

#### <u>DH 1</u>

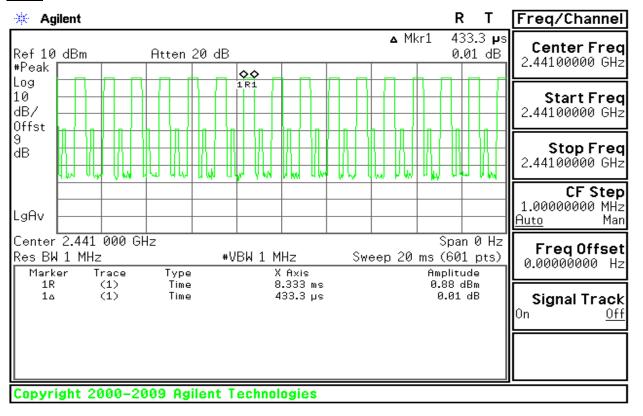


#### **DH 3**

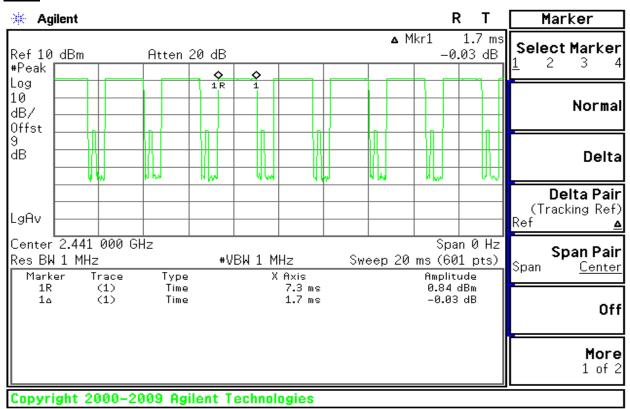

Page 29 Rev. 00

### <u>DH 5</u>

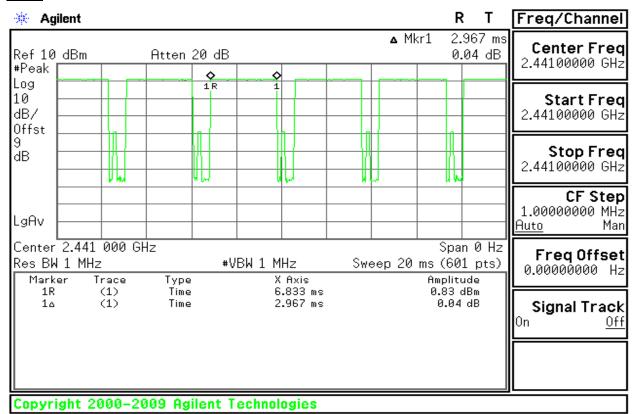

Page 30 Rev. 00

# RADIO FREQUENCY EXPOSURE

# **LIMIT**

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See §15.247(b)(4) and §1.1307(b)(1) of this chapter.

Date of Issue: July 30, 2009

# **EUT Specification**

EUT	GSM/GPRS/EGPRS Digital Mobile Phone
Frequency band (Operating)	<ul> <li>WLAN: 2.412GHz ~ 2.462GHz</li> <li>WLAN: 5.18GHz ~ 5.32GHz / 5.50GHz ~ 5.70GHz</li> <li>WLAN: 5.745GHz ~ 5.825GHz</li> <li>✓ Others: Bluetooth: 2.402GHz ~ 2.480GHz</li> </ul>
Device category	Portable (<20cm separation)  Mobile (>20cm separation)  Others
Exposure classification	Occupational/Controlled exposure $(S = 5mW/cm^2)$ Seneral Population/Uncontrolled exposure $(S=1mW/cm^2)$
Antenna diversity	<ul> <li>Single antenna</li> <li>Multiple antennas</li> <li>☐ Tx diversity</li> <li>☐ Rx diversity</li> <li>☐ Tx/Rx diversity</li> </ul>
Max. output power	1.50dBm (1.41mW)
Antenna gain (Max)	1.27dBi (Numeric gain: 1. 340)
Evaluation applied	<ul><li></li></ul>
Remark:	
	is <u>1.50dBm (1.41mW) a</u> t <u>2402MHz</u> (with <u>1.340 numeric</u>
<u>antenna gain</u> .)	
· ·	routine RF evaluation; MPE estimate is used to justify the
compliance.	
	transmitters, no SAR consideration applied. The minimum
separation generally be usea	l is at least 20 cm, even if the calculations indicate that the MPE

# **TEST RESULTS**

distance would be lesser.

Non-compliance.

Page 31 Rev. 00

# **SPURIOUS EMISSIONS**

#### **Conducted Measurement**

# **LIMIT**


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

### MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY44020154	11/16/2009

**Remark:** Each piece of equipment is scheduled for calibration once a year.

#### **Test Configuration**



### **TEST PROCEDURE**

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 KHz. The video bandwidth is set to 100 KHz.

Measurements are made over the 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.

### **TEST RESULTS**


No non-compliance noted

Page 32 Rev. 00


#### **Test Plot**

#### **CH Low**

#### 30MHz ~ 2.9GHz

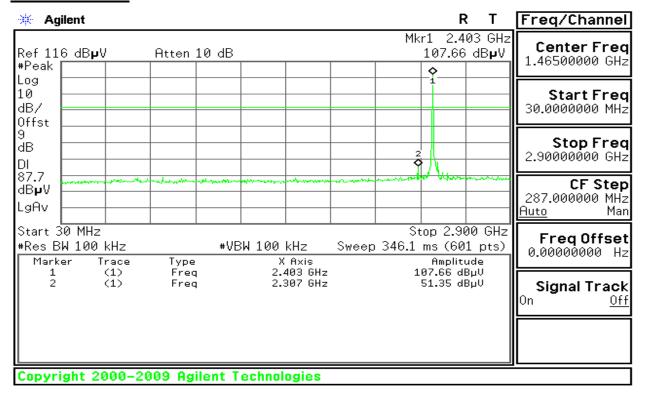


#### 2.9GHz ~ 26.5GHz

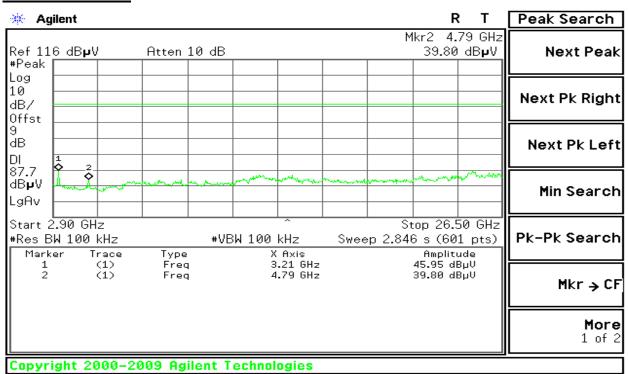


Page 33 Rev. 00

#### **CH Mid**

#### 30MHz ~ 2.9GHz

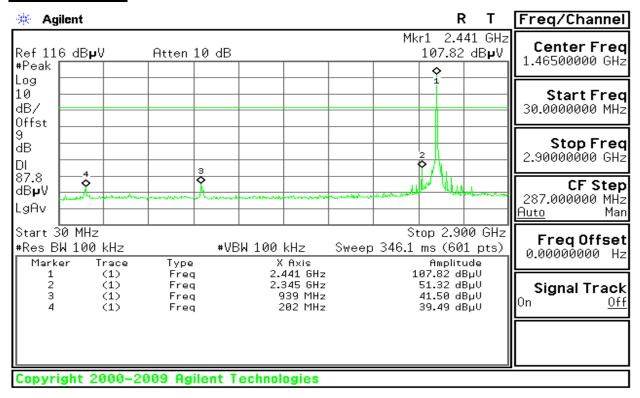


#### 2.9GHz ~ 26.5GHz

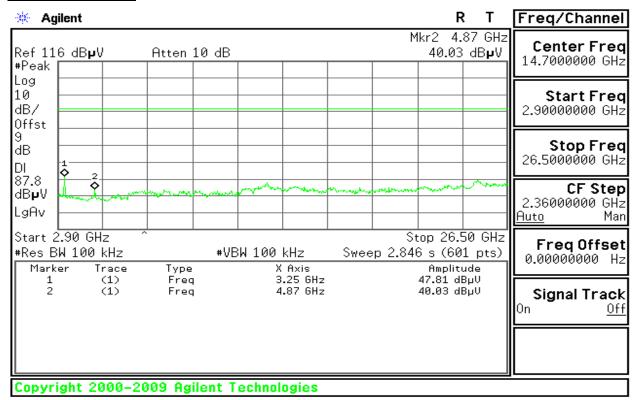


Page 34 Rev. 00

# CH High

#### 30MHz ~ 2.9GHz

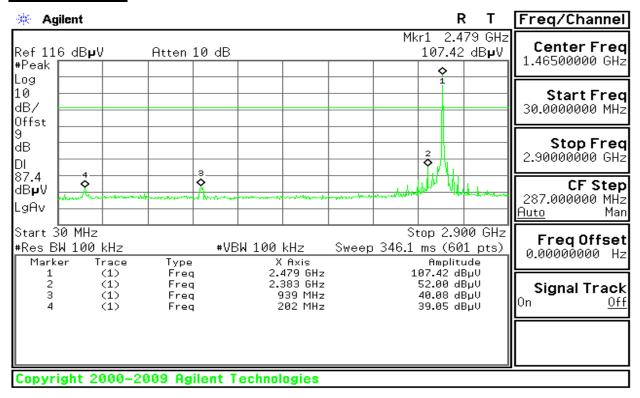

#### 2.9GHz ~ 26.5GHz

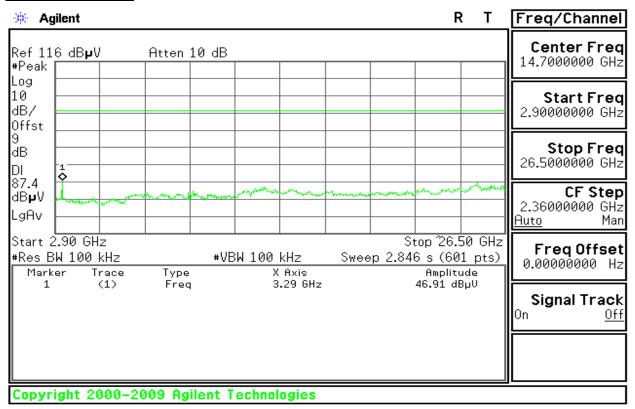

Page 35 Rev. 00

# **Radiated Emissions**

# **LIMIT**

1. Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Date of Issue: July 30, 2009

Frequency (MHz)	Field Strength (mV/m)	Measurement Distance (m)
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

**Remark:** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the above emission table, the tighter limit applies at the band edges.

Frequency (Hz)	Field Strength (μV/m at 3-meter)	Field Strength (dBµV/m at 3-meter)		
30-88	100	40		
88-216	150	43.5		
216-960	200	46		
Above 960	500	54		

Page 36 Rev. 00


# MEASUREMENT EQUIPMENT USED

977 Chamber (3m)									
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due					
Spectrum Analyzer	Agilent	E4446A	MY44020154	11/16/2009					
ESPI3 EMI RECEIVER	R&S	ESPI3	101026	11/10/2009					
Pre-Amplfier	MINI	ZFL-1000VH2	d041703	12/12/2009					
Pre-Amplfier	Miteq	NSP4000-NF	870731	01/21/2010					
Bilog Antenna	Sunol Sciences	JB1	A110204-2	11/09/2009					
Horn Antenna	Austriah	BBHA9120D	D267	09/20/2009					
Turn Table	СТ	CT123	4162	N.C.R					
Antenna Tower	СТ	CTERG23	3253	N.C.R					
Controller	СТ	CT100	95635	N.C.R					
Coax Switch	Anitsu	MP 598	M 80094	N/A					
Site NSA	CCS Lab.	N/A	N/A	02/15/2010					

**Remark:** Each piece of equipment is scheduled for calibration once a year.


# **Test Configuration**

### **Below 1 GHz**

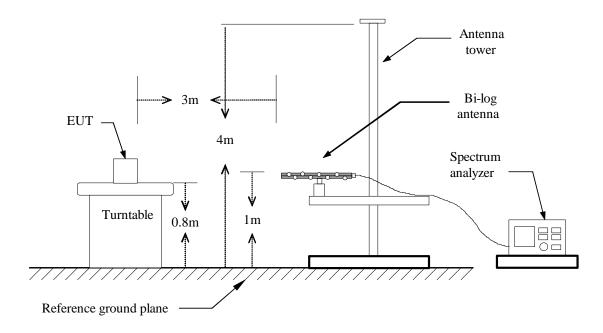

Page 37 Rev. 00

#### **Above 1 GHz**

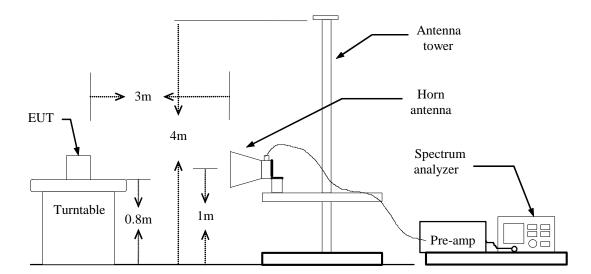

# **TEST PROCEDURE**

- 1. The EUT is placed on a turntable, which is 0.8m above ground plane.
- 2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
- 3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
- 4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 6. Set the spectrum analyzer in the following setting as:

Below 1GHz:

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz:

(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO

(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO

7. Repeat above procedures until the measurements for all frequencies are complete.

Page 38 Rev. 00

# **TEST RESULTS**

**Below 1 GHz** 

Operation Mode: Normal Link Test Date: July 28, 2009

Date of Issue: July 30, 2009

**Temperature:** 25°C **Tested by:** healing **Humidity:** 42 % RH **Polarity:** Ver. / Hor.

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit 3m (dBuV/m)	Safe Margin (dB)
40.01	V	Peak	40.3	-5.89	34.41	40.0	-5.59
49.31	V	Peak	39.15	-5.67	33.48	40.0	-6.52
120.39	V	Peak	46.32	-8.46	37.86	43.5	-5.64
230.95	V	Peak	48.92	-9.92	39	46.0	-7
555.67	V	Peak	40.94	-1.35	39.59	46.0	-6.41
945.00	V	Peak	34.69	4.15	38.84	46.0	-7.16
95.3	Н	Peak	42.12	-3.71	38.41	43.5	-5.09
125.96	Н	Peak	45.69	-8.16	37.53	43.5	-5.97
210.39	Н	Peak	47.39	-10.37	37.02	43.5	-6.48
236.68	Н	Peak	49.12	-9.92	39.2	46.0	-6.8
320.75	Н	Peak	46.74	-7.24	39.5	46.0	-6.5
950.41	Н	Peak	33.64	4.45	38.09	46.0	-7.91

#### Notes:

- 1. Measuring frequencies from 30 MHz to the 1GHz, No emission found between lowest internal used/generated frequency to 30 MHz.
- 2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
- 3. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.

Page 39 Rev. 00

**Above 1 GHz** 

**Operation Mode:** TX/ CH Low **Test Date:** July 28, 2009

**Temperature:** 25°C **Tested by:** healing

**Humidity:** 42 % RH **Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading	AV Reading	Ant. / CL CF	Actu	Actual Fs		AV Limit	Margin (dB)	Remark
		(dBuV)	(dBuV)	(dB)	Peak	AV	(aRn A\m	(dBuV/m)		Kemark
					(dBuV/m)	(dBuV/m)				
4805.67	V	41.39	28.56	10.98	52.37	39.54	74	54	-14.46	Avg
7205.33	V	35.33	18.68	18.54	53.87	37.22	74	54	-16.78	Avg
4805.67	Н	41.68	27.19	10.98	52.66	38.17	74	54	-15.83	Avg
7205.33	Н	33.44	17.93	18.54	51.98	36.47	74	54	-17.53	Avg

#### Remark:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4. Spectrum setting:
  - a. Peak Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 1MHz, Sweep time = Auto.
  - b. AV Setting 1GH z to 10th harmonics of fundamental, RBW = 1MHz, VBW = 10Hz, Sweep time = Auto.

Page 40 Rev. 00

Operation Mode: TX/ CH Mid Test Date: July 28, 2009

Date of Issue: July 30, 2009

**Temperature:** 25°C **Tested by:** healing **Humidity:** 42 % RH **Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading	AV Reading	Ant. / CL CF	Actu	Actual Fs		AV Limit	Margin (dB)	Domayle
		(dBuV)	(dBuV)	(dB)	Peak	AV	(aRAA/W	(dBuV/m)		Remark
					(dBuV/m)	(dBuV/m)				
4883.67	V	41.37	25.65	11.09	52.46	36.74	74	54	-17.26	Avg
7325.24	V	35.69	17.26	18.18	53.87	35.44	74	54	-18.56	Avg
4883.67	Н	40.9	25.06	11.09	51.99	36.15	74	54	-17.85	Avg
7326.33	Н	32.89	17.7	18.17	51.06	35.87	74	54	-18.13	Avg

#### Remark:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4. Spectrum setting:
  - a. Peak Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 1MHz, Sweep time = Auto.
  - b. AV Setting 1GH z to 10th harmonics of fundamental, RBW = 1MHz, VBW = 10Hz, Sweep time = Auto.

Page 41 Rev. 00

Operation Mode: TX/ CH High Test Date: July 28, 2009

Date of Issue: July 30, 2009

**Temperature:** 25°C **Tested by:** healing

**Humidity:** 42 % RH **Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading	AV Reading	Ant. / CL CF	Actu	Actual Fs		AV Limit	Margin (dB)	Remark
		(dBuV)	(dBuV)	(dB)	Peak	AV	, (arn //w	(dBuV/m)		Kemark
					(dBuV/m)	(dBuV/m)				
4961.33	V	39.13	24.47	11.20	50.33	35.67	74	54	-18.33	Avg
7443.30	V	34.58	16.74	18.00	52.58	34.74	74	54	-19.26	Avg
4961.33	Н	39.59	24.91	11.20	50.79	36.11	74	54	-17.89	Avg
7443.15	Н	34.74	18.51	18.00	52.74	36.51	74	54	-17.49	Avg

#### Remark:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4. Spectrum setting:
  - a. Peak Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 1MHz, Sweep time = Auto.
  - b. AV Setting 1GH z to 10th harmonics of fundamental, RBW = 1MHz, VBW = 10Hz, Sweep time = Auto.

Page 42 Rev. 00

### POWERLINE CONDUCTED EMISSIONS

# **LIMIT**

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Date of Issue: July 30, 2009

Frequency Range (MHz)	Limits (dBμV)				
Frequency Range (WIIIZ)	Quasi-peak	Average			
0.15 to 0.50	66 to 56	56 to 46			
0.50 to 5	56	46			
5 to 30	60	50			

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.


# MEASUREMENT EQUIPMENT USED

Conducted Emission Test Site A (10m chamber)									
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due					
EMI Test Receiver	R&S	ESI26	100068	02/11/2010					
EMC Analyzer	Agilent	E7402A	US41160329	02/11/2010					
LISN	FCC	FCC-LISN-50-50-2-M	01067	02/11/2010					
LISN (EUT)	FCC	FCC-LISN-50-50-2-M	01068	02/11/2010					
TRANSIENT LIMITER	SCHAFFNER	CFL9206	1710	03/15/2010					
EMI Monitor control box	FCC	0-SVDC	N/A	N/A					

**Remark:** Each piece of equipment is scheduled for calibration once a year.

Page 43 Rev. 00

### **Test Configuration**

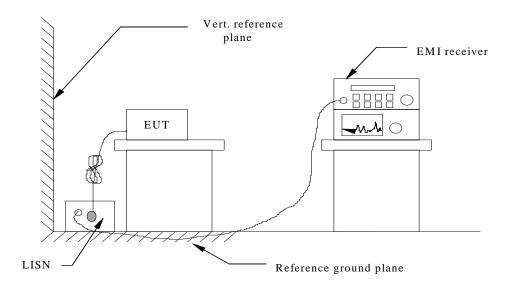

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

# **TEST PROCEDURE**

- 1. The EUT was placed on a table, which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all frequency measured were complete.

Page 44 Rev. 00

# **TEST RESULTS**

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Date of Issue: July 30, 2009

#### **Test Data**

Model: i270 Test Mode: Normal Link

Temperature: 25°C Humidity: 42% RH

Tested by: healing Test Results: Pass

Freq.	PEAK.	Q.P.	AVG	Q.P.	AVG	Margin	Factor	
(MHz)	Raw	Raw	Raw	Limit	Limit	(dB)	(dB)	Remark
(141112)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dBuV)			
0.262	49.90	42.18	33.92	62.81	52.81	-18.89	10.21	L1
0.516	51.28	47.89	32.94	56.00	46.00	-13.06	10.48	L1
0.918	51.17	48.31	36.16	56.00	46.00	-9.84	10.79	L1
1.282	50.54	47.63	38.26	56.00	46.00	-7.74	10.98	L1
1.644	48.93	43.04	33.78	56.00	46.00	-12.22	11.12	L1
2.040	48.13	42.28	28.26	56.00	46.00	-17.74	11.27	L1
				ı				
0.255	49.05	45.98	31.57	62.99	52.99	-21.42	10.18	L2
0.563	51.01	46.43	40.61	56.00	46.00	-5.39	10.55	L2
0.622	50.81	42.71	31.79	56.00	46.00	-14.21	10.62	L2
0.922	49.98	45.31	39.22	56.00	46.00	-6.78	10.99	L2
1.284	48.01	44.86	33.11	56.00	46.00	-12.89	11.13	L2
1.700	46.99	42.90	29.01	56.00	46.00	-16.99	11.20	L2

#### Remark:

- 1. The measuring frequencies range between 0.15 MHz and 30 MHz.
- 2. The emissions measured in the frequency range between 0.15 MHz and 30MHz were made with an instrument using Quasi-peak detector and Average detector.
- 3. "---" denotes the emission level was or more than 2dB below the Average limit, and no re-check was made.
- 4. The IF bandwidth of SPA between 0.15MHz and 30MHz was 10KHz. The IF bandwidth of Test Receiver between 0.15MHz and 30MHz was 9kHz.

#### *Note:*

Freq. = Emission frequency in KHz

 $Factor\left(dB\right) = cable\ loss + Insertion\ loss\ of\ LISN+\ Insertion\ loss\ of\ TRANSIENT\ LIMITER\ (The\ TRANSIENT\ LIMITER\ included\ 10\ dB\ ATTENUATION)$ 

Page 45 Rev. 00

Amptd dBuV = Uncorrected Analyzer/Receiver reading + cable loss + Insertion loss of LISN+ Insertion loss of TRANSIENT LIMITER,

Date of Issue: July 30, 2009

*if it* > 0.5 dB

Limit dBuV = Limit stated in standard


Margin dB = Reading in reference to limit

### **Calculation Formula**

Margin(dB) = Amptd(dBuV) - Limit(dBuV)


# **Test Plot**

### Conducted emissions (Line 1)

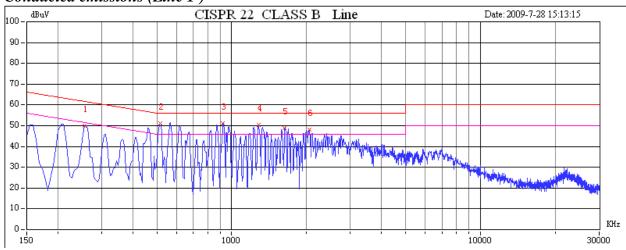

# **Test Plot**

### Conducted emissions (Line 2)

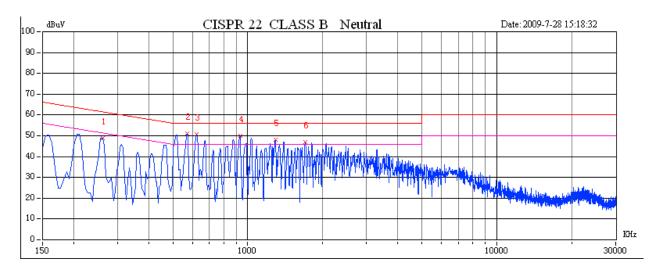

Page 46 Rev. 00