

# FCC 47 CFR PART 15 SUBPART B TEST REPORT

For

Applicant: Verykool USA INC.

Address: 4350 Executive Dr.100 San Diego, CA 92121, USA.

**Product Name: GSM/GPRS Mobile Phone** 

Model Name: i277

**Brand Name: Verykool** 

FCC ID: WA6I277

Report No.: STS110121F1

Date of Issue: January. 22, 2011

Issued by: Shenzhen Super Test Service Technology Co., Ltd.

No.5, Langshan 2nd Rd., North Hi-Tech Industrial park, Nanshan, Address:

Shenzhen, Guangdong, China

Tel: 86-755-2795 8522

Fax: 86-755-2795 8022

The report consists 37 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by STS. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver.

# **TABLE OF CONTENTS**

1. VERIFICATION OF CONFORMITY	3
2. GENERAL INFORMATION	4
2.1 PRODUCT INFORMATION	4
2.2 OBJECTIVE	5
2.3 TEST STANDARDS AND RESULTS	5
2.4 ENVIRONMENTAL CONDITIONS	5
3. TEST FACILITY	6
4. TEST EQUIPMENT LIST	7
5. 47 CFR PART 15B REQUIREMENTS	8
5.1 GENERAL INFORMATION	8
6. LINE CONDUCTED EMISSION TEST	10
6.1. LIMITS OF LINE CONDUCTED EMISSION TEST	10
6.2. BLOCK DIAGRAM OF TEST SETUP	10
6.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	11
6.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	11
6.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	12
7. RADIATED EMISSION TEST	16
7.1. LIMITS OF RADIATED DISTURBANCES AT 3M DISTANCES FOR CLASS B	16
7.2 TEST DESCRIPTION	16
7.3 TEST RESULT	18
APPENDIX 1	24
PHOTOGRAPHS OF TEST SETUP	24
APPENDIX 2	28
PHOTOGRAPHS OF EUT	28

# 1. VERIFICATION OF CONFORMITY

**Equipment Under Test:** GSM/GPRS Mobile Phone

**Brand Name:** Verykool Model Number: i277 Series Model Name: N/A **Series Model Difference** 

description:

N/A

FCC ID: WA6I277

Applicant: Verykool USA INC.

4350 Executive Dr.100 San Diego, CA 92121, USA.

Manufacturer: Shenzhen Xphone Telecom Co., Ltd.

Room10E, YunSong Building, No.9 TaiRan Road, CheGongMiao, Futian,

Shenzhen, China,

**Technical Standards:** FCC Part 15 B File Number: STS110121F1

Date of test: January. 17 ~ January. 22, 2011

Deviation: None Condition of Test Sample: Normal Test Result: **PASS** 

The above equipment was tested by Shenzhen Super Test Service Technology Co., Ltd. for compliance with the requirements set forth in FCC Part 15 and the Technical Standards mentioned above. This said equipment in the configuration described in this report shows the maximum emission levels emanating from equipment and the level of the immunity endurance of the equipment are within the compliance requirements.

The test results of this report relate only to the tested sample identified in this report.

Petter Ping Tested by (+ signature): Petter Ping January. 22, 2011 Review by (+ signature): July Wen January. 22, 2011 Approved by (+ signature):

Terry Yang

January. 22, 2011

# 2. GENERAL INFORMATION

# 2.1 PRODUCT INFORMATION

EUT1- Mobile Phone	
Description:	GSM/GPRS Mobile Phone
Model Name:	i277
Serial No.:	N/A
Model Difference description:	N/A
IMEI No.:	350113030001496/ 350113030001504
Frequency:	GSM 850MHz/1900MHz
Hardware Version:	Z01-V2.0
Software Version:	Z01_X9_SINGLE_GC0309_K5N2866ATD_BQ12_R61509V&H8352A
	_20110107
EUT2- Battery	
Description:	Lithium-ion Battery
Model Name:	HP-5F
Brand Name:	Verykool
Manufacturer:	SHENZHEN HAIPING ELECTRONIC TECHNOLOGY CO., LTD.
Capacitance:	1000 mAh
Rated Voltage:	3.7V
Charge Limit:	4.2V
EUT3 – Power Supply	
Description:	Travel Charger
Model Name:	RS18-SP0500500
Brand Name:	Verykool
Manufacturer:	SHENZHEN RASO TECHNOLOGY CO., LTD.
Rated Input:	AC 100-240V, 50/60HZ 0.6A
Rated Output:	DC 5.0V, 500mA
Length USB cable:	0.80m

# **NOTE:**

- 1. The EUT is a model of GSM Portable Mobile Station (MS). It consists of **hand telephone set**, **Lithium battery**, **headphone**, **USB cable** and **Charger** as listed above.
- 2. Please refer to Appendix 2 for the photographs of the EUT. For a more detailed features description about the EUT, please refer to User's Manual.

# 2.2 OBJECTIVE

Perform FCC Part 15 Subpart B tests for FCC Marking.

# 2.3 TEST STANDARDS AND RESULTS

Test items and the results are as bellow:

EMISSION										
Standard		Item	Result	Remarks						
FCC 47 CFR Part 15 Subpart B	§15.107	Conducted Emission	PASS	Meet Class B limit						
(10-1-05 Edition)	§15.109	Radiated Emission	PASS	Meet Class B limit						

Note:

- 1. The test result judgment is decided by the limit of measurement standard
- 2. The information of measurement uncertainty is available upon the customer's request.

# 2.4 ENVIRONMENTAL CONDITIONS

During the measurement the environmental conditions were within the listed ranges:

- Temperature: 15-35°C - Humidity: 30-60 %

- Atmospheric pressure: 86-106 kPa

#### 3. TEST FACILITY

Test Site: Most Technology Service Co., Itd

Location: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park, Nanshan, Shenzhen,

Guangdong ,China

Description: There is one 3m semi-anechoic an area test sites and two line conducted labs for final

test. The Open Area Test Sites and the Line Conducted labs are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2009 and CISPR

16 requirements. The FCC Registration Number is 490827.

The CNAS Registration Number is CNAS L3573.

Site Filing: The site description is on file with the Federal Communications

Commission, 7435 Oakland Mills Road, Columbia, MD 21046.

Instrument Tolerance: All measuring equipment is in accord with ANSI C63.4:2009 and CISPR 16

requirements that meet industry regulatory agency and accreditation agency

requirement.

Ground Plane: Two conductive reference ground planes were used during the Line Conducted

Emission, one in vertical and the other in horizontal. The dimensions of these ground planes are as below. The vertical ground plane was placed distancing 40 cm to the rear of the wooden test table on where the EUT and the support equipment were placed during test. The horizontal ground plane projected 50 cm beyond the footprint of the EUT system and distanced 80 cm to the wooden test table. For Radiated Emission Test, one horizontal conductive ground plane extended at least 1m beyond the periphery of the EUT and the largest measuring antenna, and covered the entire

area between the EUT and the antenna.

# 4. TEST EQUIPMENT LIST

**Instrumentation:** The following list contains equipment used at MOST for testing. The equipment conforms to the CISPR 16-1 / ANSI C63.2 Specifications for Electromagnetic Interference and Field Strength Instrumentation from 10 kHz to 1.0 GHz or above.

No.	Equipment	Manufacturer	Model No.	S/N	Calibration date	Calibration due date
1	Test Receiver	Rohde & Schwarz	ESCI	100492	2010/03/14	2011/03/14
2	L.I.S.N.	Rohde & Schwarz	ENV216	100093	2010/03/14	2011/03/14
3	Coaxial Switch	Anritsu Corp	MP59B	6200283933	2010/03/14	2011/03/14
4	Terminator	Hubersuhner	50Ω	No.1	2010/03/14	2011/03/14
5	RF Cable	SchwarzBeck	N/A	No.1	2010/03/14	2011/03/14
6	Test Receiver	Rohde & Schwarz	ESPI	101202	2010/03/14	2011/03/14
7	Bilog Antenna	Sunol	JB3	A121206	2010/03/14	2011/03/14
8	Test Antenna - Horn	Schwarzbeck	BBHA 9120C		2010/03/14	2011/03/14
9	Test Antenna - LOOP	Schwarzbeck	VULB 9163		2010/03/14	2011/03/14
10	Cable	Resenberger	N/A	NO.1	2010/03/14	2011/03/14
11	Cable	SchwarzBeck	N/A	NO.2	2010/03/14	2011/03/14
12	Cable	SchwarzBeck	N/A	NO.3	2010/03/14	2011/03/14
13	DC Power Filter	DuoJi	DL2×30B	N/A	2010/03/14	2011/03/14
14	Single Phase Power Line Filter	DuoJi	FNF 202B30	N/A	2010/03/14	2011/03/14
15	3 Phase Power Line Filter	DuoJi	FNF 402B30	N/A	2010/03/14	2011/03/14
16	Spectrum Analyzer	Agilent	4408B	MY41440460	2010/03/14	2011/03/14
17	Absorbing Clamp	Luthi	MDS21	3635	2010/03/14	2011/03/14
18	Coaxial Switch	Anritsu Corp	MP59B	6200283933	2010/03/14	2011/03/14
19	AC Power Source	Kikusui	AC40MA	LM003232	2010/03/14	2011/03/14
20	Test Analyzer	Kikusui	KHA1000	LM003720	2010/03/14	2011/03/14
21	Line Impendence Network	Kikusui	LIN40MA- PCR-L	LM002352	2010/03/14	2011/03/14
22	ESD Tester	Kikusui	KES4021	LM003537	2010/03/14	2011/03/14
23	EMCPRO System	EM Test	UCS-500-M4	V064810202 6	2010/03/14	2011/03/14
24	Signal Generator	IFR	2032	203002/100	2010/03/14	2011/03/14
25	Amplifier	A&R	150W1000	301584	2010/03/14	2011/03/14
26	CDN	FCC	FCC-801-M2-25	47	2010/03/14	2011/03/14
27	CDN	FCC	FCC-801-M3-25	107	2010/03/14	2011/03/14
28	EM Injection Clamp	FCC	F-203I-23mm	403	2010/03/14	2011/03/14
29	RF Cable	MIYAZAKI	N/A	No.1/No.2	2010/03/14	2011/03/14
30	Universal Radio Communication Tester	ROHDE&SCHWARZ	CMU200	0304789	2010/03/14	2011/03/14
l l	Telecommunication Antenna	European Antennas	PSA 75301R/170	0304213	2010/03/14	2011/03/14
31	relecommunication Antenna	European Antennas	1 0/1/000110170	0001210		

**NOTE:** Equipments listed above have been calibrated and are in the period of validation.

### 5. 47 CFR PART 15B REQUIREMENTS

#### **5.1 GENERAL INFORMATION**

#### **EUT Function and Test Mode**

#### Mode 1: Call Mode

Before the measurement, the lithium battery was completely discharge.

During the measurement, the lithium battery and the charger were installed, and the MS were in charging state. A communication link was established between the MS and a System Simulator (SS). The MS operated at GSM 850/1900MHz mid ARFCN and maximum output power.

The EUT configuration of the emission test was **MS** + **Battery**+ **Charger**.

#### Mode 2: Idle Mode

The MS was registered to the base station simulator but no call was set up.

The EUT configuration of the emission test was **MS** + **Battery**+ **Charger**.

#### Mode 3: MP3/MP4 Mode

During the test, the MS was playing the MP3/MP4 function continuously.

The EUT configuration of the emission test was MS + Battery + Charger.

#### Mode 4: USB Mode

During the test, the MS was connected with the notebook and made the data transmission function continuously.

The EUT configuration of the emission test was **MS + Battery+ USB Cable+ Notebook** (Samsung NP-R428-DS0YCN, SN: ZVC093FZ800422X).

#### Mode 5: GPRS Mode

During the test, the MS was playing the GPRS function continuously.

The EUT configuration of the emission test was MS + Battery+ Charger.

# Mode 6: Camera Mode

During the test, the MS was playing the camera function continuously.

The EUT configuration of the emission test was MS + Battery+ Charger.

# Mode 7: Bluetooth Mode

During the measurement, the lithium battery and the charger were installed, and the MS were in charging state. A communication link was established between the EUT and the Bluetooth Earphone and a System Simulator (SS).

The MS operated at GSM 850/1900MHz mid and maximum output power.

During the test, the MS was playing the Bluetooth function continuously.

The EUT configuration of the emission test was **MS + Battery+ Charger+BT Earphone**.

# **Mode 8: TV Mode**

During the test, the MS was playing the TV function continuously.

The EUT configuration of the emission test was **MS** + **Battery**+ **Charger**.

#### Mode 9: FM Mode

During the test, the MS was playing the FM function continuously.

The EUT configuration of the emission test was MS + Battery+ Earphone+ Charger.

Due to the different configuration and test, in this list only some worse mode. The worst test data of the worst mode is reported by this report.


# 6. LINE CONDUCTED EMISSION TEST

# 6.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Fraguency	Maximum RF	Line Voltage
Frequency	Q.P.( dBuV)	Average( dBuV)
150kHz-500kHz	66-56	56-46
500kHz-5MHz	56	46
5MHz-30MHz	60	50

<sup>\*\*</sup>Note: 1. the lower limit shall apply at the transition frequency.

# 6.2. BLOCK DIAGRAM OF TEST SETUP

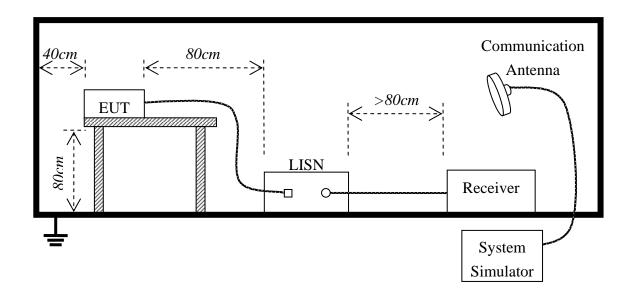

<sup>2.</sup> The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

### 6.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per FCC Part 15 (see Test Facility for the dimensions of the ground plane used). When the EUT is floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.

- 2) Support equipment, if needed, was placed as per FCC Part 15.
- 3) All I/O cables were positioned to simulate typical actual usage as per FCC Part 15.
- 4) The EUT received DC 5V by AC/DC adapter which through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5) All support equipments received power from a second LISN supplying power of AC 120V/60Hz, if any.
- 6) The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7) Analyzer / Receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes.
- 8) During the above scans, the emissions were maximized by cable manipulation.
- 9) The following test mode(s) were scanned during the preliminary test:

	Preliminary Conducted Emission Test								
Frequency Range In	vestigated		150KHz TO 30 MHz						
Mode of operation	Date	Report No.	Data#	Worst Mode					
Call Mode	2011-1-17	STS110121F1	i277_1_(L, N)						
Idle Mode	2011-1-17	STS110121F1	i277_2_(L, N)						
MP3/MP4 Mode	2011-1-17	STS110121F1	i277_3_(L, N)						
USB Mode	2011-1-17	STS110121F1	i277_4_(L, N)						
GPRS Mode	2011-1-17	STS110121F1	i277_5_(L, N)						
Camera Mode	2011-1-17	STS110121F1	i277_6_(L, N)						
Bluetooth Mode	2011-1-17	STS110121F1	i277_7_(L, N)						
TV Mode	2011-1-17	STS110121F1	i277_8_(L, N)						
FM Mode	2011-1-17	STS110121F1	i277_9_(L, N)						

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

## 6.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

EUT and support equipment was set up on the test bench as per step 9 of the preliminary test. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.


The test data of the worst case condition(s) was reported on the Summary Data page.

# 6.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST



Address No.5 Langshan 2nd Rd., North Hi-Tech Industrial park Guangdong ,China

Tel: 0755-86170306 Fax: 0755-86170310

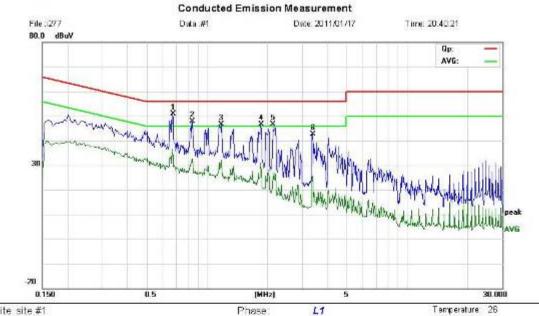

Power: AC 120V/60Hz

Humidity 60 %

Site site #1

Limit: FCC Part 15 B Class B QP

EUT: GSM/GPRS Mobile Phone

M/N: 1277 Mode: Bluetooth

Note:


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over			
		MHz	dBu∀	dB	dBuV	4BuV	άB	Detector	Comment	
1	*	0.6740	40.95	10.08	50.95	58.00	-5.05	peak		
2		0.8420	37.84	10.00	47.84	56 00	-8.16	peak		
3		1.1780	36.78	9.82	46.60	58.00	-9.40	peak		
4		1.8580	37.52	9.14	46.66	56.00	-9.34	peak		
5		2.1260	37,59	9.13	46.72	56.00	-9.28	peak		
6		3,3740	32.34	10.37	42.71	58.00	-13.29	peak		

<sup>\*:</sup>Maximum data x:Overlimit 1:overmargin



Address No.5,Langshan 2nd Rd., North Hi-Tech Industrial park Guangdong ,China Tel: 0755-86170306 Fax: 0755-86170310

Humidity 60 %

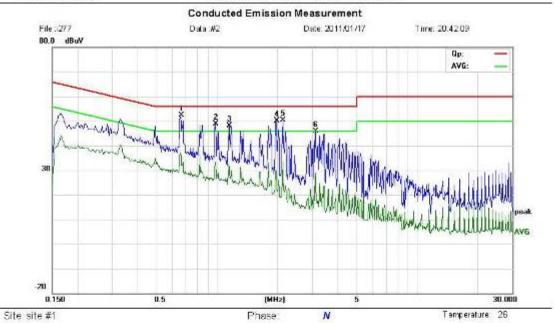

Power: AC 120V/60Hz

Limit: FCC Part 15 B Class B QP

EUT: GSM/GPRS Mobile Phone

M/N: 1277 Mode: Bluetooth

Note:


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over			
		MHz	dBu∀	dB	dBdV	48eV	dΒ	Detector	Commend	
1	*	0.6580	42 38	10.08	52.38	58.00	-3.62	peak		
2		0.9820	38 88	10.00	48.88	56 00	-7.12	peak		
3		1.1500	38.40	9.85	48.25	58.00	-7.75	peak		
4		1.9700	41.03	9.03	50.06	56.00	-5.94	peak		
5		2.1300	41.34	9.13	50.47	56.00	-5.53	peak		
6		3.1140	35.81	10,11	45.92	58.00	-10.08	peak.		

<sup>\*:</sup>Maximum data x:Overlimit 1:overmargin



Address No.5,Langshan 2nd Rd., North Hi-Tech Industrial park Guangdong China Tel: 0755-86170306 Fax: 0755-86170310

Humidity 60 %

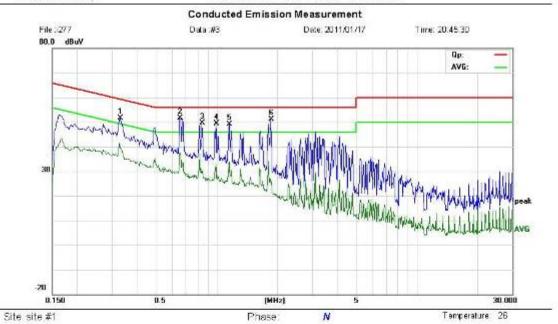

Power: AC 120V/60Hz

Limit: FCC Part 15 B Class B QP

EUT: GSM/GPRS Mobile Phone

M/N: 1277 Mode: TV Note:


No.	MK.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over			
		MHz	dBu∀	dB	dBdV	48eV	άB	Detector	Commend	
1		0.3300	40.55	11.13	51.68	59.45	-7.77	peak		
2	*	0.6540	41.55	10.00	51.55	56 00	-4 45	peak		
3		0.8420	39.74	10.00	49.74	58.00	-8.28	peak		
4		0.9860	39.30	10.00	49.30	56.00	-6.70	peak		
5		1.1460	39.36	9.85	49.21	56.00	-6.79	peak		
6		1,8500	42.07	9.15	51.22	58.00	-4.78	peak		

<sup>\*:</sup>Maximum data x:Overlimit 1:overmargin



Address No.5 Langshan 2nd Rd., North Hi-Tech Industrial park Guangdong China Tel: 0755-86170306 Fax: 0755-86170310

Humidity 60 %

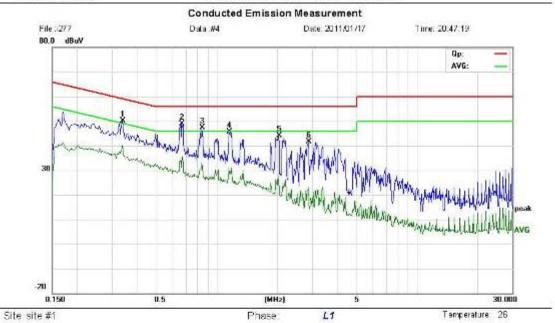

Power: AC 120V/60Hz

Limit: FCC Part 15 B Class B QP

EUT: GSM/GPRS Mobile Phone

M/N: 1277 Mode: TV Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over			
		MHz	dBu∀	dB	dBdV	48uV	dΒ	Detector	Commend	
1		0.3380	39.12	11.08	50.20	59.25	-9.05	peak		
2	*	0.6680	38 88	10.00	48.88	56 00	-7.12	peak		
3		0.8420	37.45	10.00	47.45	58.00	-8.55	peak		
4		1.1460	35.88	9.85	45.73	56.00	-10.27	peak		
5		2.0260	35.04	9.03	44.07	56.00	-11.93	peak		
6		2.8700	31.78	9.87	41.65	56.00	-14.35	peak		

<sup>\*:</sup>Maximum data x:Overlimit 1:overmargin

# 7. RADIATED EMISSION TEST

### 7.1. LIMITS OF RADIATED DISTURBANCES AT 3M DISTANCES FOR CLASS B

According to FCC section 15.109, except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:


Frequency (MHz)	Field Strength (μV/m)	Measurement Distance (m)
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

#### NOTE:

- Field Strength (dBμV/m) = 20\*log[Field Strength (μV/m)].
- 2. In the emission tables above, the tighter limit applies at the band edges.

#### 7.2 TEST DESCRIPTION

#### **Test Setup:**

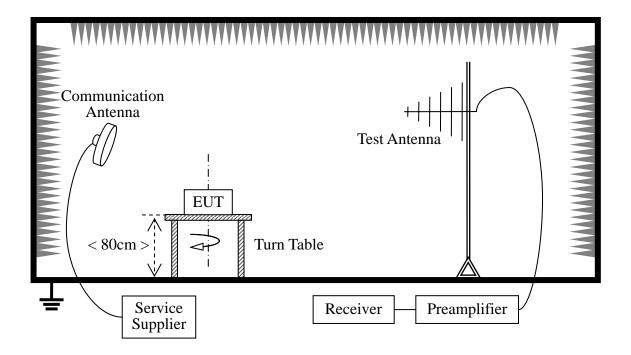

The EUT is powered by the Battery. The Module is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading. During the measurement, the EUT is activated and transmitting with the other Bluetooth device (Supply by the Applicant) during the test.

#### For the Test Antenna:

(a) In the frequency range of 9 kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.

(b) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

	Preliminary Radiated Emission Test										
Frequency	y Range Invest	30 MHz TO 1000 M	Hz								
Mode of operation	Date	Report No.	Data#	Worst Mode							
Call Mode	2011-1-17	STS110121F1	i277_1_(H, V)								
Idle Mode	2011-1-17	STS110121F1	i277_2_(H, V)								
MP3/MP4 Mode	2011-1-17	STS110121F1	i277_3_(H, V)								
USB Mode	2011-1-17	STS110121F1	i277_4_(H, V)	$\boxtimes$							
GPRS Mode	2011-1-17	STS110121F1	i277_5_(H, V)								
Camera Mode	2011-1-17	STS110121F1	i277_6_(H, V)								
Bluetooth Mode	2011-1-17	STS110121F1	i277_7_(H, V)								
TV Mode	2011-1-17	STS110121F1	i277_8_(H, V)								
FM Mode	2011-1-17	STS110121F1	i277_9_(H, V)								


Note: The test modes were carried out for all operation with MS, and its worse test data was showed as the follow:

# 7.3 TEST RESULT



Address No.5 Langshan 2nd Rd., North Hi-Tech Industrial park Guangdong ,China

Tel: 0755-86170306 Fax: 0755-86170310

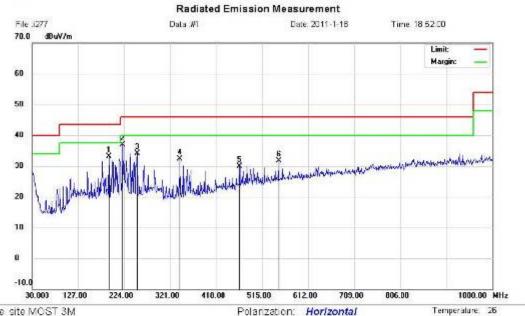

Power, AC 120V/60Hz

Humidity.

Distance:

Site site MOST 3M

Limit: FCC Part 15 B 3M Radiation

EUT: GSM/GPRS Mobile Phone

Mode: Camera Mode

Note:

No.	Mk		Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		Antenna Height	Table Degree	
			MHz	dBu∀	dB	dBuV/m	dBuV/m	dB	Detector	om	degree	Comment
1		191	8800	16.38	18.70	33.08	43.50	-10.42	peak			
2	T	220	.1200	20.51	16.30	36.81	46.00	-9.19	peak			
3		251	.1600	16.73	17.40	34.13	46.00	-11.87	peak			
4		341	.3700	15.14	17.18	32.32	46.00	-13.68	peak			
5		467	4700	8.90	21.07	29.97	46.00	-16.03	peak			
6		549	9200	9.20	22.50	31,70	46.00	-14.30	peak			

<sup>\*:</sup>Maximum data x:Over limit I:over margin




Address No.5,Langshan 2nd Rd., North Hi-Tech Industrial park Guangdong China Tel: 0755-86170306 Fax: 0755-86170310

Humidity:

Distance:

50 %

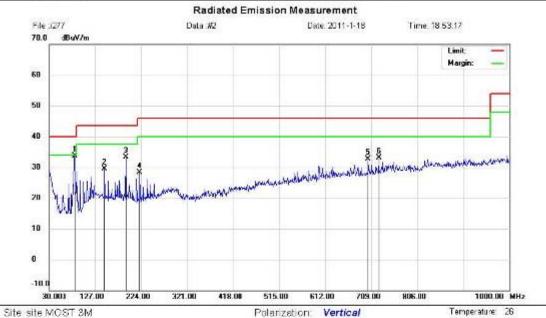

Power, AC 120M60Hz

Limit FCC Part 15 B 3M Radiation

EUT: GSM/GPRS Mobile Phone

M/N: 1277

Mode: Camera Mode


Note:

No.	Mk.		Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		Antenna Height	Table Degree	
			MHz	dBu∀	dB	dBuV/m	dBu∀/m	dB	Detector	cm	degree	Comment
1		83	3500	22 37	11.34	33.71	40.00	-6.29	peak			
2		147	3700	12 83	16.71	29.54	43.50	-13.98	рвак			
3		191	8800	16 63	18.70	33.33	43.50	-10.17	peak			
4	. 3	221	.0900	11.91	16.32	28.23	46.00	-17.77	peak			
5	- 1	702	.2100	8.12	24.68	32.80	46.00	-13.20	peak			
6		724	5200	8.37	24.75	33.12	46.00	-12.88	peak			

<sup>\*:</sup>Maximum data x:Over limit I:over margin



Address No.5 Langshan 2nd Rd., North Hi-Tech Industrial park Guangdong China Tel: 0755-86170306 Fax: 0755-86170310

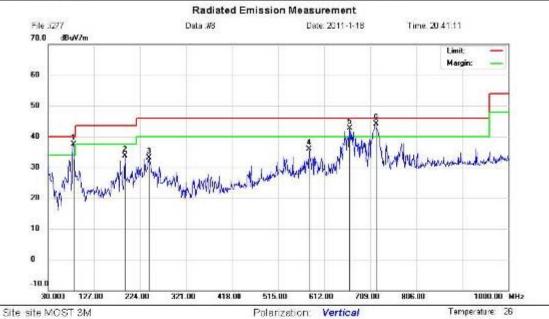

Limit FCC Part 15 B 3M Radiation

EUT: GSM/GPRS Mobile Phone

M/N: 1277 Mode: USB Mode

Note:

Power DC 5V From PC Inpute AC128V/60 Humidity: 50 %


Distance:

No.	Mk	SE .	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		Antenna Height	Table Degree	
			MHz	dBu∀	dB	dBuV/m	dBu∀/m	dB	Detector	cm	degree	Comment
1	1	83	3500	26.07	11.34	37.41	40.00	-2.59	peak			
2		191	8800	17.01	18.70	33.71	43.50	-9.79	peak			
3		242	4300	15 88	17.30	33.18	46.00	-12.82	peak			
4		579	.9900	12.91	22.90	35.81	46.00	-10.19	peak			
5	1	664	.3800	18.48	24.29	42.77	46.00	-3.23	peak			
6		720	6400	19.36	24.71	44.07	46.00	-1.93	QP			

<sup>\*:</sup>Maximum data x:Over limit I:over margin



Address No.5,Langshan 2nd Rd., North Hi-Tech Industrial park Guangdong China Tel: 0755-86170306 Fax: 0755-86170310

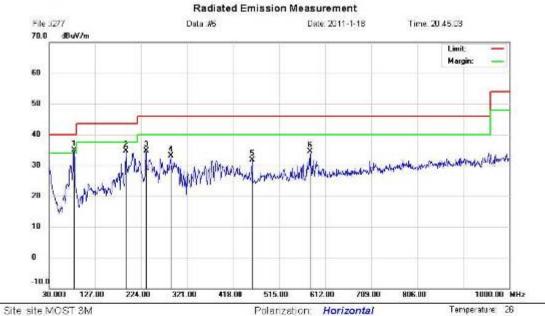

Limit FCC Part 15 B 3M Radiation

EUT: GSM/GPRS Mobile Phone

M/N: 1277 Mode: USB Mode

Note:

Polarization: Horizontal Power DC 5V From PC Inpute AC128V/60 Humidity: 50 %


Distance:

No.	Mk	2 8	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		Antenna Height	Table Degree	
			MHz	dBu∀	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		82	3800	23.53	11.35	34.88	40.00	-5.12	peak			
2		191	8900	18 06	15.70	34.76	43.50	-8 74	peak			
3		233	7000	18.03	18.76	34,79	46.00	-11.21	peak			
4		206	.0799	13.68	19.44	33.12	46.00	-12.88	peak			
5		458	7400	11.46	20.34	31,80	46.00	-14.20	peak			
6		579	.9900	11.59	22.90	34.49	46.00	-11.51	peak			

<sup>\*:</sup>Maximum data x:Over limit I:over margin



Address No.5,Langshan 2nd Rd., North Hi-Tech Industrial park Guangdong China Tel: 0755-86170306 Fax: 0755-86170310

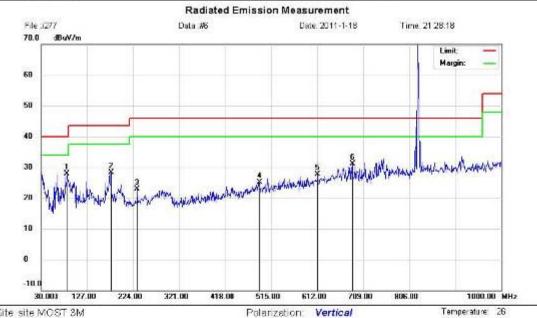

Power, AC 120M60Hz

Humidity:

Distance:

50 %

Site site MOST 3M

Limit FCC Part 15 B 3M Radiation

EUT: GSM/GPRS Mobile Phone

M/N: 1277 Mode: CALL Mode

Note:


No.	Mk.	Freq	Reading Level	Correct Factor	Measure- ment	Limit	Over		Antenna Height	Table Degree	
		MHz	dBu∀	dB	dBuV/m	dBu∀/m	dB	Detector	cm	degree	Comment
1		85.2900	16.60	11.31	27.91	40.00	-12.09	peak			
2		176,4700	11.34	15.88	28.22	43.50	-15.28	peak			
3	3	232.7299	6.25	18.69	22.94	48.00	-23.08	peak			
4	- 4	489.7800	3.45	21.70	25.15	46.00	-20.85	peak			
5	1	612,9699	4.44	23.29	27.73	46.00	-18 27	peak			
6		685.7199	6.75	24.40	31.15	46.00	-14.85	peak			

<sup>\*:</sup>Maximum data x:Over limit I:over margin



Address No.5 Langshan 2nd Rd., North Hi-Tech Industrial park Guangdong ,China

Tel: 0755-86170306 Fax: 0755-86170310

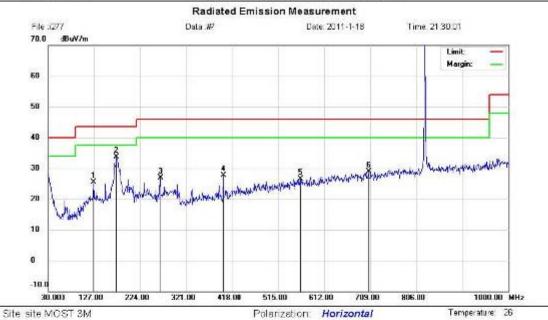

Power, AC 120M60Hz

Humidity:

Distance;

60 %

Limit FCC Part15 B 3M Radiation EUT; GSM/GPRS Mobile Phone

M/N: 1277 Mode: CALL Mode

Note:

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		Antenna Height	Table Degree	
		MHz	dBu∀	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		126,0300	7.85	17,70	25.55	43.50	-17.95	peak			
2	*	174.5300	16 66	15.97	33.63	43.50	-9 87	peak			
3		285.7100	8.53	18.35	26.88	48.00	-19.12	peak			
4		398,6000	9.07	18.66	27.73	46.00	-18.27	peak			
5		561,5600	3.79	22.72	26.51	46.00	-19,49	peak			
6		705.1200	4.22	24.65	28.87	46.00	-17.13	peak			

Notes: The spikes which exceed the limit should be ignored because they are MS and SS carrier frequency.

<sup>\*:</sup>Maximum data x:Over limit I:over margin


# APPENDIX 1 PHOTOGRAPHS OF TEST SETUP











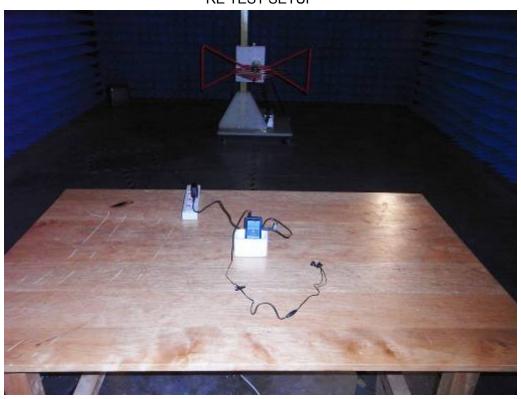

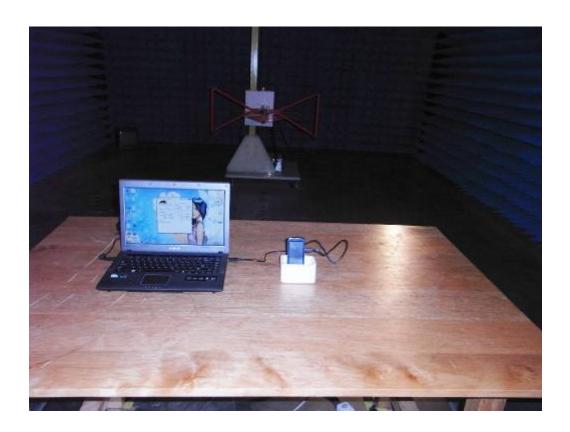

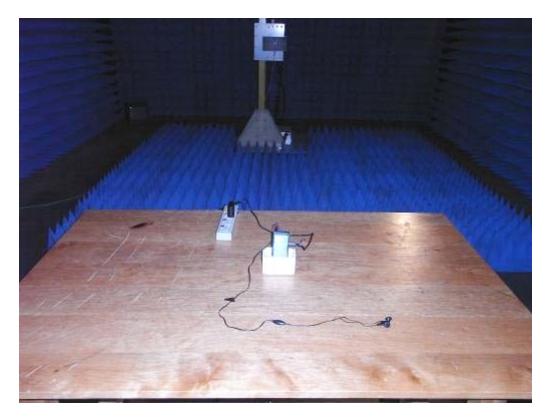

# APPENDIX 2 PHOTOGRAPHS OF EUT

FRONT VIEW OF SAMPLE



BACK VIEW OF SAMPLE



LEFT VIEW OF SAMPLE



RIGHT VIEW OF SAMPLE



TOP VIEW OF SAMPLE



BOTTOM VIEW OF SAMPLE



PHOTO OF POWER SUPPLY



PHOTO OF USB CABLE



# PHOTO OF HEADPHONE




PHOTO OF BATTERY




PHOTO OF THE ENTIRE SAMPLE




INTERNAL PHOTO OF SAMPLE - 1

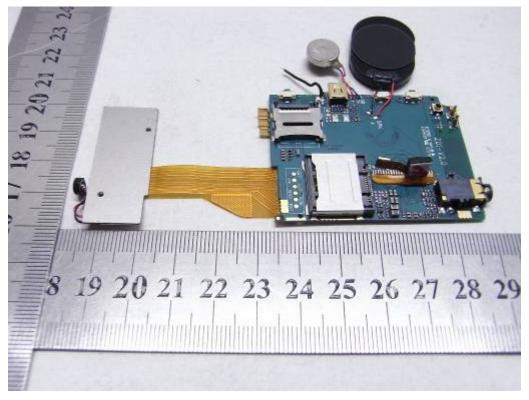


INTERNAL PHOTO OF SAMPLE -2

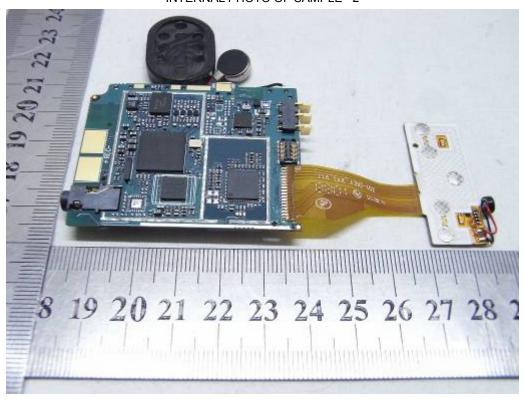

INTERNAL PHOTO OF SAMPLE -3

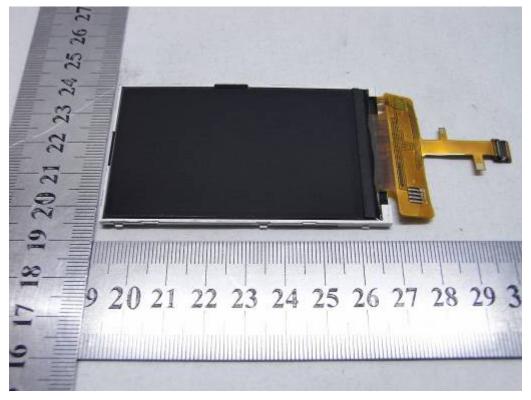


INTERNAL PHOTO OF SAMPLE -4

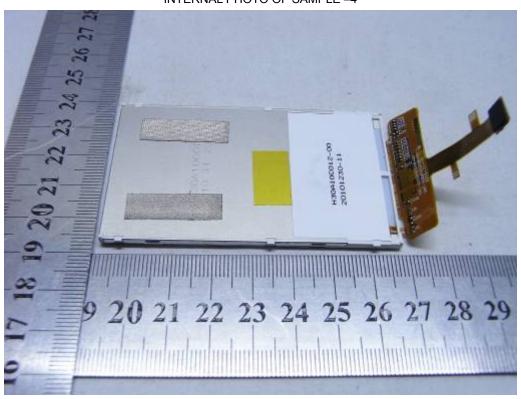

INTERNAL PHOTO OF POWER SUPPLY-1



# INTERNAL PHOTO OF POWER SUPPLY-2

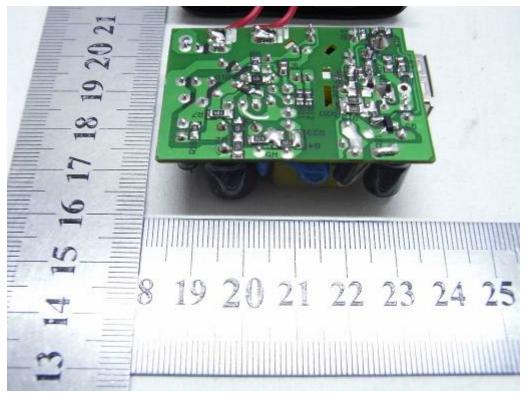

-----END OF REPORT-----