



TEST REPORT

Report Reference No.....	TRE1510017504	R/C.....: 95558
FCC ID.....	WA6S3502	
Applicant's name.....	Verykool USA Inc	
Address.....	3636 Nobel Drive, Suite 325, San Diego, CA92122 USA	
Manufacturer.....	HUIZHOU QIAOXING ELECTRONICS TECHNOLOGY CO.,LTD	
Address.....	Room 1906 of VIA Building, No.9966 Shennan Avenue, Yuehai Street in Nanshan District, Shenzhen ,China	
Test item description	Mobile Phone	
Trade Mark	verykool	
Model/Type reference.....	s3502	
Listed Model(s)	--	
Standard	FCC CFR Title 47 Part 15 Subpart C Section 15.247	
Date of receipt of test sample.....	Oct 28,2015	
Date of testing.....	Oct 29,2015- Nov 17,2015	
Date of issue.....	Nov 18,2015	
Result.....	PASS	

Compiled by
(position+printedname+signature)...: File administrators Candy Liu

Supervised by
(position+printed name+signature)..: Project Engineer Lion Cai

Approved by
(position+printed name+signature)..: RF Manager Hans Hu

Testing Laboratory Name : **Shenzhen Huatongwei International Inspection Co., Ltd**

Address.....: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Contents

<u>1.</u>	<u>APPLICABLE STANDARDS AND TEST DESCRIPTION</u>	<u>3</u>
1.1.	Applicable Standards	3
1.2.	Test Description	3
<u>2.</u>	<u>SUMMARY</u>	<u>4</u>
2.1.	Client Information	4
2.2.	Product Description	4
2.3.	Operation state	4
2.4.	EUT configuration	5
2.5.	Modifications	5
<u>3.</u>	<u>TEST ENVIRONMENT</u>	<u>6</u>
3.1.	Address of the test laboratory	6
3.2.	Test Facility	6
3.3.	Equipments Used during the Test	7
3.4.	Environmental conditions	8
3.5.	Statement of the measurement uncertainty	8
<u>4.</u>	<u>TEST CONDITIONS AND RESULTS</u>	<u>9</u>
4.1.	Antenna requirement	9
4.2.	Conducted Emission (AC Main)	10
4.3.	Conducted Peak Output Power	15
4.4.	Power Spectral Density	16
4.5.	6dB bandwidth	18
4.6.	Restricted band (Conducted)	20
4.7.	Band edge and Spurious Emission (conducted)	22
4.8.	Spurious Emission (radiated)	26
<u>5.</u>	<u>TEST SETUP PHOTOS OF THE EUT</u>	<u>32</u>
<u>6.</u>	<u>EXTERNAL AND INTERNAL PHOTOS OF THE EUT</u>	<u>33</u>

1. APPLICABLE STANDARDS AND TEST DESCRIPTION

1.1. Applicable Standards

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices

[KDB558074 D01 V03R02](#): Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS)

1.2. Test Description

ReportSection	Test Item	FCC Rule	Result
4.1	Antenna requirement	15.203/15.247 (c)	Pass
4.2	Line Conducted Emission (AC Main)	15.207	Pass
4.3	Conducted Peak Output Power	15.247 (b)(3)	Pass
4.4	Power Spectral Density	15.247 (e)	Pass
4.5	6dB Bandwidth	15.247 (a)(2)	Pass
4.6	Restricted band	15.247(d)/15.205	Pass
4.7/4.8	Spurious Emission	15.247(d)/15.209	Pass

Remark: The measurement uncertainty is not included in the test result.

2. SUMMARY

2.1. Client Information

Applicant:	Verykool USA Inc
Address:	3636 Nobel Drive, Suite 325, San Diego, CA92122 USA
Manufacturer:	HUIZHOU QIAOXING ELECTRONICS TECHNOLOGY CO.,LTD
Address:	Room 1906 of VIA Building, No.9966 Shennan Avenue, Yuehai Street in Nanshan District, Shenzhen ,China

2.2. Product Description

Name of EUT	Mobile Phone
Trade Mark:	verykool
Model No.:	s3502
Listed Model(s):	--
Power supply:	DC 3.8V From internal battery
Adapter information:	Model:Q350 Input:AC 100-240V 50/60Hz 0.15A Output:5Vd.c., 700mA

Bluetooth

Version:	Supported BT4.0+BLE
Modulation:	GFSK
Operation frequency:	2402MHz~2480MHz
Channel number:	40
Channel separation:	2MHz
Antenna type:	Internal Antenna
Antenna gain:	3dBi

2.3. Operation state

◆ Test frequency list

According to section 15.31(m), regards to the operating frequency range over 10 MHz, must select three channel which were tested. the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, please see the above gray bottom.

Channel	Frequency (MHz)
00	2402
02	2404
:	:
19	2440
:	:
38	2478
39	2480

◆ Test mode

For RF test items:

the engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions:

the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.4. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer
- - supplied by the lab

<input type="radio"/>	PowerCable	Length (m) :	/
		Shield :	/
		Detachable :	/
<input type="radio"/>	Multimeter	Manufacturer :	/
		Model No. :	/

2.5. Modifications

No modifications were implemented to meet testing criteria.

3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Laboratory: Shenzhen Huatongwei International Inspection Co., Ltd.

Address: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

Phone: 86-755-26748019 Fax: 86-755-26748089

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L1225

Shenzhen Huatongwei International Inspection Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories, Date of Registration: February 28, 2015. Valid time is until February 27, 2018.

A2LA-Lab Cert. No. 3902.01

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing. Valid time is until December 31, 2016.

FCC-Registration No.: 317478

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 317478, Renewal date Jul. 18, 2014, valid time is until Jul. 18, 2017.

IC-Registration No.: 5377A&5377B

The 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 5377A on Dec. 31, 2013, valid time is until Dec. 31, 2016.

Two 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 5377B on Dec.03, 2014, valid time is until Dec.03, 2017.

ACA

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our A2LA accreditation.

VCCI

The 3m Semi-

anechoic chamber (12.2m×7.95m×6.7m) of Shenzhen Huatongwei International Inspection Co., Ltd.

has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2484. Date of Registration: Dec. 20, 2012. Valid time is until Dec. 29, 2015.

Radiated disturbance above 1GHz measurement of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-292. Date of Registration: Dec. 24, 2013. Valid time is until Dec. 23, 2016.

Main Ports Conducted Interference Measurement of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: C-2726. Date of Registration: Dec. 20, 2012. Valid time is until Dec. 19, 2015.

Telecommunication Ports Conducted Interference Measurement of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: T-1837. Date of Registration: May 07, 2013. Valid time is until May 06, 2016.

DNV

Shenzhen Huatongwei International Inspection Co., Ltd. has been found to comply with the requirements of DNV towards subcontractor of EMC and safety testing services in conjunction with the EMC and Low voltage Directives and in the voluntary field. The acceptance is based on a formal quality Audit and follow-ups according to relevant parts of ISO/IEC Guide 17025 (2005), in accordance with the requirements of the DNV Laboratory Quality Manual towards subcontractors. Valid time is until Aug. 24, 2016.

3.3. Equipments Used during the Test

Conducted Emission (AC Main)					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal
1	Artificial Mains	Rohde&Schwarz	ESH2-Z5	100028	2015/11/02
2	EMI Test Receiver	Rohde&Schwarz	ESCI3	100038	2015/11/02
3	Pulse Limiter	Rohde&Schwarz	ESHSZ2	100044	2015/11/02
4	EMI Test Software	Rohde&Schwarz	ES-K1 V1.71	N/A	N/A

Radiated Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal
1	Ultra-Broadband Antenna	ShwarzBeck	VULB9163	538	2015/11/02
2	EMI TEST RECEIVER	Rohde&Schwarz	ESI 26	100009	2015/11/02
3	EMI TEST Software	Audix	E3	N/A	N/A
4	TURNTABLE	ETS	2088	2149	N/A
5	ANTENNA MAST	ETS	2075	2346	N/A
6	EMI TEST Software	Rohde&Schwarz	ESK1	N/A	N/A
7	HORNANTENNA	ShwarzBeck	9120D	1011	2015/11/02
8	Amplifier	Sonoma	310N	E009-13	2015/11/02
9	JS amplifier	Rohde&Schwarz	JS4-00101800-28-5A	F201504	2015/11/02
10	High pass filter	Compliance Direction systems	BSU-6	34202	2015/11/02
11	HORNANTENNA	ShwarzBeck	9120D	1012	2015/11/02
12	Amplifier	Compliance Direction systems	PAP1-4060	120	2015/11/02
13	Loop Antenna	Rohde&Schwarz	HFH2-Z2	100020	2015/11/02
14	TURNTABLE	MATURO	TT2.0	----	N/A
15	ANTENNA MAST	MATURO	TAM-4.0-P	----	N/A
16	Horn Antenna	SCHWARZBECK	BBHA9170	25841	2015/11/02
17	ULTRA-BROADBAND ANTENNA	Rohde&Schwarz	HL562	100015	2015/11/02

Maximum Peak Output Power / Power Spectral Density / 6dB Bandwidth / Band Edge Compliance of RF Emission / Spurious RF Conducted Emission

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal
1	Spectrum Analyzer	Rohde&Schwarz	FSP	1164.4391.40	2015/11/02
2	Power Meter	Anritsu	MA2411B	100258	2015/11/02

The Cal.Interval was one year

3.4. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15~35°C
Relative Humidity:	30~60 %
Air Pressure:	950~1050mba

3.5. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen Huatongwei laboratory is reported:

Test Items	Measurement Uncertainty	Notes
Transmitter power conducted	0.57 dB	(1)
Transmitter power Radiated	2.20 dB	(1)
Conducted spurious emission 9KHz-40 GHz	1.60 dB	(1)
Radiated spurious emission 9KHz-40 GHz	2.20 dB	(1)
Conducted Emission 9KHz-30MHz	3.39 dB	(1)
Radiated Emission 30~1000MHz	4.24 dB	(1)
Radiated Emissio 1~18GHz	5.16 dB	(1)
Radiated Emissio 18-40GHz	5.54 dB	(1)
Occupied Bandwidth	-----	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$.

4. TEST CONDITIONS AND RESULTS

4.1. Antenna requirement

Requirement

FCC CFR Title 47 Part 15 Subpart C Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i):

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

Test Result:

The antenna is integral antenna, the best case gain of the antenna is 3.0dBi



4.2. Conducted Emission (AC Main)


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.


TEST CONFIGURATION

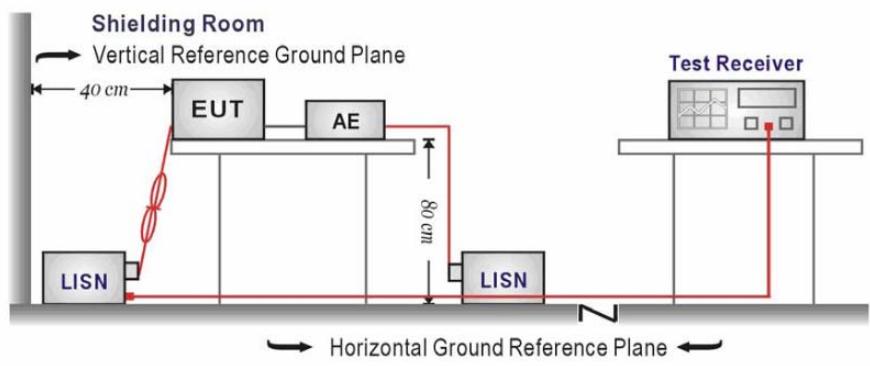

TEST PROCEDURE

1. The EUT was setup and tested according to ANSI C63.10:2013 for compliance to FCC 47CFR 15.247 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.

TEST RESULTS

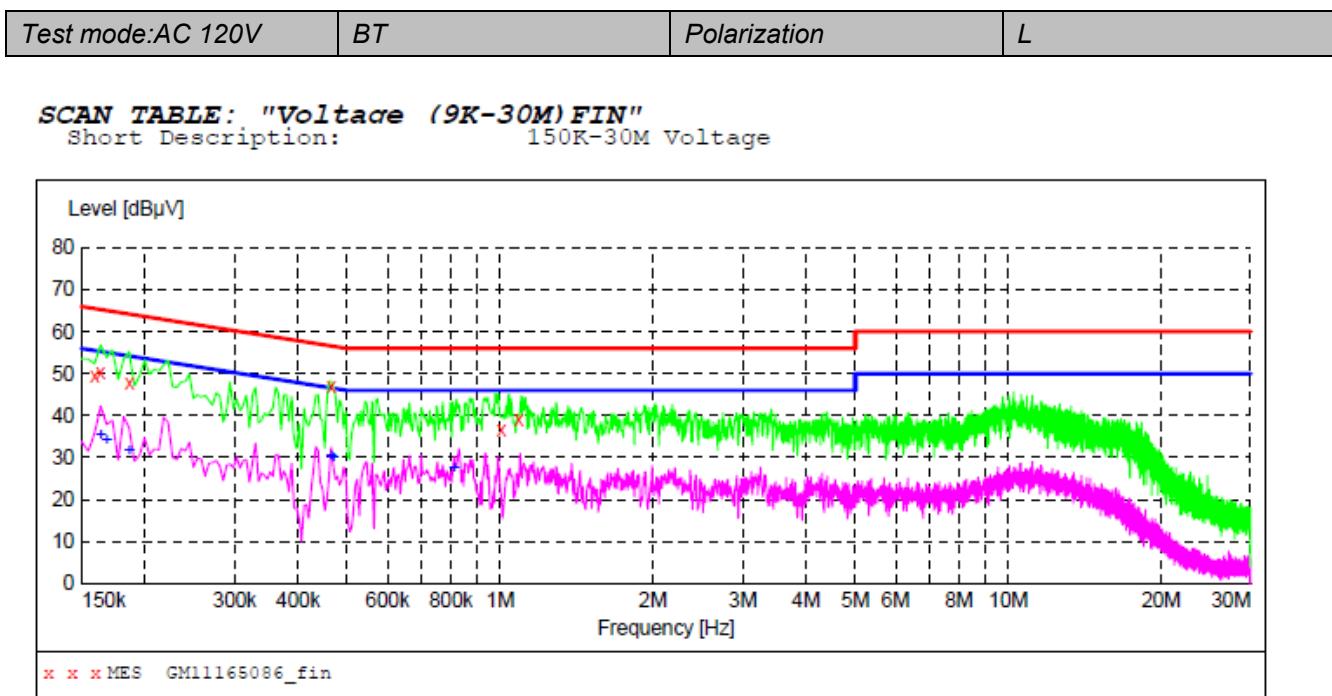

MEASUREMENT RESULT: "GM11165086_fin"

11/17/2015 5:06PM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.159000	49.40	10.2	66	16.1	QP	L1	GND
0.163500	50.20	10.2	65	15.1	QP	L1	GND
0.186000	47.80	10.2	64	16.4	QP	L1	GND
0.465000	46.80	10.2	57	9.8	QP	L1	GND
1.005000	36.40	10.2	56	19.6	QP	L1	GND
1.086000	39.00	10.2	56	17.0	QP	L1	GND


MEASUREMENT RESULT: "GM11165086_fin2"

11/17/2015 5:06PM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.163500	35.50	10.2	55	19.8	AV	L1	GND
0.168000	34.30	10.2	55	20.8	AV	L1	GND
0.186000	31.70	10.2	54	22.5	AV	L1	GND
0.465000	30.50	10.2	47	16.1	AV	L1	GND
0.469500	30.10	10.2	47	16.4	AV	L1	GND
0.811500	27.30	10.2	46	18.7	AV	L1	GND

Test mode: AC 120V	BT	Polarization	N
--------------------	----	--------------	---

SCAN TABLE: "Voltage (9K-30M) FIN"
 Short Description: 150K-30M Voltage

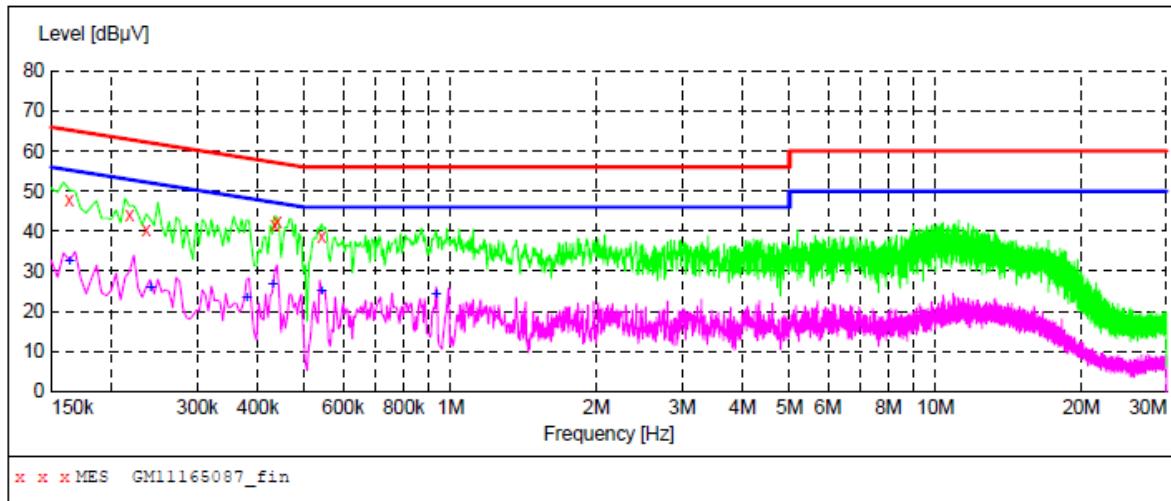

MEASUREMENT RESULT: "GM11165087_fin"

11/17/2015 5:09PM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.163500	47.70	10.2	65	17.6	QP	N	GND
0.217500	44.00	10.2	63	18.9	QP	N	GND
0.235500	40.30	10.2	62	22.0	QP	N	GND
0.433500	41.60	10.2	57	15.6	QP	N	GND
0.438000	42.50	10.2	57	14.6	QP	N	GND
0.541500	38.70	10.2	56	17.3	QP	N	GND


MEASUREMENT RESULT: "GM11165087_fin2"

11/17/2015 5:09PM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.163500	32.60	10.2	55	22.7	AV	N	GND
0.240000	25.90	10.2	52	26.2	AV	N	GND
0.379500	23.40	10.2	48	24.9	AV	N	GND
0.429000	26.50	10.2	47	20.8	AV	N	GND
0.541500	25.00	10.2	46	21.0	AV	N	GND
0.933000	24.00	10.2	46	22.0	AV	N	GND

Test mode:AC 240V	BT	Polarization	L
-------------------	----	--------------	---

SCAN TABLE: "Voltage (9K-30M) FIN"
 Short Description: 150K-30M Voltage

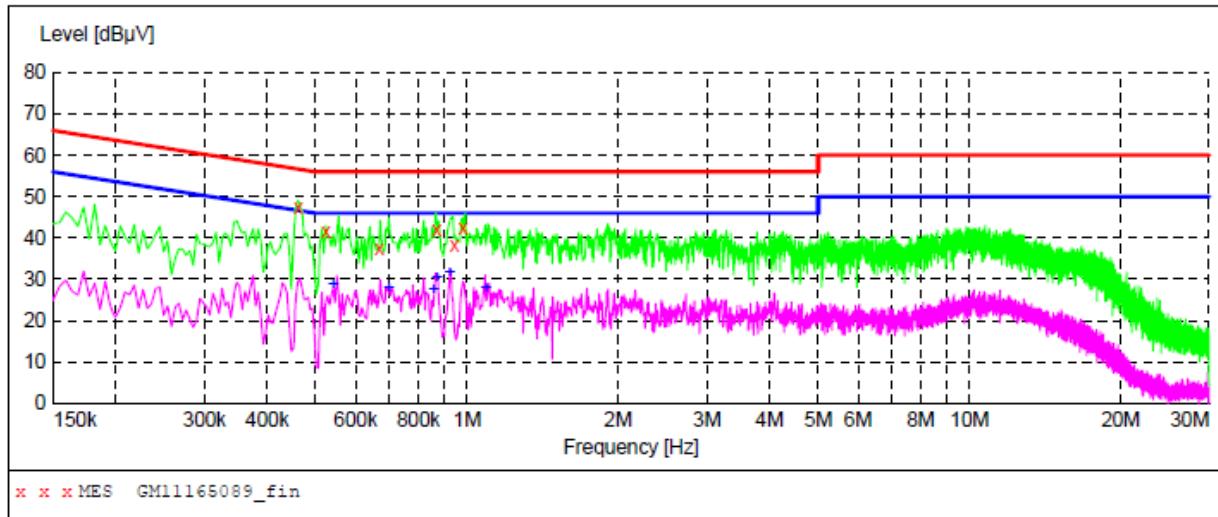

MEASUREMENT RESULT: "GM11165089_fin"


11/17/2015 5:15PM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.460500	47.50	10.2	57	9.2	QP	L1	GND
0.523500	41.50	10.2	56	14.5	QP	L1	GND
0.667500	37.60	10.2	56	18.4	QP	L1	GND
0.870000	42.10	10.2	56	13.9	QP	L1	GND
0.942000	38.20	10.2	56	17.8	QP	L1	GND
0.982500	42.30	10.2	56	13.7	QP	L1	GND

MEASUREMENT RESULT: "GM11165089_fin2"

11/17/2015 5:15PM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.541500	28.60	10.2	46	17.4	AV	L1	GND
0.699000	27.90	10.2	46	18.1	AV	L1	GND
0.856500	27.40	10.2	46	18.6	AV	L1	GND
0.870000	30.20	10.2	46	15.8	AV	L1	GND
0.924000	31.50	10.2	46	14.5	AV	L1	GND
1.090500	27.90	10.2	46	18.1	AV	L1	GND

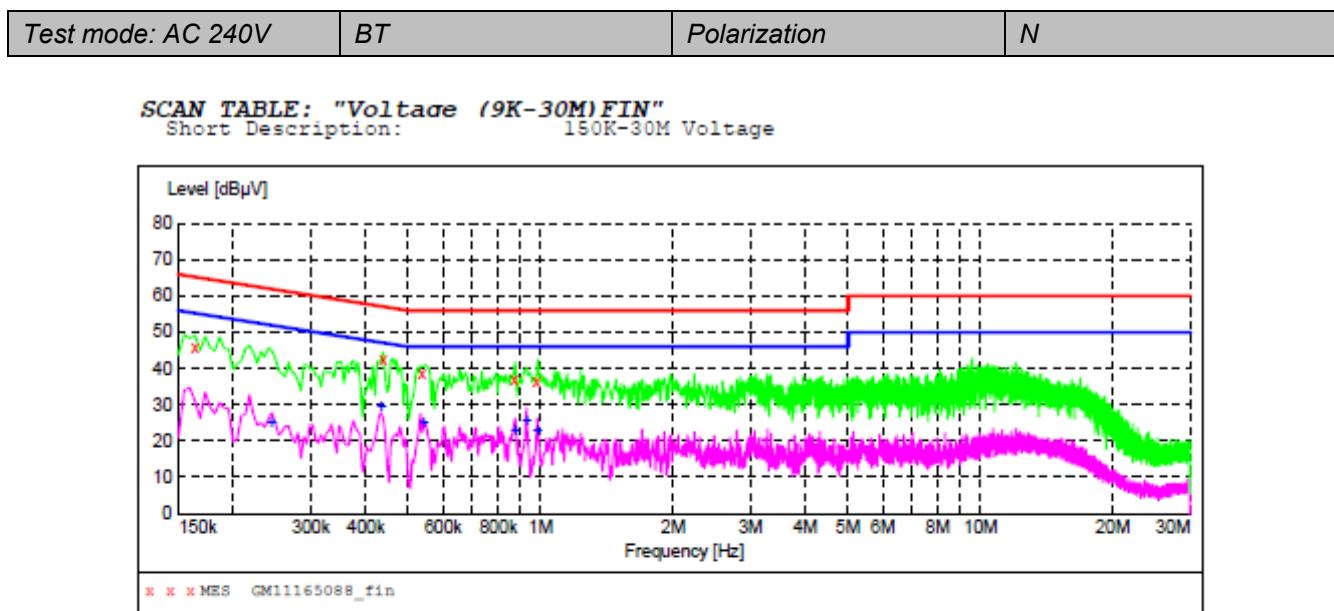**MEASUREMENT RESULT: "GM11165088_fin"**

11/17/2015 5:12PM	Frequency	Level	Transd	Limit	Margin	Detector	Line	PE
	MHz	dB μ V	dB	dB μ V	dB			
	0.163500	45.80	10.2	65	19.5	QP	N	GND
	0.438000	42.40	10.2	57	14.7	QP	N	GND
	0.537000	38.60	10.2	56	17.4	QP	N	GND
	0.870000	37.10	10.2	56	18.9	QP	N	GND
	0.978000	36.50	10.2	56	19.5	QP	N	GND

MEASUREMENT RESULT: "GM11165088_fin2"


11/17/2015 5:12PM	Frequency	Level	Transd	Limit	Margin	Detector	Line	PE
	MHz	dB μ V	dB	dB μ V	dB			
	0.244500	25.20	10.2	52	26.7	AV	N	GND
	0.433500	30.00	10.2	47	17.2	AV	N	GND
	0.541500	25.30	10.2	46	20.7	AV	N	GND
	0.874500	23.20	10.2	46	22.8	AV	N	GND
	0.928500	26.20	10.2	46	19.8	AV	N	GND
	0.982500	23.10	10.2	46	22.9	AV	N	GND

4.3. Conducted Peak Output Power

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(3): **30dBm**

TEST CONFIGURATION

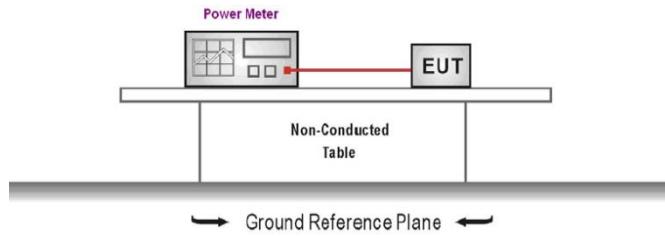

TEST PROCEDURE

1. The EUT was tested according to KDB 558074 D01 V03R02 for compliance to FCC 47CFR 15.247 requirements.
2. The maximum peak conducted output power may be measured using a broadband peak RF power meter.
3. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector
4. Record the measurement data.

TEST RESULTS

Type	Channel	Output power (dBm)	Limit (dBm)	Result
BT-BLE	00	-5.44	30.00	Pass
	19	-5.93		
	39	-6.97		


4.4. Power Spectral Density

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (e): **8dBm/3KHz**

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST CONFIGURATION

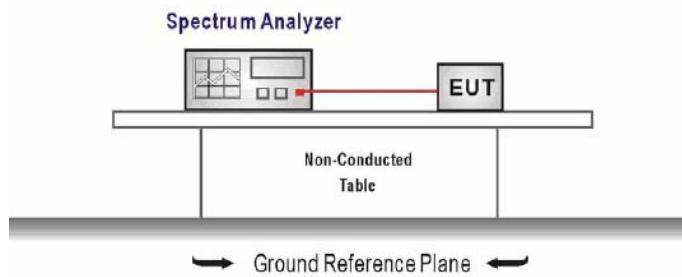


TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input,
2. Configure the spectrum analyzer as shown below:
 $\text{Center frequency} = \text{DTS channel center frequency}$
 $\text{Span} = 1.5 \text{ times the DTS bandwidth}$
 $\text{RBW} = 3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}, \text{VBW} \geq 3 \times \text{RBW}$
 $\text{Sweep time} = \text{auto couple}$
 $\text{Detector} = \text{peak}$
 $\text{Trace mode} = \text{max hold}$
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.
4. Use the peak marker function to determine the maximum amplitude level within the RBW.
5. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

TEST RESULTS

Type	Channel	Power Spectral Density(dBm/3KHz)	Limit (dBm/3KHz)	Result
BT-BLE	00	-21.15	8.00	Pass
	19	-21.65		
	38	-22.64		

Test plot as follows:

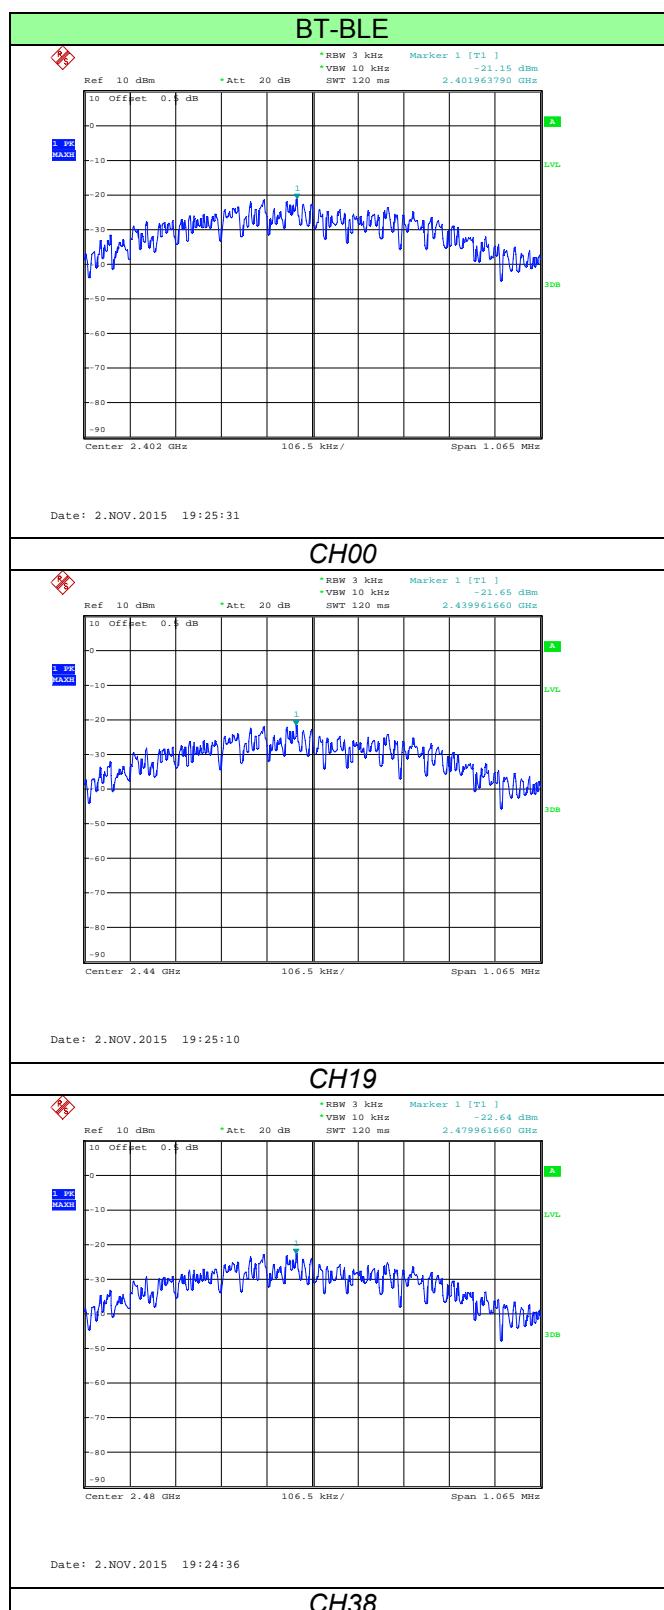


4.5. 6dB bandwidth

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(2): **at least 500KHz**

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

TEST CONFIGURATION

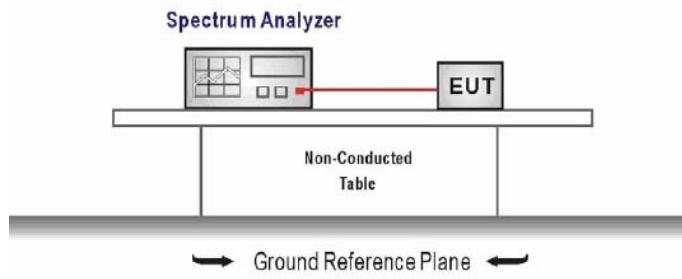

TEST PROCEDURE


1. Connect the antenna port(s) to the spectrum analyzer input.
2. Configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).

Center Frequency = DTS channel center frequency
Span=2 x DTS bandwidth
RBW = 100 kHz, VBW $\geq 3 \times RBW$
Sweep time= auto couple
Detector = Peak
Trace mode = max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission, and record the pertinent measurements.

TEST RESULTS

Type	Channel	6dB Bandwidth(3KHz)	Limit (KHz)	Result
BT-BLE	00	710.00	≥ 500	Pass
	19	700.00		
	38	710.00		

Test plot as follows:

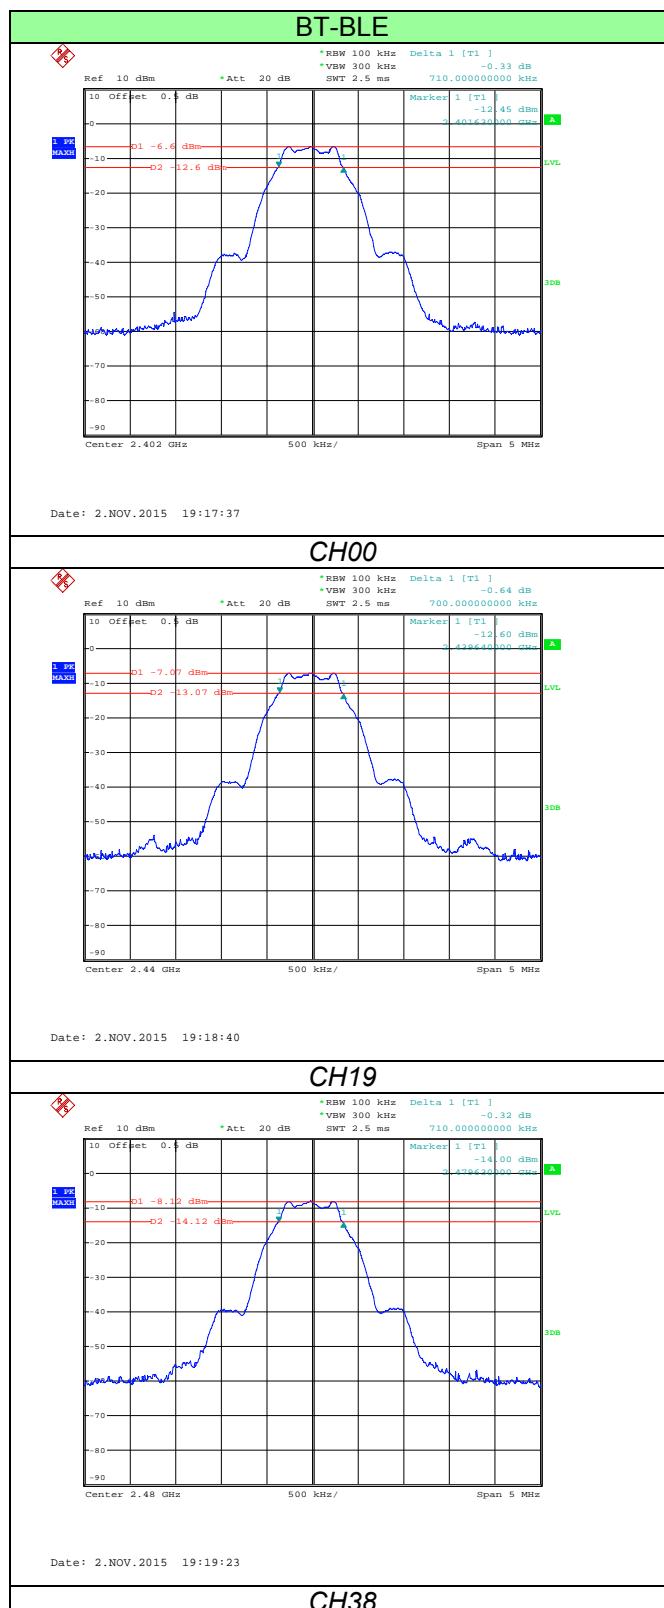


4.6. Restricted band (Conducted)

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

TEST CONFIGURATION

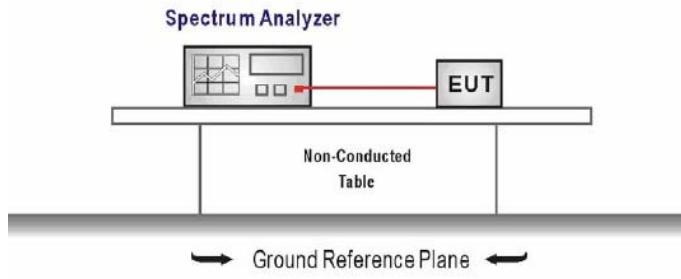

TEST PROCEDURE

1. According to KDB 558074 D01 V03R02 for Antenna-port conducted measurement. Antenna-port conducted measurements may also be used as an alternative to radiated measurements for demonstrating compliance in the restricted frequency bands.
 - 1) Measure the conducted output power (in dBm) using the Peak /averagedetector
 - 2) Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level
 - 3) Add the appropriate maximum ground reflection factor to the EIRP level
 - 6 dB for frequencies \leq 30 MHz
 - 4.7 dB for frequencies between 30 MHz and 1000 MHz
 - 0 dB for frequencies $>$ 1000 MHz
 - 4) For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms
 - 5) Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:

$$E = EIRP - 20\log D + 104.8$$

where:
 E = electric field strength in $\text{dB}\mu\text{V/m}$,
 $EIRP$ = equivalent isotropic radiated power in dBm
 D = specified measurement distance in meters.
 - 6) Compare the resultant electric field strength level to the applicable limit
2. **Peak power measurement procedure**
 Peak emission levels are measured by setting the instrument as follows
 RBW = 1MHz, VBW \geq 3 x RBW
 Detector = Peak, Sweep time = auto
 Trace mode = max hold
 Allow sweeps to continue until the trace stabilizes.

If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement


3. **Average power measurement procedure**

Duty cycle <98 percent, but the duty cycle is not constant

- a) RBW = 1 MHz, VBW \geq 1/T.
- b) Video bandwidth mode or display mode
 - 1) The instrument shall be set to ensure that video filtering is applied in the power domain. Typically, this requires setting the detector mode to RMS and setting the Average-VBW Type to Power (RMS).
 - 2) As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode.

- c) Detector = Peak, Sweep time = auto.
- d) Trace mode = max hold.
- e) Allow max hold to run for at least 50 times (1/duty cycle) traces.

TEST RESULTS

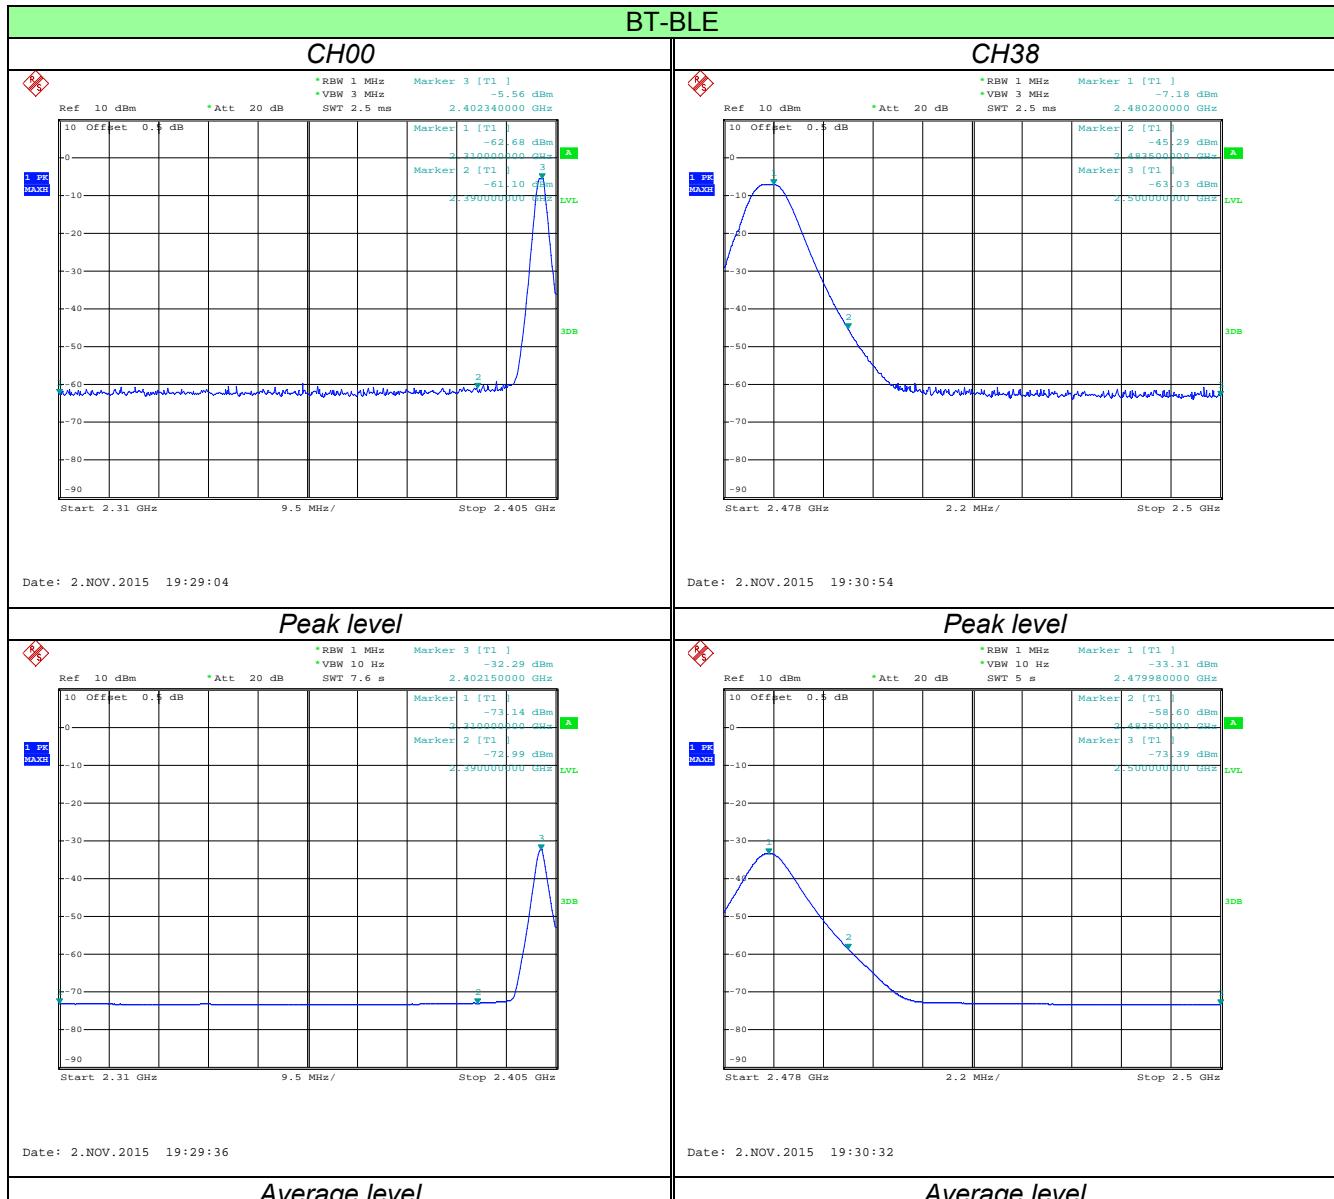

Frequency (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	Ground Reflection Factor (dB)	Covert Radiated E Level at 3m (dBuV/m)	Limit (dBuV/m)	Result	Test Value
2310.00	-62.68	3.00	0.00	35.58	74.00	Pass	Peak
2390.00	-61.10	3.00	0.00	37.16	74.00	Pass	
2483.50	-45.29	3.00	0.00	52.97	74.00	Pass	
2500.00	-63.03	3.00	0.00	35.23	74.00	Pass	
2310.00	-73.14	3.00	0.00	25.12	54.00	Pass	Average
2390.00	-72.99	3.00	0.00	25.27	54.00	Pass	
2483.50	-58.68	3.00	0.00	39.58	54.00	Pass	
2500.00	-73.39	3.00	0.00	24.87	54.00	Pass	

Note:

EIRP=Conducted Power + Antenna Gain + Ground Reflection factor

E = EIRP – 20log D + 104.8


4.7. Band edge and Spurious Emission (conducted)

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

TEST CONFIGURATION

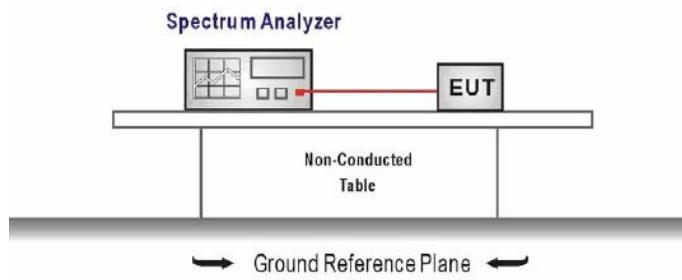

TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Establish a reference level by using the following procedure

Center frequency=DTS channel center frequency

The span = 1.5 times the DTS bandwidth.

RBW = 100 kHz, VBW \geq 3 x RBW

Detector = peak, Sweep time = auto couple, Trace mode = max hold

Allow trace to fully stabilize

Use the peak marker function to determine the maximum PSD level

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

3. Emission level measurement

Set the center frequency and span to encompass frequency range to be measured

RBW = 100 kHz, VBW \geq 3 x RBW

Detector = peak, Sweep time = auto couple, Trace mode = max hold


Allow trace to fully stabilize





Use the peak marker function to determine the maximum amplitude level.


4. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.
5. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band excluding restricted frequency bands) are attenuated by at least the minimum requirements specified (at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz). Report the three highest emissions relative to the limit.

TEST RESULTS

Test plot as follows:

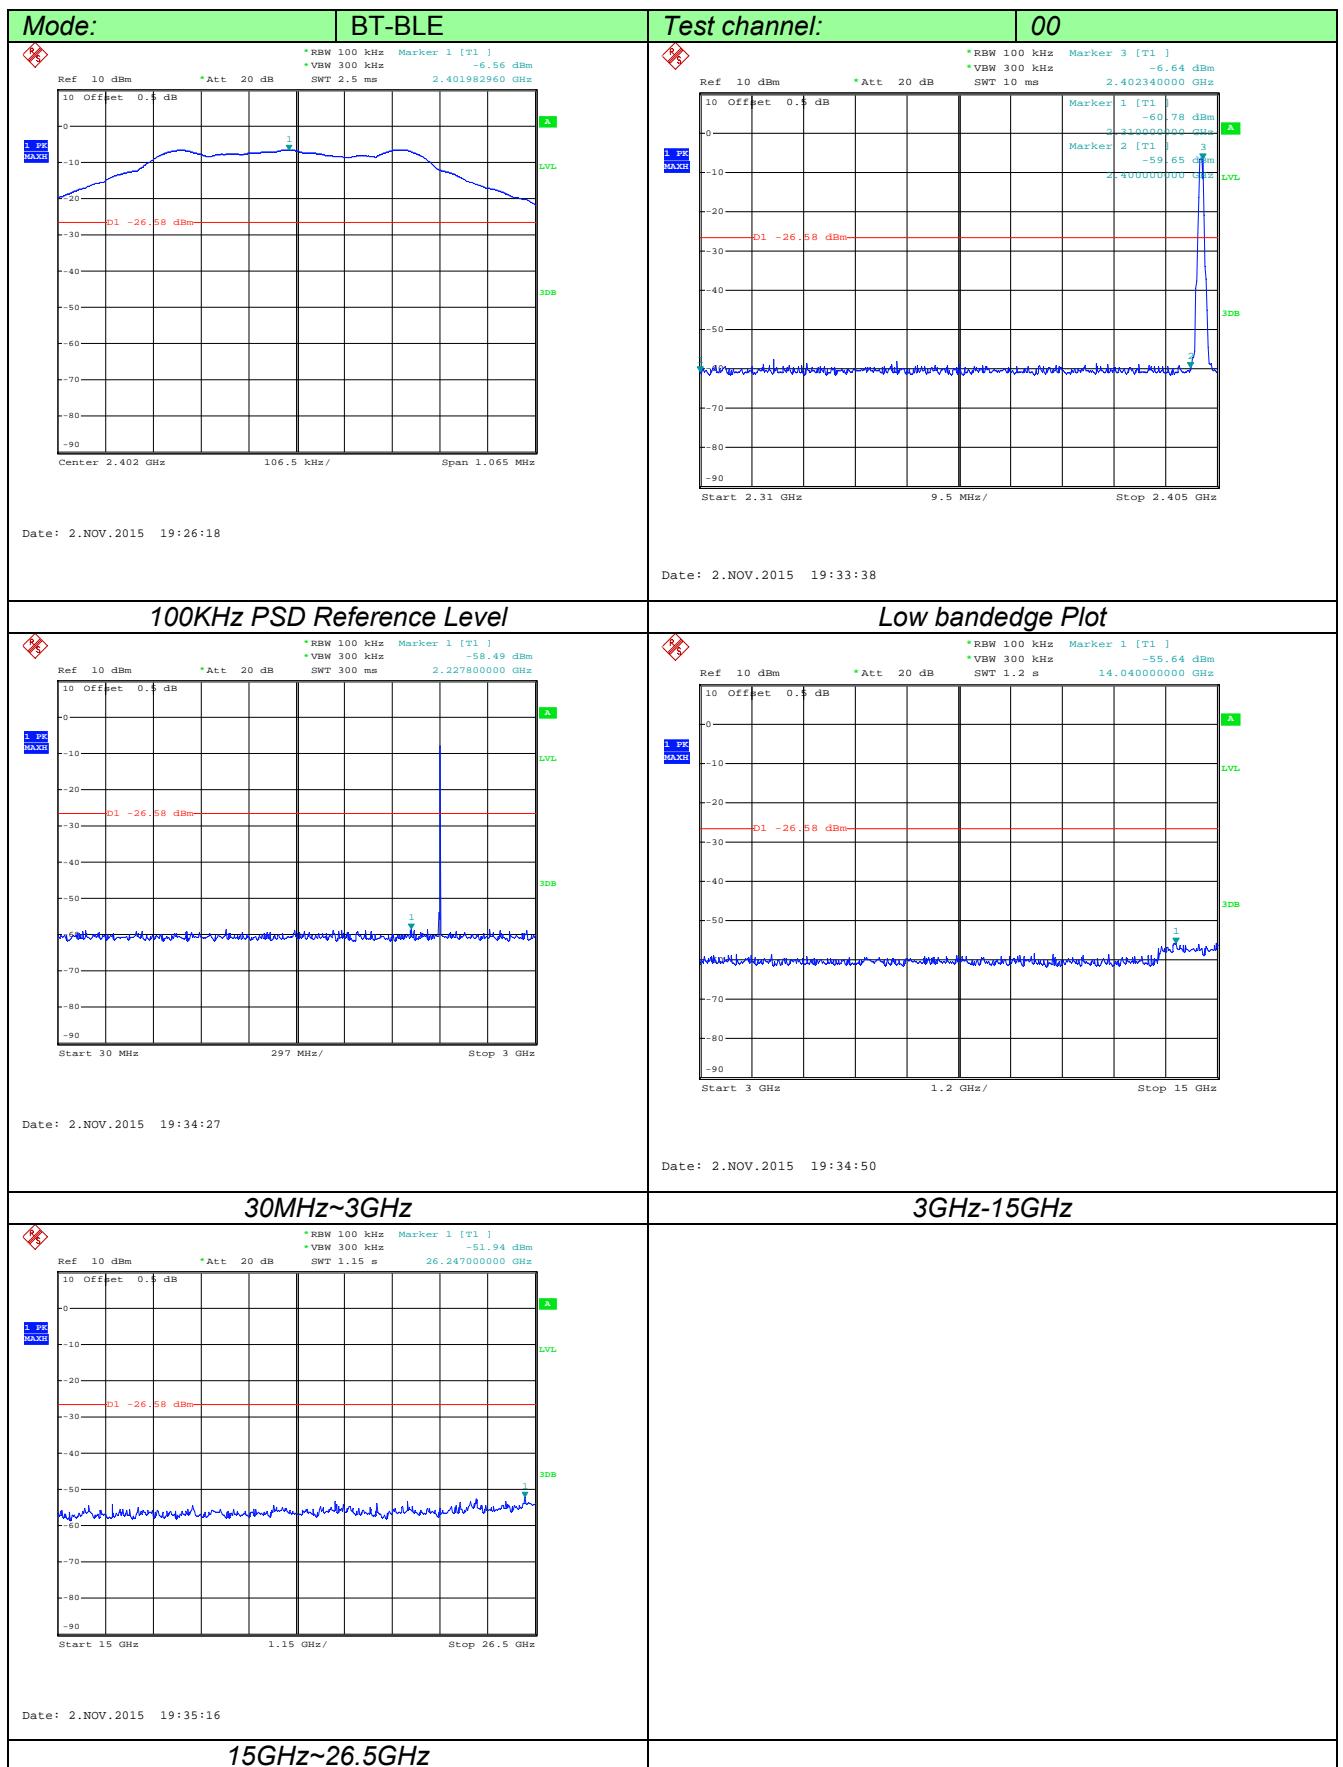

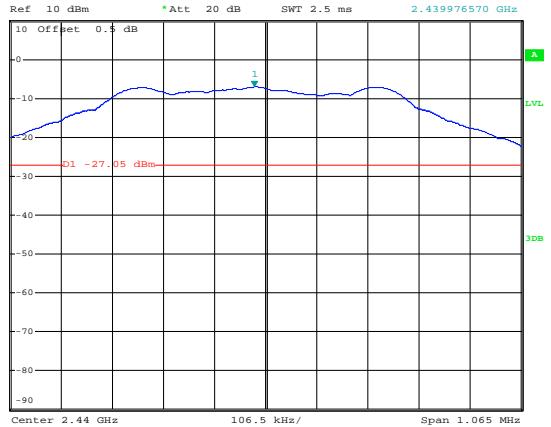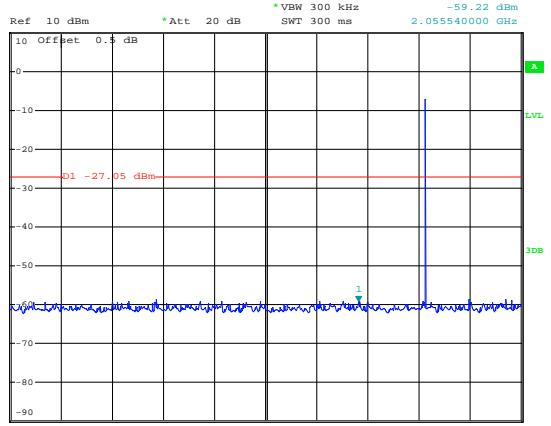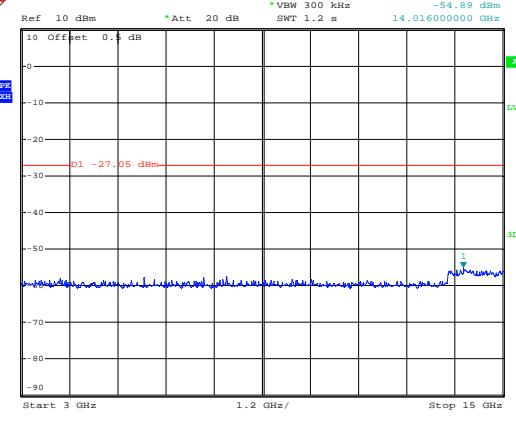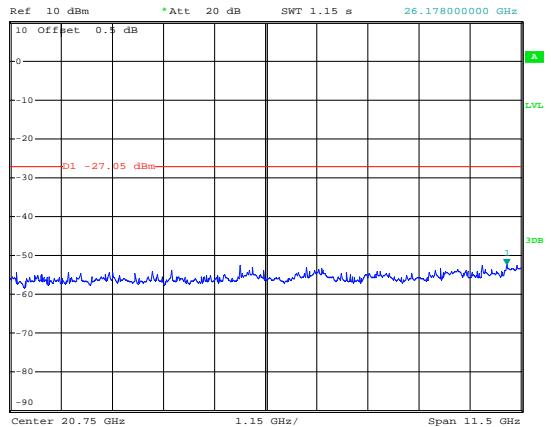Mode:	BT-BLE	Test channel:	19
	 <p>Ref 10 dBm *Att 20 dB *RBW 100 kHz Marker 1 [T1] -7.05 dBm *VBW 300 kHz SWT 2.5 ms 2.439976570 GHz</p> <p>10 Offset 0.5 dB 106.5 kHz/ 3dB</p> <p>Center 2.44 GHz Span 1.065 MHz</p>		
	Date: 2.NOV.2015 19:27:07		
	100KHz PSD Reference Level		
	 <p>Ref 10 dBm *Att 20 dB *RBW 100 kHz Marker 1 [T1] -59.22 dBm *VBW 300 kHz SWT 300 ms 2.055540000 GHz</p> <p>10 Offset 0.5 dB 300 ms 3dB</p> <p>Start 30 MHz Stop 3 GHz</p>	 <p>Ref 10 dBm *Att 20 dB *RBW 100 kHz Marker 1 [T1] -54.89 dBm *VBW 300 kHz SWT 1.2 s 14.016000000 GHz</p> <p>10 Offset 0.5 dB 1.2 s 3dB</p> <p>Start 3 GHz Stop 15 GHz</p>	
	Date: 2.NOV.2015 19:37:11		
	30MHz~3GHz		3GHz~15GHz
	 <p>Ref 10 dBm *Att 20 dB *RBW 100 kHz Marker 1 [T1] -52.39 dBm *VBW 300 kHz SWT 1.15 s 26.178000000 GHz</p> <p>10 Offset 0.5 dB 1.15 s 3dB</p> <p>Center 20.75 GHz Span 11.5 GHz</p>		
	Date: 2.NOV.2015 19:35:57		
	15GHz~26.5GHz		

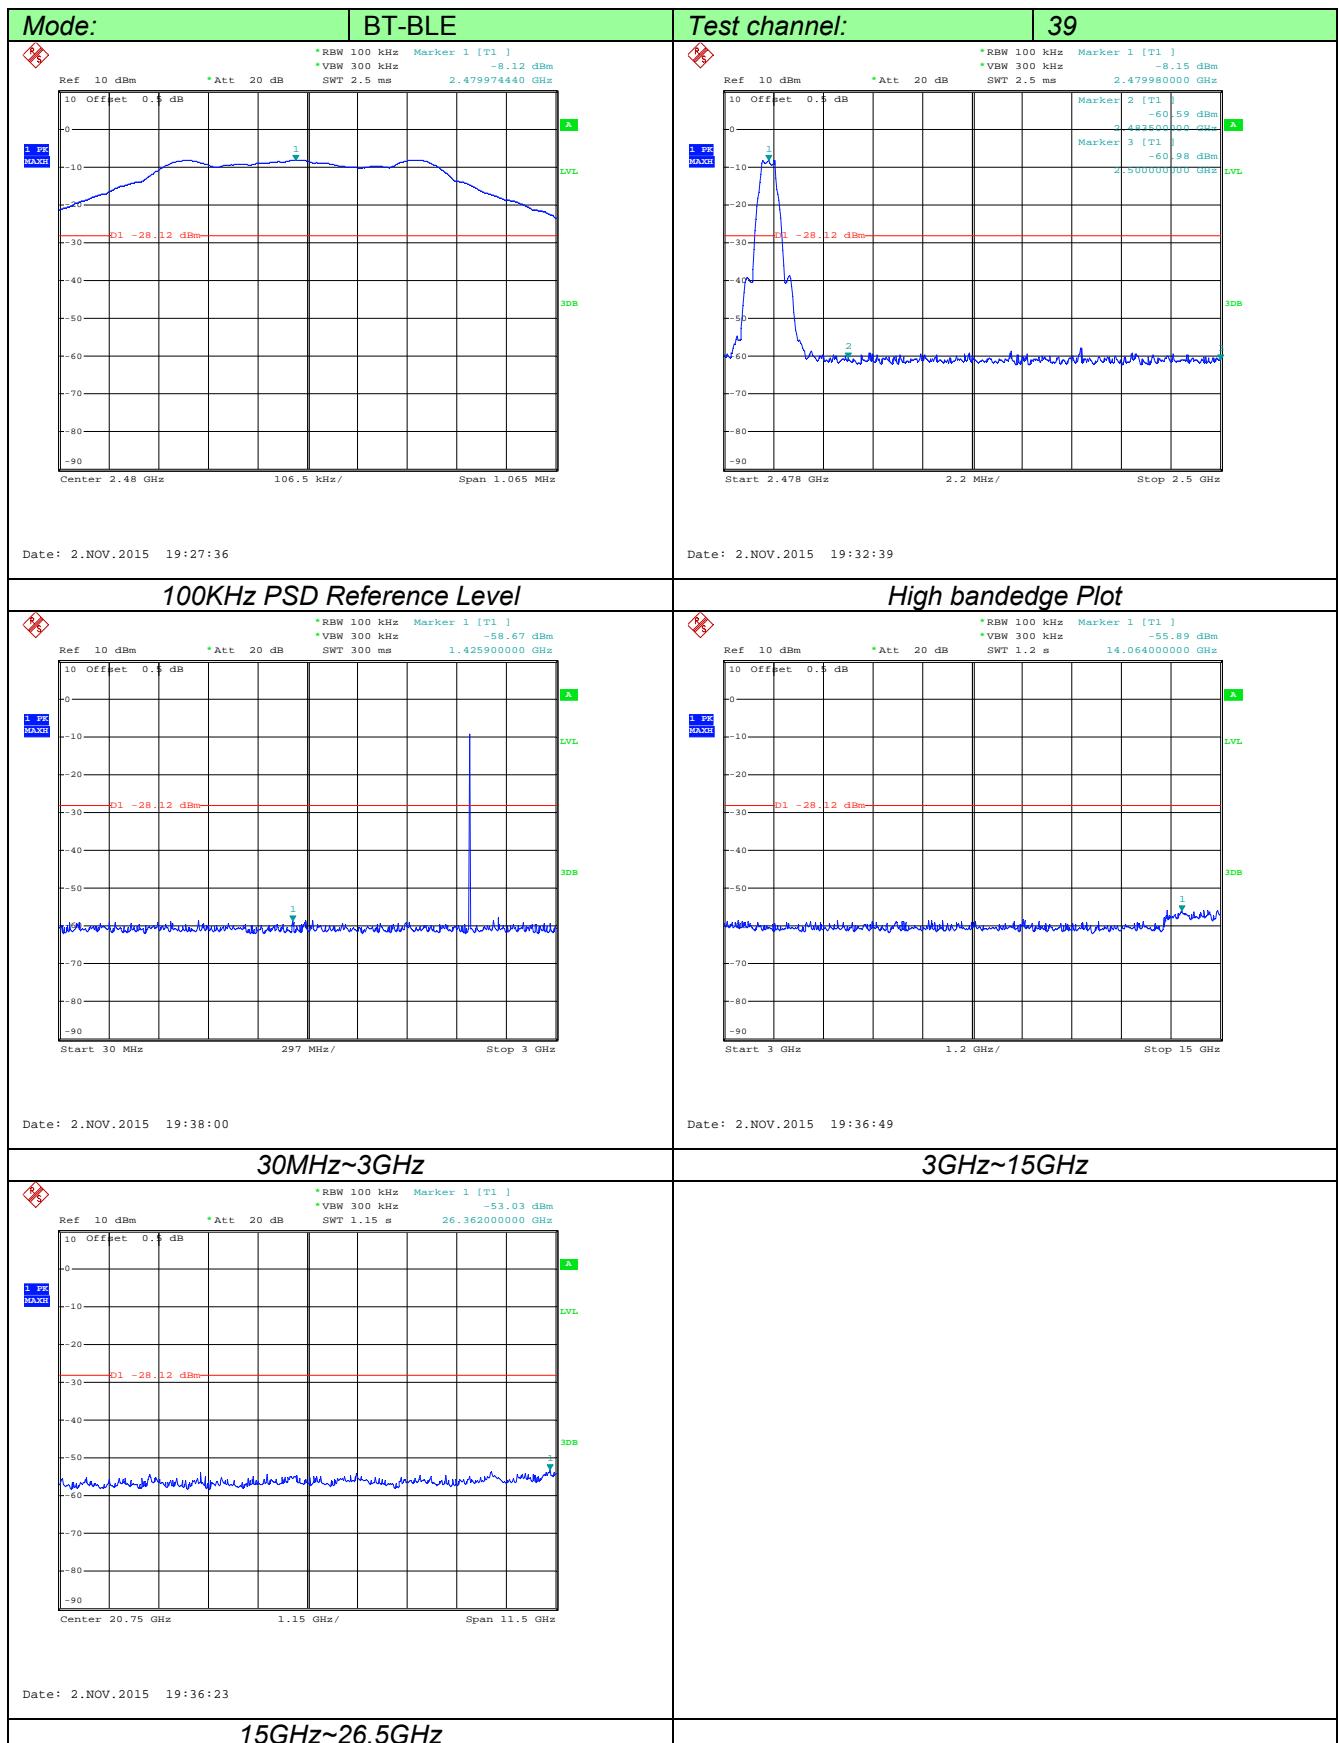

4.8. Spurious Emission (radiated)


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.209


Frequency	Limit (dB _{UV} /m @3m)	Value
30MHz-88MHz	40.00	Quasi-peak
88MHz-216MHz	43.50	Quasi-peak
216MHz-960MHz	46.00	Quasi-peak
960MHz-1GHz	54.00	Quasi-peak
Above 1GHz	54.00	Average
	74.00	Peak

TEST CONFIGURATION


- 9KHz ~30MHz

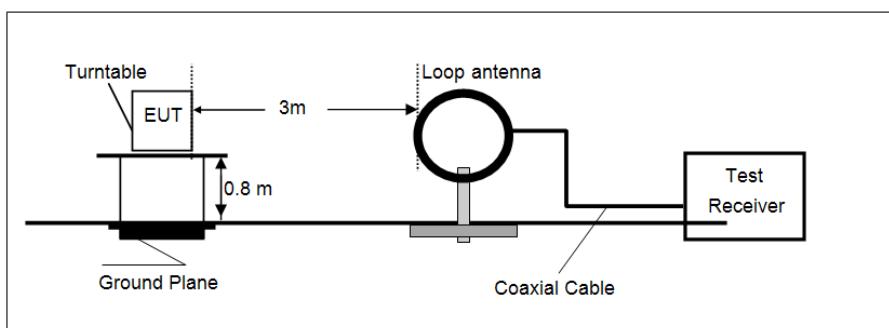

- 30MHz ~ 1GHz

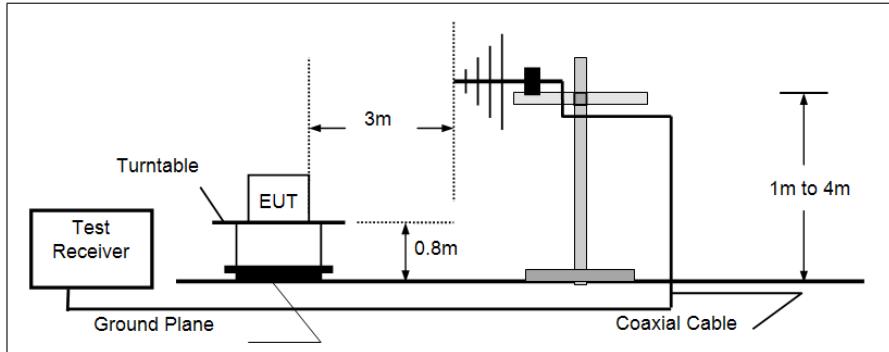

- Above 1GHz

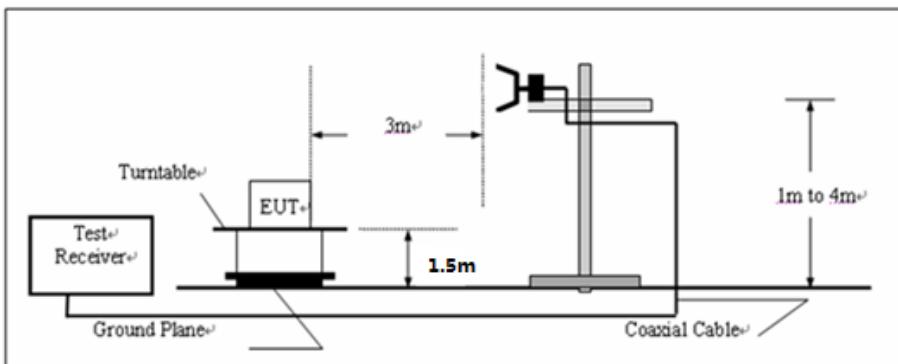

TEST PROCEDURE

1. The EUT was setup and tested according to ANSI C63.10:2013 for compliance to FCC 47CFR 15.247 requirements.
2. The EUT is placed on a turn table which is 0.8 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
5. Use the following spectrum analyzer settings
 - (1) Span shall be wide enough to fully capture the emission being measured;
 - (2) Below 1GHz, RBW=120KHz, VBW=300KHz, Sweep=auto, Detector function=peak, Trace=max hold;
If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
 - (3) Above 1GHz, RBW=1MHz, VBW=3MHz for Peak value
RBW=1MHz, VBW=10Hz for Average value.


TEST RESULTS**Measurement data:****■ 9kHz ~ 30MHz**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

■ 30MHz ~ 1GHz

SWEET TABLE: "test (30M-1G)"

		Field Strength			
Start Frequency	Stop Frequency	Detector	Meas.	IF	Transducer
30.0 MHz	1.2 GHz	MaxPeak	Coupled	100 kHz	VULB9163 2014

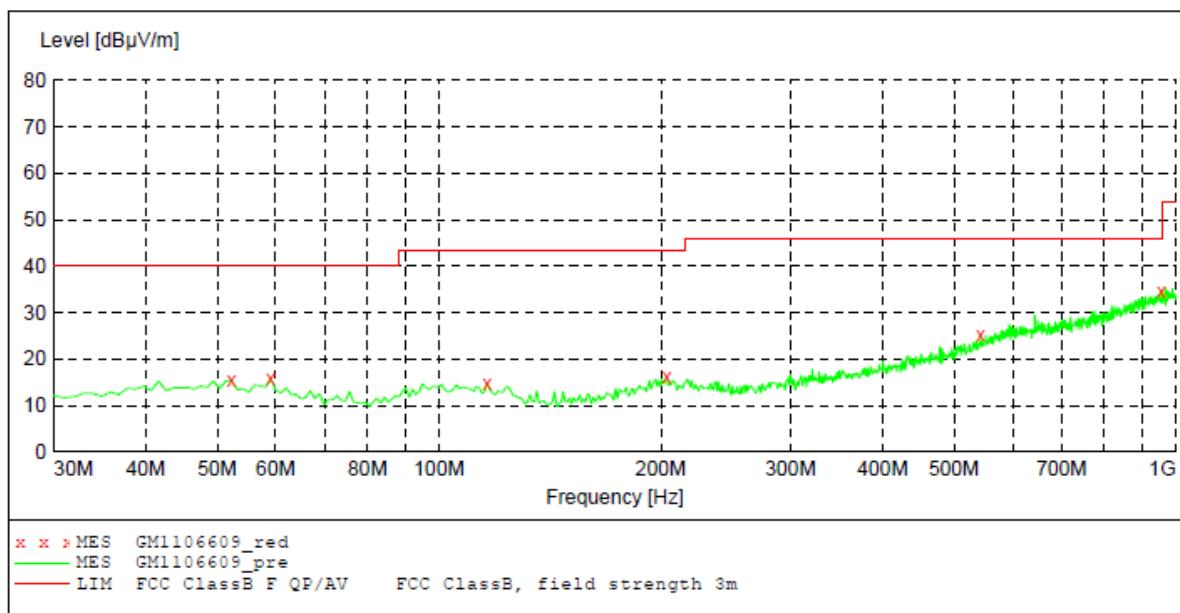
***MEASUREMENT RESULT: "GM1106609_red"***

11/6/2015 9:49AM

Frequency MHz	Level dB μ V/m	Transd dB	Limit dB μ V/m	Margin dB	Det. QP	Height cm	Azimuth deg	Polarization
52.310000	15.40	-14.4	40.0	24.6	QP	100.0	131.00	HORIZONTAL
59.100000	15.90	-14.8	40.0	24.1	QP	100.0	360.00	HORIZONTAL
116.330000	14.80	-15.6	43.5	28.7	QP	100.0	253.00	HORIZONTAL
203.630000	16.20	-13.7	43.5	27.3	QP	100.0	114.00	HORIZONTAL
543.130000	25.10	-5.2	46.0	20.9	QP	300.0	179.00	HORIZONTAL
955.380000	34.50	3.8	46.0	11.5	QP	300.0	144.00	HORIZONTAL

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength		
Start Frequency	Stop Frequency	Detector	Meas.	IF
30.0 MHz	1.2 GHz	MaxPeak	Coupled	100 kHz
				Transducer
				VULB9163 2014

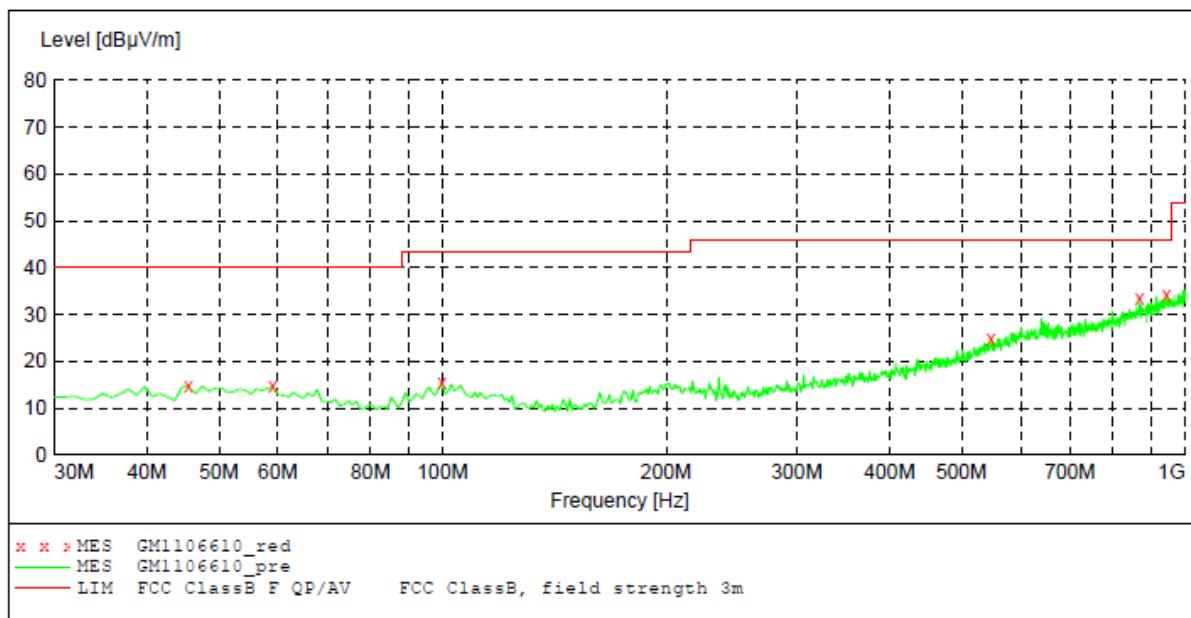***MEASUREMENT RESULT: "GM1106610_red"***

11/6/2015 9:53AM

Frequency MHz	Level dB μ V/m	Transd dB	Limit dB μ V/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
45.520000	14.80	-14.7	40.0	25.2	QP	100.0	165.00	VERTICAL
59.100000	14.60	-14.8	40.0	25.4	QP	100.0	360.00	VERTICAL
99.840000	15.30	-14.3	43.5	28.2	QP	100.0	253.00	VERTICAL
547.980000	24.90	-4.9	46.0	21.1	QP	100.0	92.00	VERTICAL
869.050000	33.40	2.0	46.0	12.6	QP	100.0	234.00	VERTICAL
943.740000	34.10	3.6	46.0	11.9	QP	100.0	234.00	VERTICAL

■ Above 1GHz

CH00 for BT-BLE									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
4804	38.33	31.28	5.66	35.29	39.98	74	-34.02	Vertical	Peak
7206	35.71	36.22	6.87	35.15	43.65	74	-30.35	Vertical	
9608	37.26	37.85	8.8	35.55	48.36	74	-25.64	Vertical	
12010	*							Vertical	
4804	39	31.28	5.66	35.29	40.65	74	-33.35	Horizontal	
7206	36.82	36.22	6.87	35.15	44.76	74	-29.24	Horizontal	
9608	38.76	37.85	8.8	35.55	49.86	74	-24.14	Horizontal	
12010	*							Horizontal	
4804	32.87	31.28	5.66	35.29	34.52	54	-19.48	Vertical	Average
7206	28.93	36.22	6.87	35.15	36.87	54	-17.13	Vertical	
9608	28.77	37.85	8.8	35.55	39.87	54	-14.13	Vertical	
12010	*							Vertical	
4804	33	31.28	5.66	35.29	34.65	54	-19.35	Horizontal	
7206	29.91	36.22	6.87	35.15	37.85	54	-16.15	Horizontal	
9608	28.75	37.85	8.8	35.55	39.85	54	-14.15	Horizontal	
12010	*							Horizontal	

CH19 for BT-BLE									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
4882	38.61	31.26	5.65	35.27	40.25	74	-33.75	Vertical	Peak
7323	35.75	36.2	6.86	35.13	43.68	74	-30.32	Vertical	
9764	37.65	37.83	8.79	35.53	48.74	74	-25.26	Vertical	
12205	*							Vertical	
4882	39.22	31.26	5.65	35.27	40.86	74	-33.14	Horizontal	
7323	36.72	36.2	6.86	35.13	44.65	74	-29.35	Horizontal	
9764	37.96	37.83	8.79	35.53	49.05	74	-24.95	Horizontal	
12205	*							Horizontal	
4882	32.72	31.26	5.65	35.27	34.36	54	-19.64	Vertical	Average
7323	28.92	36.2	6.86	35.13	36.85	54	-17.15	Vertical	
9764	28.77	37.83	8.79	35.53	39.86	54	-14.14	Vertical	
12205	*							Vertical	
4882	33.01	31.26	5.65	35.27	34.65	54	-19.35	Horizontal	
7323	29.93	36.2	6.86	35.13	37.86	54	-16.14	Horizontal	
9764	28.29	37.83	8.79	35.53	39.38	54	-14.62	Horizontal	
12205	*							Horizontal	

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- “*”, means this data is the too weak instrument of signal is unable to test.
- The emission levels of other frequencies are very lower than the limit and not show in test report.



CH39 for BT-BLE									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
4960	38	31.44	5.87	35.46	39.85	74	-34.15	Vertical	Peak
7440	35.92	36.38	7.08	35.32	44.06	74	-29.94	Vertical	
9920	37.44	38.01	9.01	35.72	48.74	74	-25.26	Vertical	
12400	*							Vertical	
4960	38.67	31.44	5.87	35.46	40.52	74	-33.48	Horizontal	
7440	36.94	36.38	7.08	35.32	45.08	74	-28.92	Horizontal	
9920	38.46	38.01	9.01	35.72	49.76	74	-24.24	Horizontal	
12400	*							Horizontal	
4960	32.8	31.42	5.87	35.46	34.63	54	-19.37	Vertical	Average
7440	29.22	36.36	7.08	35.32	37.34	54	-16.66	Vertical	
9920	28.57	37.99	9.01	35.72	39.85	54	-14.15	Vertical	
12400	*							Vertical	
4960	32.8	31.42	5.87	35.46	34.63	54	-19.37	Horizontal	
7440	29.74	36.36	7.08	35.32	37.86	54	-16.14	Horizontal	
9920	28.97	37.99	9.01	35.72	40.25	54	-13.75	Horizontal	
12400	*							Horizontal	

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*”, means this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.

5. Test Setup Photos of the EUT

Radiated Emission

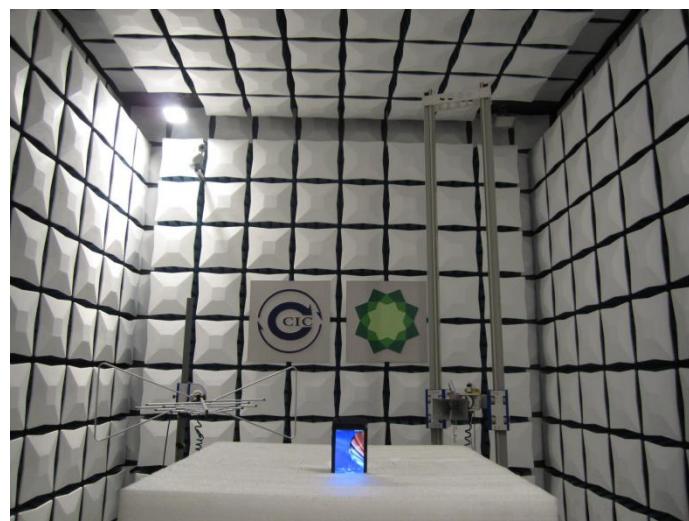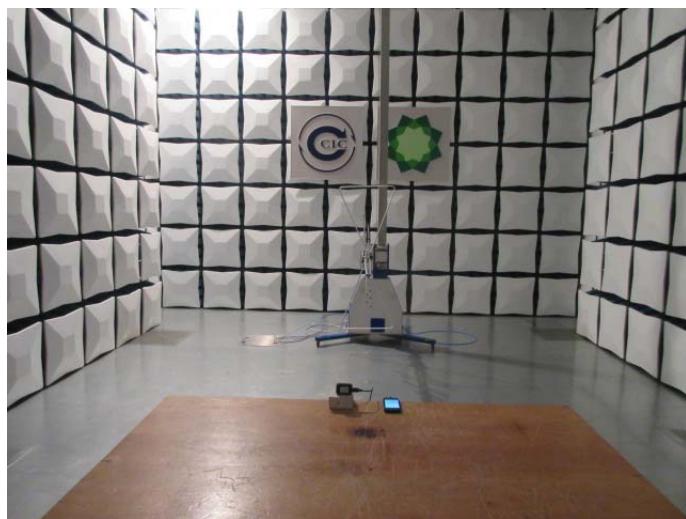

Conducted Emission (AC Mains)



6. External and Internal Photos of the EUT

Reference to Test Report TRE1510017501

.....End of Report.....