

RF TEST REPORT



Report No.: 15070860-FCC-R2

Supersede Report No.: N/A

Applicant	Verykool USA Inc	
Product Name	Mobile Phone	
Model No.	s5020	
Serial No.	N/A	
Test Standard	FCC Part 15.247: 2014, ANSI C63.10: 2013	
Test Date	September 24 to October 10, 2015	
Issue Date	October 15, 2015	
Test Result	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
Equipment complied with the specification	<input checked="" type="checkbox"/>	
Equipment did not comply with the specification	<input type="checkbox"/>	
Winnie. Zhang	David Huang	
Winnie Zhang Test Engineer	David Huang Checked By	
This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only		

Issued by:

SIEMIC (SHENZHEN-CHINA) LABORATORIES

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park

South Side of Zhoushi Road, Bao'an District, Shenzhen, Guangdong China 518108

Phone: +86 0755 2601 4629801 Email: China@siemic.com.cn

Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

Test Report	15070860-FCC-R2
Page	3 of 59

This page has been left blank intentionally.

CONTENTS

1. REPORT REVISION HISTORY	5
2. CUSTOMER INFORMATION	5
3. TEST SITE INFORMATION.....	5
4. EQUIPMENT UNDER TEST (EUT) INFORMATION	6
5. TEST SUMMARY	8
6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	9
6.1 ANTENNA REQUIREMENT.....	9
6.2 CHANNEL SEPARATION	10
6.3 20DB BANDWIDTH.....	14
6.4 PEAK OUTPUT POWER.....	18
6.5 NUMBER OF HOPPING CHANNEL.....	22
6.6 TIME OF OCCUPANCY (DWELL TIME)	24
6.7 BAND EDGE.....	28
6.8 AC POWER LINE CONDUCTED EMISSIONS.....	36
6.9 RADIATED EMISSIONS.....	42
ANNEX A. TEST INSTRUMENT.....	47
ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS.....	48
ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT.....	54
ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST	58
ANNEX E. DECLARATION OF SIMILARITY	59

1. Report Revision History

Report No.	Report Version	Description	Issue Date
15070860-FCC-R2	NONE	Original	October 15, 2015

2. Customer information

Applicant Name	Verykool USA Inc
Applicant Add	3636 Nobel Drive, Suite 325, San Diego, CA 92122 USA
Manufacturer	HUIZHOU QIAOXING ELECTRONICS TECHNOLOGY CO.,LTD
Manufacturer Add	Room -611, TianAn High-Tech Plaza II , Futian District, Shenzhen, China, 518040

3. Test site information

Lab performing tests	SIEMIC (Shenzhen-China) LABORATORIES
Lab Address	Zone A, Floor 1, Building 2 Wan Ye Long Technology Park South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108
FCC Test Site No.	718246
IC Test Site No.	4842E-1
Test Software	Radiated Emission Program-To Shenzhen v2.0

4. Equipment under Test (EUT) Information

Description of EUT:	Mobile Phone
Main Model:	s5020
Serial Model:	N/A
Date EUT received:	September 23, 2015
Test Date(s):	September 24 to October 10, 2015
Equipment Category :	DSS
Antenna Gain:	GSM850: 2.7dBi PCS1900: 2.5dBi UMTS-FDD Band V: 2.7 dBi UMTS-FDD Band IV: 2.5 dBi UMTS-FDD Band II: 1.97 dBi Bluetooth/BLE/WIFI: 2.9dBi GPS: 1.86dBi
Type of Modulation:	GSM / GPRS: GMSK EGPRS: GMSK UMTS-FDD: QPSK, 16QAM 802.11b/g/n: DSSS, OFDM Bluetooth: GFSK, π /4DQPSK, 8DPSK BLE: GFSK GPS:BPSK
RF Operating Frequency (ies):	GSM850 TX: 824.2 ~ 848.8 MHz; RX: 869.2 ~ 893.8 MHz PCS1900 TX: 1850.2 ~ 1909.8 MHz; RX: 1930.2 ~ 1989.8 MHz UMTS-FDD Band V TX: 826.4 ~ 846.6 MHz; RX: 871.4 ~ 891.6 MHz UMTS-FDD Band IV TX: 1712.4 ~ 1752.6 MHz; RX : 2112.4 ~ 2152.6 MHz UMTS-FDD Band II TX: 1852.4 ~ 1907.6 MHz; RX: 1932.4 ~ 1987.6 MHz WIFI: 802.11b/g/n(20M): 2412-2462 MHz WIFI: 802.11n(40M): 2422-2452 MHz

Test Report	15070860-FCC-R2
Page	7 of 59

Bluetooth& BLE: 2402-2480 MHz
 GPS RX:1575.42 MHz

Max. Output Power: 2.987dBm

GSM 850: 124CH
 PCS1900: 299CH
 UMTS-FDD Band V : 102CH
 UMTS-FDD Band IV: 202CH
 UMTS-FDD Band II : 277CH
 WIFI :802.11b/g/n(20M): 11CH
 WIFI :802.11n(40M): 7CH
 Bluetooth: 79CH
 BLE: 40CH
 GPS:1CH

Port: Power Port, Earphone Port, USB Port

Adapter:
 Model:Q500
 Input: AC 100-240V; 50/60Hz;0.2A
 Output: DC5.0V;1000mA
 Battery:
 Model:Q506
 Spec:DC3.8V,3000mAh,11.4Wh
 Limited charger voltage:4.35V

Trade Name : verykool

GPRS/EGPRS Multi-slot class 8/10/12

FCC ID: WA6S5020

5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.247(a)(1)	Channel Separation	Compliance
§15.247(a)(1)	20 dB Bandwidth	Compliance
§15.247(b)(1)	Peak Output Power	Compliance
§15.247(a)(1)(iii)	Number of Hopping Channel	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(d)	Band Edge	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Radiated Emissions	Compliance

Measurement Uncertainty

Emissions		
Test Item	Description	Uncertainty
Band Edge and Radiated Spurious Emissions	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+5.6dB/-4.5dB
-	-	-

6. Measurements, Examination And Derived Results

6.1 Antenna Requirement

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has 3 antennas:

A permanently attached PIFA antenna for Bluetooth/BLE/WIFI, the gain is 2.9dBi.

A permanently attached PIFA antenna for GSM and UMTS, the gain is 2.7dBi for GSM850, 2.5dBi for PCS1900, 2.7dBi for UMTS-FDD Band V, 2.5dBi for UMTS-FDD Band IV, 1.97dBi for UMTS-FDD Band II.

A permanently attached PIFA antenna for GPS, the gain is 1.86dBi.


The antenna meets up with the ANTENNA REQUIREMENT.

Result: Compliance.

6.2 Channel Separation

Temperature	22°C
Relative Humidity	51%
Atmospheric Pressure	1009mbar
Test date :	October 09, 2015
Tested By :	Winnie Zhang

Requirement(s):

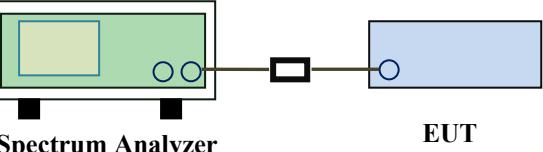Spec	Item	Requirement	Applicable
§ 15.247(a)(1)	a)	Channel Separation < 20dB BW and 20dB BW < 25KHz ; Channel Separation Limit=25KHz Chanel Separation < 20dB BW and 20dB BW > 25kHz ; Channel Separation Limit=2/3 20dB BW	<input checked="" type="checkbox"/>
Test Setup		 <p style="text-align: center;">Spectrum Analyzer EUT</p>	
Test Procedure		<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines.</p> <p><u>Use the following spectrum analyzer settings:</u></p> <ul style="list-style-type: none"> - The EUT must have its hopping function enabled - Span = wide enough to capture the peaks of two adjacent channels - Resolution (or IF) Bandwidth (RBW) \geq 1% of the span - Video (or Average) Bandwidth (VBW) \geq RBW - Sweep = auto - Detector function = peak - Trace = max hold - Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot. 	

Remark		
Result	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail

Test Data Yes N/A


Test Plot Yes (See below) N/A


Channel Separation measurement result

Type/ Modulation	CH	CH Freq (MHz)	CH Separation (MHz)	Limit (MHz)	Result
CH Separation GFSK	Low Channel	2402	1.005	0.686	Pass
	Adjacency Channel	2403			
	Mid Channel	2440	1.005	0.684	Pass
	Adjacency Channel	2441			
	High Channel	2480	1.005	0.983	Pass
	Adjacency Channel	2479			
CH Separation $\pi/4$ DQPSK	Low Channel	2402	1.005	0.867	Pass
	Adjacency Channel	2403			
	Mid Channel	2440	1.005	0.867	Pass
	Adjacency Channel	2441			
	High Channel	2480	1.005	0.867	Pass
	Adjacency Channel	2479			
CH Separation 8DPSK	Low Channel	2402	1.005	0.863	Pass
	Adjacency Channel	2403			
	Mid Channel	2440	1.005	0.867	Pass
	Adjacency Channel	2441			
	High Channel	2480	1.005	0.870	Pass
	Adjacency Channel	2479			

Test Plots

Channel Separation measurement result

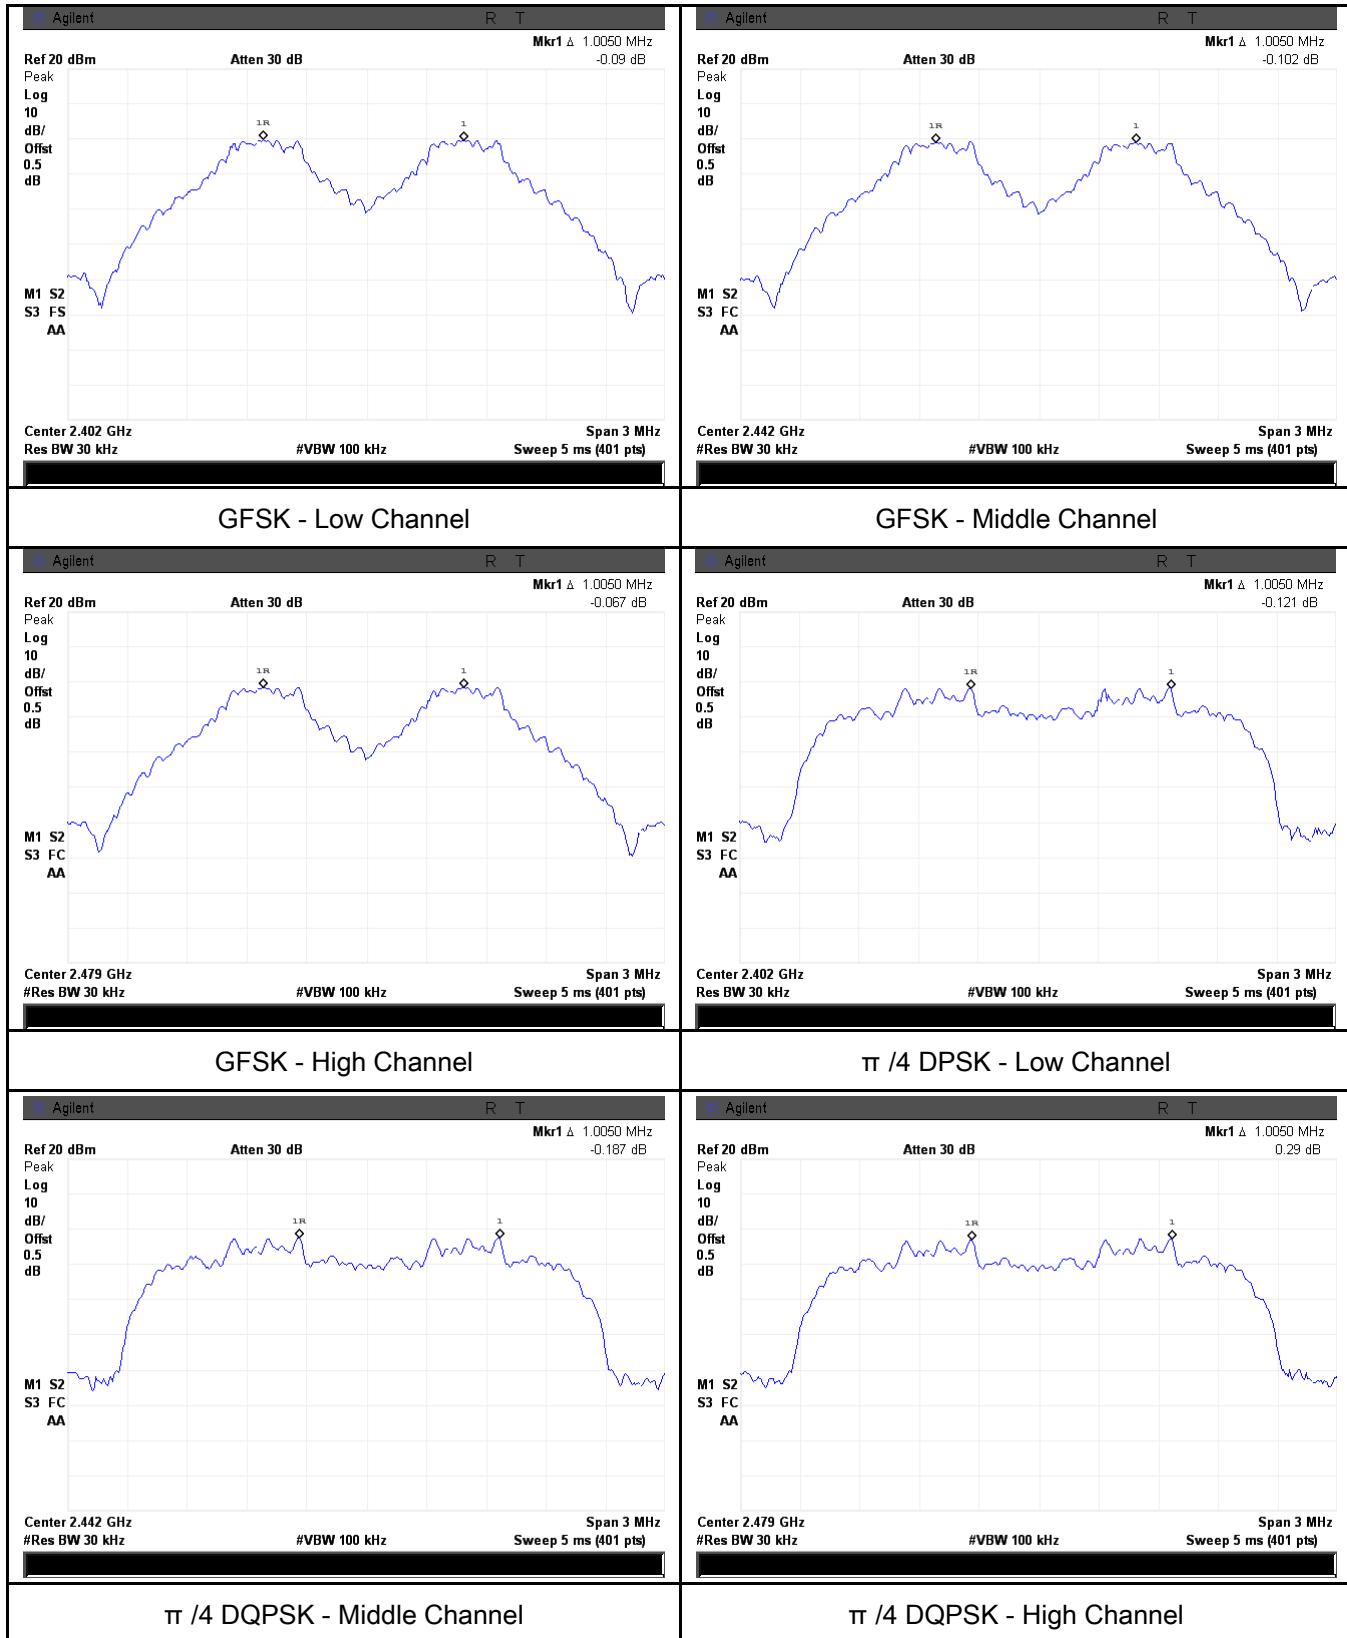


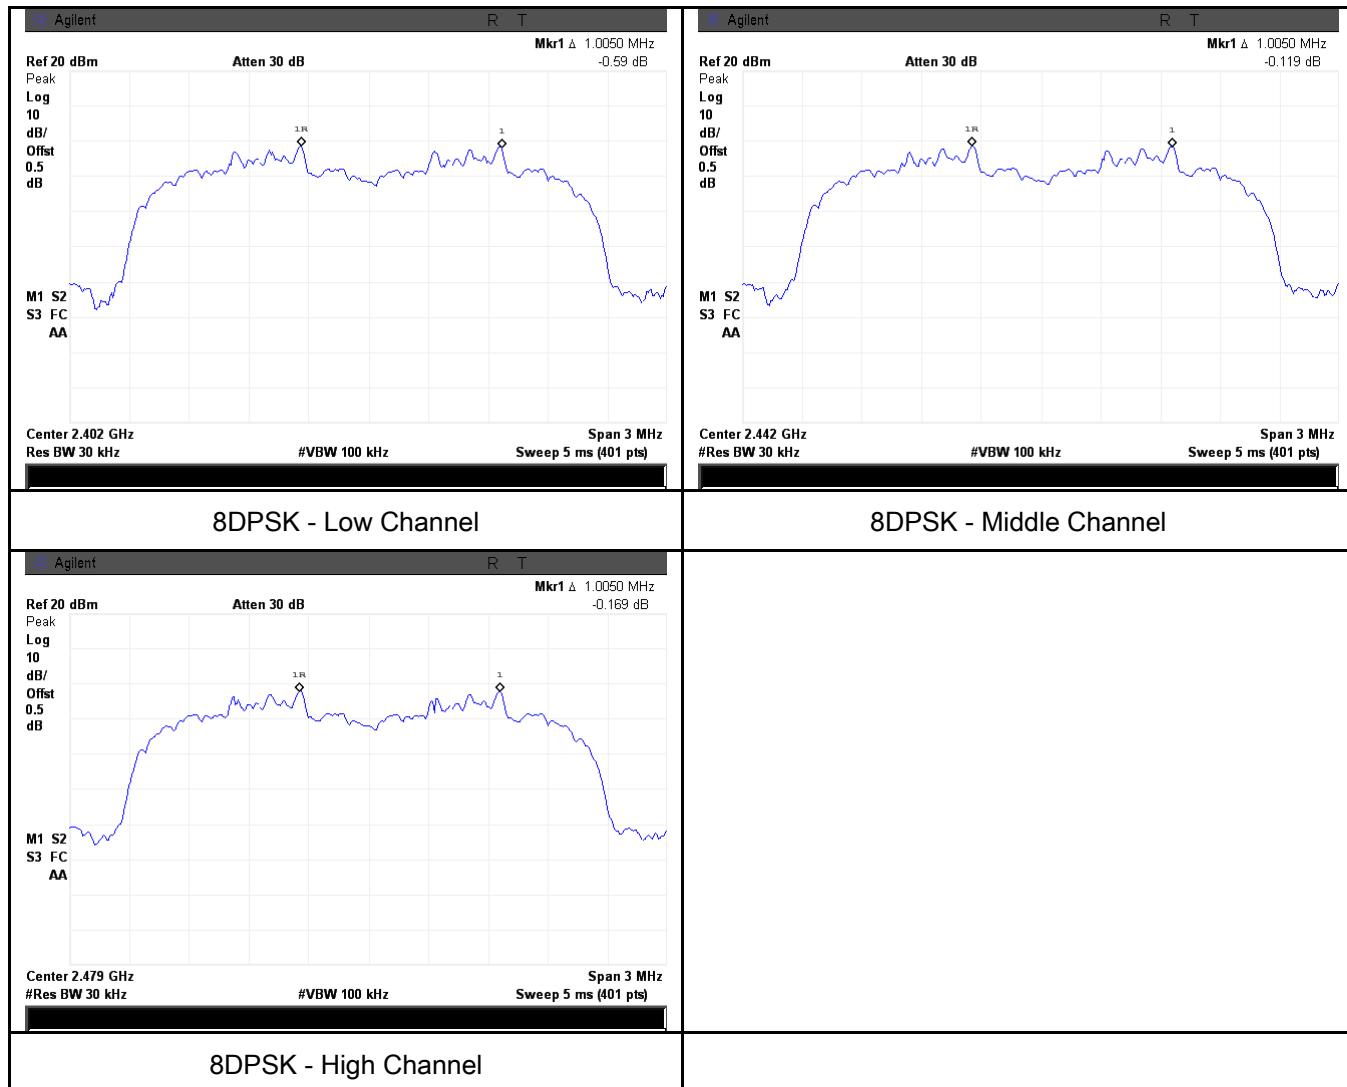

6.3 20dB Bandwidth

Temperature	22°C
Relative Humidity	51%
Atmospheric Pressure	1009mbar
Test date :	October 09, 2015
Tested By :	Winnie Zhang

Requirement(s):

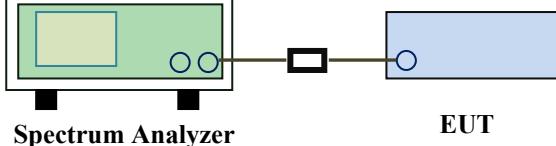Spec	Item	Requirement	Applicable
§15.247(a) (1)	a)	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.	<input checked="" type="checkbox"/>
Test Setup			
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines.</p> <p><u>Use the following spectrum analyzer settings:</u></p> <ul style="list-style-type: none"> - Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel - RBW \geq 1% of the 20 dB bandwidth - VBW \geq RBW - Sweep = auto - Detector function = peak - Trace = max hold. - The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference 		

	marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A


Test Plot Yes (See below) N/A


Measurement result

Modulation	CH	CH Freq (MHz)	20dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
GFSK	Low	2402	1.029	0.8858
	Mid	2441	1.026	0.8890
	High	2480	0.983	0.8910
$\pi/4$ DQPSK	Low	2402	1.300	1.1679
	Mid	2441	1.300	1.1685
	High	2480	1.301	1.1674
8-DPSK	Low	2402	1.295	1.1717
	Mid	2441	1.300	1.1772
	High	2480	1.305	1.1810

Test Plots

20dB Bandwidth measurement result

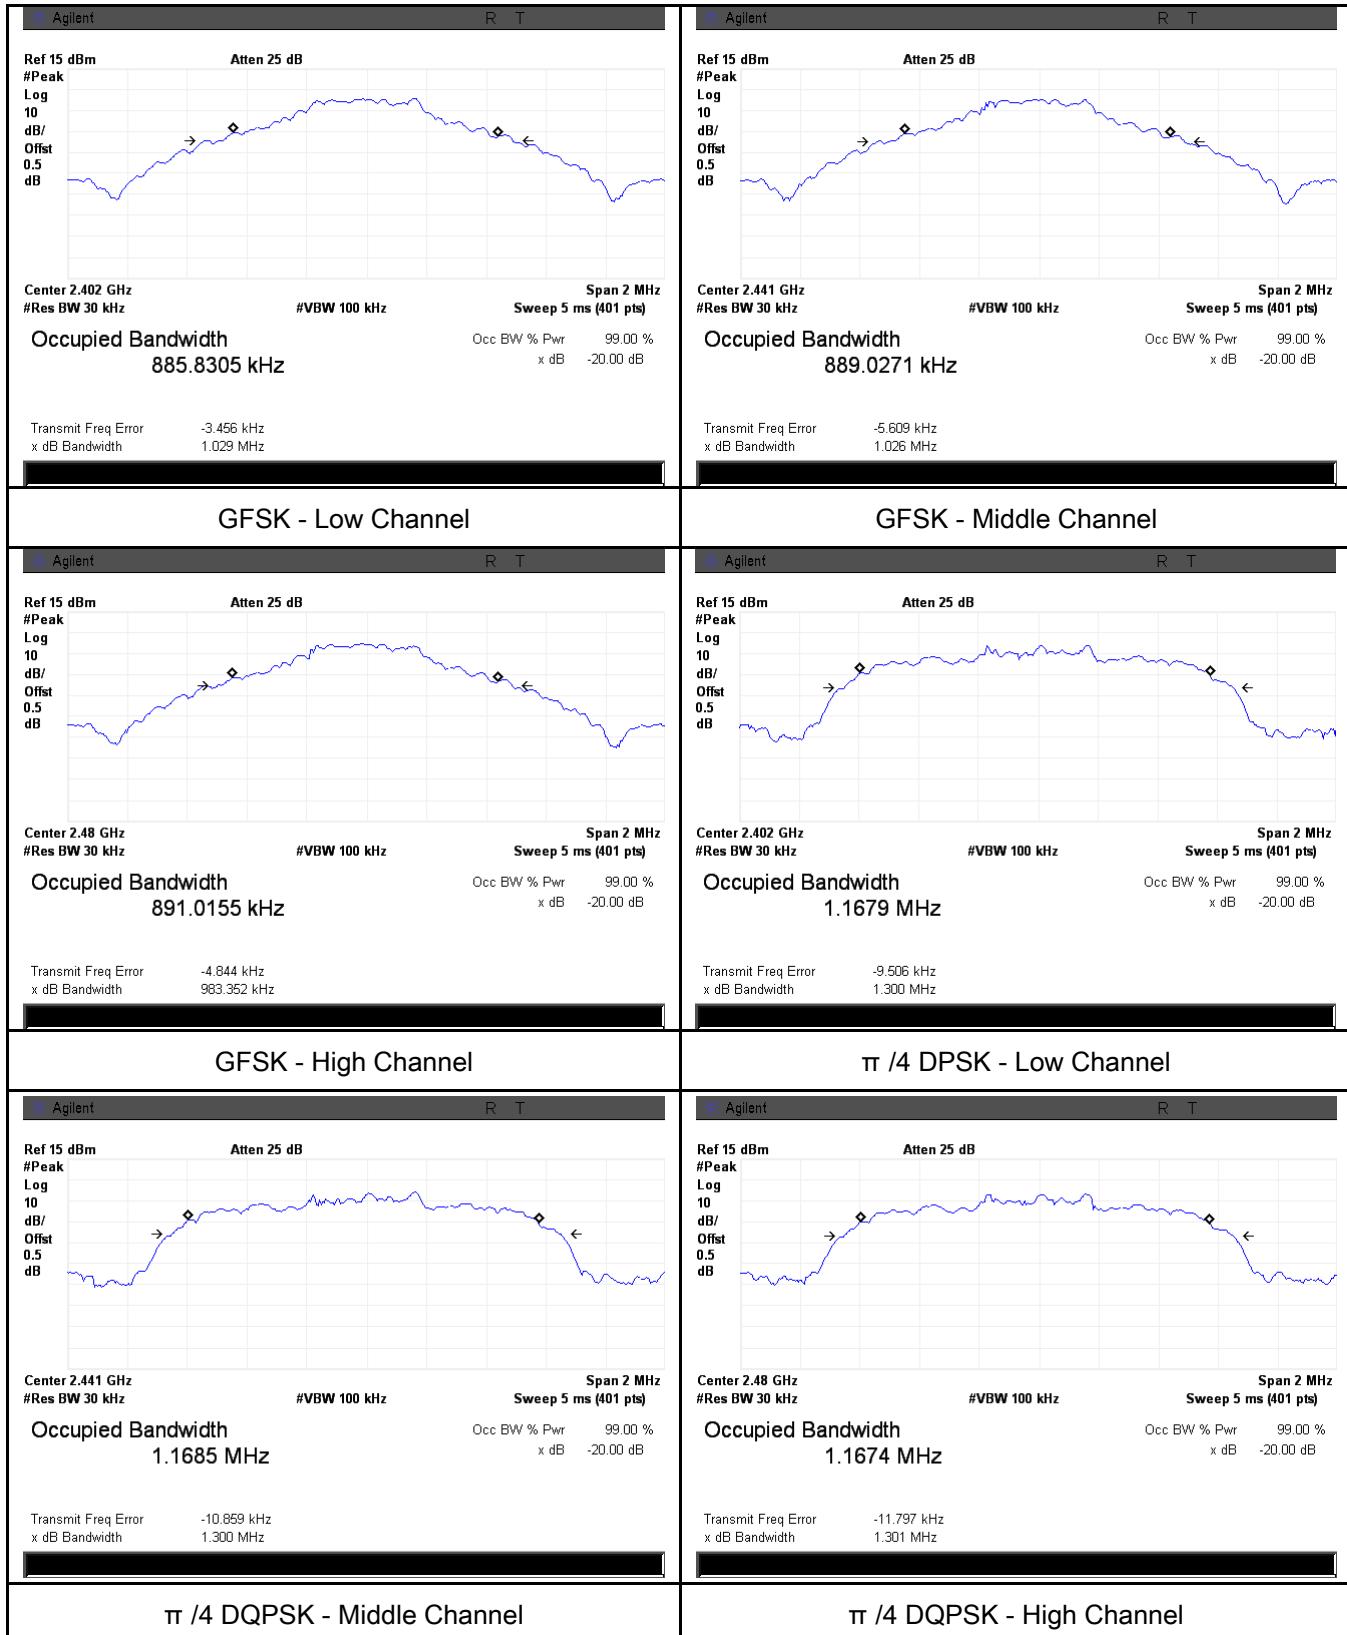


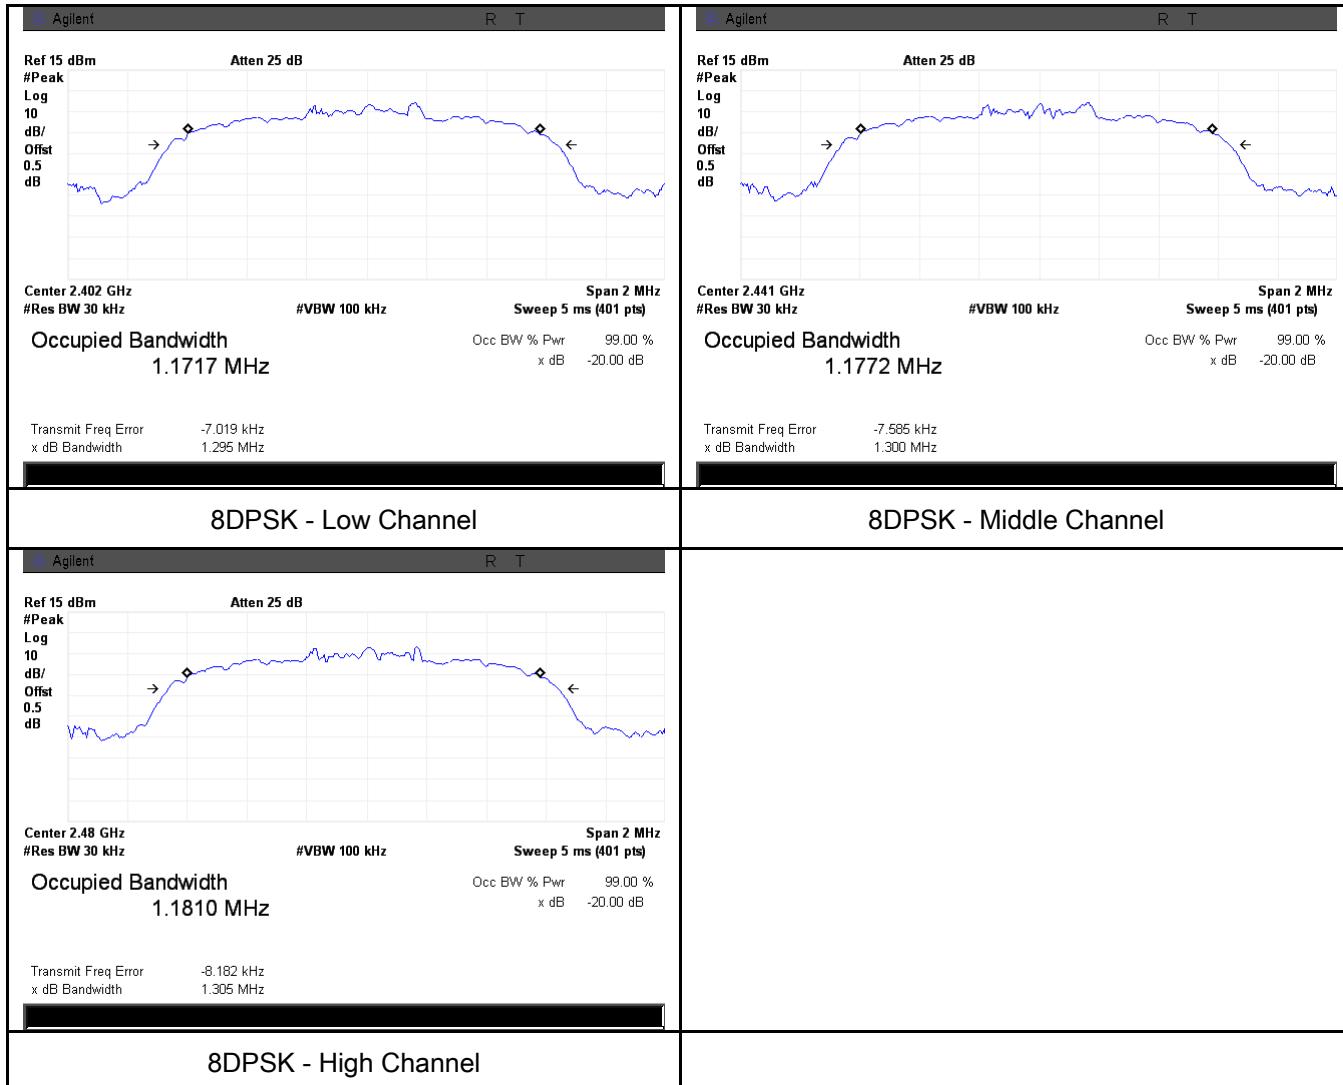

6.4 Peak Output Power

Temperature	22°C
Relative Humidity	51%
Atmospheric Pressure	1009mbar
Test date :	October 09, 2015
Tested By :	Winnie Zhang

Requirement(s):

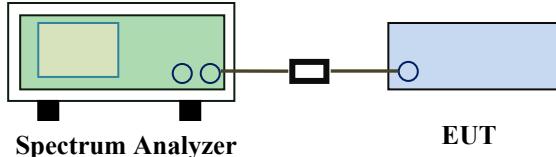Spec	Item	Requirement	Applicable
§15.247(b) (2)	a)	FHSS in 2400-2483.5MHz with \geq 75 channels: \leq 1 Watt	<input checked="" type="checkbox"/>
	b)	FHSS in 5725-5850MHz: \leq 1 Watt	<input type="checkbox"/>
	c)	For all other FHSS in the 2400-2483.5MHz band: \leq 0.125 Watt.	<input checked="" type="checkbox"/>
	d)	FHSS in 902-928MHz with \geq 50 channels: \leq 1 Watt	<input type="checkbox"/>
	e)	FHSS in 902-928MHz with \geq 25 & $<$ 50 channels: \leq 0.25 Watt	<input type="checkbox"/>
	f)	DSSS in 902-928MHz, 2400-2483.5MHz, 5725-5850MHz: \leq 1 Watt	<input type="checkbox"/>
Test Setup		 Spectrum Analyzer EUT	
Test Procedure		<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines.</p> <p><u>Use the following spectrum analyzer settings:</u></p> <ul style="list-style-type: none"> - Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel - RBW > the 20 dB bandwidth of the emission being measured - VBW \geq RBW - Sweep = auto - Detector function = peak - Trace = max hold 	

	<ul style="list-style-type: none"> - Allow the trace to stabilize. - Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power (see the note above regarding external attenuation and cable loss). The limit is specified in one of the subparagraphs of this Section. Submit this plot. A peak responding power meter may be used instead of a spectrum analyzer.
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A


Test Plot Yes (See below) N/A


Peak Output Power measurement result

Type	Modulation	CH	Freq (MHz)	Conducted Power (dBm)	Limit (mW)	Result
Output power	GFSK	Low	2402	2.987	125	Pass
		Mid	2441	2.925	125	Pass
		High	2480	2.142	1000	Pass
	$\pi/4$ DQPSK	Low	2402	2.370	125	Pass
		Mid	2441	2.704	125	Pass
		High	2480	1.983	125	Pass
	8-DPSK	Low	2402	2.537	125	Pass
		Mid	2441	2.809	125	Pass
		High	2480	1.856	125	Pass

Test Plots

Output Power measurement result

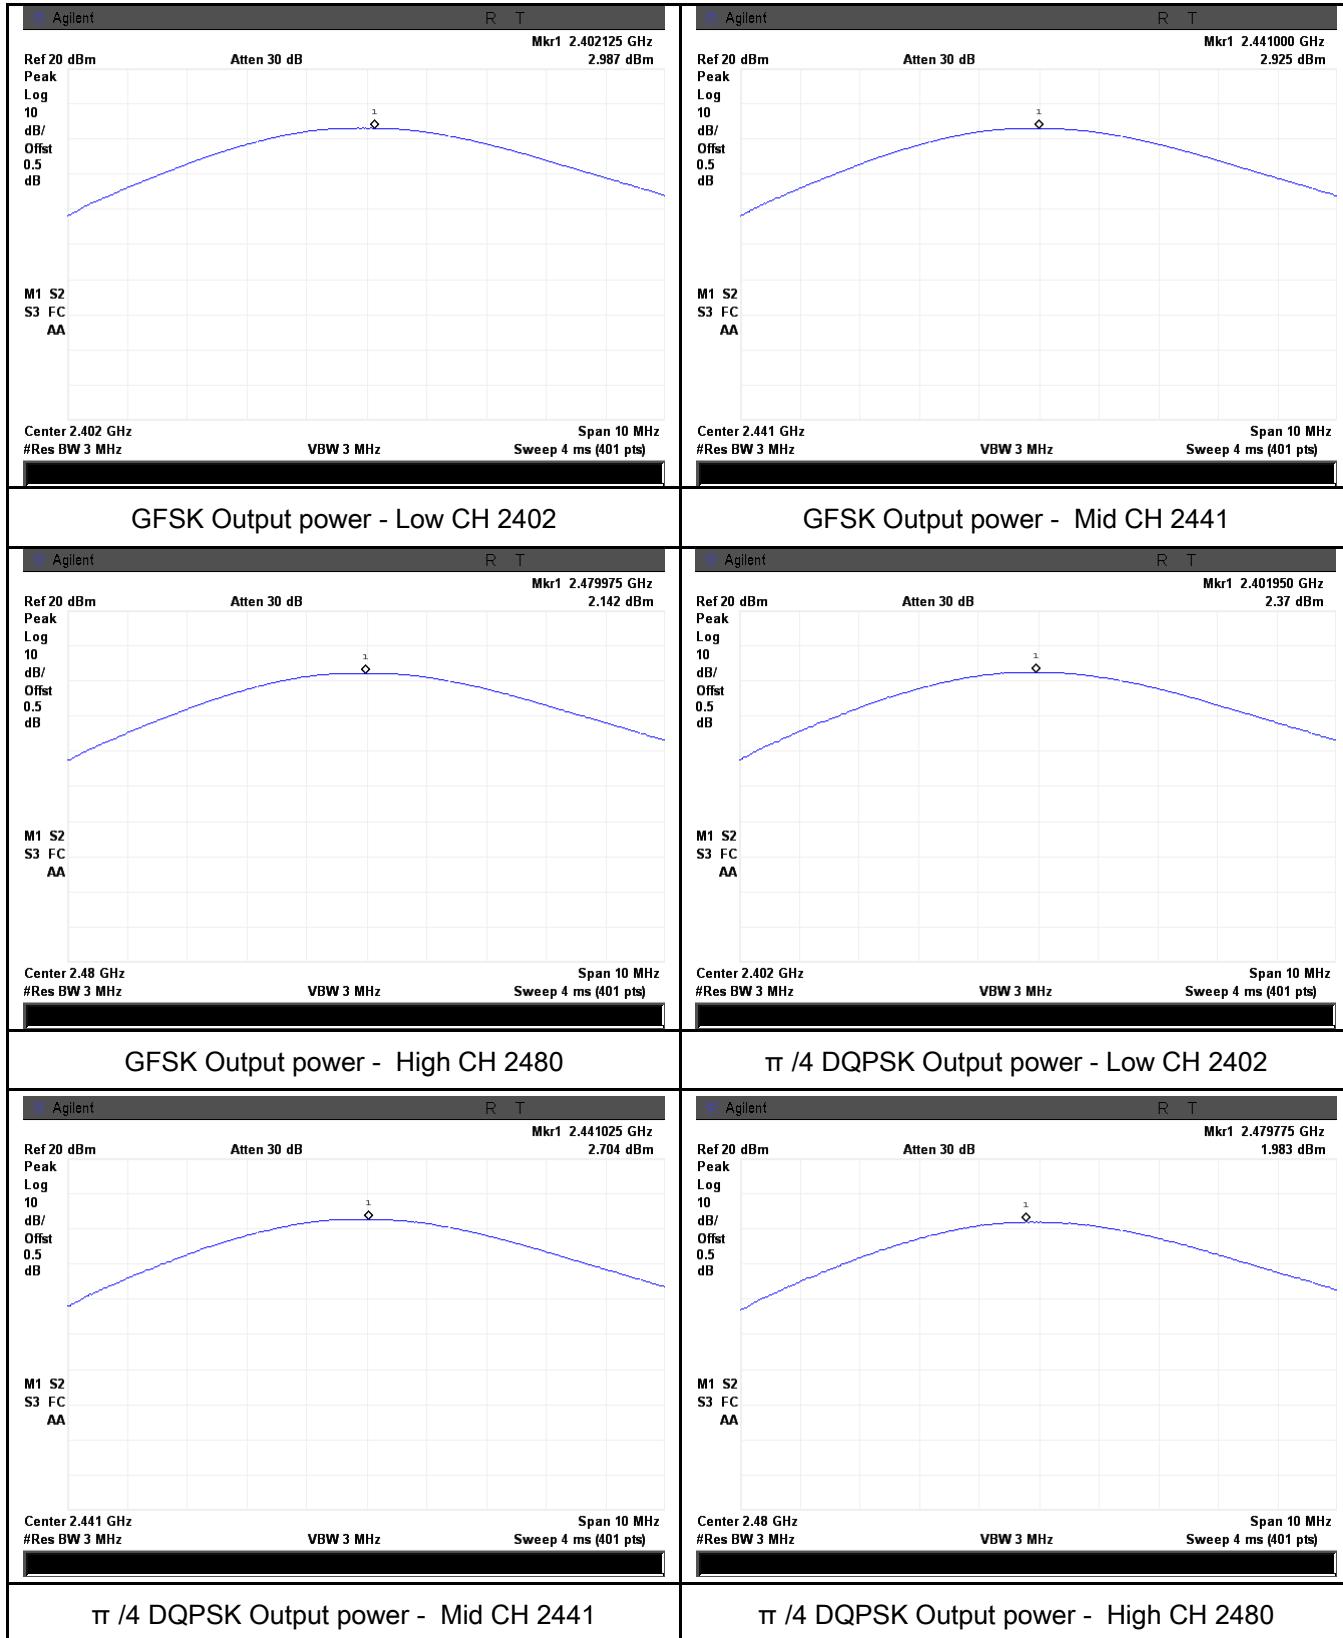

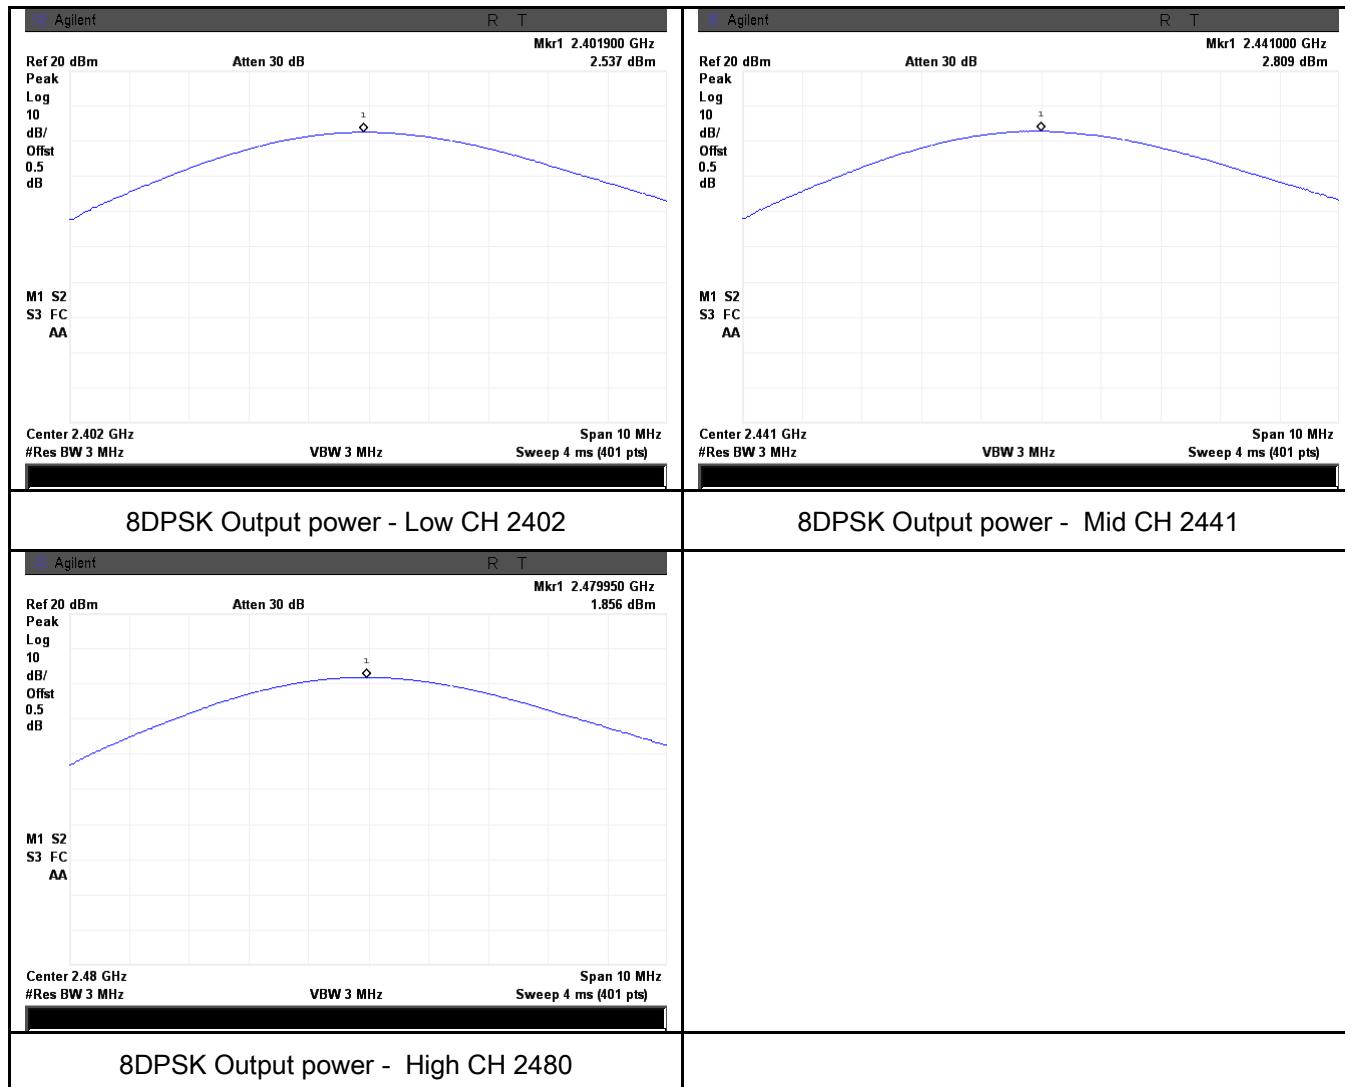

6.5 Number of Hopping Channel

Temperature	25°C
Relative Humidity	50%
Atmospheric Pressure	1008mbar
Test date :	October 08, 2015
Tested By :	Winnie Zhang

Requirement(s):

Test Data Yes

Yes (See below) N/A


Test Plot **Yes (See below)** **N/A**

Number of Hopping Channel measurement result

Type	Modulation	Frequency Range	Number of Hopping Channel	Limit
Number of Hopping Channel	GFSK	2400-2483.5	79	15
	$\pi/4$ DQPSK	2400-2483.5	79	15
	8-DPSK	2400-2483.5	79	15

Test Plots


Number of Hopping Channels measurement result

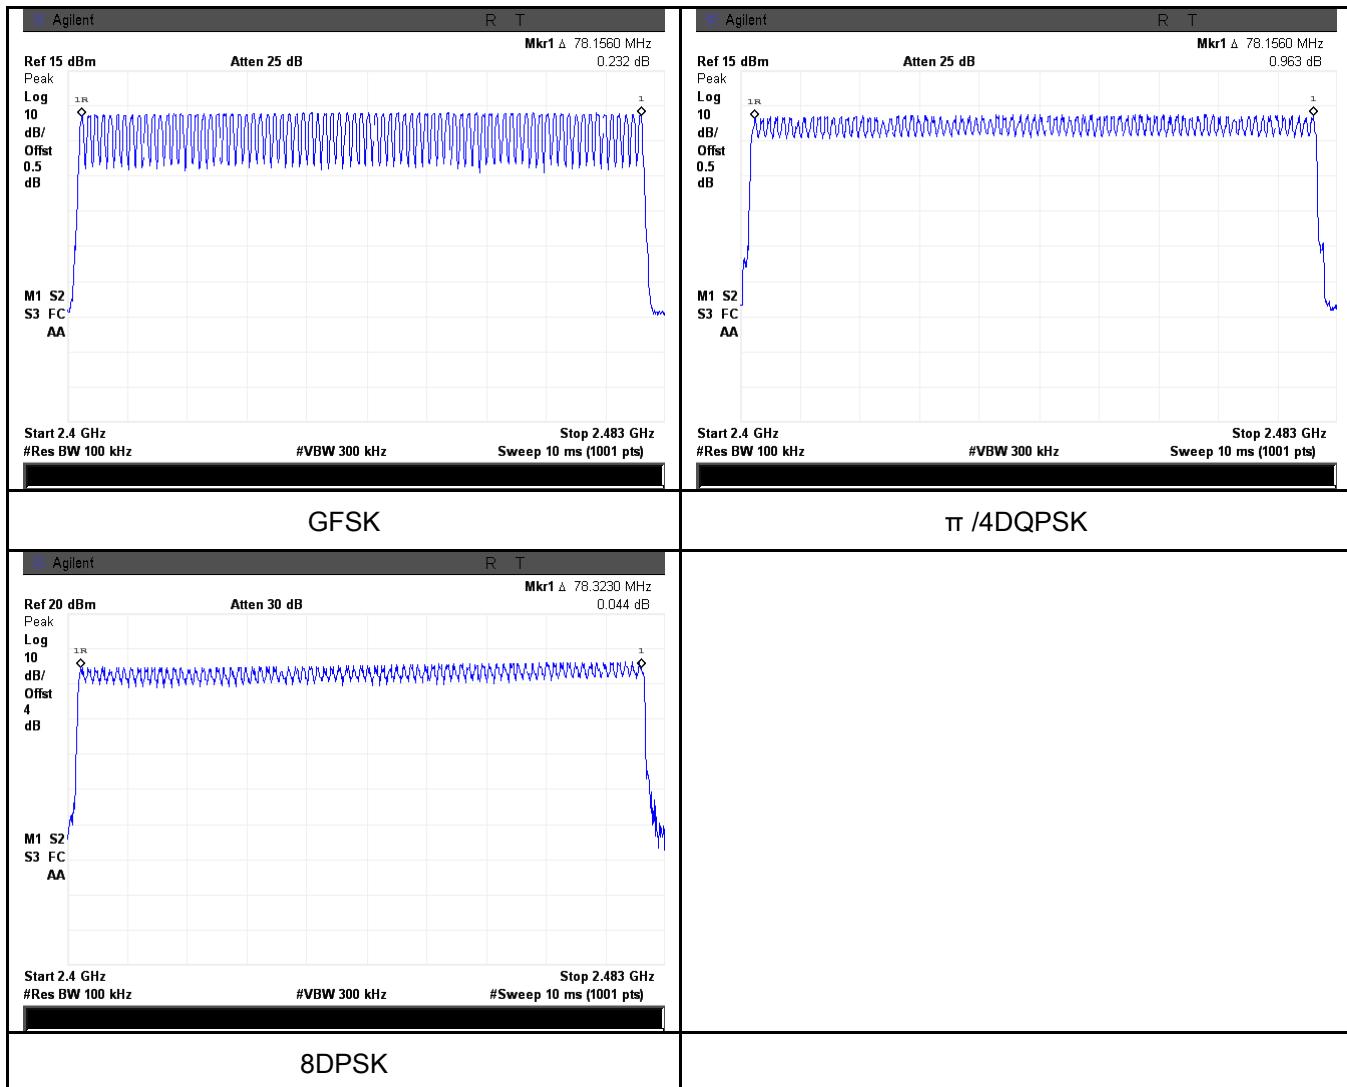

6.6 Time of Occupancy (Dwell Time)

Temperature	25°C
Relative Humidity	50%
Atmospheric Pressure	1008mbar
Test date :	October 08, 2015
Tested By :	Winnie Zhang

Requirement(s):

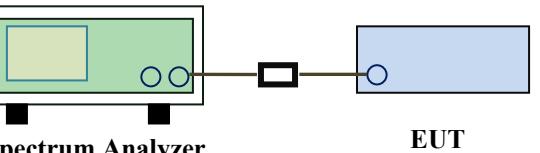Spec	Item	Requirement	Applicable
§15.247(a) (1)(iii)	a)	Dwell Time < 0.4s	<input checked="" type="checkbox"/>
Test Setup	 <p>Spectrum Analyzer EUT</p>		
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines.</p> <p><u>Use the following spectrum analyzer</u></p> <ul style="list-style-type: none"> - Span = zero span, centered on a hopping channel - RBW = 1 MHz - VBW \geq RBW - Sweep = as necessary to capture the entire dwell time per hopping channel - Detector function = peak - Trace = max hold - use the marker-delta function to determine the dwell time 		
Remark			
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data Yes N/A

Yes (See below) N/A


Dwell Time measurement result


Type	Modulation	CH	Pulse Width (ms)	Dwell Time (ms)	Limit (ms)	Result
Dwell Time	GFSK	Low	2.860	305.067	400	Pass
		Mid	2.875	306.667	400	Pass
		High	2.875	306.667	400	Pass
	$\pi/4$ DQPSK	Low	2.870	306.133	400	Pass
		Mid	2.875	306.667	400	Pass
		High	2.875	306.667	400	Pass
	8-DPSK	Low	2.870	306.133	400	Pass
		Mid	2.875	306.667	400	Pass
		High	2.875	306.667	400	Pass

Note: Dwell time=Pulse Time (ms) \times (1600 \div 6 \div 79) \times 31.6

Test Plots

Dwell Time measurement result

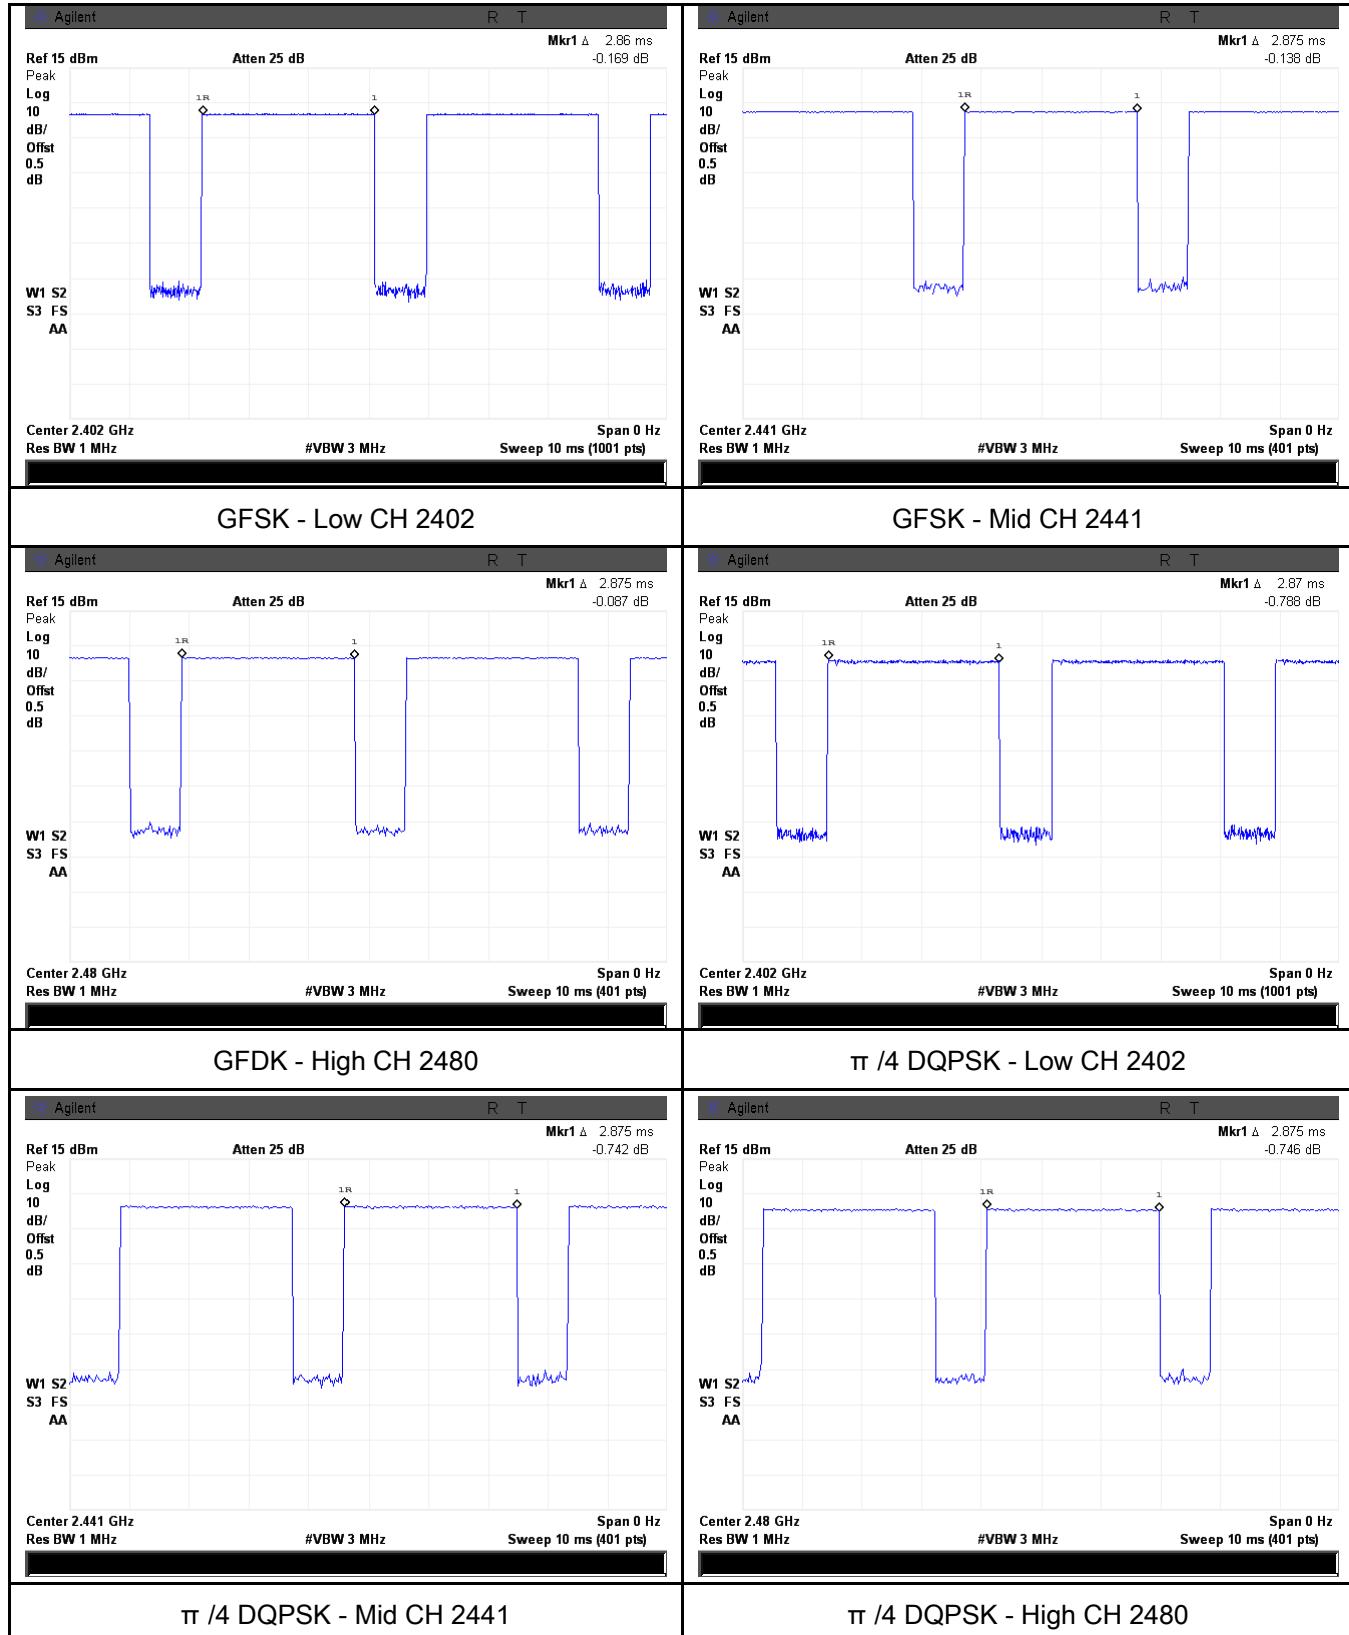


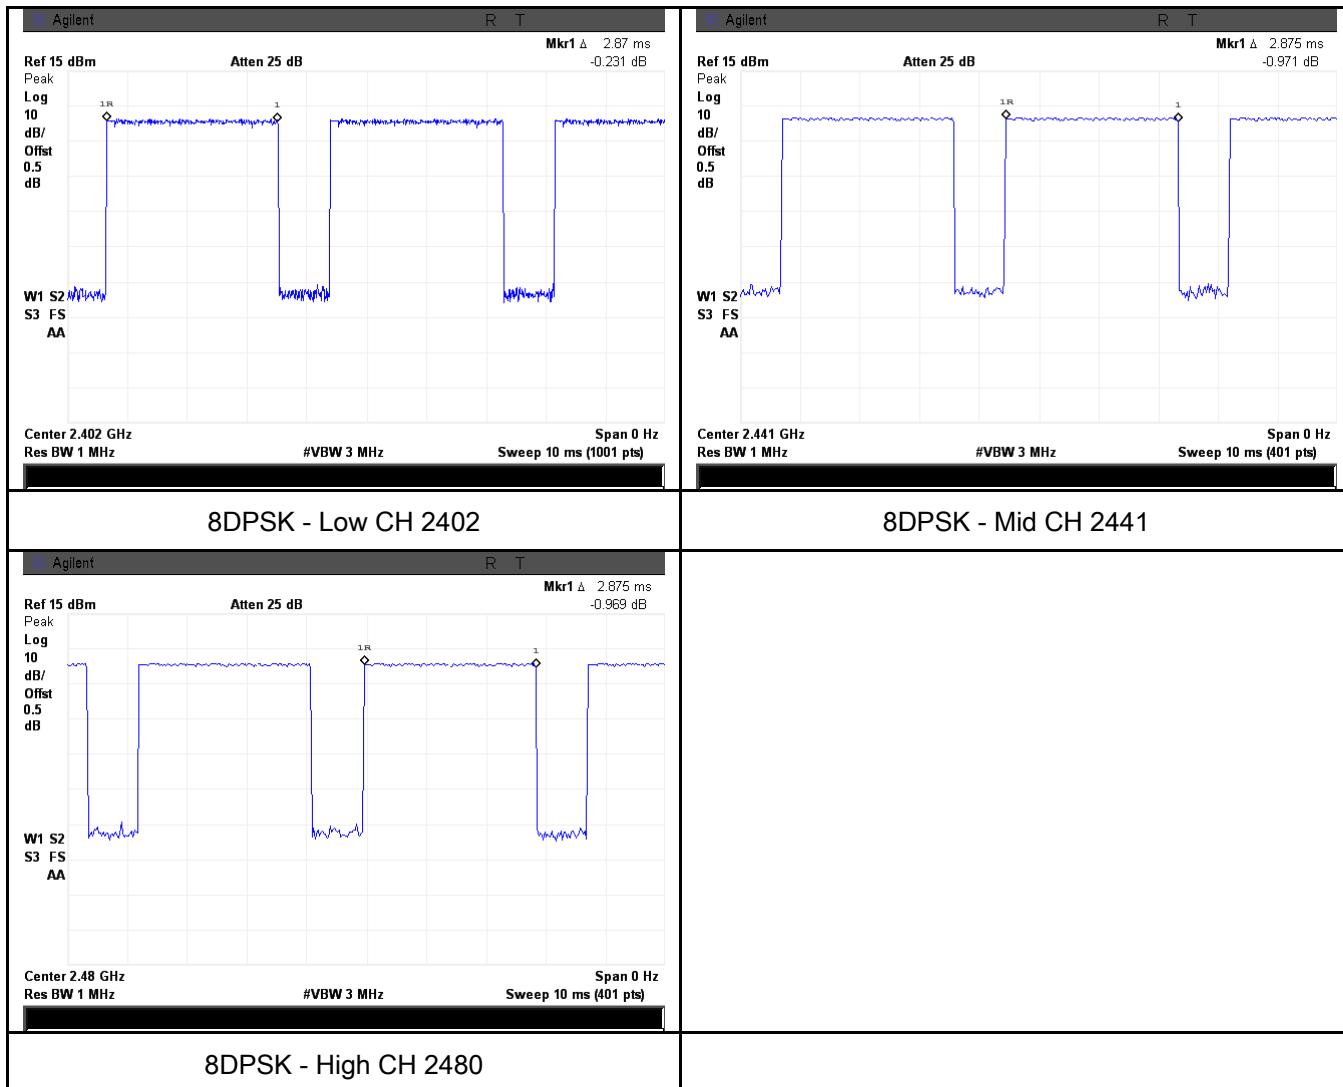

6.7 Band Edge

Temperature	22°C
Relative Humidity	51%
Atmospheric Pressure	1009mbar
Test date :	October 09, 2015
Tested By :	Winnie Zhang

Requirement(s):

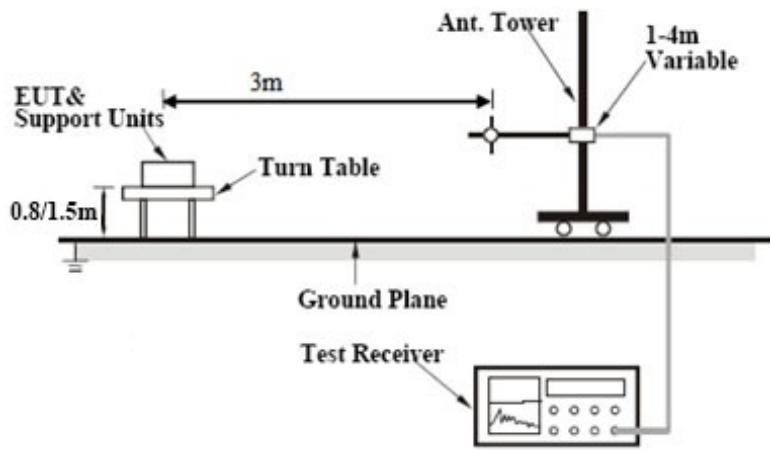Spec	Item	Requirement	Applicable
§15.247(a) (1)(iii)	a)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.	<input checked="" type="checkbox"/>
Test Setup	 <p>The diagram illustrates the test setup. An EUT & Support Units assembly is positioned on a Turn Table, which is placed on a Ground Plane. The distance between the EUT and the turn table is 0.8/1.5m. The turn table is connected to an Ant. Tower. The Ant. Tower is a vertical mast with a height of 1-4m, mounted on a base. A Test Receiver is connected to the base of the Ant. Tower. The distance between the EUT and the Ant. Tower is 3m.</p>		
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Radiated Method Only</p> <ul style="list-style-type: none"> - 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator. - 2. Position the EUT without connection to measurement instrument. Put it on the Rotated table and turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, 		


	<p>and make sure the instrument is operated in its linear range.</p> <ul style="list-style-type: none"> - 3. First, set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, check the emission of EUT, if pass then set Spectrum Analyzer as below: <ul style="list-style-type: none"> a. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz. b. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz. c. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz. - 4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency. - 5. Repeat above procedures until all measured frequencies were complete.
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail


Test Data Yes N/A



Test Plot Yes (See below) N/A


Test Plots

GFSK Mode:



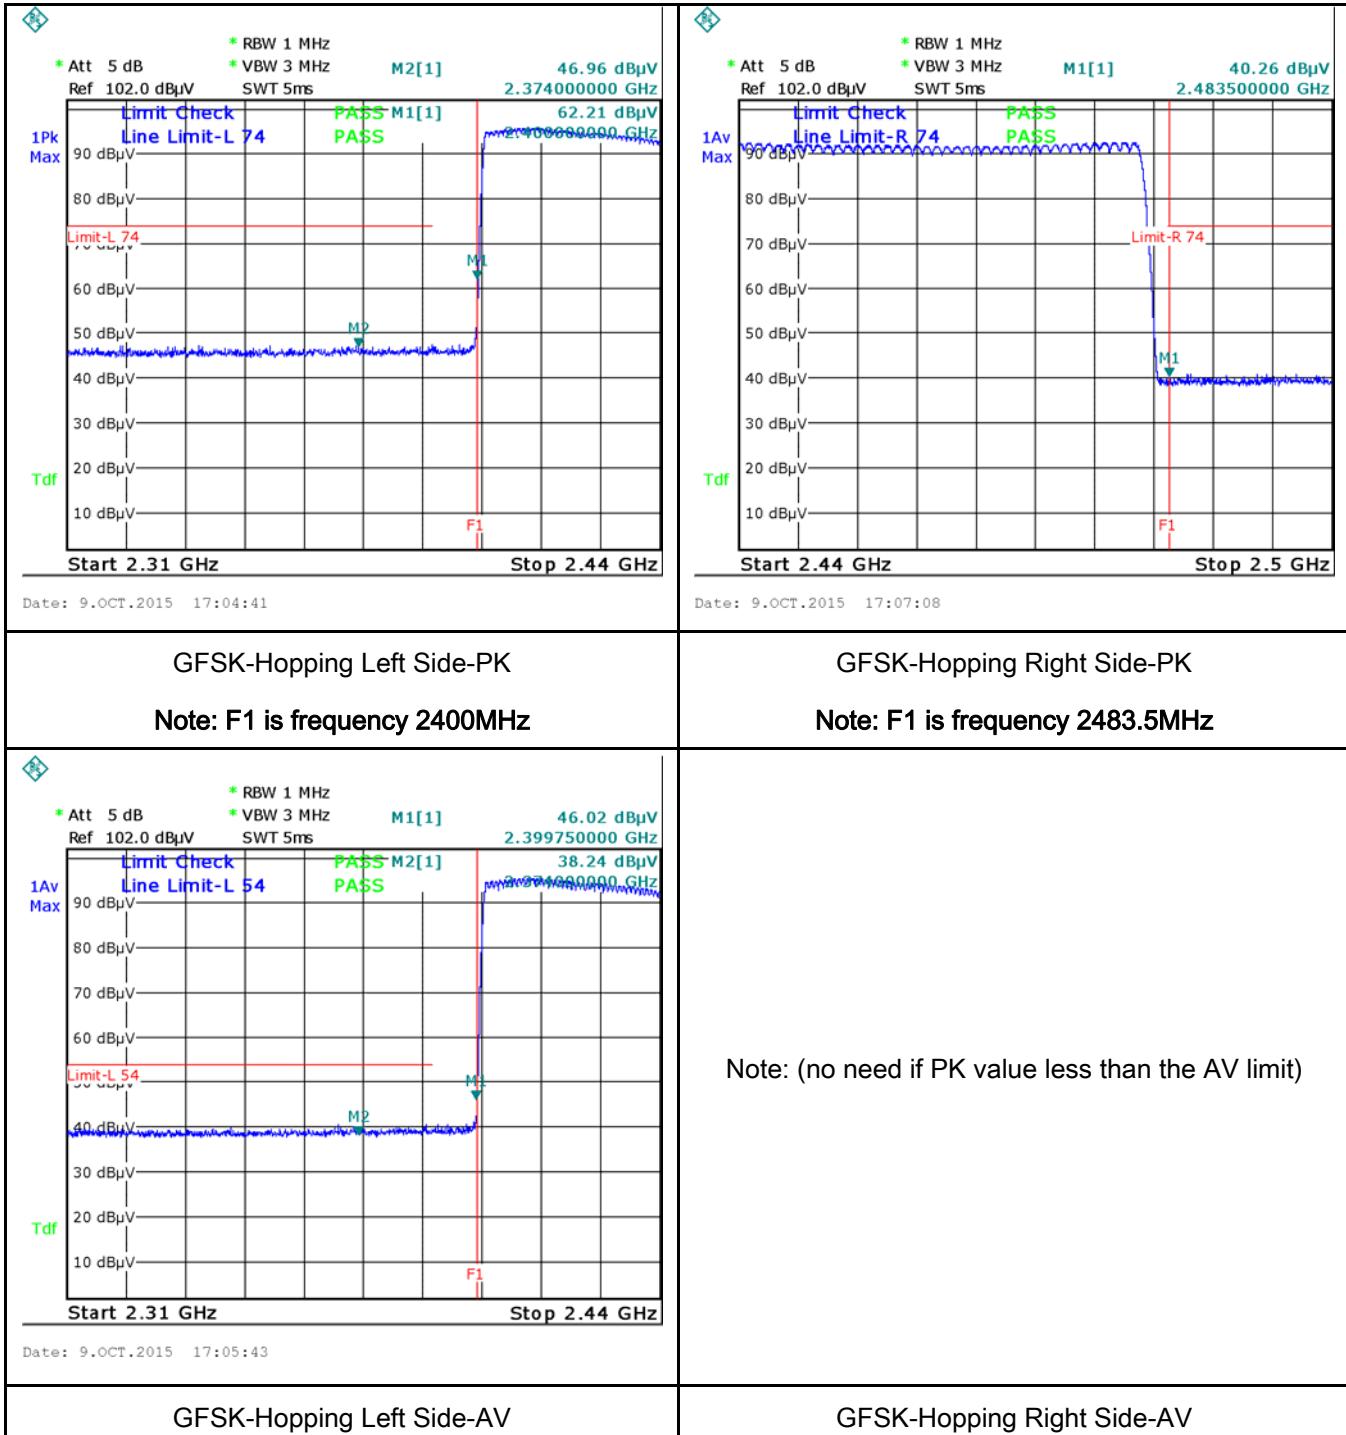


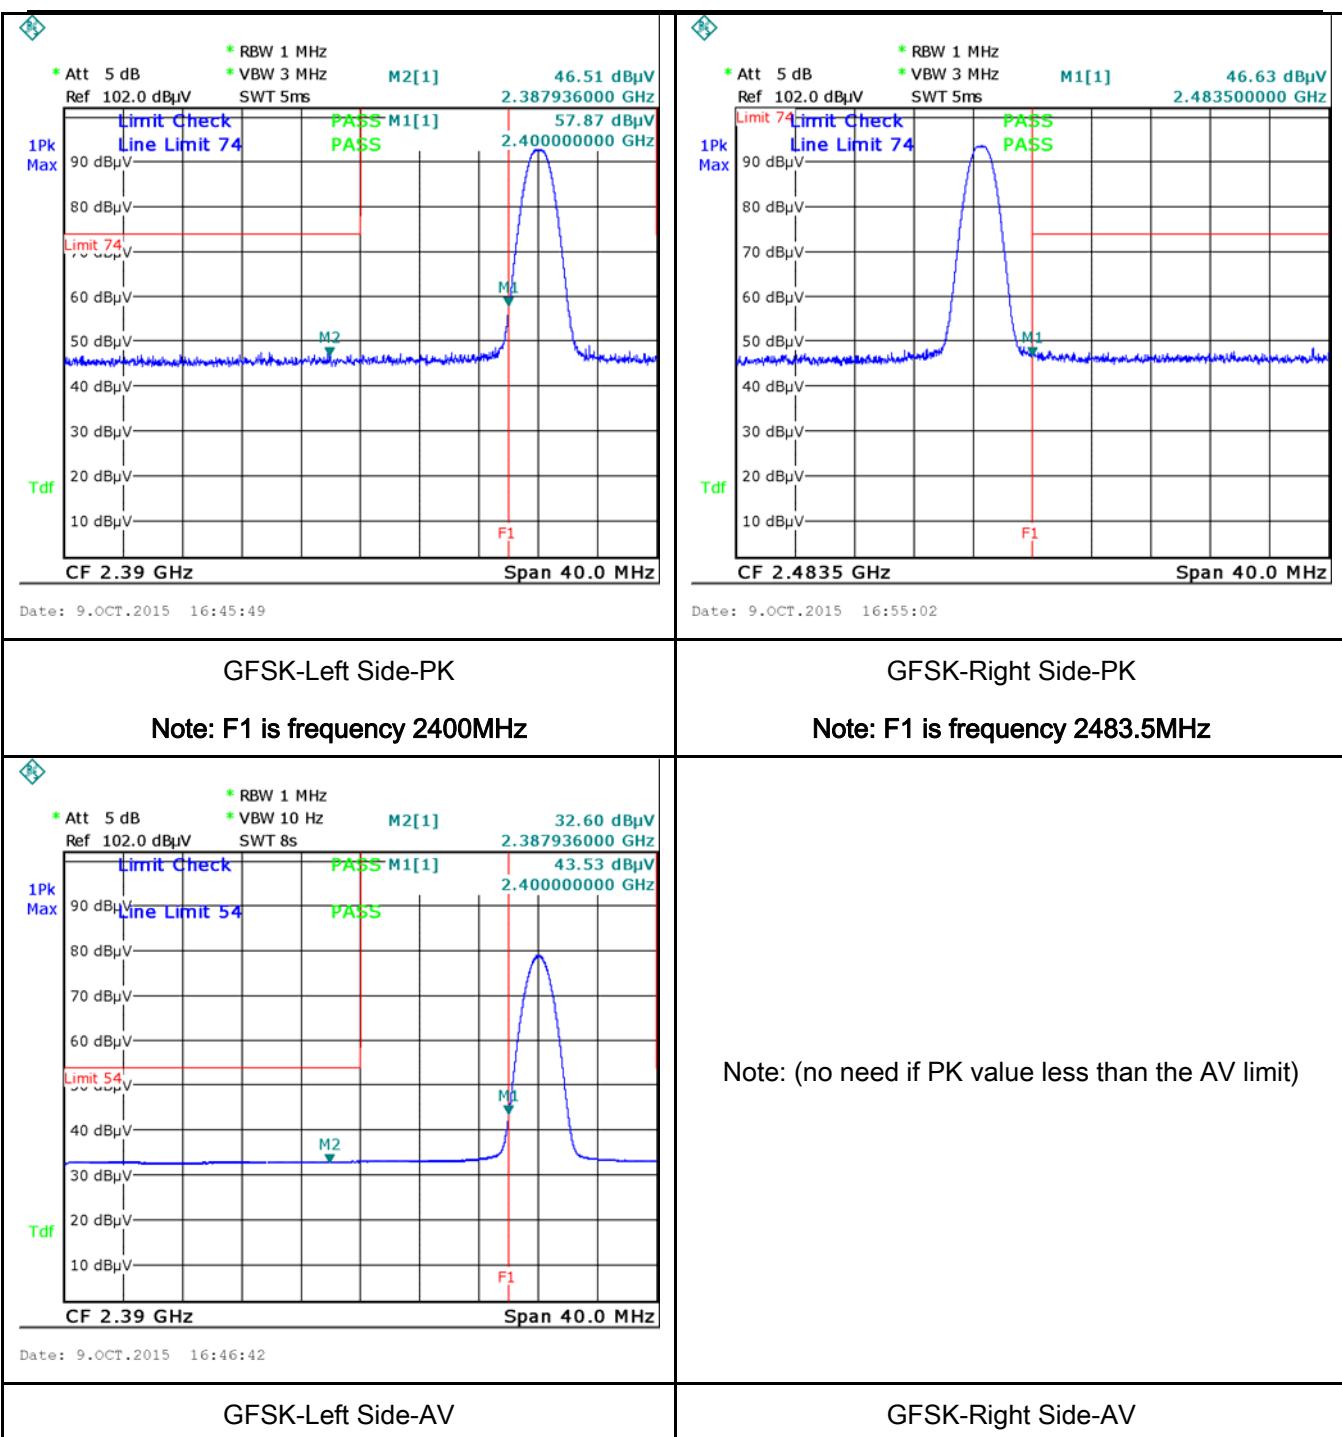


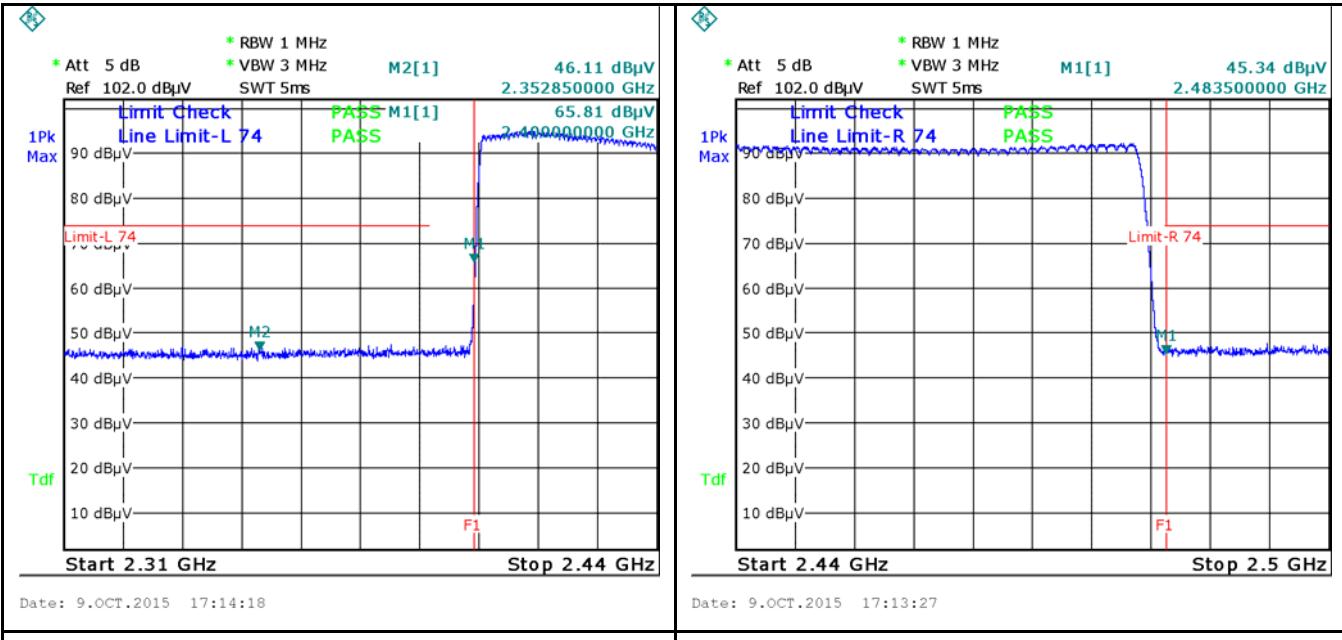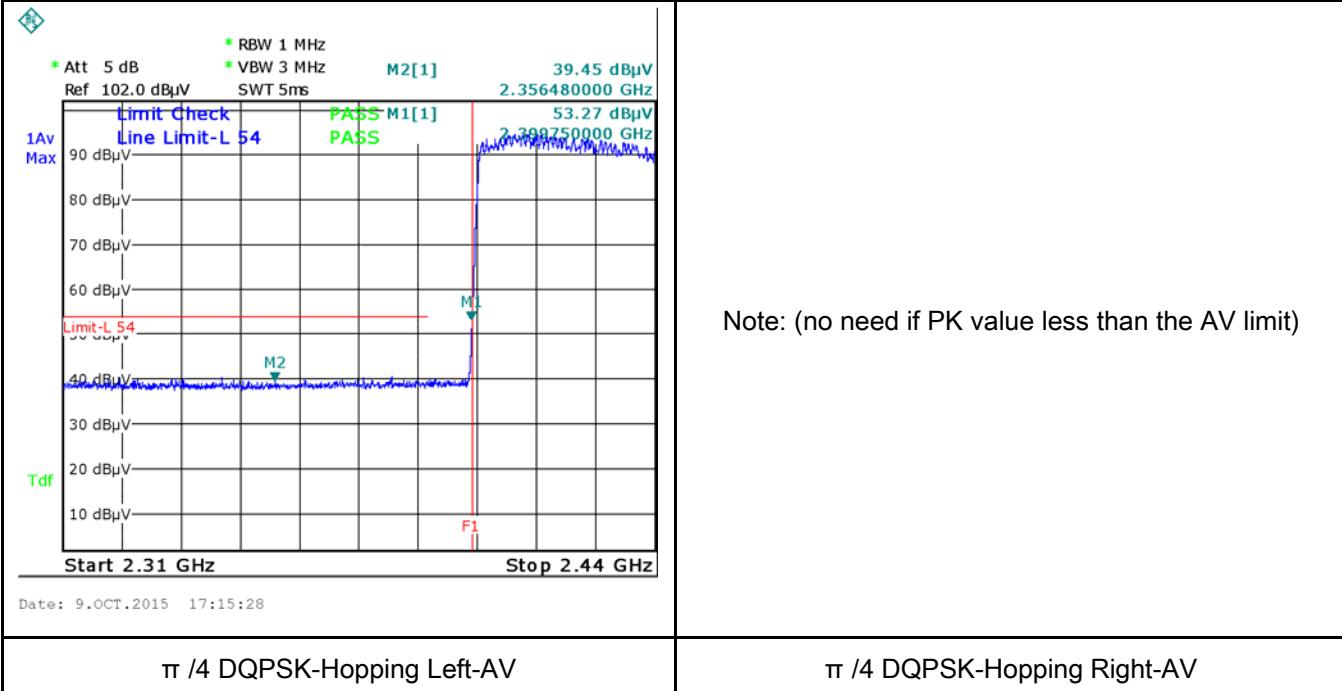π/4 DQPSK Mode:

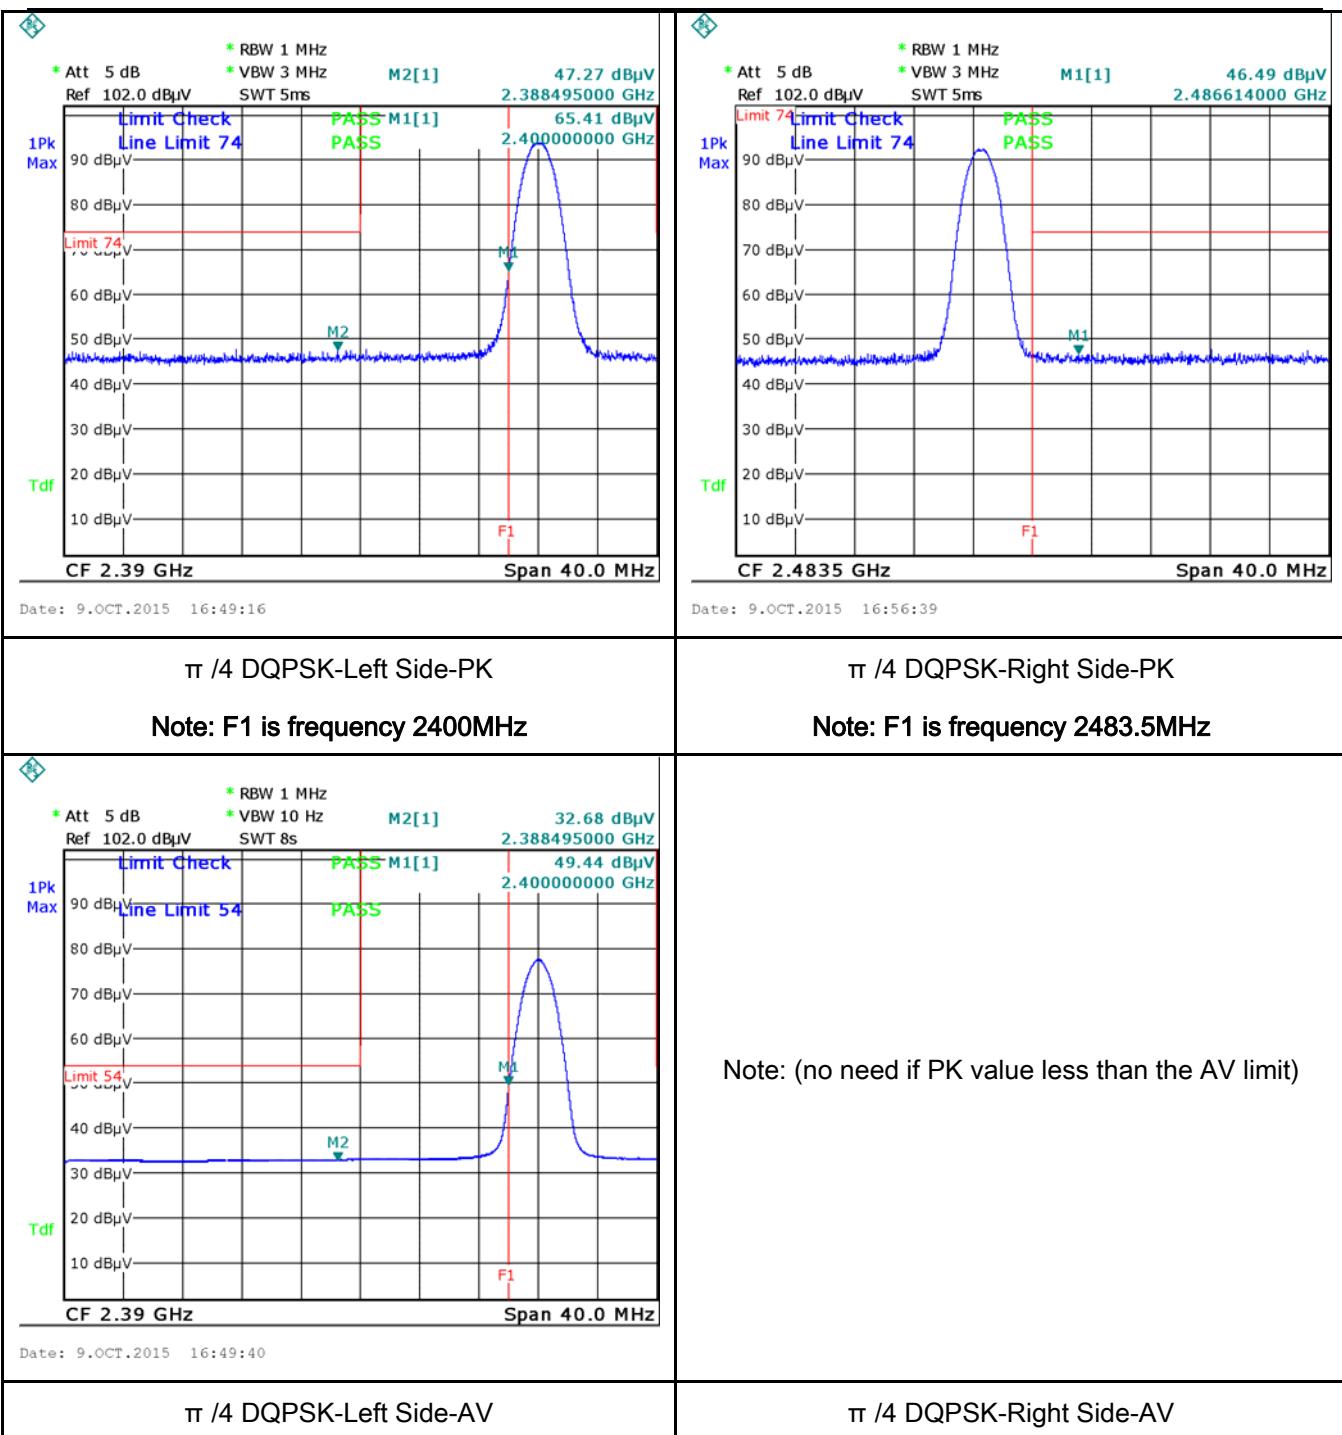π/4 DQPSK-Hopping Left Side-PK
Note: F1 is frequency 2400MHz
π/4 DQPSK-Hopping Right Side-PK
Note: F1 is frequency 2483.5MHz

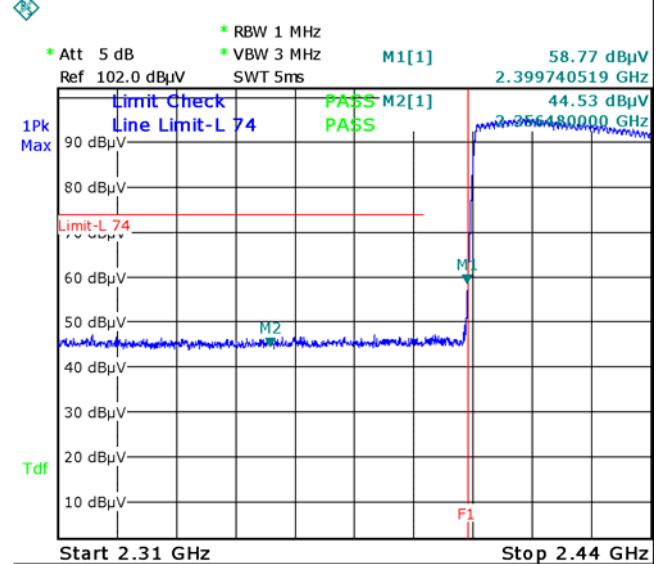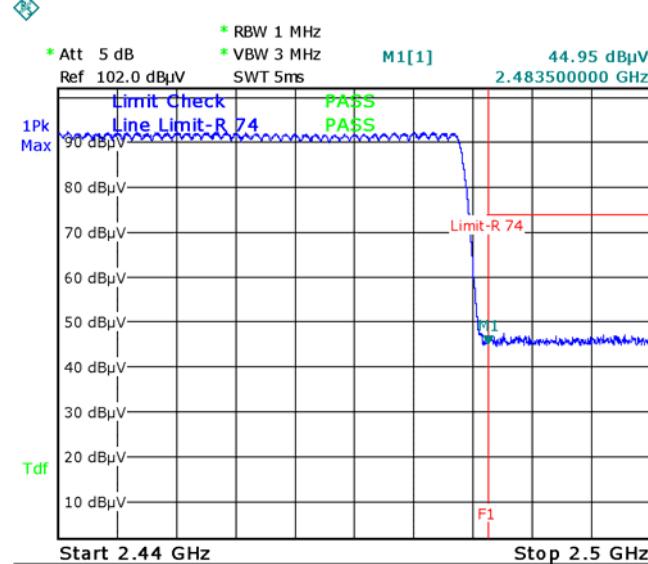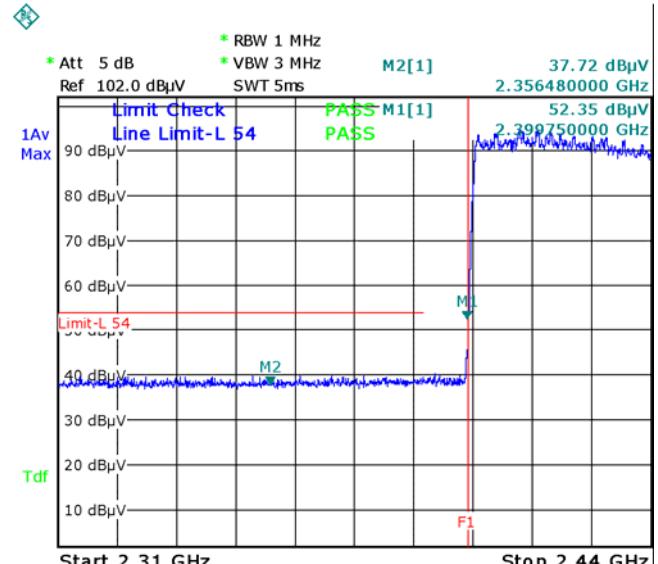


8-DPSK Mode:

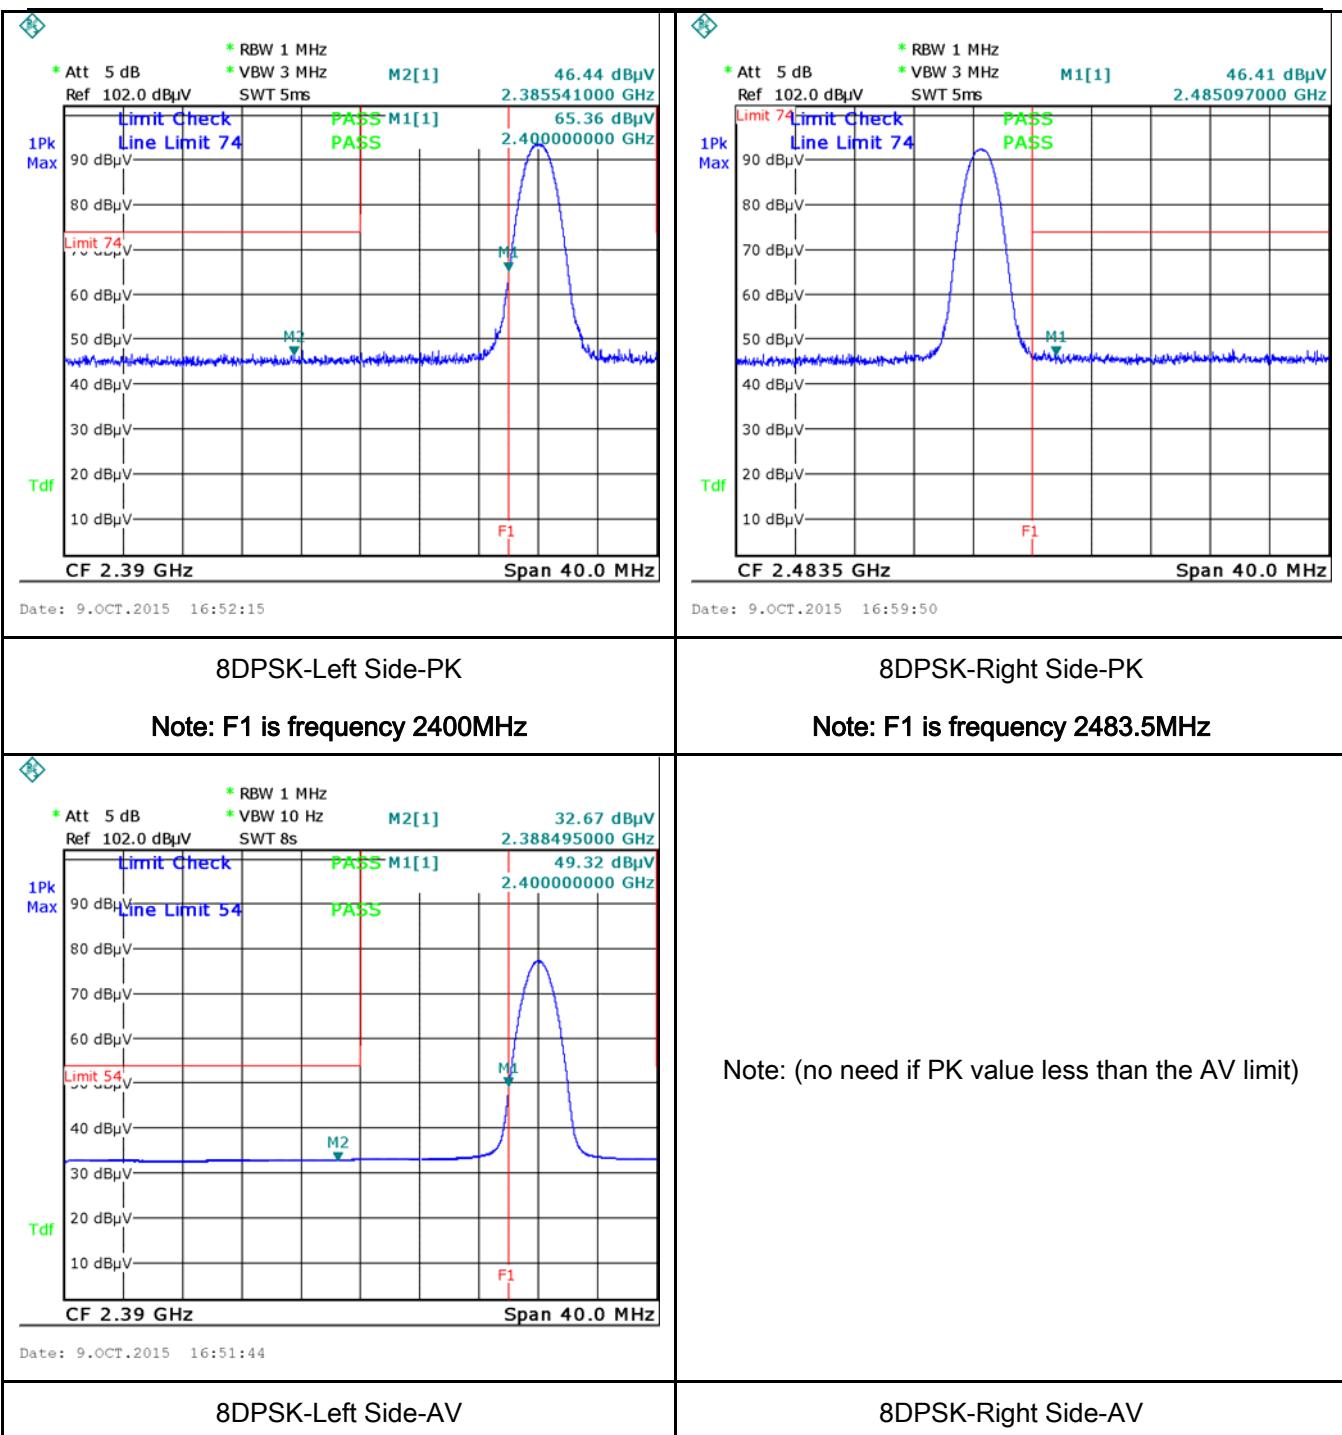
 <p>1Pk Max</p> <p>* Att 5 dB * RBW 1 MHz Ref 102.0 dBμV * VBW 3 MHz SWT 5ms</p> <p>M1[1] 58.77 dBμV 2.399740519 GHz</p> <p>Limit Check: Line Limit-L 74, PASS M2[1], PASS</p> <p>Start 2.31 GHz Stop 2.44 GHz</p> <p>Date: 9.OCT.2015 17:18:23</p>	 <p>1Pk Max</p> <p>* Att 5 dB * RBW 1 MHz Ref 102.0 dBμV * VBW 3 MHz SWT 5ms</p> <p>M1[1] 44.95 dBμV 2.483500000 GHz</p> <p>Limit Check: Line Limit-R 74, PASS M2[1], PASS</p> <p>Start 2.44 GHz Stop 2.5 GHz</p> <p>Date: 9.OCT.2015 17:19:39</p>
<p>8DPSK-Hopping Left Side-PK</p> <p>Note: F1 is frequency 2400MHz</p>	<p>8DPSK-Hopping Right Side-PK</p> <p>Note: F1 is frequency 2483.5MHz</p>
 <p>1Av Max</p> <p>* Att 5 dB * RBW 1 MHz Ref 102.0 dBμV * VBW 3 MHz SWT 5ms</p> <p>M2[1] 37.72 dBμV 2.356480000 GHz</p> <p>Limit Check: Line Limit-L 54, PASS M1[1], PASS</p> <p>Start 2.31 GHz Stop 2.44 GHz</p> <p>Date: 9.OCT.2015 17:17:44</p>	<p>Note: (no need if PK value less than the AV limit)</p>
<p>8DPSK-Hopping Left-AV</p>	<p>8DPSK-Hopping Right-AV</p>



6.8 AC Power Line Conducted Emissions

Temperature	22°C
Relative Humidity	51%
Atmospheric Pressure	1009mbar
Test date :	October 09, 2015
Tested By :	Winnie Zhang

Requirement(s):

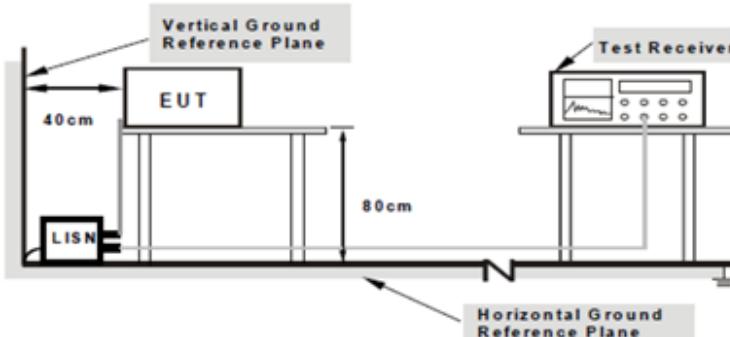
Spec	Item	Requirement	Applicable														
47CFR§15.207, RSS210 (A8.1)	a)	<p>For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 [mu]H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequencies ranges.</p> <table border="1"> <thead> <tr> <th rowspan="2">Frequency ranges (MHz)</th> <th colspan="2">Limit (dBμV)</th> </tr> <tr> <th>QP</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15 ~ 0.5</td> <td>66 – 56</td> <td>56 – 46</td> </tr> <tr> <td>0.5 ~ 5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5 ~ 30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>	Frequency ranges (MHz)	Limit (dB μ V)		QP	Average	0.15 ~ 0.5	66 – 56	56 – 46	0.5 ~ 5	56	46	5 ~ 30	60	50	<input checked="" type="checkbox"/>
Frequency ranges (MHz)	Limit (dB μ V)																
	QP	Average															
0.15 ~ 0.5	66 – 56	56 – 46															
0.5 ~ 5	56	46															
5 ~ 30	60	50															
Test Setup	 <p>Note: 1. Support units were connected to second LISN. 2. Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.</p>																
Procedure	<ol style="list-style-type: none"> The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table. The power supply for the EUT was fed through a 50W/50mH EUT LISN, connected to filtered mains. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss 																

	coaxial cable. 4. All other supporting equipment were powered separately from another main supply. 5. The EUT was switched on and allowed to warm up to its normal operating condition. 6. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver. 7. High peaks, relative to the limit line, The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 kHz. 8. Step 7 was then repeated for the LIVE line (for AC mains) or DC line (for DC power).
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A

Test Plot Yes (See below) N/A

Test Mode: Bluetooth Mode

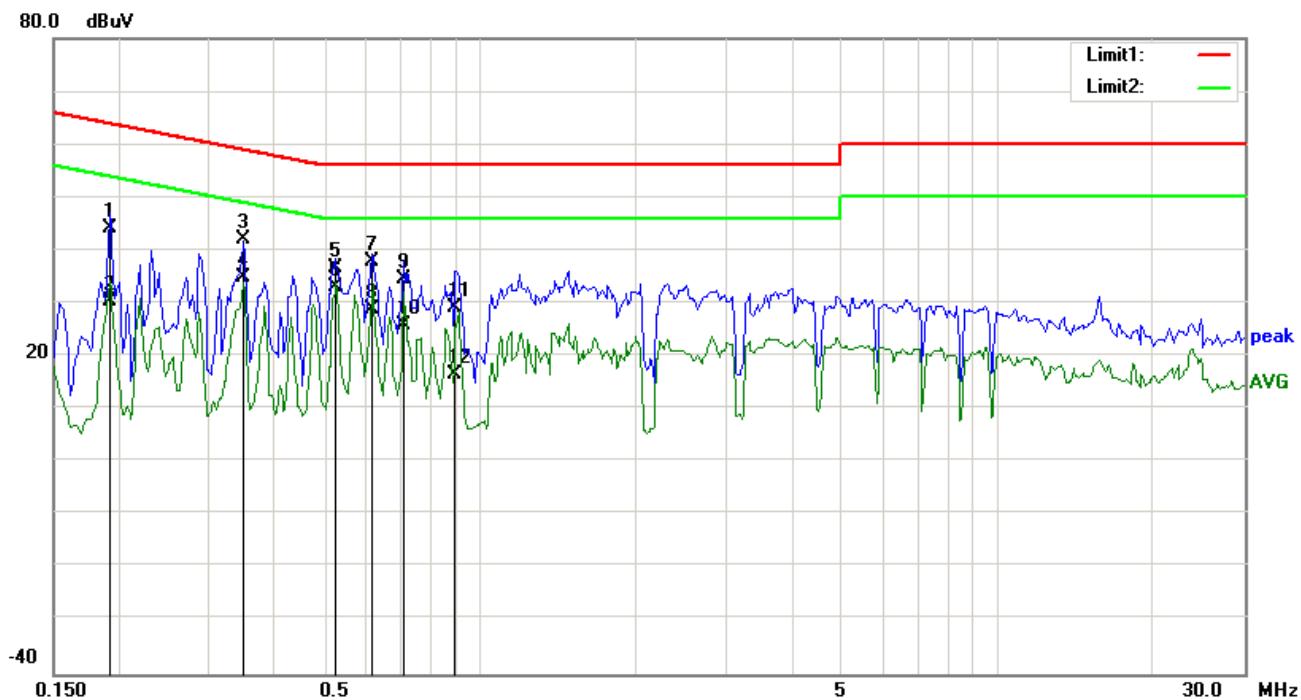


Test Data

Phase Line Plot at 120Vac, 60Hz

No.	P/L	Frequency (MHz)	Reading (dBuV)	Detector	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)
1	L1	0.1929	34.01	QP	10.03	44.04	63.91	-19.87
2	L1	0.1929	20.47	AVG	10.03	30.50	53.91	-23.41
3	L1	0.3489	31.99	QP	10.03	42.02	58.99	-16.97
4	L1	0.3489	24.81	AVG	10.03	34.84	48.99	-14.15
5	L1	0.5244	26.57	QP	10.03	36.60	56.00	-19.40
6	L1	0.5244	23.02	AVG	10.03	33.05	46.00	-12.95
7	L1	0.6180	27.75	QP	10.03	37.78	56.00	-18.22
8	L1	0.6180	18.94	AVG	10.03	28.97	46.00	-17.03
9	L1	0.7155	24.55	QP	10.03	34.58	56.00	-21.42
10	L1	0.7155	15.93	AVG	10.03	25.96	46.00	-20.04
11	L1	0.8988	19.14	QP	10.03	29.17	56.00	-26.83
12	L1	0.8988	6.47	AVG	10.03	16.50	46.00	-29.50

Test Mode: Bluetooth Mode

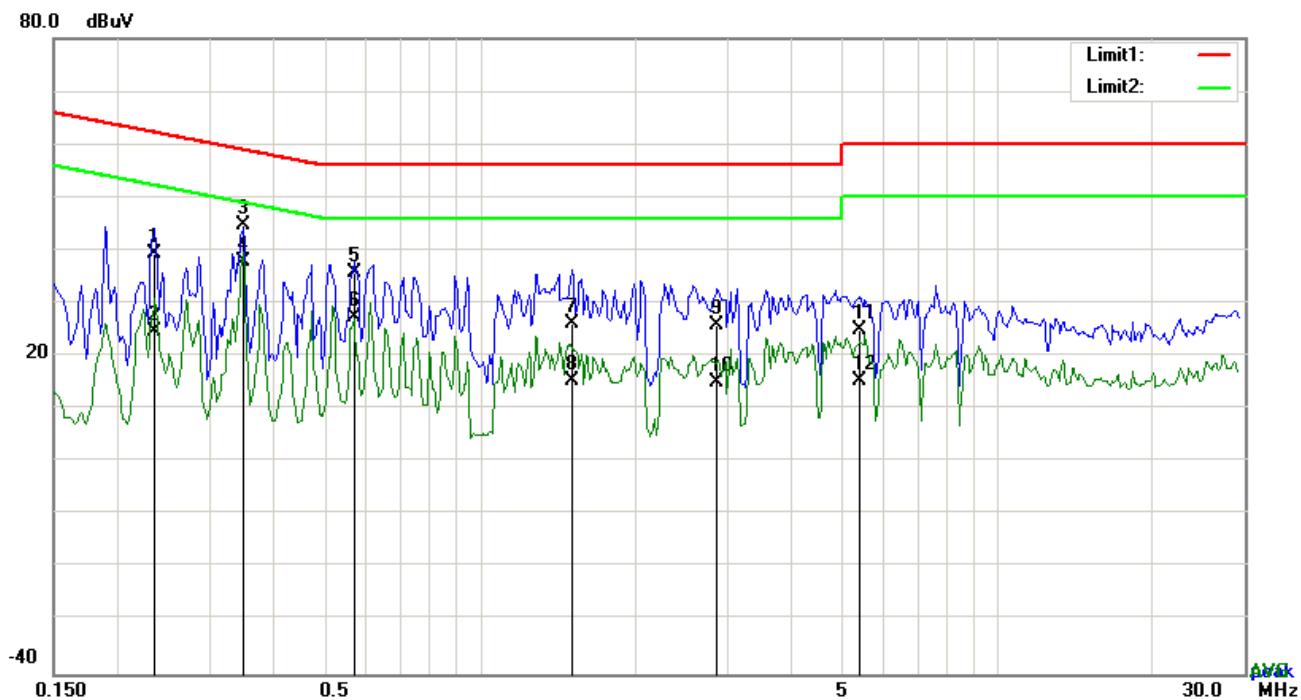


Test Data

Phase Neutral Plot at 120Vac, 60Hz

No.	P/L	Frequency (MHz)	Reading (dBuV)	Detector	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)
1	N	0.2358	29.29	QP	10.02	39.31	62.24	-22.93
2	N	0.2358	14.66	AVG	10.02	24.68	52.24	-27.56
3	N	0.3489	34.68	QP	10.02	44.70	58.99	-14.29
4	N	0.3489	27.71	AVG	10.02	37.73	48.99	-11.26
5	N	0.5712	25.70	QP	10.02	35.72	56.00	-20.28
6	N	0.5712	17.27	AVG	10.02	27.29	46.00	-18.71
7	N	1.5072	16.25	QP	10.04	26.29	56.00	-29.71
8	N	1.5072	5.22	AVG	10.04	15.26	46.00	-30.74
9	N	2.8761	15.75	QP	10.05	25.80	56.00	-30.20
10	N	2.8761	5.03	AVG	10.05	15.08	46.00	-30.92
11	N	5.4297	14.82	QP	10.08	24.90	60.00	-35.10
12	N	5.4297	5.22	AVG	10.08	15.30	50.00	-34.70


Test Mode: Bluetooth Mode

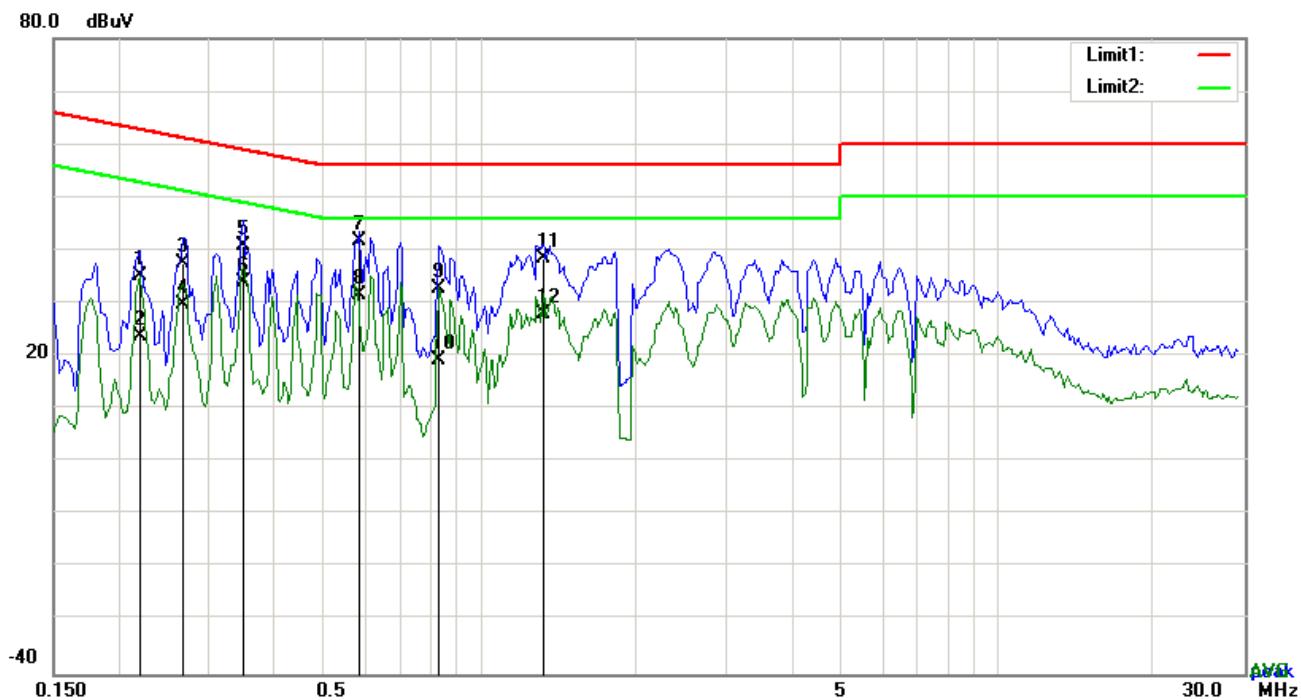

Test Data

Phase Line Plot at 240Vac, 60Hz

No.	P/L	Frequency (MHz)	Reading (dBuV)	Detector	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)
1	L1	0.2202	25.13	QP	10.03	35.16	62.81	-27.65
2	L1	0.2202	13.73	AVG	10.03	23.76	52.81	-29.05
3	L1	0.2670	27.62	QP	10.03	37.65	61.21	-23.56
4	L1	0.2670	19.82	AVG	10.03	29.85	51.21	-21.36
5	L1	0.3489	30.82	QP	10.03	40.85	58.99	-18.14
6	L1	0.3489	23.81	AVG	10.03	33.84	48.99	-15.15
7	L1	0.5829	31.84	QP	10.03	41.87	56.00	-14.13
8	L1	0.5829	21.67	AVG	10.03	31.70	46.00	-14.30
9	L1	0.8325	22.71	QP	10.03	32.74	56.00	-23.26
10	L1	0.8325	9.24	AVG	10.03	19.27	46.00	-26.73
11	L1	1.3239	28.47	QP	10.03	38.50	56.00	-17.50
12	L1	1.3239	17.98	AVG	10.03	28.01	46.00	-17.99

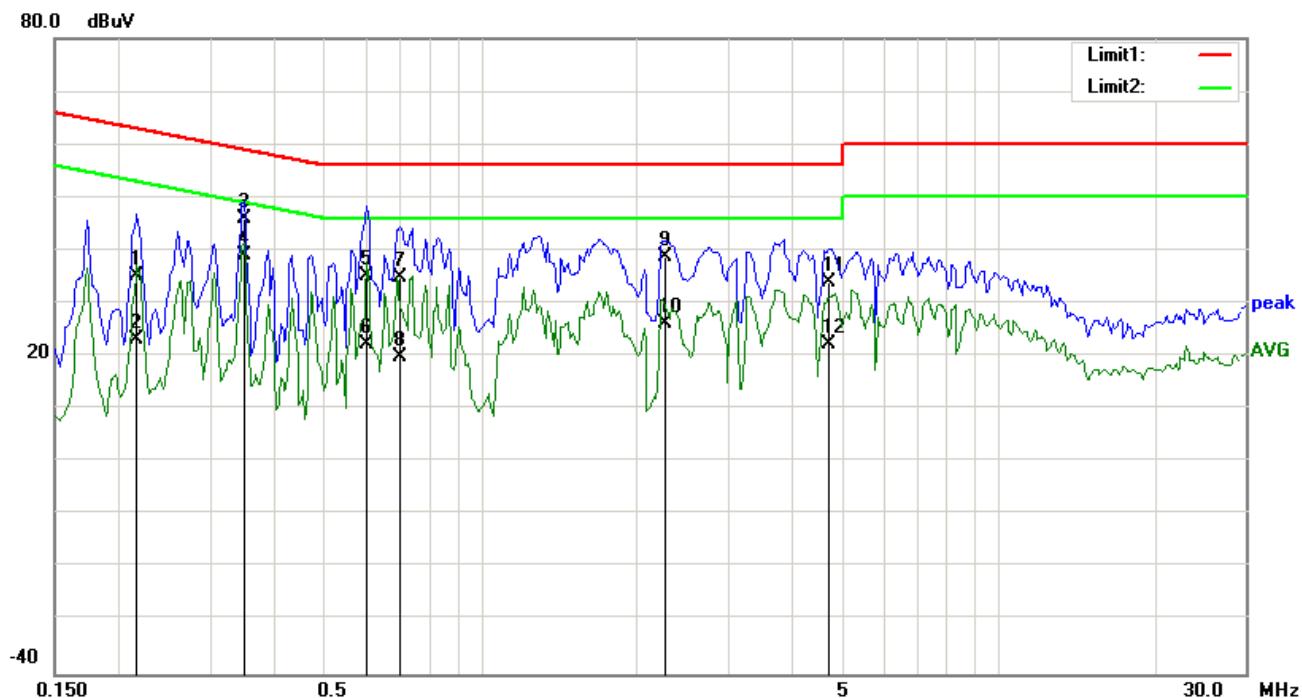
Test Mode: Bluetooth Mode

Test Data
Phase Neutral Plot at 240Vac, 60Hz

No.	P/L	Frequency (MHz)	Reading (dBuV)	Detector	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)
1	N	0.2163	25.23	QP	10.02	35.25	62.96	-27.71
2	N	0.2163	13.27	AVG	10.02	23.29	52.96	-29.67
3	N	0.3489	35.94	QP	10.02	45.96	58.99	-13.03
4	N	0.3489	29.05	AVG	10.02	39.07	48.99	-9.92
5	N	0.6024	25.08	QP	10.02	35.10	56.00	-20.90
6	N	0.6024	12.26	AVG	10.02	22.28	46.00	-23.72
7	N	0.6999	24.75	QP	10.02	34.77	56.00	-21.23
8	N	0.6999	9.91	AVG	10.02	19.93	46.00	-26.07
9	N	2.2755	28.70	QP	10.04	38.74	56.00	-17.26
10	N	2.2755	16.16	AVG	10.04	26.20	46.00	-19.80
11	N	4.7082	23.98	QP	10.07	34.05	56.00	-21.95
12	N	4.7082	12.26	AVG	10.07	22.33	46.00	-23.67

6.9 Radiated Emissions

Temperature	22°C
Relative Humidity	51%
Atmospheric Pressure	1009mbar
Test date :	October 09, 2015
Tested By :	Winnie Zhang

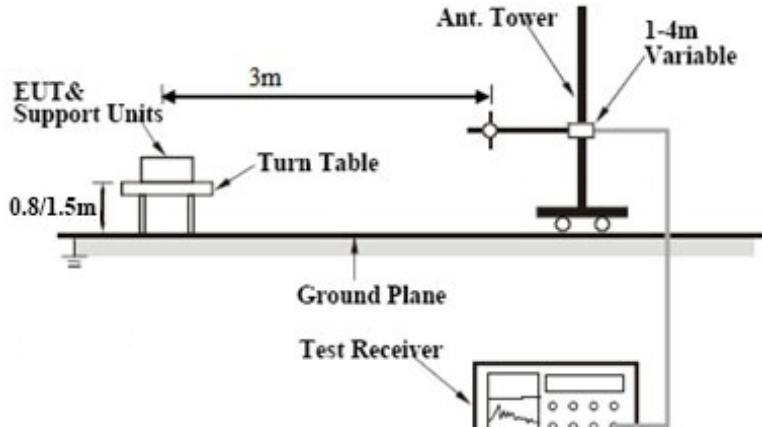Requirement(s):

Spec	Item	Requirement	Applicable										
47CFR§15.205, §15.209, §15.247(d)	a)	<p>Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges</p> <table border="1"> <thead> <tr> <th>Frequency range (MHz)</th> <th>Field Strength (μV/m)</th> </tr> </thead> <tbody> <tr> <td>30 – 88</td> <td>100</td> </tr> <tr> <td>88 – 216</td> <td>150</td> </tr> <tr> <td>216 – 960</td> <td>200</td> </tr> <tr> <td>Above 960</td> <td>500</td> </tr> </tbody> </table>	Frequency range (MHz)	Field Strength (μ V/m)	30 – 88	100	88 – 216	150	216 – 960	200	Above 960	500	<input checked="" type="checkbox"/>
Frequency range (MHz)	Field Strength (μ V/m)												
30 – 88	100												
88 – 216	150												
216 – 960	200												
Above 960	500												
Test Setup		 <p>The diagram illustrates the test setup for radiated emissions. A 'Turn Table' is positioned on a 'Ground Plane'. A 'EUT & Support Units' is mounted on the turn table. A 'Ant. Tower' is connected to the EUT and is height-adjustable, with a range of '1-4m Variable'. A 'Test Receiver' is connected to the Ant. Tower. The distance between the EUT and the Ant. Tower is indicated as '3m'.</p>											
Procedure		<ol style="list-style-type: none"> 1. The EUT was switched on and allowed to warm up to its normal operating condition. 2. The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: <ol style="list-style-type: none"> a. Vertical or horizontal polarization (whichever gave the higher emission level over a full rotation of the EUT) was chosen. 											


	<p>b. The EUT was then rotated to the direction that gave the maximum emission.</p> <p>c. Finally, the antenna height was adjusted to the height that gave the maximum emission.</p> <p>3. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz.</p> <p>4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz.</p> <p>The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz.</p> <p>5. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.</p>
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A

Test Plot Yes (See below) N/A

Test Mode: Bluetooth Mode

Below 1GHz

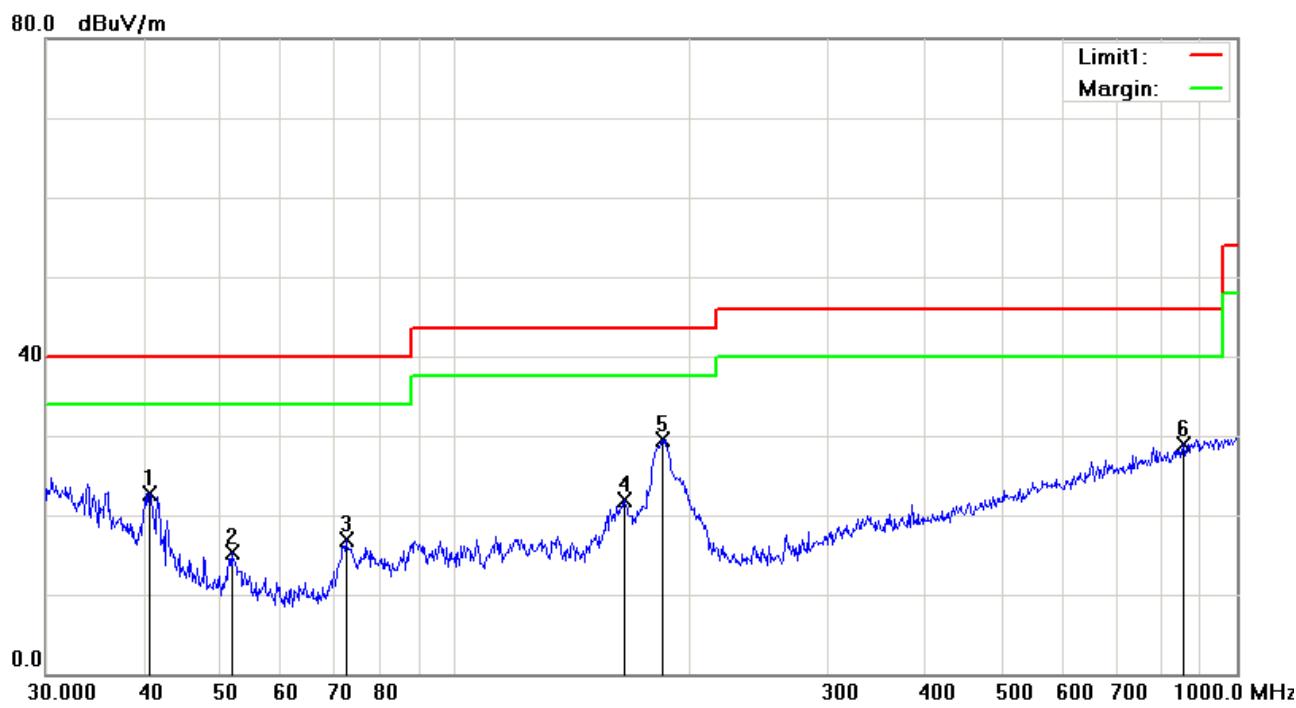


Test Data

Horizontal Polarity Plot @3m

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin	Height	Degree
		(MHz)	(dBuV/m)		(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	()
1	H	40.7016	30.83	peak	-8.06	22.77	40.00	-17.23	100	342
2	H	51.8430	28.67	peak	-13.40	15.27	40.00	-24.73	100	210
3	H	72.5917	30.57	peak	-13.67	16.90	40.00	-23.10	100	184
4	H	164.9075	30.58	peak	-8.68	21.90	43.50	-21.60	100	255
5	H	184.4898	39.12	peak	-9.59	29.53	43.50	-13.97	100	113
6	H	854.0247	24.97	peak	3.88	28.85	46.00	-17.15	100	98

Below 1GHz

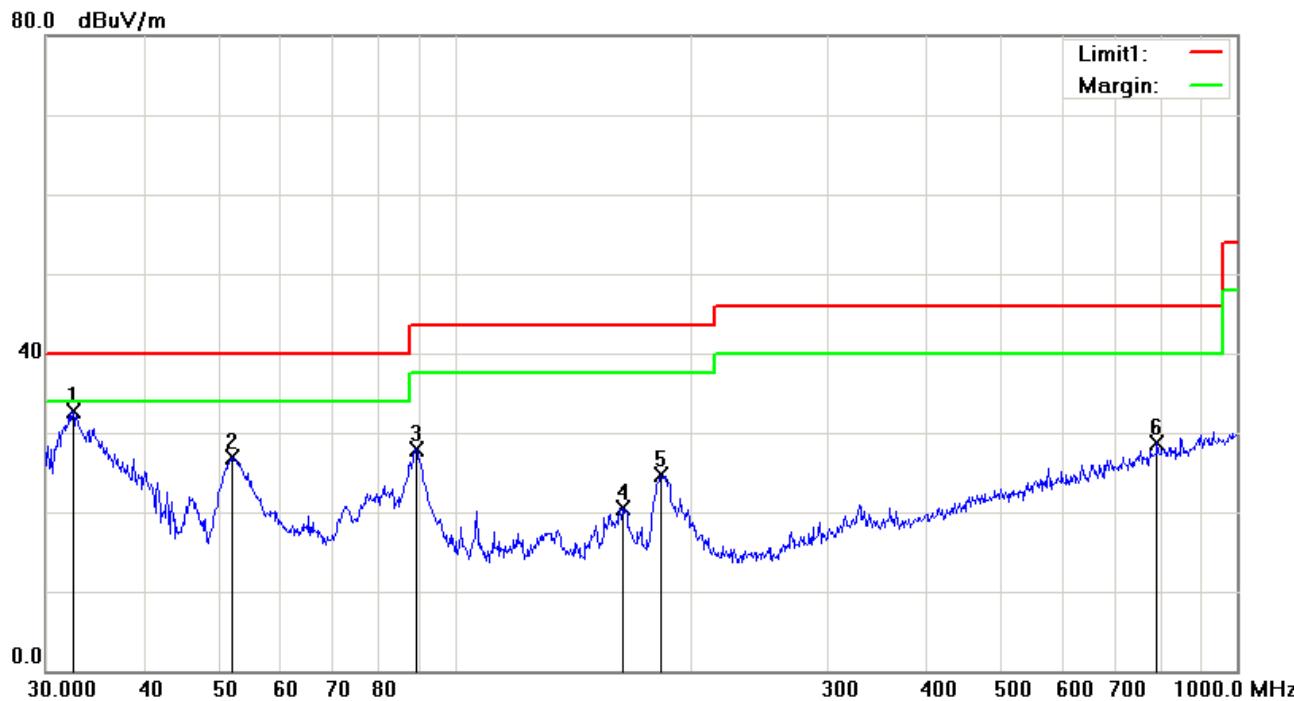

Test Data

Vertical Polarity Plot @3m

No.	P/L	Frequency (MHz)	Reading (dBuV/ m)	Detector	Corrected (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree
1	V	32.5198	34.81	peak	-2.11	32.70	40.00	-7.30	100	220
2	V	51.8430	40.38	peak	-13.40	26.98	40.00	-13.02	100	216
3	V	89.2764	41.35	peak	-13.39	27.96	43.50	-15.54	100	137
4	V	164.3302	29.19	peak	-8.64	20.55	43.50	-22.95	100	160
5	V	183.2005	34.40	peak	-9.67	24.73	43.50	-18.77	100	197
6	V	790.6188	25.64	peak	3.06	28.70	46.00	-17.30	100	212

Test Mode:	Transmitting Mode
------------	-------------------

Mode: GFSK (Worst Case)

Low Channel (2402 MHz)

Frequency (MHz)	S.A. Reading (dB μ V)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
4804	38.25	AV	V	33.83	6.86	31.72	47.22	54	-6.78
4804	37.81	AV	H	33.83	6.86	31.72	46.78	54	-7.22
4804	46.27	PK	V	33.83	6.86	31.72	55.24	74	-18.76
4804	45.93	PK	H	33.83	6.86	31.72	54.9	74	-19.10

Middle Channel (2441 MHz)

Frequency (MHz)	S.A. Reading (dB μ V)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
4882	38.31	AV	V	33.86	6.82	31.82	47.17	54	-6.83
4882	37.86	AV	H	33.86	6.82	31.82	46.72	54	-7.28
4882	46.35	PK	V	33.86	6.82	31.82	55.21	74	-18.79
4882	45.98	PK	H	33.86	6.82	31.82	54.84	74	-19.16

High Channel (2480 MHz)


Frequency (MHz)	S.A. Reading (dB μ V)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
4960	38.28	AV	V	33.9	6.76	31.92	47.02	54	-6.98
4960	37.94	AV	H	33.9	6.76	31.92	46.68	54	-7.32
4960	46.23	PK	V	33.9	6.76	31.92	54.97	74	-19.03
4960	45.86	PK	H	33.9	6.76	31.92	54.6	74	-19.40


Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due	In use
AC Line Conducted					
EMI test receiver	ESCS30	8471241027	09/17/2015	09/16/2016	<input checked="" type="checkbox"/>
Line Impedance	LI-125A	191106	09/25/2015	09/24/2016	<input checked="" type="checkbox"/>
Line Impedance	LI-125A	191107	09/25/2015	09/24/2016	<input checked="" type="checkbox"/>
LISN	ISN T800	34373	09/25/2015	09/24/2016	<input checked="" type="checkbox"/>
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/24/2015	09/23/2016	<input checked="" type="checkbox"/>
Transient Limiter	LIT-153	531118	09/01/2015	08/31/2016	<input checked="" type="checkbox"/>
RF conducted test					
Agilent ESA-E SERIES	E4407B	MY45108319	09/17/2015	09/16/2016	<input checked="" type="checkbox"/>
Power Splitter	1#	1#	09/01/2015	08/31/2016	<input checked="" type="checkbox"/>
DC Power Supply	E3640A	MY40004013	09/17/2015	09/16/2016	<input checked="" type="checkbox"/>
Radiated Emissions					
EMI test receiver	ESL6	100262	09/17/2015	09/16/2016	<input checked="" type="checkbox"/>
Positioning Controller	UC3000	MF780208282	11/20/2014	11/19/2015	<input checked="" type="checkbox"/>
OPT 010 AMPLIFIER (0.1-1300MHz)	8447E	2727A02430	09/01/2015	08/31/2016	<input checked="" type="checkbox"/>
Microwave Preamplifier (1 ~ 26.5GHz)	8449B	3008A02402	03/25/2015	03/24/2016	<input checked="" type="checkbox"/>
Bilog Antenna (30MHz~6GHz)	JB6	A110712	09/21/2015	09/20/2016	<input checked="" type="checkbox"/>
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/24/2015	09/23/2016	<input checked="" type="checkbox"/>
Universal Radio Communication Tester	CMU200	121393	09/25/2015	09/23/2016	<input checked="" type="checkbox"/>

Annex B. EUT And Test Setup Photographs

Annex B.i. Photograph: EUT External Photo

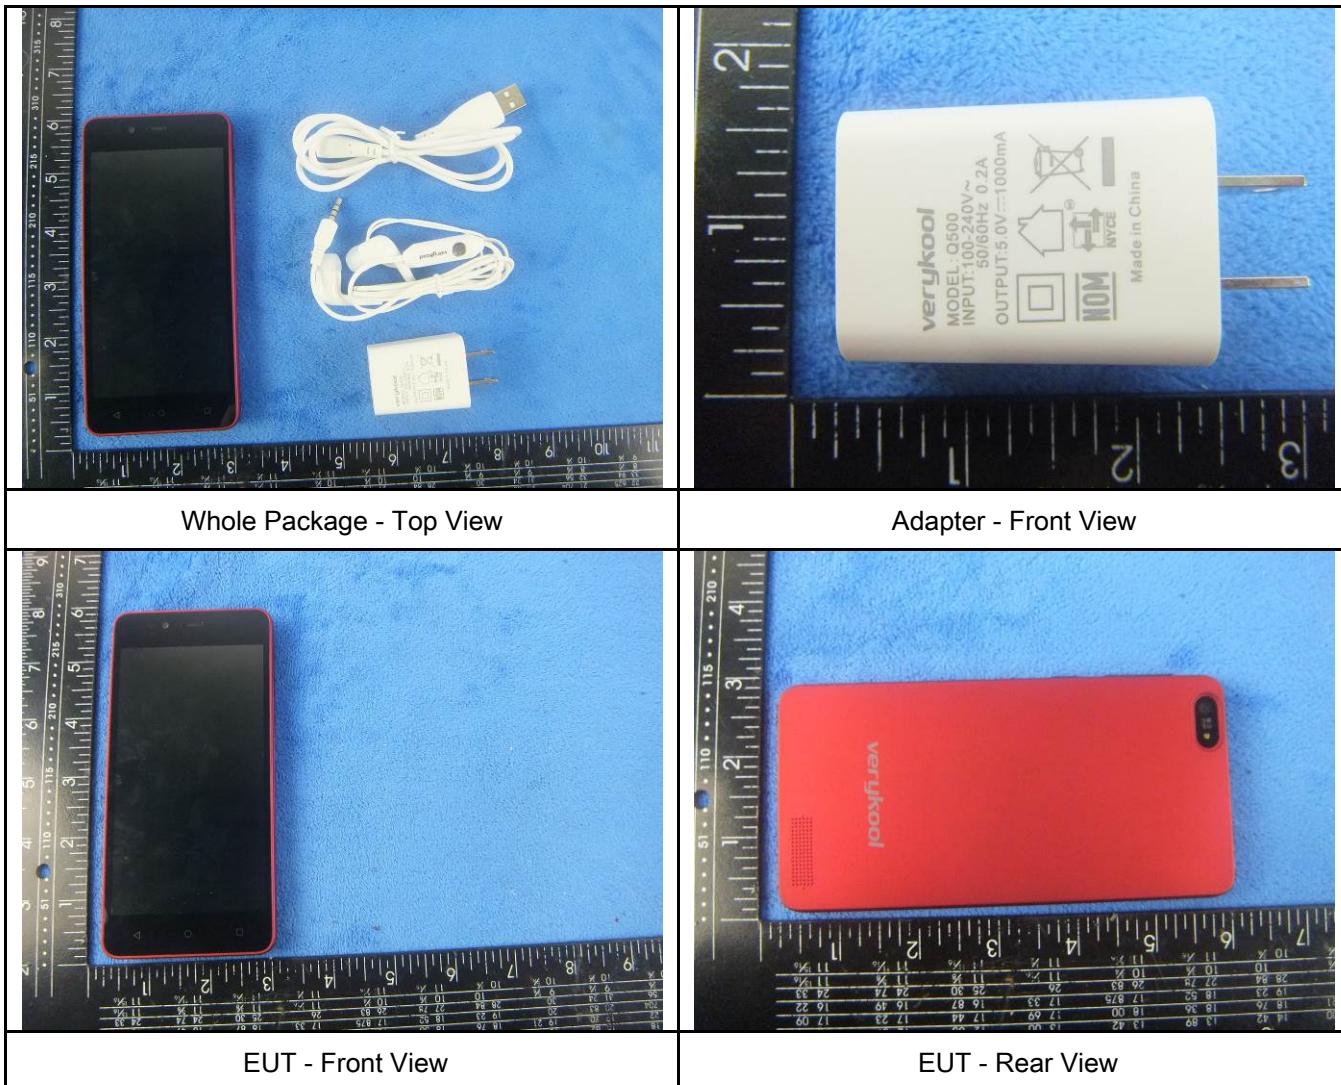


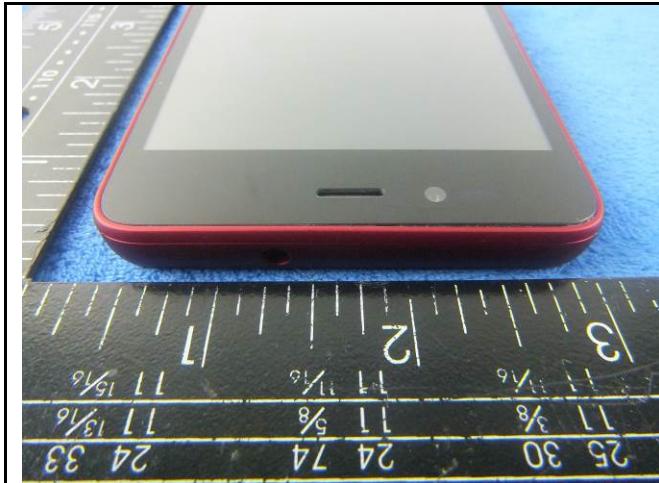


EUT - Top View



EUT - Bottom View

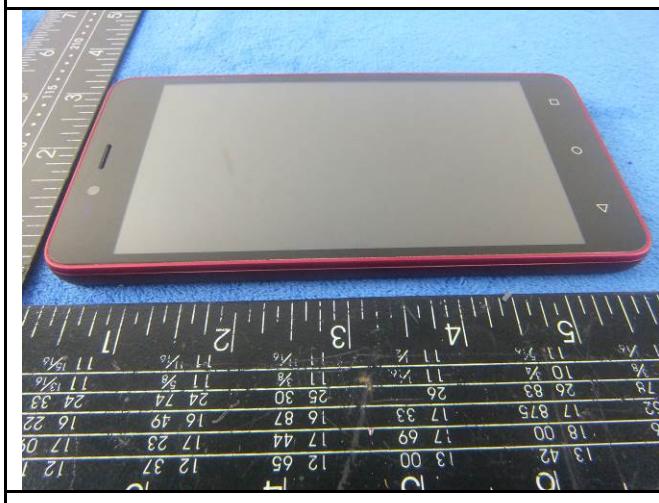


EUT - Left View

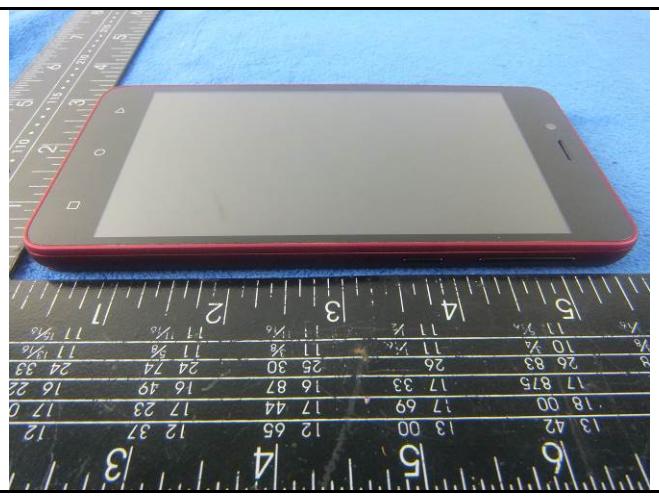


EUT - Right View

Annex B.ii. Photograph: EUT Internal Photo




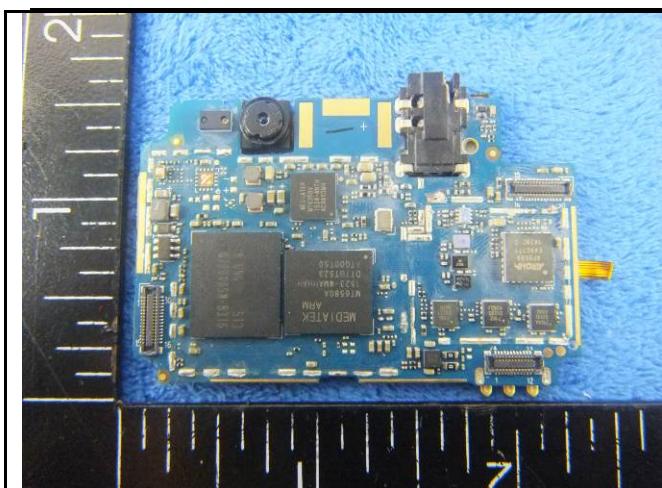


Mainborad Without Shielding - Front View

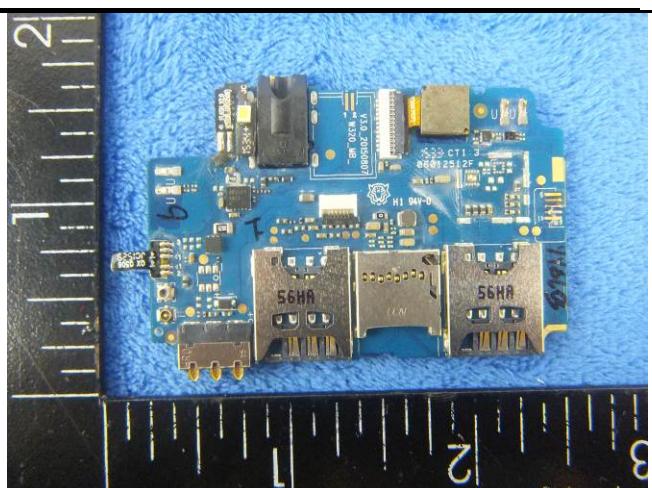


Mainborad Without Shielding - Rear View

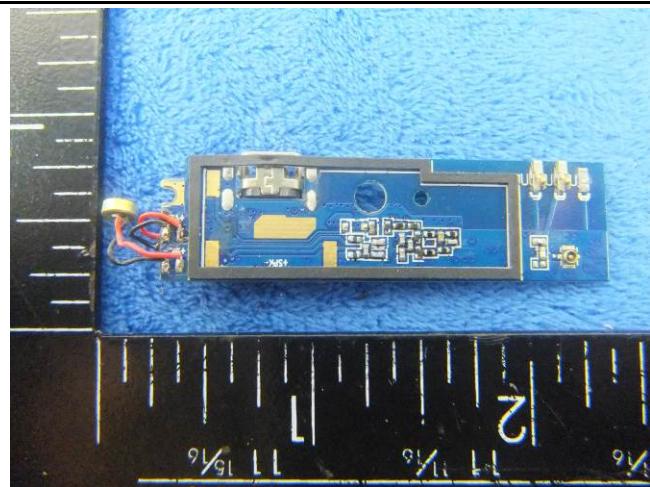


Small board - Front View

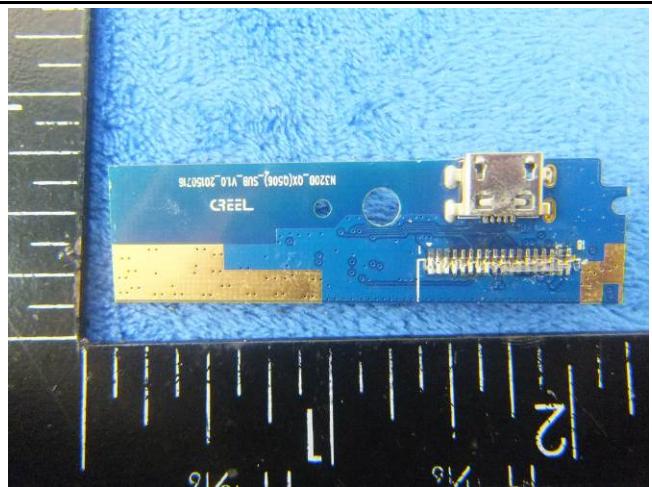

Small board - Rear View

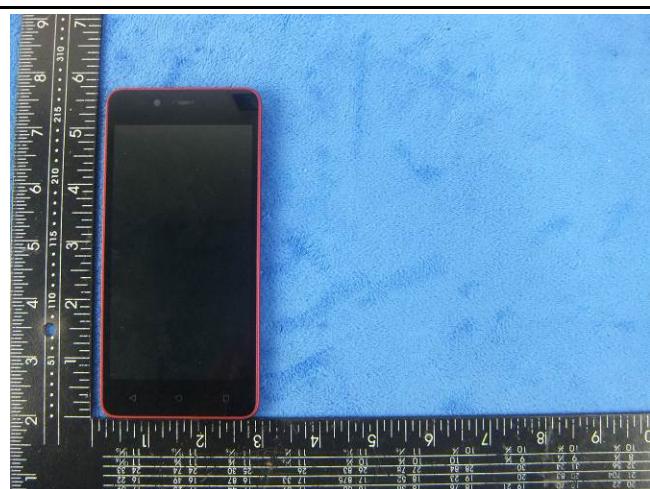

LCD – Front View

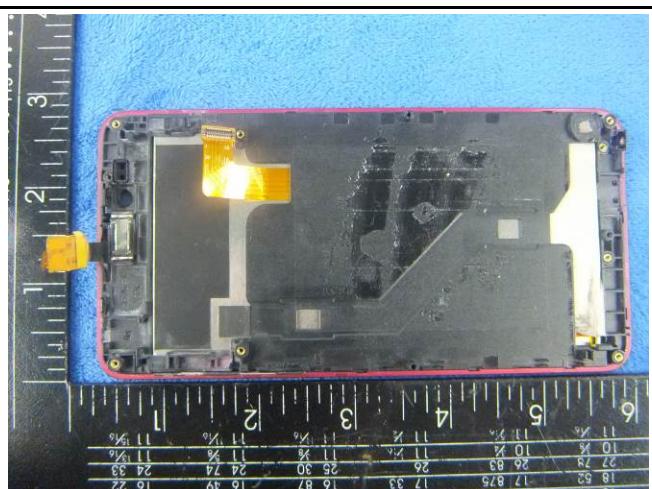


LCD – Rear View





GSM/PCS/UMTS-FDD Antenna View

WIFI/BT/BLE - Antenna View

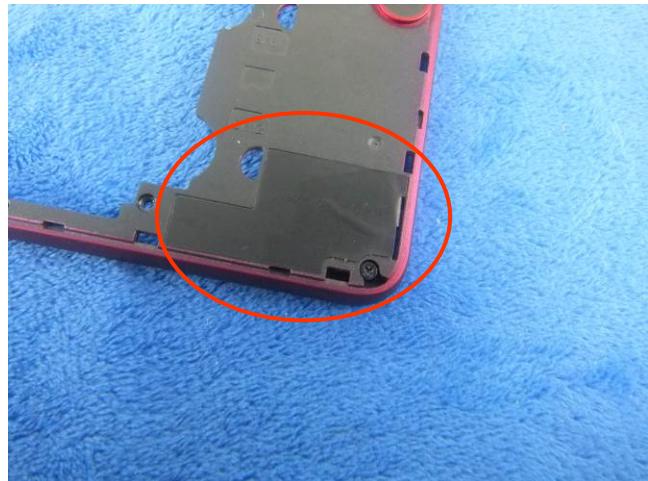

GPS - Antenna View


Annex B.iii. Photograph: Test Setup Photo

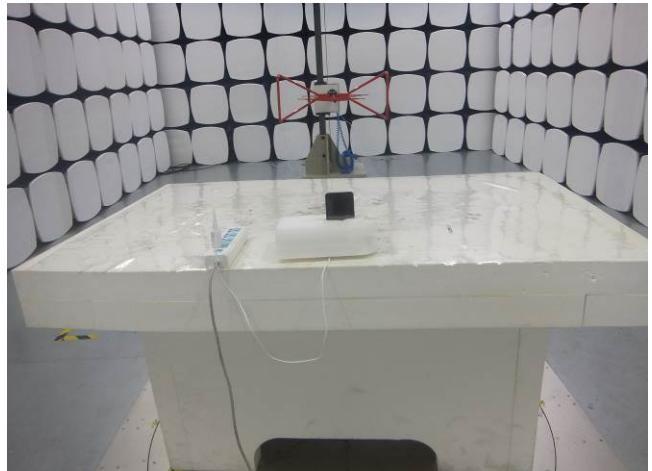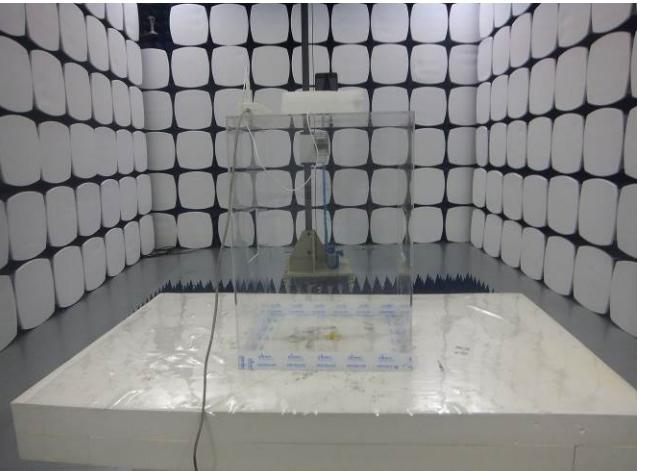 A photograph showing a wooden table in a test chamber. A smartphone is placed on a white rectangular block on the table. A power strip with multiple cables is also on the table. The floor of the chamber is grey.	 A photograph showing the side view of the conducted emissions test setup. The wooden table and the smartphone on the white block are visible. The background shows the interior of the test chamber.
Conducted Emissions Test Setup Front View	Conducted Emissions Test Setup Side View
 A photograph showing the radiated spurious emissions test setup below 1GHz. A smartphone is mounted on a red tripod in the center of a white rectangular test area. The background is a black and white grid pattern.	 A photograph showing the radiated spurious emissions test setup above 1GHz. A smartphone is mounted on a clear tripod in the center of a white rectangular test area. The background is a black and white grid pattern.
Radiated Spurious Emissions Test Setup Below 1GHz	Radiated Spurious Emissions Test Setup Above 1GHz


Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

Annex C.ii. TEST SET UP BLOCK


Block Configuration Diagram for AC Line Conducted Emissions

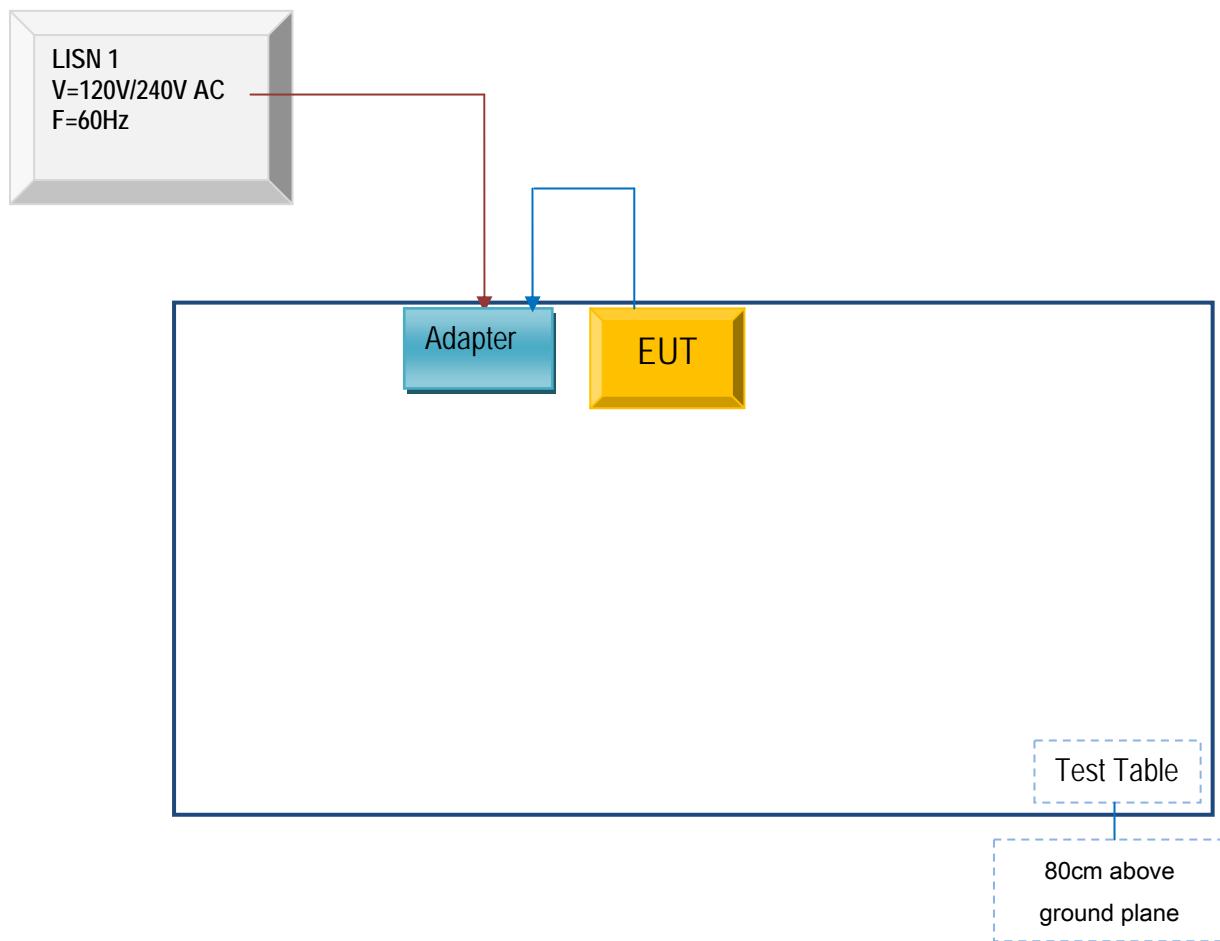

Block Configuration Diagram for Radiated Emissions (Below 1GHz) .

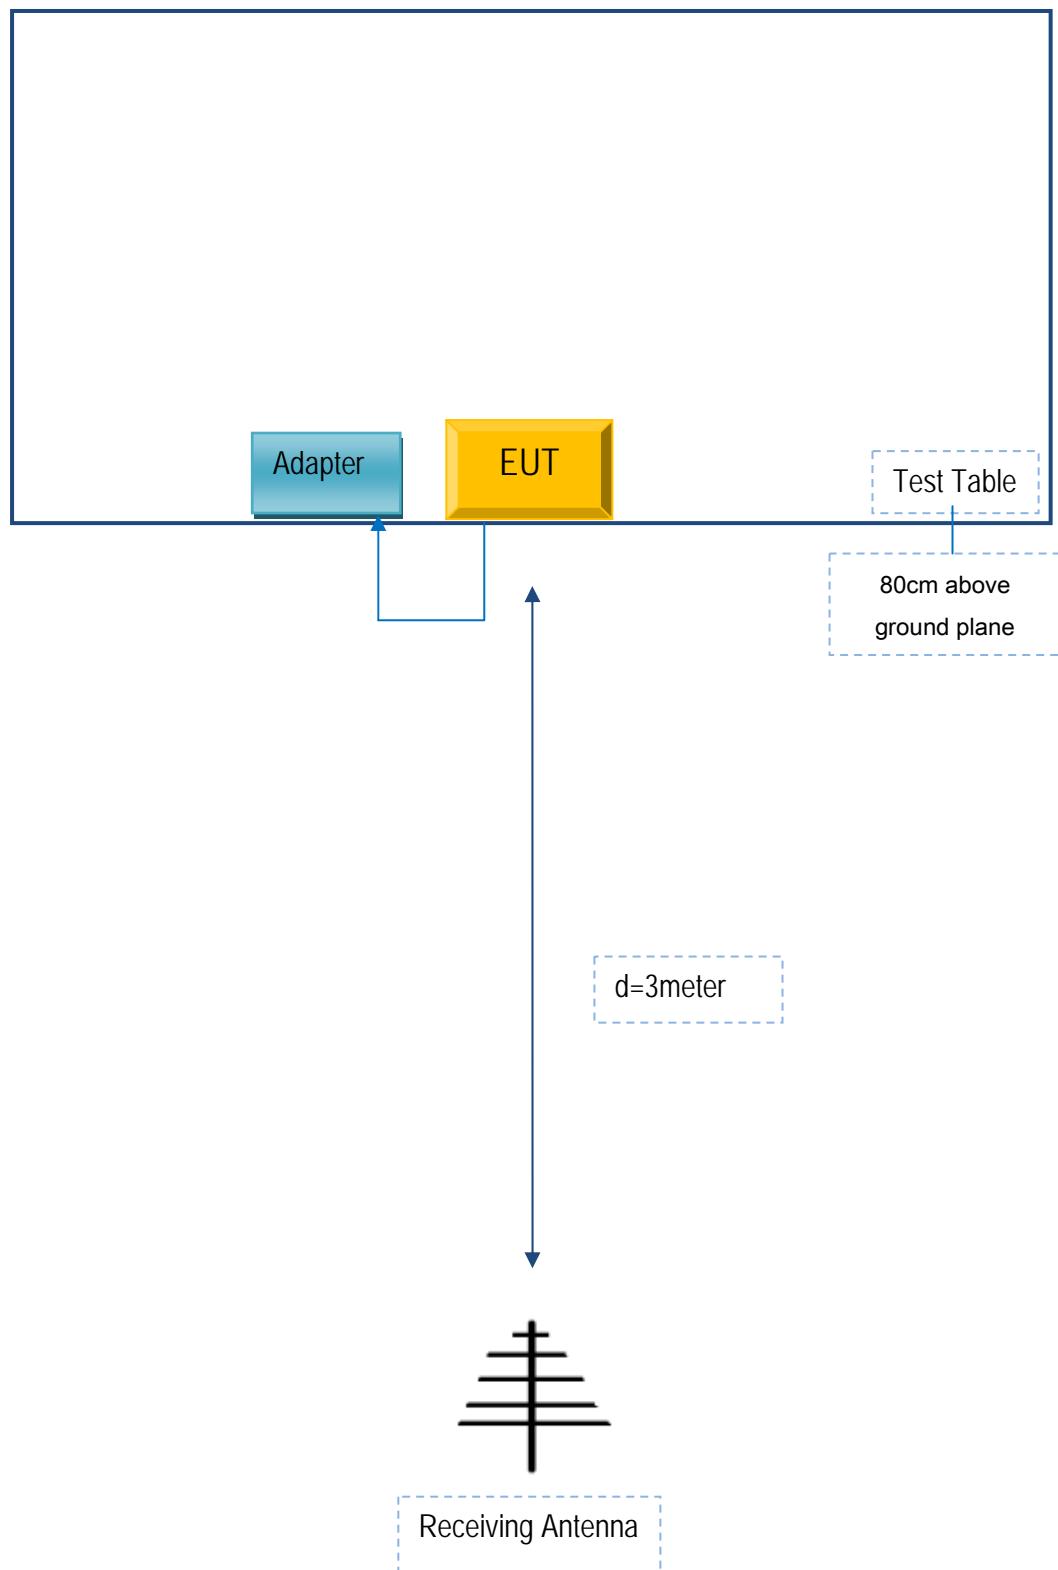

Block Configuration Diagram for Radiated Emissions (Above 1GHz) .

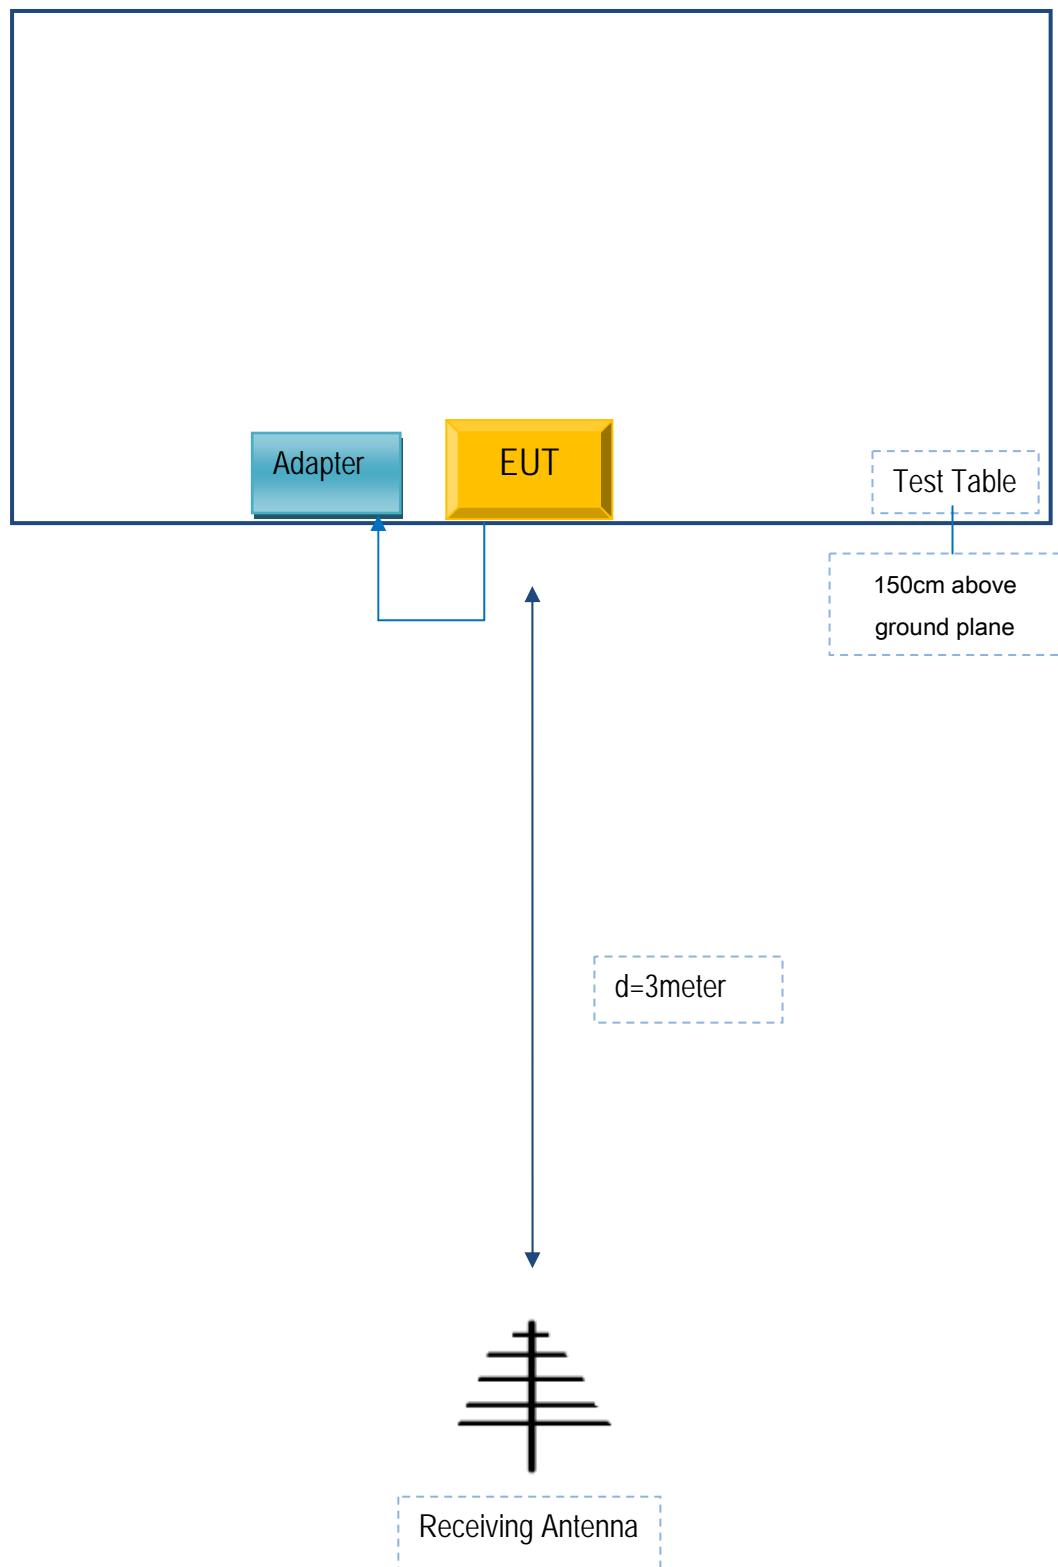

Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Manufacturer	Equipment Description	Model	Calibration Date	Calibration Due Date
N/A	N/A	N/A	N/A	N/A

Annex D. User Manual / Block Diagram / Schematics / Partlist

Please see attachment

Annex E. DECLARATION OF SIMILARITY

N/A