


RF TEST REPORT



Report No.: 17070833-FCC-R4

Supersede Report No.: N/A

Applicant	Verykool USA Inc	
Product Name	Mobile phone	
Model No.	s5205	
Serial No.	s5204	
Test Standard	FCC Part 15.247: 2016, ANSI C63.10: 2013	
Test Date	September 02 to 14, 2017	
Issue Date	September 15, 2017	
Test Result	☒ Pass ☐ Fail	
Equipment complied with the specification ☒		
Equipment did not comply with the specification ☐		
		
Loren Luo Test Engineer	David Huang Checked By	
This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only		

Issued by:

SIEMIC (SHENZHEN-CHINA) LABORATORIES

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park

South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108

Phone: +86 0755 2601 4629801 Email: China@siemic.com.cn

Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

Test Report No.	17070833-FCC-R4
Page	3 of 49

This page has been left blank intentionally.

CONTENTS

1. REPORT REVISION HISTORY.....	5
2. CUSTOMER INFORMATION	5
3. TEST SITE INFORMATION	5
4. EQUIPMENT UNDER TEST (EUT) INFORMATION	6
5. TEST SUMMARY	8
6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	9
6.1 ANTENNA REQUIREMENT.....	9
6.2 DTS (6 DB) CHANNEL BANDWIDTH	10
6.3 MAXIMUM OUTPUT POWER	12
6.4 POWER SPECTRAL DENSITY.....	14
6.5 BAND-EDGE & UNWANTED EMISSIONS INTO RESTRICTED FREQUENCY BANDS	16
6.6 AC POWER LINE CONDUCTED EMISSIONS.....	19
6.7 RADIATED EMISSIONS & RESTRICTED BAND	25
ANNEX A. TEST INSTRUMENT	32
ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS.....	33
ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT.....	44
ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST	48
ANNEX E. DECLARATION OF SIMILARITY.....	49

1. Report Revision History

Report No.	Report Version	Description	Issue Date
17070833-FCC-R4	NONE	Original	September 15, 2017

2. Customer information

Applicant Name	Verykool USA Inc
Applicant Add	3636 Nobel Drive, Suite 325, San Diego, California 92122 United States
Manufacturer	Guizhou Fortuneship Technology Co., Ltd
Manufacturer Add	2nd Floor, Factory Building 4, Hi-Tech Industrial Park, Xinpu Economic Development Zone, Xinpu New District, Zunyi City, Guizhou Province, P. R. China

3. Test site information

Test Lab A:

Lab performing tests	SIEMIC (Shenzhen-China) LABORATORIES
Lab Address	Zone A, Floor 1, Building 2 Wan Ye Long Technology Park South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108
FCC Test Site No.	535293
IC Test Site No.	4842E-1
Test Software	Radiated Emission Program-To Shenzhen v2.0

Test Lab B:

Lab performing tests	SIEMIC (Nanjing-China) Laboratories
Lab Address	2-1 Longcang Avenue Yuhua Economic and Technology Development Park, Nanjing, China
FCC Test Site No.	694825
IC Test Site No.	4842B-1
Test Software	EZ_EMG(ver.lcp-03A1)

Note: We just perform Radiated Spurious Emission above 18GHz in the test Lab. B.

4. Equipment under Test (EUT) Information

Description of EUT:	Mobile phone
Main Model:	s5205
Serial Model:	s5204
Date EUT received:	September 01, 2017
Test Date(s):	September 02 to 14, 2017
Equipment Category :	DTS
Antenna Gain:	GSM850: -1.5dBi PCS1900: 0.5dBi UMTS-FDD Band V: -1.5dBi UMTS-FDD Band II: 0.5dBi WIFI: -2dBi Bluetooth/BLE: -2.3dBi GPS: -2.3dBi
Antenna Type:	PIFA antenna
Type of Modulation:	GSM / GPRS: GMSK EGPRS: GMSK, 8PSK UMTS-FDD: QPSK 802.11b/g/n: DSSS, OFDM Bluetooth: GFSK, π /4DQPSK, 8DPSK BLE: GFSK GPS: BPSK

RF Operating Frequency (ies):	GSM850 TX: 824.2 ~ 848.8 MHz; RX: 869.2 ~ 893.8 MHz
	PCS1900 TX: 1850.2 ~ 1909.8 MHz; RX: 1930.2 ~ 1989.8 MHz
	UMTS-FDD Band V TX: 826.4 ~ 846.6 MHz; RX: 871.4 ~ 891.6 MHz
	UMTS-FDD Band II TX: 1852.4 ~ 1907.6 MHz;
	RX: 1932.4 ~ 1987.6 MHz
	WIFI: 802.11b/g/n(20M): 2412-2462 MHz
	WIFI: 802.11n(40M): 2422-2452 MHz
Max. Output Power:	Bluetooth& BLE: 2402-2480 MHz
	GPS: 1575.42 MHz
Number of Channels:	GSM 850: 124CH
	PCS1900: 299CH
	UMTS-FDD Band V : 102CH
	UMTS-FDD Band II : 277CH
	WIFI :802.11b/g/n(20M): 11CH
	WIFI :802.11n(40M): 7CH
	Bluetooth: 79CH
Port:	BLE: 40CH
	GPS:1CH
Trade Name :	USB Port, Earphone Port
Input Power:	Adapter:
	Model: UAX-C05Y10-00A00
	Input: AC100-240V~50/60Hz,0.2A
	Output: DC 5.0V,1A
	Battery
	Model: 366073AR
	Spec: 3.7V, 2000mAh, 7.4Wh
FCC ID:	Limited charge voltage: 4.2V
	WA6S5205

5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.247 (a)(2)	DTS (6 dB) CHANNEL BANDWIDTH	Compliance
§15.247(b)(3)	Conducted Maximum Output Power	Compliance
§15.247(e)	Power Spectral Density	Compliance
§15.247(d)	Band-Edge & Unwanted Emissions into Restricted Frequency Bands	Compliance
§15.207 (a),	AC Power Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Radiated Emissions & Unwanted Emissions into Restricted Frequency Bands	Compliance

Measurement Uncertainty

Emissions		
Test Item	Description	Uncertainty
Band-Edge & Unwanted Emissions into Restricted Frequency Bands and Radiated Emissions & Unwanted Emissions into Restricted Frequency Bands	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+5.6dB/-4.5dB
-	-	-

6. Measurements, Examination And Derived Results

6.1 Antenna Requirement

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has 2 antennas:

A permanently attached PIFA antenna for Bluetooth/BLE/WIFI/GPS, the gain is -2.3dBi for Bluetooth/BLE, the gain is -2dBi for WIFI, the gain is -2.3dBi for GPS.


A permanently attached PIFA antenna for GSM/PCS/UMTS, the gain is -1.5dBi for GSM850, 0.5dBi for PCS1900, -1.5dBi for UMTS-FDD Band V, 0.5dBi for UMTS-FDD Band II.

The antenna meets up with the ANTENNA REQUIREMENT.

Result: Compliance.

6.2 DTS (6 dB) Channel Bandwidth

Temperature	25°C
Relative Humidity	53%
Atmospheric Pressure	1010mbar
Test date :	September 12, 2017
Tested By :	Loren Luo

Spec	Item	Requirement	Applicable
§ 15.247(a)(2)	a)	6dB BW ≥ 500kHz;	☒
RSS Gen(4.6.1)	b)	99% BW: For FCC reference only; required by IC.	☒
Test Setup	 Spectrum Analyzer EUT		
Test Procedure	558074 D01 DTS MEAS Guidance v03r03, 8.1 DTS bandwidth 6dB Emission bandwidth measurement procedure - Set RBW = 100 kHz. - Set the video bandwidth (VBW) ≥ 3 RBW. - Detector = Peak. - Trace mode = max hold. - Sweep = auto couple. - Allow the trace to stabilize. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.		
Remark			
Result	☒ Pass ☐ Fail		

Test Data ☒ Yes ☐ N/A


Test Plot ☒ Yes (See below) ☐ N/A

6dB Bandwidth measurement result


Test Data

CH	Frequency (MHz)	6dB Bandwidth (kHz)	99% Occupied Bandwidth (MHz)
Low	2402	718.9	1.0730
Mid	2440	716.8	1.0732
High	2480	717.9	1.0736


Test Plots

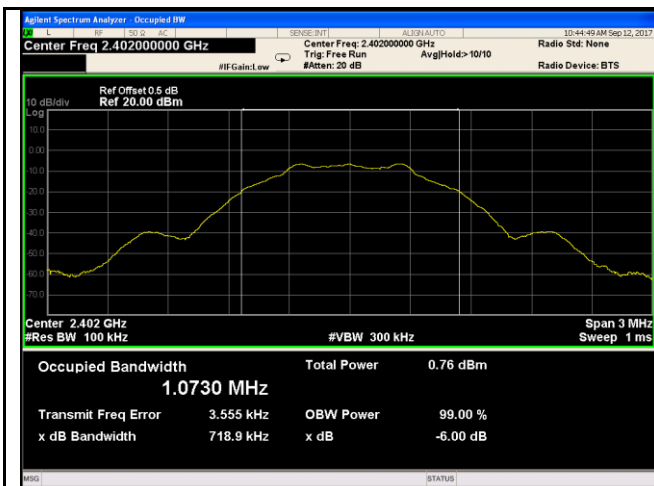

6dB Bandwidth - Low CH 2402

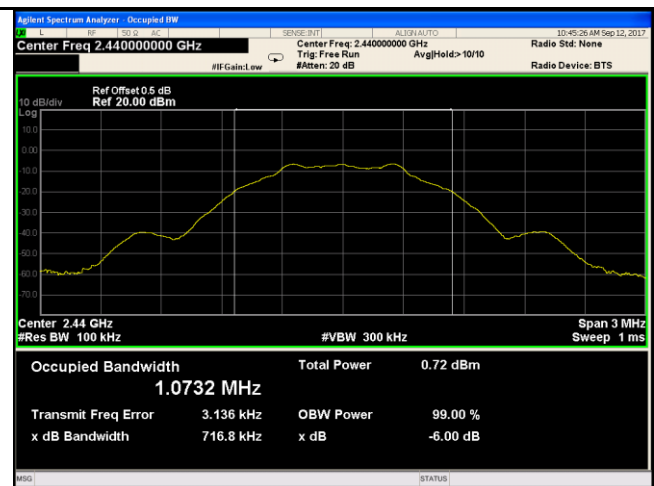

6dB Bandwidth - Mid CH 2440

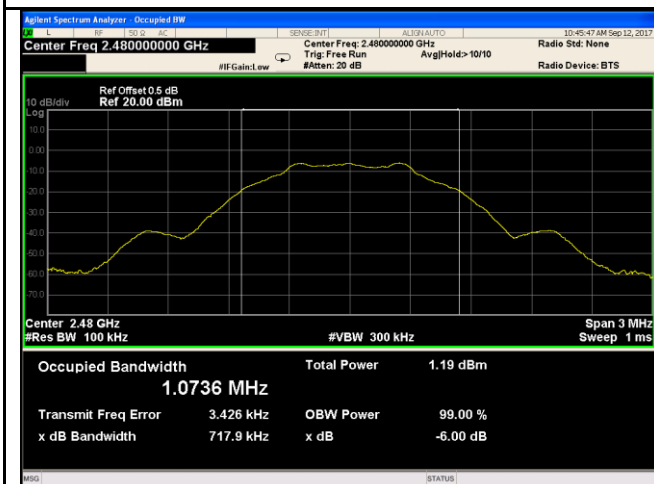


6dB Bandwidth - High CH 2480

6.3 Maximum Output Power

Temperature	25°C
Relative Humidity	53%
Atmospheric Pressure	1010mbar
Test date :	September 12, 2017
Tested By :	Loren Luo

Requirement(s):

Spec	Item	Requirement	Applicable
§15.247(b) (3),RSS210 (A8.4)	a)	FHSS in 2400-2483.5MHz with ≥ 75 channels: ≤ 1 Watt	☐
	b)	FHSS in 5725-5850MHz: ≤ 1 Watt	☐
	c)	For all other FHSS in the 2400-2483.5MHz band: ≤ 0.125 Watt.	☐
	d)	FHSS in 902-928MHz with ≥ 50 channels: ≤ 1 Watt	☐
	e)	FHSS in 902-928MHz with ≥ 25 & <50 channels: ≤ 0.25 Watt	☐
	f)	DTS in 902-928MHz, 2400-2483.5MHz: ≤ 1 Watt	☒
Test Setup	 Spectrum Analyzer EUT		
Test Procedure	558074 D01 DTS MEAS Guidance v03r03, 9.1.2 Integrated band power method Maximum output power measurement procedure a) Set the RBW $\geq$ DTS bandwidth. b) Set VBW $\geq 3 \times$ RBW. c) Set span $\geq 3 \times$ RBW d) Sweep time = auto couple. e) Detector = peak. f) Trace mode = max hold. g) Allow trace to fully stabilize. h) Use peak marker function to determine the peak amplitude level.		
Remark			
Result	☒ Pass ☐ Fail		

Test Data ☒ Yes ☐ N/A


Test Plot ☒ Yes (See below) ☐ N/A

Output Power measurement result


Test Data

Type	CH	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	Result
Output power	Low	2402	-5.480	30	Pass
	Mid	2440	-5.600	30	Pass
	High	2480	-5.231	30	Pass


Test Plots

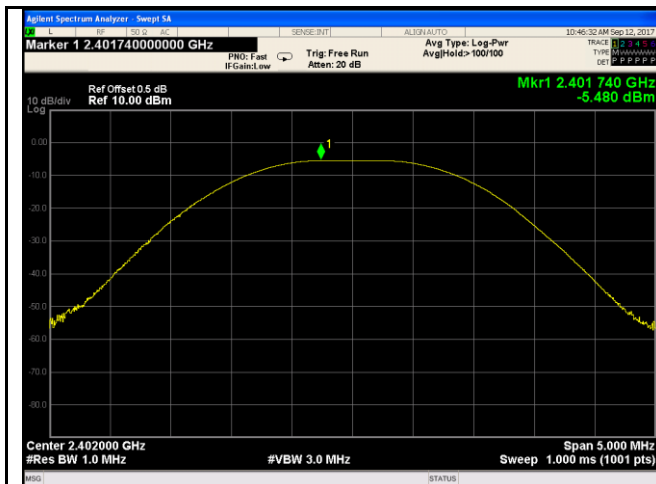

PK Output power - Low CH 2402

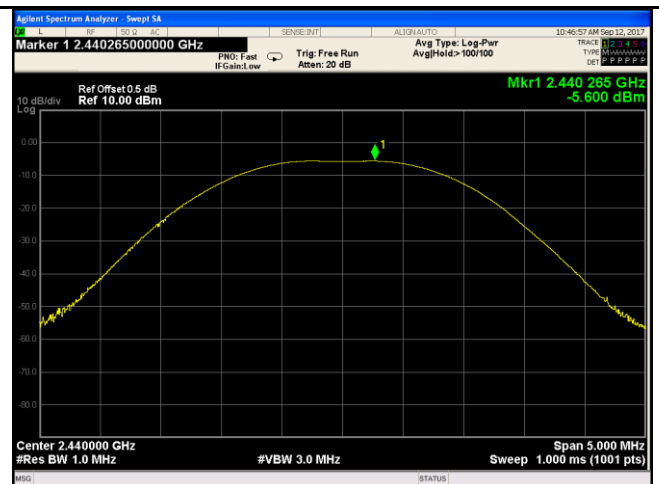


PK Output power - Mid CH 2440

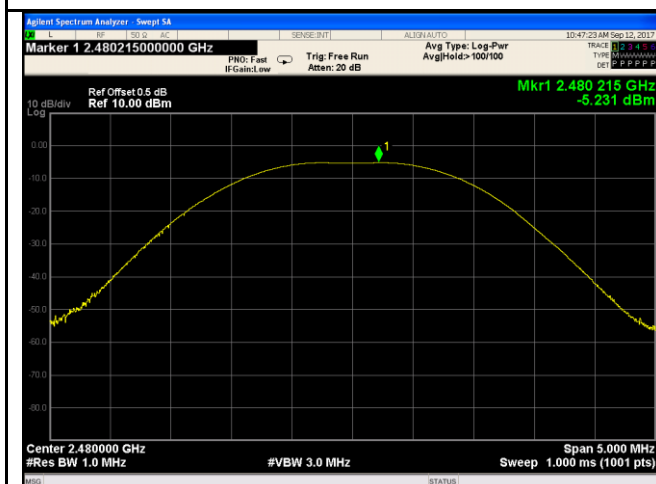

PK Output power - High CH 2480

6.4 Power Spectral Density

Temperature	25°C
Relative Humidity	53%
Atmospheric Pressure	1010mbar
Test date :	September 12, 2017
Tested By :	Loren Luo

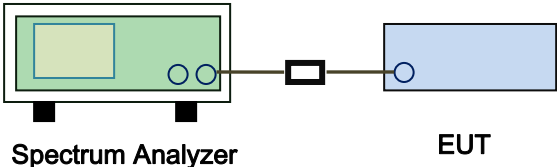Spec	Item	Requirement	Applicable
§15.247(e)	a)	The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.	☒
Test Setup	 Spectrum Analyzer EUT		
Test Procedure	558074 D01 DTS MEAS Guidance v03r03, 10.2 power spectral density method power spectral density measurement procedure - a) Set analyzer center frequency to DTS channel center frequency. - b) Set the span to 1.5 times the DTS bandwidth. - c) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$. - d) Set the VBW $\geq 3 \times \text{RBW}$. - e) Detector = peak. - f) Sweep time = auto couple. - g) Trace mode = max hold. - h) Allow trace to fully stabilize. - i) Use the peak marker function to determine the maximum amplitude level within the RBW. - j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.		
Remark			
Result	☒ Pass ☐ Fail		

Test Data ☒ Yes ☐ N/A
 Test Plot ☒ Yes (See below) ☐ N/A


Power Spectral Density measurement result

Test Data


Type	CH	Freq (MHz)	Reading (dBm)	Factor (dB)	Result (dBm)	Limit (dBm)	Result
PSD	Low	2402	-15.755	-5.23	-20.985	8	Pass
	Mid	2440	-15.959	-5.23	-21.189	8	Pass
	High	2480	-15.385	-5.23	-20.615	8	Pass

Note: factor= $10\log(3/10)=-5.23$


Test Plots

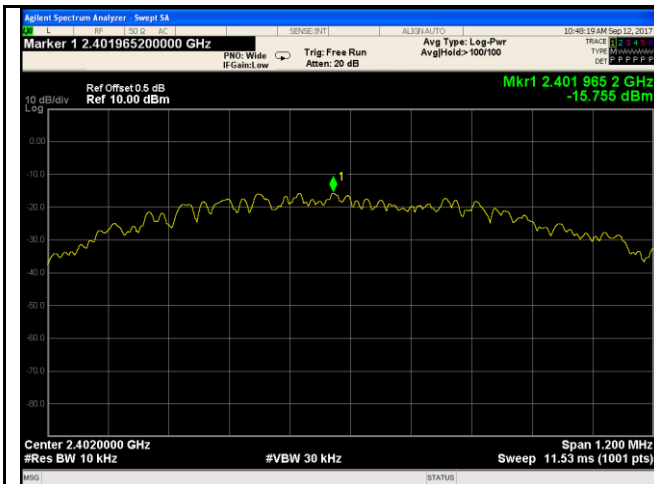

PSD - Low CH 2402

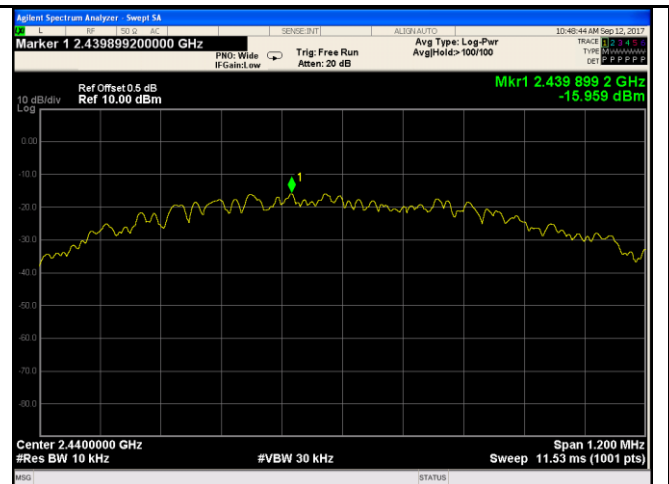

PSD - Mid CH 2440

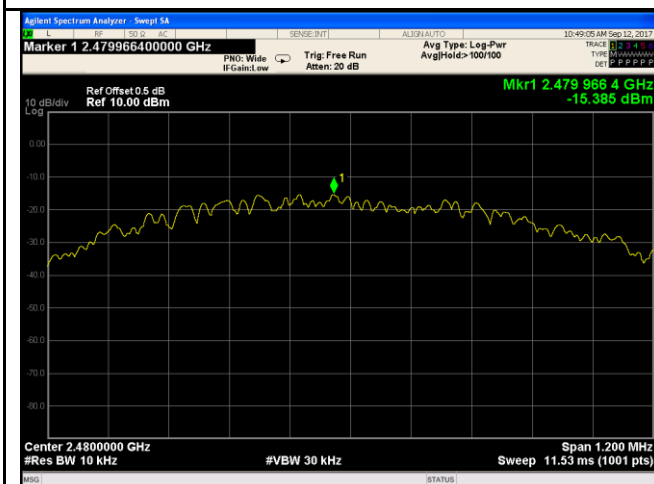


PSD - High CH 2480

6.5 Band-Edge & Unwanted Emissions into Restricted Frequency Bands

Temperature	24°C
Relative Humidity	55%
Atmospheric Pressure	1013mbar
Test date :	September 05, 2017
Tested By :	Loren Luo

Requirement(s):

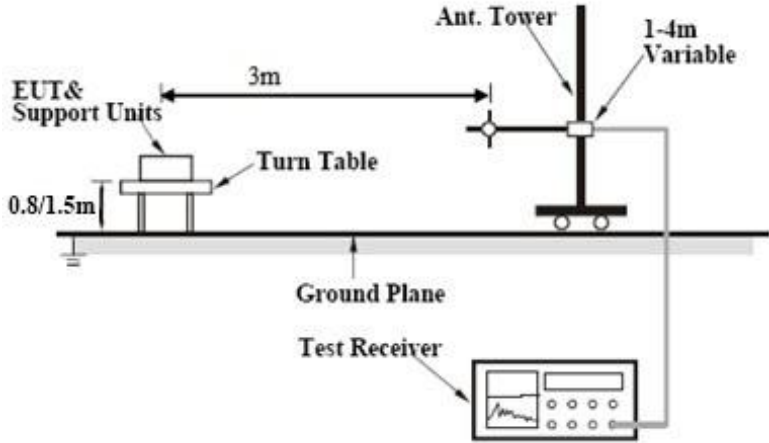Spec	Item	Requirement	Applicable
§15.247(d)	a)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.	☒
Test Setup			
Test Procedure	Radiated Method Only 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator. 2. Position the EUT without connection to measurement instrument. Put it on the Rotated table and turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.		

	- 3. First, set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, check the emission of EUT, if pass then set Spectrum Analyzer as below: a. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz. b. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz. c. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz. - 4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency. - 5. Repeat above procedures until all measured frequencies were complete.
Remark	
Result	☒ Pass ☐ Fail

Test Data ☐ Yes ☒ N/A
Test Plot ☒ Yes (See below) ☐ N/A

Test Plots

Band Edge measurement result




Note: Both Horizontal and vertical polarities were investigated.

6.6 AC Power Line Conducted Emissions

Temperature	24°C
Relative Humidity	55%
Atmospheric Pressure	1013mbar
Test date :	September 05, 2017
Tested By :	Loren Luo

Requirement(s):

Spec	Item	Requirement	Applicable														
47CFR§15.207, RSS210 (A8.1)	a)	For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 [mu] H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequencies ranges.	☒														
		<table><tr><th rowspan="2">Frequency ranges (MHz)</th><th colspan="2">Limit (dBµV)</th></tr><tr><th>QP</th><th>Average</th></tr><tr><td>0.15 ~ 0.5</td><td>66 – 56</td><td>56 – 46</td></tr><tr><td>0.5 ~ 5</td><td>56</td><td>46</td></tr><tr><td>5 ~ 30</td><td>60</td><td>50</td></tr></table>		Frequency ranges (MHz)	Limit (dBµV)		QP	Average	0.15 ~ 0.5	66 – 56	56 – 46	0.5 ~ 5	56	46	5 ~ 30	60	50
		Frequency ranges (MHz)			Limit (dBµV)												
				QP	Average												
		0.15 ~ 0.5		66 – 56	56 – 46												
		0.5 ~ 5		56	46												
5 ~ 30	60	50															

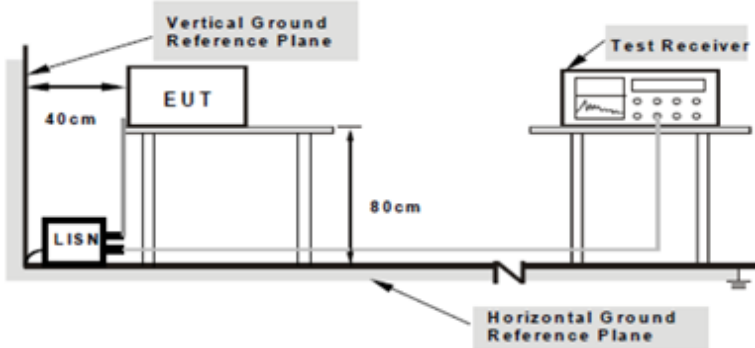Test Setup	 The diagram illustrates the test setup. An EUT (Equipment Under Test) is placed on a table. A LISN (Line Impedance Stabilization Network) is connected to the power line and the EUT. A Test Receiver is connected to the LISN. A Vertical Ground Reference Plane is shown at a distance of 40 cm from the EUT. A Horizontal Ground Reference Plane is shown at a distance of 80 cm from the EUT. The LISN is connected to the power line and the Test Receiver. Note: 1.Support units were connected to second LISN. 2.Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.
------------	---

Procedure	- The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table. - The power supply for the EUT was fed through a 50W/50mH EUT LISN, connected to filtered mains. - The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss
-----------	---


Test Report No.	17070833-FCC-R4
Page	20 of 49

	coaxial cable. 4. All other supporting equipment were powered separately from another main supply. 5. The EUT was switched on and allowed to warm up to its normal operating condition. 6. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver. 7. High peaks, relative to the limit line, The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 kHz. 8. Step 7 was then repeated for the LIVE line (for AC mains) or DC line (for DC power).
Remark	
Result	☒ Pass ☐ Fail

Test Data ☒ Yes ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

Test Mode:	Transmitting Mode
1. The test mode is used to test the system's performance. 2. The test mode is used to test the system's performance. 3. The test mode is used to test the system's performance. 4. The test mode is used to test the system's performance. 5. The test mode is used to test the system's performance. 6. The test mode is used to test the system's performance. 7. The test mode is used to test the system's performance. 8. The test mode is used to test the system's performance. 9. The test mode is used to test the system's performance. 10. The test mode is used to test the system's performance.	1. The transmitting mode is used to transmit data. 2. The transmitting mode is used to transmit data. 3. The transmitting mode is used to transmit data. 4. The transmitting mode is used to transmit data. 5. The transmitting mode is used to transmit data. 6. The transmitting mode is used to transmit data. 7. The transmitting mode is used to transmit data. 8. The transmitting mode is used to transmit data. 9. The transmitting mode is used to transmit data. 10. The transmitting mode is used to transmit data.

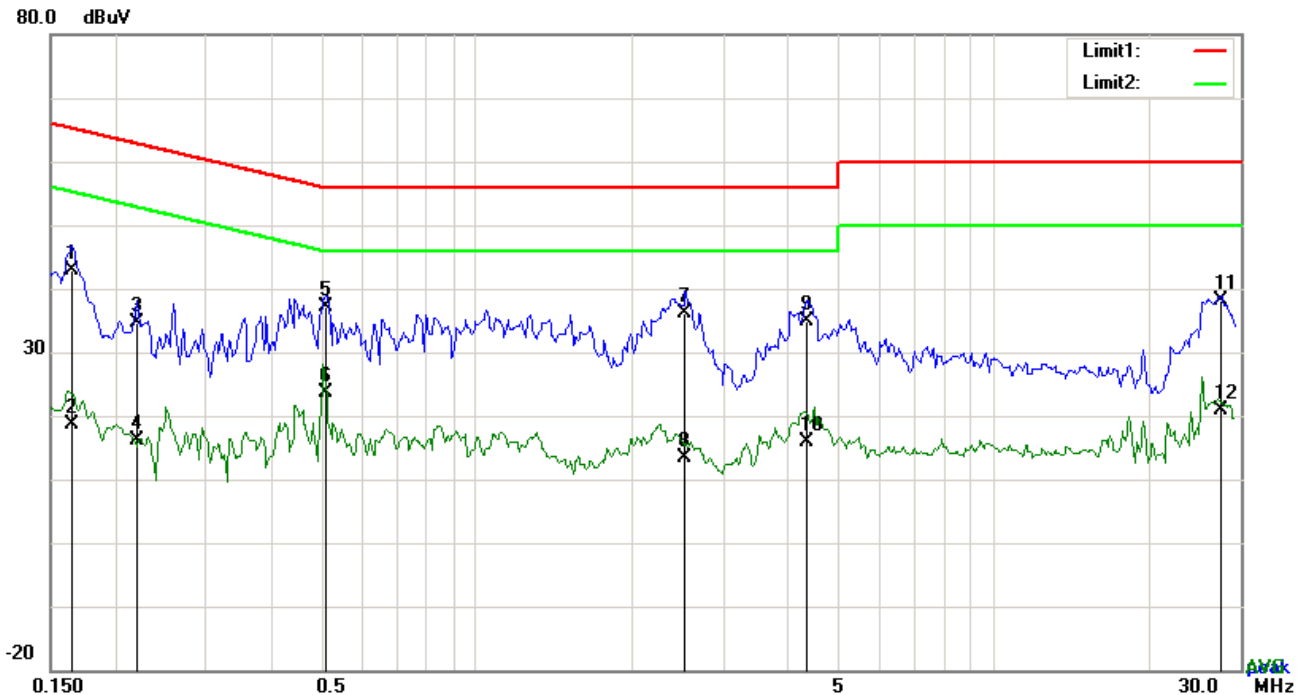


Test Data

Phase Line Plot at 120Vac, 60Hz

No.	P/L	Frequency (MHz)	Reading (dBμV)	Detector	Corrected (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)
1	L1	0.1656	32.94	QP	10.03	42.97	65.18	-22.21
2	L1	0.1656	8.57	AVG	10.03	18.60	55.18	-36.58
3	L1	0.2202	24.48	QP	10.03	34.51	62.81	-28.30
4	L1	0.2202	6.13	AVG	10.03	16.16	52.81	-36.65
5	L1	0.5127	27.10	QP	10.03	37.13	56.00	-18.87
6	L1	0.5127	13.66	AVG	10.03	23.69	46.00	-22.31
7	L1	2.5368	26.16	QP	10.05	36.21	56.00	-19.79
8	L1	2.5368	3.42	AVG	10.05	13.47	46.00	-32.53
9	L1	4.3533	24.88	QP	10.07	34.95	56.00	-21.05
10	L1	4.3533	5.92	AVG	10.07	15.99	46.00	-30.01
11	L1	27.5154	27.64	QP	10.44	38.08	60.00	-21.92
12	L1	27.5154	10.43	AVG	10.44	20.87	50.00	-29.13

Test Mode:	Transmitting Mode
-------------------	--------------------------

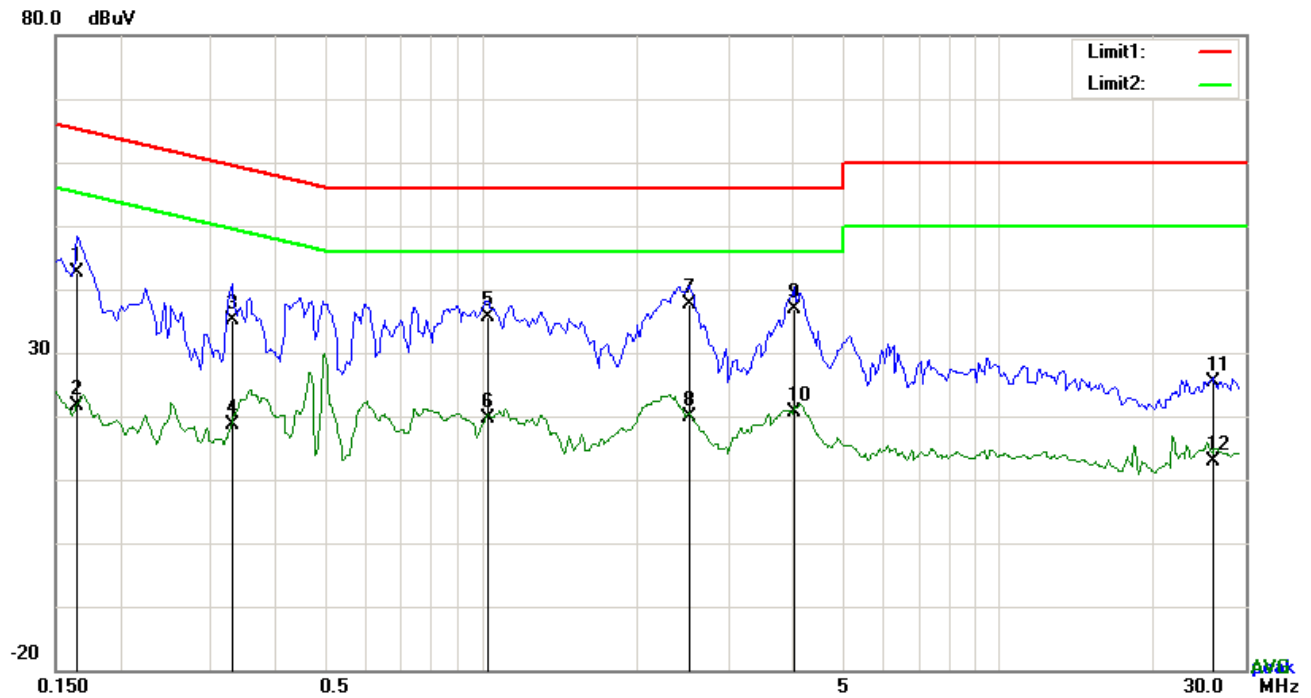


Test Data

Phase Neutral Plot at 120Vac, 60Hz

No.	P/L	Frequency (MHz)	Reading (dBμV)	Detector	Corrected (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)
1	N	0.1656	32.62	QP	10.02	42.64	65.18	-22.54
2	N	0.1656	11.49	AVG	10.02	21.51	55.18	-33.67
3	N	0.3294	25.17	QP	10.02	35.19	59.47	-24.28
4	N	0.3294	8.64	AVG	10.02	18.66	49.47	-30.81
5	N	1.0275	25.61	QP	10.03	35.64	56.00	-20.36
6	N	1.0275	9.54	AVG	10.03	19.57	46.00	-26.43
7	N	2.5212	27.65	QP	10.05	37.70	56.00	-18.30
8	N	2.5212	9.87	AVG	10.05	19.92	46.00	-26.08
9	N	4.0218	26.77	QP	10.06	36.83	56.00	-19.17
10	N	4.0218	10.45	AVG	10.06	20.51	46.00	-25.49
11	N	25.8657	15.11	QP	10.35	25.46	60.00	-34.54
12	N	25.8657	2.65	AVG	10.35	13.00	50.00	-37.00

Test Mode: Transmitting Mode

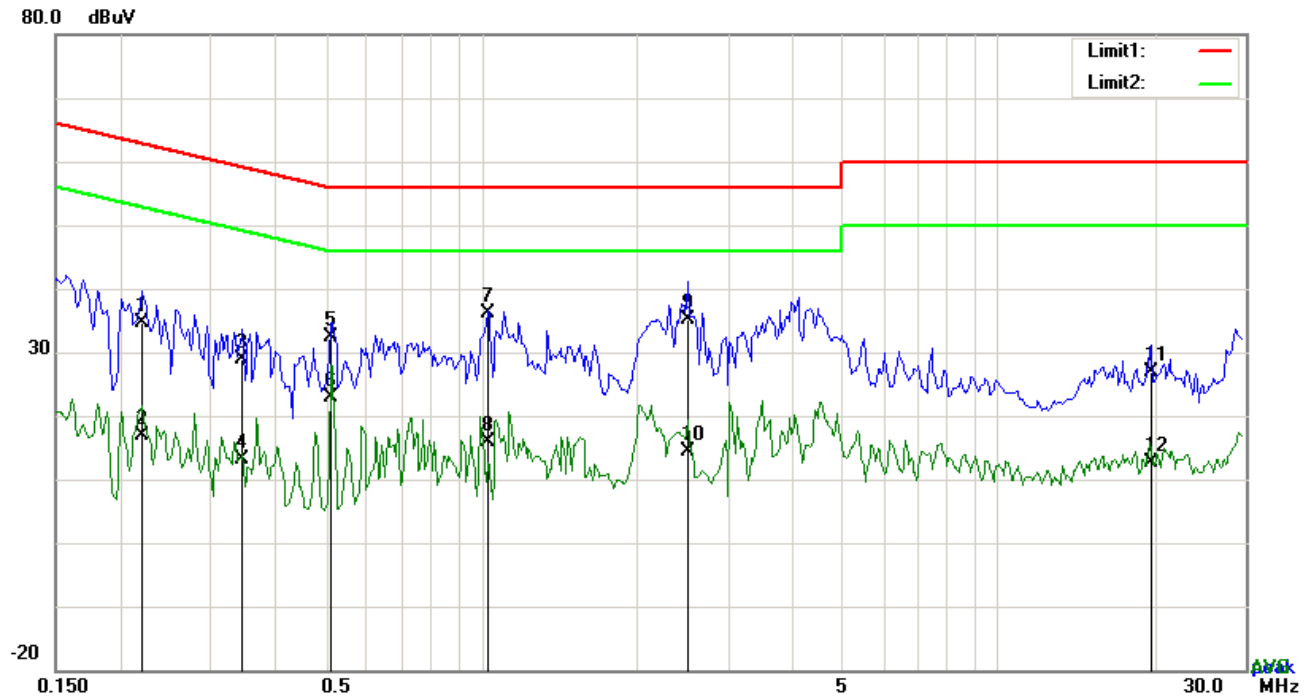


Test Data

Phase Line Plot at 240Vac, 60Hz

No.	P/L	Frequency (MHz)	Reading (dBμV)	Detector	Corrected (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)
1	L1	0.2202	24.52	QP	10.03	34.55	62.81	-28.26
2	L1	0.2202	6.94	AVG	10.03	16.97	52.81	-35.84
3	L1	0.3450	18.89	QP	10.03	28.92	59.08	-30.16
4	L1	0.3450	3.11	AVG	10.03	13.14	49.08	-35.94
5	L1	0.5127	22.46	QP	10.03	32.49	56.00	-23.51
6	L1	0.5127	12.85	AVG	10.03	22.88	46.00	-23.12
7	L1	1.0314	26.08	QP	10.03	36.11	56.00	-19.89
8	L1	1.0314	5.81	AVG	10.03	15.84	46.00	-30.16
9	L1	2.5095	24.96	QP	10.05	35.01	56.00	-20.99
10	L1	2.5095	4.33	AVG	10.05	14.38	46.00	-31.62
11	L1	19.6686	16.46	QP	10.30	26.76	60.00	-33.24
12	L1	19.6686	2.40	AVG	10.30	12.70	50.00	-37.30

Test Mode: Transmitting Mode

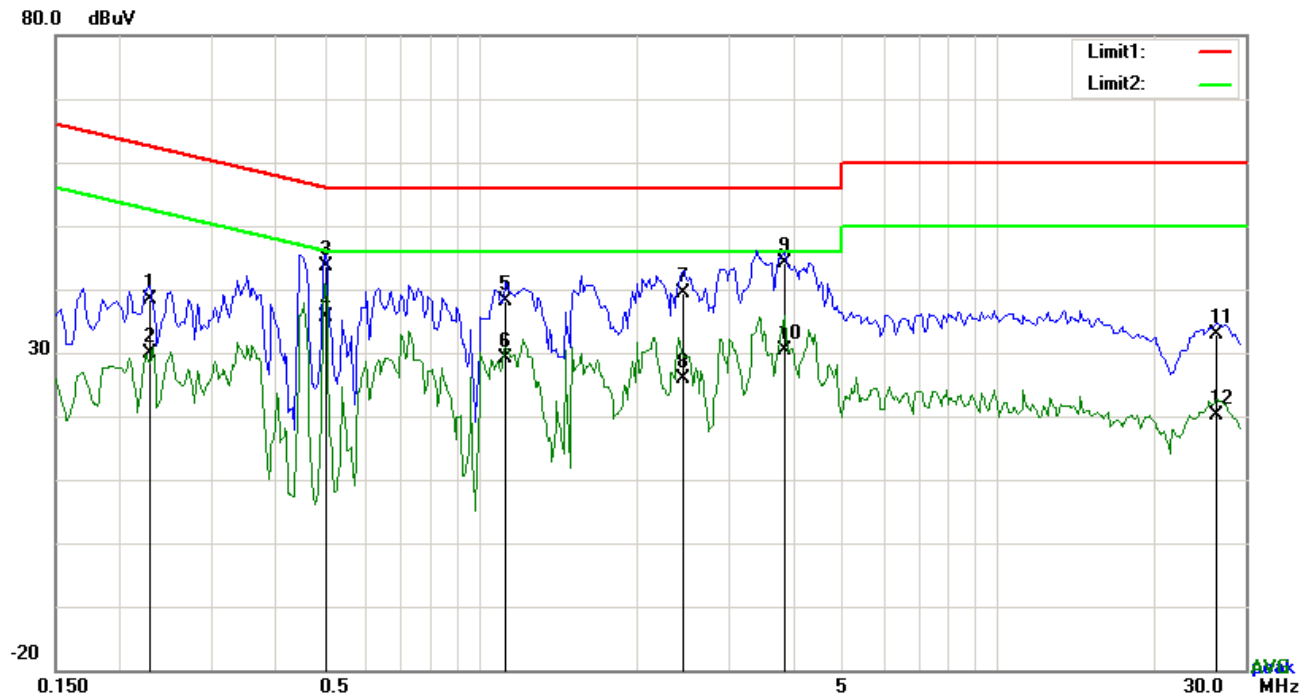

Test Data

Phase Neutral Plot at 240Vac, 60Hz

No.	P/L	Frequency (MHz)	Reading (dBμV)	Detector	Corrected (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)
1	N	0.2280	28.31	QP	10.02	38.33	62.52	-24.19
2	N	0.2280	19.79	AVG	10.02	29.81	52.52	-22.71
3	N	0.5010	33.68	QP	10.02	43.70	56.00	-12.30
4	N	0.5010	25.61	AVG	10.02	35.63	46.00	-10.37
5	N	1.1133	28.13	QP	10.03	38.16	56.00	-17.84
6	N	1.1133	19.17	AVG	10.03	29.20	46.00	-16.80
7	N	2.4549	29.28	QP	10.04	39.32	56.00	-16.68
8	N	2.4549	15.94	AVG	10.04	25.98	46.00	-20.02
9	N	3.8502	33.97	QP	10.06	44.03	56.00	-11.97
10	N	3.8502	20.25	AVG	10.06	30.31	46.00	-15.69
11	N	26.3727	22.59	QP	10.36	32.95	60.00	-27.05
12	N	26.3727	9.67	AVG	10.36	20.03	50.00	-29.97



6.7 Radiated Emissions & Restricted Band

Temperature	24°C
Relative Humidity	55%
Atmospheric Pressure	1013mbar
Test date :	September 05, 2017
Tested By :	Loren Luo

Requirement(s):

Spec	Item	Requirement	Applicable																
47CFR§15.247(d), RSS210 (A8.5)	a)	Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges	☒																
		<table><tr><th>Frequency range (MHz)</th><th>Field Strength (µV/m)</th></tr><tr><td>0.009~0.490</td><td>2400/F(KHz)</td></tr><tr><td>0.490~1.705</td><td>24000/F(KHz)</td></tr><tr><td>1.705~30.0</td><td>30</td></tr><tr><td>30 – 88</td><td>100</td></tr><tr><td>88 – 216</td><td>150</td></tr><tr><td>216 960</td><td>200</td></tr><tr><td>Above 960</td><td>500</td></tr></table>		Frequency range (MHz)	Field Strength (µV/m)	0.009~0.490	2400/F(KHz)	0.490~1.705	24000/F(KHz)	1.705~30.0	30	30 – 88	100	88 – 216	150	216 960	200	Above 960	500
		Frequency range (MHz)		Field Strength (µV/m)															
		0.009~0.490		2400/F(KHz)															
		0.490~1.705		24000/F(KHz)															
		1.705~30.0		30															
		30 – 88		100															
		88 – 216		150															
		216 960		200															
	Above 960	500																	
b)	For non-restricted band, In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB or 30dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, determined by the measurement method on output power to be used. Attenuation below the general limits specified in § 15.209(a) is not required ☒ 20 dB down ☐ 30 dB down	☒																	
	c)		or restricted band, emission must also comply with the radiated emission limits specified in 15.209	☒															

Test Setup

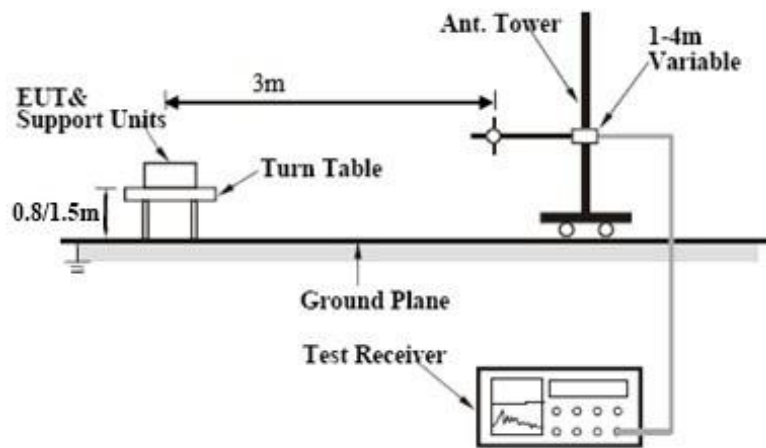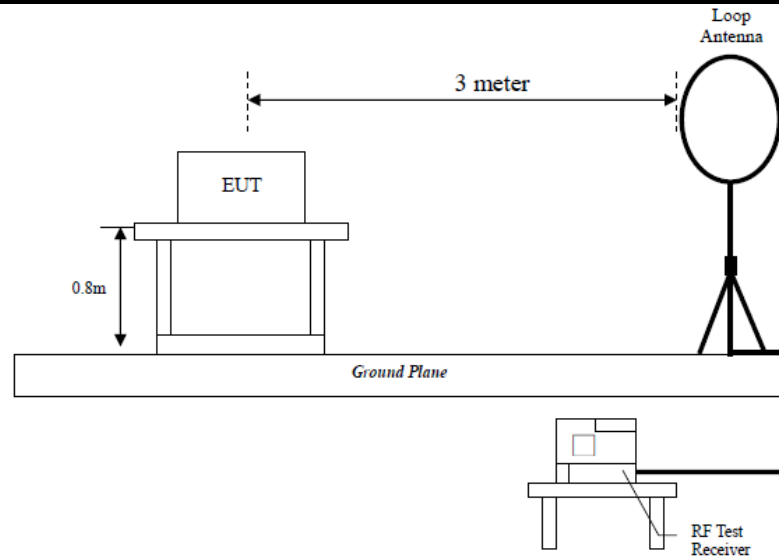

Procedure

- The EUT was switched on and allowed to warm up to its normal operating condition.
- The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:
 - Vertical or horizontal polarization (whichever gave the higher emission level over a full rotation of the EUT) was chosen.
 - The EUT was then rotated to the direction that gave the maximum emission.
 - Finally, the antenna height was adjusted to the height that gave the maximum emission.
- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi Peak detection at frequency below 1GHz.
- The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz.

	The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz. 5. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.
Remark	Different RF configuration has been evaluated but not much difference was found. The data presented here is the worst case data with EUT under 802.11n – HT20-2437MHz mode.
Result	☒ Pass ☐ Fail

Test Data ☒ Yes ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

Test Result:

Test Mode:	Transmitting Mode
------------	-------------------

Frequency range: 9KHz - 30MHz

Freq. (MHz)	Detection value	Factor (dB/m)	Reading (dBuV/m)	Result (dBuV/m)	Limit@3m (dBuV/m)	Margin (dB)
--	--	--	--	--	--	>20
--	--	--	--	--	--	>20

Note:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.

Test Mode: Transmitting Mode

30MHz -1GHz

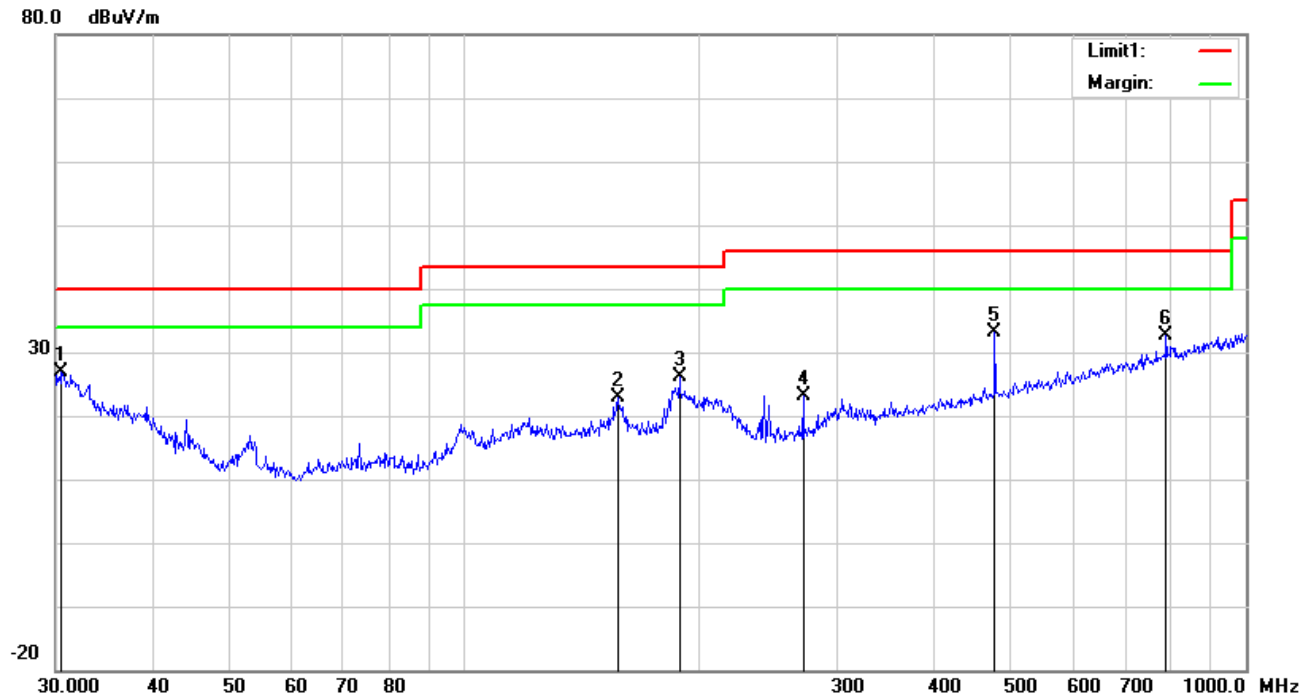


Test Data

Vertical Polarity Plot @3m

No.	P/L	Frequency	Reading	Detect or	Ant_F	PA_G	Cab_L	Result	Limit	Margin	Height	Degr ee
		(MHz)	(dBuV/m)		(dB/m)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)
1	H	30.5306	27.46	peak	20.99	22.28	0.63	26.80	40.00	-13.20	100	353
2	H	157.0074	31.30	peak	12.60	22.29	1.38	22.99	43.50	-20.51	200	68
3	H	188.4125	35.42	peak	11.46	22.30	1.51	26.09	43.50	-17.41	100	339
4	H	271.3246	31.41	peak	12.34	22.29	1.74	23.20	46.00	-22.80	100	313
5	H	477.1694	35.39	peak	17.24	21.86	2.29	33.06	46.00	-12.94	100	321
6	H	790.6188	29.49	peak	21.29	21.17	2.94	32.55	46.00	-13.45	100	322

30MHz -1GHz

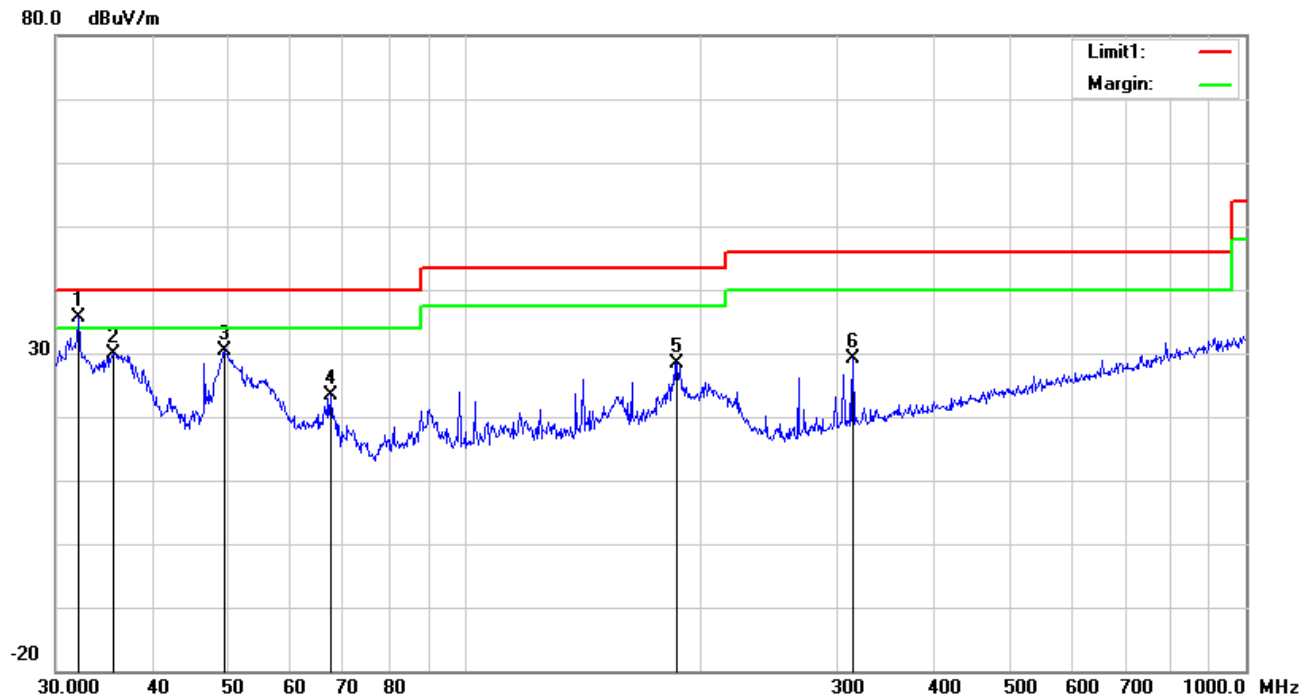

Test Data

Horizontal Polarity Plot @3m

N o.	P/ L	Frequency (MHz)	Reading (dBuV/m)	Detect or	Ant_F (dB/m)	PA_G (dB)	Cab_L (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degr ee (°)
1	V	32.0668	37.32	QP	19.81	22.27	0.68	35.54	40.00	-4.46	100	138
2	V	35.6240	34.38	peak	17.09	22.25	0.76	29.98	40.00	-10.02	200	86
3	V	49.3594	43.18	peak	8.68	22.37	0.79	30.28	40.00	-9.72	100	169
4	V	67.4382	37.13	peak	7.67	22.39	0.93	23.34	40.00	-16.66	100	330
5	V	187.0958	37.89	peak	11.39	22.30	1.49	28.47	43.50	-15.03	100	123
6	V	314.3765	35.72	peak	13.90	22.25	1.86	29.23	46.00	-16.77	100	12

Above 1GHz

Test Mode:	Transmitting Mode
------------	-------------------

Low Channel (2402 MHz)

Frequency (MHz)	S.A. Reading (dBμV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
4804	38.92	AV	V	33.39	7.22	48.46	31.07	54	-22.93
4804	38.91	AV	H	33.39	7.22	48.46	31.06	54	-22.94
4804	47.41	PK	V	33.39	7.22	48.46	39.56	74	-34.44
4804	46.96	PK	H	33.39	7.22	48.46	39.11	74	-34.89
12489	24.24	AV	V	40.44	13.42	46.15	31.95	54	-22.05
12489	24.09	AV	H	40.44	13.42	46.15	31.8	54	-22.2
12489	41.02	PK	V	40.44	13.42	46.15	48.73	74	-25.27
12489	40.8	PK	H	40.44	13.42	46.15	48.51	74	-25.49

Middle Channel (2440 MHz)

Frequency (MHz)	S.A. Reading (dBμV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
4880	38.01	AV	V	33.62	7.53	48.36	30.8	54	-23.2
4880	39.28	AV	H	33.62	7.53	48.36	32.07	54	-21.93
4880	48.14	PK	V	33.62	7.53	48.36	40.93	74	-33.07
4880	47.84	PK	H	33.62	7.53	48.36	40.63	74	-33.37
14856	23.94	AV	V	42.95	14.479	46.1	35.269	54	-18.731
14856	24.78	AV	H	42.95	14.479	46.1	36.109	54	-17.891
14856	42.25	PK	V	42.95	14.479	46.1	53.579	74	-20.421
14856	41.4	PK	H	42.95	14.479	46.1	52.729	74	-21.271

High Channel (2480 MHz)

Frequency (MHz)	S.A. Reading (dBμV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
4960	38.56	AV	V	33.89	7.86	48.31	32	54	-22
4960	39.41	AV	H	33.89	7.86	48.31	32.85	54	-21.15
4960	47.78	PK	V	33.89	7.86	48.31	41.22	74	-32.78
4960	47.89	PK	H	33.89	7.86	48.31	41.33	74	-32.67
17832	24.92	AV	V	42.12	18.07	44.1	41.01	54	-12.99
17832	24.2	AV	H	42.12	18.07	44.1	40.29	54	-13.71
17832	41.3	PK	V	42.12	18.07	44.1	57.39	74	-16.61
17832	40.25	PK	H	42.12	18.07	44.1	56.34	74	-17.66

Note:

1, The testing has been conformed to 10*2480MHz=24,800MHz

2, All other emissions more than 30 dB below the limit

3, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.

4, The radiated spurious test above 18GHz is subcontracted to SIEMIC (Nanjing-China) Laboratories. and found 30dB below the limit at least.

Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due	In use
AC Line Conducted					
EMI test receiver	ESCS30	8471241027	09/16/2016	09/15/2017	☒
Line Impedance	LI-125A	191106	09/24/2016	09/23/2017	☒
Line Impedance	LI-125A	191107	09/24/2016	09/23/2017	☒
ISN	ISN T800	34373	09/24/2016	09/23/2017	☐
Transient Limiter	LIT-153	531118	08/30/2017	08/29/2018	☒
RF conducted test					
Agilent ESA-E SERIES	E4407B	MY45108319	09/16/2016	09/15/2017	☒
Power Splitter	1#	1#	08/30/2017	08/29/2018	☒
DC Power Supply	E3640A	MY40004013	09/16/2016	09/15/2017	☒
Radiated Emissions					
EMI test receiver	ESL6	100262	09/16/2016	09/15/2017	☒
Positioning Controller	UC3000	MF780208282	11/18/2016	11/17/2017	☒
OPT 010 AMPLIFIER (0.1-1300MHz)	8447E	2727A02430	08/30/2017	08/29/2018	☒
Horn Antenna	BBHA9170	3145226D1	09/28/2016	09/27/2017	☒
Microwave Preamplifier (1 ~ 26.5GHz)	8449B	3008A02402	03/23/2017	03/22/2018	☒
Active Antenna (9kHz-30MHz)	AL-130	121031	10/13/2016	10/12/2017	☐
Bilog Antenna (30MHz~6GHz)	JB6	A110712	09/20/2016	09/19/2017	☒
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/23/2016	09/22/2017	☒
Universal Radio Communication Tester	CMU200	121393	09/24/2016	09/23/2017	☒

Annex B. EUT And Test Setup Photographs

Annex B.i. Photograph: EUT External Photo

Whole Package View



Adapter - Lable View



EUT - Front View



EUT - Rear View



EUT - Top View



EUT - Bottom View



EUT - Left View



EUT - Right View



Annex B.ii. Photograph: EUT Internal Photo

Cover Off - Top View 1




Cover Off - Top View 2




Battery - Front View




Battery - Rear View

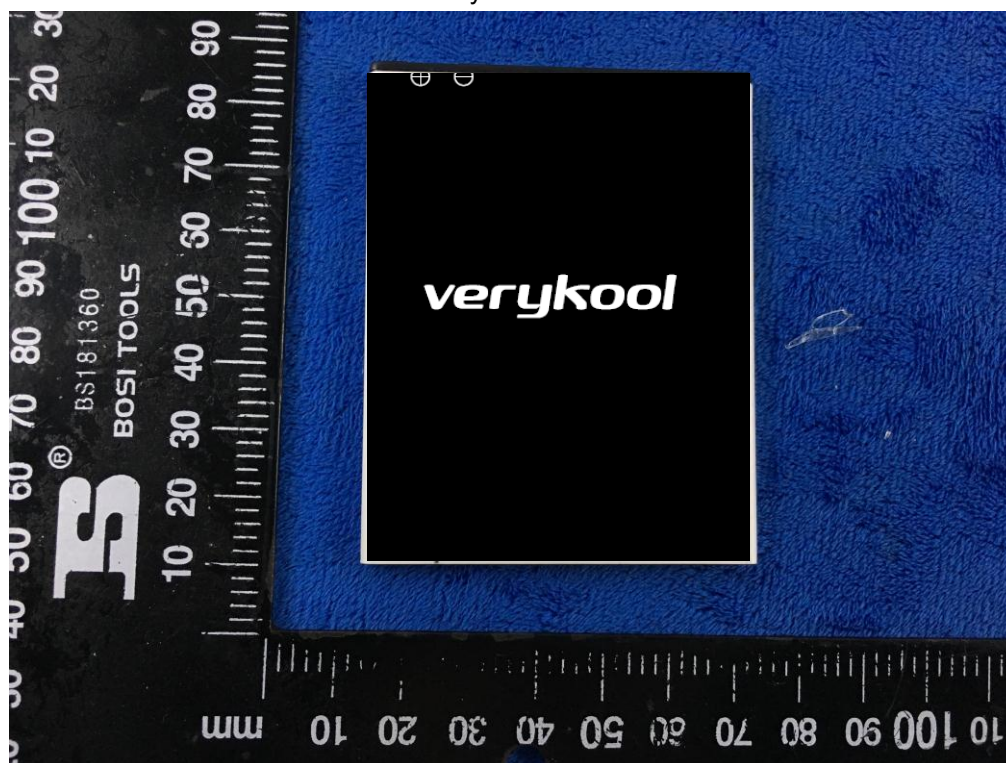


Mainboard with Shielding - Front View

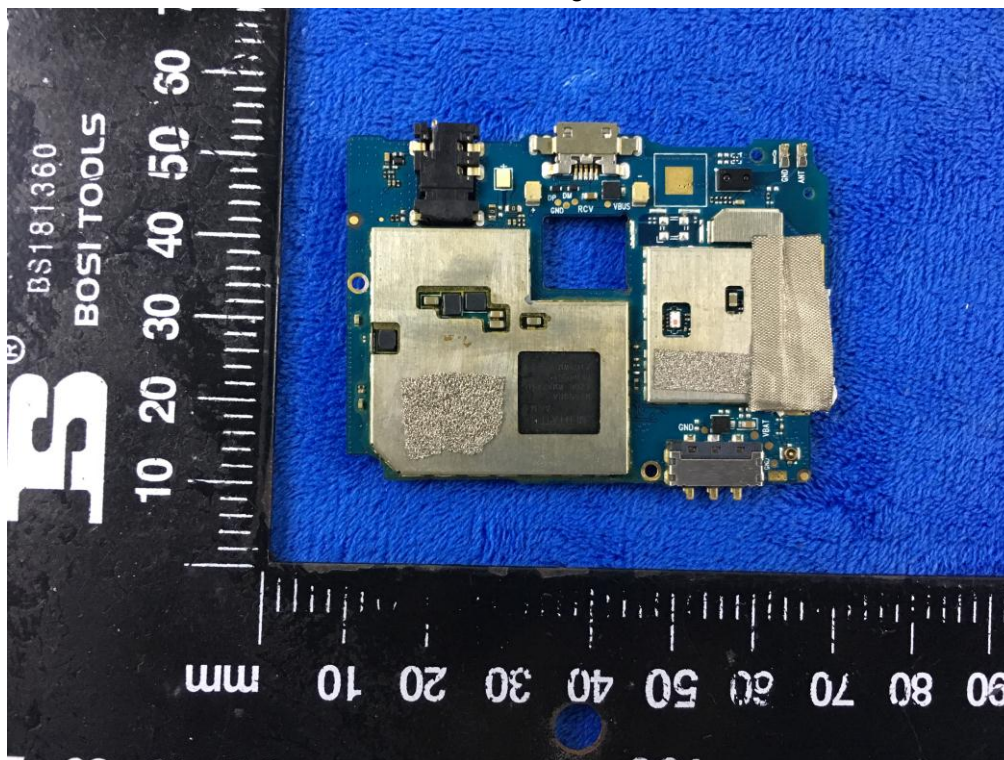

Mainboard without Shielding - Front View

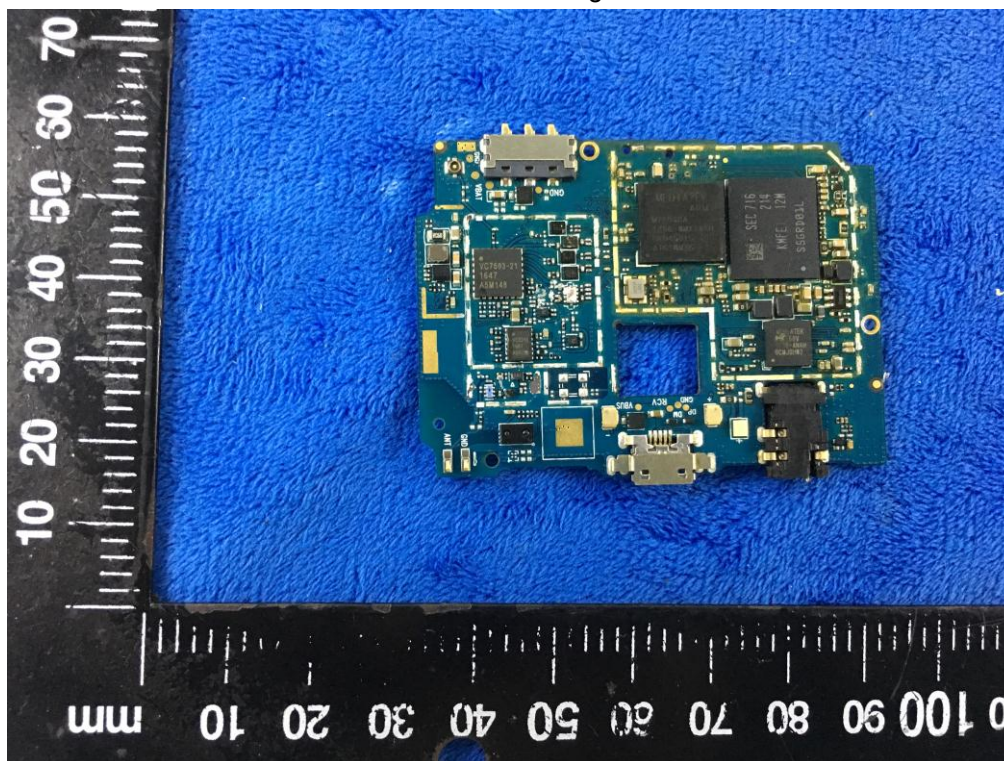

Mainboard– Rear View

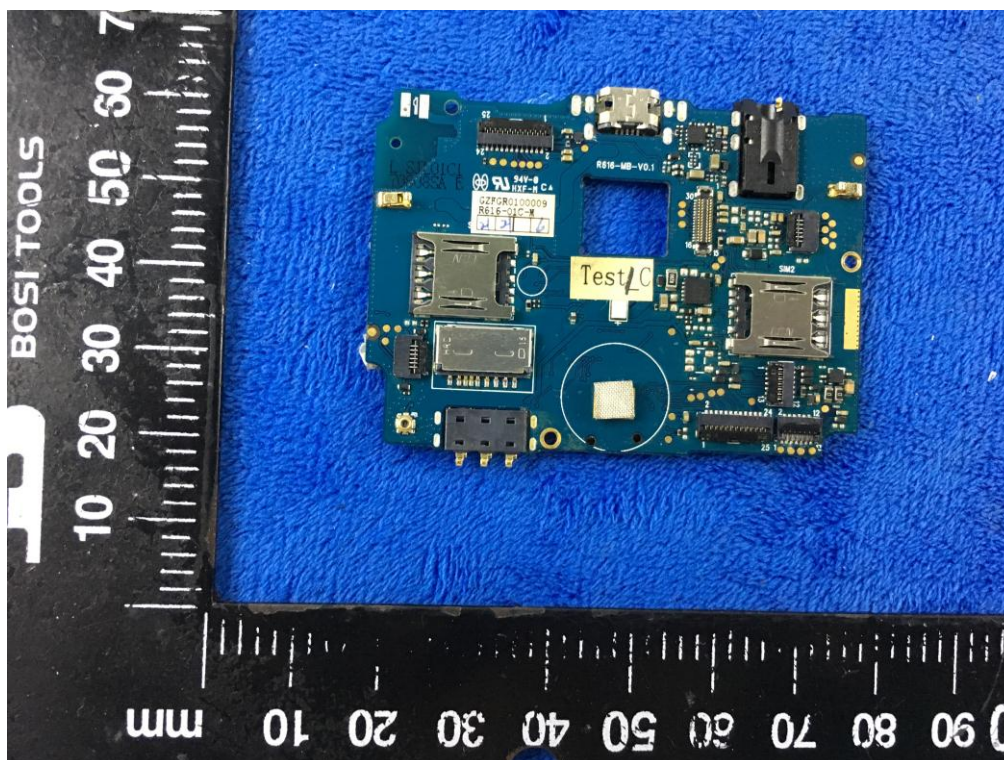

LCD – Front View



Test Report No.	17070833-FCC-R4
Page	41 of 49


LCD – Rear View



GSM/PCS/UMTS-FDD Antenna View



WIFI/BT/BLE/GPS - Antenna View

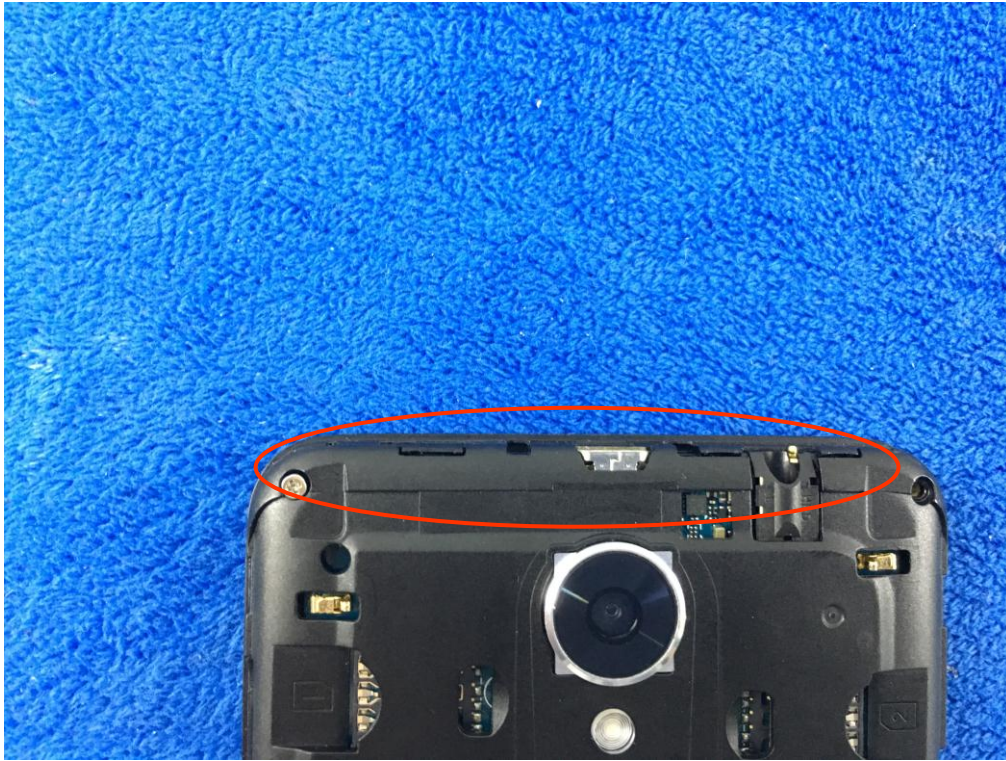

Annex B.iii. Photograph: Test Setup Photo




Conducted Emissions Test Setup Front View



Conducted Emissions Test Setup Side View



Radiated Spurious Emissions Test Setup Below 1GHz

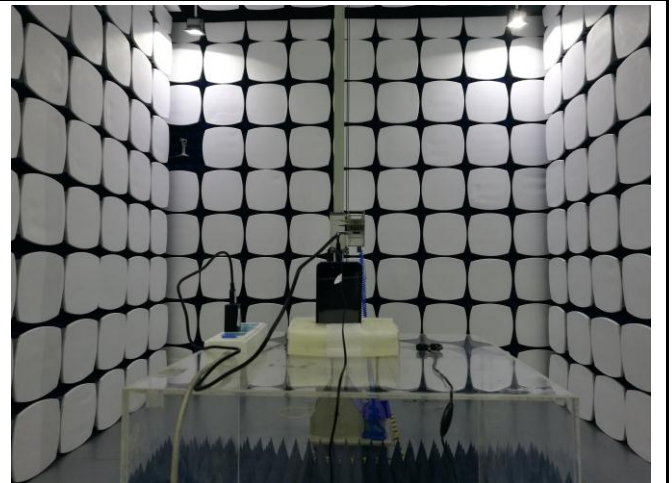


Radiated Spurious Emissions Test Setup Above
1GHz


Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

Annex C.ii. TEST SET UP BLOCK


Block Configuration Diagram for AC Line Conducted Emissions

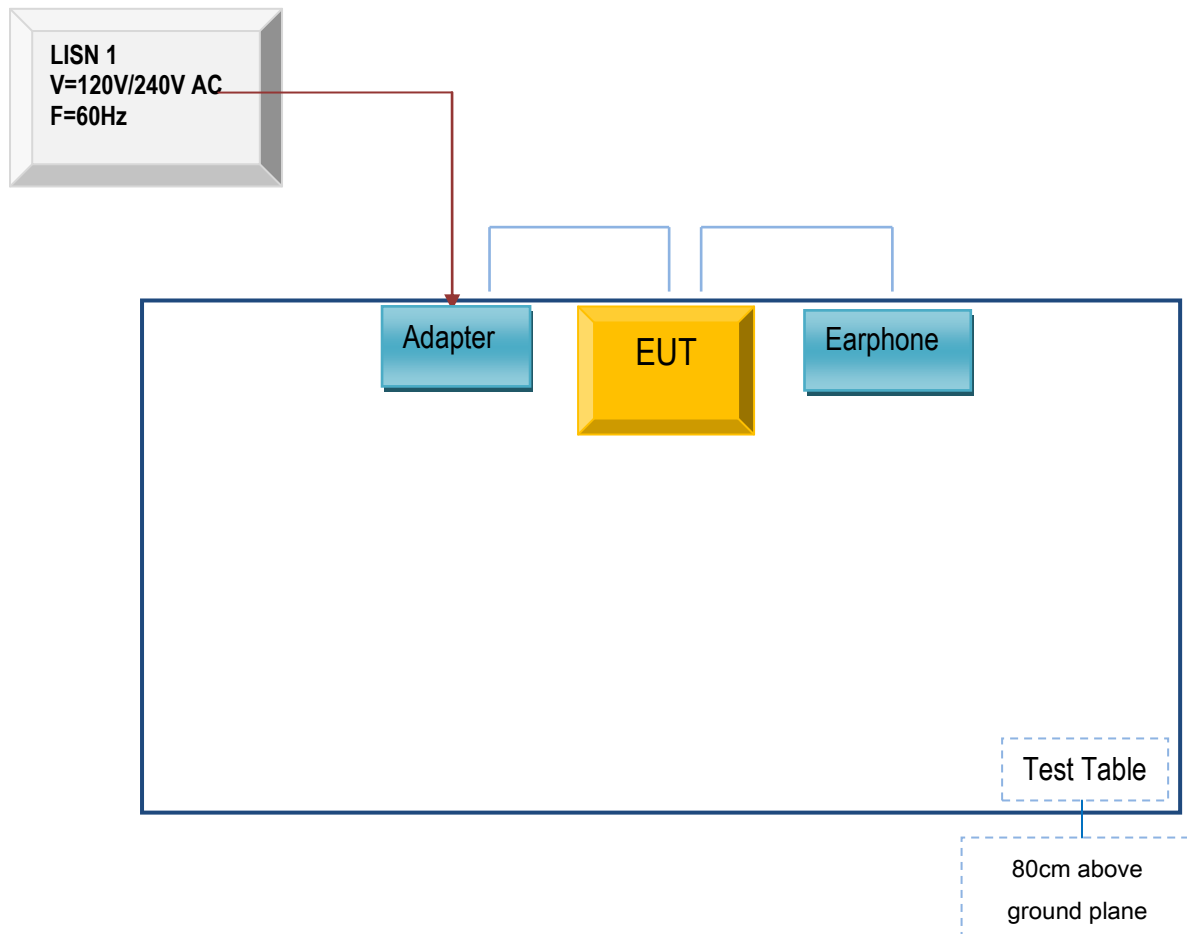

Block Configuration Diagram for Radiated Emissions (Below 1GHz) .

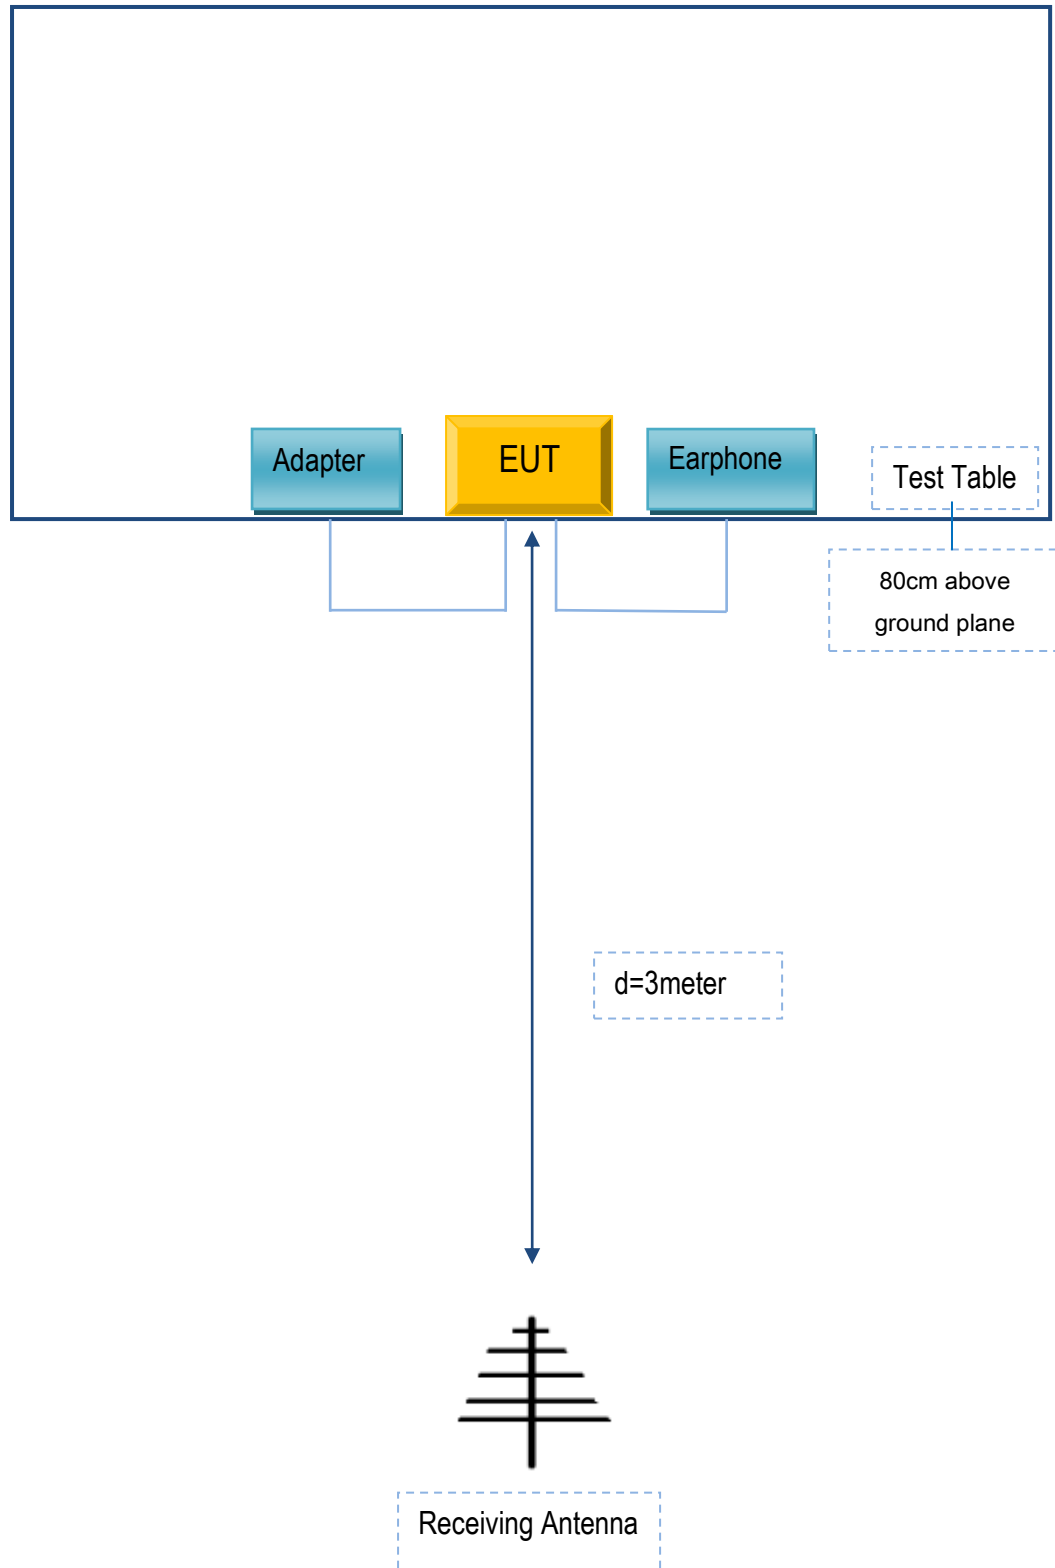

Block Configuration Diagram for Radiated Emissions (Above 1GHz) .

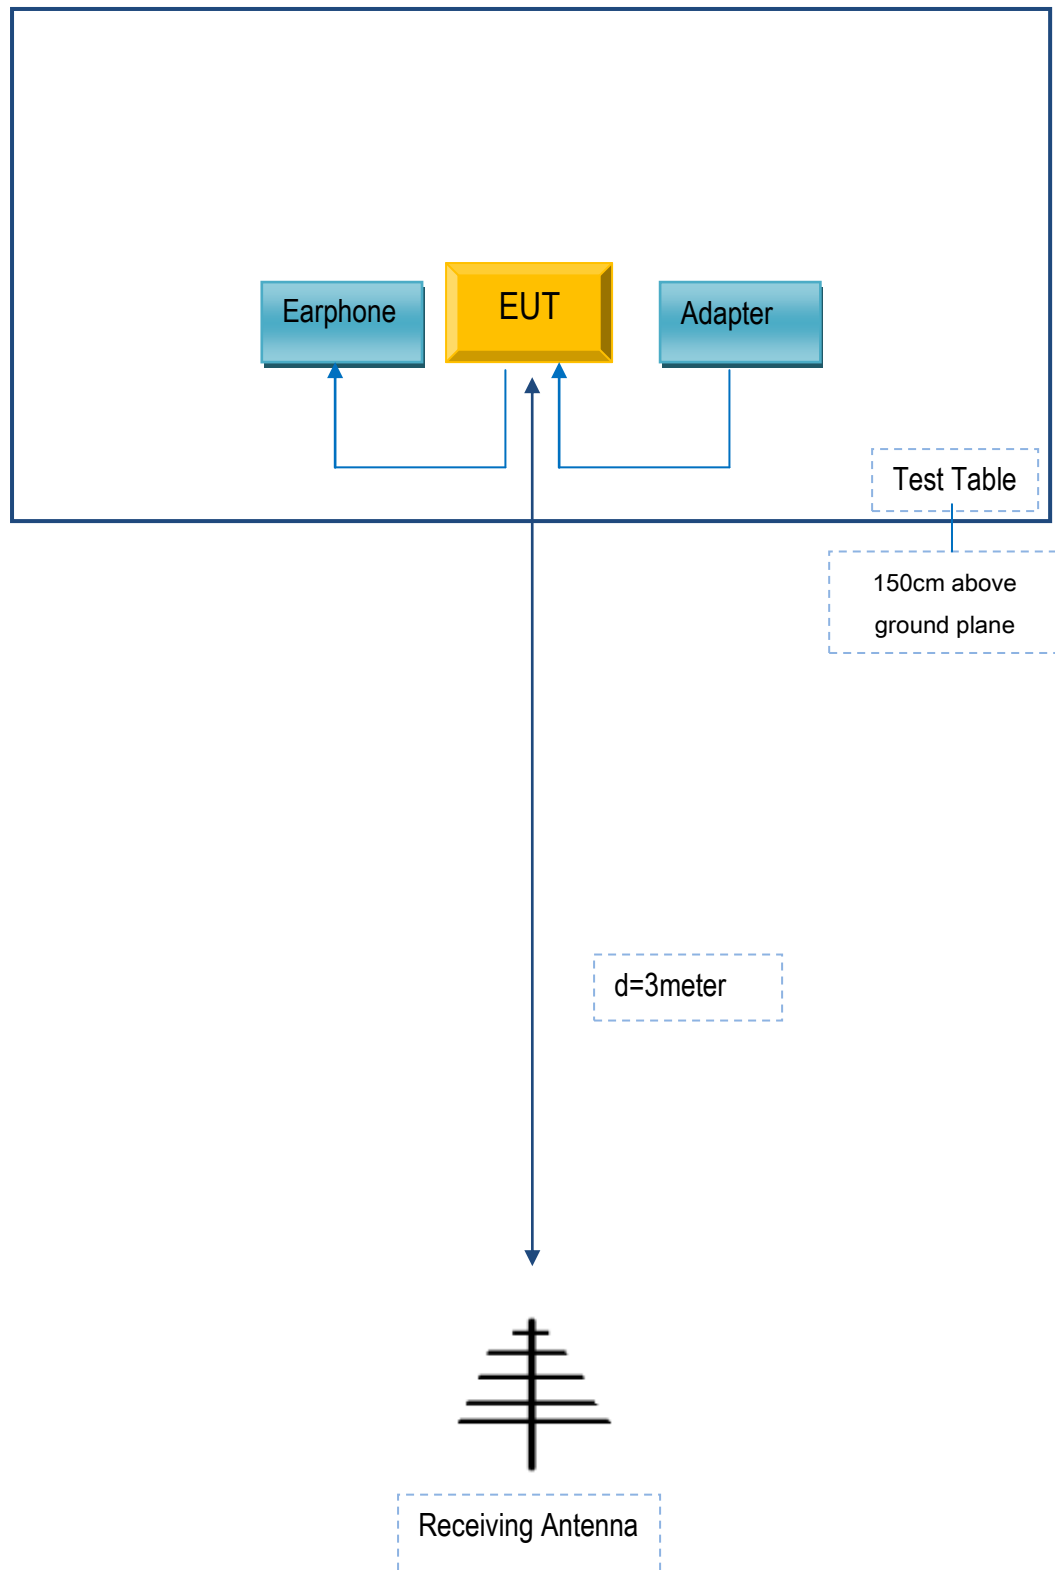

Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Supporting Equipment:

Manufacturer	Equipment Description	Model	Serial No
Verykool USA Inc	Adapter	s5205	N/A
Verykool USA Inc	Earphone	s5205	N/A

Supporting Cable:

Cable type	Shield Type	Ferrite Core	Length	Serial No
USB Cable	Un-shielding	No	0.8m	N/A

Annex D. User Manual / Block Diagram / Schematics / Partlist

Please see the attachment

Annex E. DECLARATION OF SIMILARITY

Verykool USA Inc

To: 775 Montague Expressway Milpitas, CA 95035, USA

Declaration Letter

Dear Sir,

For our business issue and marketing requirement, we would like to list serial model numbers on The FCC reports, as following:

Model No.: s5205

Serial Model No: s5204

We declare that : s5205, s5204 all models the same PCB and Appearance shape, accessories ,the difference of these is listed as below:

Main Model No	Serial Model No	Difference
s5205	s5204	The only difference between s5205 and s5204 is the front camera change from 8+8 (5+5AFHW) to 5+8 (2+5AFHW)

Thank you!

Sincerely,

Client's signature :



Client's name: Sunny Choi

Title : Product Director

Date: 9/1/2017

Contact information : Verykool USA Inc

Address : 3636 Nobel Drive, Suite 325, San Diego, California 92122 United States