



Report No.: SZ12050058S01



SAR TEST REPORT

Issued to

Verykool USA Inc

For

3G Mobile Phone

Model Name : S757
Trade Name : verykool
Brand Name : verykool
FCC ID : WA6S757
Standard : FCC Oet65 Supplement C Jun.2001
47CFR 2.1093
ANSI C95.1-1999
IEEE 1528-2003
MAX SAR : Head: 0.174W/kg
Body: 0.476W/kg
Test date : 2012.5.15
Issue date : 2012.5.29



Shenzhen MORLAB Communication Technology Co., Ltd.

Tested by Zhu Zhan

Zhu Zhan

Date 2012.5.29

Approved by Wei Yanquan

Wei Yanquan

Date 2012.5.29

Review by Samuel Peng

Samuel Peng

Date 2012.5.29

CMA Authorized Test Lab
LAB CODE 20091223-00
IEEE 1725

OFTA
OTA
電訊管理局



GCF
Official Observer of
Global Certification Forum

Bluetooth
BQTF

FCC
Reg. No.
741109

The report refers only to the sample tested and does not apply to the bulk. This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen MORLAB Communication Technology Co., Ltd. It may not be reproduced in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it, or a certified copy thereof prepared by the Shenzhen MORLAB Telecommunication Co., Ltd to his GPRSer, Supplier or others persons directly concerned. Shenzhen MORLAB Telecommunication Co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report. In the event of the improper use of the report, Shenzhen MORLAB Telecommunication Co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

DIRECTORY

TESTING LABORATORY.....	4
1.1. Identification of the Responsible Testing Laboratory.....	4
1.2. Identification of the Responsible Testing Location.....	4
1.3. Accreditation Certificate.....	4
1.4. List of Test Equipments.....	4
2. TECHNICAL INFORMATION.....	5
2.1. Identification of Applicant.....	5
2.2. Identification of Manufacturer.....	5
2.3. Equipment Under Test (EUT).....	5
2.3.1. Photographs of the EUT.....	5
2.3.2. Identification of all used EUT.....	6
2.4. Applied Reference Documents.....	6
2.5. Device Category and SAR Limits.....	6
2.6. Test Environment/Conditions.....	7
3. SPECIFIC ABSORPTION RATE (SAR).....	8
3.1. Introduction.....	8
3.2. SAR Definition.....	8
4. SAR MEASUREMENT SETUP.....	9
4.1. The Measurement System.....	9
4.2. Probe.....	9
4.3. Probe Calibration Process.....	11
4.3.1 Dosimetric Assessment Procedure.....	11
4.3.2 Free Space Assessment Procedure.....	11
4.3.2 Temperature Assessment Procedure.....	11
4.4. Phantom.....	12
4.5. Device Holder.....	12
5. TISSUE SIMULATING LIQUIDS.....	13
6. UNCERTAINTY ASSESSMENT.....	15
6.1. UNCERTAINTY EVALUATION FOR HANDSET SAR TEST.....	15
6.2. UNCERTAINTY FOR SYSTEM PERFORMANCE CHECK.....	16
7. SAR MEASUREMENT EVALUATION.....	18

7.1. System Setup.....	18
7.2. Validation Results.....	19
8. OPERATIONAL CONDITIONS DURING TEST.....	20
8.1. Informations on the testing.....	20
8.2. Body-worn Configurations.....	21
8.3. Measurement procedure.....	21
8.4. Description of interpolation/extrapolation scheme.....	22
9. 3G MEASUREMENT PROCEDURES.....	23
9.1. WCDMA Handsets Test Configuration.....	23
9.2. Output Power Verification.....	23
9.3. Head SAR measurements.....	23
9.4. Body SAR measurements.....	23
9.5. Handsets with Release 6 HSPA(HSDPA/HSUPA).....	24
9.6. Measurement Of Conducted Peak Output Power.....	25
10. WIRELESS HOT SPOT SAR EVALUATION PROCEDURES.....	28
11. TEST RESULTS LIST.....	29
11. MULTIPLE TRANSMITTERS EVALUATION.....	33
ANNEX A EUT SETUP PHOTOS.....	34
ANNEX B GRAPH TEST RESULTS.....	39

Change History		
Issue	Date	Reason for change
1.0	May 29, 2012	First edition

Testing Laboratory

1.1. Identification of the Responsible Testing Laboratory

Company Name: Shenzhen Morlab Communications Technology Co., Ltd.
 Department: Morlab Laboratory
 Address: 3/F, Electronic Testing Building, Shahe Road, Nanshan District, Shenzhen, 518055 P. R. China
 Responsible Test Lab Manager: Mr. Shu Luan
 Telephone: +86 755 86130268
 Facsimile: +86 755 86130218

1.2. Identification of the Responsible Testing Location

Name: Shenzhen Morlab Communications Technology Co., Ltd.
 Morlab Laboratory
 Address: 3/F, Electronic Testing Building, Shahe Road, Nanshan District, Shenzhen, 518055 P. R. China

1.3. Accreditation Certificate

Accredited Testing Laboratory: No. CNAS L3572

1.4. List of Test Equipments

No.	Instrument	Type	Cal. Date	Cal. Due
1	PC	Dell (Pentium IV 2.4GHz, SN:X10-23533)	(n.a)	(n.a)
2	Network Emulator	Rohde&Schwarz (CMU200, SN:105894)	2011-9-26	1year
3	Voltmeter	Keithley (2000, SN:1000572)	2011-9-24	1year
4	Synthesizer	Rohde&Schwarz (SML_03, SN:101868)	2011-9-24	1year
5	Amplifier	Nucl udes (ALB216, SN:10800)	2011-9-24	1year
6	Power Meter	Rohde&Schwarz (NRVD, SN:101066)	2011-9-24	1year
7	Probe	Satimo (SN:SN_3708_EP80)	2011-9-24	1year
8	Phantom	Satimo (SN:SN_36_08_SAM62)	2011-9-24	1year
9	Liquid	Satimo (Last Calibration: 2012-5-15)	N/A	N/A
10	Dipole 835MHz	Satimo (SN 36/08 DIPC 99)	2011-9-24	1year
11	Dipole 1900MHz	Satimo (SN 36/08 DIPF 102)	2011-9-24	1year
12	Dipole 2450MHz	Satimo (SN 36/08 DIPFJ103)	2011-9-24	1year

2. Technical Information

Note: the following data is based on the information by the applicant.

2.1. Identification of Applicant

Company Name: Verykool USA Inc
Address: 4350 Executive Dr. #100, San Diego

2.2. Identification of Manufacturer

Company Name: Verykool Wireless Technology Ltd.
Address: NO.1 Building,399 Keyuan Road,Zhangjiang Hi-Tech Park,Pudong
New Area,Shanghai,China 201203

2.3. Equipment Under Test (EUT)

Model Name: S757
Trade Name: verykool
Brand Name: verykool
Hardware Version: N/A
Software Version: N/A
Frequency Bands: GSM 850MHz / PCS 1900MHz; WCDMA 850MHz/1900MHz;
WIFI802.11 B/G; Bluetooth
Modulation Mode: GSM/GPRS: GMSK; EDGE:8PSK
WIFI802.11B: DSSS; WIFI802.11G: OFDM
WIFI 802.11N: OFDM
WCDMA/HSDPA/HSUPA:QPSK
BT: GFSK
Multislot Class: GPRS: Multislot Class 12; EDGE: Multislot Class 12
Antenna type: Fixed Internal Antenna
Development Stage: Identical prototype
Battery Model: BL-05
Battery specification: 2300mAh3.7V
WCDMA release: Release 6

2.3.1. Photographs of the EUT

Please see for photographs of the EUT.

2.3.2. Identification of all used EUT

The EUT identity consists of numerical and letter characters, the letter character indicates the test sample, and the following two numerical characters indicate the software version of the test sample.

EUT Identity	Hardware Version	Software Version
1#	N/A	N/A

2.4. Applied Reference Documents

Leading reference documents for testing:

No.	Identity	Document Title
1	47 CFR§2.1093	Radiofrequency Radiation Exposure Evaluation: Portable Devices
2	FCC OET Bulletin 65 (Edition 97-01), Supplement C (Edition 01-01)	Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields
3	ANSI C95.1-1999	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3kHz to 300 GHz
4	IEEE 1528-2003	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate(SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques.
5	KDB 648474 D1	SAR Evaluation Considerations for Handsets with Multiple Transmitters and Antennas
6	KDB941225D1 v02	SAR Measurement Procedures for 3G Devices
7	KDB 941225 D6	SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities
8	KDB 2484227	SAR Measurement Procedures for 802.11 a/b/g Transmitters

2.5. Device Category and SAR Limits

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user. Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.

2.6. Test Environment/Conditions

Normal Temperature (NT):	20 ... 25 °C
Relative Humidity:	30 ... 75 %
Air Pressure:	980 ... 1020 hPa
Test frequency:	GSM 850MHz PCS 1900MHz WCDMA 850MHz WCDMA1900MHz
Operation mode:	Call established
Power Level:	GSM 850 MHz Maximum output power(level 5) PCS 1900 MHz Maximum output power(level 0) WCDMA Maximum output power

During SAR test, EUT is in Traffic Mode (Channel Allocated) at Normal Voltage Condition. A communication link is set up with a System Simulator (SS) by air link, and a call is established.

The Absolute Radio Frequency Channel Number (ARFCN) is allocated to 125, 190 and 251 respectively in the case of GSM 850 MHz, or to 512, 661 and 810 respectively in the case of PCS 1900 MHz ,or to 9263, 9400 and 9537 respectively in the case of WCDMA 19000, or to 4133, 4175 and 4232 respectively in the case of WCDMA 850. The EUT is commanded to operate at maximum transmitting power.

The EUT shall use its internal transmitter. The antenna(s), battery and accessories shall be those specified by the manufacturer. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output. If a wireless link is used, the antenna connected to the output of the base station simulator shall be placed at least 50 cm away from the handset.

The signal transmitted by the simulator to the antenna feeding point shall be lower than the output power level of the handset by at least 35 dB.

For SAR testing, EUT is in GPRS/EDGE or WCDMA link mode. In GPRS/EDGE link mode, its crest factor is 2, because EUT is set in GPRS/EDGE multi-slot class 12 with 4 uplink slots. In WCDMA and WIFI mode, its crest factor is 1.

3. Specific Absorption Rate (SAR)

3.1. Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

3.2. SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density. ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$\text{SAR} = C \frac{\delta T}{\delta t}$$

, where C is the specific heat capacity, δT is the temperature rise and δt the exposure duration, or related to the electrical field in the tissue by

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

, where σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the rms electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

4. SAR Measurement Setup

4.1. The Measurement System

Comosar is a system that is able to determine the SAR distribution inside a phantom of human being according to different standards. The Comosar system consists of the following items:

- Main computer to control all the system
- 6 axis robot
- Data acquisition system
- Miniature E-field probe
- Phone holder
- Head simulating tissue

The following figure shows the system.



The EUT under test operating at the maximum power level is placed in the phone holder, under the phantom, which is filled with head simulating liquid. The E-Field probe measures the electric field inside the phantom. The OpenSAR software computes the results to give a SAR value in a 1g or 10g mass.

4.2. Probe


For the measurements the Specific Dosimetric E-Field Probe SN 37/08 EP80 with following specifications is used

- Dynamic range: 0.01-100 W/kg
- Tip Diameter : 6.5 mm
- Distance between probe tip and sensor center: 2.5mm
- Distance between sensor center and the inner phantom surface: 4 mm
(repeatability better than +/- 1mm)

- Probe linearity: <0.25 dB
- Axial Isotropy: <0.25 dB
- Spherical Isotropy: <0.25 dB
- Calibration range: 835to 2500MHz for head & body simulating liquid.

Angle between probe axis (evaluation axis) and surface normal line: less than 30°

Probe calibration is realized, in compliance with CENELEC EN 62209 and IEEE 1528 std, with CALISAR, Antennessa proprietary calibration system. The calibration is performed with the EN 622091 annexe technique using reference guide at the five frequencies.

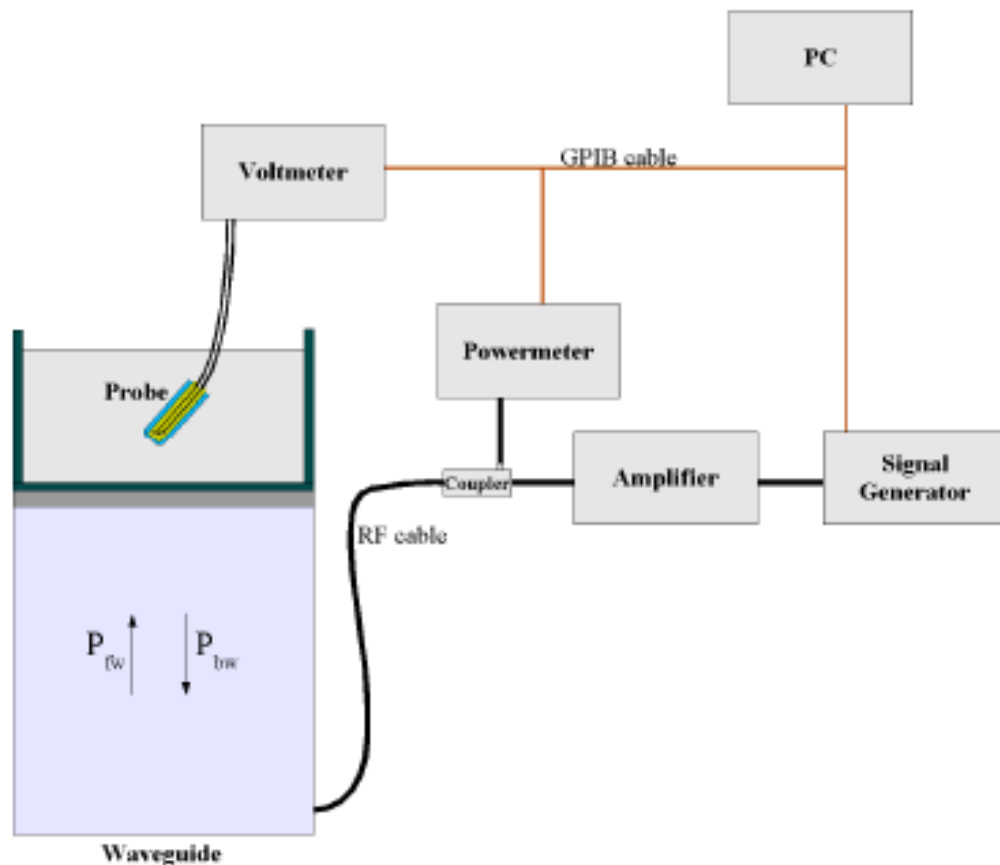

$$SAR = \frac{4(P_{fw} - P_{bw})}{ab\delta} \cos^2\left(\pi \frac{y}{a}\right) e^{-(2z/\delta)}$$

Where :

P_{fw} = Forward Power

P_{bw} = Backward Power

a and b = Waveguide dimensions

δ = Skin depth

Keithley configuration:

Rate = Medium; Filter =ON; RDGS=10; FILTER TYPE =MOVING AVERAGE; RANGE AUTO

After each calibration, a SAR measurement is performed on a validation dipole and compared with a NPL calibrated probe, to verify it.

The calibration factors, CF(N), for the 3 sensors corresponding to dipole 1, dipole 2 and dipole 3 are:

$$CF(N)=SAR(N)/V_{lin}(N) \quad (N=1,2,3)$$

The linearised output voltage $V_{lin}(N)$ is obtained from the displayed output voltage $V(N)$ using

$$V_{lin}(N)=V(N)*(1+V(N)/DCP(N)) \quad (N=1,2,3)$$

where DCP is the diode compression point in mV.

4.3. Probe Calibration Process

4.3.1 Dosimetric Assessment Procedure

Each E-Probe/Probe Amplifier combination has unique calibration parameters. SATIMO Probe calibration procedure is conducted to determine the proper amplifier settings to enter in the probe parameters. The amplifier settings are determined for a given frequency by subjecting the probe to a known E-field density (1 mW/cm²) using an with CALISAR, Antenna proprietary calibration system.

4.3.2 Free Space Assessment Procedure

The free space E-field from amplified probe outputs is determined in a test chamber. This calibration can be performed in a TEM cell if the frequency is below 1 GHz and in a waveguide or other methodologies above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is rotated 360 degrees until the three channels show the maximum reading. The power density readings equates to 1 mW/cm².

4.3.2 Temperature Assessment Procedure

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated head tissue. The E-field in the medium correlates with the temperature rise in the dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

Where:

$$SAR = C \frac{\Delta T}{\Delta t}$$

Δt = exposure time (30 seconds),

C = heat capacity of tissue (brain or muscle),

ΔT = temperature increase due to RF exposure.

SAR is proportional to $\Delta T / \Delta t$, the initial rate of tissue heating, before thermal diffusion takes place. The electric field in the simulated tissue can be used to estimate SAR by equating the thermally derived SAR to that with the E- field component.

$$SAR = \frac{|E|^2 \cdot \sigma}{\rho}$$

Where:

σ = simulated tissue conductivity,


ρ = Tissue density (1.25 g/cm³ for brain tissue)

4.4. Phantom

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.

4.5. Device Holder

The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is lower than 1°.

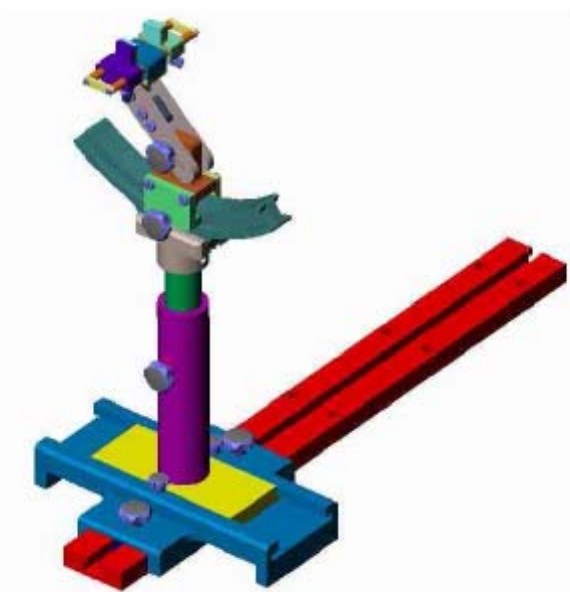

Device holder

System Material	Permittivity	Loss Tangent
Delrin	3.7	0.005

5. Tissue Simulating Liquids

Simulant liquids that are used for testing at frequencies of 850 and 1900MHz . which are made mainly of sugar, salt and water solutions may be left in the phantoms. Approximately 20litres are needed for an upright head compared to about 25 litres for a horizontal bath phantom. The liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is or from the flat phantom to the liquid top surface is 15cm.

Following are the recipes for one liter of head and body tissue simulating liquid for frequency band 835 MHz and 1900 MHz .

Ingredients (% by weight)	Frequency Band		Frequency Band		Frequency Band	
	835MHz		1900MHz		2450MHz	
Tissue Type	Head	Body	Head	Body	Head	Body
Water	41.45	52.4	54.9	40.4	62.7	73.2
Salt(NaCl)	1.45	1.4	0.18	0.5	0.5	0.04
Sugar	56.0	45.0	0.0	58.0	0.0	0.0
HEC	1.0	1.0	0.0	1.0	0.0	0.0
Bactericide	0.1	0.1	0.0	0.1	0.0	0.0
Triton	0.0	0.0	0.0	0.0	0.0	0.0
DGBE	0.0	0.0	44.92	0.0	36.8	0.0
Acticide SPX	0.0	0.0	0.0	0.0	0.0	26.7
Dielectric Constant	42.45	56.1	39.9	54.0	39.8	52.5
Conductivity (S/m)	0.91	0.95	1.42	1.45	1.88	1.97

Recipes for Tissue Simulating Liquid

The dielectric parameters of the liquids were verified prior to the SAR evaluation using an Agilent 85033E Dielectric Probe Kit and an Agilent Network Analyzer.

Table 1: Dielectric Performance of Head Tissue Simulating Liquid

Temperature: 22.0~23.8°C, humidity: 54~60%.			
Frequency	Description	Permittivity ϵ	Conductivity σ (S/m)
835 MHz	Reference result $\pm 5\%$ window	41.5 39.425 to 43.575	0.90 0.855 to 0.945
	Validation value (May 15)	41.675999	0.894409
1900 MHz	Reference result $\pm 5\%$ window	40 38 to 42	1.40 1.33 to 1.47
	Validation value (May 15)	38.509998	1.436111
2450 MHz	Reference result $\pm 5\%$ window	39.7	1.93
	Validation value (May 15)	39.622857	1.964313

For body-worn measurements, the device was tested against flat phantom representing the user body. Under measurement phone was put on in the phone holder.

Table 2: Dielectric Performance of Body Tissue Simulating Liquid

Temperature: 22.0~23.8°C, humidity: 54~60%.			
Frequency	Description	Permittivity ϵ	Conductivity σ (S/m)
835 MHz	Reference result $\pm 5\%$ window	55.2 52.44 to 57.96	0.97 0.9215 to 1.0185
	Validation value (May 15)	55.709999	0.9809033
1900 MHz	Reference result $\pm 5\%$ window	53.3 50.635 to 55.965	1.52 1.444 to 1.596
	Validation value (May 15)	52.548876	1.553978
2450 MHz	Reference result $\pm 5\%$ window	52.7	1.95
	Validation value (May 15)	52.548876	1.974257

6. Uncertainty Assessment

The following table includes the uncertainty table of the IEEE 1528. The values are determined by Antennessa.

6.1. UNCERTAINTY EVALUATION FOR HANDSET SAR TEST

a	b	c	d	e= f(d,k)	f	g	h= c*f/e	i= c*g/e	k
Uncertainty Component	Sec.	Tol (+-%)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	lg Ui (+-%)	10g Ui (+-%)	Vi
Measurement System									
Probe calibration	E.2.1	4.76	N	1	1	1	4.76	4.76	∞
Axial Isotropy	E.2.2	2.5	R	$\sqrt{3}$	0.7	0.7	1.01	1.01	∞
Hemispherical Isotropy	E.2.2	4.0	R	$\sqrt{3}$	0.7	0.7	1.62	1.62	∞
Boundary effect	E.2.3	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	E.2.4	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	∞
System detection limits	E.2.5	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Readout Electronics	E.2.6	0.02	N	1	1	1	0.02	0.02	∞
Reponse Time	E.2.7	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Integration Time	E.2.8	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
RF ambient Conditions	E.6.1	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe positioner Mechanical Tolerance	E.6.2	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
Probe positioning with respect to Phantom Shell	E.6.3	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	∞
Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	E.5.2	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	∞
Test sample Related									
Test sample positioning	E.4.2.1	0.03	N	1	1	1	0.03	0.03	N-1
Device Holder Uncertainty	E.4.1.1	5.00	N	1	1	1	5.00	5.00	N-1
Output power Power drift - SAR drift measurement	6.6.2	4.04	R	$\sqrt{3}$	1	1	2.33	2.33	∞
Phantom and Tissue Parameters									
Phantom Uncertainty (Shape and thickness tolerances)	E.3.1	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	∞

Liquid conductivity - deviation from target value	E.3.2	4.57	R	$\sqrt{3}$	0.64	0.43	1.69	1.13	∞
Liquid conductivity - measurement uncertainty	E.3.3	5.00	N	1	0.64	0.43	3.20	2.15	M
Liquid permittivity - deviation from target value	E.3.2	3.69	R	$\sqrt{3}$	0.6	0.49	1.28	1.04	∞
Liquid permittivity - measurement uncertainty	E.3.3	10.00	N	1	0.6	0.49	6.00	4.90	M
Combined Standard Uncertainty			RSS				11.55	10.67	
Expanded Uncertainty (95% Confidence interval)			K=2				23.11	21.33	

6.2. UNCERTAINTY FOR SYSTEM PERFORMANCE CHECK

a	b	c	d	e= f(d,k)	f	g	h= c*f/e	i= c*g/e	k
Uncertainty Component	Sec.	Tol (+-%)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	Vi
Measurement System									
Probe calibration	E.2.1	4.76	N	1	1	1	4.76	4.76	∞
Axial Isotropy	E.2.2	2.5	R	$\sqrt{3}$	0.7	0.7	1.01	1.01	∞
Hemispherical Isotropy	E.2.2	4.0	R	$\sqrt{3}$	0.7	0.7	1.62	1.62	∞
Boundary effect	E.2.3	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	E.2.4	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	∞
System detection limits	E.2.5	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Readout Electronics	E.2.6	0.02	N	1	1	1	0.02	0.02	∞
Reponse Time	E.2.7	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Integration Time	E.2.8	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
RF ambient Conditions	E.6.1	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe positioner Mechanical Tolerance	E.6.2	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
Probe positioning with respect to Phantom Shell	E.6.3	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	∞
Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	E.5.2	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	∞
Dipole									
Dipole axis to liquid Distance	8,E.4.2	1.00	N	$\sqrt{3}$	1	1	0.58	0.58	∞

Input power and SAR drift measurement	8,6.6.2	4.04	R	$\sqrt{3}$	1	1	2.33	2.33	∞
Phantom and Tissue Parameters									
Phantom Uncertainty (Shape and thickness tolerances)	E.3.1	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	∞
Liquid conductivity - deviation from target value	E.3.2	4.57	R	$\sqrt{3}$	0.64	0.43	1.69	1.13	∞
Liquid conductivity - measurement uncertainty	E.3.3	5.00	N	$\sqrt{3}$	0.64	0.43	1.85	1.24	M
Liquid permittivity - deviation from target value	E.3.2	3.69	R	$\sqrt{3}$	0.6	0.49	1.28	1.04	∞
Liquid permittivity - measurement uncertainty	E.3.3	10.00	N	$\sqrt{3}$	0.6	0.49	3.46	2.83	M
Combined Standard Uncertainty			RSS				8.83	8.37	
Expanded Uncertainty (95% Confidence interval)			K=2				17.66	16.73	

7. SAR Measurement Evaluation


7.1. System Setup

In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave which comes from a signal generator at frequency 835 MHz, 1900 MHz and 2450MHz. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom.

Equipments:

name	Type and specification
Signal generator	E4433B
Directional coupler	450MHz-3GHz
Amplifier	3W 502(10-2500MHz)
Reference dipole	835MHz:SN 36/08 DIPC 99 1900MHz:SN 36/08 DIPF 102

System Verification Setup Block Diagram

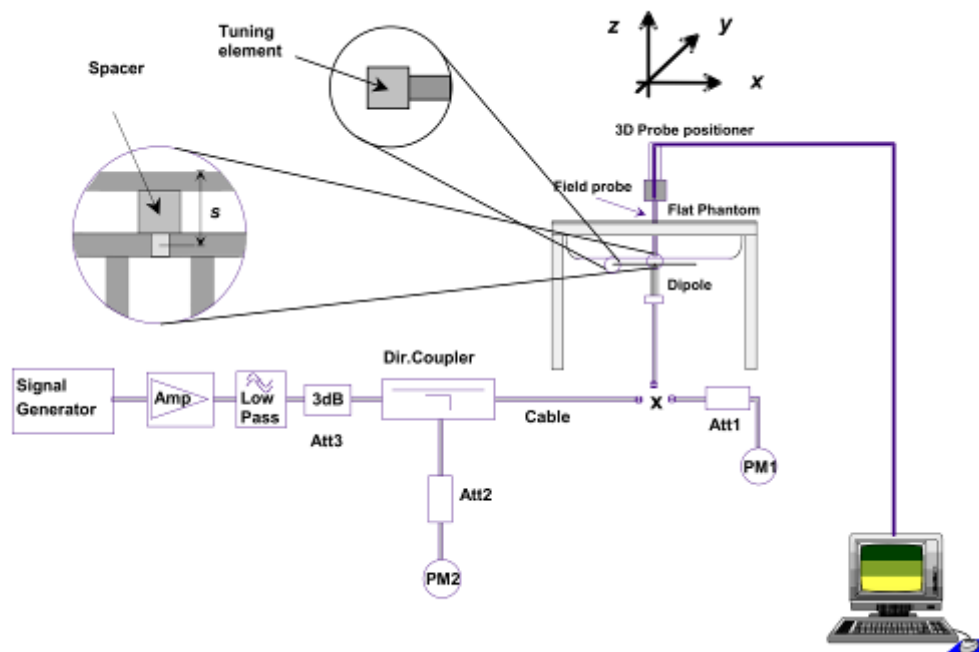

7.2. Validation Results

Comparing to the original SAR value provided by SATIMO, the validation data should be within its specification of 10 %.

Frequency	Description	SAR[W/Kg] 1g	
		Head	Body
835 MHz	Reference result $\pm 10\%$ window	9.714 8.743 to 10.685	9.714 8.743 to 10.685
	Validation value (May 15)	9.912	9.544
1900 MHz	Reference result $\pm 10\%$ window	39.890 35.901 to 43.879	39.890 35.901 to 43.879
	Validation value (May 15)	37.820	38.960
2450 MHz	Reference result $\pm 10\%$ window	53.850 48.465 to 59.235	50.820 45.738 to 55.902
	Validation value (May 15)	49.772	51.156


Note: System checks the specific test data please see page 144~155

8. Operational Conditions During Test

8.1. Informations on the testing

The mobile phone antenna and battery are those specified by the manufacturer. The battery is fully charged before each measurement. The output power and frequency are controlled using a base station simulator. The mobile phone is set to transmit at its highest output peak power level.

The mobile phone is test in the “cheek” and “tilted” positions on the left and right sides of the phantom. The mobile phone is placed with the vertical centre line of the body of the mobile phone and the horizontal line crossing the centre of the earpiece in a plane parallel to the sagittal plane of the phantom.

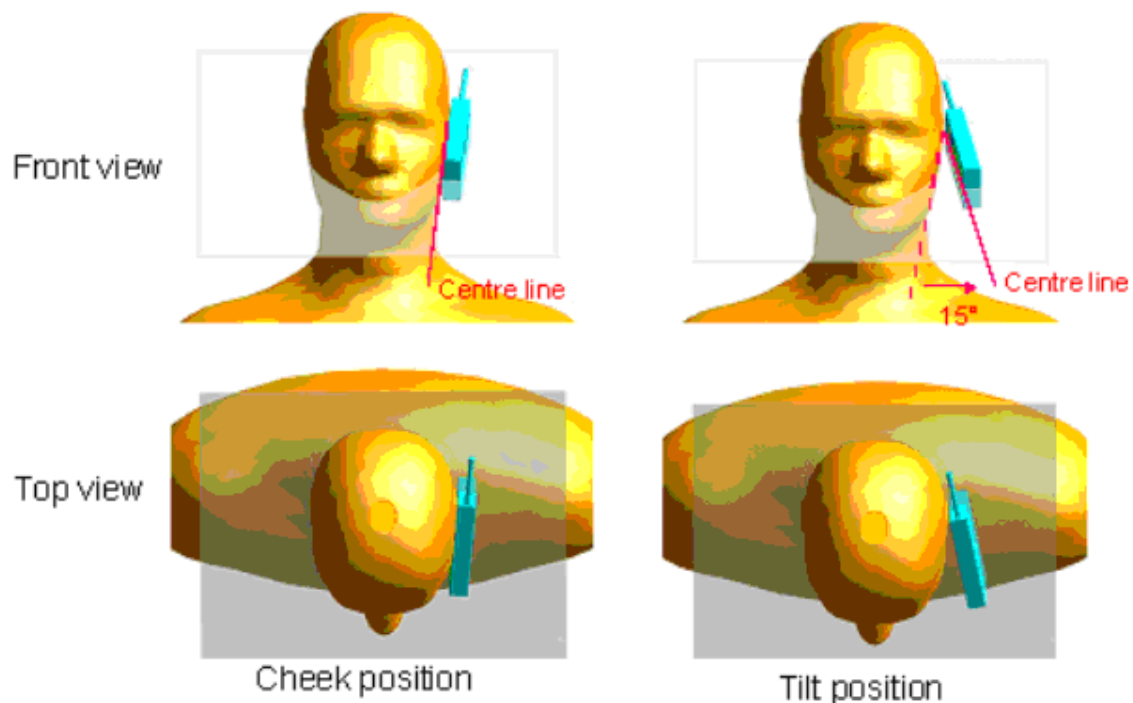

Description of the “cheek” position:

The mobile phone is well placed in the reference plane and the earpiece is in contact with the ear. Then the mobile phone is moved until any point on the front side get in contact with the cheek of the phantom or until contact with the ear is lost.

Description of the “tilted” position:

The mobile phone is well placed in the “cheek” position as described above. Then the mobile phone is moved outward away from the month by an angle of 15 degrees or until contact with the ear lost.


Remark: Please refer to Appendix B for the test setup photos.

8.2. Body-worn Configurations

The body-worn configurations shall be tested with the supplied accessories (belt-clips, holsters, etc.) attached to the device in normal use configuration.

The depth of the body tissue was 15.1cm. The distance between the back of the device and the bottom of the flat phantom is 1.5cm(taking into account of the IEEE 1528 and the place of the antenna)

For body-worn and other configurations a flat phantom shall be used which is comprised of material with electrical properties similar to the corresponding tissues.

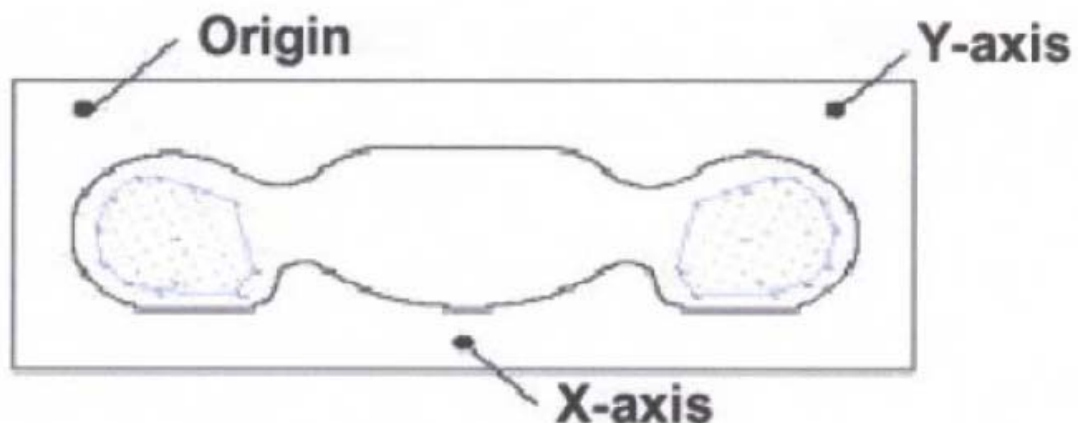

SAR Measurement Points in Area Scan

8.3. Measurement procedure

The following steps are used for each test position

- Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface
- Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
- Measurement of the SAR distribution with a grid of 8 to 16mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors can not directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
- Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8*4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

8.4. Description of interpolation/extrapolation scheme

The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimize measurements errors, but the highest local SAR will occur at the surface of the phantom.

An extrapolation is using to determinate this highest local SAR values. The extrapolation is based on a fourth-order least-square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1mm step.

The measurements have to be performed over a limited time (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8 mm. To obtain an accurate assessment of the maximum SAR averaged over 10 grams and 1 gram requires a very fine resolution in the three dimensional scanned data array.

9. 3G MEASUREMENT PROCEDURES

9.1.WCDMA Handsets Test Configuration

The following procedures are applicable to WCDMA handsets operating under 3GPP Release 99, Release 5 and Release 6. The default test configuration is to measure SAR with an established radio link between the DUT and a communication test set using a 12.2kbps RMC (refer measurement channel) configured in Test Loop Mode 1. SAR is selectively confirmed for other physical channel configurations (DPCCH & DPDCH_n), HSDPA and HSPA(HSDPA/HSUPA) modes according to output power, exposure conditions and device operating capabilities. Both uplink and downlink should be configured with same RMC or AMR, when required. SAR for Release 5 HSDPA and Release 6 HSPA are measured using the applicable FRC (fised reference channel) and E-DCH reference channe^k configurations. Maximum output power is verified according to applicable versions of 3GPP TS 34.121 and SAR must be measured according to these maximum output conditions. When Maximum Power Reduction (MPR) is not implemented according to Cubic Metric (CM) requirements for Release 6 HSPA, the following procedures do not apply.

9.2. Output Power Verification

Maximum output power is verified on the High, Middle and Low channels according to the general descriptions in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC(transmit power control) set to all “1’s” for WCDMA/HSDPA or applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCH and spreading codes) should be tabulated in the test report. All configurations that are not supported by the EUT or cannot be measured due to technical or equipment limitations should be clearly identified.

If Maximum SAR for 12.2kbps RMC is $\leq 75\%$ of the SAR limit and maximum average output of each RF channel with HSUPA/HSDPA active is less than 1/4 dB higher than that measured without HSUPA/HSDPA using 12.2kbps RMC, according to KDB 941225D01v02, SAR is not required for this handset with HSPA capabilities.

9.3. Head SAR measurements

SAR for head exposure configurations in voice mode is measured using a 12.2 kbps RMC with TPC bits configured to all “1’s”. SAR in AMR configurations is not required when the maximum average output of each RF channel for 12.2 kbps AMR is less than 1/4 dB higher than that measured without HSUPA/HSDPA using 12.2kbps RMC and the maximum SAR for 12.2 kbps RMC is $\leq 75\%$ of the SAR limit. Otherwise, SAR is measured on the maximum output channel in 12.2 kbps AMR with a 3.4 kbps SRB (signaling radio bearer) using the exposure configuration that result in the highest SAR 12.2 kbps RMC for that RF channel.

9.4. Body SAR measurements

SAR for body exposure configurations in voice and data modes is measured using a 12.2 kbps RMC with TPC bits configured to all “1’s”. SAR for other spreading codes and multiple DPDCH_n, when

supported by the DUT, are not required when the maximum average output of each RF channel, for spreading codes and multiple DPDCHn configuration are less than 1/4 dB higher than those measured in 12.2 kbps RMC. Otherwise, SAR is measured on the maximum output channel with an applicable RMC configuration for the corresponding spreading code or DPDCHn using the exposure configuration that results in the highest SAR with 12.2 kbps RMC. When more than 2 DPDCHn are supported by the DUT, it may be necessary to configure additional DPDCHn for a DUT using FTM (Factory Test Mode) or other chipset based test approaches with parameters similar to those used in 384 kbps and 768 kbps RMC.

9.5. Handsets with Release 6 HSPA(HSDPA/HSUPA)

Body SAR is not required for handsets with HSPA capabilities when the maximum average output of each RF channel with HSUPA/HSDPA active is less than 1/4 dB higher than that measured without HSUPA/HSDPA using 12.2 kbps RMC and maximum SAR for 12.2 kbps RMC is $\leq 75\%$ of the SAR limit. Otherwise, SAR is measured for HSPA using the additional body SAR procedures in the “Release 6 HSPA Data Devices” section of this document, on the maximum output channel with the body exposure configuration that results in the highest SAR in 12.2 kbps RMC for that RF channel. When VOIP is applicable for head exposure in HSPA, SAR is not required when the maximum output of each RF channel with HSPA is less than 1/4 dB higher than that measured without HSUPA/HSDPA using 12.2 kbps RMC; otherwise, the same HSPA configuration used for body measurement should be tested for head exposure.

9.6. Measurement Of Conducted Peak Output Power.

1. WCDMA Conducted peak output power

Item	band	WCDMA 850			WCDMA 1900		
	ARFCN	4132	4175	4233	9262	9400	9538
	subtest	dBm			dBm		
5.2(WCDMA)	non	21.85	21.73	21.80	21.45	21.37	21.39
HSDPA	1	21.84	21.72	21.77	21.43	21.36	21.33
	2	21.83	21.70	21.76	21.47	21.34	20.38
	3	21.67	21.35	21.33	21.02	20.87	19.85
	4	21.62	21.34	21.39	20.96	20.86	19.81
HSUPA	1	21.81	21.71	21.79	21.43	21.35	21.33
	2	20.07	20.12	20.18	19.58	19.43	19.36
	3	20.74	20.95	20.86	20.53	20.31	20.32
	4	20.08	19.87	20.05	20.03	19.41	19.44
	5	21.85	21.69	21.79	21.46	21.37	21.31

2. GSM Conducted peak output power

Band	Channel	Frequency (MHz)	Output Power (dBm)
GSM 850	128	824.2	33.59
	190	836.6	33.47
	251	848.8	31.08
PCS 1900	512	1850.2	29.28
	661	1880.0	29.33
	810	1909.8	29.47

2. GPRS Mode Conducted peak output power

Band	Channel	Frequency (MHz)	Output Power(dBm)			
			Slot 1	Slot 2	Slot 3	Slot 4
GSM 850	128	824.2	33.52	33.52	33.15	32.85
	190	836.6	33.42	31.20	30.47	29.74
	251	848.8	31.02	27.21	26.94	25.96
PCS 1900	512	1850.2	29.44	28.56	26.95	26.16
	661	1880.0	29.44	28.54	26.92	26.13
	810	1909.8	29.65	28.69	27.13	26.32

GPRS Time-based Average Power

Band	Channel	Frequency (MHz)	Output Power(dBm)			
			Slot 1	Slot 2	Slot 3	Slot 4
GSM 850	128	824.2	24.52	27.50	28.89	29.84
	190	836.6	24.42	25.18	26.21	26.73
	251	848.8	22.02	21.19	22.68	22.95
PCS 1900	512	1850.2	20.44	22.54	22.69	23.15
	661	1880.0	20.44	22.52	22.66	23.12
	810	1909.8	20.65	22.67	22.87	23.31

3. EDGE Mode Conducted peak output power

Band	Channel	Frequency (MHz)	Output Power(dBm)			
			Slot 1	Slot 2	Slot 3	Slot 4
GSM 850	128	824.2	27.12	26.32	25.45	24.32
	190	836.6	27.34	26.52	25.61	24.55
	251	848.8	27.27	26.48	25.58	24.48
PCS 1900	512	1850.2	25.87	25.33	24.35	23.13
	661	1880.0	25.67	25.74	24.22	23.54
	810	1909.8	25.84	25.62	24.37	23.27

EDGE Time-based Average Power

Band	Channel	Frequency (MHz)	Output Power(dBm)			
			Slot 1	Slot 2	Slot 3	Slot 4
GSM 850	128	824.2	18.12	20.3	21.19	21.31
	190	836.6	18.34	20.5	21.35	21.54
	251	848.8	18.27	20.46	21.32	21.47
PCS 1900	512	1850.2	16.87	19.31	20.09	20.12
	661	1880.0	16.67	19.72	19.96	20.53
	810	1909.8	16.84	19.6	20.11	20.26

4. Wifi peak output power

Band	Channel	Frequency (MHz)	Output Power(dBm)		
			802.11B (DSSS)	802.11G (OFDM)	802.11N20 (OFDM)
WiFi	1	2412	14.72	12.69	12.54
	6	2437	15.04	12.24	12.26
	11	2462	15.07	12.33	11.68


5. Bluetooth peak output power

Band	Channel	Frequency (MHz)	Output Power(dBm)
BT	0	2402	-2.852
	38	2441	-2.887
	79	2480	-2.930

10. Wireless Hot Spot SAR Evaluation Procedures

This Portable Devices with Wireless Router function. And the SAR evaluation procedures accord with KDB 941225 D06 Hot Spot SAR v01.

1. SAR must be tested for all surfaces and edges (side) with a transmitting antenna with in 2.5 cm from that surface or edge, at a test separation distance of 10 mm, in the wireless modes that support wireless routing.
2. Edge configurations:

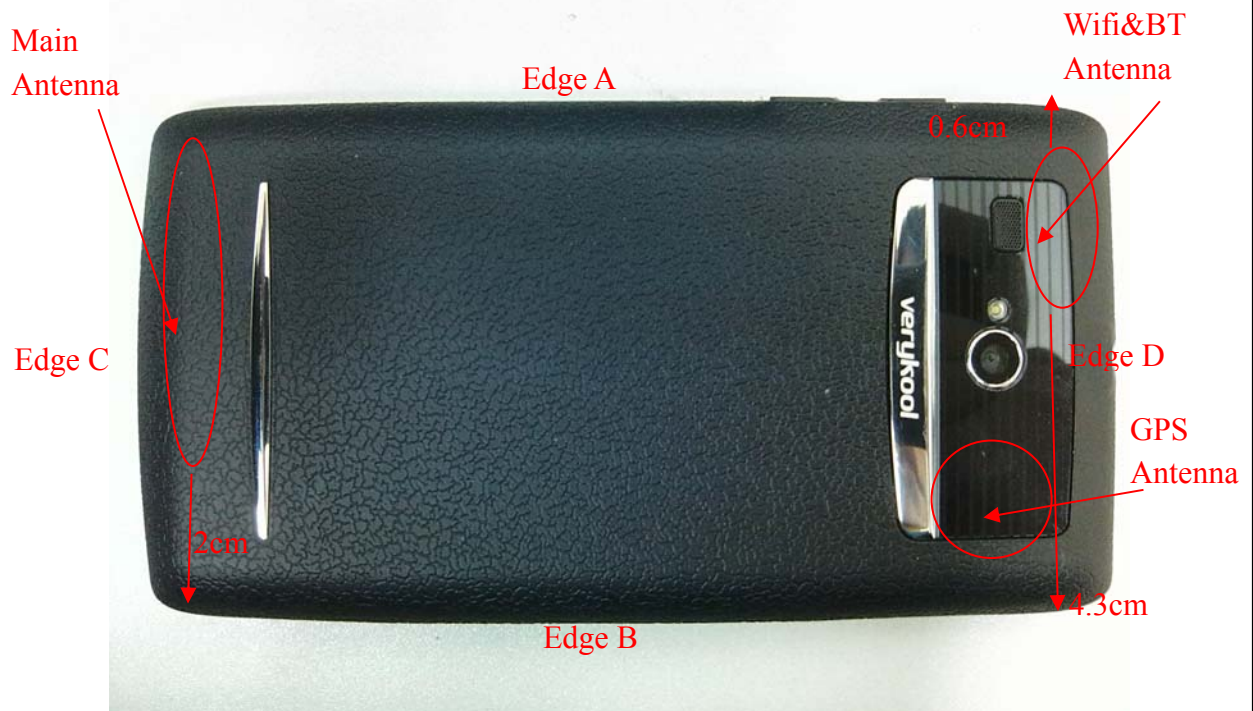

3. WCDMA&GSM antenna is located at edge C, based on the distance between Main Antenna and Edge A&B&C&D, according to KDB941225 D06, the SAR measurement of Edge A&B&C of WCDMA & GSM are required, Edge D is not required.
4. Wifi antenna is located at Edge D, based on the distance between WiFi antenna and Edge A&B&C&D, according to KDB941225 D06, the SAR measurement of edge A&D are required, but Edge B&C are not required. (refer to Multiple Transmitters Evaluation wifi standalone SAR is required, BT is not required)

11. Test Results List

Summary of Measurement Results (GSM 850MHz Band)

Temperature: 21.0~23.8°C, humidity: 54~60%.						
Phantom Configurations		Device Test Positions	Antenna Positions	SAR(W/Kg), 1g Peak		
				Device Test channel,		
				Channel 128	Channel 190	Channel 251
Right Side Of Head		Cheek/Touch	Internal	0.027	/	/
		Ear/Tilt	Internal	0.016	/	/
Left Side Of Head		Cheek/Touch	Internal	0.174	/	/
		Ear/Tilt	Internal	0.122	/	/
Body (10mm Separation)	GSM	Back upward	Internal	0.382	/	/
		Face Upward	Internal	0.249	/	/
	GPRS	Back upward	Internal	0.476	/	/
		Face Upward	Internal	0.210	/	/
		EDGE A	Internal	0.351	/	/
		EDGE B	Internal	0.415	/	/
		EDGE C	Internal	0.169	/	/
	EDGE	Back upward	Internal	/	0.376	/

Summary of Measurement Results (GSM 1900MHz Band)

Temperature: 21.0~23.8°C, humidity: 54~60%.						
Phantom Configurations		Device Test Positions	Antenna Positions	SAR(W/Kg), 1g Peak		
				Device Test channel,		
				Channel 512	Channel 661	Channel 810
Right Side Of Head		Cheek/Touch	Internal	/	/	0.104
		Ear/Tilt	Internal	/	/	0.040
Left Side Of Head		Cheek/Touch	Internal	/	/	0.075
		Ear/Tilt	Internal	/	/	0.035
Body (10mm Separation)	GSM	Back upward	Internal	/	/	0.338
		Face Upward	Internal	/	/	0.159
	GPRS	Back upward	Internal	/	/	0.417
		Face Upward	Internal	/	/	0.203
		EDGE A	Internal	/	/	0.142
		EDGE B	Internal	/	/	0.109
		EDGE C	Internal	/	/	0.249
	EDGE	Back upward	Internal	/	0.355	/

Note:

- 1.The SAR test shall be performed at the high, middle and low frequency channels of each operating mode, when the SAR of highest power channel of each configurations is less than 0.8 W/kg, refer to KDB 648474, testing for the other channels is not required.

2.The main antenna to Edge D is greater than 2.5cm, so the Edge D configuration is not required.

Summary of Measurement Results (WCDMA 850MHz Band)

Temperature: 21.0~23.8°C, humidity: 54~60%.					
Phantom Configurations	Device Test Positions	Antenna Positions	SAR(W/Kg), 1g Peak		
			Device Test channel		
			Channel 4132	Channel 4175	Channel 4233
Right Side Of Head	Cheek/Touch	Internal	0.105	/	/
	Ear/Tilt	Internal	0.070	/	/
Left Side Of Head	Cheek/Touch	Internal	0.039	/	/
	Ear/Tilt	Internal	0.082	/	/
Body (10mm Separation)	Back upward	Internal	0.154	/	/
	Face Upward	Internal	0.073	/	/
	EDGE A	Internal	0.101	/	/
	EDGE B	Internal	0.108	/	/
	EDGE C	Internal	0.069	/	/

Note:

- 1.The SAR test shall be performed at the high, middle and low frequency channels of each operating mode, when the SAR of highest power channel of each configurations is less than 0.8 W/kg, refer to KDB 648474, testing for the other channels is not required.
- 2.The main antenna to Edge D is greater than 2.5cm, so the Edge D configuration is not required.
- 3.Maximum SAR for 12.2kbps RMC is $0.108 \text{ W/Kg} \leq 75\%$ of the SAR limit (i.e. 1.2 W/Kg 1g) and maximum average output of each RF channel with HSUPA/HSDPA active is less than $-1/4 \text{ dB}$ higher than that measured without HSUPA/HSDPA using 12.2kbps RMC (refer to Page 24 of the report), according to KDB 941225D01v02, SAR is not required for this handset with HSPA capabilities.

Summary of Measurement Results (WCDMA 1900MHz Band)

Temperature: 21.0~23.8°C, humidity: 54~60%.					
Phantom Configurations	Device Test Positions	Antenna Positions	SAR(W/Kg), 1g Peak		
			Device Test channel		
			Channel 9262	Channel 9400	Channel 9538
Right Side Of Head	Cheek/Touch	Internal	0.153	/	/
	Ear/Tilt	Internal	0.048	/	/
Left Side Of Head	Cheek/Touch	Internal	0.080	/	/
	Ear/Tilt	Internal	0.069	/	/
Body (10mm Separation)	Back upward	Internal	0.205	/	/
	Face Upward	Internal	0.266	/	/
	EDGE A	Internal	0.064	/	/
	EDGE B	Internal	0.356	/	/
	EDGE C	Internal	0.268	/	/

Note:

- 1.The SAR test shall be performed at the high, middle and low frequency channels of each operating mode, when the SAR of highest power channel of each configurations is less than 0.8 W/kg, refer to KDB 648474, testing for the other channels is not required.
- 2.The main antenna to Edge D is greater than 2.5cm, so the Edge D configuration is not required.
- 3.Maximum SAR for 12.2kbps RMC is 0.356 W/Kg $\leq$ 75% of the SAR limit (i.e. 1.2W/Kg 1g) and maximum average output of each RF channel with HSUPA/HSDPA active is less than 1/4 dB higher than that measured without HSUPA/HSDPA using 12.2kbps RMC (refer to Page 24 of the report), according to KDB 941225D01v02, SAR is not required for this handset with HSPA capabilities.

Summary of Measurement Results (WLAN 802.11 Band)


Temperature: 21.0~23.8°C, humidity: 54~60%.					
Phantom Configurations	Device Test Positions	Antenna Positions	SAR(W/Kg), 1g Peak		
			Device Test channel		
			Channel 1	Channel 6	Channel 11
Right Side Of Head	Cheek/Touch	Internal	/	/	0.138
	Ear/Tilt	Internal	/	/	0.085
Left Side Of Head	Cheek/Touch	Internal	/	/	0.111
	Ear/Tilt	Internal	/	/	0.061
Body (10mm Separation)	Back upward	Internal	/	/	0.024
	Face Upward	Internal	/	/	0.035
	EDGE A	Internal	/	/	0.103
	EDGE B	Internal	/	/	0.093
	EDGE D	Internal	/	/	0.106

Note:

1. Based on the Measurement Of Conducted Peak Output Power, the max power of 801.11b is $32.14\text{mW} > 24\text{mW} (13.8\text{dBm})$, the SAR test for 802.11b is required, but 802.11g/HT20 is not required, for the maximum average output power is not 1/4 dB higher than measured on the corresponding 802.11b channels; Bluetooth SAR is not required for the max power of BT is $0.52\text{mW} < 24\text{mW} (60/f(\text{GHz})\text{mW})$

11. Multiple Transmitters Evaluation

The are three transmitters build in EUT, As follwing :

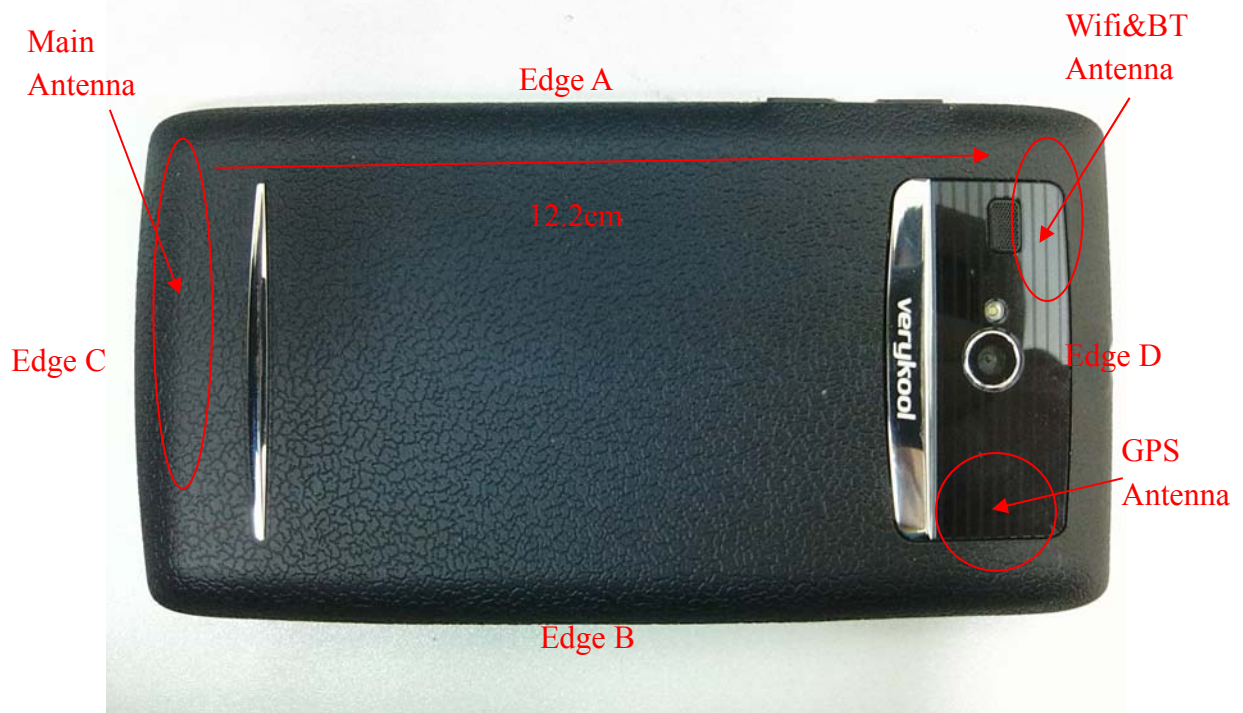

Stand-alone SAR

The Max. Peak output power of Wifi transmitter is $32.14\text{mW} > 25\text{mW} \{2\text{Pref} = 60/f(\text{GHz})\}$, stand-alone SAR evaluation is required for Wifi.

The BT Max. Peak output power is $0.52\text{mW} \leq 12\text{mW} \{ \text{Pref} = \frac{1}{2} * 60/f(\text{GHz}) \}$, and the distance between BT antenna and main antenna is $12.2\text{ cm} > 2.5\text{ cm}$, standalone SAR evaluation is not required for Bluetooth antenna .

Simultaneous SAR

The GSM and WCDMA can't simultaneous transmitting.

The BT and Wifi can't simultaneous transmitting.


Test Position	GSM&WCDMA SAR _{Max} (W/Kg)	Bluetooth SAR(W/Kg)	WiFi SAR(W/Kg)	$\sum 1\text{-g SAR}_{\text{Max}}(\text{W/Kg})$	
				BT&Main Ant	WiFi&Main Ant
Head SAR	0.174	0	0.138	0.174	0.312
Body SAR	0.476	0	0.106	0.476	0.582

Simultaneous Transmission SAR evaluation is not required for BT and GSM&WCDMA, because the sum of $1\text{g SAR}_{\text{Max}}$ is $0.476\text{W/Kg} < 1.6\text{W/Kg}$ for BT and GSM&WCDMA.


Simultaneous Transmission SAR evaluation is not required for WiFi and GSM&WCDMA, because the sum of $1\text{g SAR}_{\text{Max}}$ is $0.582\text{W/Kg} < 1.6\text{W/Kg}$ for BT and GSM&WCDMA.

Annex A EUT Setup Photos

1 EUT Left Head Touch Cheek Position

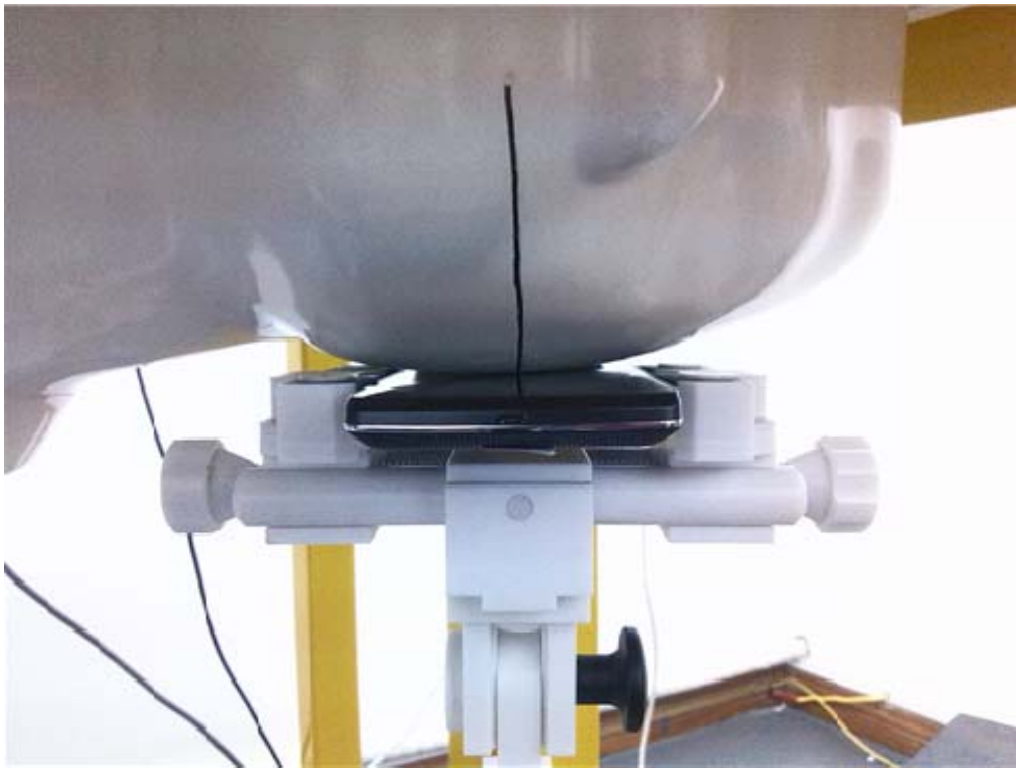

2 EUT Left Head Tilt15 Position

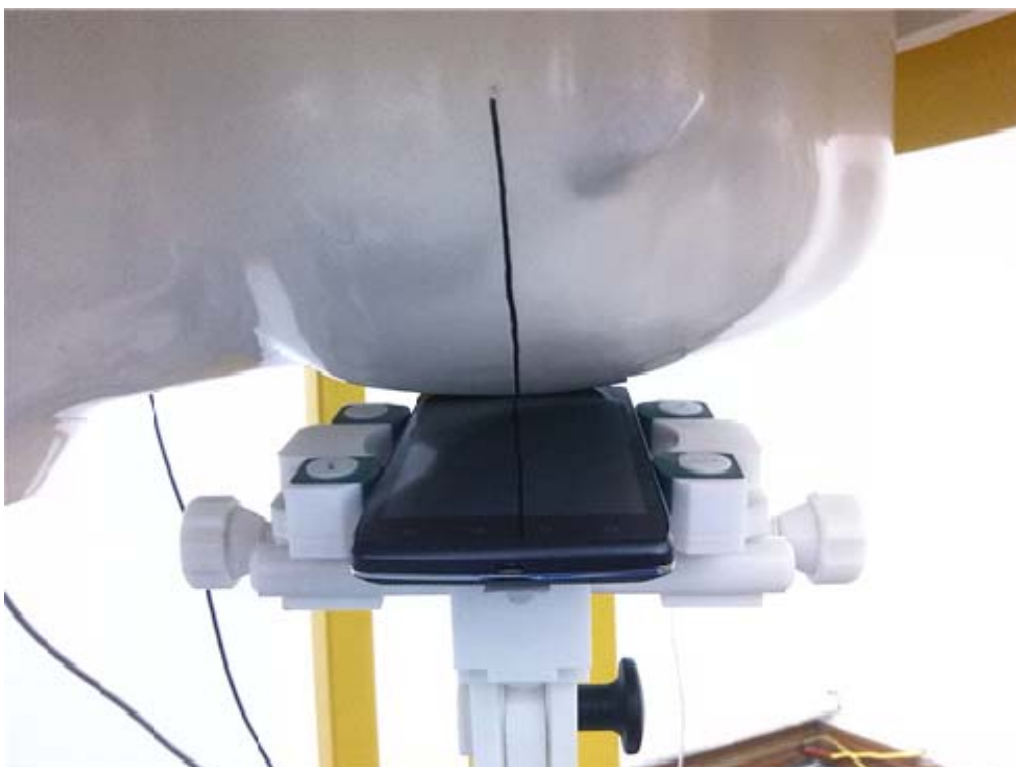

3 EUT Right Head Touch Cheek Position



4 EUT Right Head Tilt15 Position



5 Side Position



6 Edge A



7 Edge B



8 Edge C



9 Edge D



Liquid Level Photo



Annex B Graph Test Results

BAND	PARAMETERS
<u>GSM850</u>	<u>Measurement 1:</u> Right Head with Cheek device position on Low Channel in GSM mode <u>Measurement 2:</u> Right Head with Tilt device position on Low Channel in GSM mode <u>Measurement 3:</u> Left Head with Cheek device position on Low Channel in GSM mode <u>Measurement 4:</u> Left Head with Tilt device position on Low Channel in GSM mode <u>Measurement 5:</u> Validation Plane with Body device position on Low Channel in GSM mode <u>Measurement 6:</u> Validation Plane with Body device position on Low Channel in GSM mode <u>Measurement 7:</u> Validation Plane with Body device position on Low Channel in GPRS mode <u>Measurement 8:</u> Validation Plane with Body device position on Low Channel in GPRS mode <u>Measurement 9:</u> Validation Plane with Body device position on Low Channel in GPRS mode <u>Measurement 10:</u> Validation Plane with Body device position on Low Channel in GPRS mode <u>Measurement 11:</u> Validation Plane with Body device position on Low Channel in GPRS mode <u>Measurement 12:</u> Validation Plane with Body device position on Middle Channel in EDGE mode
<u>GSM1900</u>	<u>Measurement 13:</u> Right Head with Cheek device position on High Channel in GSM mode <u>Measurement 14:</u> Right Head with Tilt device position on High Channel in GSM mode <u>Measurement 15:</u> Left Head with Cheek device position on High Channel in GSM mode <u>Measurement 16:</u> Left Head with Tilt device position on High Channel in GSM mode <u>Measurement 17:</u> Validation Plane with Body device position on High Channel in GSM mode <u>Measurement 18:</u> Validation Plane with Body device position on High Channel in GSM mode <u>Measurement 19:</u> Validation Plane with Body device position on High Channel in GPRS mode <u>Measurement 20:</u> Validation Plane with Body device position on High Channel in GPRS mode

	<u>Measurement 21:</u> Validation Plane with Body device position on High Channel in GPRS mode <u>Measurement 22:</u> Validation Plane with Body device position on High Channel in GPRS mode <u>Measurement 23:</u> Validation Plane with Body device position on High Channel in GPRS mode <u>Measurement 24:</u> Validation Plane with Body device position on Middle Channel in EDGE mode
<u>WCDMA</u> <u>850</u>	<u>Measurement 25:</u> Right Head with Cheek device position on Low Channel in CDMA mode <u>Measurement 26:</u> Right Head with Tilt device position on Low Channel in CDMA mode <u>Measurement 27:</u> Left Head with Cheek device position on Low Channel in CDMA mode <u>Measurement 28:</u> Left Head with Tilt device position on Low Channel in CDMA mode <u>Measurement 29:</u> Validation Plane with Body device position on Low Channel in CDMA mode <u>Measurement 30:</u> Validation Plane with Body device position on Low Channel in CDMA mode <u>Measurement 31:</u> Validation Plane with Body device position on Low Channel in CDMA mode <u>Measurement 32:</u> Validation Plane with Body device position on Low Channel in CDMA mode <u>Measurement 33:</u> Validation Plane with Body device position on Low Channel in CDMA mode
<u>WCDMA</u> <u>1900</u>	<u>Measurement 34:</u> Right Head with Cheek device position on Low Channel in CDMA mode <u>Measurement 35:</u> Right Head with Tilt device position on Low Channel in CDMA mode <u>Measurement 36:</u> Left Head with Cheek device position on Low Channel in CDMA mode <u>Measurement 37:</u> Left Head with Tilt device position on Low Channel in CDMA mode <u>Measurement 38:</u> Validation Plane with Body device position on Low Channel in CDMA mode <u>Measurement 39:</u> Validation Plane with Body device position on Low Channel in CDMA mode <u>Measurement 40:</u> Validation Plane with Body device position on Low Channel in CDMA mode <u>Measurement 41:</u> Validation Plane with Body device position on Low Channel in CDMA mode <u>Measurement 42:</u> Validation Plane with Body device position on Low Channel in CDMA mode

WIFI
2450

Measurement 43: Right Head with Cheek device position on High Channel in DSSS mode

Measurement 44: Right Head with Tilt device position on High Channel in DSSS mode

Measurement 45: Left Head with Cheek device position on High Channel in DSSS mode

Measurement 46: Left Head with Tilt device position on High Channel in DSSS mode

Measurement 47: Validation Plane with Body device position on High Channel in DSSS mode

Measurement 48: Validation Plane with Body device position on High Channel in DSSS mode

Measurement 49: Validation Plane with Body device position on High Channel in DSSS mode

Measurement 50: Validation Plane with Body device position on High Channel in DSSS mode

Measurement 51: Validation Plane with Body device position on High Channel in DSSS mode

MEASUREMENT 1

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 15/5/2012

Measurement duration: 8 minutes 57 seconds

A. Experimental conditions.


Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	GSM850
Channels	Low
Signal	GSM

B. SAR Measurement Results


Lower Band SAR (Channel 128):

Frequency (MHz)	824.200000
Relative permittivity (real part)	40.669998
Relative permittivity	19.120001
Conductivity (S/m)	0.888655
Power drift(%)	-3.190000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.7°C
ConvF:	28.479,25.214,27.196
Crest factor:	1:8

SURFACE SAR

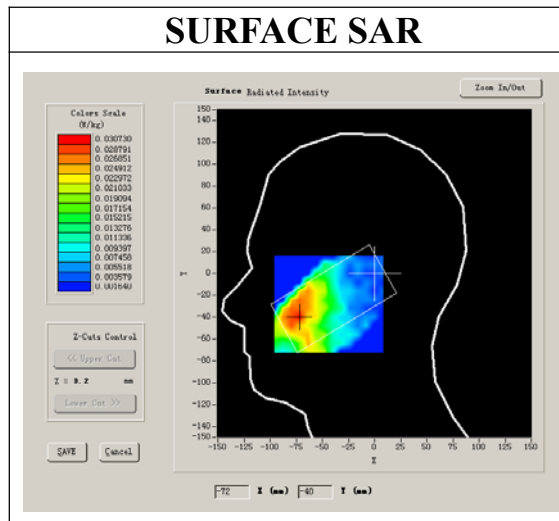

VOLUME SAR

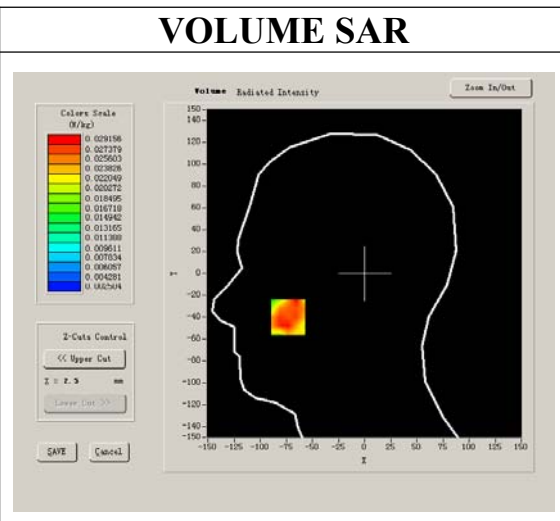


Maximum location: X=-73.00, Y=-40.00

SAR 10g (W/Kg)	0.020117
SAR 1g (W/Kg)	0.026531


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.0267	0.0239	0.0190	0.0116	0.0113	0.0053


SAR, Z Axis Scan (X = -73, Y = -40)

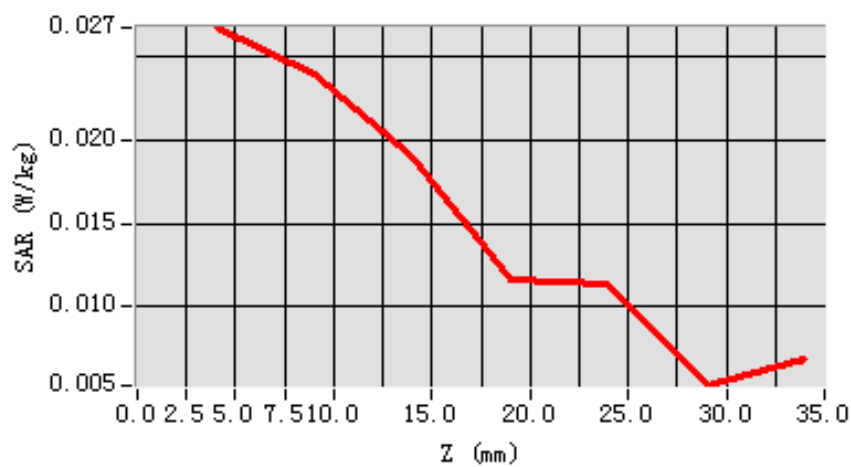

3D scene shot

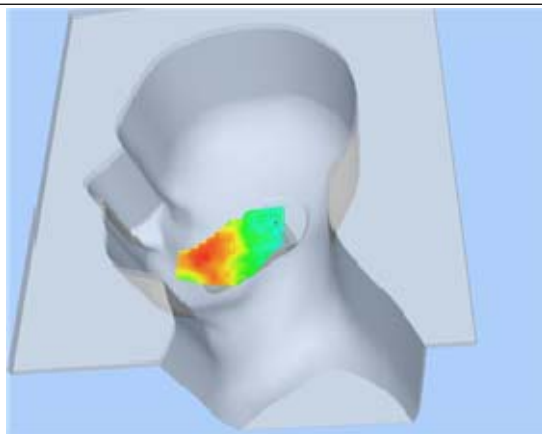

Hot spot position

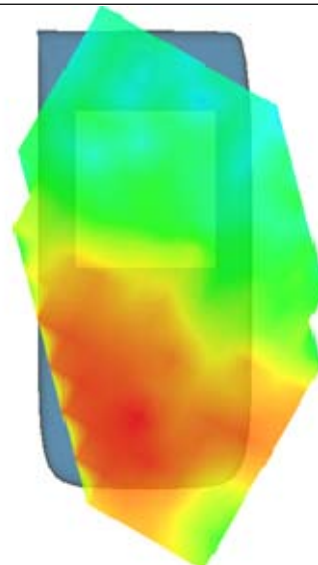

MEASUREMENT 2

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 15/5/2012

Measurement duration: 8 minutes 1 seconds


A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Tilt
Band	GSM850
Channels	Low
Signal	GSM

B. SAR Measurement Results

Lower Band SAR (Channel 128):

Frequency (MHz)	824.200000
Relative permittivity (real part)	40.669998
Relative permittivity	19.120001
Conductivity (S/m)	0.888655
Power drift(%)	-1.640000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.7°C
ConvF:	28.479,25.214,27.196
Crest factor:	1:8

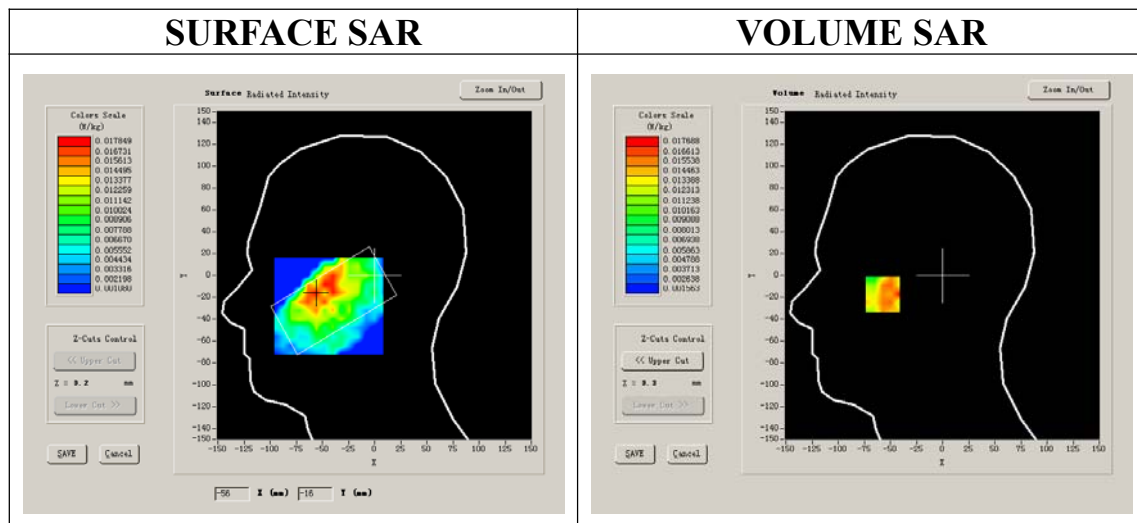


Maximum location: X=-57.00, Y=-16.00

SAR 10g (W/Kg)	0.011208
SAR 1g (W/Kg)	0.015786


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.0152	0.0138	0.0075	0.0052	0.0072	0.0061


SAR, Z Axis Scan (X = -57, Y = -16)

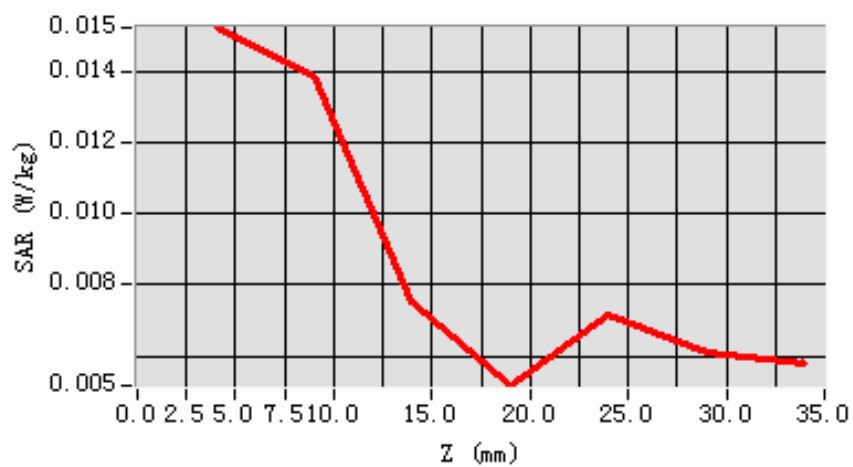

3D sceen shot

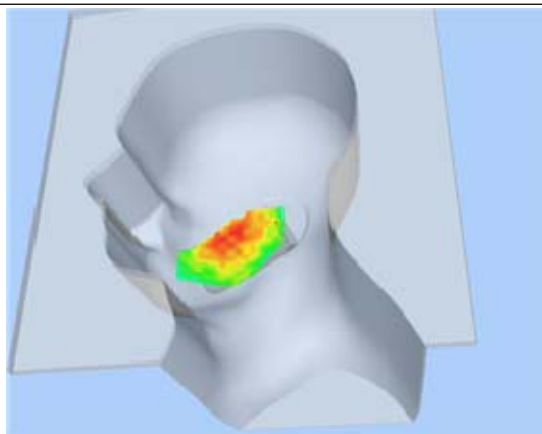

Hot spot position

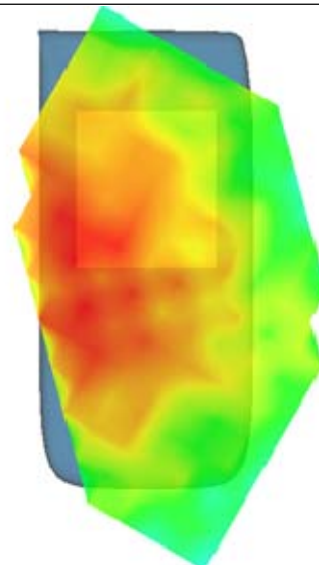

MEASUREMENT 3

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 15/5/2012

Measurement duration: 8 minutes 1 seconds

A. Experimental conditions.


Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Cheek
Band	GSM850
Channels	Low
Signal	GSM

B. SAR Measurement Results


Lower Band SAR (Channel 128):

Frequency (MHz)	824.200000
Relative permittivity (real part)	40.669998
Relative permittivity	19.120001
Conductivity (S/m)	0.888655
Power drift(%)	0.070000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.7°C
ConvF:	28.479,25.214,27.196
Crest factor:	1:8

SURFACE SAR

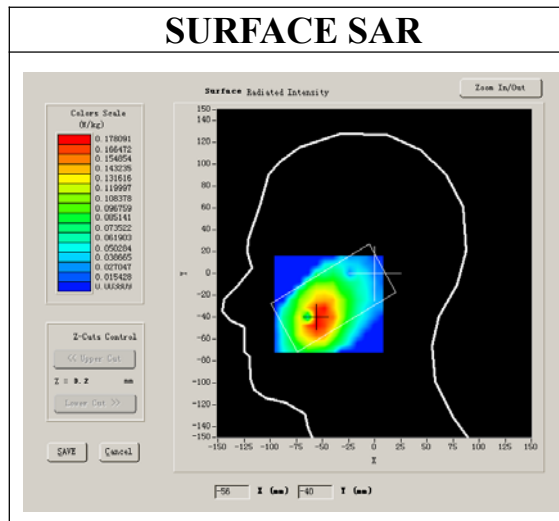

VOLUME SAR

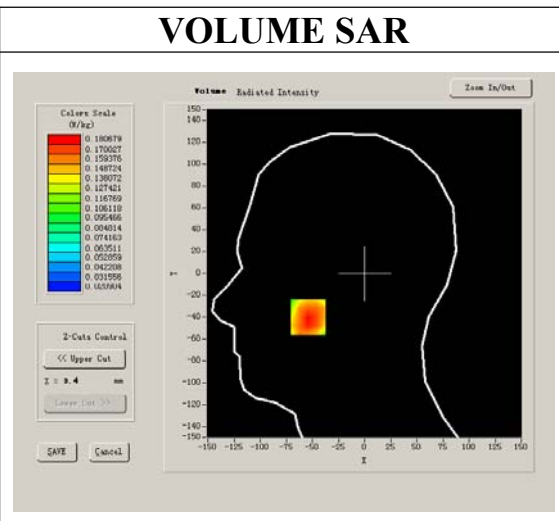


Maximum location: X=-54.00, Y=-40.00

SAR 10g (W/Kg)	0.126234
SAR 1g (W/Kg)	0.174371


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.1807	0.1395	0.1105	0.0832	0.0598	0.0467


SAR, Z Axis Scan (X = -54, Y = -40)

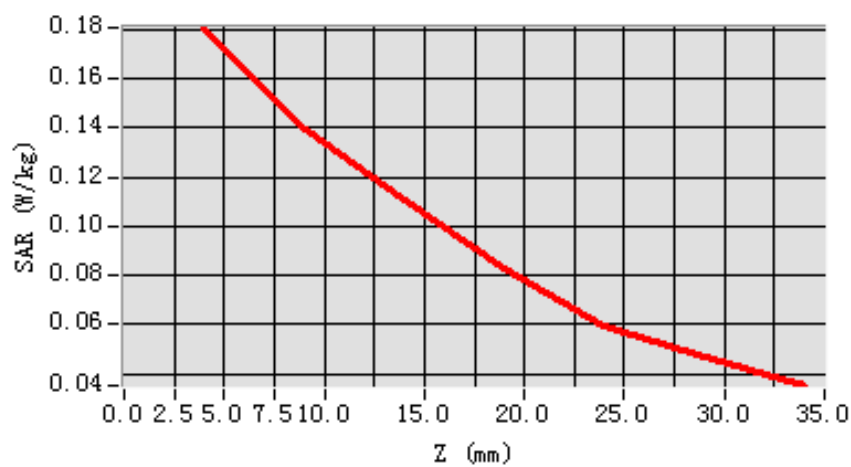

3D scene shot

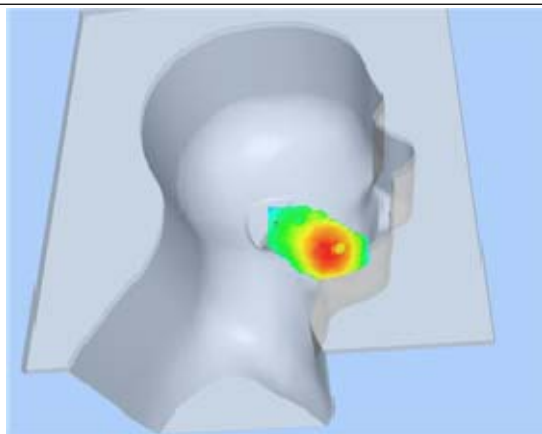

Hot spot position

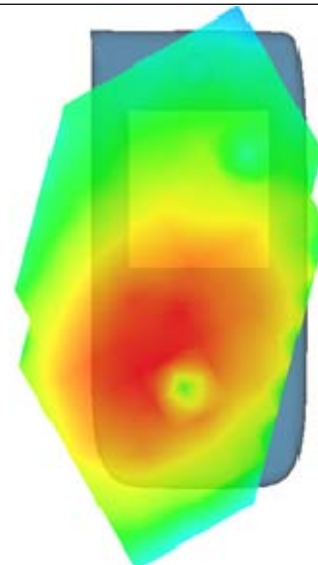

MEASUREMENT 4

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 15/5/2012

Measurement duration: 7 minutes 32 seconds


A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Tilt
Band	GSM850
Channels	Low
Signal	GSM

B. SAR Measurement Results

Lower Band SAR (Channel 128):

Frequency (MHz)	824.200000
Relative permittivity (real part)	40.669998
Relative permittivity	19.120001
Conductivity (S/m)	0.888655
Power drift(%)	-4.510000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.7°C
ConvF:	28.479,25.214,27.196
Crest factor:	1:8

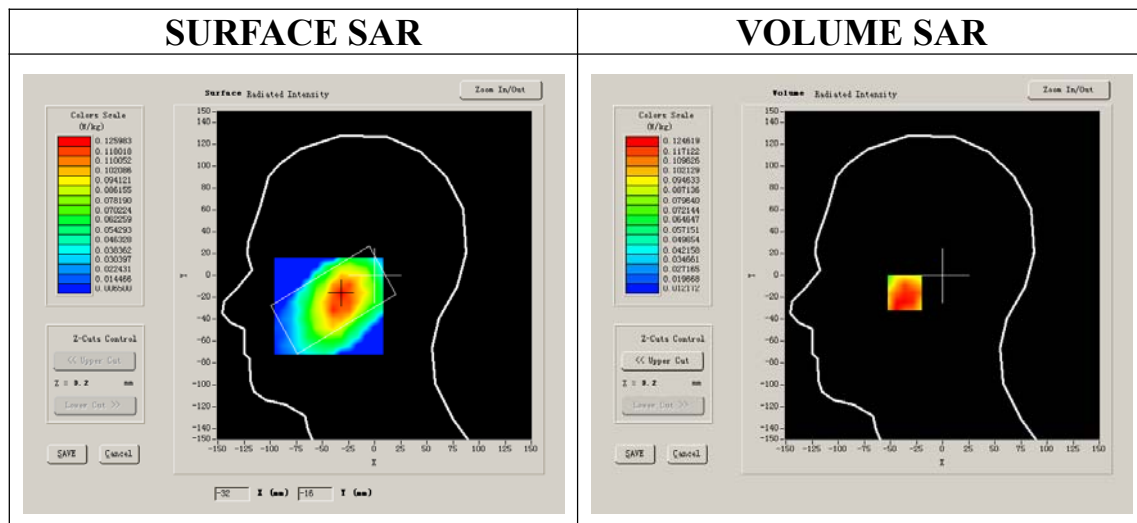


Maximum location: X=-32.00, Y=-16.00

SAR 10g (W/Kg)	0.088061
SAR 1g (W/Kg)	0.121606


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.1203	0.1008	0.0759	0.0611	0.0489	0.0300


SAR, Z Axis Scan (X = -32, Y = -16)

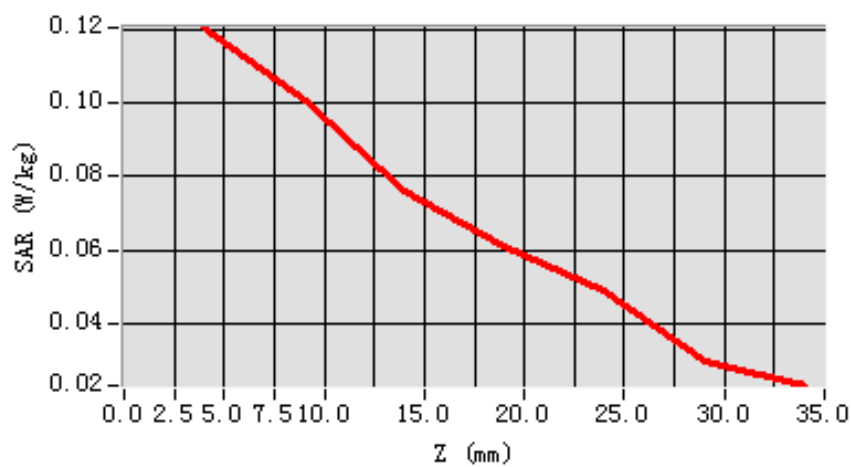

3D scene shot

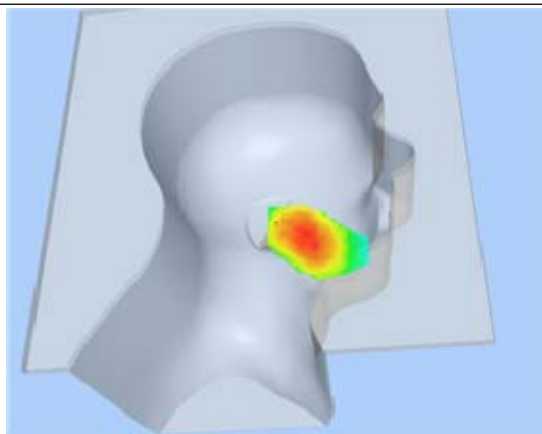

Hot spot position

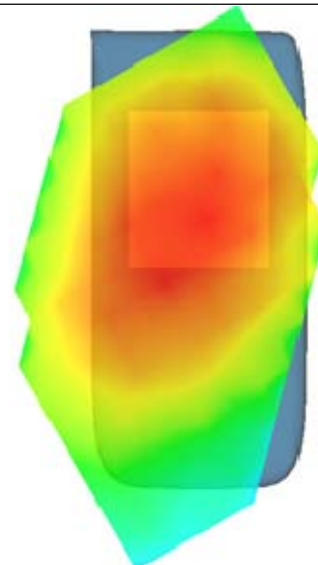

MEASUREMENT 5

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 15/5/2012

Measurement duration: 9 minutes 8 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM850
Channels	Low
Signal	GSM

B. SAR Measurement Results


Lower Band SAR (Channel 128):

Frequency (MHz)	824.200012
Relative permittivity (real part)	54.116001
Relative permittivity	21.284550
Conductivity (S/m)	0.974596
Power drift (%)	-0.290000
Ambient Temperature:	22.7°C
Liquid Temperature:	22.8°C
ConvF:	28.559, 25.681, 27.588
Crest factor:	1:8

SURFACE SAR

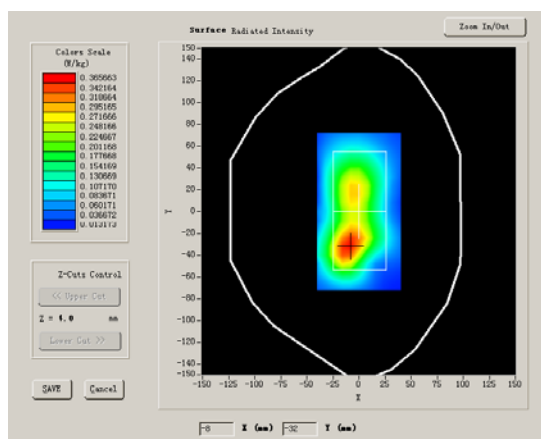

VOLUME SAR

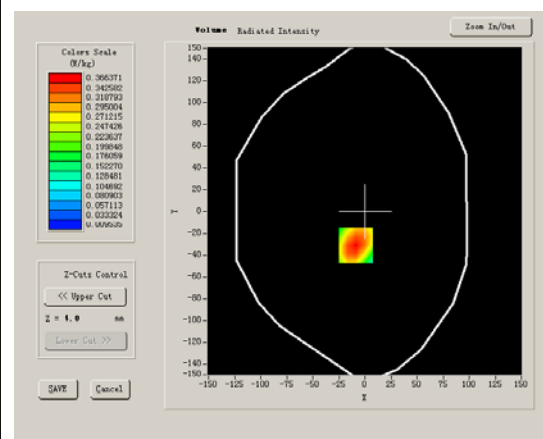


Maximum location: X=-9.00, Y=-31.00

SAR 10g (W/Kg)	0.223408
SAR 1g (W/Kg)	0.381549


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.3989	0.2353	0.1425	0.0867	0.0522	0.0308


SAR, Z Axis Scan (X = -9, Y = -31)

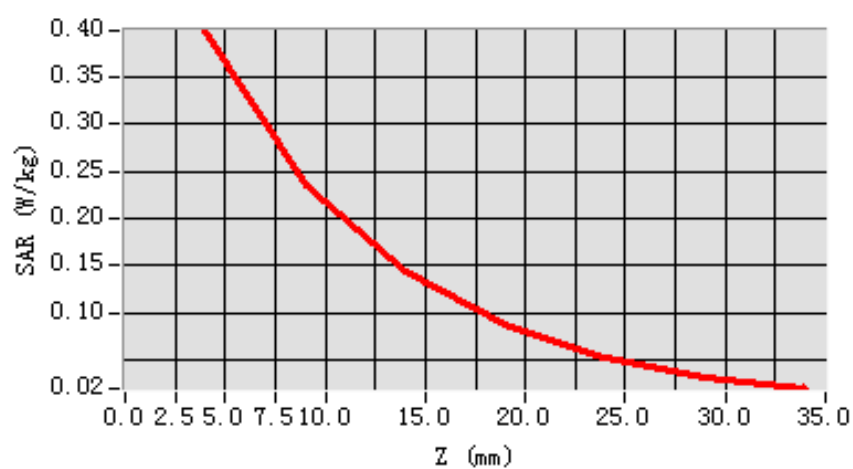

3D scene shot

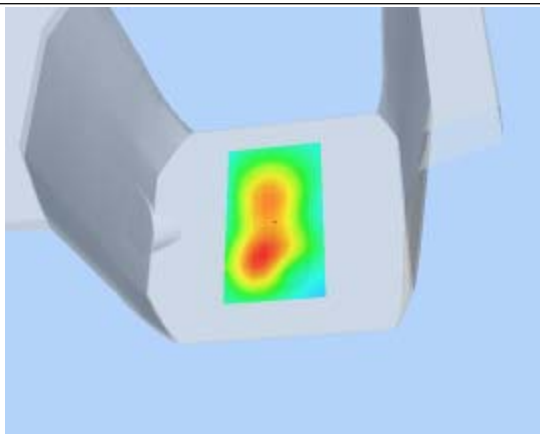

Hot spot position

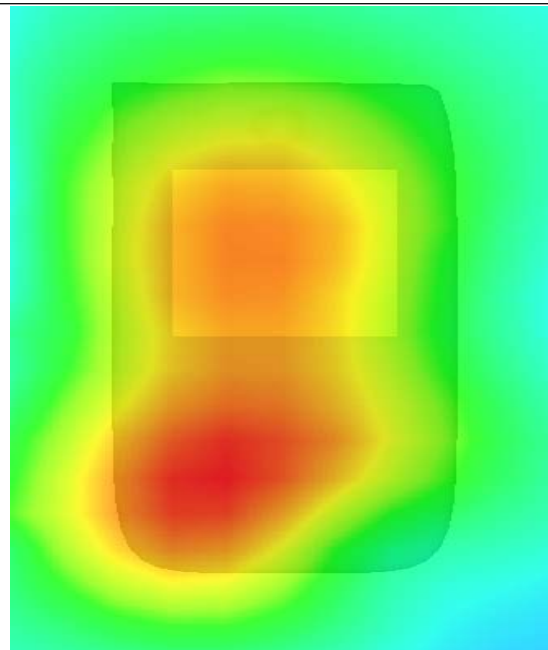

MEASUREMENT 6

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 15/5/2012

Measurement duration: 9 minutes 8 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM850
Channels	Low
Signal	GSM

B. SAR Measurement Results

Lower Band SAR (Channel 128):

Frequency (MHz)	824.200012
Relative permittivity (real part)	54.116001
Relative permittivity	21.284550
Conductivity (S/m)	0.974596
Power drift (%)	-0.290000
Ambient Temperature:	22.7°C
Liquid Temperature:	22.8°C
ConvF:	28.559, 25.681, 27.588
Crest factor:	1:8

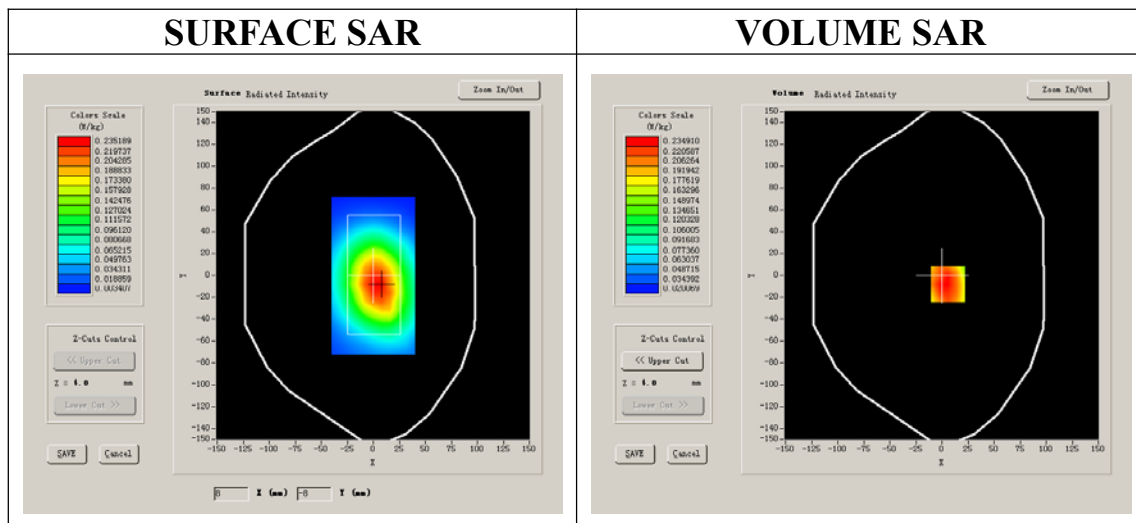


Maximum location: X=6.00, Y=-8.00

SAR 10g (W/Kg)	0.167116
SAR 1g (W/Kg)	0.248584


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.2579	0.1791	0.1269	0.0855	0.0611	0.0425


SAR, Z Axis Scan (X = 6, Y = -8)

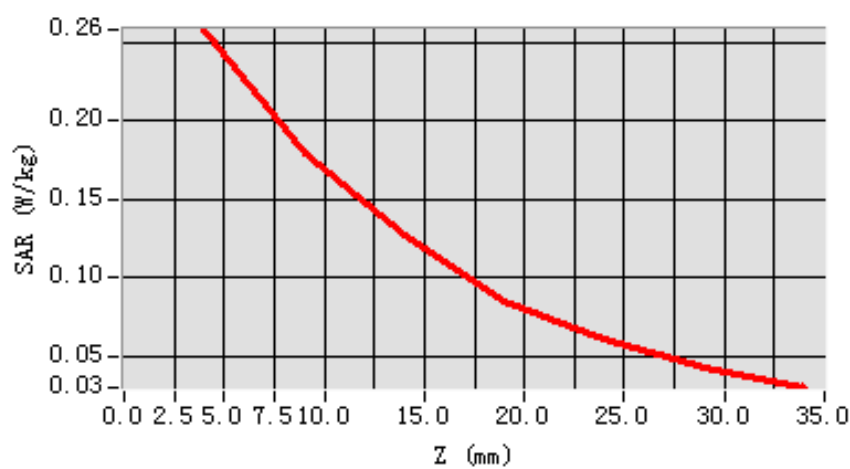

3D scene shot

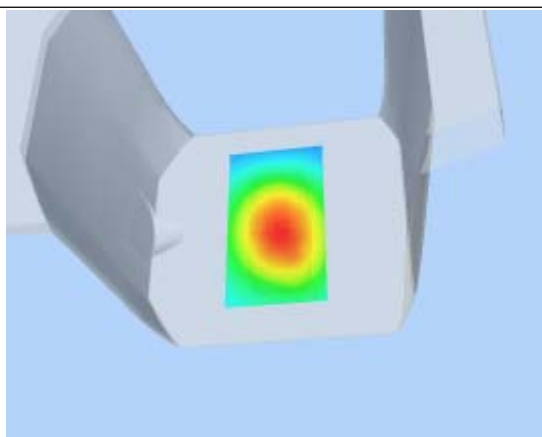

Hot spot position

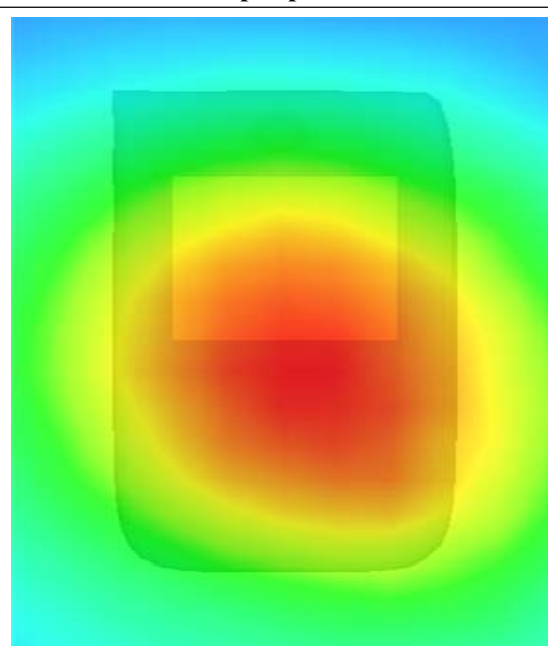

MEASUREMENT 7

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 15/5/2012

Measurement duration: 9 minutes 8 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM850
Channels	Low
Signal	GPRS

B. SAR Measurement Results


Lower Band SAR (Channel 128):

Frequency (MHz)	824.200012
Relative permittivity (real part)	55.709999
Relative permittivity	21.709999
Conductivity (S/m)	1.009033
Power drift (%)	-0.410000
Ambient Temperature:	22.7°C
Liquid Temperature:	22.8°C
ConvF:	28.559, 25.681, 27.588
Crest factor:	1:2

SURFACE SAR

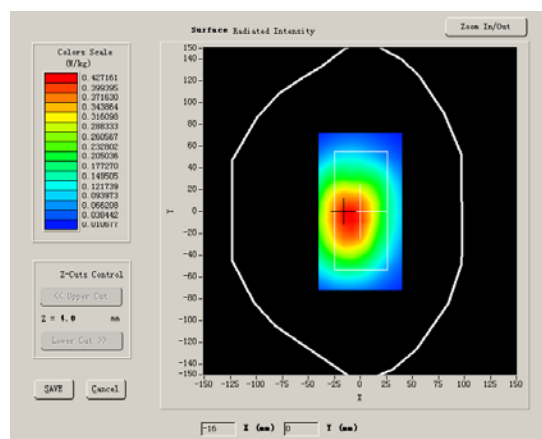

VOLUME SAR

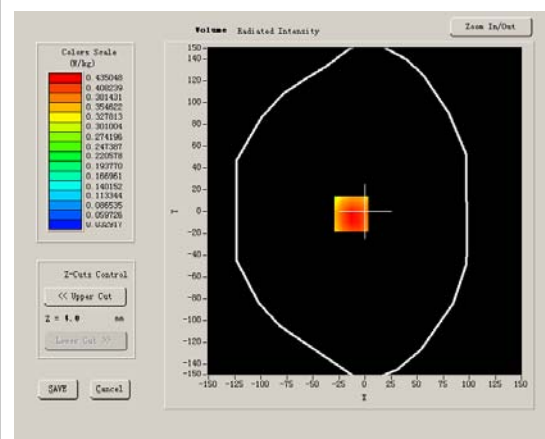


Maximum location: X=-13.00, Y=-2.00

SAR 10g (W/Kg)	0.326849
SAR 1g (W/Kg)	0.476199


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.4893	0.3357	0.2407	0.1702	0.1247	0.0896


SAR, Z Axis Scan (X = -13, Y = -2)

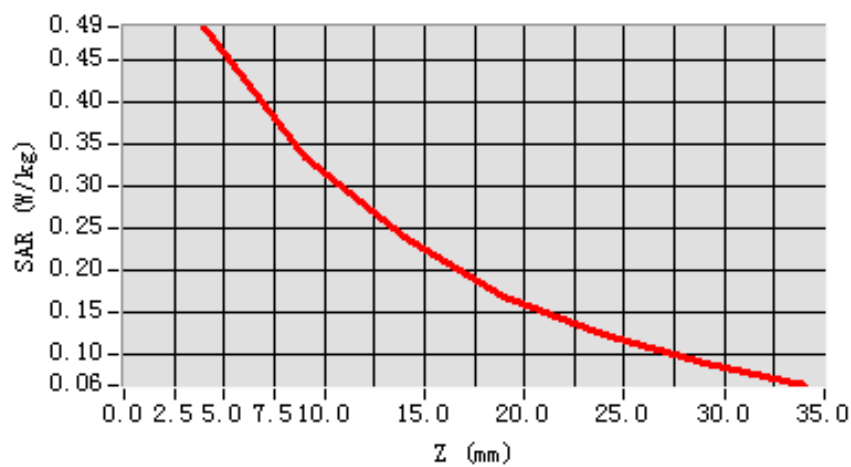

3D scene shot

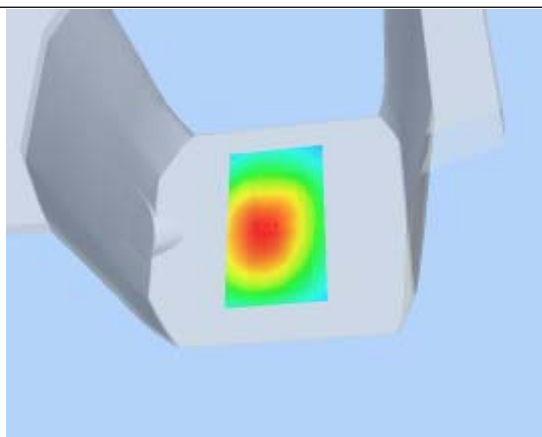

Hot spot position

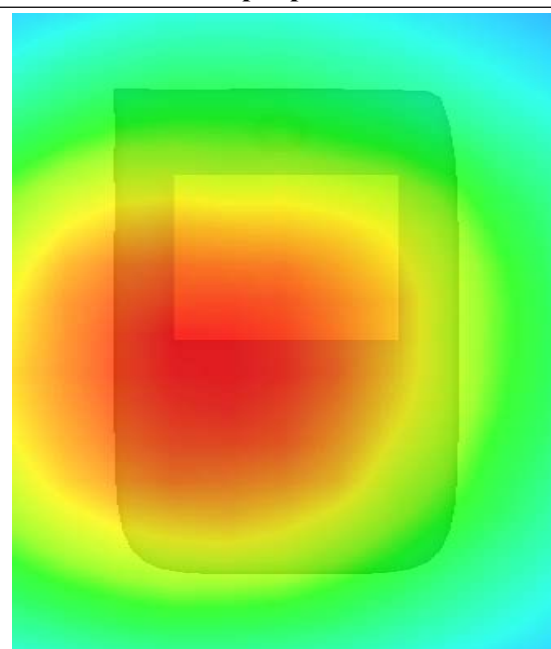

MEASUREMENT 8

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 15/5/2012

Measurement duration: 9 minutes 8 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM850
Channels	Low
Signal	GPRS

B. SAR Measurement Results


Lower Band SAR (Channel 128):

Frequency (MHz)	824.200012
Relative permittivity (real part)	55.709999
Relative permittivity	21.709999
Conductivity (S/m)	1.009033
Power drift (%)	-0.320000
Ambient Temperature:	22.7°C
Liquid Temperature:	22.8°C
ConvF:	28.559, 25.681, 27.588
Crest factor:	1:2

SURFACE SAR

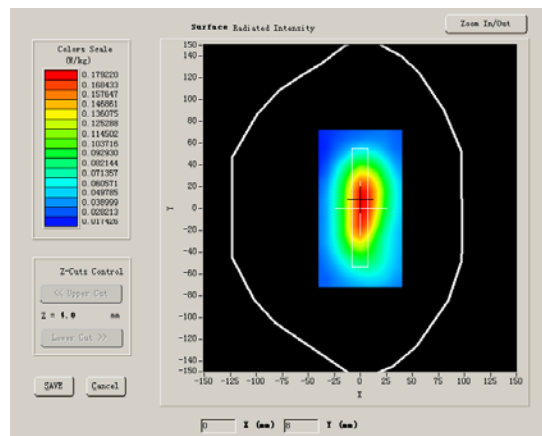

VOLUME SAR

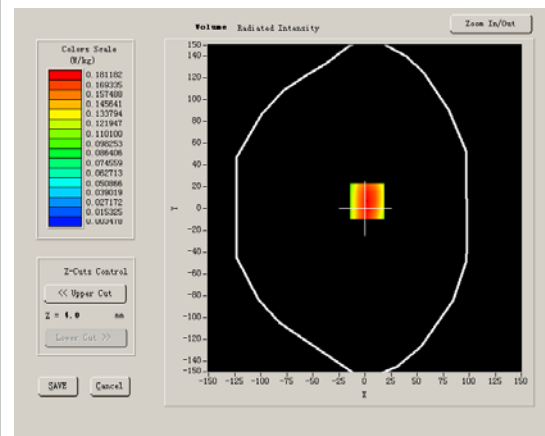


Maximum location: X=2.00, Y=7.00

SAR 10g (W/Kg)	0.115660
SAR 1g (W/Kg)	0.209630


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.2174	0.1087	0.0554	0.0271	0.0193	0.0094


SAR, Z Axis Scan (X = 2, Y = 7)

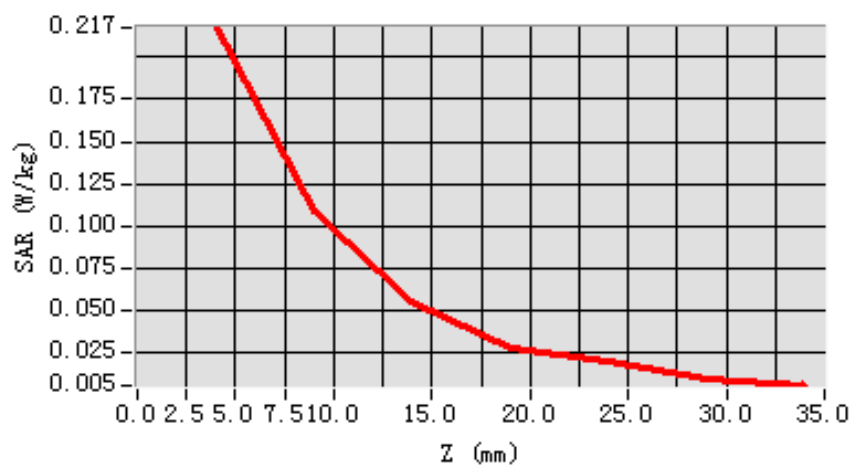

3D scene shot

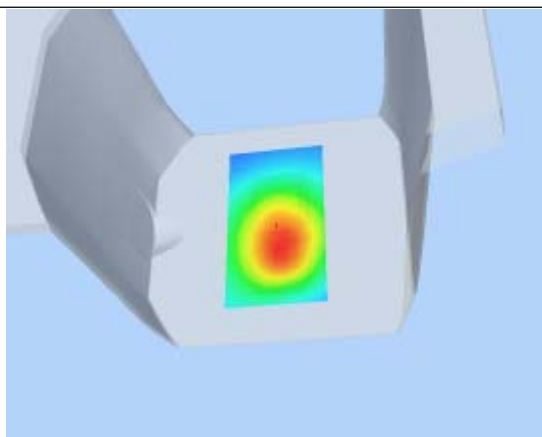

Hot spot position

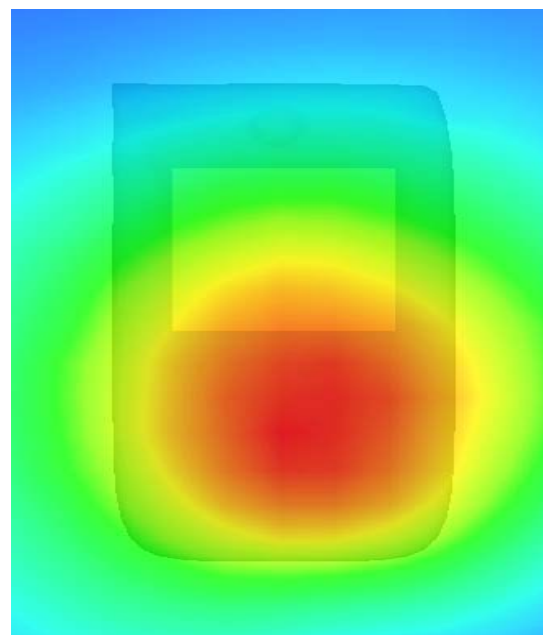

MEASUREMENT 9

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 15/5/2012

Measurement duration: 9 minutes 8 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM850
Channels	Low
Signal	GPRS

B. SAR Measurement Results


Lower Band SAR (Channel 128):

Frequency (MHz)	824.200012
Relative permittivity (real part)	55.709999
Relative permittivity	21.709999
Conductivity (S/m)	1.009033
Power drift (%)	-0.410000
Ambient Temperature:	22.7°C
Liquid Temperature:	22.8°C
ConvF:	28.559, 25.681, 27.588
Crest factor:	1:2

SURFACE SAR

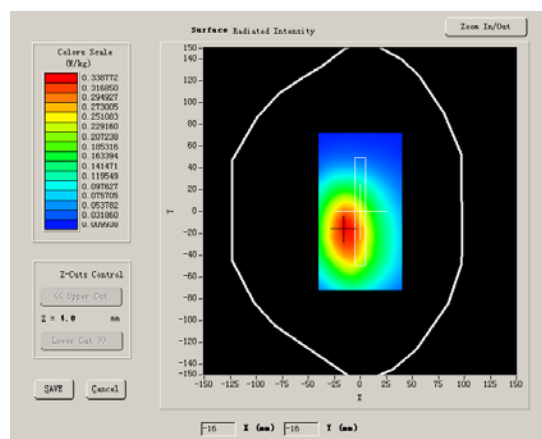

VOLUME SAR

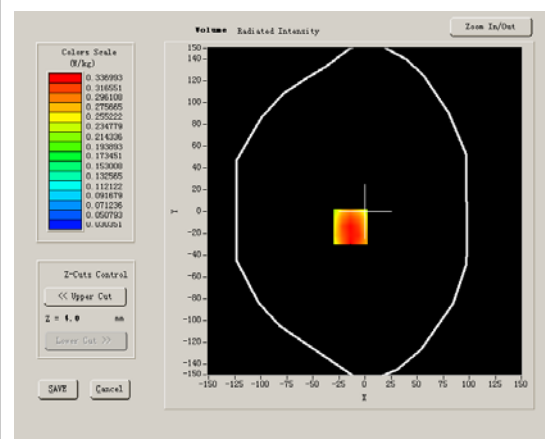


Maximum location: X=-14.00, Y=-14.00

SAR 10g (W/Kg)	0.246327
SAR 1g (W/Kg)	0.351344


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.3773	0.2667	0.1749	0.1266	0.0880	0.0637


SAR, Z Axis Scan (X = -14, Y = -14)

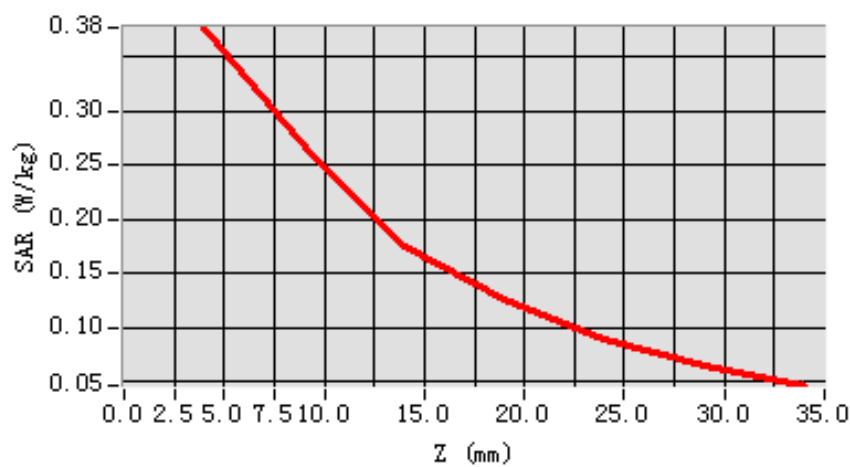

3D scene shot

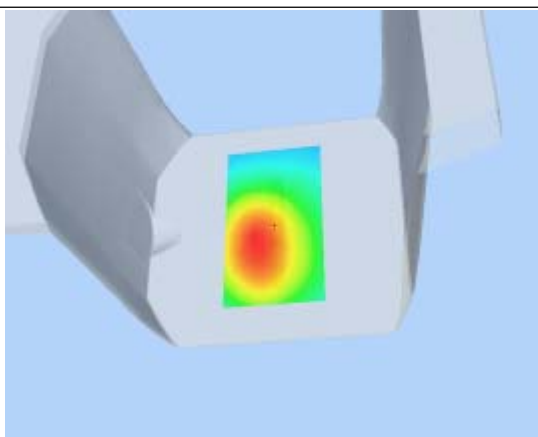

Hot spot position

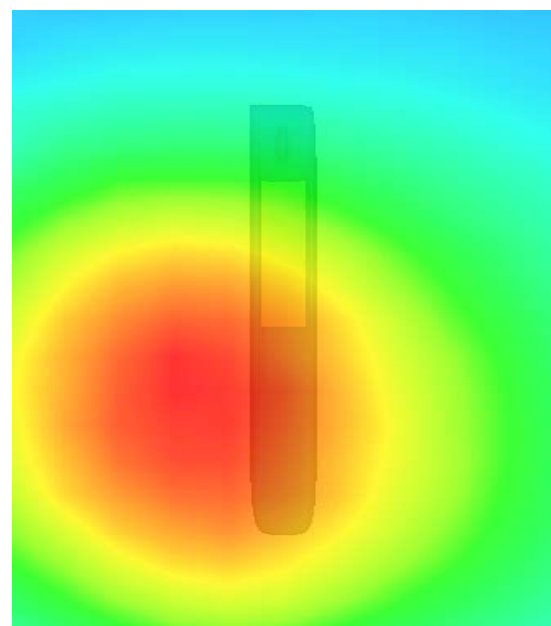

MEASUREMENT 10

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 15/5/2012

Measurement duration: 9 minutes 8 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM850
Channels	Low
Signal	GPRS

B. SAR Measurement Results


Lower Band SAR (Channel 128):

Frequency (MHz)	824.200012
Relative permittivity (real part)	55.709999
Relative permittivity	21.709999
Conductivity (S/m)	1.009033
Power drift (%)	-0.850000
Ambient Temperature:	22.7°C
Liquid Temperature:	22.8°C
ConvF:	28.559, 25.681, 27.588
Crest factor:	1:2

SURFACE SAR

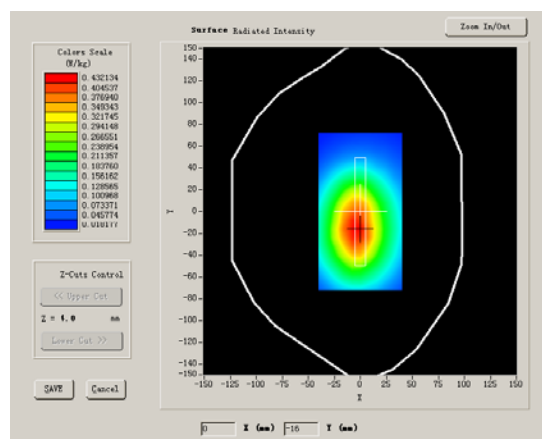

VOLUME SAR

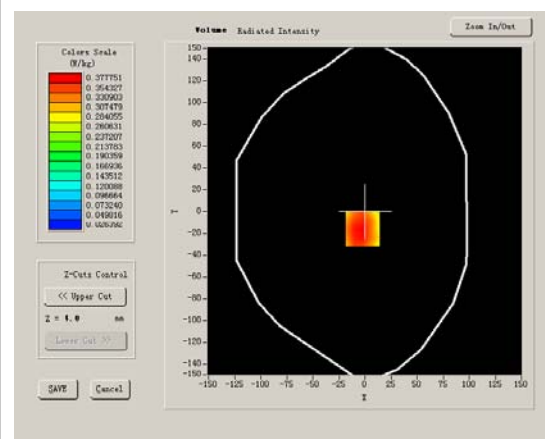


Maximum location: X=-2.00, Y=-16.00

SAR 10g (W/Kg)	0.264370
SAR 1g (W/Kg)	0.414649


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.4249	0.2686	0.1774	0.1134	0.0781	0.0536


SAR, Z Axis Scan (X = -2, Y = -16)

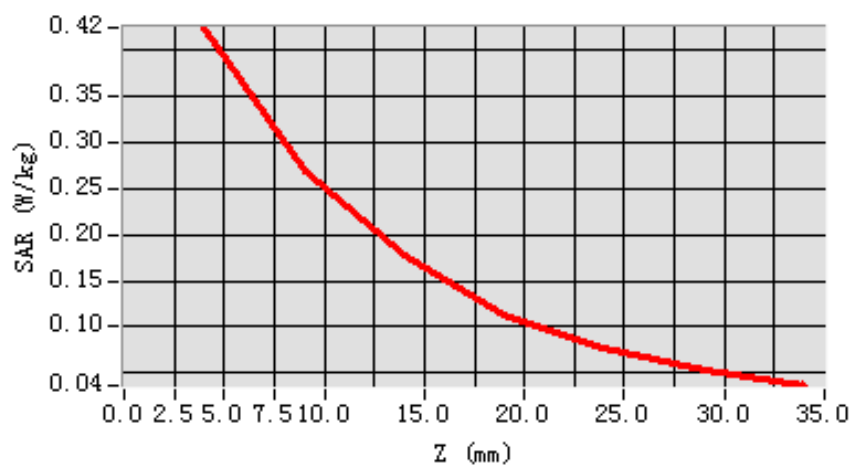

3D scene shot

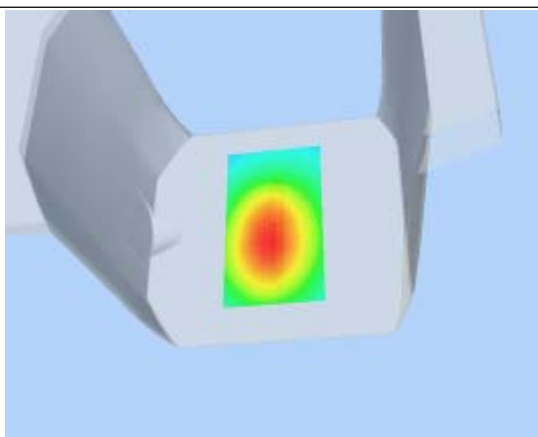

Hot spot position

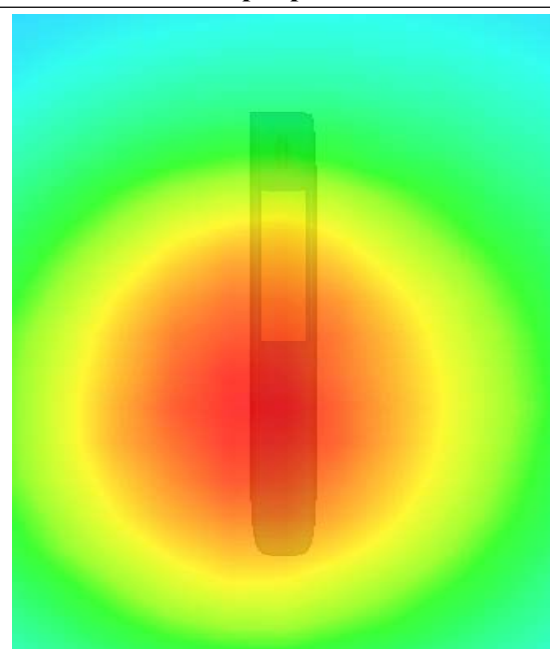

MEASUREMENT 11

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 15/5/2012

Measurement duration: 9 minutes 11 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM850
Channels	Low
Signal	GPRS

B. SAR Measurement Results


Lower Band SAR (Channel 128):

Frequency (MHz)	824.200012
Relative permittivity (real part)	55.709999
Relative permittivity	21.709999
Conductivity (S/m)	1.009033
Power drift (%)	-0.160000
Ambient Temperature:	22.7°C
Liquid Temperature:	22.8°C
ConvF:	28.559, 25.681, 27.588
Crest factor:	1:2

SURFACE SAR

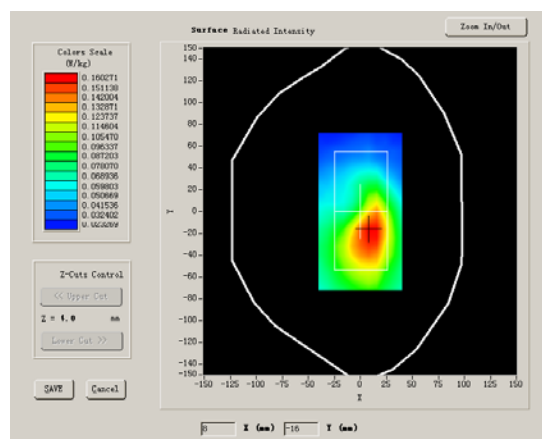

VOLUME SAR

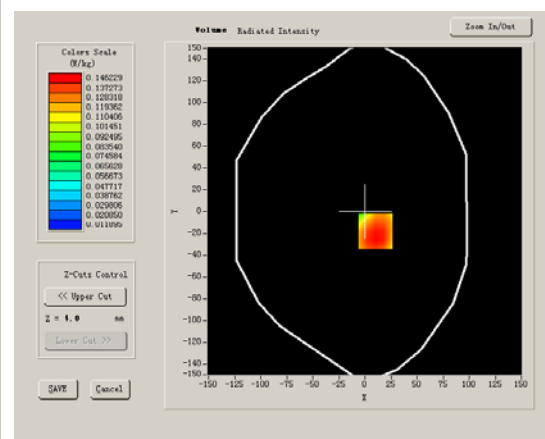


Maximum location: X=10.00, Y=-18.00

SAR 10g (W/Kg)	0.112887
SAR 1g (W/Kg)	0.168692


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.1710	0.1156	0.0804	0.0537	0.0384	0.0270


SAR, Z Axis Scan (X = 10, Y = -18)

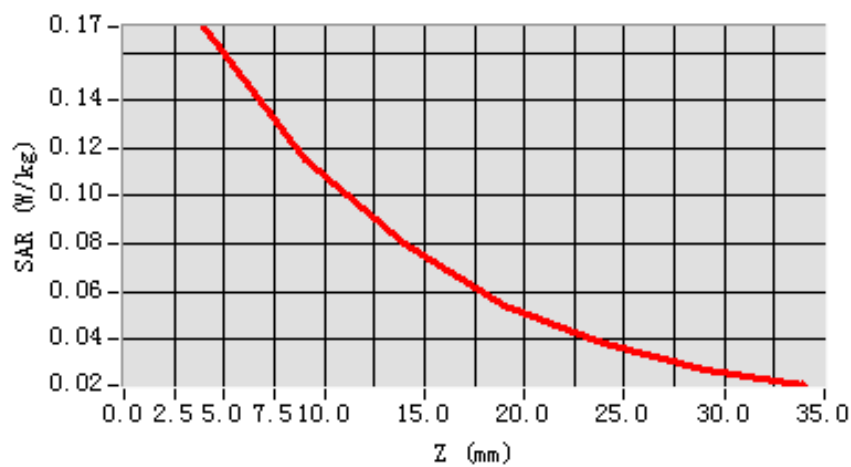

3D scene shot

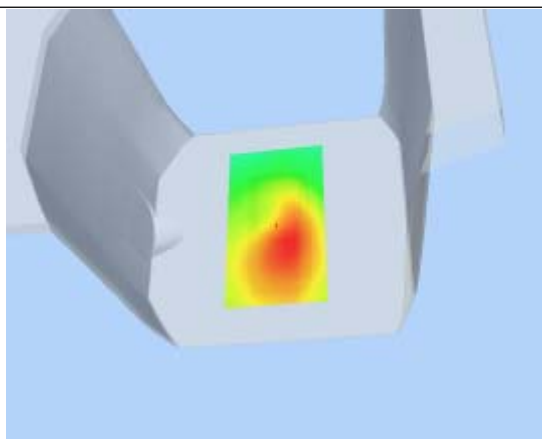

Hot spot position

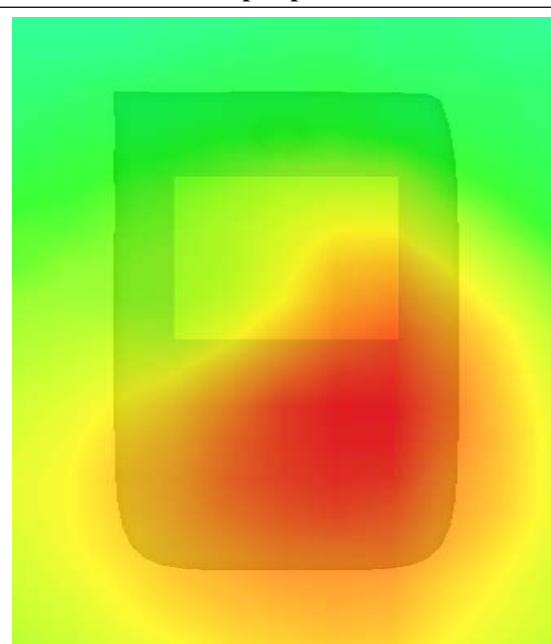

MEASUREMENT 12

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 15/5/2012

Measurement duration: 9 minutes 8 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM850
Channels	Middle
Signal	EDGE

B. SAR Measurement Results


Middle Band SAR (Channel 190):

Frequency (MHz)	836.600000
Relative permittivity (real part)	55.709999
Relative permittivity	21.709999
Conductivity (S/m)	1.009033
Power drift (%)	-1.520000
Ambient Temperature:	22.7°C
Liquid Temperature:	22.8°C
ConvF:	28.559, 25.681, 27.588
Crest factor:	1:2

SURFACE SAR

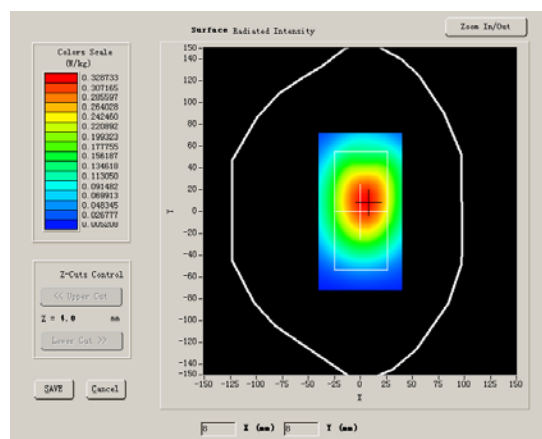

VOLUME SAR

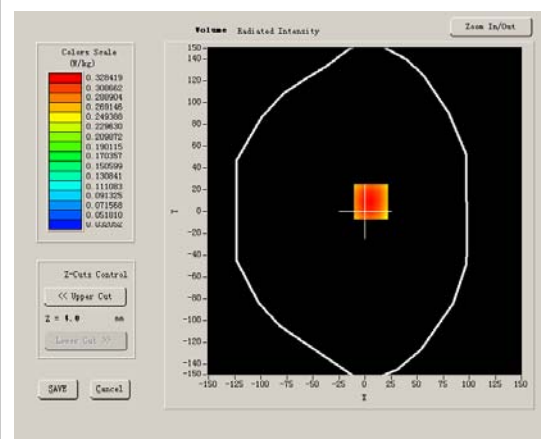


Maximum location: X=6.00, Y=9.00

SAR 10g (W/Kg)	0.263688
SAR 1g (W/Kg)	0.376196


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.3897	0.2811	0.2048	0.1472	0.1062	0.0774


SAR, Z Axis Scan (X = 6, Y = 9)

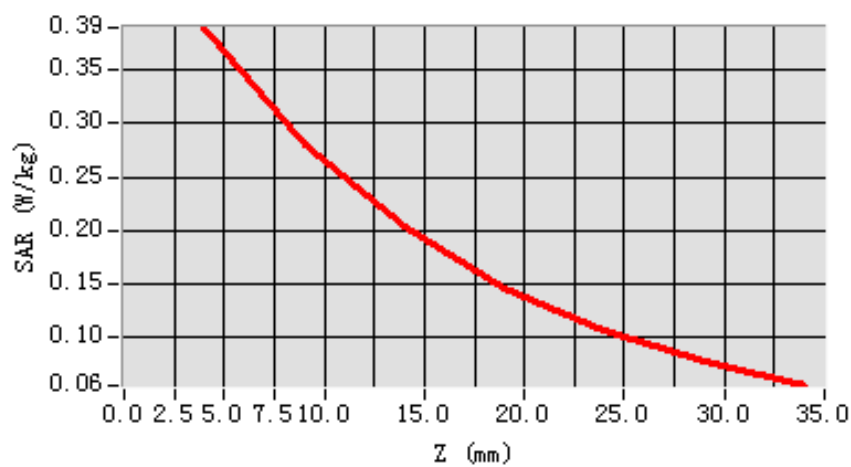

3D scene shot

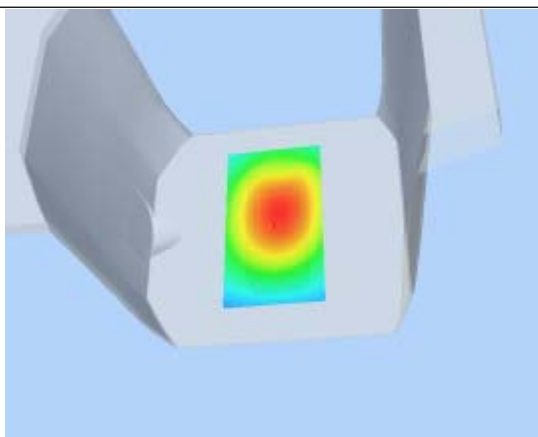

Hot spot position

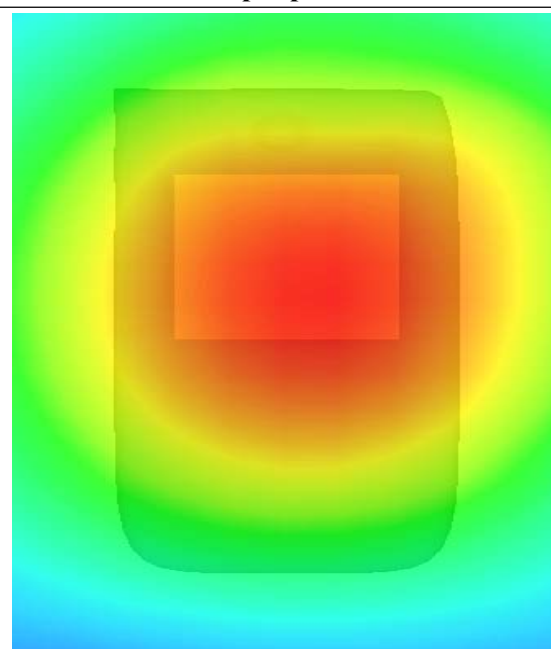

MEASUREMENT 13

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 15/5/2012

Measurement duration: 8 minutes 0 seconds

A. Experimental conditions.


Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	GSM1900
Channels	High
Signal	GSM

B. SAR Measurement Results


Higher Band SAR (Channel 810):

Frequency (MHz)	1909.800000
Relative permittivity (real part)	38.509998
Relative permittivity	13.750000
Conductivity (S/m)	1.436111
Power drift(%)	-2.560000
Ambient Temperature:	22.6°C
Liquid Temperature:	22.7°C
ConvF:	40.136,34.843,38.721
Crest factor:	1:8

SURFACE SAR

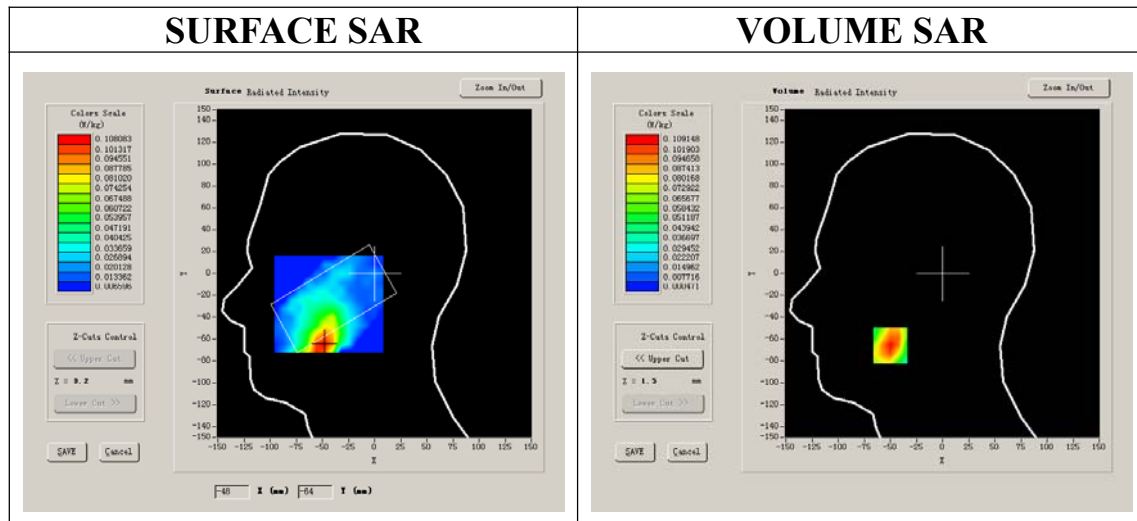

VOLUME SAR

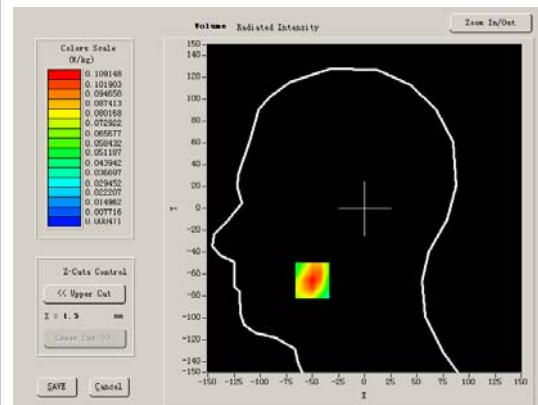


Maximum location: X=-50.00, Y=-66.00


SAR 10g (W/Kg)	0.053260
SAR 1g (W/Kg)	0.104272

Z Axis Scan


Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.1091	0.0488	0.0294	0.0153	0.0109	0.0064

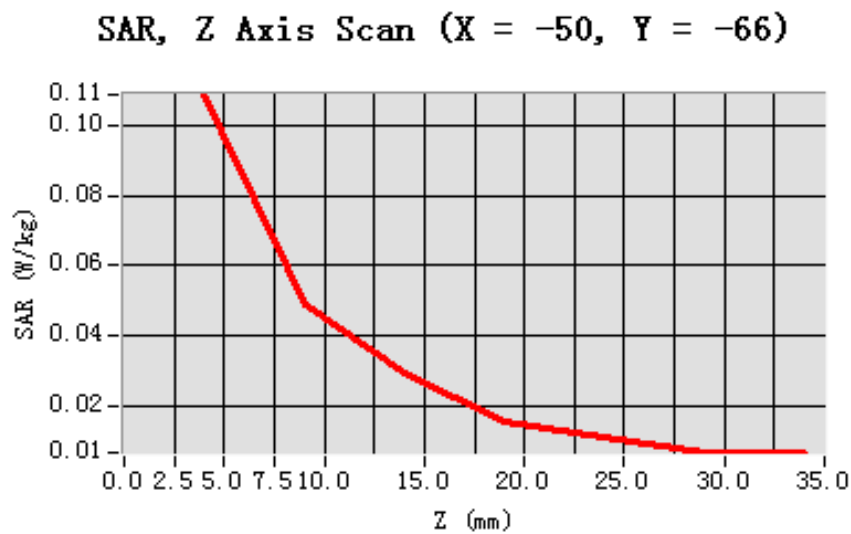

3D sceen shot

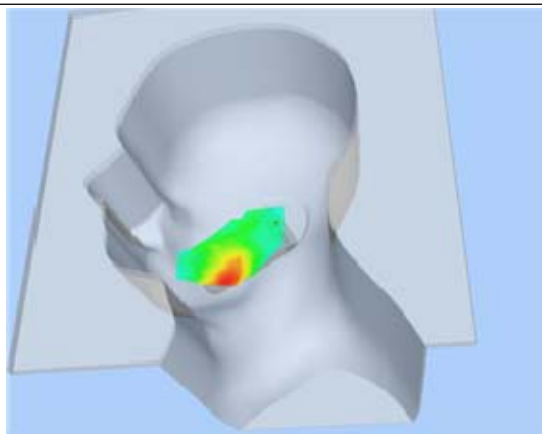

Hot spot position

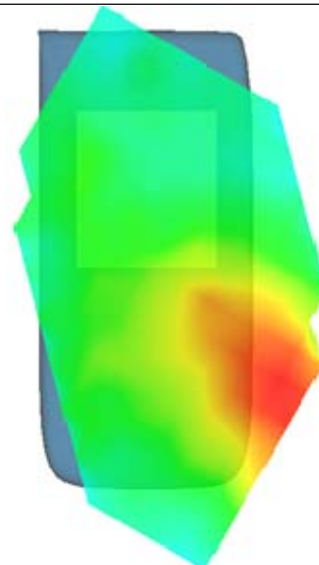

MEASUREMENT 14

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 15/5/2012

Measurement duration: 7 minutes 20 seconds

A. Experimental conditions.


Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Tilt
Band	GSM1900
Channels	High
Signal	GSM

B. SAR Measurement Results


Higher Band SAR (Channel 810):

Frequency (MHz)	1909.800000
Relative permittivity (real part)	38.509998
Relative permittivity	13.750000
Conductivity (S/m)	1.436111
Power drift(%)	0.530000
Ambient Temperature:	22.6°C
Liquid Temperature:	22.7°C
ConvF:	40.136,34.843,38.721
Crest factor:	1:8

SURFACE SAR

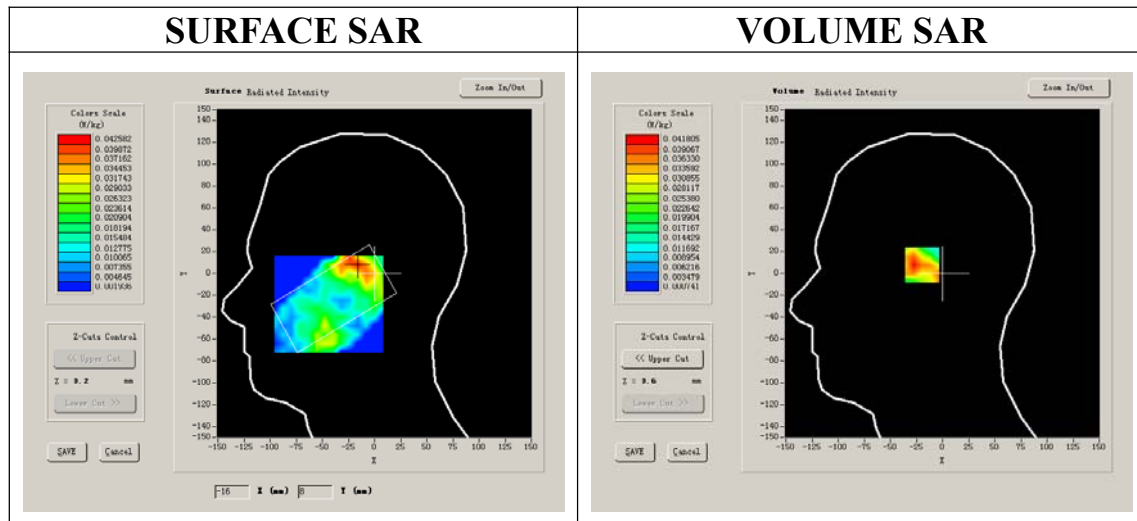

VOLUME SAR

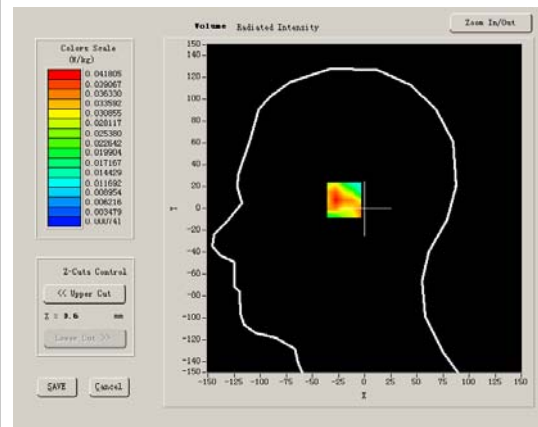


Maximum location: X=-16.00, Y=8.00

SAR 10g (W/Kg)	0.021193
SAR 1g (W/Kg)	0.039778


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.0367	0.0166	0.0097	0.0044	0.0074	0.0061


SAR, Z Axis Scan (X = -16, Y = 8)

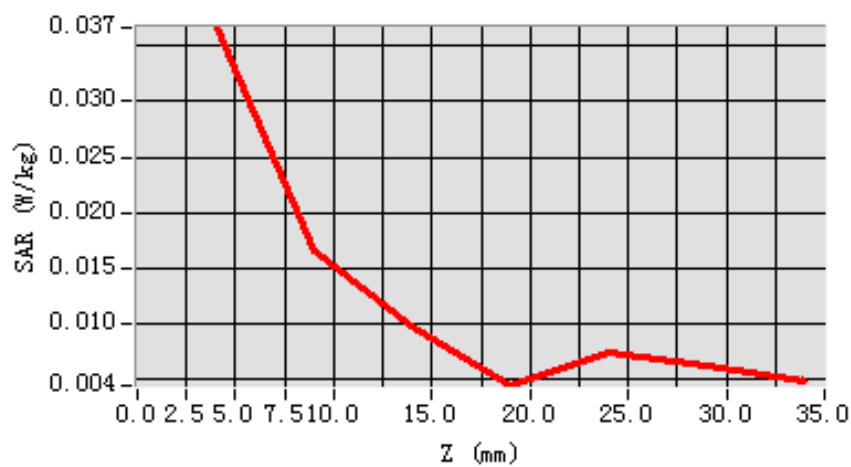

3D sceen shot

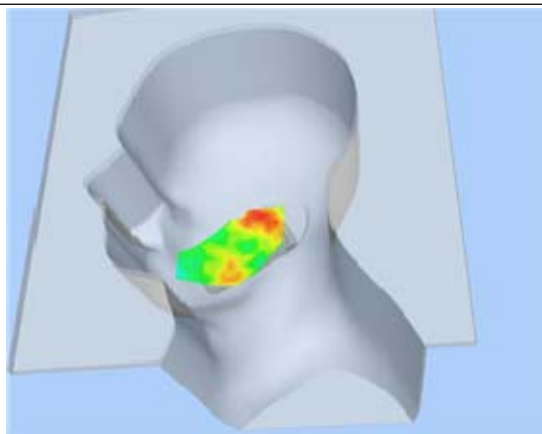

Hot spot position

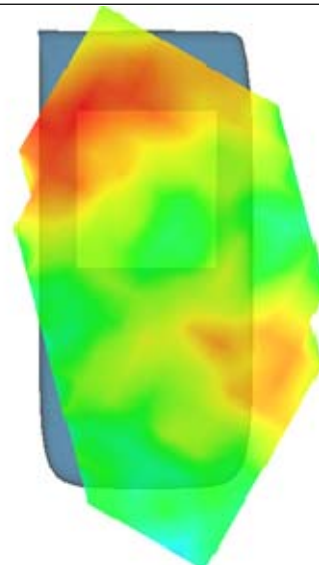

MEASUREMENT 15

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 15/5/2012

Measurement duration: 8 minutes 38 seconds

A. Experimental conditions.


Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Cheek
Band	GSM1900
Channels	High
Signal	GSM

B. SAR Measurement Results


Higher Band SAR (Channel 810):

Frequency (MHz)	1909.800000
Relative permittivity (real part)	38.509998
Relative permittivity	13.750000
Conductivity (S/m)	1.436111
Power drift(%)	-8.120000
Ambient Temperature:	22.6°C
Liquid Temperature:	22.7°C
ConvF:	40.136,34.843,38.721
Crest factor:	1:8

SURFACE SAR

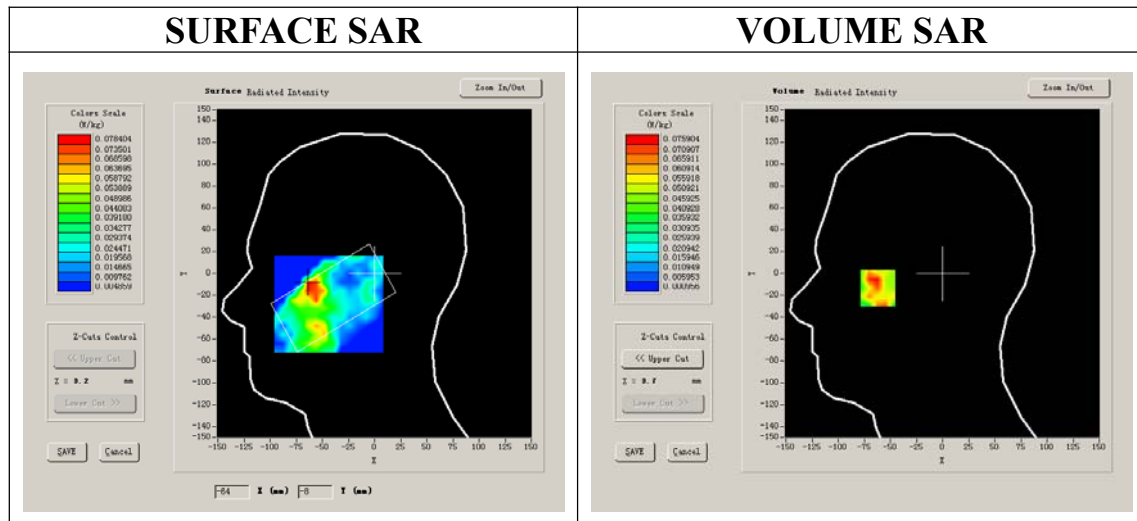

VOLUME SAR

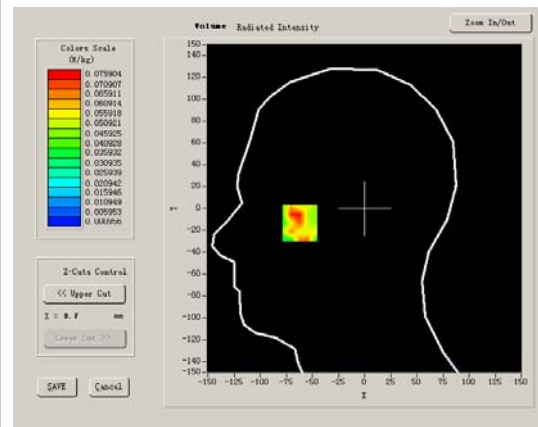


Maximum location: X=-62.00, Y=-11.00

SAR 10g (W/Kg)	0.037081
SAR 1g (W/Kg)	0.074511


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.0699	0.0417	0.0278	0.0171	0.0169	0.0019


SAR, Z Axis Scan (X = -62, Y = -11)

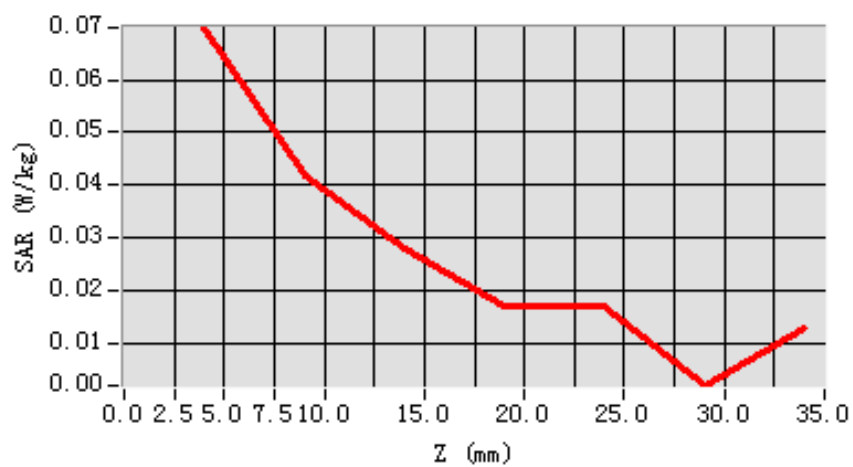

3D scene shot

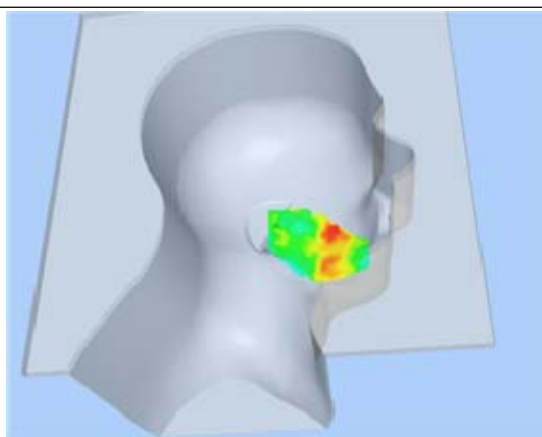

Hot spot position

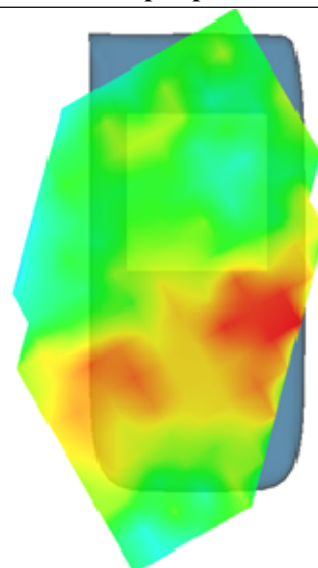

MEASUREMENT 16

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 15/5/2012

Measurement duration: 9 minutes 17 seconds


A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Tilt
Band	GSM1900
Channels	High
Signal	GSM

B. SAR Measurement Results

Higher Band SAR (Channel 810):

Frequency (MHz)	1909.800000
Relative permittivity (real part)	38.509998
Relative permittivity	13.750000
Conductivity (S/m)	1.436111
Power drift(%)	-3.250000
Ambient Temperature:	22.6°C
Liquid Temperature:	22.7°C
ConvF:	40.136,34.843,38.721
Crest factor:	1:8

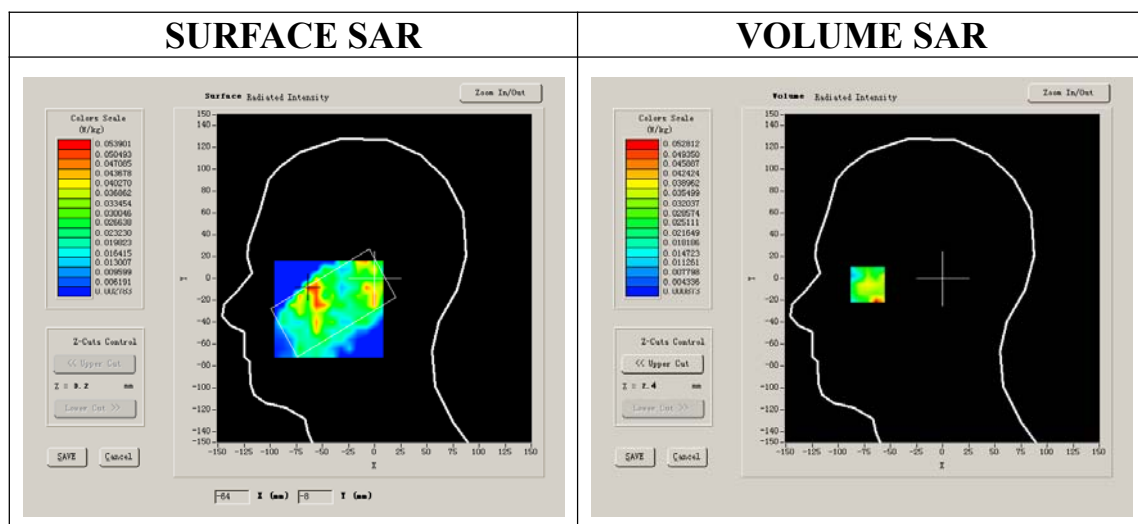


Maximum location: X=-72.00, Y=-2.00

SAR 10g (W/Kg)	0.022408
SAR 1g (W/Kg)	0.035254


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.0391	0.0092	0.0046	0.0118	0.0077	0.0097


SAR, Z Axis Scan (X = -72, Y = -2)

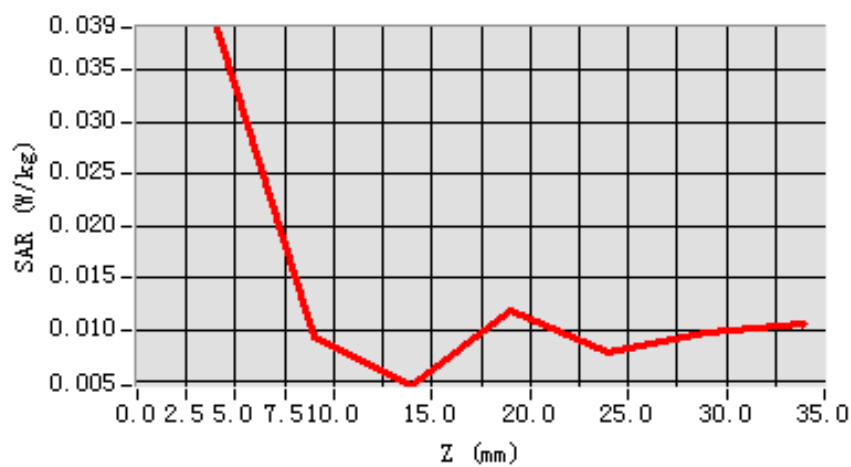

3D scene shot

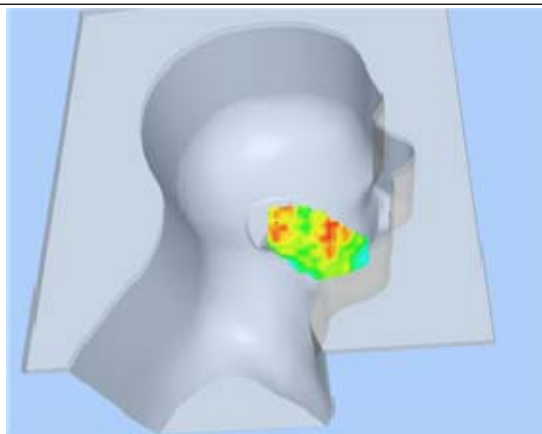

Hot spot position

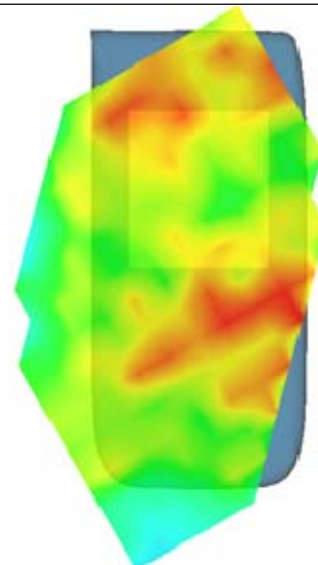

MEASUREMENT 17

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 15/5/2012

Measurement duration: 9 minutes 9 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM1900
Channels	High
Signal	GSM

B. SAR Measurement Results


High Band SAR (Channel 810):

Frequency (MHz)	1909.800000
Relative permittivity (real part)	52.540001
Relative permittivity	14.070000
Conductivity (S/m)	1.469533
Power drift (%)	-1.450000
Ambient Temperature:	22.5°C
Liquid Temperature:	22.3°C
ConvF:	40.625,34.773,38.535
Crest factor:	1:8

SURFACE SAR

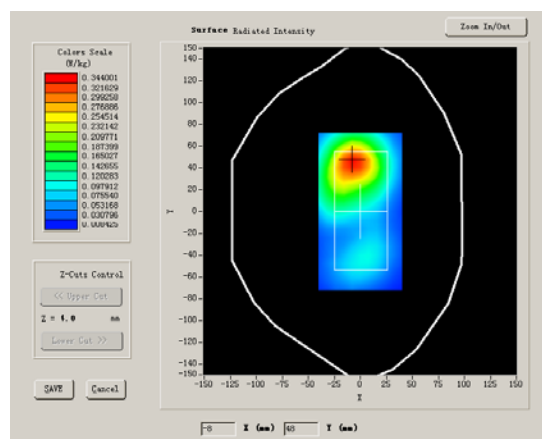

VOLUME SAR

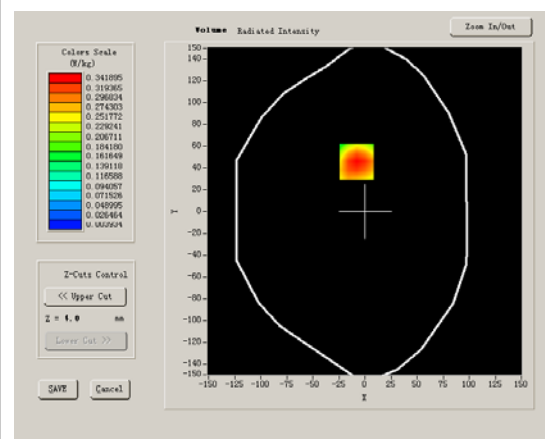


Maximum location: X=-8.00, Y=46.00

SAR 10g (W/Kg)	0.182686
SAR 1g (W/Kg)	0.337805


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.3499	0.1729	0.0849	0.0447	0.0216	0.0111


SAR, Z Axis Scan (X = -8, Y = 46)

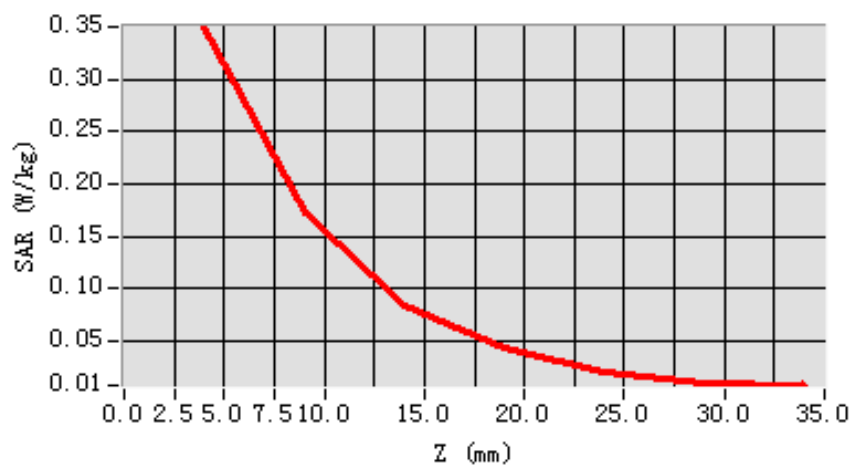

3D scene shot

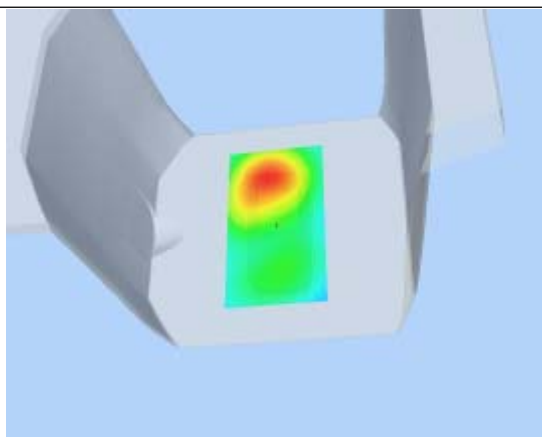

Hot spot position

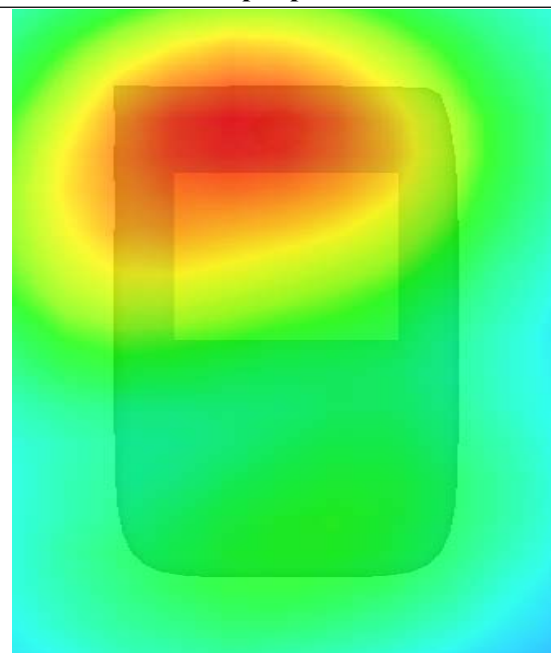

MEASUREMENT 18

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 15/5/2012

Measurement duration: 9 minutes 9 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM1900
Channels	High
Signal	GSM

B. SAR Measurement Results


High Band SAR (Channel 810):

Frequency (MHz)	1909.800000
Relative permittivity (real part)	52.540001
Relative permittivity	14.070000
Conductivity (S/m)	1.469533
Power drift (%)	-1.070000
Ambient Temperature:	22.5°C
Liquid Temperature:	22.3°C
ConvF:	40.625,34.773,38.535
Crest factor:	1:8

SURFACE SAR

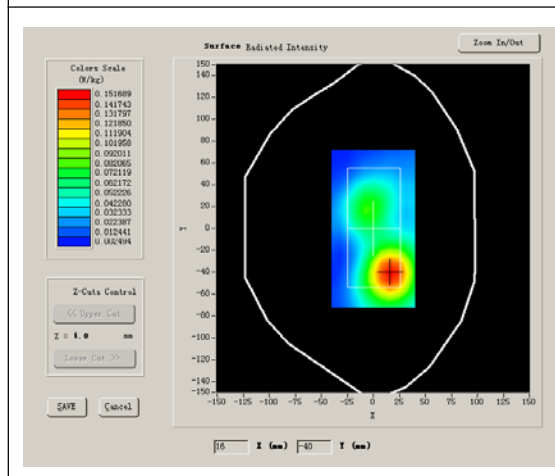

VOLUME SAR

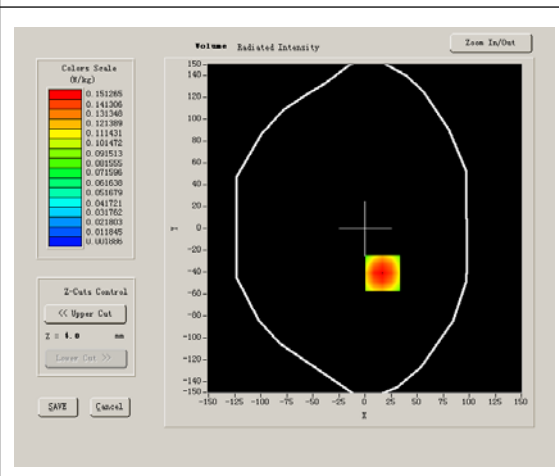


Maximum location: X=17.00, Y=-41.00

SAR 10g (W/Kg)	0.088286
SAR 1g (W/Kg)	0.159164


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.1647	0.0885	0.0463	0.0254	0.0135	0.0069


SAR, Z Axis Scan (X = 17, Y = -41)

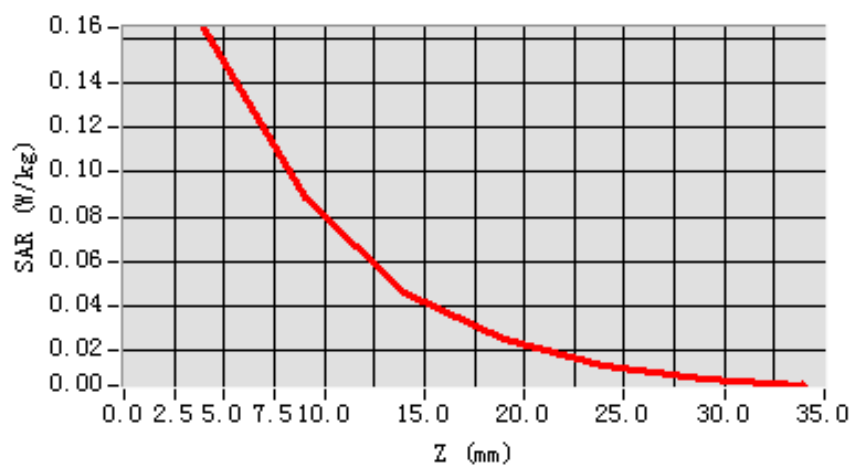

3D scene shot

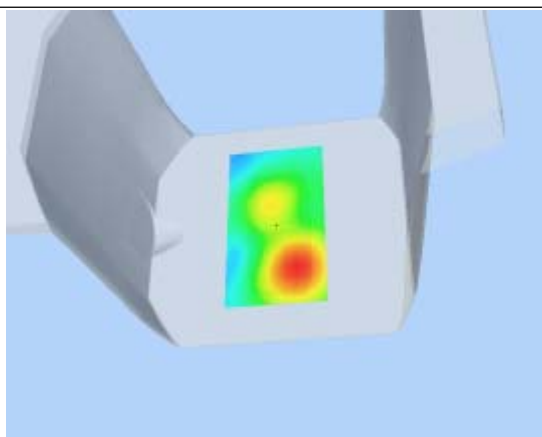

Hot spot position

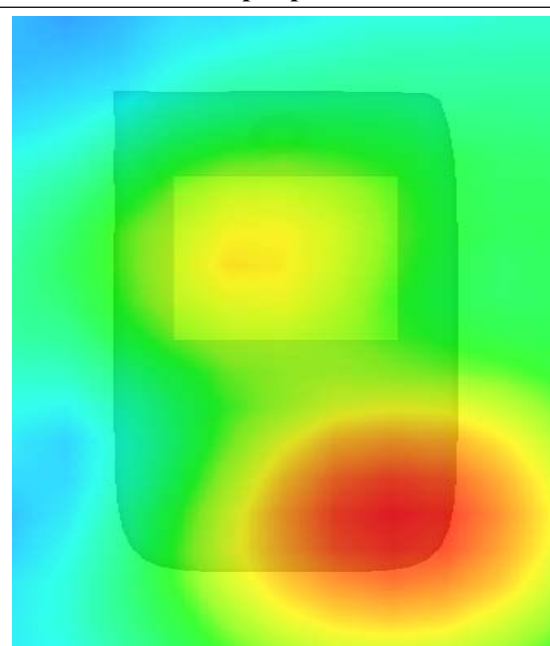

MEASUREMENT 19

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 15/5/2012

Measurement duration: 9 minutes 8 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM1900
Channels	High
Signal	GPRS

B. SAR Measurement Results


Higher Band SAR (Channel 810):

Frequency (MHz)	1909.800049
Relative permittivity (real part)	52.540001
Relative permittivity	14.070000
Conductivity (S/m)	1.492827
Power drift (%)	-1.020000
Ambient Temperature:	22.5°C
Liquid Temperature:	22.3°C
ConvF:	40.625,34.773,38.535
Crest factor:	1:2

SURFACE SAR

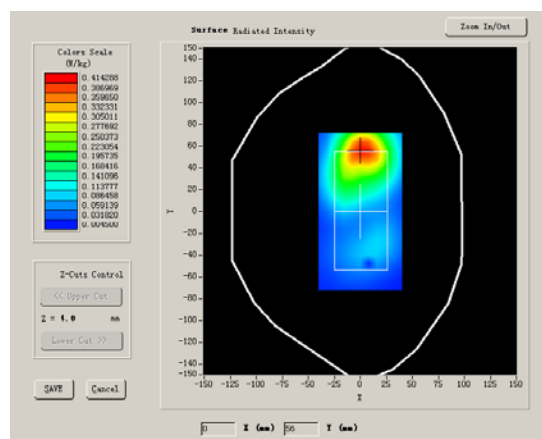

VOLUME SAR

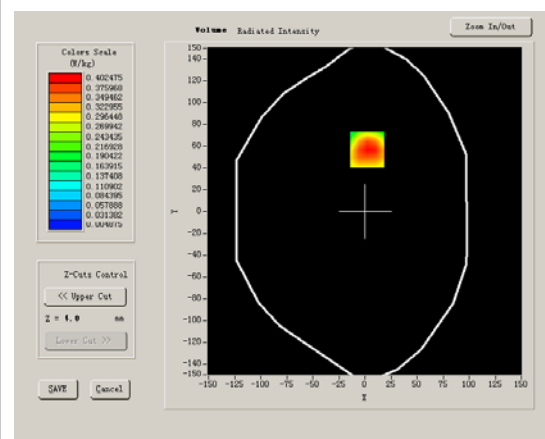


Maximum location: X=2.00, Y=57.00

SAR 10g (W/Kg)	0.219887
SAR 1g (W/Kg)	0.416725


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.4304	0.2078	0.1006	0.0501	0.0252	0.0138


SAR, Z Axis Scan (X = 2, Y = 57)

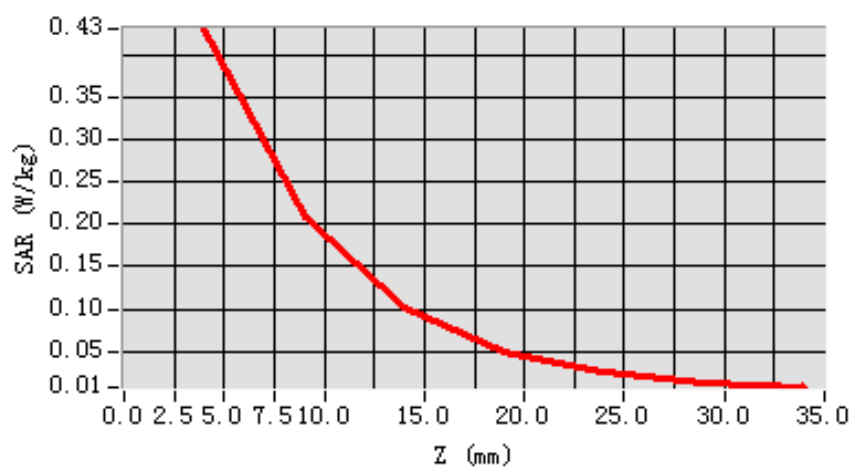

3D scene shot

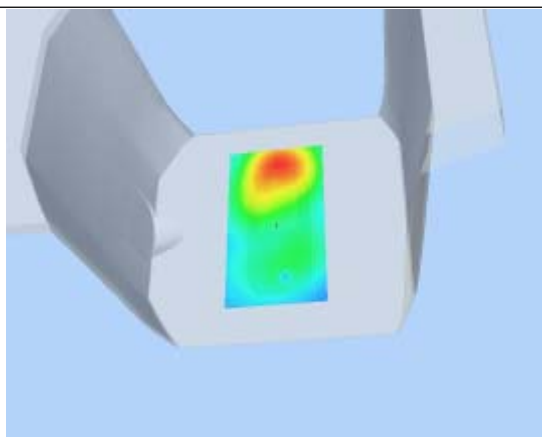

Hot spot position

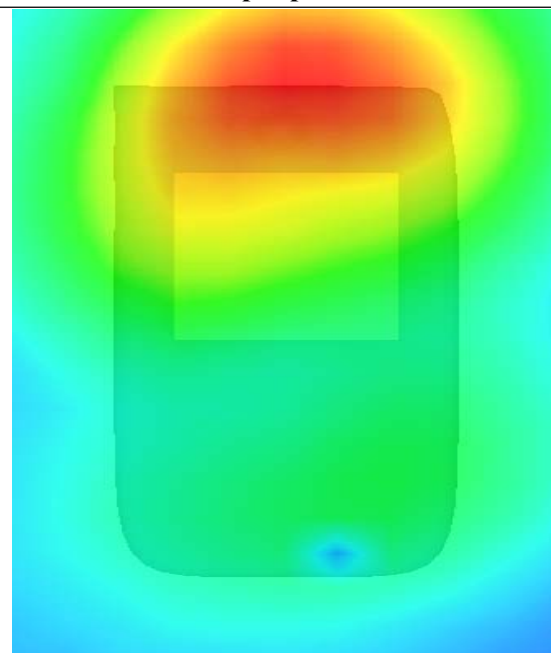

MEASUREMENT 20

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 15/5/2012

Measurement duration: 9 minutes 7 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM1900
Channels	High
Signal	GPRS

B. SAR Measurement Results


Higher Band SAR (Channel 810):

Frequency (MHz)	1909.800000
Relative permittivity (real part)	52.540001
Relative permittivity	14.070000
Conductivity (S/m)	1.469533
Power drift (%)	-1.300000
Ambient Temperature:	22.5°C
Liquid Temperature:	22.3°C
ConvF:	40.625,34.773,38.535
Crest factor:	1:2

SURFACE SAR

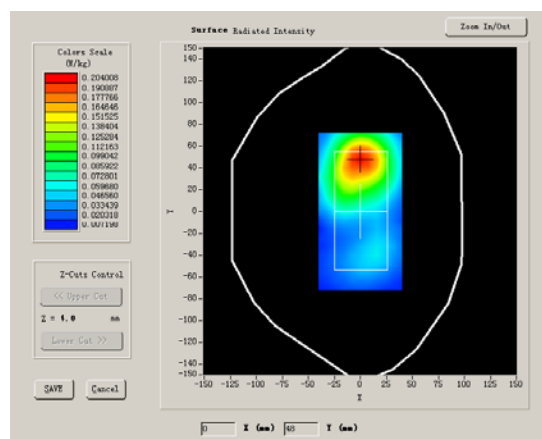

VOLUME SAR

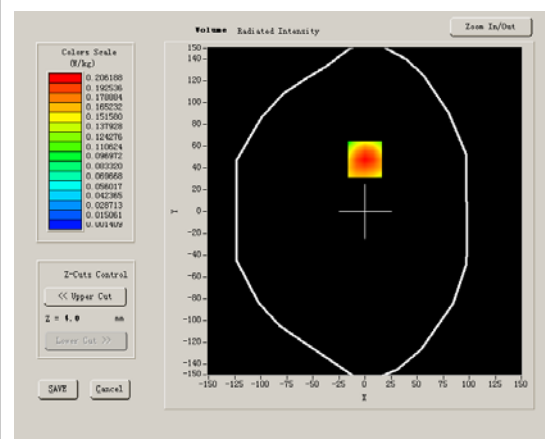


Maximum location: X=0.00, Y=48.00

SAR 10g (W/Kg)	0.110395
SAR 1g (W/Kg)	0.202813


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.2110	0.1036	0.0532	0.0251	0.0132	0.0029


SAR, Z Axis Scan (X = 0, Y = 48)

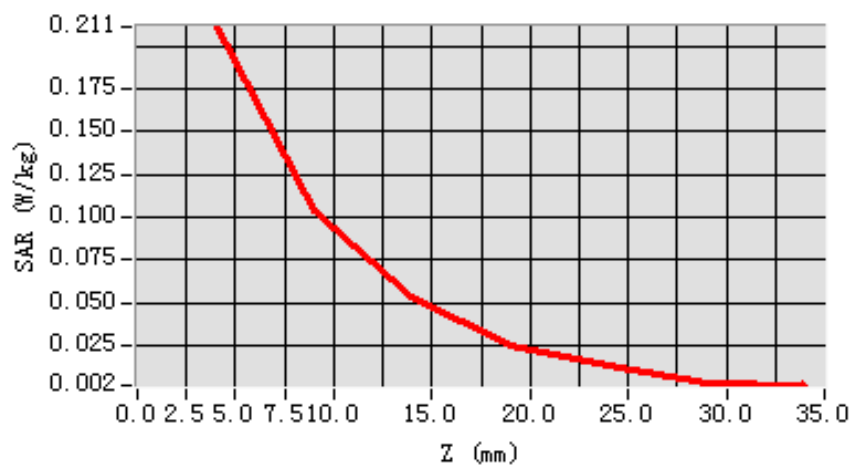

3D scene shot

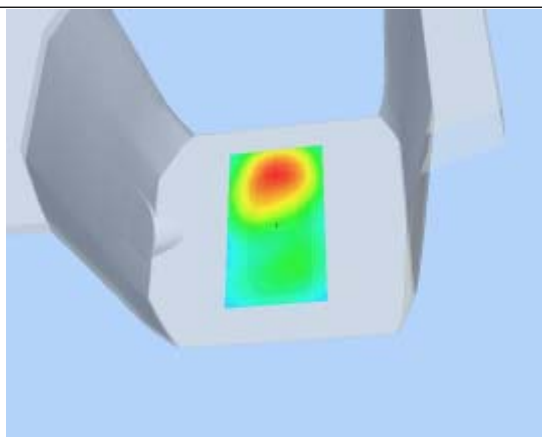

Hot spot position

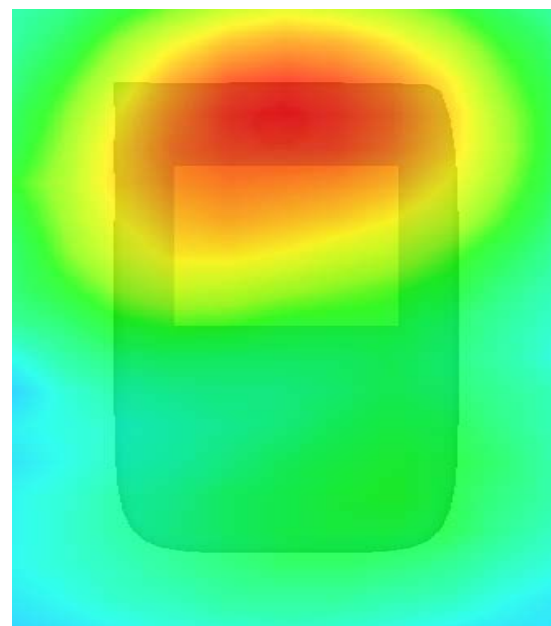

MEASUREMENT 21

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 15/5/2012

Measurement duration: 9 minutes 9 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM1900
Channels	High
Signal	GPRS

B. SAR Measurement Results


Higher Band SAR (Channel 810):

Frequency (MHz)	1909.800000
Relative permittivity (real part)	52.540001
Relative permittivity	14.070000
Conductivity (S/m)	1.469533
Power drift (%)	-1.720000
Ambient Temperature:	22.5°C
Liquid Temperature:	22.3°C
ConvF:	40.625,34.773,38.535
Crest factor:	1:2

SURFACE SAR

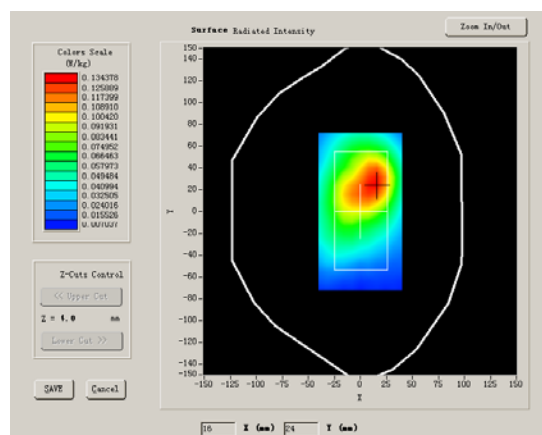

VOLUME SAR

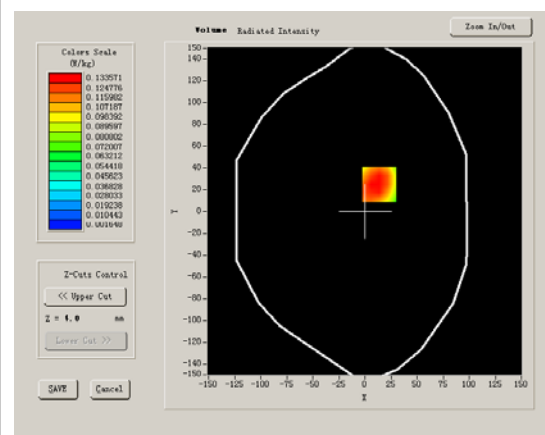


Maximum location: X=14.00, Y=25.00

SAR 10g (W/Kg)	0.079938
SAR 1g (W/Kg)	0.142478


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.1447	0.0763	0.0395	0.0211	0.0111	0.0060


SAR, Z Axis Scan (X = 14, Y = 25)

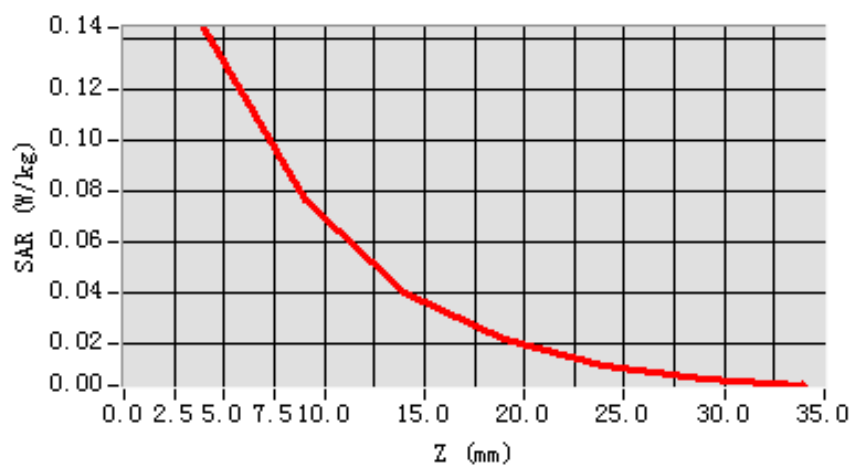

3D scene shot

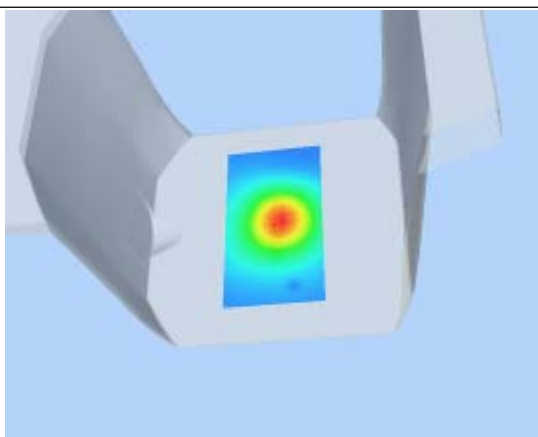

Hot spot position

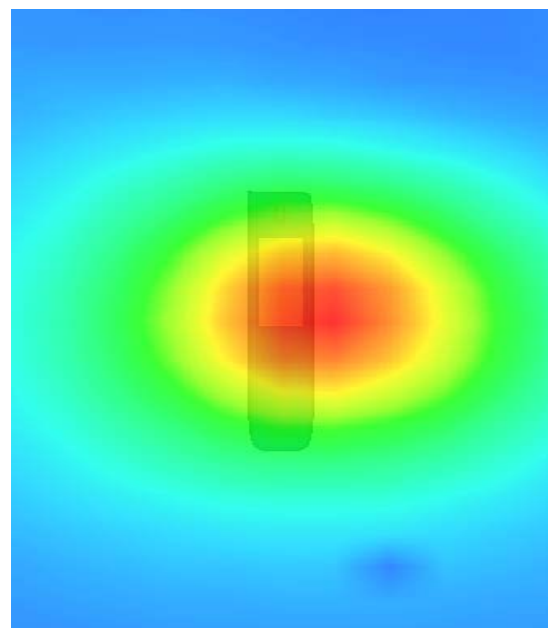

MEASUREMENT 22

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 15/5/2012

Measurement duration: 9 minutes 7 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM1900
Channels	High
Signal	GPRS

B. SAR Measurement Results


Higher Band SAR (Channel 810):

Frequency (MHz)	1909.800000
Relative permittivity (real part)	52.540001
Relative permittivity	14.070000
Conductivity (S/m)	1.469533
Power drift (%)	-1.720000
Ambient Temperature:	22.5°C
Liquid Temperature:	22.3°C
ConvF:	40.625,34.773,38.535
Crest factor:	1:2

SURFACE SAR

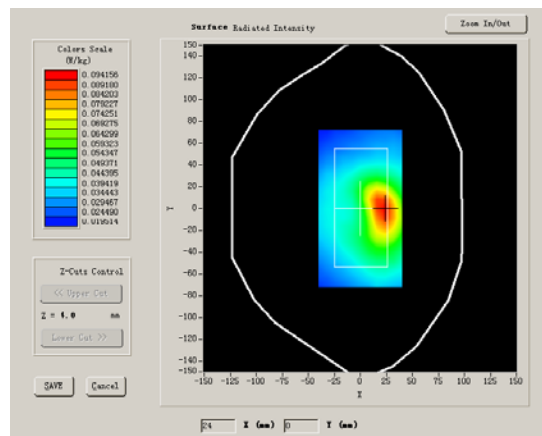

VOLUME SAR

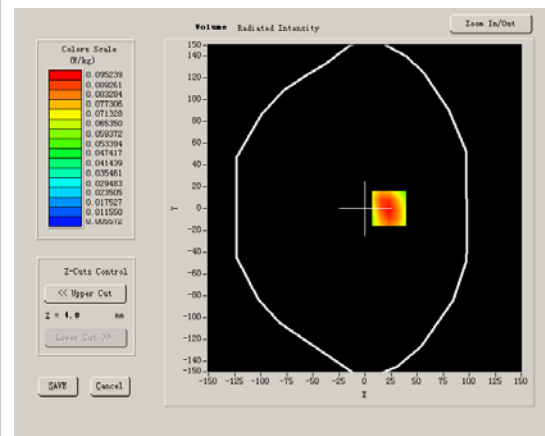


Maximum location: X=23.00, Y=0.00

SAR 10g (W/Kg)	0.068229
SAR 1g (W/Kg)	0.109468


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.1143	0.0712	0.0453	0.0299	0.0203	0.0137


SAR, Z Axis Scan (X = 23, Y = 0)

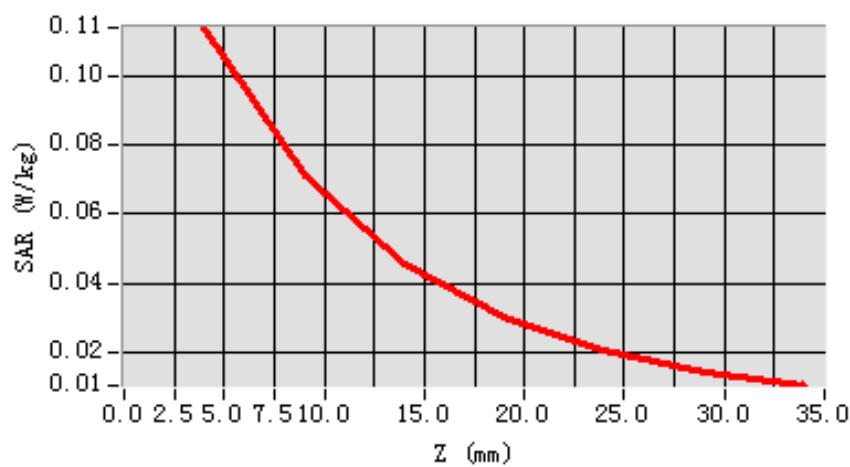

3D scene shot

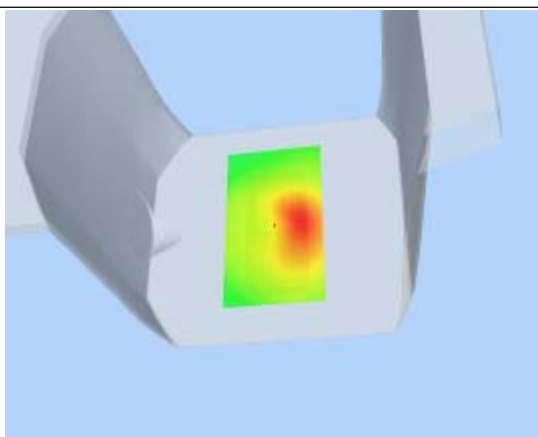

Hot spot position

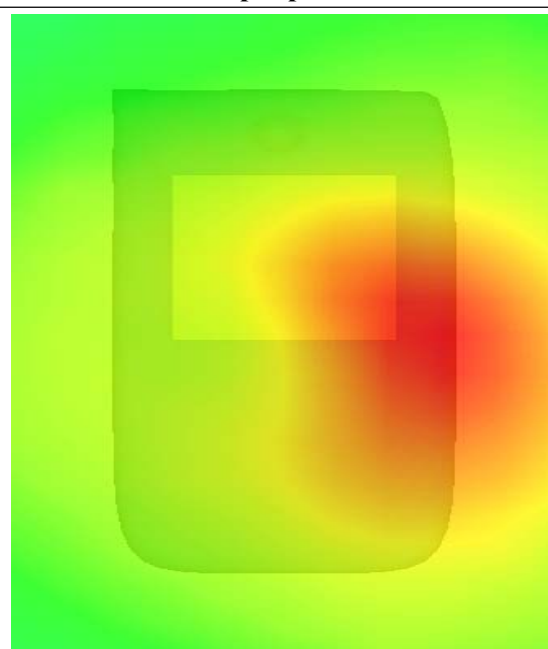

MEASUREMENT 23

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 15/5/2012

Measurement duration: 9 minutes 7 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM1900
Channels	High
Signal	GPRS

B. SAR Measurement Results


Higher Band SAR (Channel 810):

Frequency (MHz)	1909.800000
Relative permittivity (real part)	52.540001
Relative permittivity	14.070000
Conductivity (S/m)	1.469533
Power drift (%)	-0.850000
Ambient Temperature:	22.5°C
Liquid Temperature:	22.3°C
ConvF:	40.625,34.773,38.535
Crest factor:	1:2

SURFACE SAR

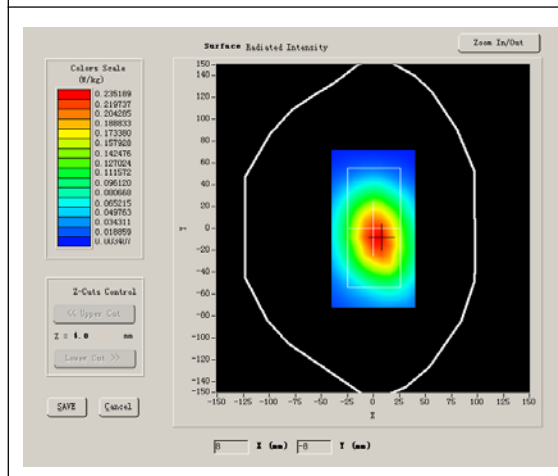

VOLUME SAR

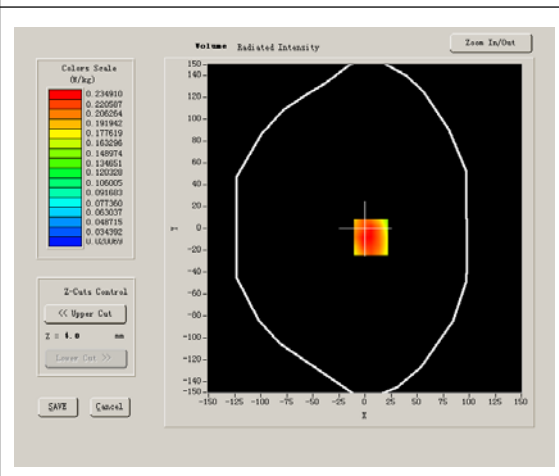


Maximum location: X=6.00, Y=-8.00

SAR 10g (W/Kg)	0.167116
SAR 1g (W/Kg)	0.248584


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.2579	0.1791	0.1269	0.0855	0.0611	0.0425


SAR, Z Axis Scan (X = 6, Y = -8)

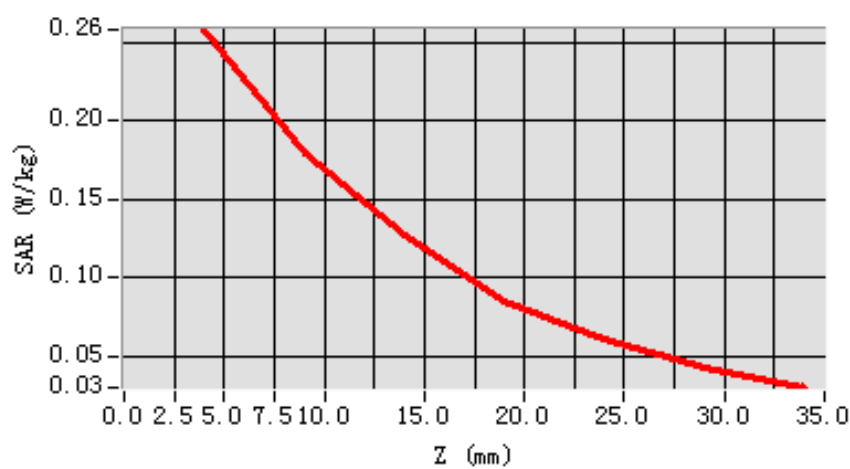

3D scene shot

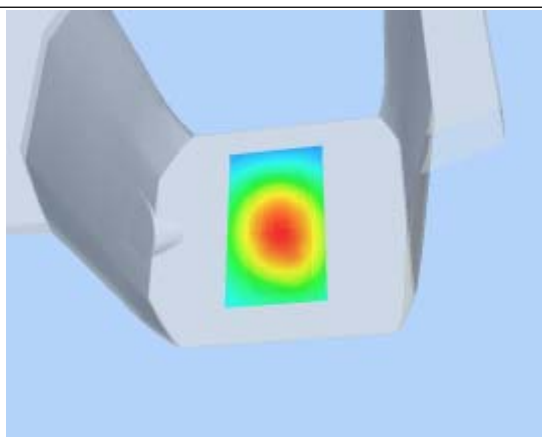

Hot spot position

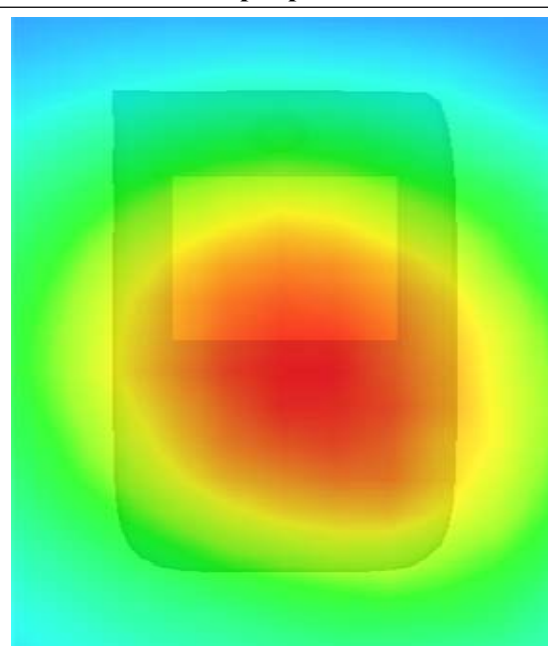

MEASUREMENT 24

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 15/5/2012

Measurement duration: 9 minutes 7 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM1900
Channels	Middle
Signal	EDGE

B. SAR Measurement Results


Middle Band SAR (Channel 661):

Frequency (MHz)	1880.000000
Relative permittivity (real part)	52.540001
Relative permittivity	14.070000
Conductivity (S/m)	1.469533
Power drift (%)	-0.850000
Ambient Temperature:	22.5°C
Liquid Temperature:	22.3°C
ConvF:	40.625,34.773,38.535
Crest factor:	1:2

SURFACE SAR

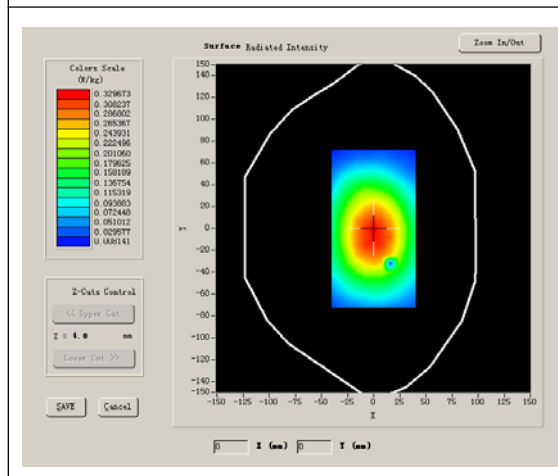

VOLUME SAR

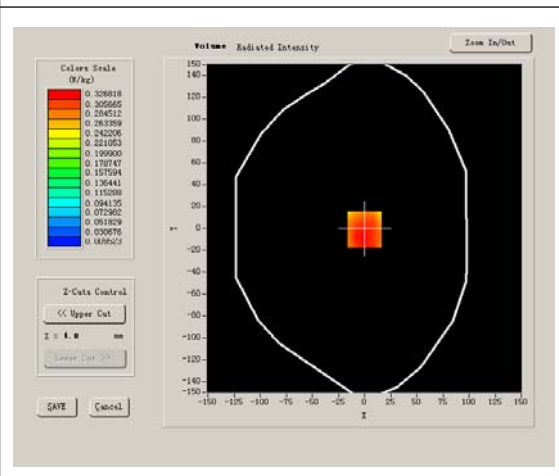


Maximum location: X=0.00, Y=-1.00

SAR 10g (W/Kg)	0.259580
SAR 1g (W/Kg)	0.355397


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.3642	0.2866	0.2067	0.1599	0.1134	0.0837


SAR, Z Axis Scan (X = 0, Y = -1)

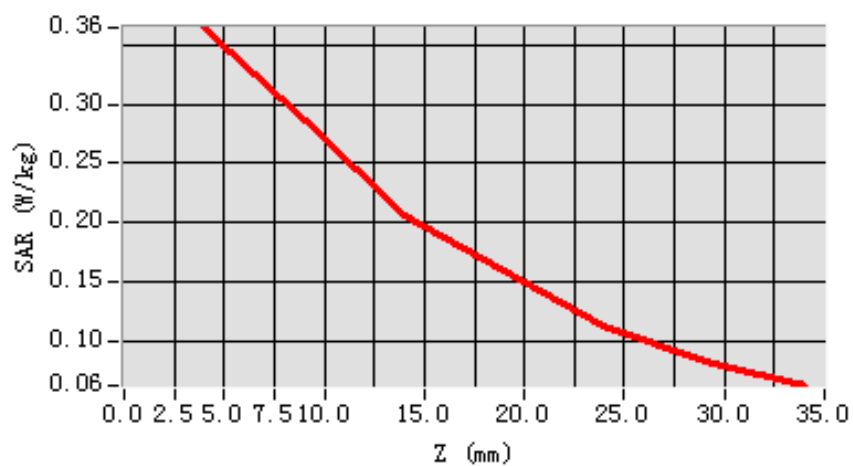

3D scene shot

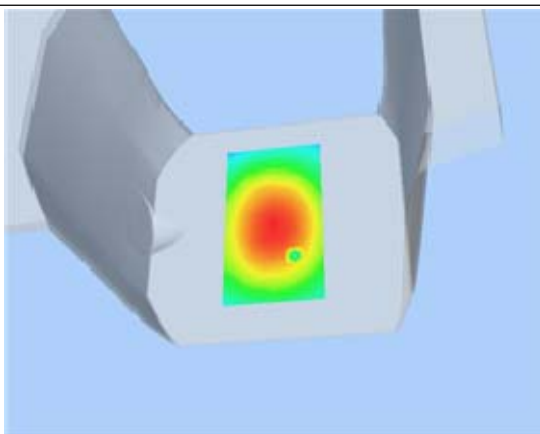

Hot spot position

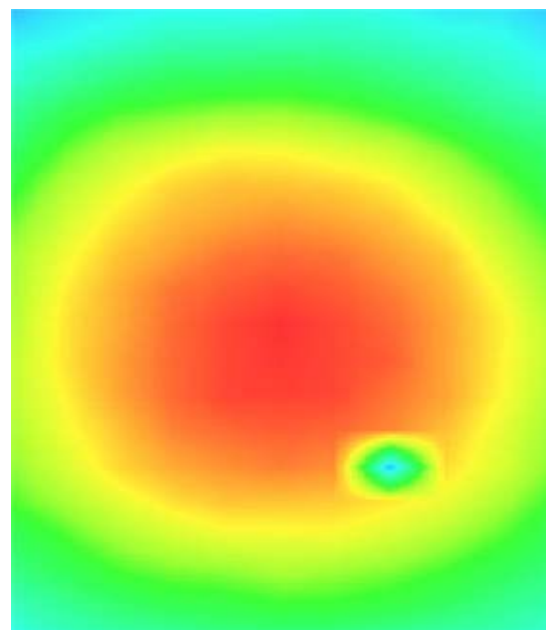

MEASUREMENT 25

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 15/5/2012

Measurement duration: 7 minutes 46 seconds


A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	WCDMA
Channels	Low
Signal	CDMA

B. SAR Measurement Results

Lower Band SAR (Channel 4132):

Frequency (MHz)	826.400000
Relative permittivity (real part)	39.980000
Relative permittivity	13.170000
Conductivity (S/m)	0.604357
Power drift (%)	3.770000
Ambient Temperature:	22.6°C
Liquid Temperature:	22.7°C
ConvF:	28.479,25.214,27.196
Crest factor:	1:8

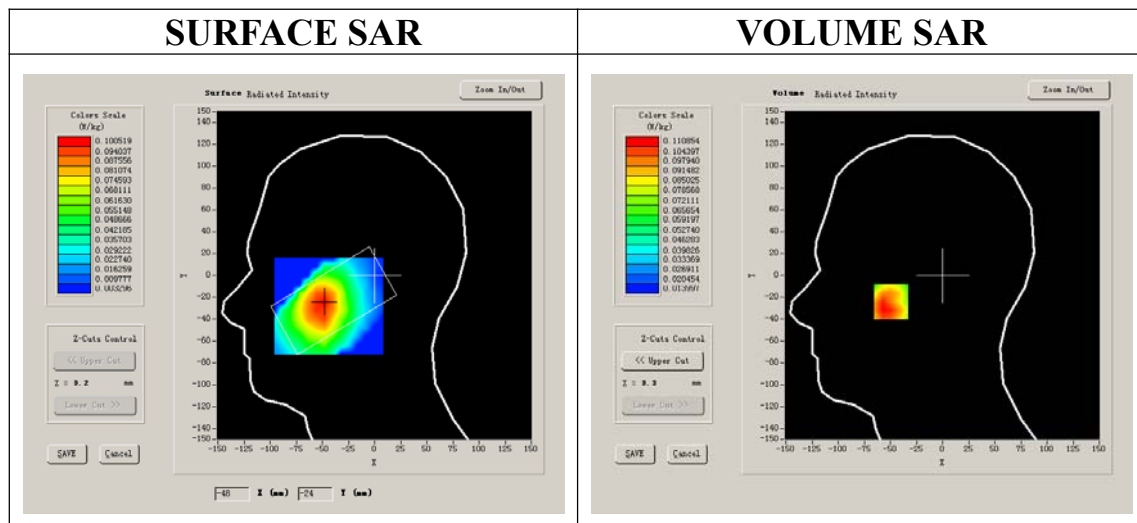


Maximum location: X=-49.00, Y=-24.00

SAR 10g (W/Kg)	0.076312
SAR 1g (W/Kg)	0.104709


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.0975	0.0825	0.0670	0.0470	0.0394	0.0291


SAR, Z Axis Scan (X = -49, Y = -24)

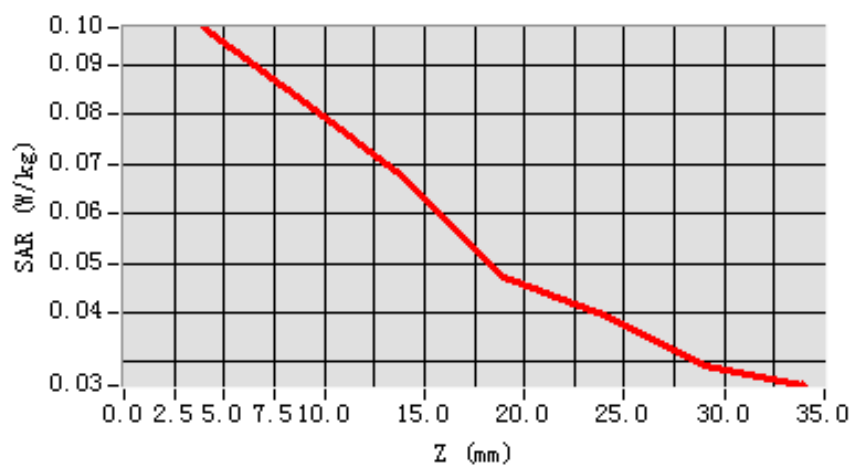

3D scene shot

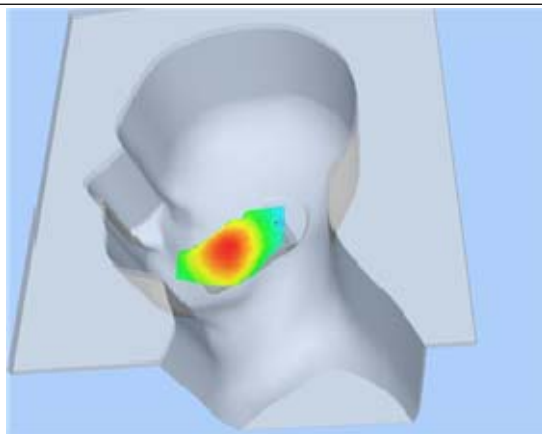

Hot spot position

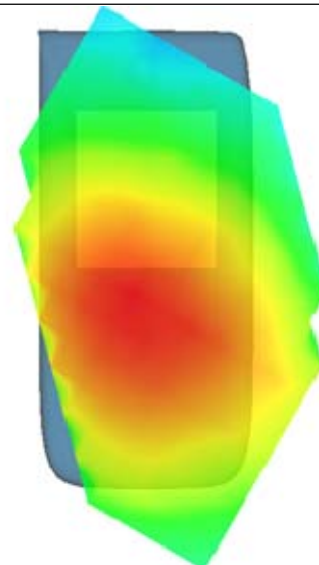

MEASUREMENT 26

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 15/5/2012

Measurement duration: 7 minutes 33 seconds


A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Tilt
Band	WCDMA
Channels	Low
Signal	CDMA

B. SAR Measurement Results

Lower Band SAR (Channel 4132):

Frequency (MHz)	826.400000
Relative permittivity (real part)	39.980000
Relative permittivity	13.170000
Conductivity (S/m)	0.604357
Power drift (%)	-0.080000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.7°C
ConvF:	28.479,25.214,27.196
Crest factor:	1:1

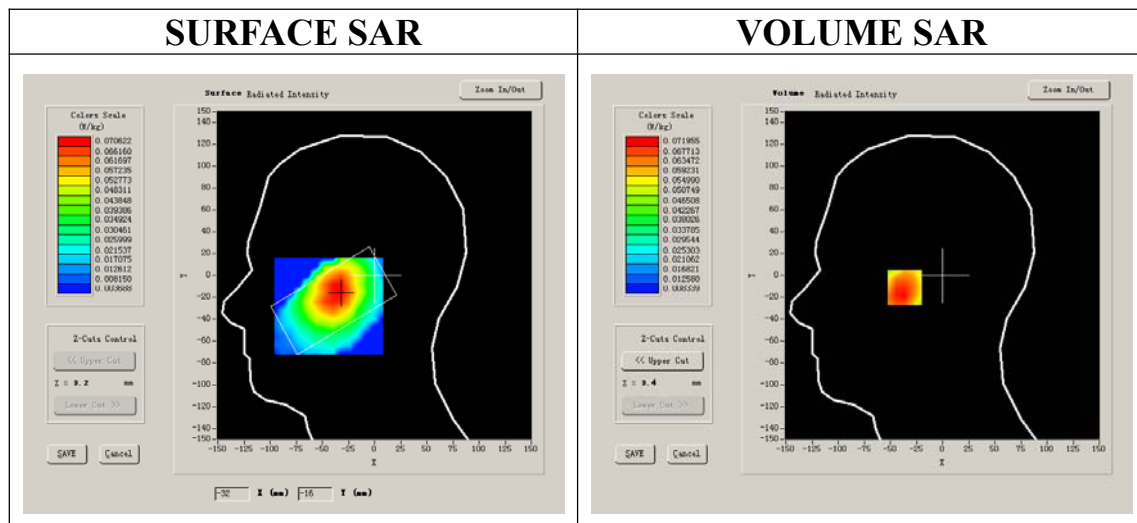


Maximum location: X=-34.00, Y=-11.00

SAR 10g (W/Kg)	0.052011
SAR 1g (W/Kg)	0.070191


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.0693	0.0569	0.0434	0.0338	0.0293	0.0224


SAR, Z Axis Scan (X = -34, Y = -11)

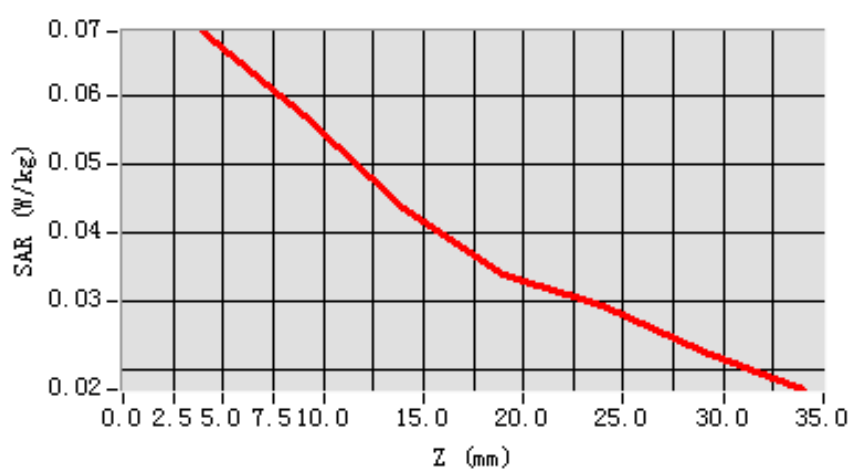

3D scene shot

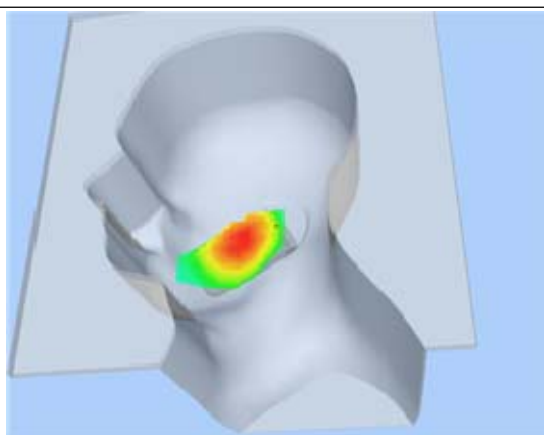

Hot spot position

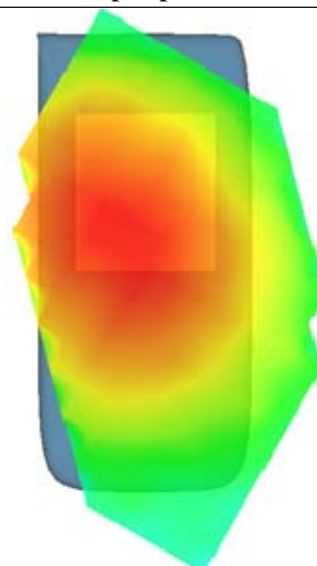

MEASUREMENT 27

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 15/5/2012

Measurement duration: 8 minutes 0 seconds


A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Cheek
Band	WCDMA
Channels	Low
Signal	CDMA

B. SAR Measurement Results

Lower Band SAR (Channel 4132):

Frequency (MHz)	826.400000
Relative permittivity (real part)	39.980000
Relative permittivity	13.170000
Conductivity (S/m)	0.604357
Power drift (%)	-0.630000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.7°C
ConvF:	28.479,25.214,27.196
Crest factor:	1:1

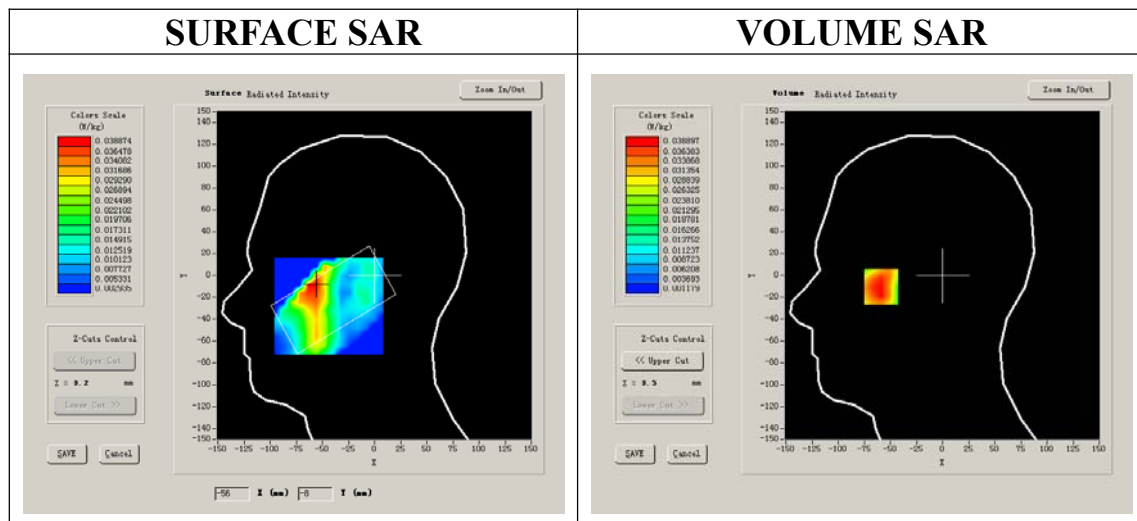


Maximum location: X=-59.00, Y=-8.00

SAR 10g (W/Kg)	0.020917
SAR 1g (W/Kg)	0.038799


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.0387	0.0184	0.0117	0.0067	0.0030	0.0016


SAR, Z Axis Scan (X = -59, Y = -8)

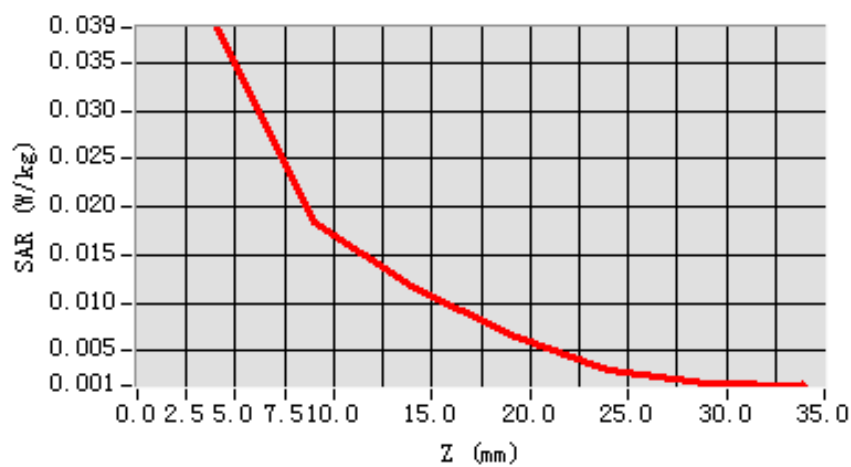

3D scene shot

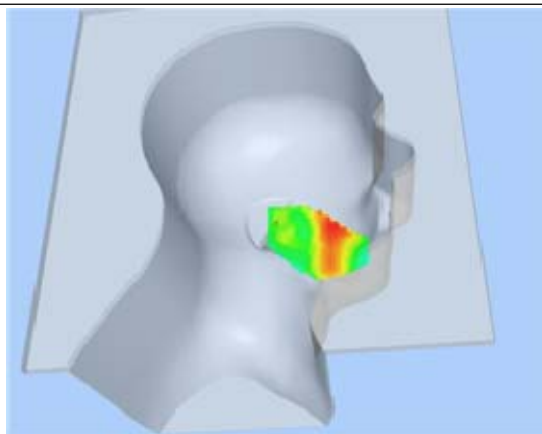

Hot spot position

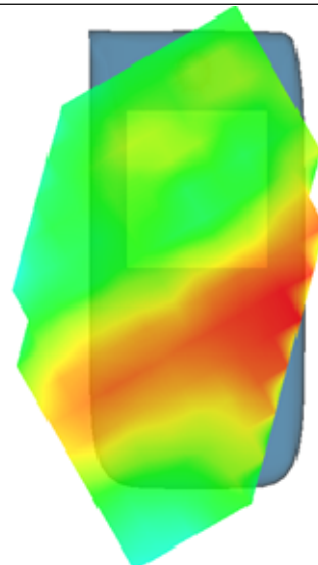

MEASUREMENT 28

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 15/5/2012

Measurement duration: 7 minutes 38 seconds


A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Tilt
Band	WCDMA
Channels	Middle
Signal	CDMA

B. SAR Measurement Results

Lower Band SAR (Channel 4232):

Frequency (MHz)	826.400000
Relative permittivity (real part)	39.910000
Relative permittivity	13.230000
Conductivity (S/m)	0.614460
Power drift (%)	-0.170000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.7°C
ConvF:	28.479,25.214,27.196
Crest factor:	1:1

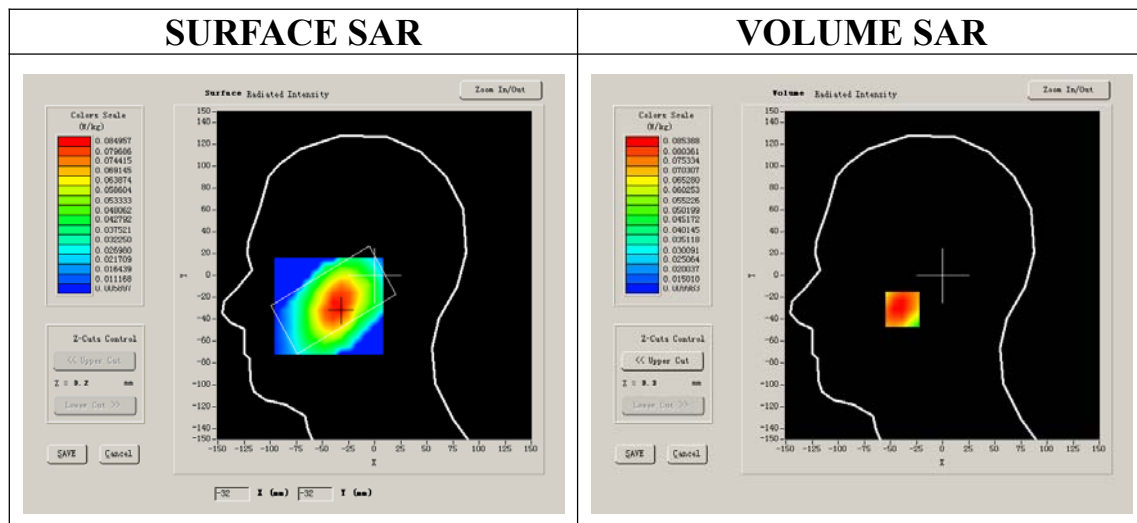


Maximum location: X=-33.00, Y=-31.00

SAR 10g (W/Kg)	0.060372
SAR 1g (W/Kg)	0.082321


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.0851	0.0655	0.0498	0.0399	0.0302	0.0263


SAR, Z Axis Scan (X = -33, Y = -31)

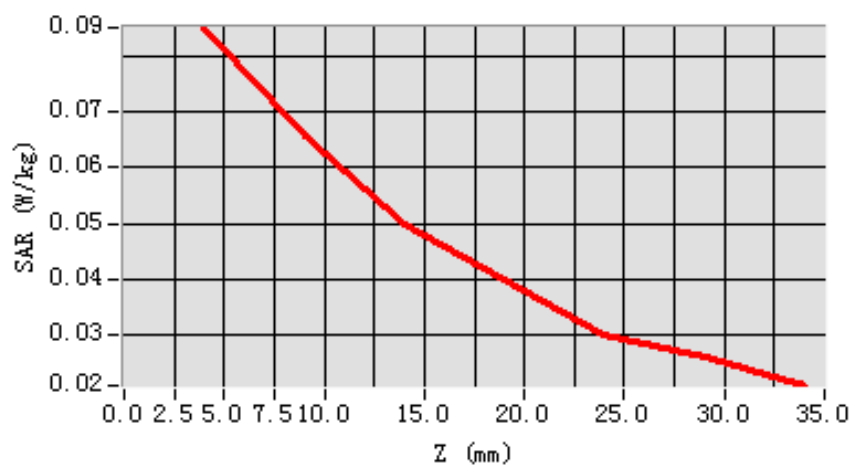

3D scene shot

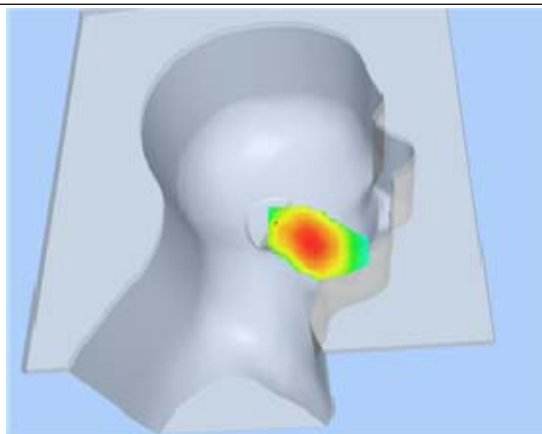

Hot spot position

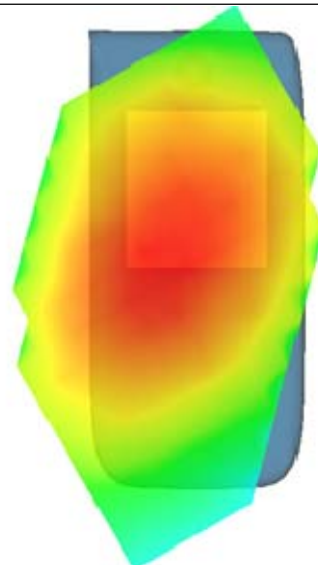

MEASUREMENT 29

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 15/5/2012

Measurement duration: 9 minutes 6 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	WCDMA
Channels	Low
Signal	CDMA

B. SAR Measurement Results


Lower Band SAR (Channel 4132):

Frequency (MHz)	826.400000
Relative permittivity (real part)	51.341000
Relative permittivity	15.877050
Conductivity (S/m)	0.728580
Power drift (%)	-0.410000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.7°C
ConvF:	28.559,25.681,27.588
Crest factor:	1:1

SURFACE SAR

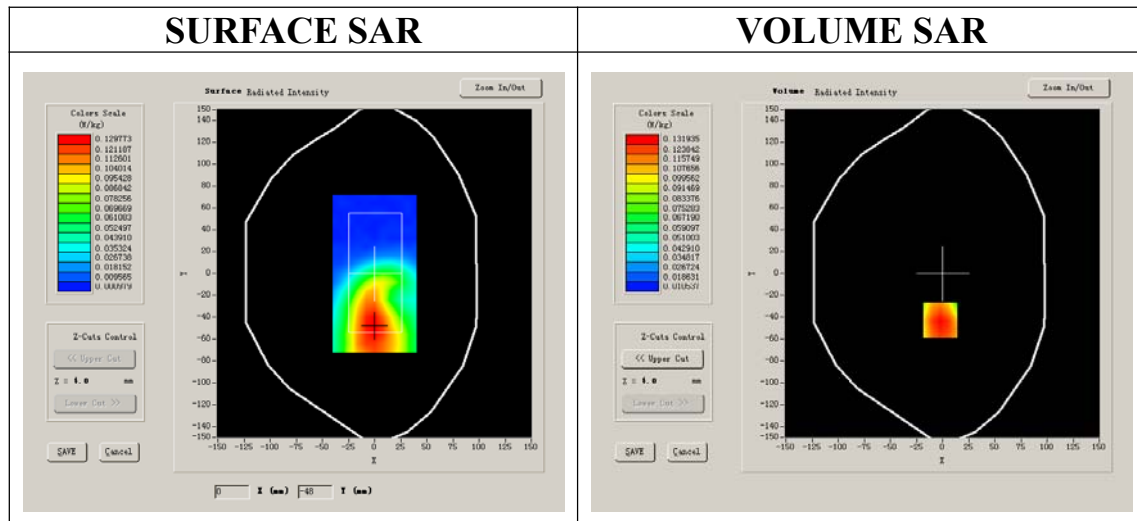

VOLUME SAR

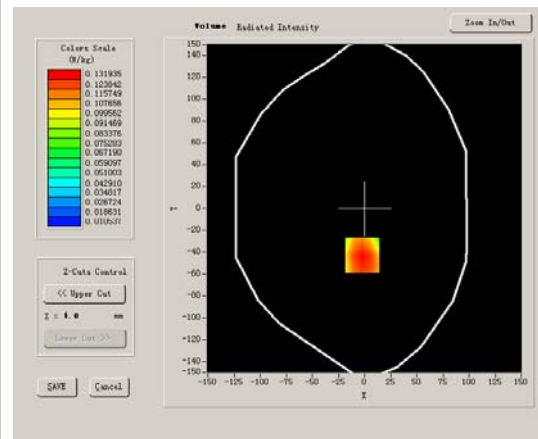


Maximum location: X=-2.00, Y=-43.00

SAR 10g (W/Kg)	0.108482
SAR 1g (W/Kg)	0.154307


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.1591	0.1146	0.0837	0.0619	0.0448	0.0305


SAR, Z Axis Scan (X = -2, Y = -43)

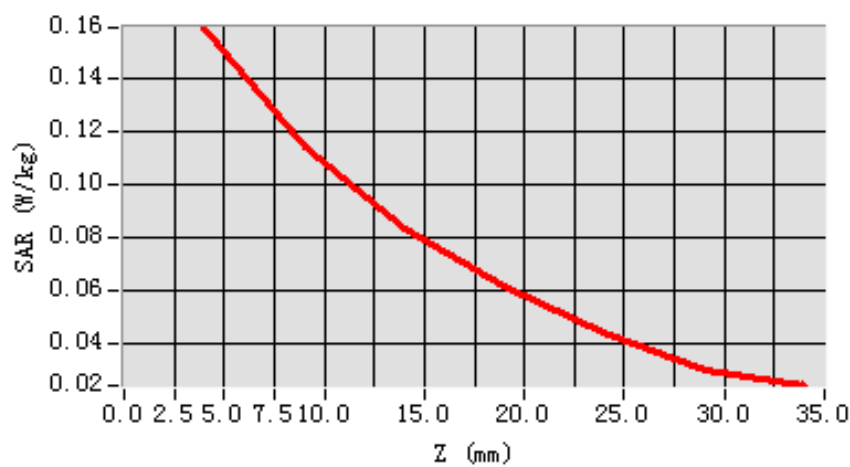

3D scene shot

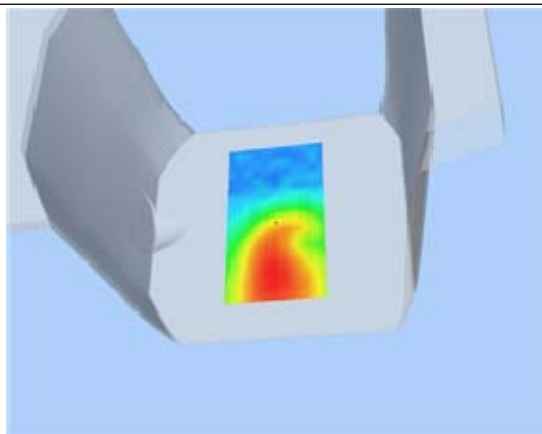

Hot spot position

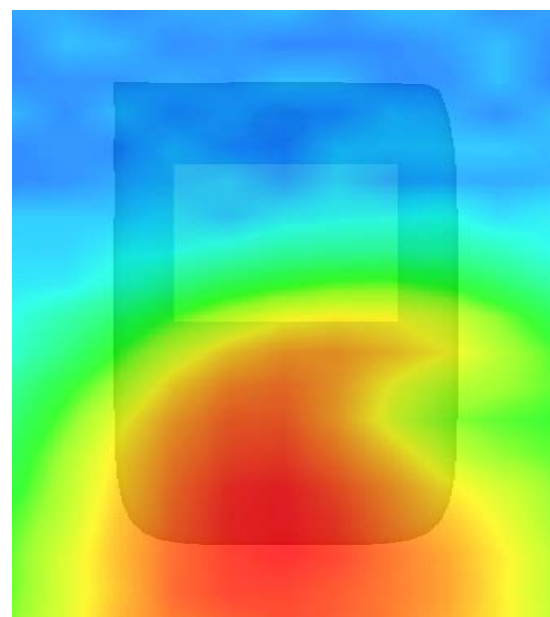

MEASUREMENT 30

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 15/5/2012

Measurement duration: 9 minutes 8 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	WCDMA
Channels	Low
Signal	CDMA

B. SAR Measurement Results


Lower Band SAR (Channel 4132):

Frequency (MHz)	826.400000
Relative permittivity (real part)	51.341000
Relative permittivity	15.877050
Conductivity (S/m)	0.728580
Power drift (%)	-0.770000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.7°C
ConvF:	28.559,25.681,27.588
Crest factor:	1:1

SURFACE SAR

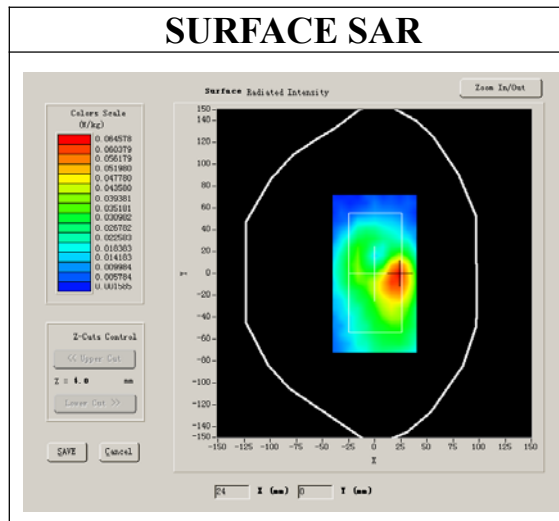

VOLUME SAR

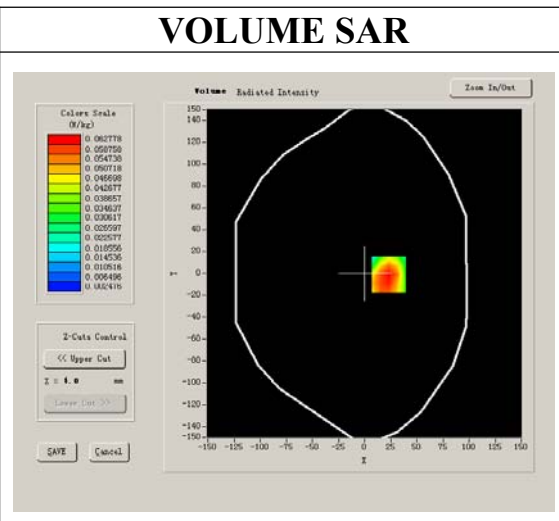


Maximum location: X=23.00, Y=-1.00

SAR 10g (W/Kg)	0.047776
SAR 1g (W/Kg)	0.072829


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.0757	0.0505	0.0373	0.0233	0.0170	0.0108


SAR, Z Axis Scan (X = 23, Y = -1)

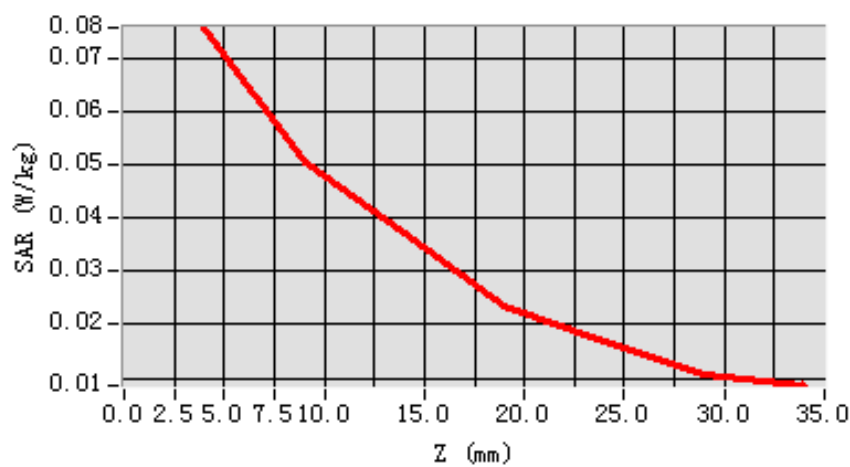

3D scene shot

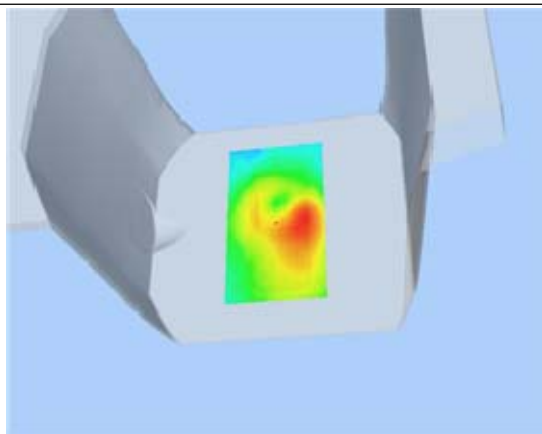

Hot spot position

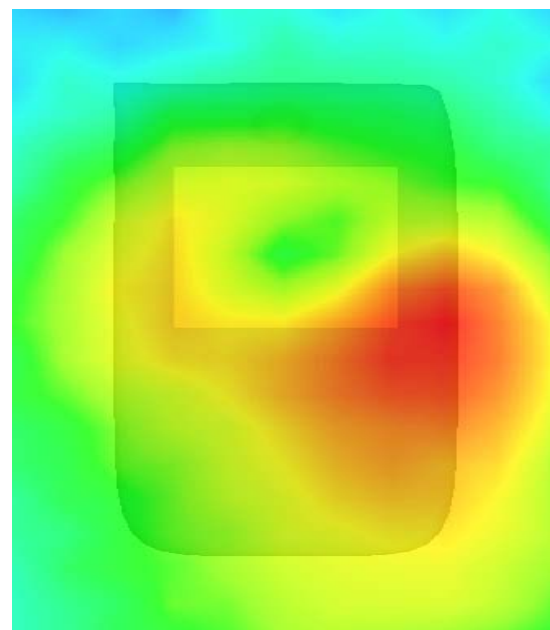

MEASUREMENT 31

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 15/5/2012

Measurement duration: 9 minutes 9 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	WCDMA
Channels	Low
Signal	CDMA

B. SAR Measurement Results


Lower Band SAR (Channel 4132):

Frequency (MHz)	826.400000
Relative permittivity (real part)	51.341000
Relative permittivity	15.877050
Conductivity (S/m)	0.728580
Power drift (%)	0.800000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.7°C
ConvF:	28.559,25.681,27.588
Crest factor:	1:1

SURFACE SAR

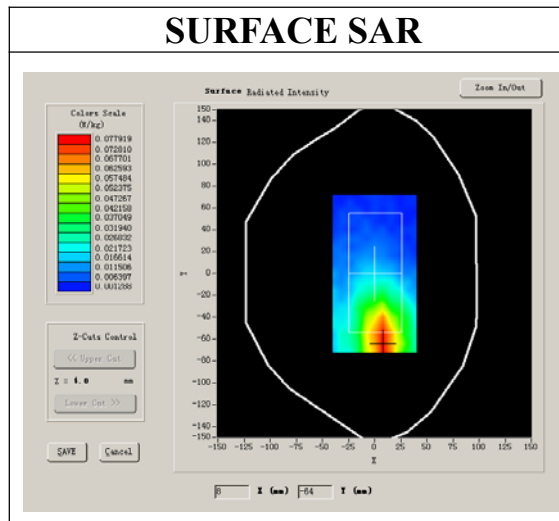

VOLUME SAR

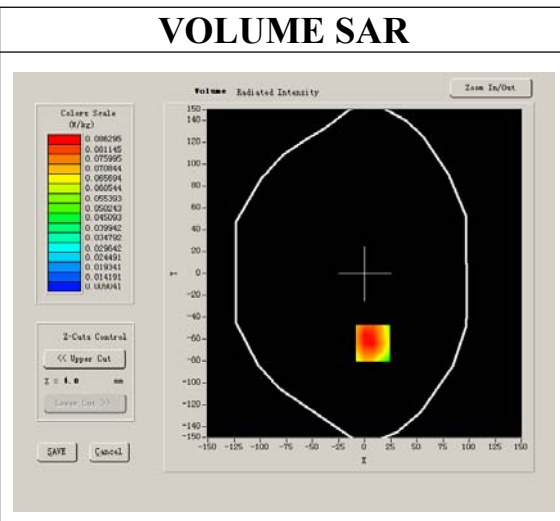


Maximum location: X=8.00, Y=-64.00

SAR 10g (W/Kg)	0.067895
SAR 1g (W/Kg)	0.101045


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.1040	0.0704	0.0507	0.0398	0.0279	0.0207


SAR, Z Axis Scan (X = 8, Y = -64)

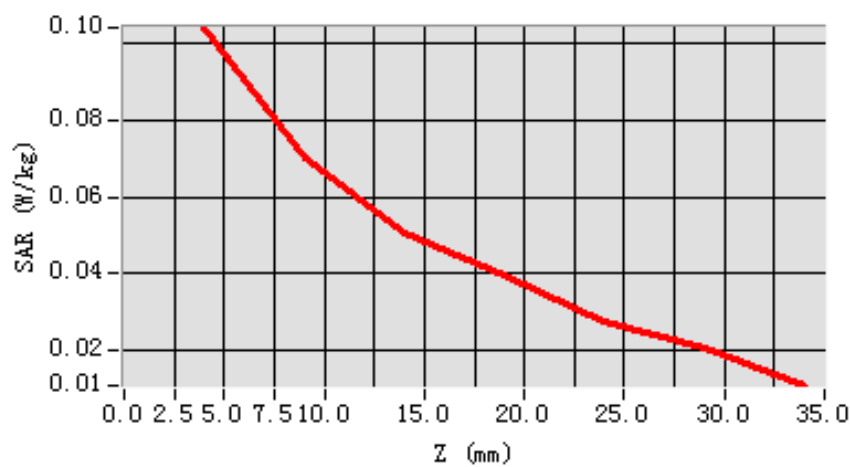

3D scene shot

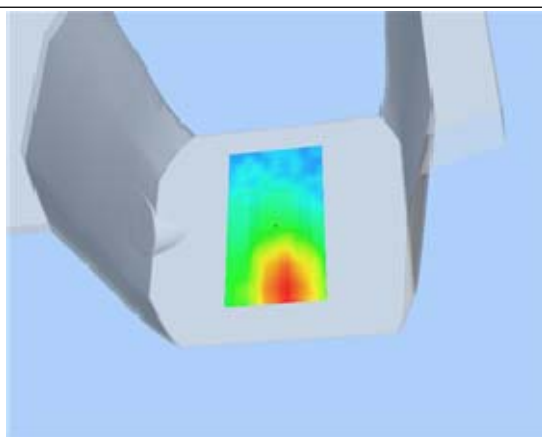

Hot spot position

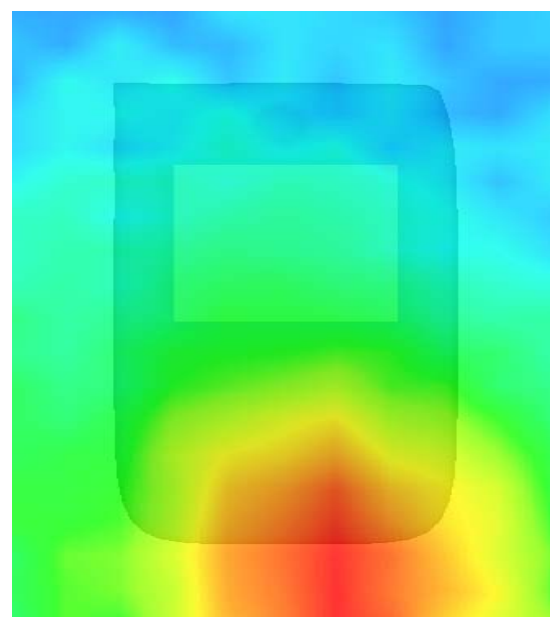

MEASUREMENT 32

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 15/5/2012

Measurement duration: 9 minutes 9 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	WCDMA
Channels	Low
Signal	CDMA

B. SAR Measurement Results


Lower Band SAR (Channel 4132):

Frequency (MHz)	826.400000
Relative permittivity (real part)	51.341000
Relative permittivity	15.877050
Conductivity (S/m)	0.728580
Power drift (%)	-4.700000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.7°C
ConvF:	28.559,25.681,27.588
Crest factor:	1:1

SURFACE SAR

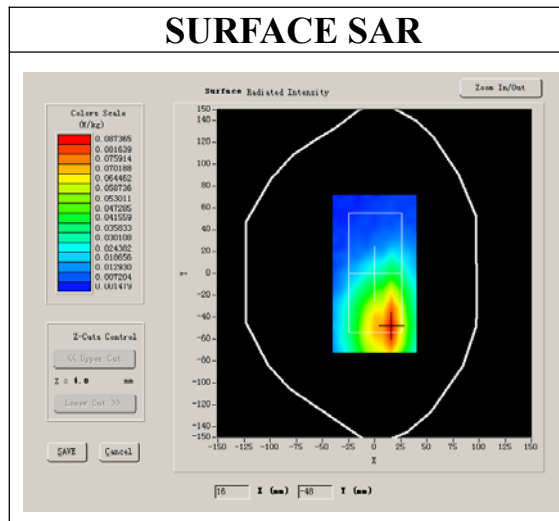

VOLUME SAR

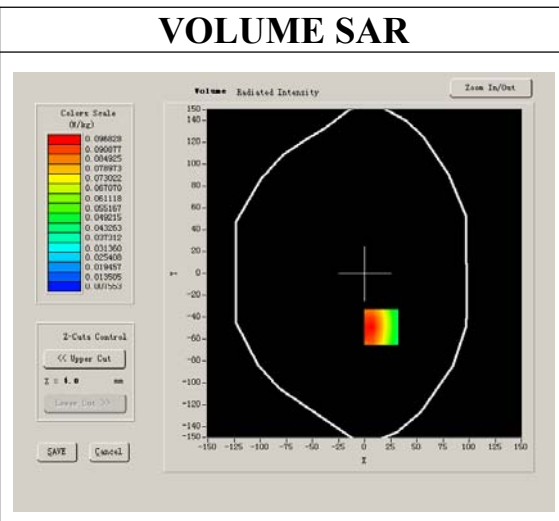


Maximum location: X=16.00, Y=-49.00

SAR 10g (W/Kg)	0.072194
SAR 1g (W/Kg)	0.107767


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.0988	0.0678	0.0473	0.0335	0.0249	0.0213


SAR, Z Axis Scan (X = 16, Y = -49)

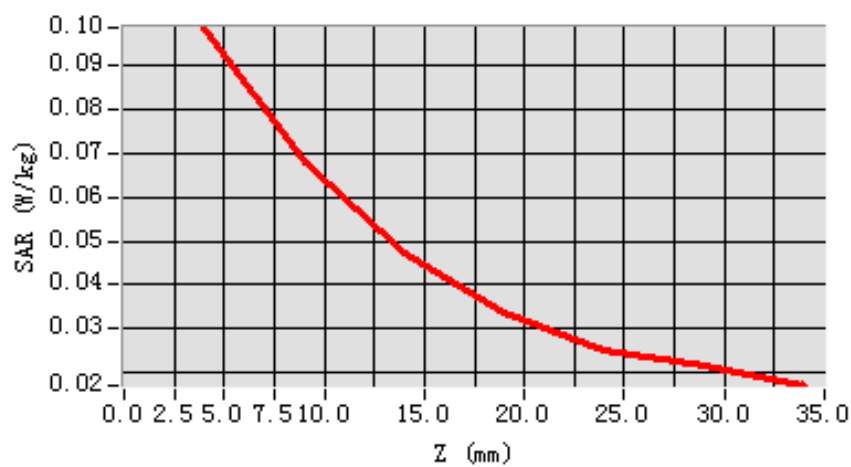

3D scene shot

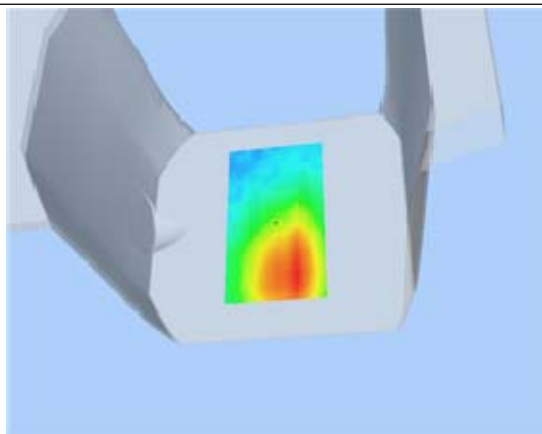

Hot spot position

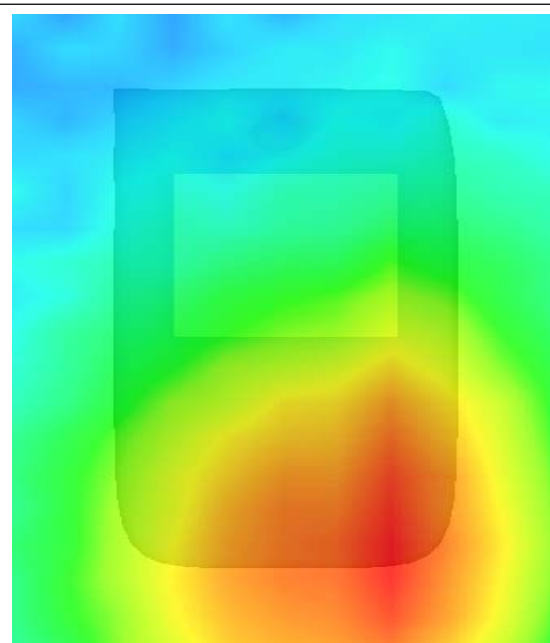

MEASUREMENT 33

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 15/5/2012

Measurement duration: 9 minutes 9 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	WCDMA
Channels	Low
Signal	CDMA

B. SAR Measurement Results


Lower Band SAR (Channel 4132):

Frequency (MHz)	826.400000
Relative permittivity (real part)	51.341000
Relative permittivity	15.877050
Conductivity (S/m)	0.728580
Power drift (%)	-3.100000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.7°C
ConvF:	28.559,25.681,27.588
Crest factor:	1:1

SURFACE SAR

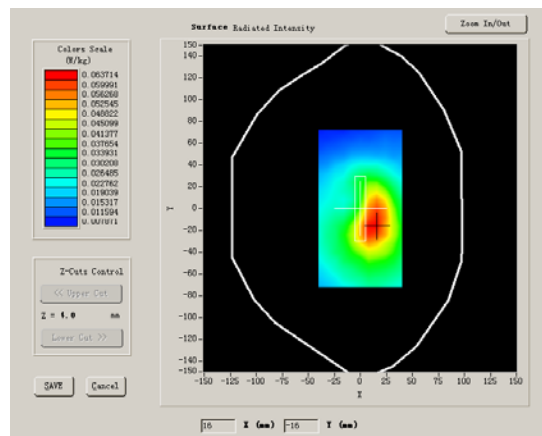

VOLUME SAR

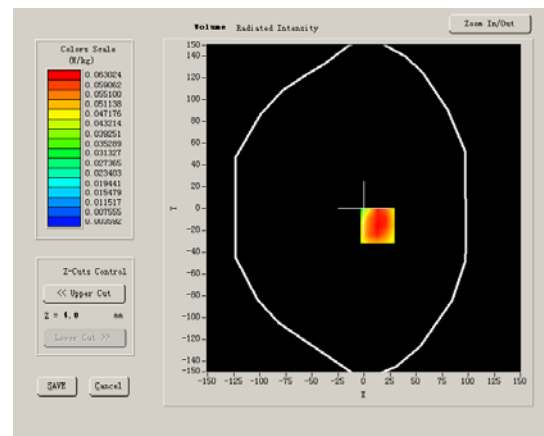


Maximum location: X=13.00, Y=-16.00

SAR 10g (W/Kg)	0.043443
SAR 1g (W/Kg)	0.068570


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.0709	0.0444	0.0281	0.0191	0.0126	0.0084


SAR, Z Axis Scan (X = 13, Y = -16)

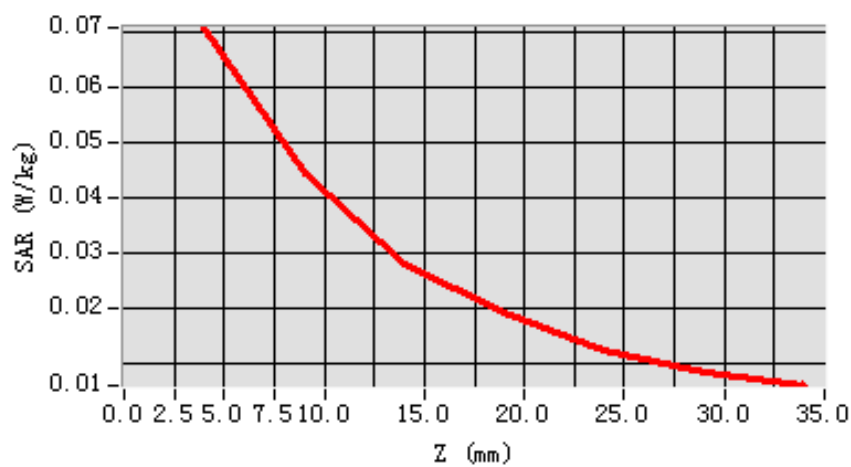

3D scene shot

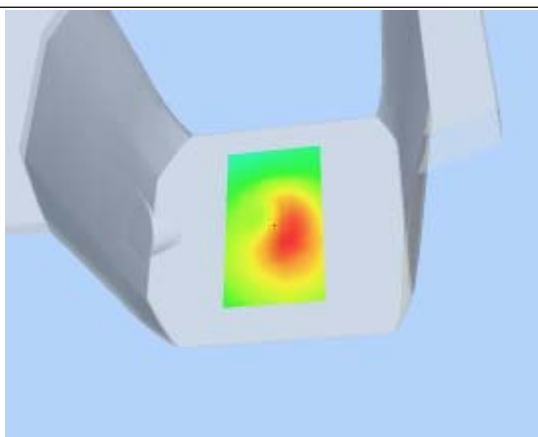

Hot spot position

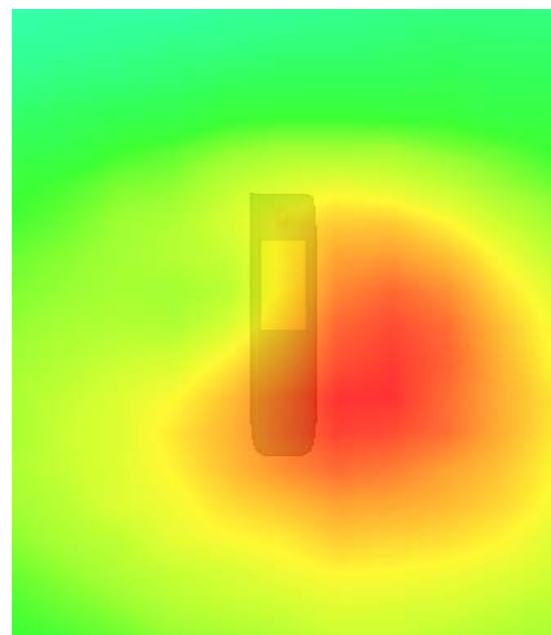

MEASUREMENT 34

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 15/5/2012

Measurement duration: 8 minutes 4 seconds

A. Experimental conditions.


Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	WCDMA
Channels	Low
Signal	CDMA

B. SAR Measurement Results


Lower Band SAR (Channel 9262):

Frequency (MHz)	1852.400000
Relative permittivity (real part)	39.980000
Relative permittivity	13.170000
Conductivity (S/m)	1.355047
Power drift (%)	0.980000
Ambient Temperature:	22.6°C
Liquid Temperature:	22.7°C
ConvF:	40.136,34.843,38.721
Crest factor:	1:1

SURFACE SAR

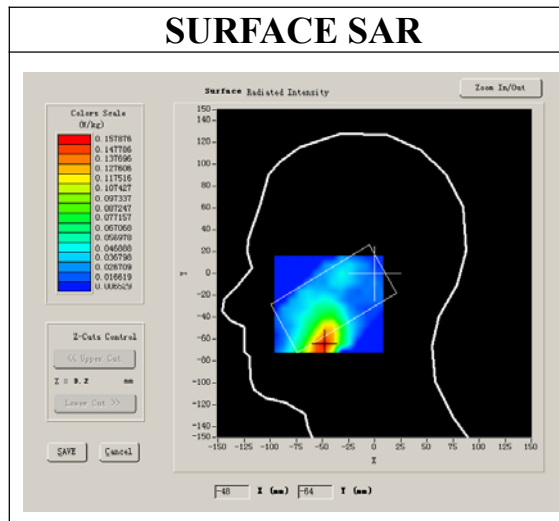

VOLUME SAR

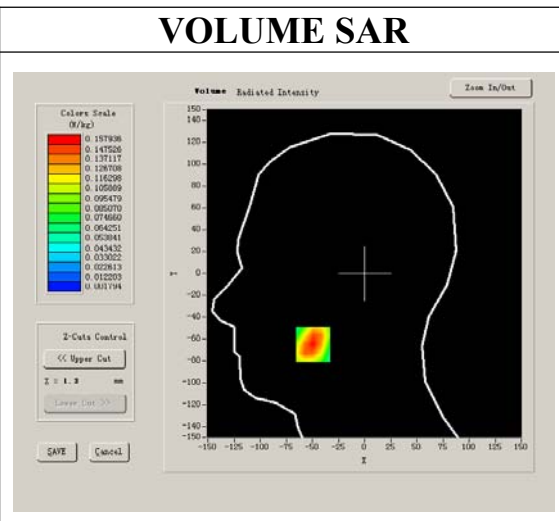


Maximum location: X=-49.00, Y=-65.00

SAR 10g (W/Kg)	0.078035
SAR 1g (W/Kg)	0.152943


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.1579	0.0713	0.0321	0.0223	0.0107	0.0046


SAR, Z Axis Scan (X = -49, Y = -65)

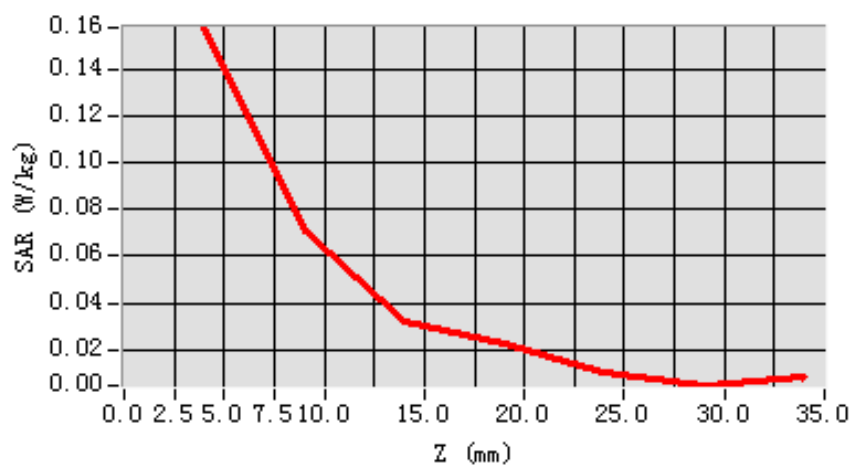

3D sceen shot

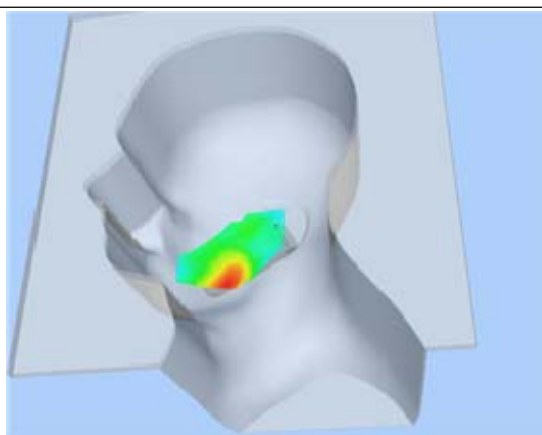

Hot spot position

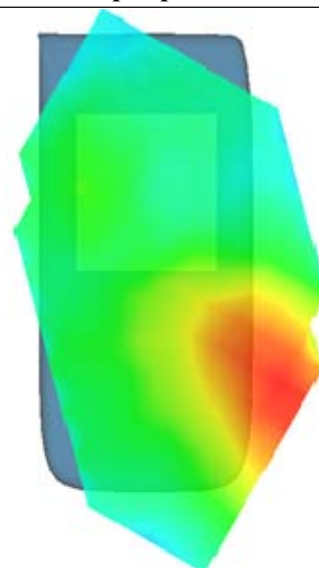

MEASUREMENT 35

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 15/5/2012

Measurement duration: 7 minutes 29 seconds


A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Tilt
Band	WCDMA
Channels	Low
Signal	CDMA

B. SAR Measurement Results

Lower Band SAR (Channel 9262):

Frequency (MHz)	1852.400000
Relative permittivity (real part)	39.980000
Relative permittivity	13.170000
Conductivity (S/m)	1.355047
Power drift (%)	1.220000
Ambient Temperature:	22.6°C
Liquid Temperature:	22.7°C
ConvF:	40.136,34.843,38.721
Crest factor:	1:1

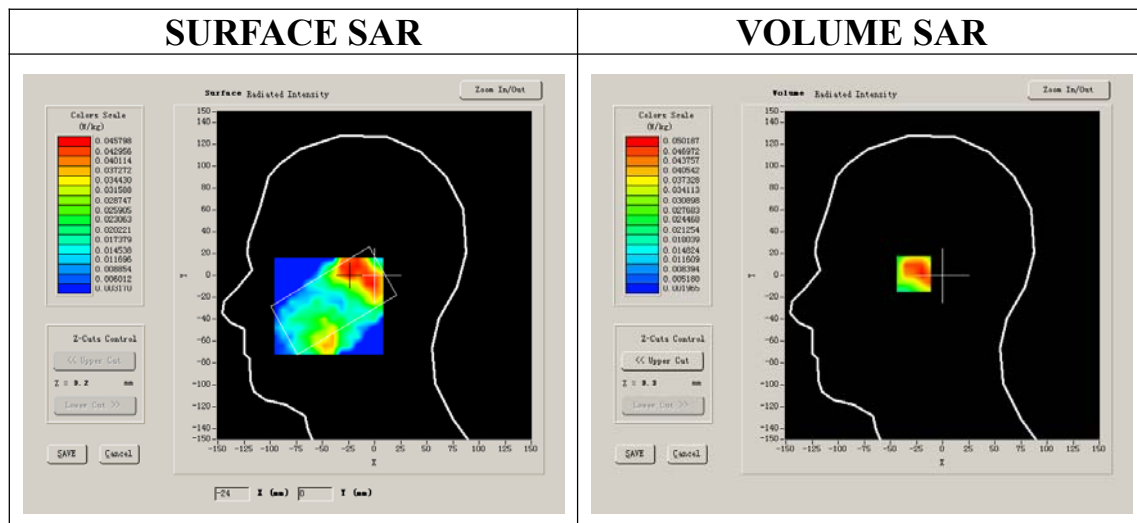


Maximum location: X=-24.00, Y=2.00

SAR 10g (W/Kg)	0.026024
SAR 1g (W/Kg)	0.047913


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.0441	0.0287	0.0109	0.0042	0.0085	0.0063


SAR, Z Axis Scan (X = -24, Y = 2)

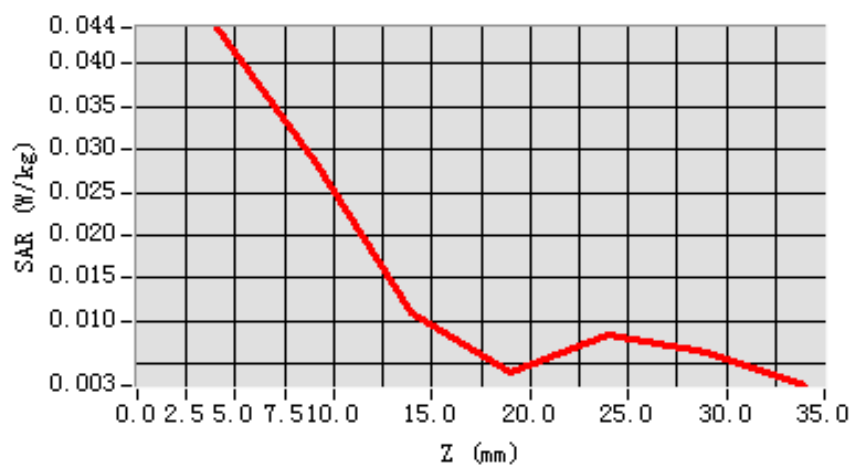

3D sceen shot

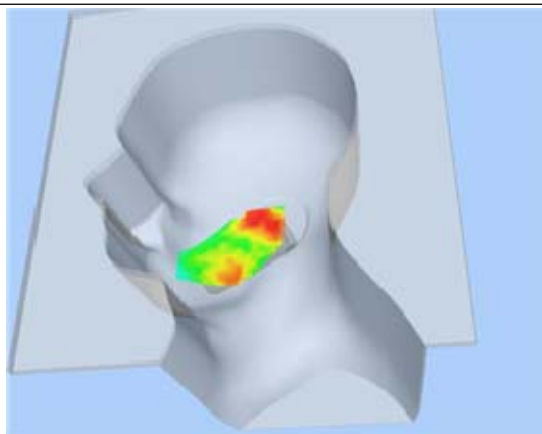

Hot spot position

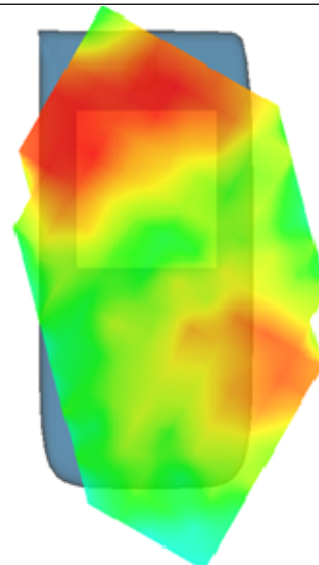

MEASUREMENT 36

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 15/5/2012

Measurement duration: 8 minutes 34 seconds


A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Cheek
Band	WCDMA
Channels	Low
Signal	CDMA

B. SAR Measurement Results

Lower Band SAR (Channel 9262):

Frequency (MHz)	1852.400000
Relative permittivity (real part)	39.980000
Relative permittivity	13.170000
Conductivity (S/m)	1.355047
Power drift (%)	1.170000
Ambient Temperature:	22.6°C
Liquid Temperature:	22.7°C
ConvF:	40.136,34.843,38.721
Crest factor:	1:1

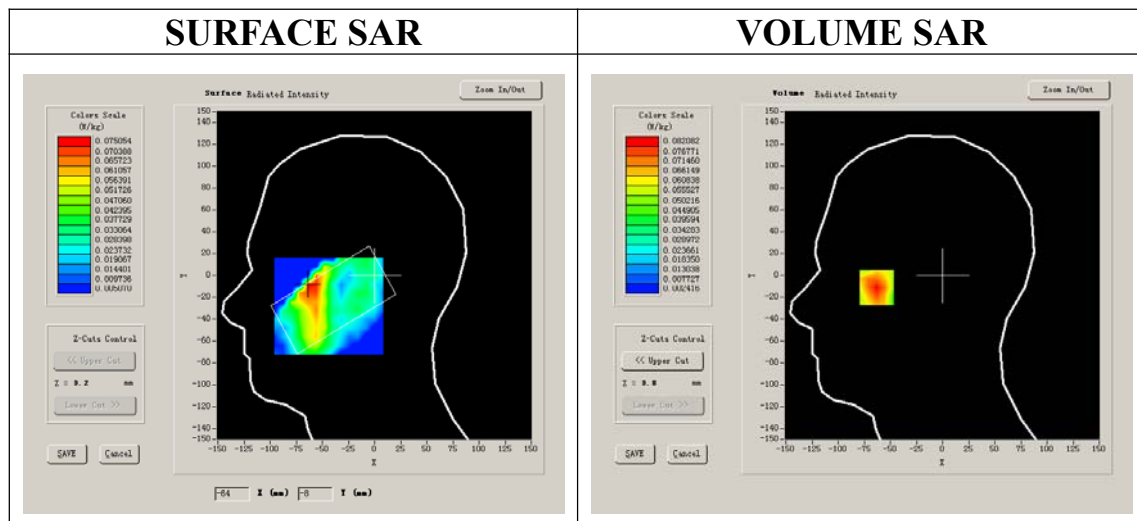


Maximum location: X=-63.00, Y=-8.00

SAR 10g (W/Kg)	0.041473
SAR 1g (W/Kg)	0.079662


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.0821	0.0361	0.0207	0.0148	0.0065	0.0072


SAR, Z Axis Scan (X = -63, Y = -8)

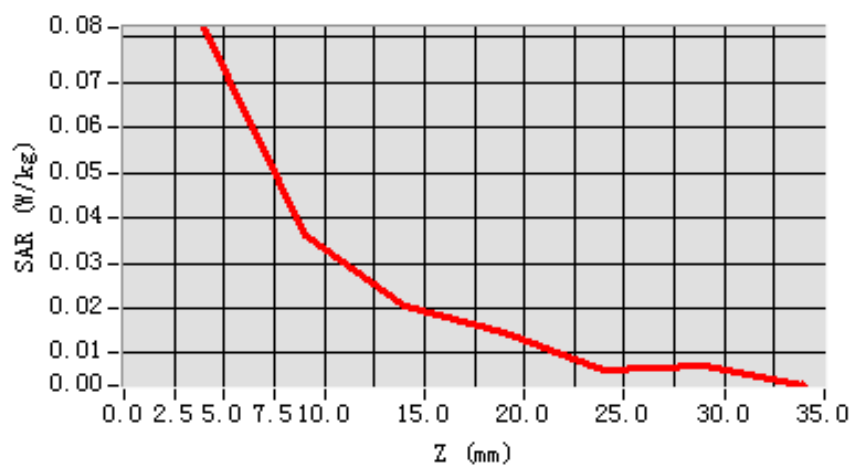

3D scene shot

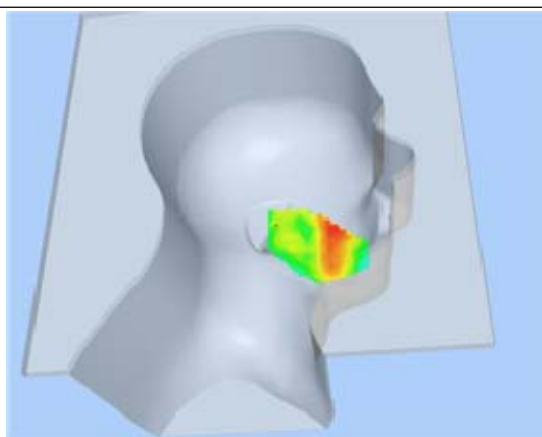

Hot spot position

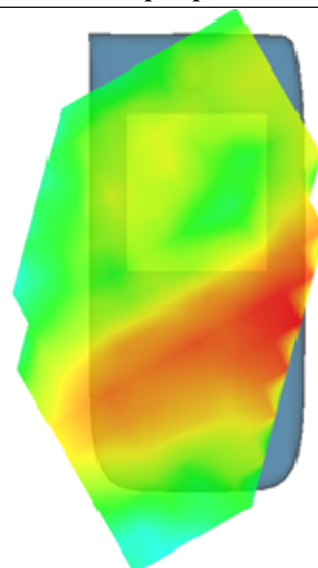

MEASUREMENT 37

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 15/5/2012

Measurement duration: 7 minutes 24 seconds

A. Experimental conditions.


Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Tilt
Band	WCDMA
Channels	Low
Signal	CDMA

B. SAR Measurement Results


Lower Band SAR (Channel 9262):

Frequency (MHz)	1852.400000
Relative permittivity (real part)	39.980000
Relative permittivity	13.170000
Conductivity (S/m)	1.355047
Power drift (%)	-2.200000
Ambient Temperature:	22.6°C
Liquid Temperature:	22.7°C
ConvF:	40.136,34.843,38.721
Crest factor:	1:1

SURFACE SAR

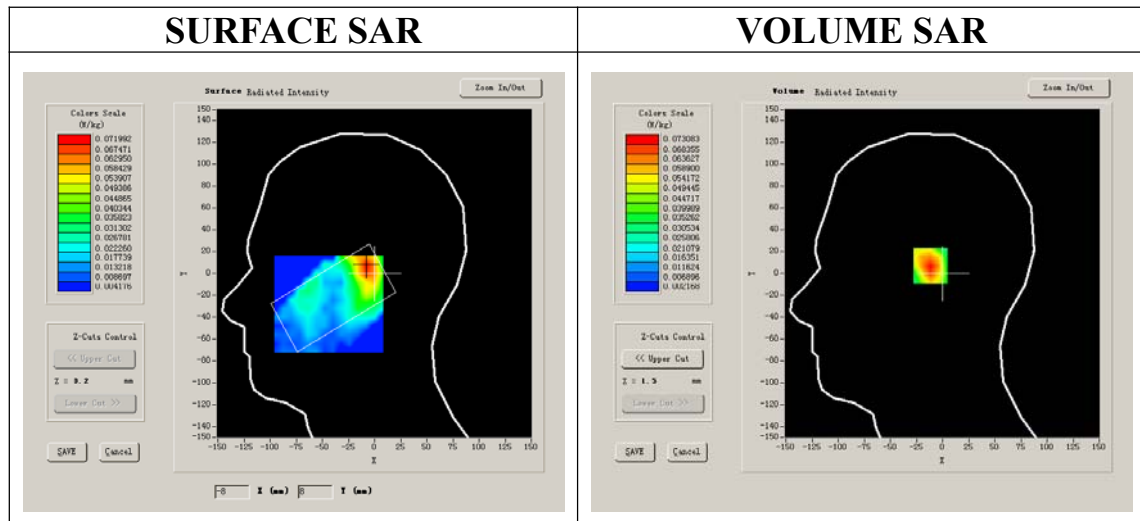

VOLUME SAR

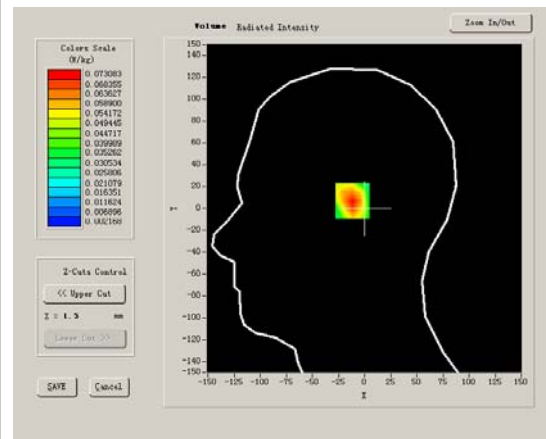


Maximum location: X=-7.00, Y=7.00

SAR 10g (W/Kg)	0.035230
SAR 1g (W/Kg)	0.068873


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.0731	0.0382	0.0200	0.0060	0.0036	0.0027


SAR, Z Axis Scan (X = -7, Y = 7)

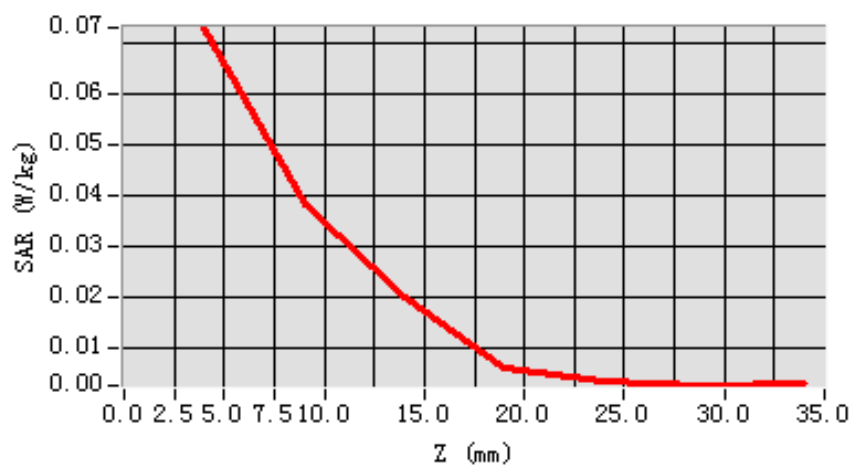

3D scene shot

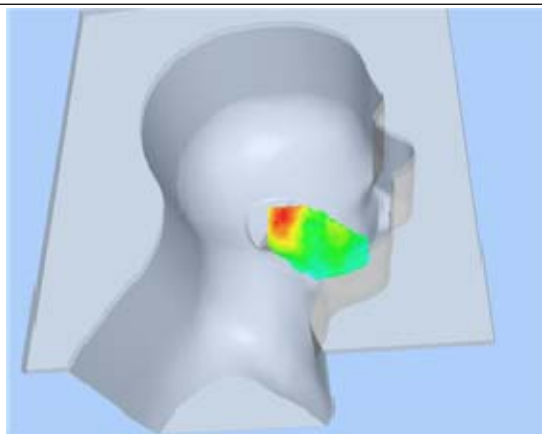

Hot spot position

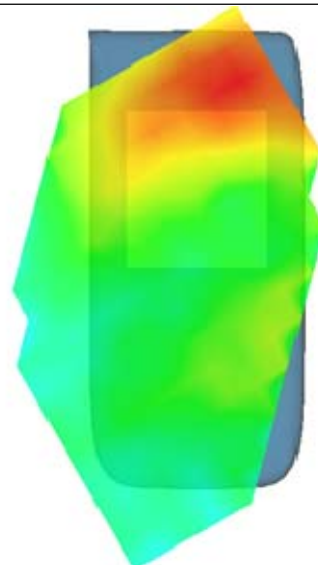

MEASUREMENT 38

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 15/5/2012

Measurement duration: 9 minutes 8 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	WCDMA
Channels	Low
Signal	CDMA

B. SAR Measurement Results


Lower Band SAR (Channel 9262):

Frequency (MHz)	1852.400000
Relative permittivity (real part)	51.341000
Relative permittivity	15.877050
Conductivity (S/m)	1.633572
Power drift (%)	-0.860000
Ambient Temperature:	22.6°C
Liquid Temperature:	22.7°C
ConvF:	40.625,34.773,38.535
Crest factor:	1:1

SURFACE SAR

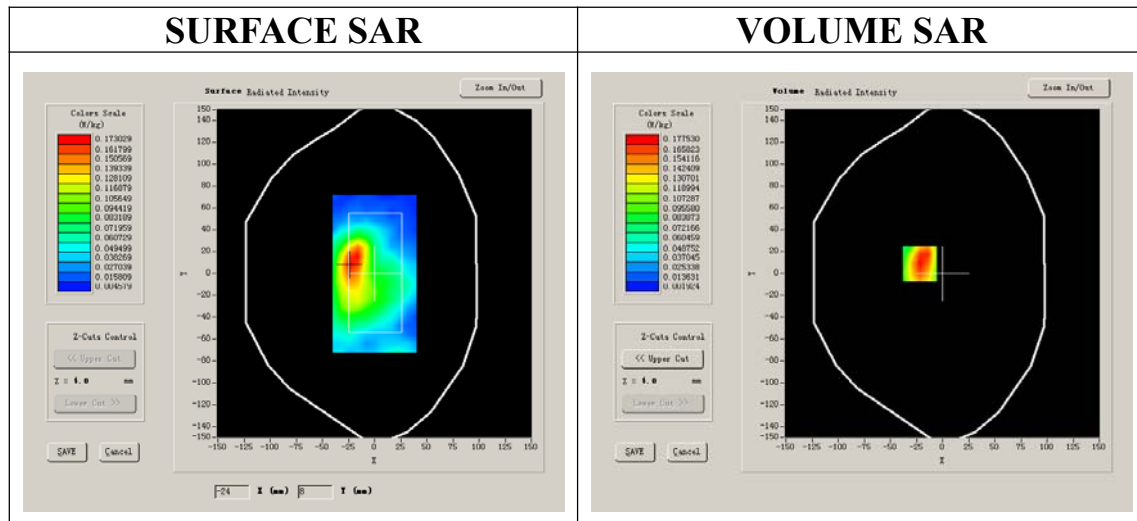

VOLUME SAR

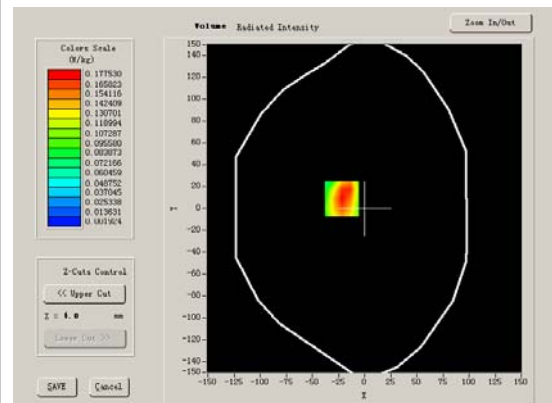


Maximum location: X=-22.00, Y=9.00

SAR 10g (W/Kg)	0.101866
SAR 1g (W/Kg)	0.204987


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.2140	0.0981	0.0469	0.0153	0.0140	0.0087


SAR, Z Axis Scan (X = -22, Y = 9)

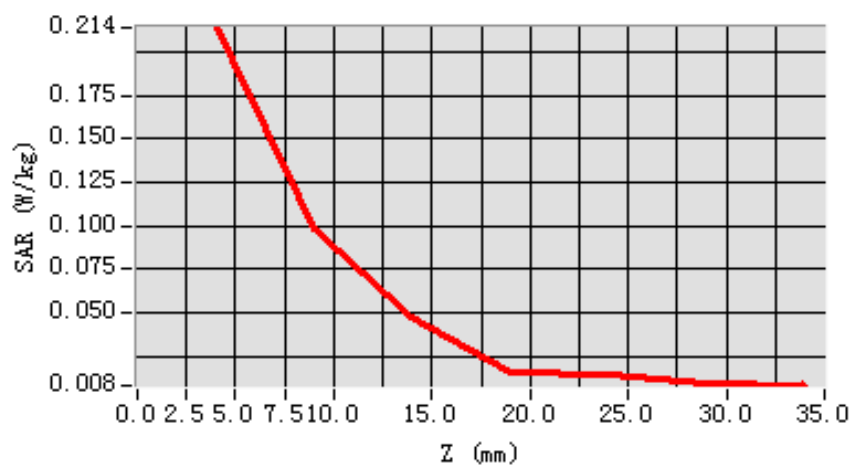

3D scene shot

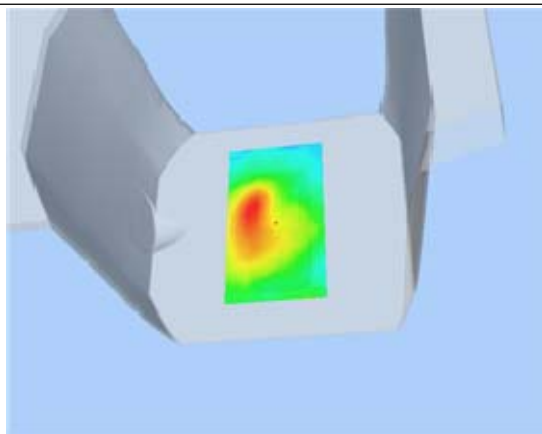

Hot spot position

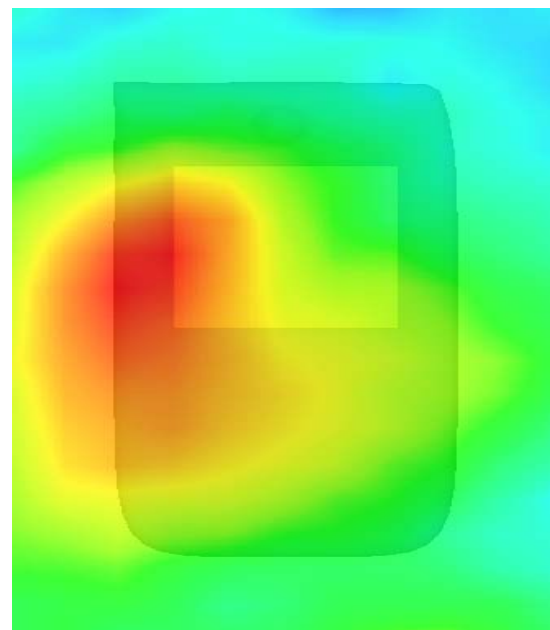

MEASUREMENT 39

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 15/5/2012

Measurement duration: 9 minutes 8 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	WCDMA
Channels	Low
Signal	CDMA

B. SAR Measurement Results

Lower Band SAR (Channel 9262):

Frequency (MHz)	1852.400000
Relative permittivity (real part)	51.341000
Relative permittivity	15.877050
Conductivity (S/m)	1.633572
Power drift (%)	-0.330000
Ambient Temperature:	22.6°C
Liquid Temperature:	22.7°C
ConvF:	40.625,34.773,38.535
Crest factor:	1:1

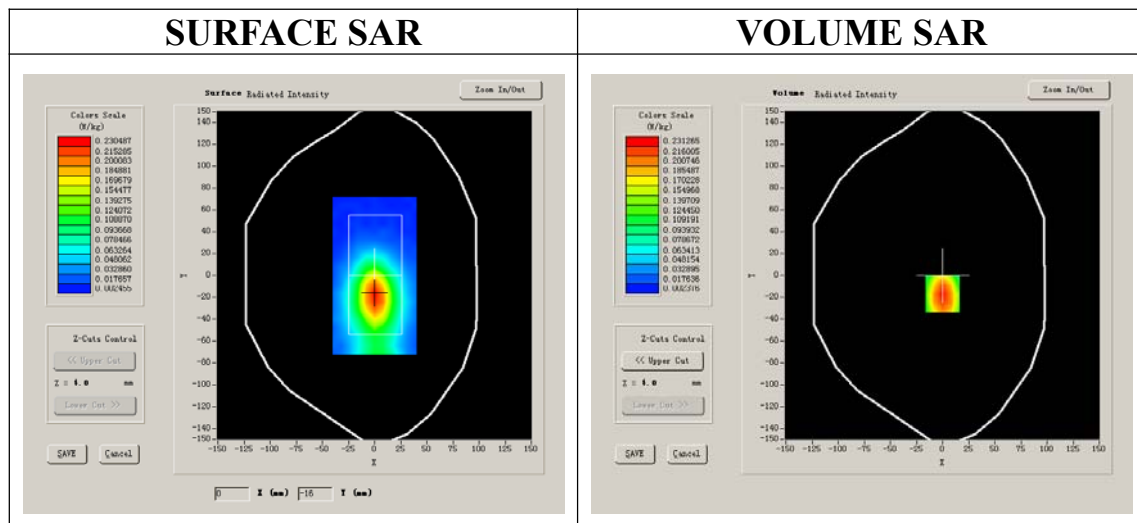


Maximum location: X=0.00, Y=-17.00

SAR 10g (W/Kg)	0.137248
SAR 1g (W/Kg)	0.265885


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.2788	0.1294	0.0621	0.0309	0.0138	0.0073


SAR, Z Axis Scan (X = 0, Y = -17)

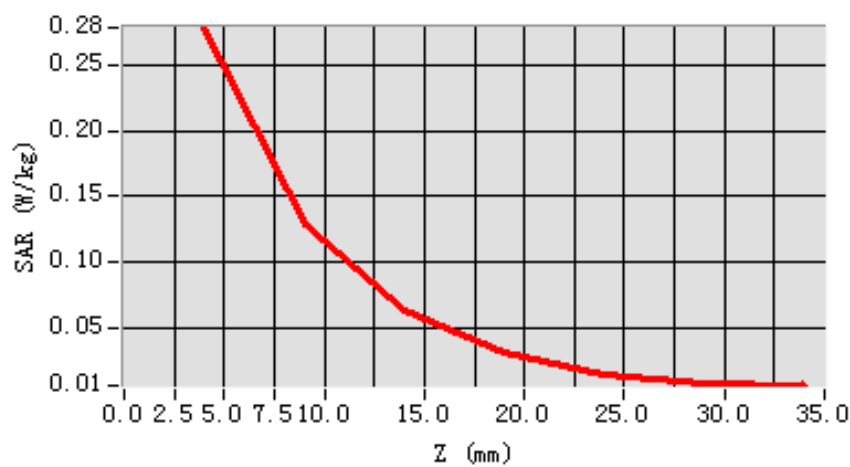

3D scene shot

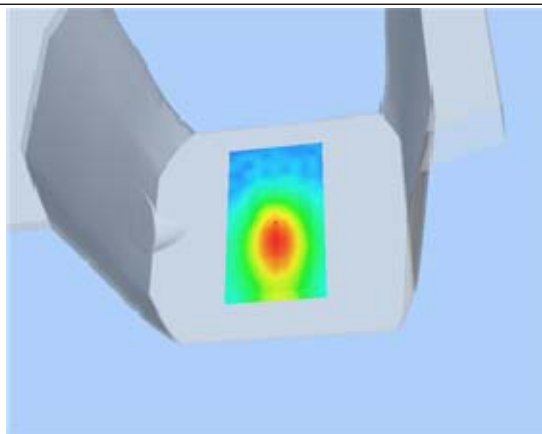

Hot spot position

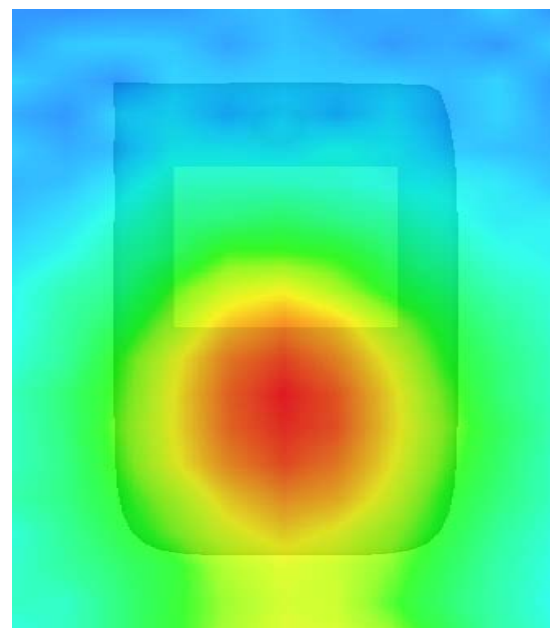

MEASUREMENT 40

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 15/5/2012

Measurement duration: 9 minutes 8 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	WCDMA
Channels	Low
Signal	CDMA

B. SAR Measurement Results


Lower Band SAR (Channel 9262):

Frequency (MHz)	1852.400000
Relative permittivity (real part)	51.341000
Relative permittivity	15.877050
Conductivity (S/m)	1.633572
Power drift (%)	0.620000
Ambient Temperature:	22.6°C
Liquid Temperature:	22.7°C
ConvF:	40.625,34.773,38.535
Crest factor:	1:1

SURFACE SAR

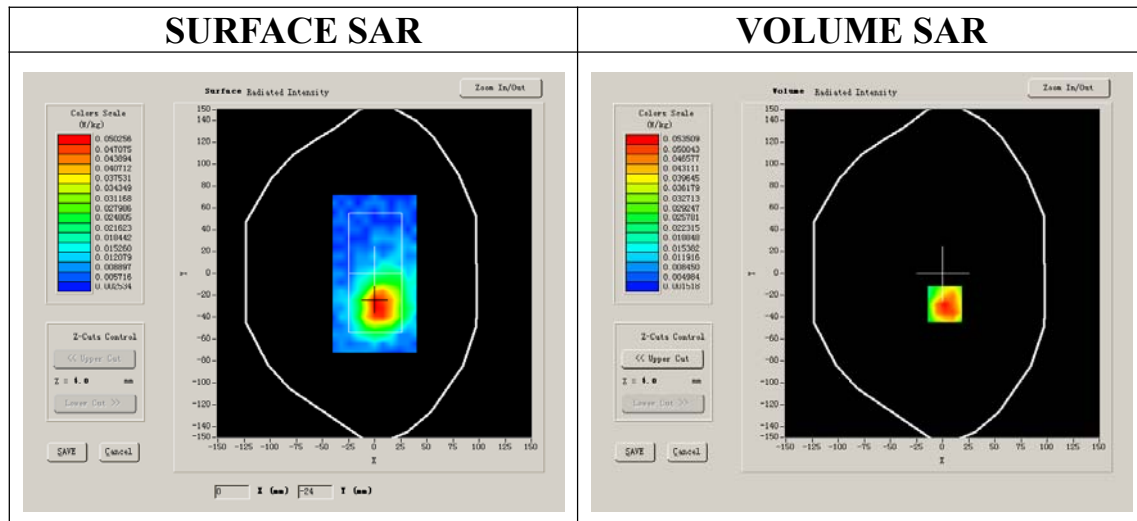

VOLUME SAR

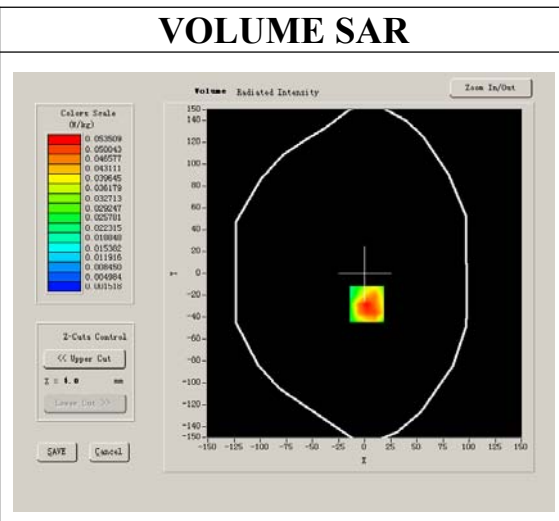


Maximum location: X=2.00, Y=-28.00

SAR 10g (W/Kg)	0.032008
SAR 1g (W/Kg)	0.063621


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.0645	0.0282	0.0179	0.0075	0.0074	0.0033


SAR, Z Axis Scan (X = 2, Y = -28)

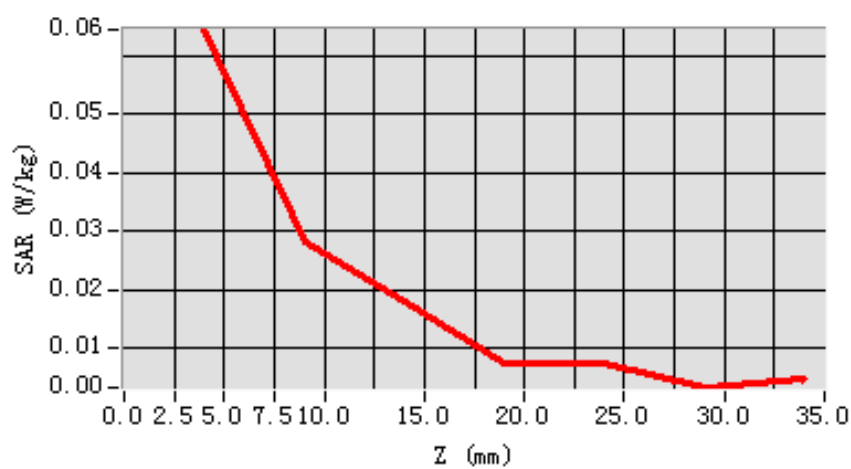

3D scene shot

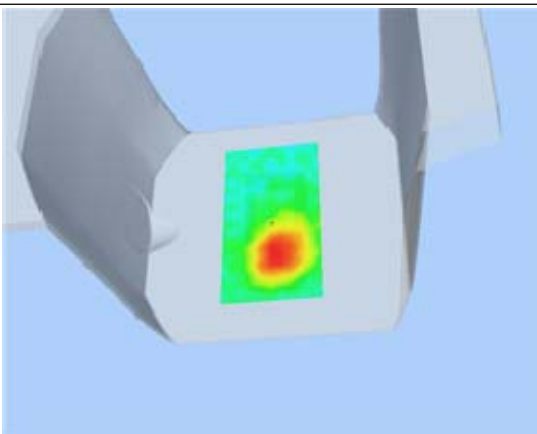

Hot spot position

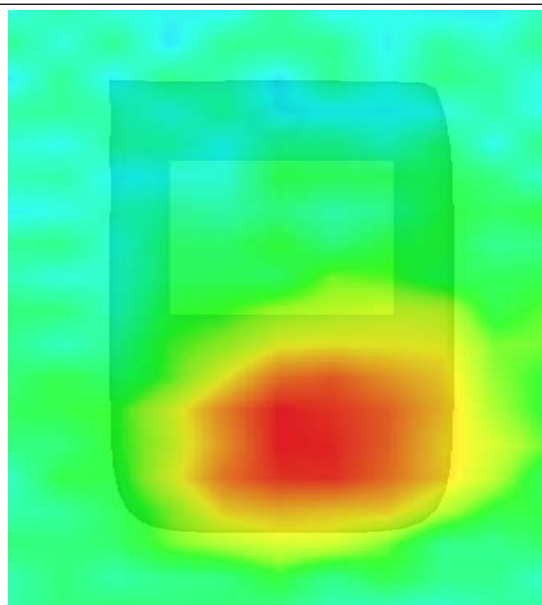

MEASUREMENT 41

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 15/5/2012

Measurement duration: 9 minutes 9 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	WCDMA
Channels	Low
Signal	CDMA

B. SAR Measurement Results


Lower Band SAR (Channel 9262):

Frequency (MHz)	1852.400000
Relative permittivity (real part)	51.341000
Relative permittivity	15.877050
Conductivity (S/m)	1.633572
Power drift (%)	-0.240000
Ambient Temperature:	22.6°C
Liquid Temperature:	22.7°C
ConvF:	40.625,34.773,38.535
Crest factor:	1:1

SURFACE SAR

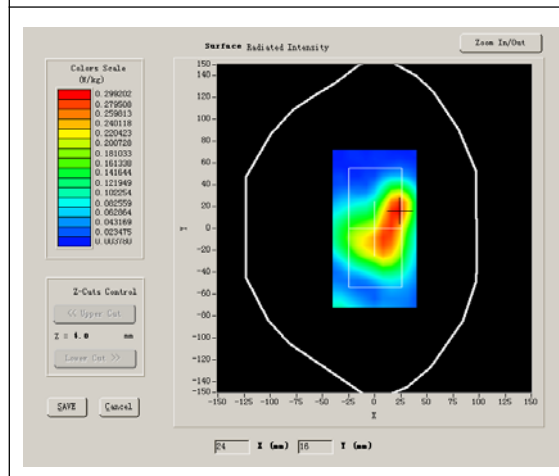

VOLUME SAR

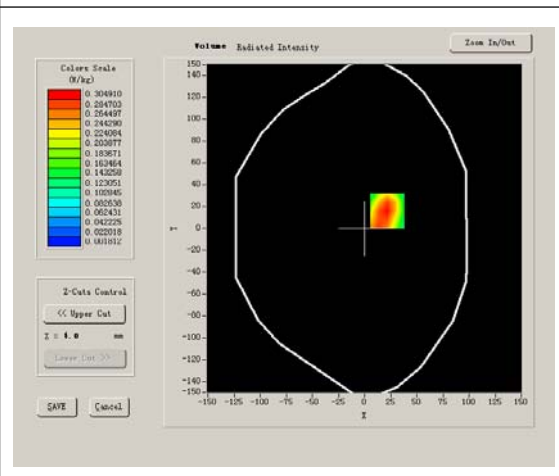


Maximum location: X=22.00, Y=16.00

SAR 10g (W/Kg)	0.178786
SAR 1g (W/Kg)	0.355772


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.3676	0.1571	0.0721	0.0359	0.0172	0.0079


SAR, Z Axis Scan (X = 22, Y = 16)

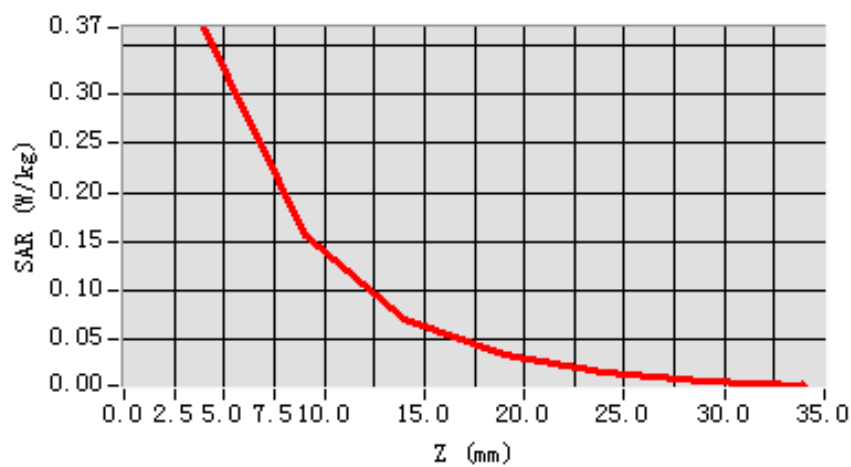

3D scene shot

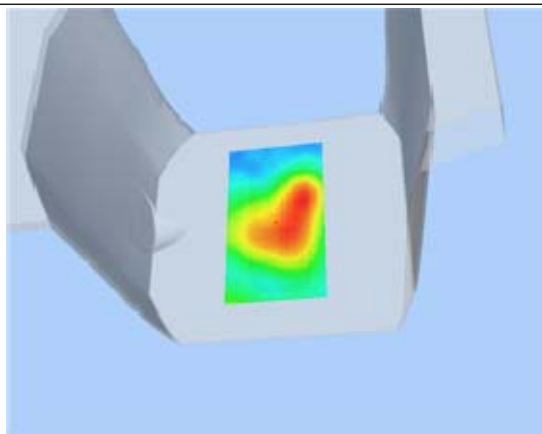

Hot spot position

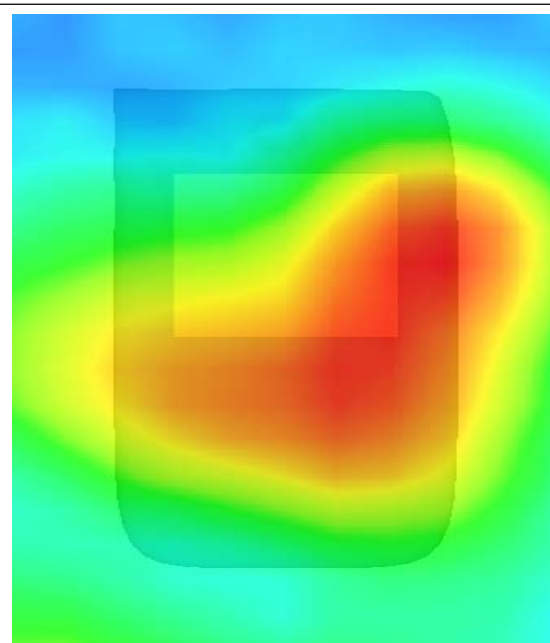

MEASUREMENT 42

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 15/5/2012

Measurement duration: 9 minutes 9 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	WCDMA
Channels	Low
Signal	CDMA

B. SAR Measurement Results


Lower Band SAR (Channel 9262):

Frequency (MHz)	1852.400000
Relative permittivity (real part)	51.341000
Relative permittivity	15.877050
Conductivity (S/m)	1.633572
Power drift (%)	-0.240000
Ambient Temperature:	22.6°C
Liquid Temperature:	22.7°C
ConvF:	40.625,34.773,38.535
Crest factor:	1:1

SURFACE SAR

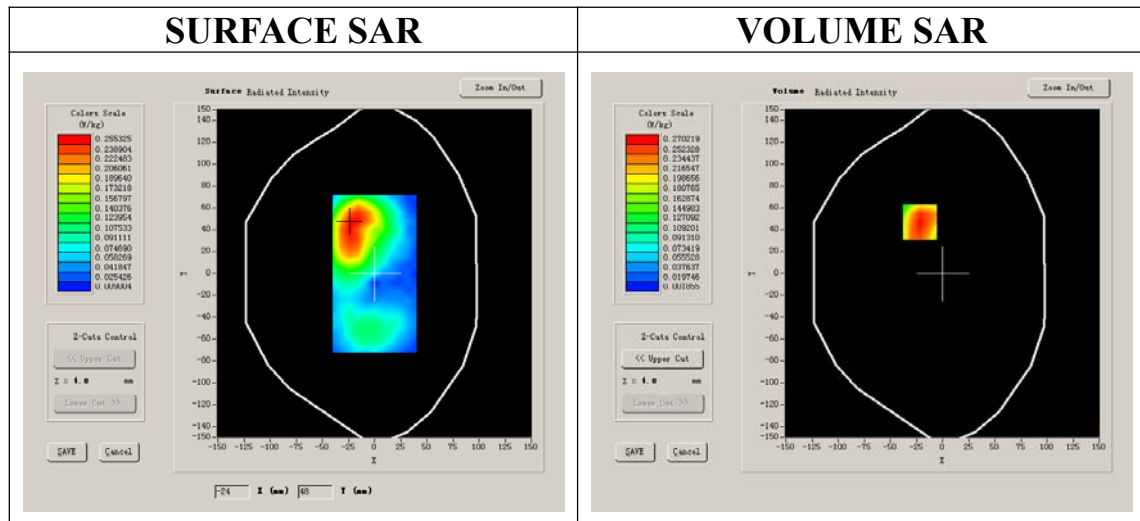

VOLUME SAR

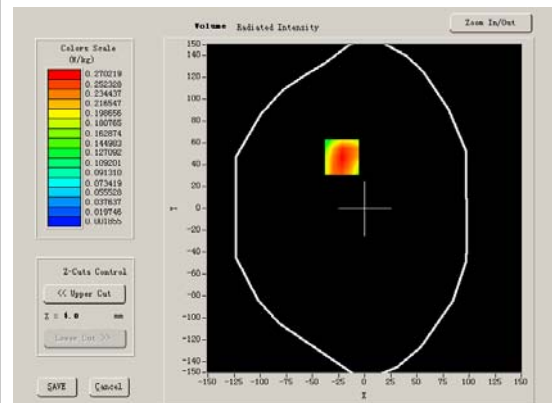


Maximum location: X=-22.00, Y=47.00

SAR 10g (W/Kg)	0.137752
SAR 1g (W/Kg)	0.267531


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.2765	0.1203	0.0526	0.0253	0.0164	0.0143


SAR, Z Axis Scan (X = -22, Y = 47)

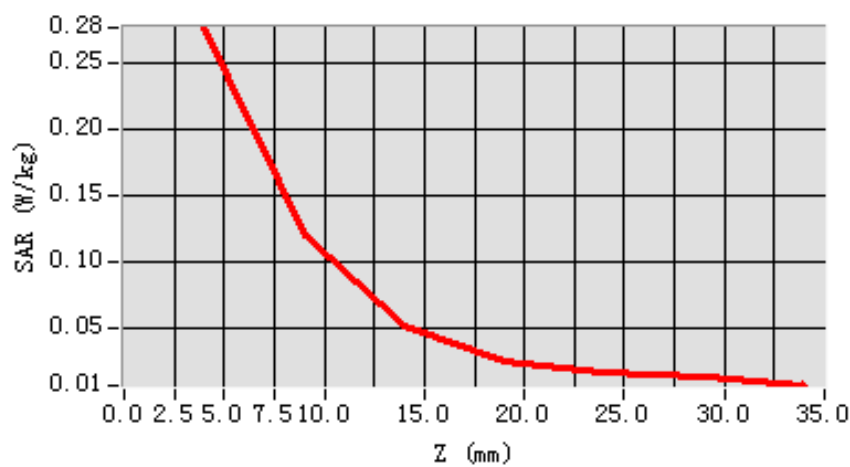

3D scene shot

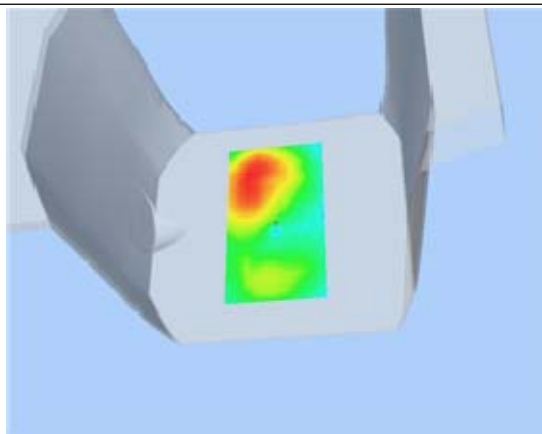

Hot spot position

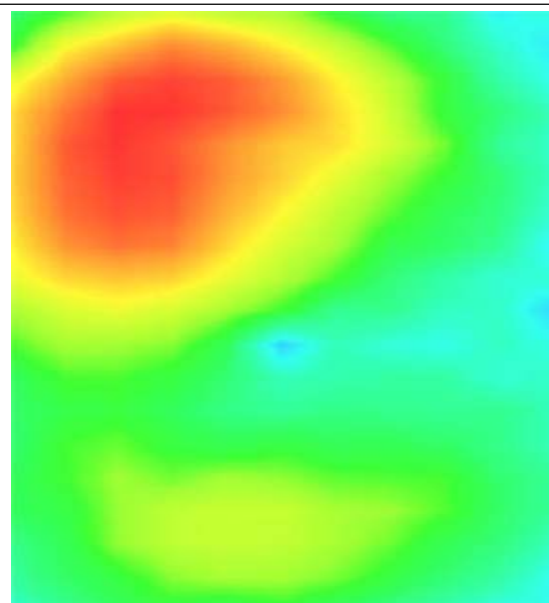

MEASUREMENT 43

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 15/5/2012

Measurement duration: 8 minutes 17 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Right head
Device Position	Cheek
Band	802.11B
Channels	Middle
Signal	DSSS

B. SAR Measurement Results


Middle Band SAR (Channel 6)

Frequency (MHz)	2437.000000
Relative permittivity (real part)	39.622857
Relative permittivity	15.490000
Conductivity (S/m)	1.964313
Power drift (%)	-0.430000
Ambient Temperature:	22.3°C
Liquid Temperature:	21.5°C
ConvF:	39.563,33.614,37.677
Crest factor:	1:1

SURFACE SAR

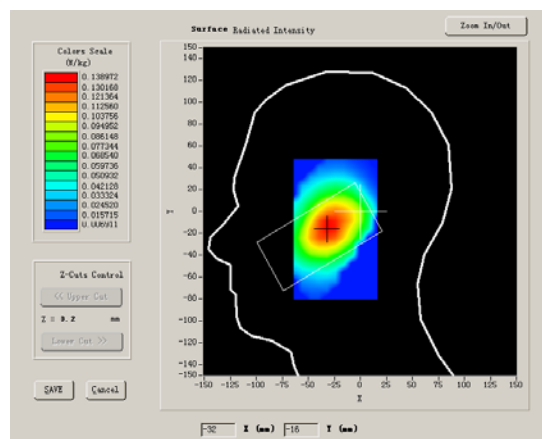

VOLUME SAR

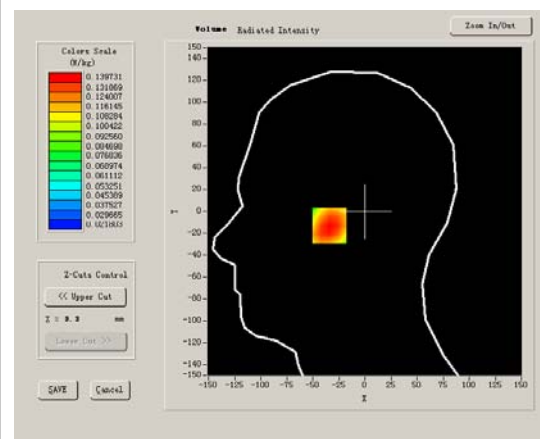


Maximum location: X=-30.00, Y=-13.00

SAR 10g (W/Kg)	0.110815
SAR 1g (W/Kg)	0.137899


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.1397	0.1223	0.1027	0.0886	0.0712	0.0508


SAR, Z Axis Scan (X = -30, Y = -13)

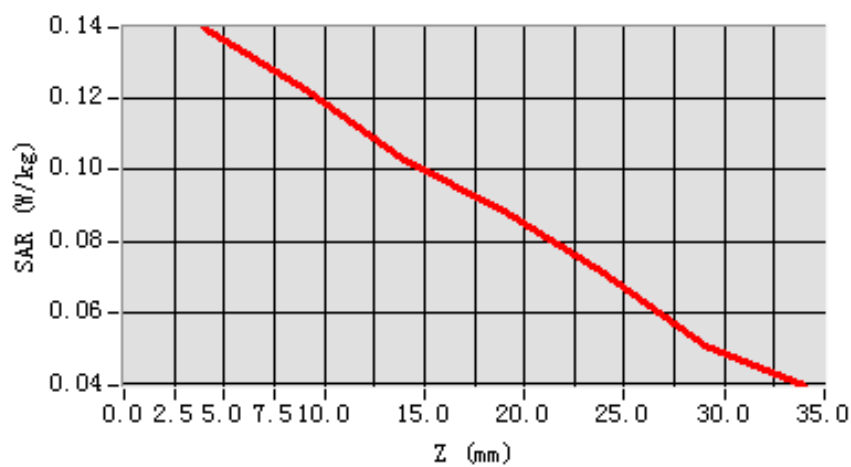

3D scene shot

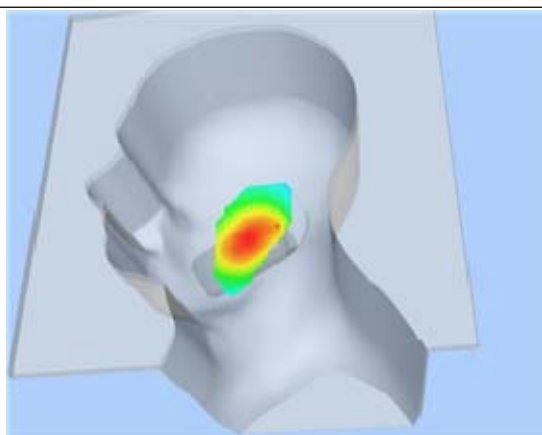

Hot spot position

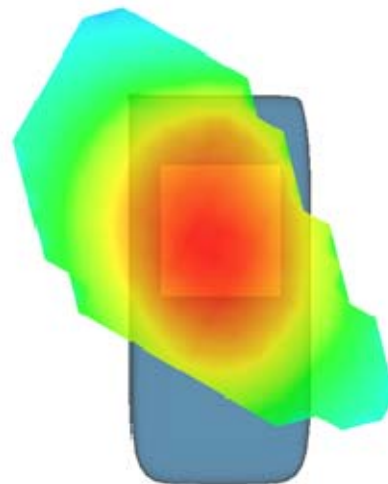

MEASUREMENT 44

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 15/5/2012

Measurement duration: 8 minutes 15 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Right head
Device Position	Tilt
Band	802.11B
Channels	Middle
Signal	DSSS

B. SAR Measurement Results


Middle Band SAR (Channel 6)

Frequency (MHz)	2437.000000
Relative permittivity (real part)	39.622857
Relative permittivity	15.490000
Conductivity (S/m)	1.964313
Power drift (%)	-0.630000
Ambient Temperature:	22.3°C
Liquid Temperature:	21.5°C
ConvF:	39.563,33.614,37.677
Crest factor:	1:1

SURFACE SAR

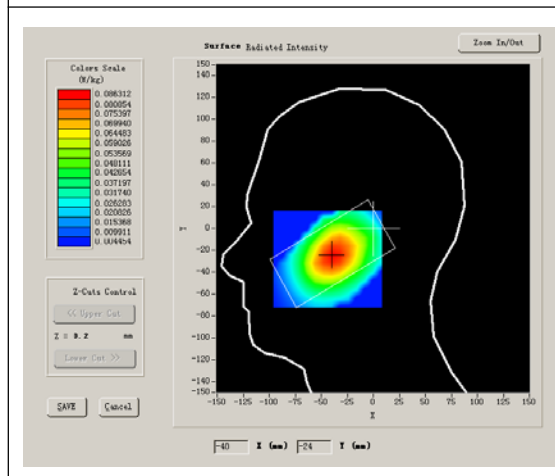

VOLUME SAR

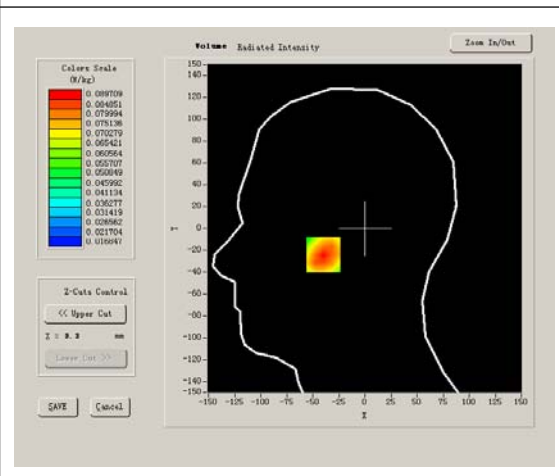


Maximum location: X=-39.00, Y=-24.00

SAR 10g (W/Kg)	0.065979
SAR 1g (W/Kg)	0.085315


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.0897	0.0755	0.0615	0.0486	0.0367	0.0273


SAR, Z Axis Scan (X = -39, Y = -24)

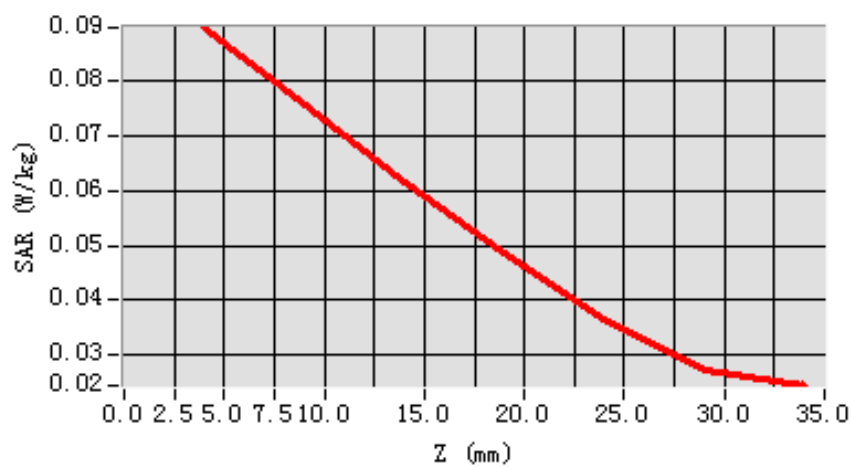

3D scene shot

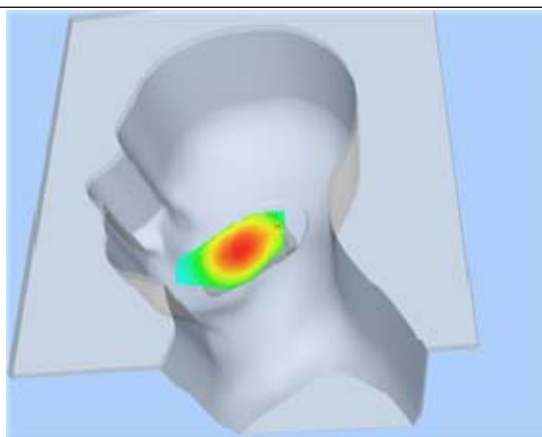

Hot spot position

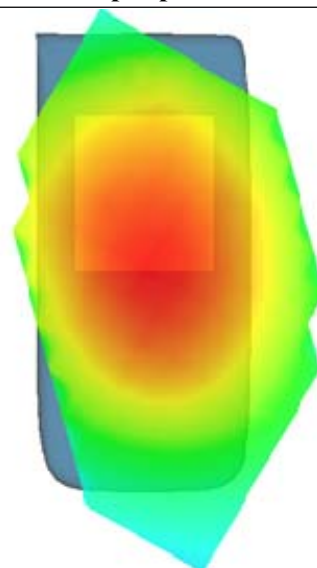

MEASUREMENT 45

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 15/5/2012

Measurement duration: 8 minutes 17 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Left head
Device Position	Cheek
Band	802.11B
Channels	High
Signal	DSSS

B. SAR Measurement Results


Higher Band SAR (Channel 11)

Frequency (MHz)	2462.000000
Relative permittivity (real part)	39.622857
Relative permittivity	15.490000
Conductivity (S/m)	1.964313
Power drift (%)	0.510000
Ambient Temperature:	22.3°C
Liquid Temperature:	21.5°C
ConvF:	39.563,33.614,37.677
Crest factor:	1:1

SURFACE SAR

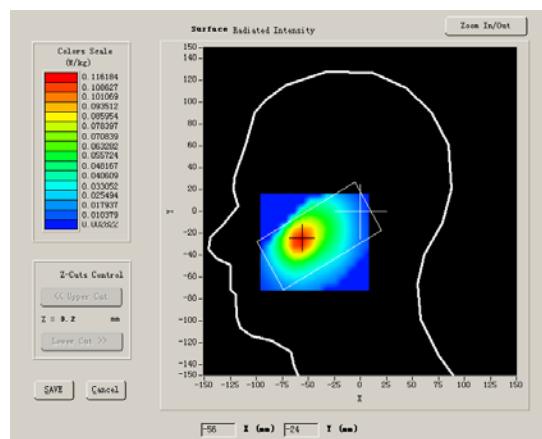

VOLUME SAR

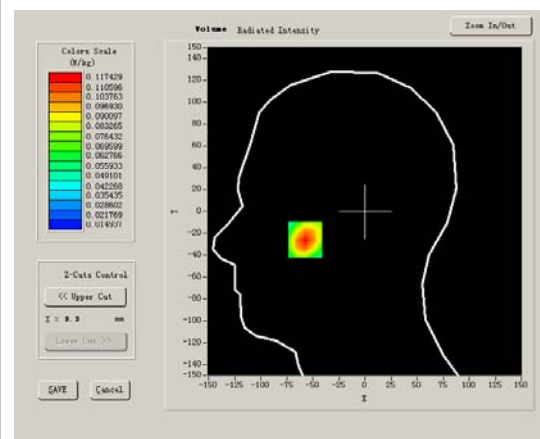


Maximum location: X=-57.00, Y=-26.00

SAR 10g (W/Kg)	0.080597
SAR 1g (W/Kg)	0.111104


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.1174	0.0960	0.0758	0.0580	0.0440	0.0343


SAR, Z Axis Scan (X = -57, Y = -26)

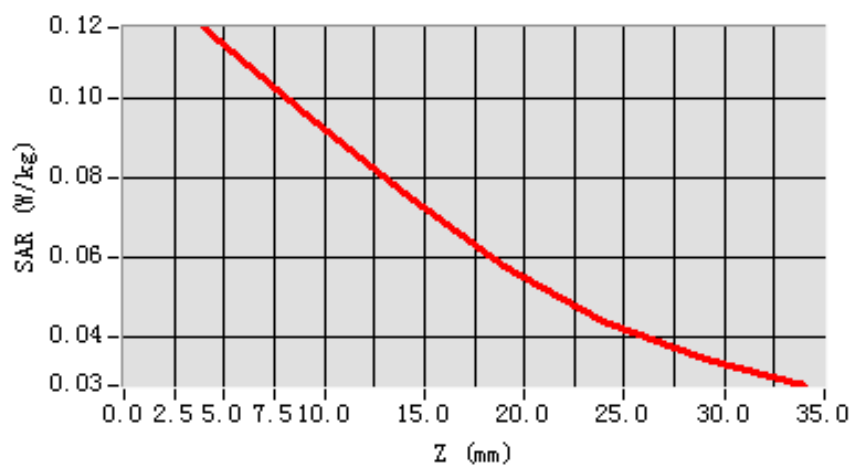

3D scene shot

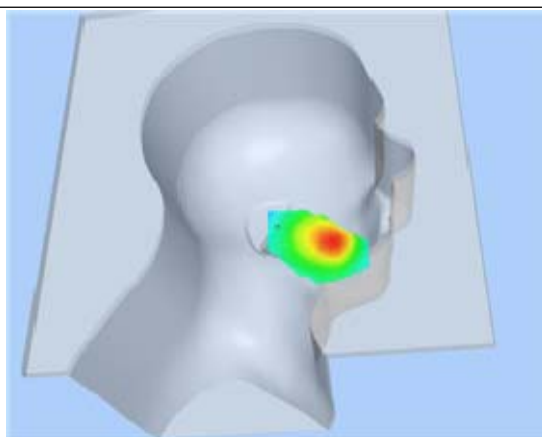

Hot spot position

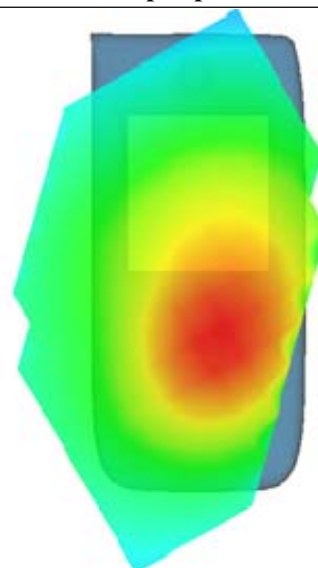

MEASUREMENT 46

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 15/5/2012

Measurement duration: 8 minutes 17 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Left head
Device Position	Tilt
Band	802.11B
Channels	High
Signal	DSSS

B. SAR Measurement Results


Higher Band SAR (Channel 11)

Frequency (MHz)	2462.000000
Relative permittivity (real part)	39.622857
Relative permittivity	15.490000
Conductivity (S/m)	1.964313
Power drift (%)	0.620000
Ambient Temperature:	22.3°C
Liquid Temperature:	21.5°C
ConvF:	39.563,33.614,37.677
Crest factor:	1:1

SURFACE SAR

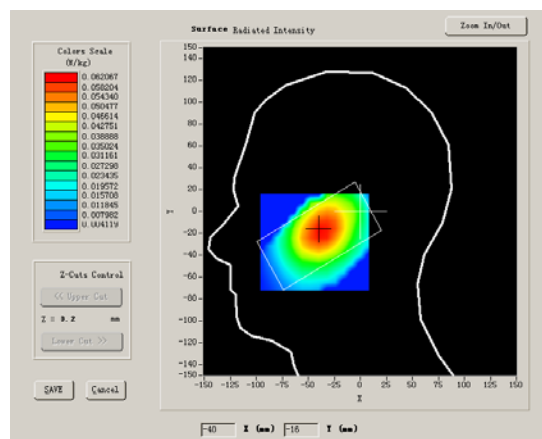

VOLUME SAR

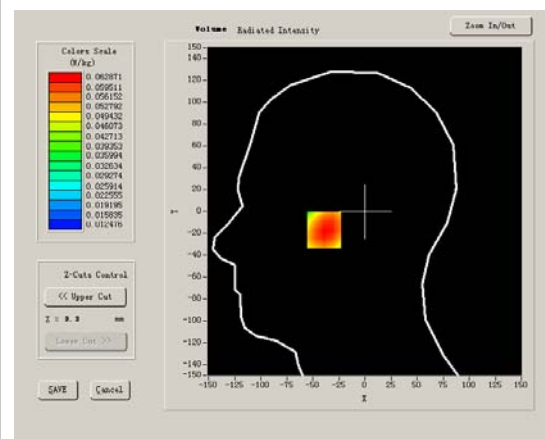


Maximum location: X=-39.00, Y=-17.00

SAR 10g (W/Kg)	0.049523
SAR 1g (W/Kg)	0.061193


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.0629	0.0554	0.0472	0.0372	0.0286	0.0216


SAR, Z Axis Scan (X = -39, Y = -17)

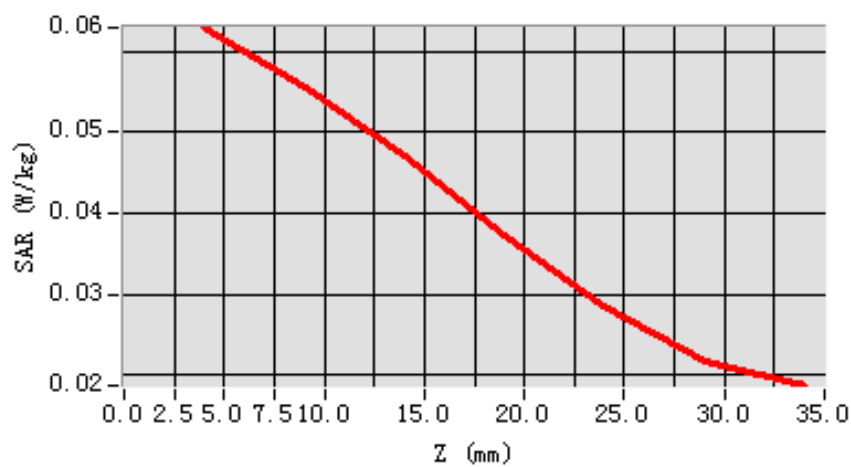

3D scene shot

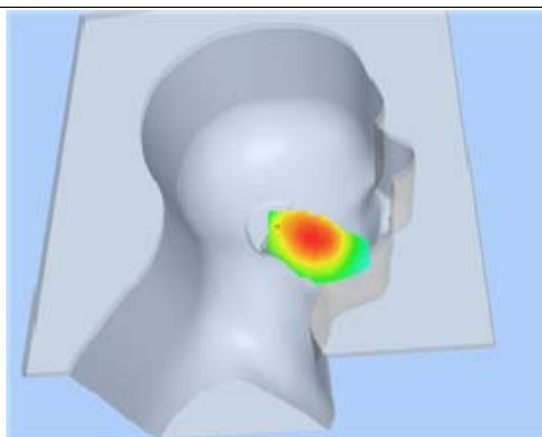

Hot spot position

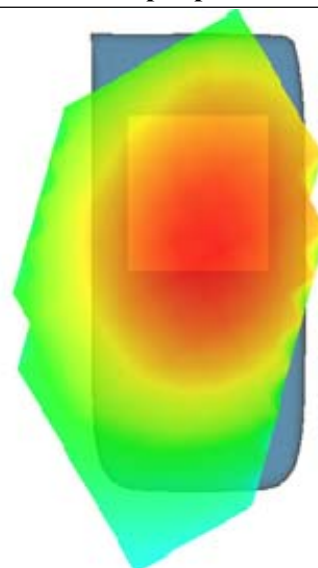

MEASUREMENT 47

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 15/5/2012

Measurement duration: 9 minutes 10 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	802.11B
Channels	High
Signal	DSSS

B. SAR Measurement Results


Higher Band SAR (Channel 11)

Frequency (MHz)	2462000000
Relative permittivity (real part)	52.548876
Relative permittivity	15.500000
Conductivity (S/m)	1.974257
Power drift (%)	-0.910000
Ambient Temperature:	22.0°C
Liquid Temperature:	21.8°C
ConvF:	39.772,33.946,37.835
Crest factor:	1:1

SURFACE SAR

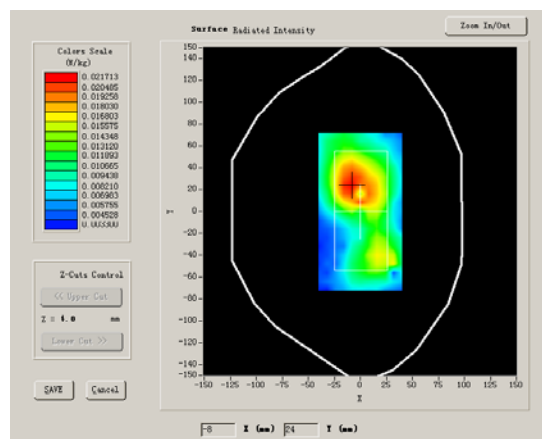

VOLUME SAR

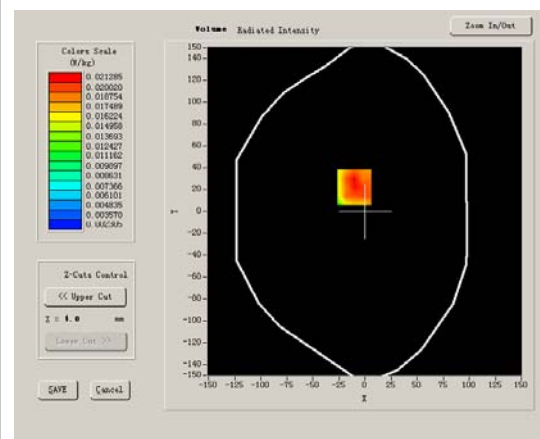


Maximum location: X=-10.00, Y=22.00

SAR 10g (W/Kg)	0.015390
SAR 1g (W/Kg)	0.024456


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.0253	0.0164	0.0097	0.0065	0.0049	0.0037


SAR, Z Axis Scan (X = -10, Y = 22)

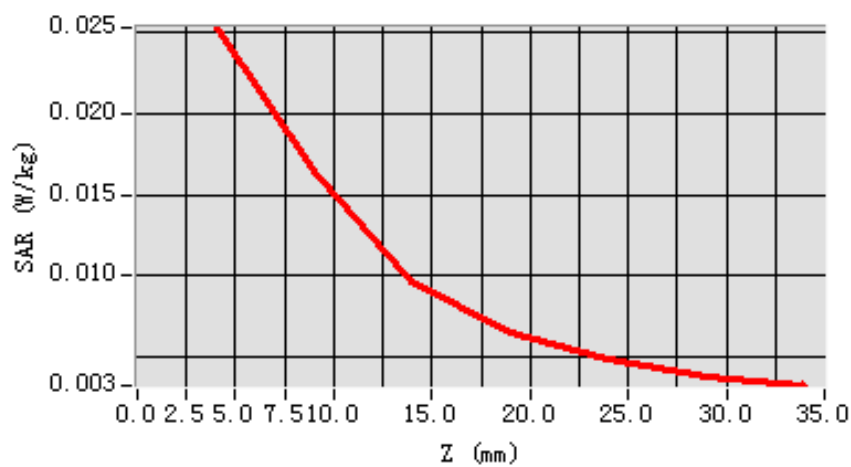

3D scene shot

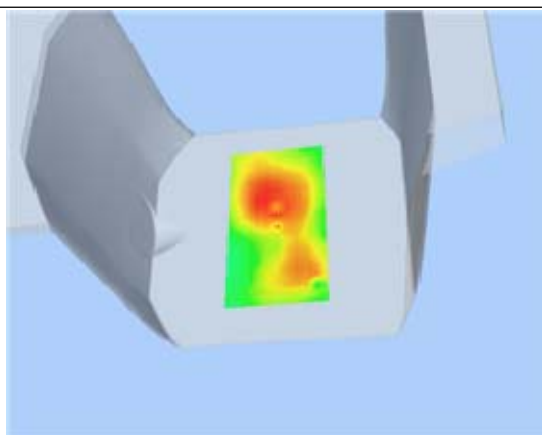

Hot spot position

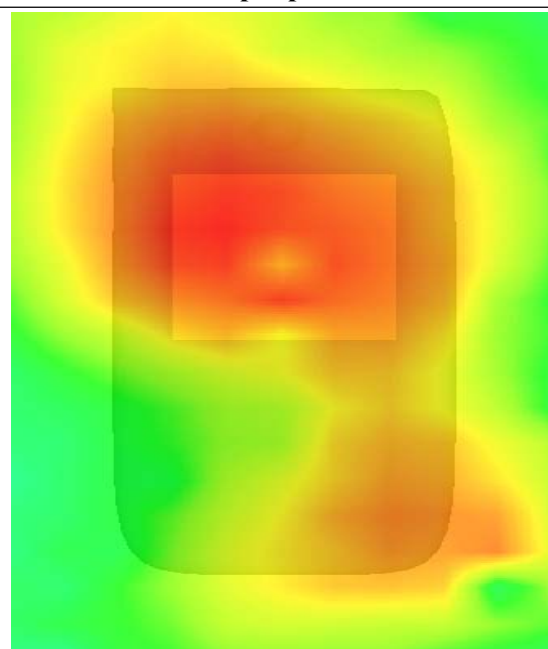

MEASUREMENT 48

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 15/5/2012

Measurement duration: 9 minutes 10 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	802.11B
Channels	High
Signal	DSSS

B. SAR Measurement Results


Higher Band SAR (Channel 6)

Frequency (MHz)	2462.000000
Relative permittivity (real part)	52.548876
Relative permittivity	15.500000
Conductivity (S/m)	1.974257
Power drift (%)	-0.710000
Ambient Temperature:	22.0°C
Liquid Temperature:	21.8°C
ConvF:	39.772,33.946,37.835
Crest factor:	1:1

SURFACE SAR

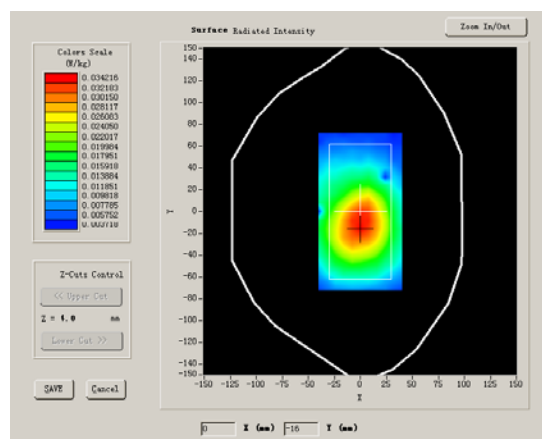

VOLUME SAR

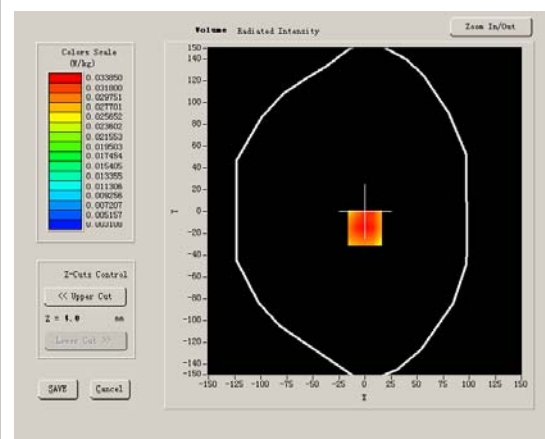


Maximum location: X=0.00, Y=-15.00

SAR 10g (W/Kg)	0.024740
SAR 1g (W/Kg)	0.035394


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.0372	0.0283	0.0209	0.0142	0.0105	0.0083


SAR, Z Axis Scan (X = 0, Y = -15)

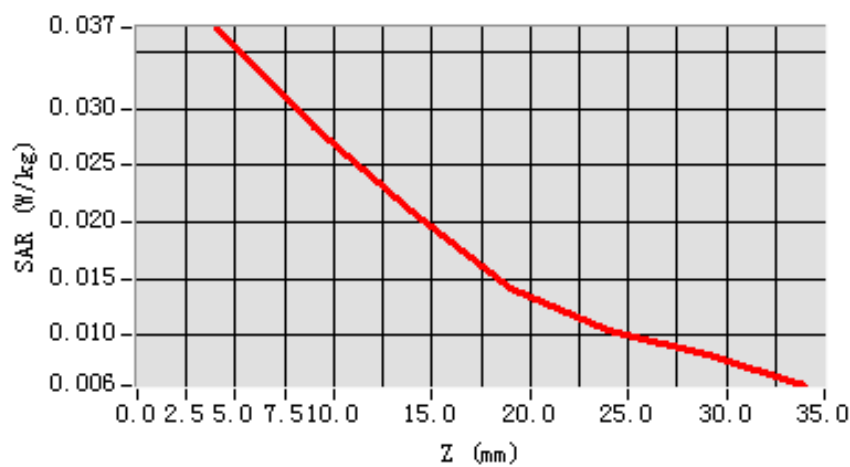

3D scene shot

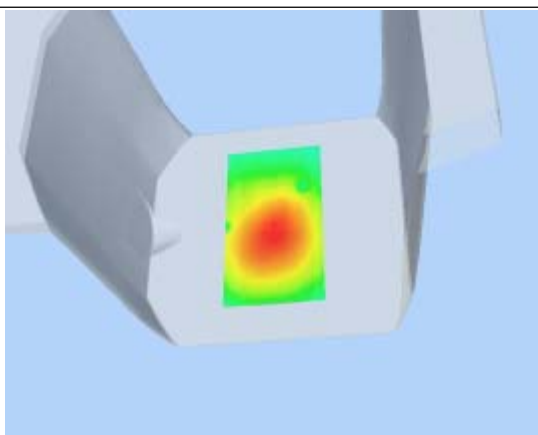

Hot spot position

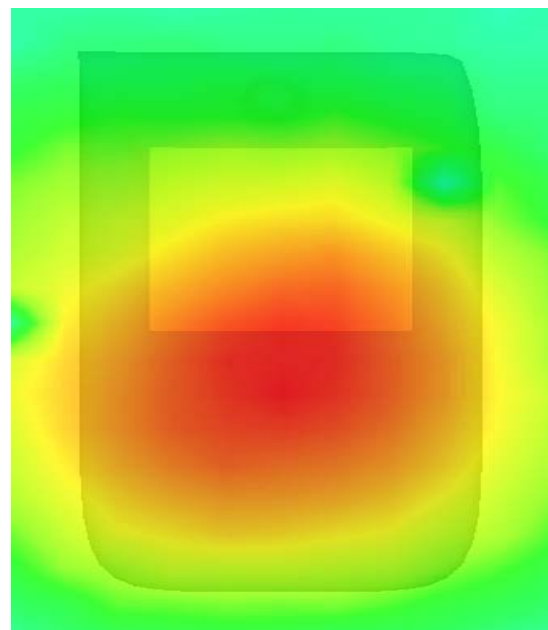

MEASUREMENT 49

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 15/5/2012

Measurement duration: 9 minutes 10 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	802.11B
Channels	High
Signal	DSSS

B. SAR Measurement Results


Higher Band SAR (Channel 11)

Frequency (MHz)	2462.000000
Relative permittivity (real part)	52.548876
Relative permittivity	15.500000
Conductivity (S/m)	1.974257
Power drift (%)	-1.360000
Ambient Temperature:	22.0°C
Liquid Temperature:	21.8°C
ConvF:	39.772,33.946,37.835
Crest factor:	1:1

SURFACE SAR

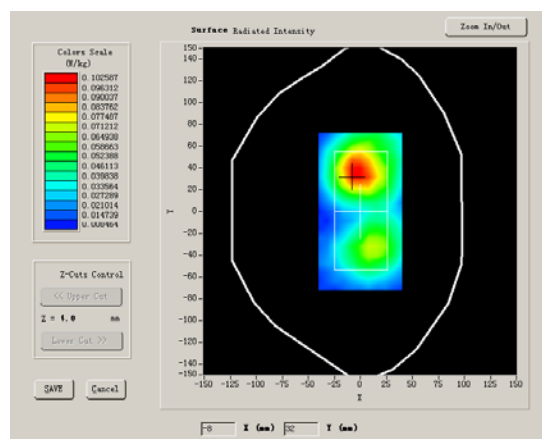

VOLUME SAR

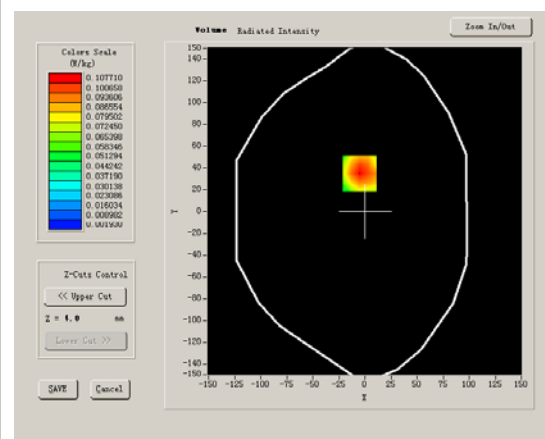


Maximum location: X=-5.00, Y=35.00

SAR 10g (W/Kg)	0.056577
SAR 1g (W/Kg)	0.102899


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.1077	0.0547	0.0307	0.0164	0.0062	0.0063


SAR, Z Axis Scan (X = -5, Y = 35)

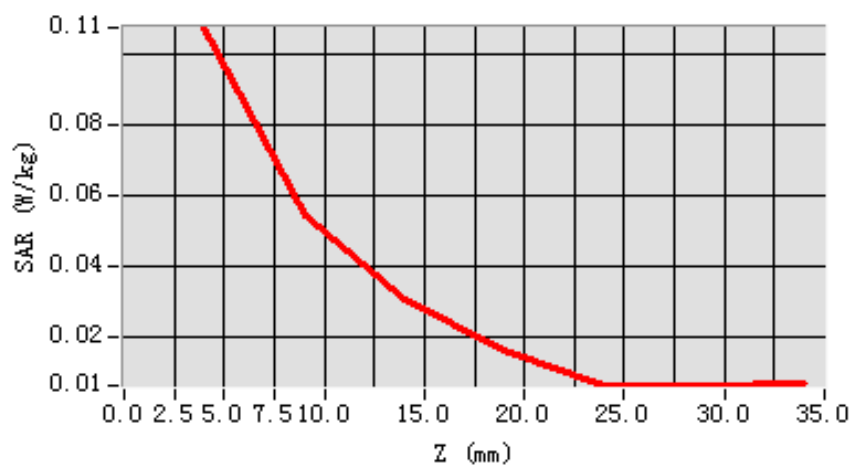

3D scene shot

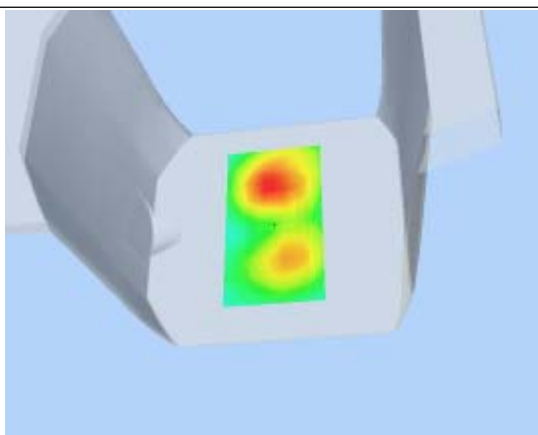

Hot spot position

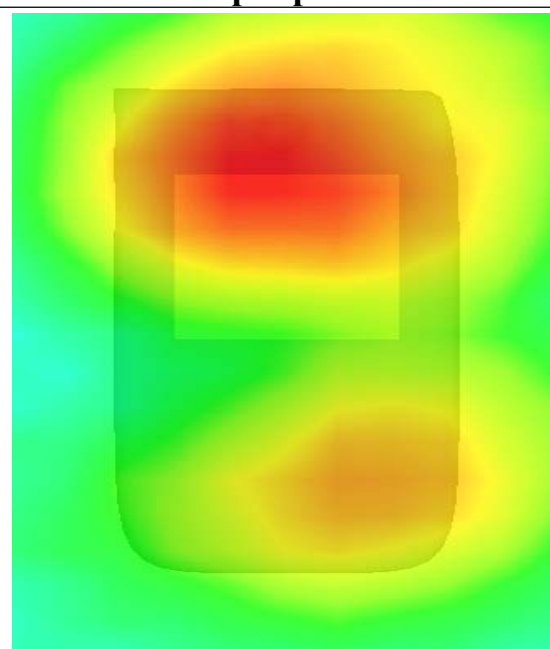

MEASUREMENT 50

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 15/5/2012

Measurement duration: 9 minutes 10 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	802.11B
Channels	High
Signal	DSSS

B. SAR Measurement Results


Higher Band SAR (Channel 11)

Frequency (MHz)	2462.000000
Relative permittivity (real part)	52.548876
Relative permittivity	15.500000
Conductivity (S/m)	1.974257
Power drift (%)	-1.090000
Ambient Temperature:	22.0°C
Liquid Temperature:	21.8°C
ConvF:	39.772,33.946,37.835
Crest factor:	1:1

SURFACE SAR

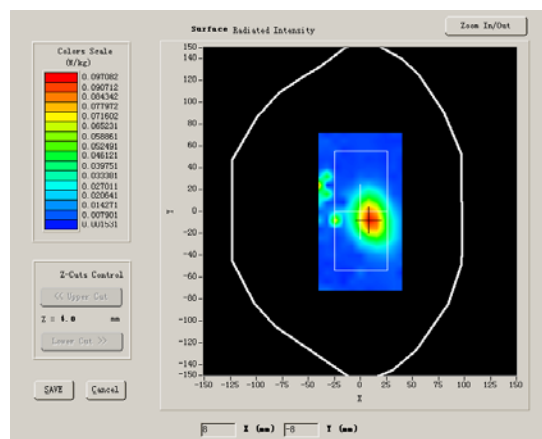

VOLUME SAR

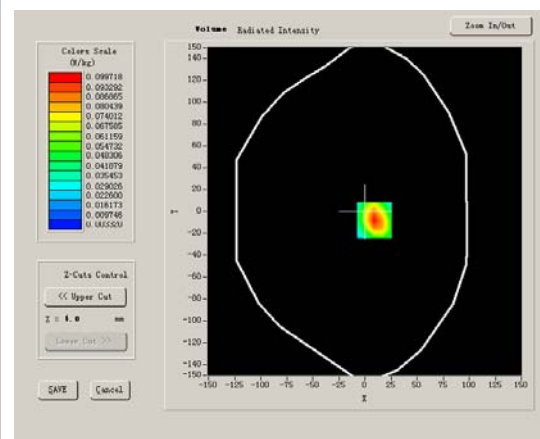


Maximum location: X=9.00, Y=-8.00

SAR 10g (W/Kg)	0.046563
SAR 1g (W/Kg)	0.093472


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.0997	0.0478	0.0233	0.0117	0.0093	0.0066


SAR, Z Axis Scan (X = 9, Y = -8)

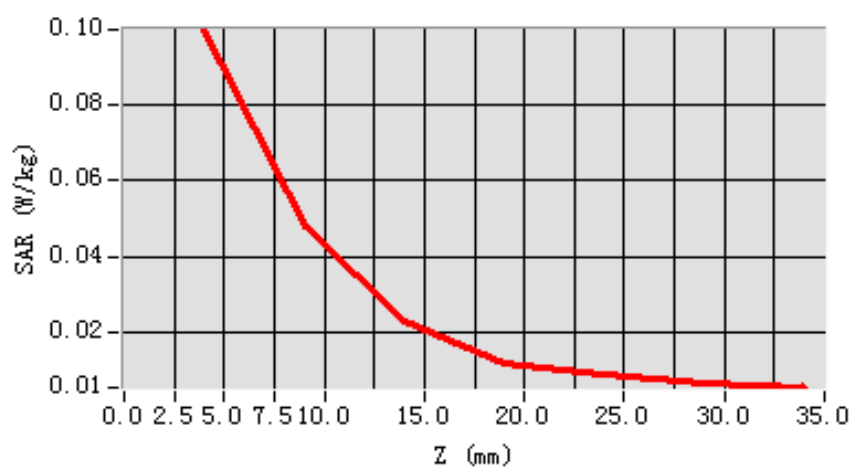

3D scene shot

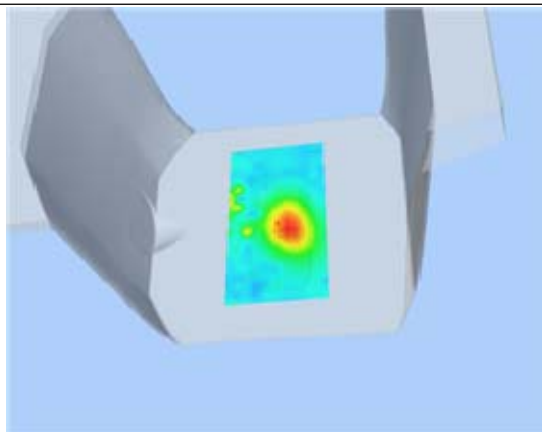

Hot spot position

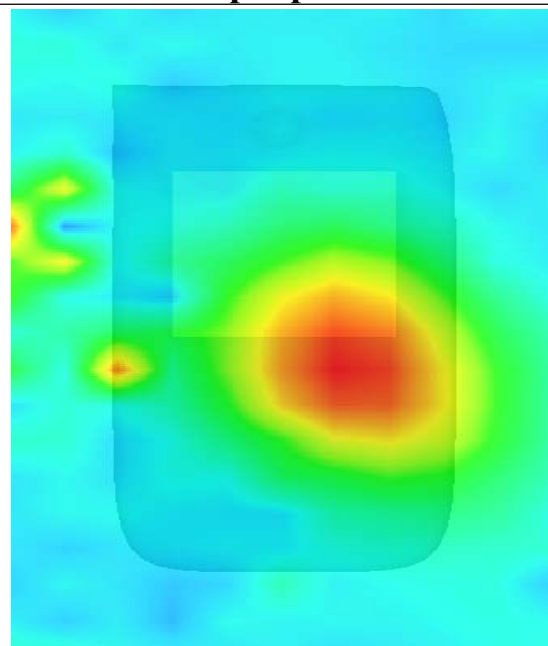

MEASUREMENT 51

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 15/5/2012

Measurement duration: 9 minutes 10 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	802.11B
Channels	High
Signal	DSSS

B. SAR Measurement Results


Higher Band SAR (Channel 11)

Frequency (MHz)	2462.000000
Relative permittivity (real part)	52.548876
Relative permittivity	15.500000
Conductivity (S/m)	1.974257
Power drift (%)	-1.090000
Ambient Temperature:	22.0°C
Liquid Temperature:	21.8°C
ConvF:	39.772,33.946,37.835
Crest factor:	1:1

SURFACE SAR

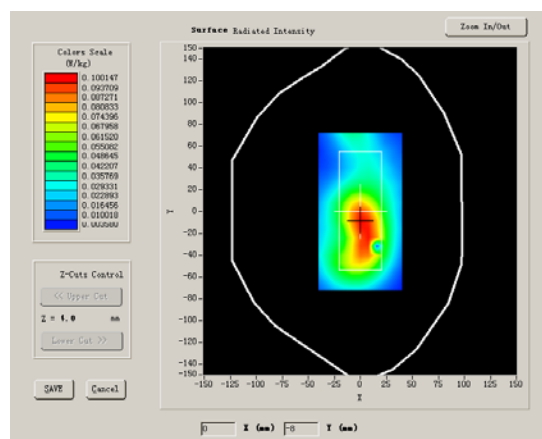

VOLUME SAR

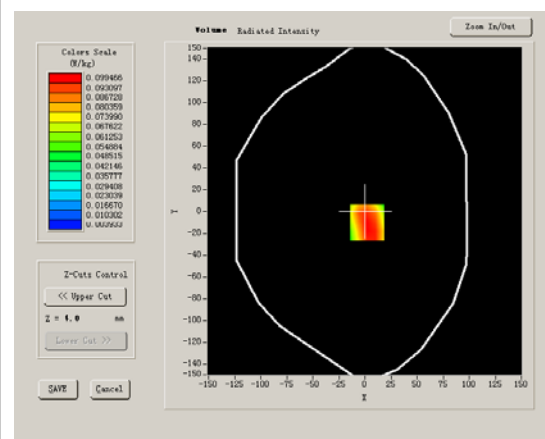


Maximum location: X=2.00, Y=-10.00

SAR 10g (W/Kg)	0.072889
SAR 1g (W/Kg)	0.105965


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.1092	0.0795	0.0579	0.0423	0.0303	0.0247


SAR, Z Axis Scan (X = 2, Y = -10)

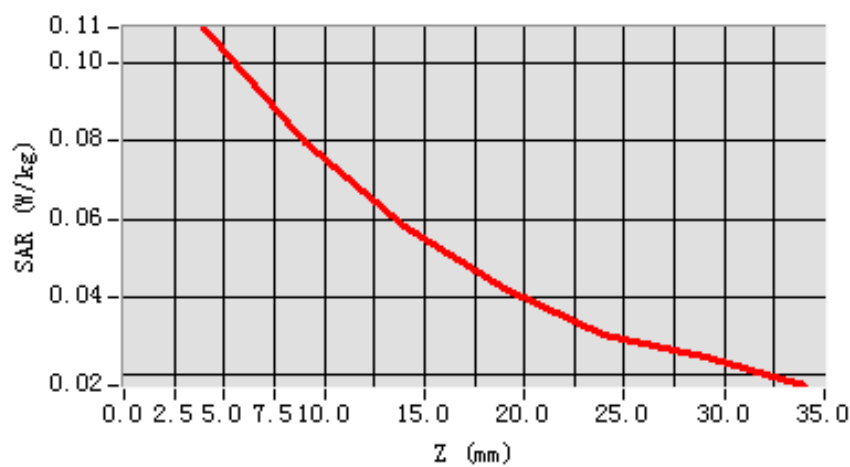

3D scene shot

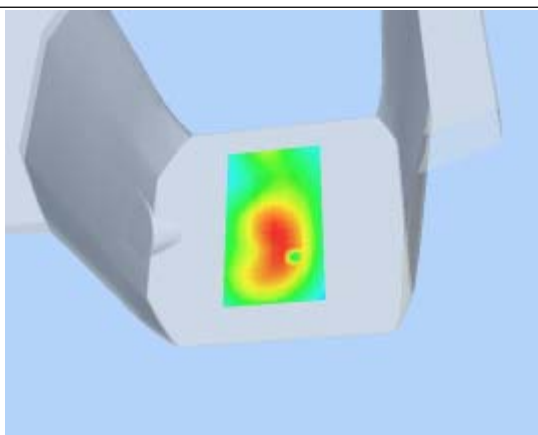

Hot spot position

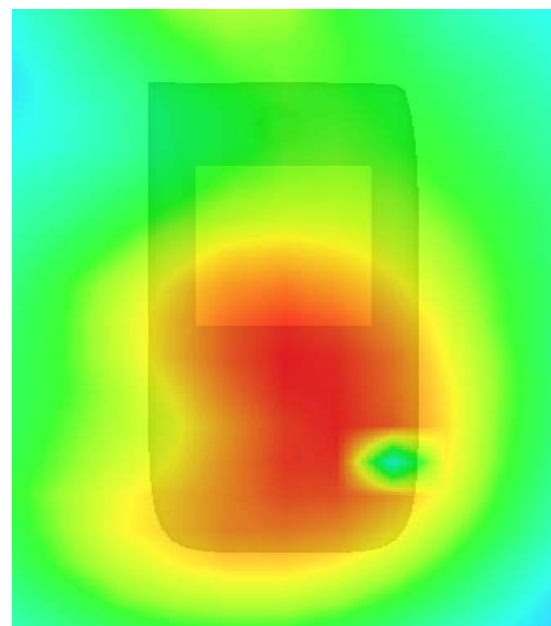

System Performance Check Data(Head)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 15/5/2012

Measurement duration: 13 minutes 27 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	
Band	835MHz
Channels	
Signal	CW

B. SAR Measurement Results


Band SAR

Frequency (MHz)	835.000000
Relative permittivity (real part)	41.675999
Relative permittivity	15.070000
Conductivity (S/m)	0.894409
Power drift (%)	-0.050000
Ambient Temperature:	22.4°C
Liquid Temperature:	21.5°C
ConvF:	28.479,25.214,27.196
Crest factor:	1:1

SURFACE SAR

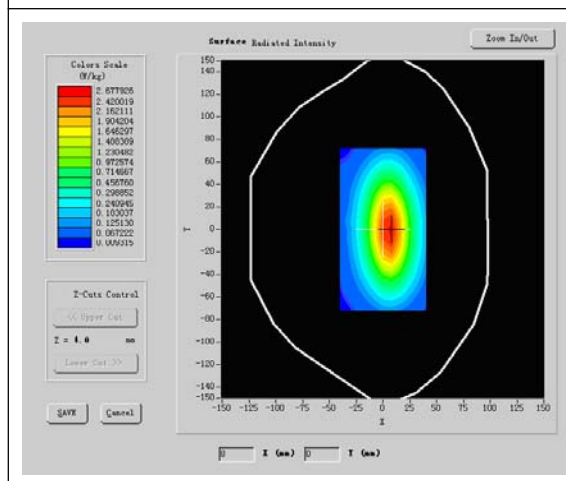

VOLUME SAR

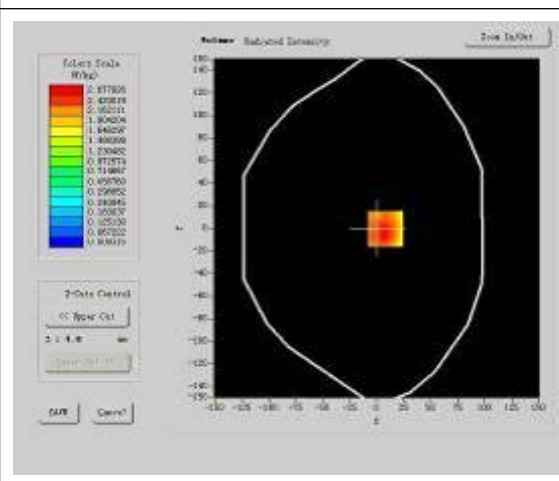


Maximum location: X=5.00, Y=1.00

SAR 10g (W/Kg)	1.685732
SAR 1g (W/Kg)	2.478462


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	2.4754	1.2251	0.5257	0.2114


SAR, Z Axis Scan (X = 5, Y = 1)

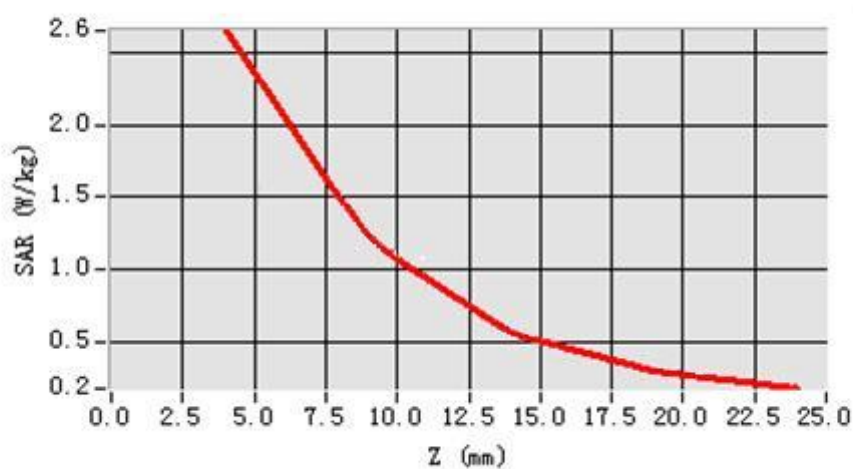

3D scene shot

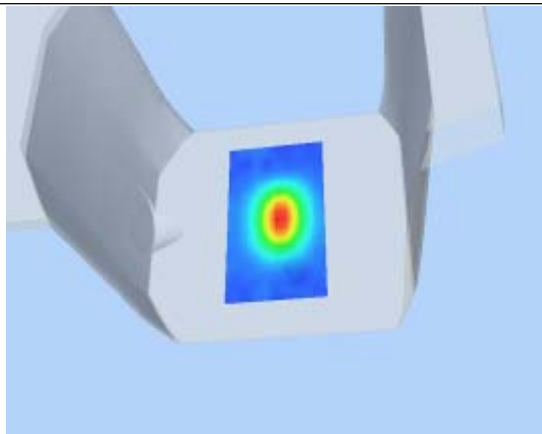

Hot spot position

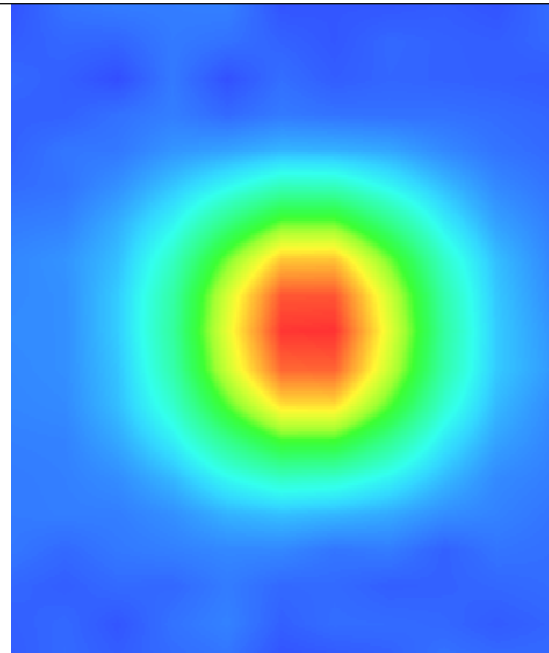

System Performance Check Data(Body)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 15/5/2012

Measurement duration: 13 minutes 27 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	
Band	835MHz
Channels	
Signal	CW

B. SAR Measurement Results

Band SAR

Frequency (MHz)	835.000000
Relative permittivity (real part)	55.709999
Relative permittivity	21.709999
Conductivity (S/m)	0.9809033
Power drift (%)	-0.170000
Ambient Temperature:	22.4°C
Liquid Temperature:	21.5°C
ConvF:	28.559,25.681,27.588
Crest factor:	1:1

SURFACE SAR

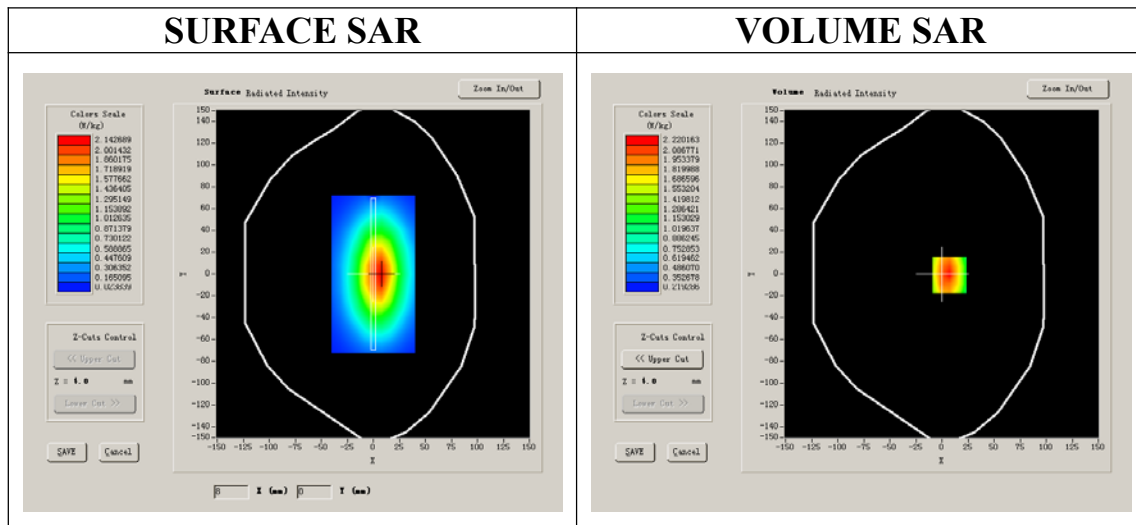


Maximum location: X=7.00, Y=-1.00

SAR 10g (W/Kg)	1.539476
SAR 1g (W/Kg)	2.385979


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	2.5209	1.6629	1.1437	0.8075	0.5889	0.4143


SAR, Z Axis Scan (X = 7, Y = -1)

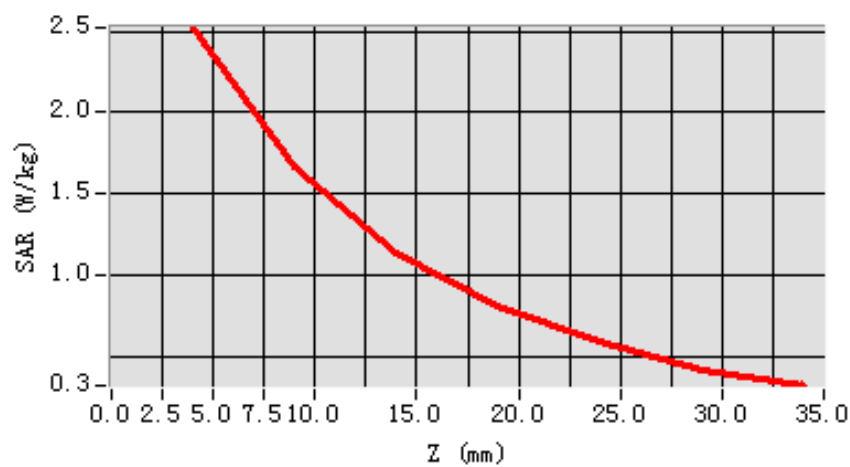

3D scene shot

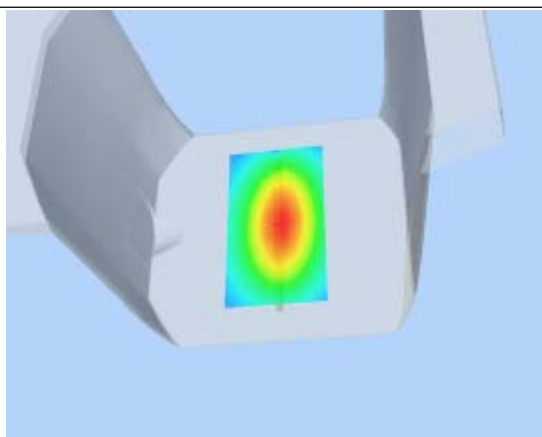

Hot spot position

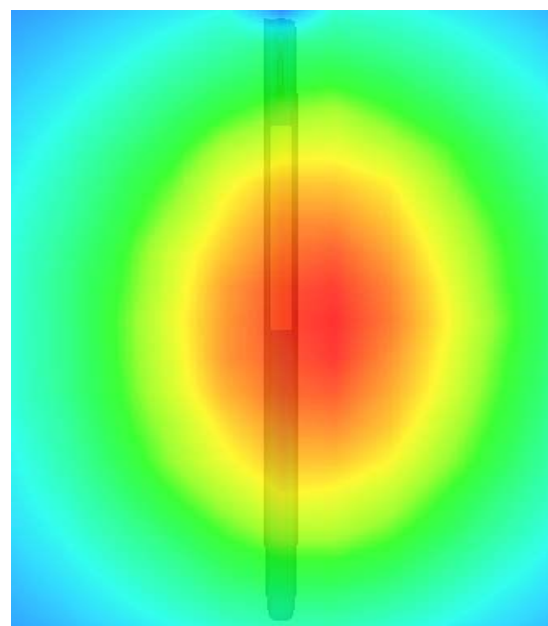

System Performance Check Data(Head)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 15/5/2012

Measurement duration: 13 minutes 27 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	
Band	1900MHz
Channels	
Signal	CW

B. SAR Measurement Results


Band SAR

Frequency (MHz)	1900.000000
Relative permittivity (real part)	38.509998
Relative permittivity	15.070000
Conductivity (S/m)	1.436111
Power drift (%)	-0.140000
Ambient Temperature:	22.3°C
Liquid Temperature:	22.6°C
ConvF:	40.136,34.843,38.721
Crest factor:	1:1

SURFACE SAR

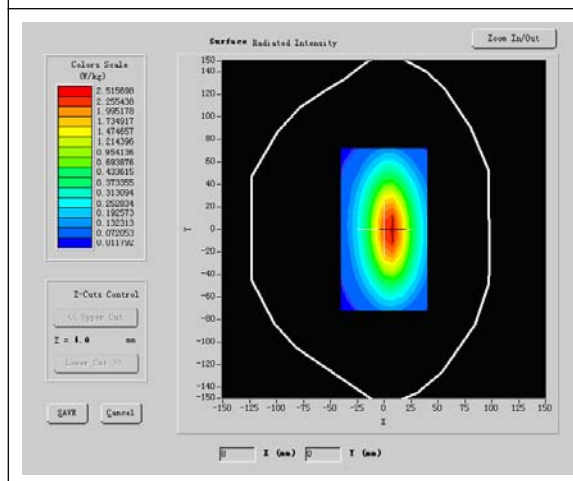

VOLUME SAR

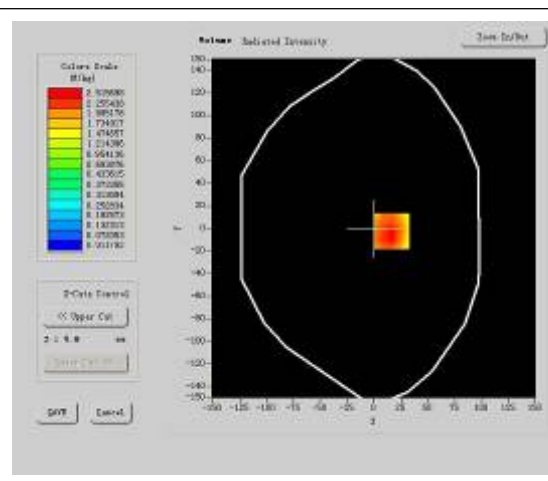


Maximum location: X=-1.00, Y=-50.00

SAR 10g (W/Kg)	4.884149
SAR 1g (W/Kg)	9.454628


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	9.4148	7.3955	6.3646	4.3955


SAR, Z Axis Scan (X = -1, Y = -50)

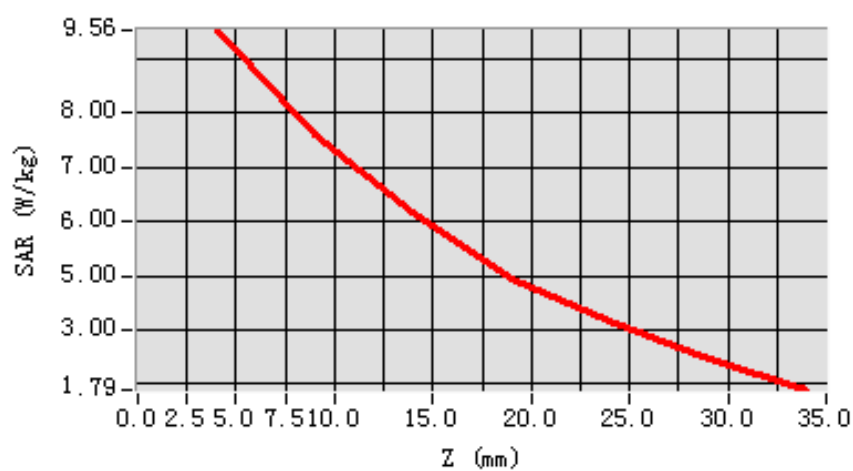

3D scene shot

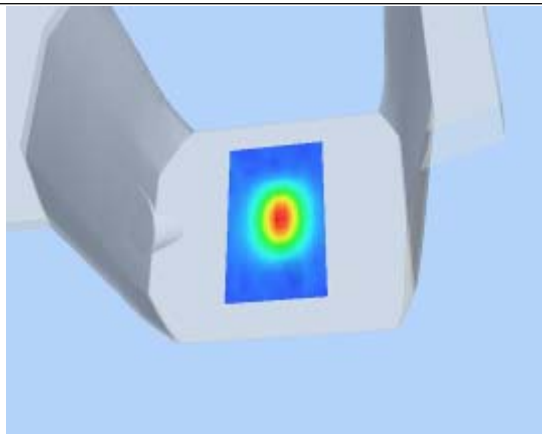

Hot spot position

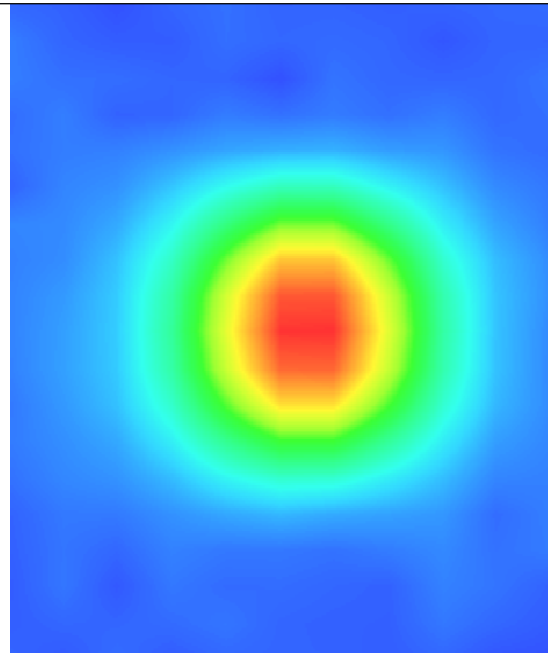

System Performance Check Data(Body)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 15/5/2012

Measurement duration: 13 minutes 26 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	
Band	1900MHz
Channels	
Signal	CW

B. SAR Measurement Results


Band SAR

Frequency (MHz)	1900.000000
Relative permittivity (real part)	52.548876
Relative permittivity	14.070000
Conductivity (S/m)	1.553978
Power drift (%)	-0.030000
Ambient Temperature:	22.3°C
Liquid Temperature:	22.6°C
ConvF:	40.625,34.773,38.535
Crest factor:	1:1

SURFACE SAR

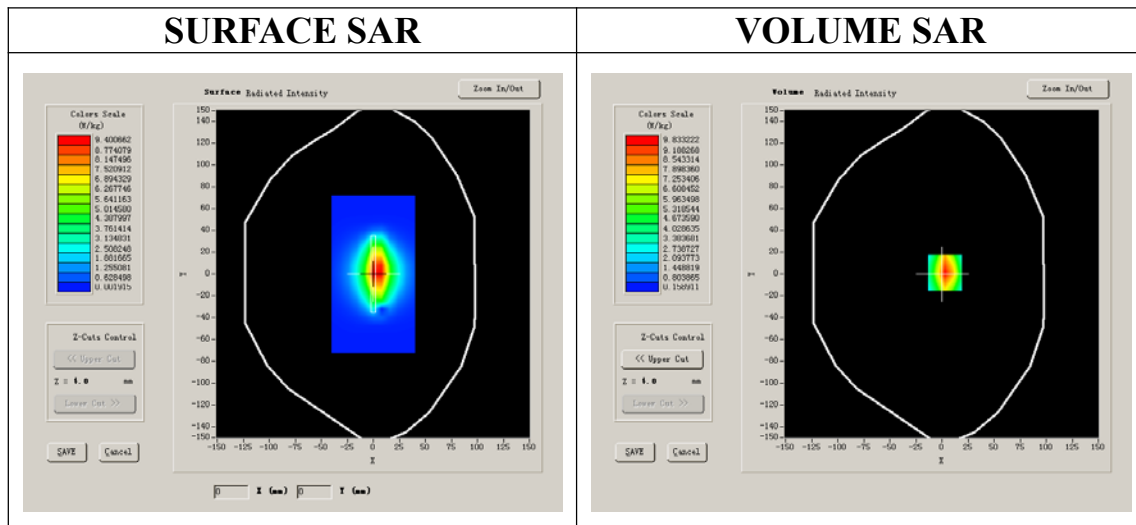

VOLUME SAR

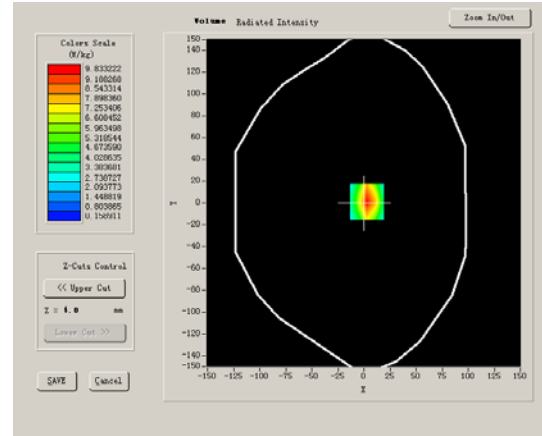


Maximum location: X=3.00, Y=1.00

SAR 10g (W/Kg)	4.981611
SAR 1g (W/Kg)	9.740177


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	10.0621	5.6445	3.6226	2.1642	1.4521	0.9078


SAR, Z Axis Scan (X = 3, Y = 1)

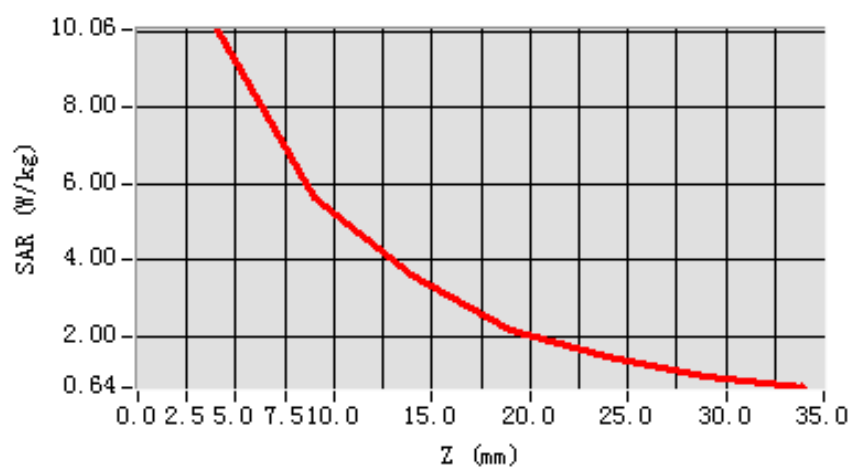

3D scene shot

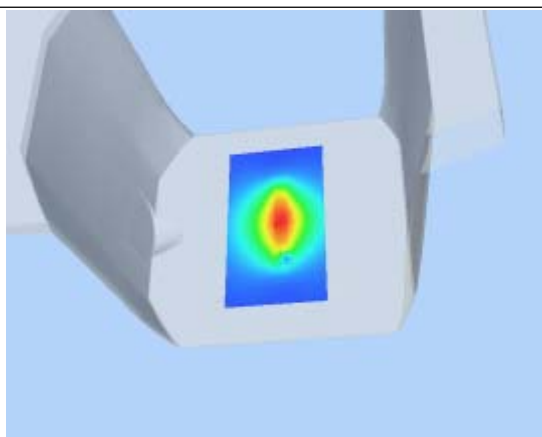

Hot spot position

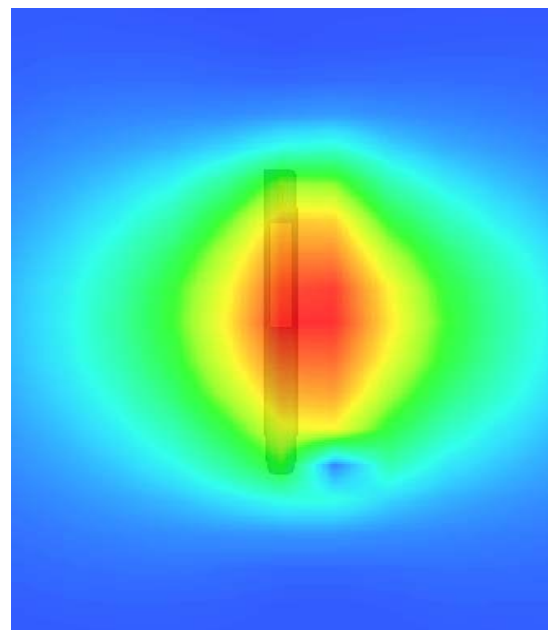

System Performance Check Data(Head)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 15/5/2012

Measurement duration: 13 minutes 27 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	
Band	2450MHz
Channels	
Signal	CW

B. SAR Measurement Results


Band SAR

Frequency (MHz)	2450.000000
Relative permittivity (real part)	39.622857
Relative permittivity	12.991650
Conductivity (S/m)	1.964313
Power Drift (%)	0.560000
Ambient Temperature:	22.0°C
Liquid Temperature:	21.8°C
ConvF:	39.563,33.614,37.677
Crest factor:	1:1

SURFACE SAR

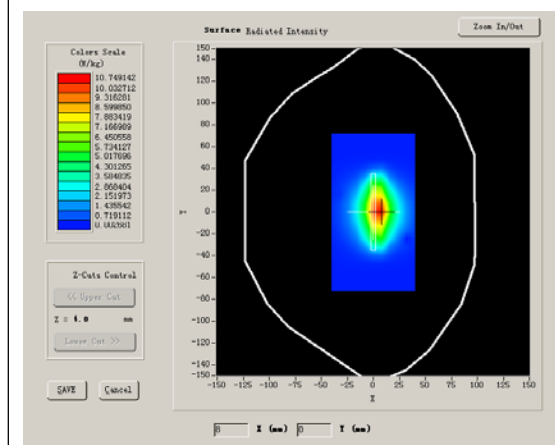

VOLUME SAR

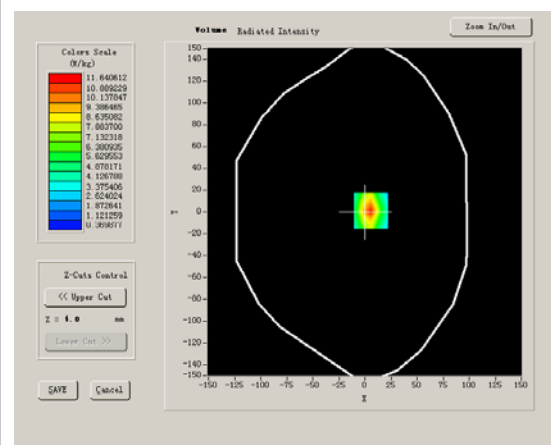


Maximum location: X=6.00, Y=1.00

SAR 10g (W/Kg)	5.938478
SAR 1g (W/Kg)	12.442675


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	12.7015	6.2096	3.8187	2.4504	1.5036	1.0219


SAR, Z Axis Scan (X = 6, Y = 1)

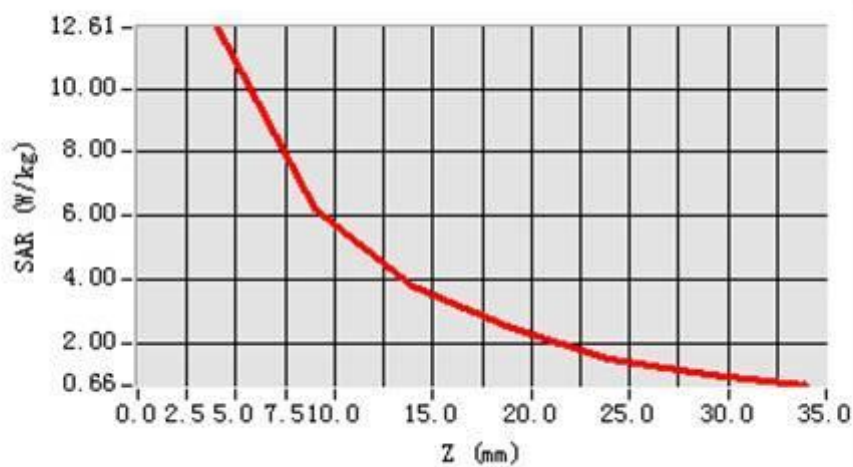

3D scene shot

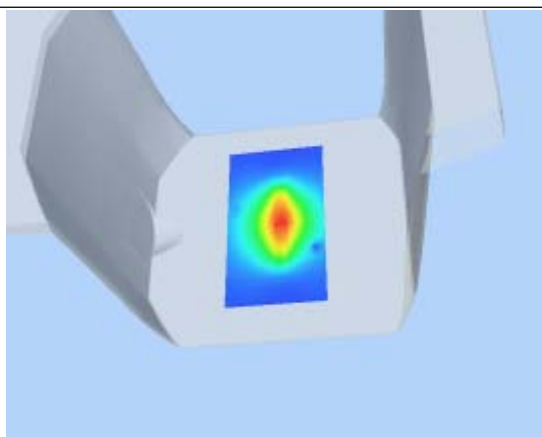

Hot spot position

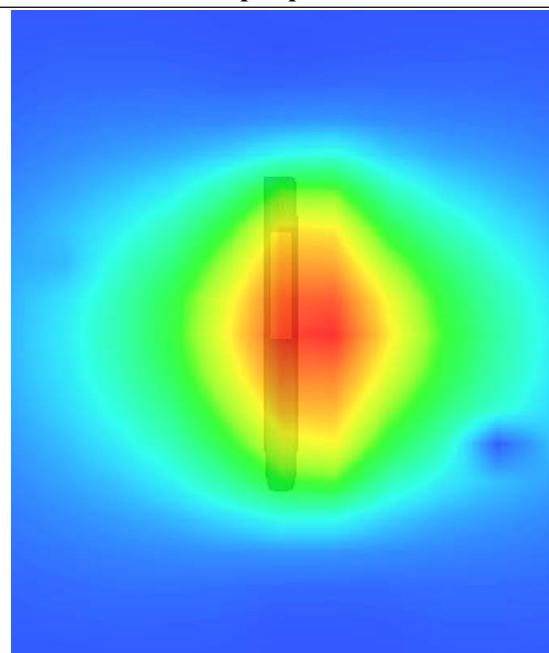

System Performance Check Data(Body)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 15/5/2012

Measurement duration: 13 minutes 27 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	
Band	2450MHz
Channels	
Signal	CW

B. SAR Measurement Results


Band SAR

Frequency (MHz)	2450.000000
Relative permittivity (real part)	52.548876
Relative permittivity	12.991650
Conductivity (S/m)	1.974257
Power Drift (%)	1.080000
Ambient Temperature:	22.0°C
Liquid Temperature:	21.8°C
ConvF:	39.772,33.946,37.835
Crest factor:	1:1

SURFACE SAR

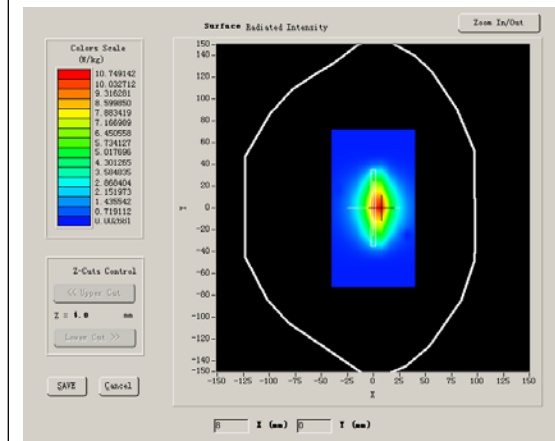

VOLUME SAR

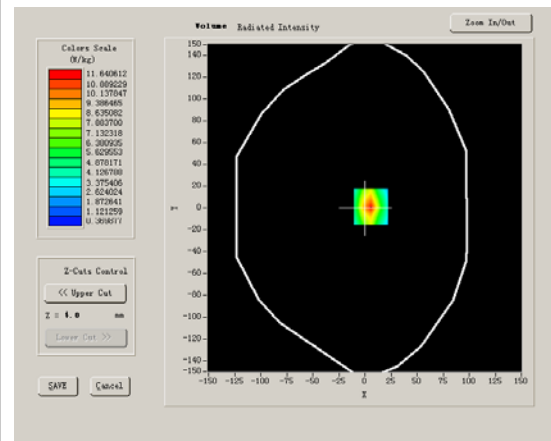


Maximum location: X=-1.00, Y=-50.00

SAR 10g (W/Kg)	6.256773
SAR 1g (W/Kg)	12.789110


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	13.1279	6.8312	3.5991	1.3473

SAR, Z Axis Scan (X = -1, Y = -50)

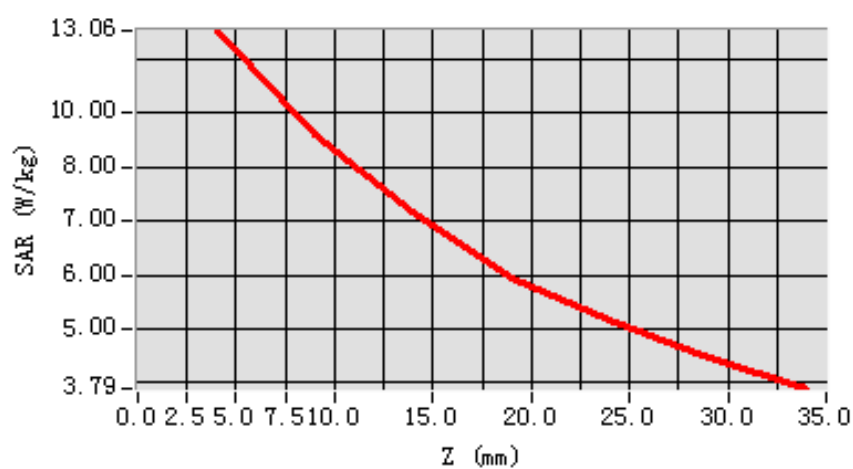

3D scene shot

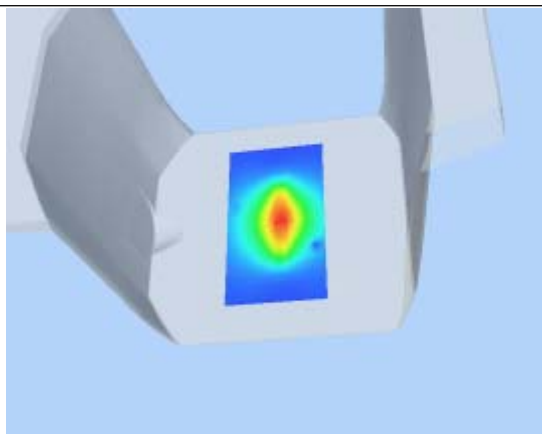

Hot spot position

