

Test Report	17070102-FCC-R5	
Page	136 of 159	

Test setup	Base Station EUT Thermal Chamber
Procedure	A communication link was established between EUT and base station. The frequency error was monitored and measured by base station under variation of ambient temperature and variation of primary supply voltage.  Limit: The frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5ppm) of the center frequency.
Remark	Frequency Stability versus Temperature: The Frequency tolerance of the carrier signal shall be maintained within 2.5ppm of the operating frequency over a temperature variation of -10°C to +55°C at normal supply voltage.
Result	Pass Fail

Test Data	Yes	□ <sub>N/A</sub>
Test Plot	Yes (See below)	✓ <sub>N/A</sub>



Test Report	17070102-FCC-R5
Page	137 of 159

# LTE Band II (Part 24E) result

Middle Channel, f <sub>o</sub> = 1880 MHz				
Temperature (°C)	Power Supplied (V <sub>DC</sub> )	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10		-9	0.0048	2.5
0		-5	0.0027	2.5
10	3.8	-10	0.0053	2.5
20		-15	0.0080	2.5
30		-14	0.0074	2.5
40		-12	0.0064	2.5
50		-16	0.0085	2.5
55		-12	0.0064	2.5
0.5	4.2	-13	0.0069	2.5
25	3.6	-12	0.0064	2.5

### LTE Band IV (Part 27) result

	ETE Band IV (Fart 27) Tesuit				
	Middle Channel, f <sub>o</sub> = 1732.5 MHz				
Temperature (°C)	Power Supplied (V <sub>DC</sub> )	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)	
-10		-15	0.0087	2.5	
0		-16	0.0092	2.5	
10		-14	0.0081	2.5	
20		-17	0.0098	2.5	
30	3.8	-15	0.0087	2.5	
40		-12	0.0069	2.5	
50		-15	0.0087	2.5	
55		-12	0.0069	2.5	
0.5	4.2	-14	0.0081	2.5	
25	3.6	-13	0.0075	2.5	



Т	est Report	17070102-FCC-R5
P	Page	138 of 159

# LTE Band V (Part 22H) result

Middle Channel, f₀ = 836.5 MHz				
Temperature (°C)	Power Supplied (V <sub>DC</sub> )	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10		-15	0.0179	2.5
0		-30	0.0359	2.5
10	3.8	-14	0.0167	2.5
20		-12	0.0143	2.5
30		-14	0.0167	2.5
40		-16	0.0191	2.5
50		-15	0.0179	2.5
55		-13	0.0155	2.5
25	4.2	-15	0.0179	2.5
25	3.6	-14	0.0167	2.5

# LTE Band VII (Part 27) result

	Middle Channel, f₀ = 2535 MHz					
Temperature (°C)	Power Supplied (V <sub>DC</sub> )	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)		
-10		-15	0.0059	2.5		
0		-14	0.0055	2.5		
10	3.8	-16	0.0063	2.5		
20		-12	0.0047	2.5		
30		-14	0.0055	2.5		
40		-18	0.0071	2.5		
50		-19	0.0075	2.5		
55		-13	0.0051	2.5		
0.5	4.2	-15	0.0059	2.5		
25	3.6	-15	0.0059	2.5		



Test Report	17070102-FCC-R5
Page	139 of 159

# LTE Band XII (Part 27) result

Middle Channel, f₀ = 707.5MHz				
Temperature (°C)	Power Supplied (V <sub>DC</sub> )	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10		-10	0.0027	2.5
0		-13	0.0059	2.5
10	3.8	-15	0.0037	2.5
20		-14	0.0053	2.5
30		-16	0.0064	2.5
40		-14	0.0048	2.5
50		-12	0.0064	2.5
55		-13	0.0032	2.5
25	4.2	-16	0.0059	2.5
25	3.6	-14	0.0053	2.5

## LTE Band XVII (Part 27) result

ETE Balla XVII (Falt 27) Toolat				
Middle Channel, f₀ = 710 MHz				
Temperature (°C)	Power Supplied (V <sub>DC</sub> )	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10		-10	0.0141	2.5
0		-15	0.0211	2.5
10		-14	0.0197	2.5
20		-16	0.0225	2.5
30	3.8	-14	0.0197	2.5
40		-12	0.0169	2.5
50		-14	0.0197	2.5
55		-19	0.0268	2.5
25	4.2	-15	0.0211	2.5
25	3.6	-14	0.0197	2.5



Test Report	17070102-FCC-R5
Page	140 of 159

# Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due	In use
RF Conducted Test			,		
Agilent ESA-E SERIES SPECTRUM ANALYZER	E4407B	MY45108319	09/15/2016	09/14/2017	<u> </u>
Power Splitter	1#	1#	08/31/2016	08/30/2017	•
Universal Radio Communication Tester	CMU200	121393	09/24/2016	09/23/2017	<u>\</u>
Wideband Radio Communication Tester	CMW500	120906	03/26/2017	03/25/2018	<u>\</u>
Temperature/Humidity Chamber	UHL-270	001	10/08/2016	10/07/2017	<b>\</b>
DC Power Supply	E3640A	MY40004013	09/16/2016	09/15/2017	•
RF Power Sensor	Dare RPR3006C/P/W	AY554013	09/16/2016	09/15/2017	•
Radiated Emissions					
EMI test receiver	ESL6	100262	09/16/2016	09/15/2017	~
OPT 010 AMPLIFIER (0.1-1300MHz)	8447E	2727A02430	08/31/2016	08/30/2017	<b>&lt;</b>
Microwave Preamplifier (0.5 ~ 18GHz)	PAM-118	443008	08/31/2016	08/30/2017	>
Bilog Antenna (30MHz~6GHz)	JB6	A110712	09/20/2016	09/19/2017	<b>\(\right\)</b>
Bilog Antenna (30MHz~2GHz)	JB1	A112017	09/20/2016	09/19/2017	<b>(</b>
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71259	09/23/2016	09/22/2017	<u>&lt;</u>
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/23/2016	09/22/2017	<u>&lt;</u>
SYNTHESIZED SIGNAL GENERATOR	8665B	3744A01293	09/16/2016	09/15/2017	<u>&lt;</u>
Tunable Notch Filter	3NF-800/1000- S	AA4	08/31/2016	08/30/2017	V



Test Report	17070102-FCC-R5
Page	141 of 159

Tunable Notch Filter	3NF- 1000/2000-S	AM 4	08/31/2016	08/30/2017	<b>~</b>
----------------------	---------------------	------	------------	------------	----------



Test Report	17070102-FCC-R5
Page	142 of 159

## Annex B. EUT And Test Setup Photographs

#### Annex B.i. Photograph: EUT External Photo

Whole Package View



Adapter - Lable View





Test Report	17070102-FCC-R5
Page	143 of 159

**EUT - Front View** 



**EUT - Rear View** 





Test Report	17070102-FCC-R5
Page	144 of 159

EUT - Top View



**EUT - Bottom View** 





Test Report	17070102-FCC-R5
Page	145 of 159

EUT - Left View




EUT - Right View






Test Report	17070102-FCC-R5
Page	146 of 159

#### Annex B.ii. Photograph: EUT Internal Photo






Cover Off - Top View 2

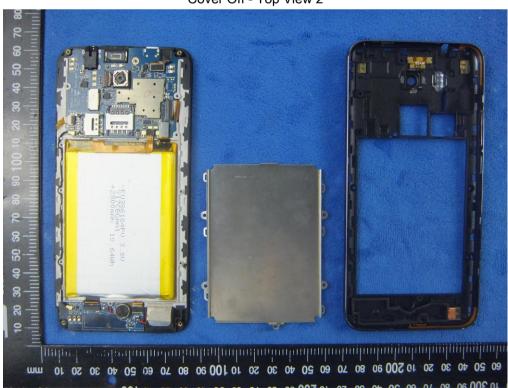




Test Report	17070102-FCC-R5
Page	147 of 159

Battery - Front View

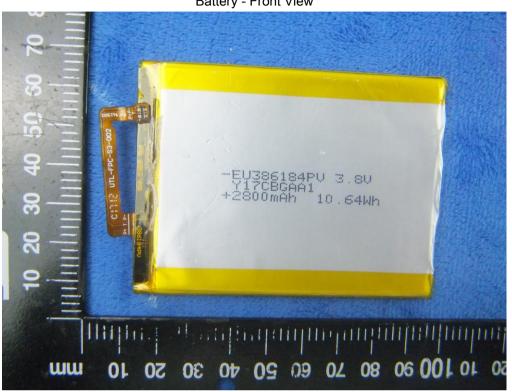


Battery - Rear View

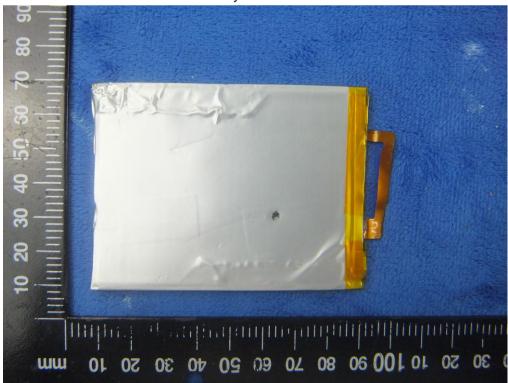




Test Report	17070102-FCC-R5
Page	148 of 159

Mainboard with Shielding - Front View

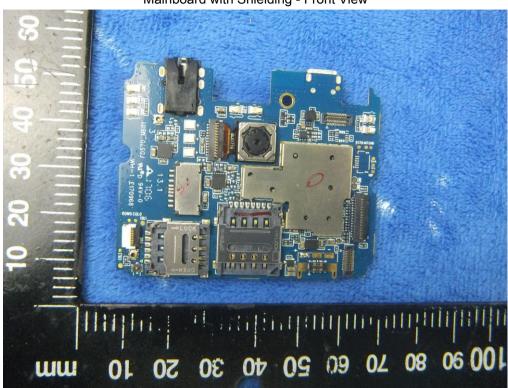


Mainboard without Shielding - Front View

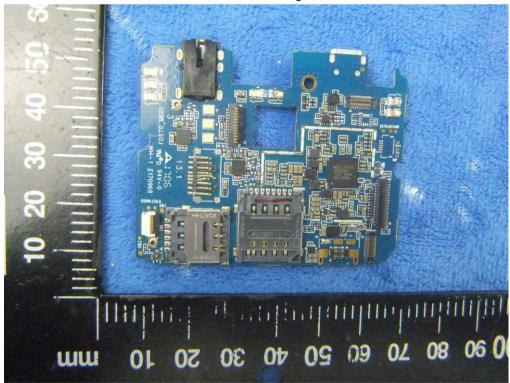




Test Report	17070102-FCC-R5
Page	149 of 159

Mainboard with Shielding - Rear View

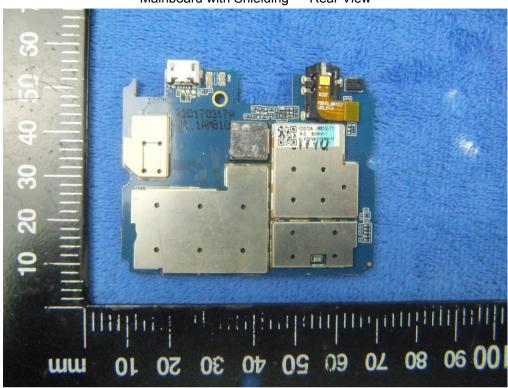


Mainboard without Shielding - Rear View

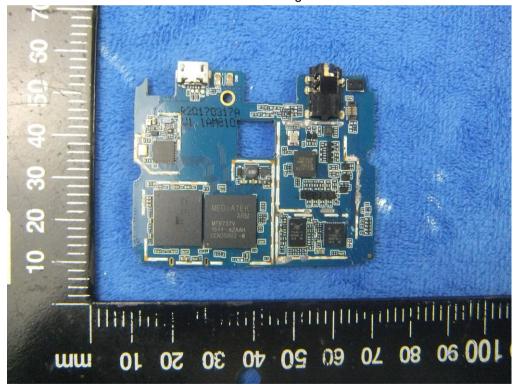




Test Report	17070102-FCC-R5
Page	150 of 159

Smallboard - Front View

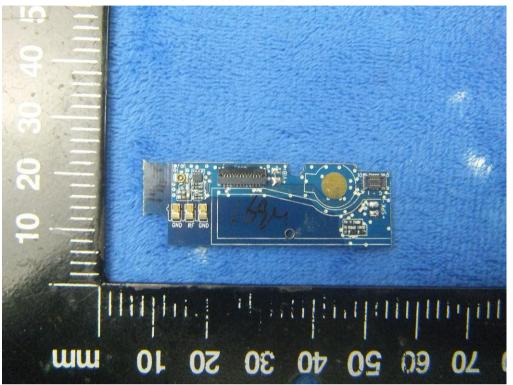

Smallboard - Rear View

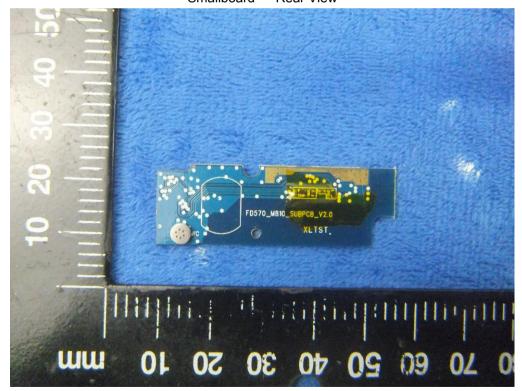



Test Report	17070102-FCC-R5
Page	151 of 159

LCD - Front View



LCD - Rear View





Test Report	17070102-FCC-R5
Page	152 of 159

#### GSM/PCS/UMTS-FDD Antenna View



WIFI/BT/BLE - Antenna View





Test Report	17070102-FCC-R5
Page	153 of 159


LTE - Antenna View






Test Report	17070102-FCC-R5
Page	154 of 159

## Annex B.iii. Photograph: Test Setup Photo

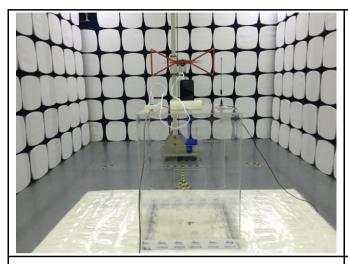

Radiated Spurious Emissions Test Setup Below 1GHz

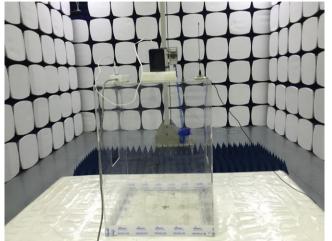

Radiated Spurious Emissions Test Setup Above 1GHz




Test Report	17070102-FCC-R5
Page	155 of 159

# Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

## Annex C.ii. TEST SET UP BLOCK

#### **Block Configuration Diagram for Radiated Emissions**

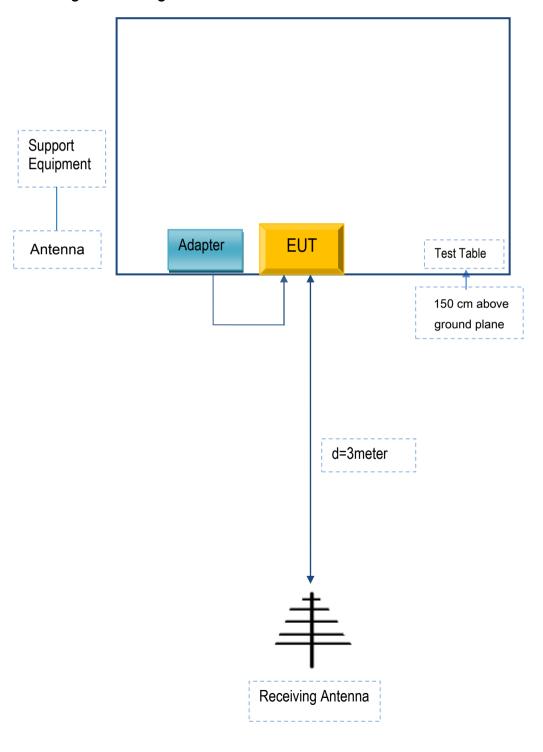



Test Report	17070102-FCC-R5
Page	156 of 159

## Annex C. il. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

## Supporting Equipment:

Manufacturer Equipment Description		Model	Serial No
Verykool USA Inc	Adapter	TPA- 46B050100UU	S20170127

#### Supporting Cable:

Cable type	Shield Type	Ferrite Core	Length	Serial No
USB Cable	Un-shielding	No	0.8m	S20170127



Test Report	17070102-FCC-R5
Page	157 of 159

# Annex C.ii. EUT OPERATING CONKITIONS

N/A



Test Report	17070102-FCC-R5
Page	158 of 159

# Annex D. User Manual / Block Diagram / Schematics / Partlist

Please see the attachment



Test Report	17070102-FCC-R5
Page	159 of 159

# Annex E. DECLARATION OF SIMILARITY

N/A