

Test of: NetScout Systems BCM43460 Enterprise  
Radio Module

To: FCC 47 CFR Part 15.407 & IC RSS-247

Test Report Serial No.: NTCT66-pca 2.1-U5 Rev B



**TEST REPORT**  
FROM  
**MiCOM Labs**

Test of: NetScout Systems BCM43460 Enterprise Radio Module

To

FCC 47 CFR Part 15.407 & IC RSS-247

Test Report Serial No.: NTCT66-pca 2.1-U5 Rev B

Note: this report contains data with regard to the 5150–5250 MHz; 5250-5350 MHz, 5470–5725 MHz and 5725–5850 MHz. 2.4 GHz test data is reported in MiCOM test report NTCT66-pca 2.1-U4

This report supersedes NTCT66-pca 2.1-U5 Rev A

Applicant: NetScout Systems Inc.  
310 Littleton Road  
Westford MA 01886-4105  
USA

Product Function: 802.11 a/b/g/n/ac Wireless Module

Copy No: pdf Issue Date: 26th August 2016

**This Test Report is Issued Under the Authority of:**

**MiCOM Labs, Inc.**

575 Boulder Court  
Pleasanton, CA 94566 USA  
Phone: +1 (925) 462-0304  
Fax: +1 (925) 462-0306  
[www.micomlabs.com](http://www.micomlabs.com)



MiCOM Labs is an ISO 17025 Accredited Testing Laboratory



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 3 of 516

---

This page has been left intentionally blank

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

## TABLE OF CONTENTS

<b>ACCREDITATION, LISTINGS &amp; RECOGNITION.....</b>	<b>6</b>
Testing Accreditation .....	6
Recognition .....	7
Product Certification .....	8
<b>1. TEST RESULT CERTIFICATE.....</b>	<b>10</b>
<b>2. REFERENCES AND MEASUREMENT UNCERTAINTY .....</b>	<b>11</b>
2.1. Normative References .....	11
3.1. Test and Uncertainty Procedures .....	12
<b>4. PRODUCT DETAILS AND TEST CONFIGURATIONS.....</b>	<b>13</b>
4.1. Technical Details .....	13
4.2. Scope of Test Program.....	14
4.3. Equipment Model(s) and Serial Number(s).....	17
4.4. Antenna Details .....	17
4.5. Cabling and I/O Ports .....	18
4.6. Test Configurations .....	18
4.7. Equipment Modifications.....	19
4.8. Deviations from the Test Standard .....	19
4.9. Subcontracted Testing or Third Party Data.....	19
<b>5. TESTING EQUIPMENT CONFIGURATION(S).....</b>	<b>20</b>
5.1. Conducted RF Emission Test Set-up.....	20
5.2. Radiated Spurious Emission Test Set-up .....	22
5.3. ac Wireline Emission Test Set-up .....	24
<b>6. TEST SUMMARY.....</b>	<b>26</b>
<b>7. TEST RESULTS .....</b>	<b>29</b>
7.1. Device Characteristics .....	29
7.1.1. <i>Conducted Testing</i> .....	29
7.1.2. <i>Radiated Emission Testing</i> .....	96
7.1.3. <i>AC Wireline Conducted Emissions (150 kHz – 30 MHz)</i> .....	151
7.1.4. <i>Dynamic Frequency Selection (DFS)</i> .....	154
<b>8. PHOTOGRAPHS .....</b>	<b>164</b>
8.1. Conducted Test Setup .....	164
8.2. Radiated Emissions < 1 GHz.....	165
8.3. Radiated Emissions > 1 GHz.....	166
8.4. AC Wireline Emissions .....	167
8.5. Dynamic Frequency Selection Test Set-Up .....	169
<b>APPENDIX .....</b>	<b>170</b>
<b>A. SUPPORTING INFORMATION .....</b>	<b>170</b>
A.1. CONDUCTED TEST PLOTS .....	170
A.1.1. <i>Peak Power Spectral Density</i> .....	171
A.1.2. <i>Peak Power Spectral Density IC RSS-247</i> .....	318
A.1.3. <i>26 dB &amp; 99% Bandwidth</i> .....	362

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 5 of 516

---

A.2. RADIATED TEST PLOTS.....	476
A.2.1. <i>Radiated Band-Edge</i> .....	476

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 6 of 516

## ACCREDITATION, LISTINGS & RECOGNITION

### Testing Accreditation

MiCOM Labs, Inc. an accredited laboratory complies with the international standard EN ISO/IEC 17025. The company is accredited by the American Association for Laboratory Accreditation (A2LA) [www.a2la.org](http://www.a2la.org) test laboratory number 2381.01. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-01.pdf>



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 7 of 516

## Recognition

MiCOM Labs, Inc has widely recognized Electrical testing capabilities. Our international recognition includes Conformity Assessment Body designation by APEC MRA\*\* countries. Our test reports are widely accepted for global type approvals.

Country	Recognition Body	Status	Phase	Identification No.
model	Federal Communications Commission (FCC)	TCB	-	US0159 Listing #: 102167
Canada	Industry Canada (IC)	FCB	APEC MRA 2	US0159 Listing #: 4143A-2 4143A-3
Japan	MIC (Ministry of Internal Affairs and Communication)	CAB	APEC MRA 2	RCB 210
	VCCI	--	--	A-0012
Europe	European Commission	NB	EU MRA	NB 2280
Australia	Australian Communications and Media Authority (ACMA)	CAB	APEC MRA 1	US0159
Hong Kong	Office of the Telecommunication Authority (OFTA)	CAB	APEC MRA 1	
Korea	Ministry of Information and Communication Radio Research Laboratory (RRL)	CAB	APEC MRA 1	
Singapore	Infocomm Development Authority (IDA)	CAB	APEC MRA 1	
Taiwan	National Communications Commission (NCC) Bureau of Standards, Metrology and Inspection (BSMI)	CAB	APEC MRA 1	
Vietnam	Ministry of Communication (MIC)	CAB	APEC MRA 1	

\*\*APEC MRA – Asia Pacific Economic Community Mutual Recognition Agreement.

Is a recognition agreement under which test lab is accredited to regulatory standards of the APEC member countries.

Phase I - recognition for product testing

Phase II – recognition for both product testing and certification

N/A – Not Applicable

\*\*EU MRA – European Union Mutual Recognition Agreement.

Is a recognition agreement under which test lab is accredited to regulatory standards of the EU member countries.

\*\*NB – Notified Body

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 8 of 516

## Product Certification

MiCOM Labs, Inc. is an accredited Product Certification Body per the international standard ISO/IEC 17065. The company is accredited by the American Association for Laboratory Accreditation (A2LA) [www.a2la.org](http://www.a2la.org) test laboratory number 2381.02. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-02.pdf>



## **Accredited Product Certification Body**

A2LA has accredited

**MICOM LABS**

Pleasanton, CA

This product certification body is accredited in accordance with the recognized International Standard ISO/IEC 17065:2012 *Requirements for bodies certifying products, processes and services*. This accreditation demonstrates technical competence for a defined scope and the operation of a management system.

Presented this 4<sup>th</sup> day of February 2016.

Senior Director of Quality & Communications  
For the Accreditation Council  
Certificate Number 2381.02  
Valid to November 30, 2017



For the product certification schemes to which this accreditation applies, please refer to the organization's Product Certification Scope of Accreditation.

### **United States of America – Telecommunication Certification Body (TCB)**

TCB Identifier – US0159

### **Industry Canada – Certification Body**

CAB Identifier – US0159

### **Europe – Notified Body**

Notified Body Identifier - 2280

### **Japan – Recognized Certification Body (RCB)**

RCB Identifier – 210

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 9 of 516

## DOCUMENT HISTORY

Document History		
Revision	Date	Comments
Draft	14 <sup>th</sup> August 2016	Added separate Integral Antenna (MAF95310)
Draft #2	16 <sup>th</sup> August 2016	Updated Document History (this page) acknowledging the existence of FLUK48-U5
Rev A	18 <sup>th</sup> August 2016	3 <sup>rd</sup> Report Release
Rev B	26 <sup>th</sup> August 2016	IC results added for 5150 - 5250 MHz Band
Report updated and released as FLUK48-U5;		
Rev A	23 <sup>rd</sup> December 2015	Document updated to take into account FCC new rules; 1).. increased power 5150 – 5250 MHz 2).. introduced 5725 – 5850 MHz into the UNII band 3).. additional channel(s) straddling the 5725 MHz band-edge frequency
This document was originally released under MiCOM Labs tracker FLUK14-U6		
Rev B	6 <sup>th</sup> August 2014	EUT model number corrected.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 10 of 516

## 1. TEST RESULT CERTIFICATE

Applicant:	NetScout Systems Inc. 310 Littleton Road Westford MA 01886-4105 USA	Tested By:	MiCOM Labs, Inc. 575 Boulder Court Pleasanton California 94566 USA
EUT:	802.11 a/b/g/n/ac Wireless Module	Tel:	+1 925 462 0304
Model:	BCM43460	Fax:	+1 925 462 0306
S/N:	Engineer Sample		
Test Date(s):	29th April - 8th July 2014, 18th - 25th November 2015, 1-2nd August 2016	Website:	<a href="http://www.micomlabs.com">www.micomlabs.com</a>


STANDARD(S)	TEST RESULTS
FCC 47 CFR Part 15.407 & IC RSS-247	EQUIPMENT COMPLIES

MiCOM Labs, Inc. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

### Notes:

1. This document reports conditions under which testing was conducted and the results of testing performed.
2. Details of test methods used have been recorded and kept on file by the laboratory.
3. Test results apply only to the item(s) tested.

Approved & Released for MiCOM Labs, Inc. by:

  
Graeme Grieve  
Quality Manager MiCOM Labs,

  
ACCREDITED  
TESTING CERT #2381.01  
  
Gordon Hurst  
President & CEO MiCOM Labs, Inc.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 11 of 516

## **2. REFERENCES AND MEASUREMENT UNCERTAINTY**

### **2.1. Normative References**

<b>3. REF.</b>	<b>PUBLICATION</b>	<b>YEAR</b>	<b>TITLE</b>
I	KDB 662911	Oct 31 2013	Guidance for measurement of output emission of devices that employ single transmitter with multiple outputs or systems with multiple transmitters operating simultaneously in the same frequency band
II	KDB 905462 D07 v01	10th June 2015	Test guidance to demonstrate compliance for U-NII devices subject to DFS requirements.
III	KDB 926956 DO1 v01r02	17th October 2014	U-NII Device Transition Plan
IV	KDB 789033 D02 v01	6th June 2014	General UNII Test Procedures New Rules V01
V	A2LA	June 2015	R105 - Requirement's When Making Reference to A2LA Accreditation Status
VI	ANSI C63.10	2013	American National Standard for Testing Unlicensed Wireless Devices
VII	ANSI C63.4	2014	American National Standards for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
VIII	CISPR 22	2008	Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement
IX	ETSI TR 100 028	2001-12	Parts 1 and 2 Electromagnetic compatibility and Radio Spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics
X	FCC 06-96	Jun 3 2006	Memorandum Opinion and Order
XI	FCC 47 CFR Part 15.407	2016	Radio Frequency Devices; Subpart E –Unlicensed National Information Infrastructure Devices
XII	ICES-003	Issue 5 2012	Spectrum Management and Telecommunications; Interference-Causing Equipment Standard. Information Technology Equipment (ITE) – Limits and methods of measurement.
XIII	M 3003	Edition 3 Nov. 2012	Expression of Uncertainty and Confidence in Measurements
XIV	RSS-247 Issue 1	May 2015	Digital Transmission Systems (DTSs), Frequency Hopping System (FHSs) and Licence-Exempt Local Area Network (LE-LEN) Devices
XV	RSS-Gen Issue 4	November 2014	General Requirements and Information for the Certification of Radiocommunication Equipment
XVI	KDB 644545 D03 v01	August 14th 2014	Guidance for IEEE 802.11ac New Rules
XVII	FCC 47 CFR Part 2.1033	2014	FCC requirements and rules regarding photographs and test setup diagrams.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 12 of 516

---

### 3.1. Test and Uncertainty Procedures

Conducted and radiated emission measurements were conducted in accordance with American National Standards Institute ANSI C63.4, listed in the Normative References section of this report.

Measurement uncertainty figures are calculated in accordance with ETSI TR 100 028 Parts 1 and 2.

Measurement uncertainties stated are based on a standard uncertainty multiplied by a coverage factor  $k = 2$ , providing a level of confidence of approximately 95 % in accordance with UKAS document M 3003 listed in the Normative References section of this report.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

## 4. PRODUCT DETAILS AND TEST CONFIGURATIONS

### 4.1. Technical Details

Details	Description
Purpose:	Test of the NetScout Systems BCM43460 Enterprise Radio Module in the frequency ranges 5150 – 5250; 5,250 - 5,350, 5,470 – 5,725 and 5,745 – 5825 MHz to FCC Part 15.407 and Industry Canada RSS-247 regulations.
Applicant:	NetScout Systems Inc. 310 Littleton Road Westford MA 01886-4105,USA
Manufacturer:	USI Universal Scientific Industry Ltd, Taiwan.
Laboratory performing the tests:	MiCOM Labs, Inc. 575 Boulder Court, Pleasanton, California 94566 USA
Test report reference number:	NTCT66-pca 2.1-U5 Rev B
Date EUT received:	20 <sup>th</sup> April 2014, 17 <sup>th</sup> November 2015
Standard(s) applied:	FCC 47 CFR Part 15.407 & IC RSS-247
Dates of test (from - to):	29th April - 8th July 2014, 18th - 25th November 2015, 1-2nd August 2016
No of Units Tested:	Two
Type of Equipment:	802.11a/b/g/n/ac Wireless module 3x3 MIMO
Manufactures Trade Name:	Wireless Lan Client
Model(s):	BCM43460
Location for use:	Indoor only
Declared Frequency Range(s):	5150–5250,5,250-5,350,5470–5725,5725–5850 MHz
Hardware Rev	303
Software Rev	mtool 1.0
Type of Modulation:	Per 802.11 – OFDM
EUT Modes of Operation:	802.11a/n/ac
Declared Nominal Output Power: (Average Power)	5150 – 5250 MHz 802.11a/n/ac: +30.0 dBm 5250 – 5350 MHz 802.11a/n/ac: +23 dBm 5470 – 5725 MHz 802.11a/n/ac: +23 dBm 5725 – 5850 MHz 802.11a/n/ac: +30.0 dBm
Transmit/Receive Operation:	Time Division Duplex
System Beam Forming:	BCM43460 has no capability for antenna beam forming
Rated Input Voltage and Current:	3.3Vdc 1.5 A
Operating Temperature Range:	Declared range 0° to +40°c
ITU Emission Designator:	802.11a 17M1D1D 802.11n HT-20 18M0D1D 802.11n HT-40 36M3D1D 802.11ac-40 36M4D1D 802.11ac-80 75M8D1D
Equipment Dimensions:	29.9mm x 50.8mm x 3.3mm
Weight:	Less than 12 grams
Primary function of equipment:	Wireless network test

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 14 of 516

---

## 4.2. Scope of Test Program

### **NetScout Systems BCM43460 RF Testing**

The scope of the test program was to test the NetScout Systems BCM43460 Enterprise Radio Module, 3x3 Spatial Multiplexing MIMO configurations in the frequency range 5150 – 5250 MHz; 5,250 - 5,350 MHz, 5,470 – 5,725 MHz and 5,745 – 5825 MHz for compliance against FCC 47 CFR Part 15.407 and Industry Canada RSS-247 Issue 1 specifications.

### **FCC OET KDB Implementation**

This test program implements the following FCC KDB – 662911;

#### ***Emissions Testing of Transmitters with Multiple Outputs in the Same Band***


The KDB document provides guidance for measurements of conducted output emissions of devices that employ a single transmitter with multiple outputs in the same band, with the outputs occupying the same or overlapping frequency ranges. It applies to EMC compliance measurements on devices that transmit on multiple antennas simultaneously in the same or overlapping frequency ranges through a coordinated process. Examples include, but are not limited to, devices employing beam forming or multiple-input and multiple-output (MIMO.) This guidance applies to both licensed and unlicensed devices wherever the FCC rules call for conducted output measurements. Guidance is provided for in-band, out-of-band and spurious emission measurements.

This guidance does not apply to the multiple transmitters included in a composite device, such as a device that combines an 802.11 modem with a cell phone in one enclosure with each driving its own antenna.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


NetScout Systems BCM43460 Enterprise Radio Module

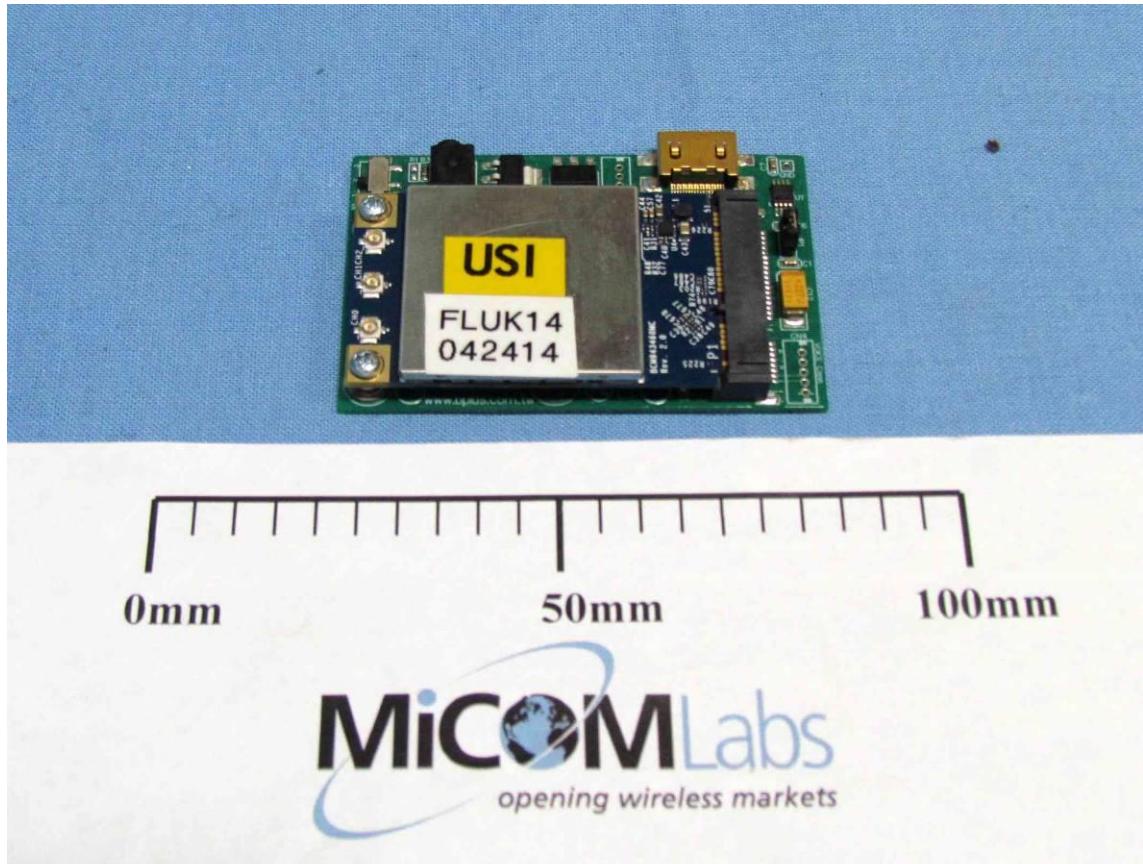

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

NetScout Systems BCM43460 Enterprise Radio Module

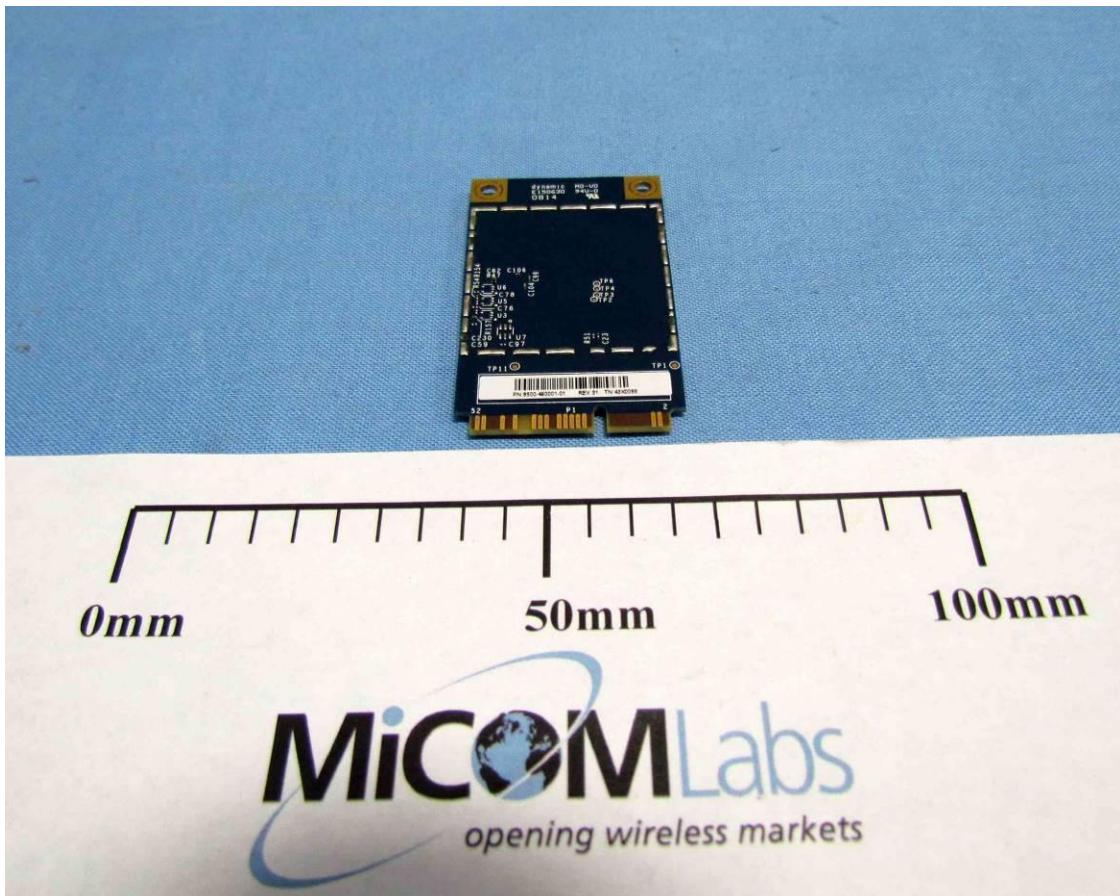

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 17 of 516

#### 4.3. Equipment Model(s) and Serial Number(s)

Type (EUT/Support)	Equipment Description (Including Brand Name)	Mfr	Model No.	Serial No.
EUT	802.11 a/b/g/n/ac Wireless Module	Netscout Systems	BCM43460	000E8E38271E
Support	Laptop PC	IBM	Thinkpad	None
Host*	AirCheck II	Netscout Systems	AirCheck II*	HM10016

\*Used for radiated emissions test program

#### 4.4. Antenna Details

Type	Manufacturer	Model	Family	Gain (dBi)	BF Gain	Dir BW	X-Pol	Frequency Band (MHz)
Integral	Ethertronics	M380510	OMNI	3.2	-	360	-	5150 - 5250
Integral	Ethertronics	M380510	OMNI	3.2	-	360	-	5250 - 5350
Integral	Ethertronics	M380510	OMNI	3.2	-	360	-	5470 - 5725
Integral	Ethertronics	M380510	OMNI	3.2	-	360	-	5725 - 5850
External	Centurion	WTS2450RPSMA	OMNI	2.6	-	360	-	5150 - 5350
External	Centurion	WTS2450RPSMA	OMNI	2.5	-	360	-	5470 - 5875
Integral	NanoGreen	IP04	OMNI	3.1	-	360	-	5150 - 5350
Integral	NanoGreen	IP04	OMNI	4.8	-	360	-	5470 - 5875
External	Wanshah Electric Co	WSS013 Dual Band Antenna	OMNI	2.0	-	360	-	4900 - 5875
Integral	Laird <sup>1</sup>	MAF95310	NanoBlade	3.38	-	360	-	4900 - 5875

BF Gain - Beamforming Gain

Dir BW - Directional BeamWidth

X-Pol - Cross Polarization

<sup>1</sup> - Report updated by adding the MAF95310 antenna, See section 7.1.2

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 18 of 516

#### 4.5. Cabling and I/O Ports

Port Type	Max Cable Length	# Of Ports	Screened	Conn Type	Data Type
USB*	1m	2	Y	USB Type A	Digital
USB*	1m	1	Y	Micro Port	Digital
Mini PCIe	--	1	N	Mini-PCIe	Digital
RF Port	< 1 m	3	Y	UFL	RF Antenna

\*Note: Host Connectors

#### 4.6. Test Configurations

Testing was performed to determine the highest power level versus bit rate. The variant with the highest power was used to exercise the product.

Matrix of test configurations

Operational Mode(s) (802.11a/b/g/n/ac)	Data Rate with Highest Power MBit/s	Channel Frequency (MHz)		
		Low	Mid	High
<b>5150 - 5250 MHz</b>				
802.11a	6.00	5,180.00	5,200.00	5,240.00
802.11ac-80	29.30	5,210.00	--	--
802.11n HT-20	6.50	5,180.00	5,200.00	5,240.00
802.11n HT-40	13.50	5,190.00	--	5,230.00
<b>5250 - 5350 MHz</b>				
802.11a	6.00	5,260.00	5,300.00	5,320.00
802.11ac-80	29.30	5290.00	--	--
802.11n HT-20	6.50	5,260.00	5,300.00	5,320.00
802.11n HT-40	13.50	5,270.00	--	5,310.00
<b>5470 - 5725 MHz</b>				
802.11a	6.00	5,500.00	5,580.00	5,720.00
802.11ac-80	29.30	5,530.00	5,610.00	5,690.00
802.11n HT-20	6.50	5,500.00	5,580.00	5,720.00
802.11n HT-40	13.50	5,510.00	5,550.00	5,710.00
<b>5725 - 5850 MHz</b>				
802.11a	6.00	5,745.00	5,785.00	5,825.00
802.11ac-80	29.30	5,775.00	--	5,775.00
802.11n HT-20	6.50	5,745.00	5,785.00	5,825.00
802.11n HT-40	13.50	5,755.00	--	5,795.00

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 19 of 516

---

#### **4.7. Equipment Modifications**

The following modifications were required to bring the equipment into compliance:

1. NONE

#### **4.8. Deviations from the Test Standard**

The following deviations from the test standard were required in order to complete the test program:

1. NONE

#### **4.9. Subcontracted Testing or Third Party Data**

1. NONE

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


## 5. TESTING EQUIPMENT CONFIGURATION(S)

### 5.1. Conducted RF Emission Test Set-up

The following tests were performed using the conducted test set-up shown in the diagram below.

1. Section 6.1.1.1. 26 dB and 99% Bandwidth
2. Section 6.1.1.2. Maximum Conducted Output Power
3. Section 6.1.1.3. Peak Power Spectral Density

#### Conducted Test Set-Up Pictorial Representation

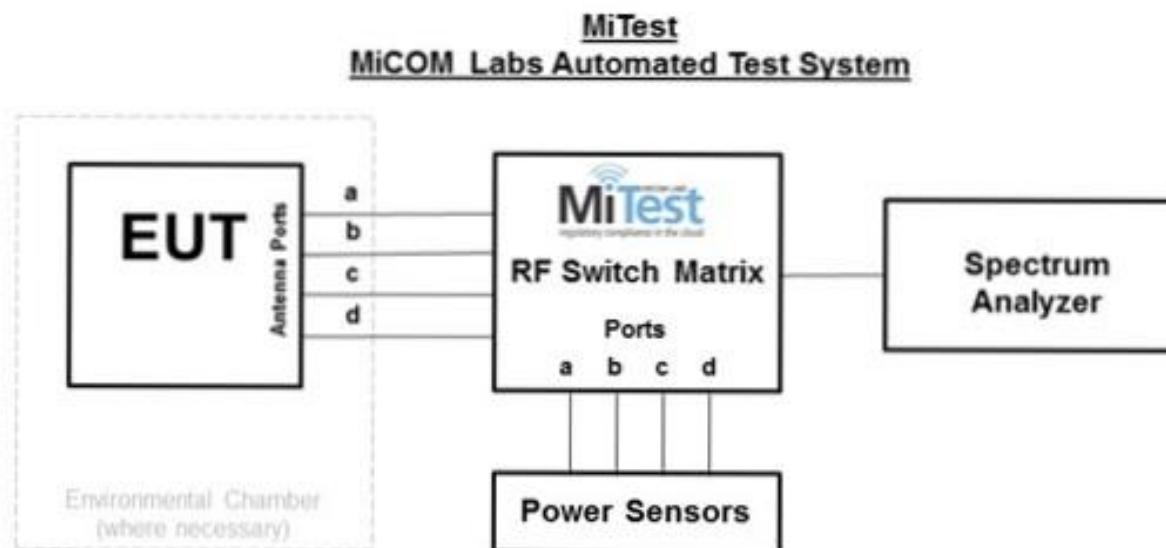

#### Conducted Test Measurement Setup

A full system calibration was performed on the test station and any resulting system losses (or gains) were taken into account in the production of all final measurement data.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 21 of 516

## RF Conducted Test Equipment

Asset#	Description	Manufacturer	Model#	Serial#	Calibration Due Date
127	Power Supply	HP	6674A	US36370530	Cal when used
158	Barometer/Thermometer	Control Company	4196	E2846	01 Dec 2016
193	Receiver 20 Hz to 7 GHz	Rhode & Schwarz	ESI 7	838496/007	17 Oct 2016
248	Resistance Thermometer	Thermotronics	GR2105-02	9340 #1	21 Oct 2016
287	Rohde & Schwarz 40 GHz Receiver	Rhode & Schwarz	ESIB40	100201	27 Aug 2016
376	USB 10MHz - 18GHz Average Power Sensor	Agilent	U2000A	MY51440005	23 Oct 2016
381	4x4 RF Switch Box	MiCOM Labs	MiTest RF Switch Box	MIC002	20 Dec 2015
419	Laptop with Labview Software	Lenova	W520	TS02	Not Required
420	USB to GPIB Interface	National Instruments	GPIB-USB HS	1346738	Not Required
435	USB Wideband Power Sensor	Boonton	55006	8730	31 Aug 2016
440	USB Wideband Power Sensor	Boonton	55006	9178	25 Sep 2016
441	USB Wideband Power Sensor	Boonton	55006	9179	25 Sep 2016
442	USB Wideband Power Sensor	Boonton	55006	9181	25 Sep 2016
445	PoE Injector	D-Link	DPE-101GL	QTAH1E2000625	Not Required
460	Dell Computer	Dell	Optiplex330	BC944G1	Not Required
74	Environmental Chamber 3	Tenney	TTC	12808-1	30 Sep 2016
RF#2 GPIB#1	GPIB cable to Power Supply	HP	GPIB	None	Not Required
RF#2 SMA#1	EUT to Mitest box port 1	Flexco	SMA Cable port1	None	18 Nov 2016
RF#2 SMA#2	EUT to Mitest box port 2	Flexco	SMA Cable port2	None	18 Nov 2016
RF#2 SMA#3	EUT to Mitest box port 3	Flexco	SMA Cable port3	None	18 Nov 2016
RF#2 SMA#4	EUT to Mitest box port 4	Flexco	SMA Cable port4	None	18 Nov 2016
RF#2 SMA#SA	Mitest box to SA	Flexco	SMA Cable SA	None	18 Nov 2016
RF#2 USB#1	USB Cable to Mitest Box	Dynex	USB Cable	None	Not Required


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

## 5.2. Radiated Spurious Emission Test Set-up

The following tests were performed using the conducted test set-up shown in the diagram below.

### 1. Section 7.1.2 Radiated Emissions

#### Radiated Emission Measurement Setup

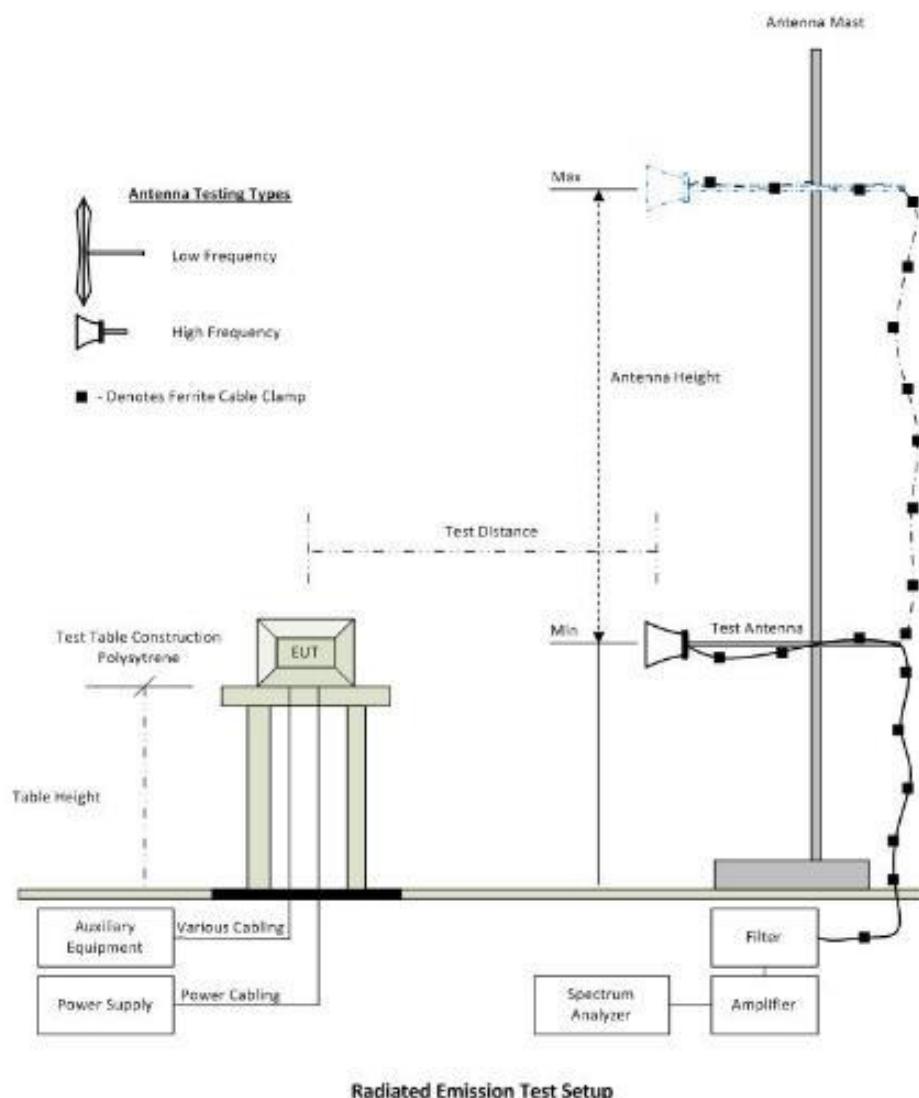

A full system calibration was performed on the test station and any resulting system losses (or gains) were taken into account in the production of all final measurement data.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 23 of 516

#### Radiated Test Equipment

Asset#	Description	Manufacturer	Model#	Serial#	Calibration Due Date
158	Barometer/Thermometer	Control Company	4196	E2846	01 Dec 2016
170	Video System Controller for Semi Anechoic Chamber	Panasonic	WV-CY101	04R08507	Not Required
287	Rohde & Schwarz 40 GHz Receiver	Rhode & Schwarz	ESIB40	100201	2 May 2017
338	Sunol 30 to 3000 MHz Antenna	Sunol	JB3	A052907	15 Aug 2016
377	Band Rejection Filter 5150 to 5880MHz	Microtronics	BRM50716	034	18 Aug 2016
397	Amp 10 - 2500MHz	MiCOM Labs	Amp 10 - 2500 MHz	NA	09 Jun 2017
399	ETS 1-18 GHz Horn Antenna	ETS	3117	00154575	10 Oct 2016
406	Amplifier for Radiated Emissions	MiCOM Labs	40dB 1 to 18GHz Amp	0406	09 Jun 2017
410	Desktop Computer	Dell	Inspiron 620	WS38	Not Required
411	Mast/Turntable Controller	Sunol Sciences	SC98V	060199-1D	Not Required
412	USB to GPIB Interface	National Instruments	GPIB-USB HS	11B8DC2	Not Required
413	Mast Controller	Sunol Science	TWR95-4	030801-3	Not Required
414	DC Power Supply 0-60V	HP	6274	1029A01285	Cal when used
415	Turntable Controller	Sunol Sciences	Turntable Controller	None	Not Required
447	Rad Emissions Test Software	MiCOM	Rad Emissions Test Software Version 1.0.73	447	Not Required
462	Schwarzbeck cable from Antenna to Amplifier.	Schwarzbeck	AK 9513	462	31 May 2017
463	Schwarzbeck cable from Amplifier to Bulkhead.	Schwarzbeck	AK 9513	463	31 May 2017
464	Schwarzbeck cable from Bulkhead to Receiver	Schwarzbeck	AK 9513	464	31 May 2017
465	Low Pass Filter DC-1000 MHz	Mini-Circuits	NLP-1200+	VUU01901402	02 Jun 2017
480	Cable - Bulkhead to Amp	SRC Haverhill	157-157-3050360	480	02 Jun 2017
481	Cable - Bulkhead to Receiver	SRC Haverhill	151-151-3050787	481	02 Jun 2017
482	Cable - Amp to Antenna	SRC Haverhill	157-157-3051574	482	02 Jun 2017
502	Test Software for Radiated Emissions	EMISoft	Vasona	Version 5 Build 59	Not Required
CC05	Confidence Check	MiCOM	CC05	None	26 Oct 2016


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### 5.3. ac Wireline Emission Test Set-up

The following tests were performed using the conducted test set-up shown in the diagram below.

#### 1. Section 6.1.3 ac Wireline Conducted Emissions

### Test Measurement Set up

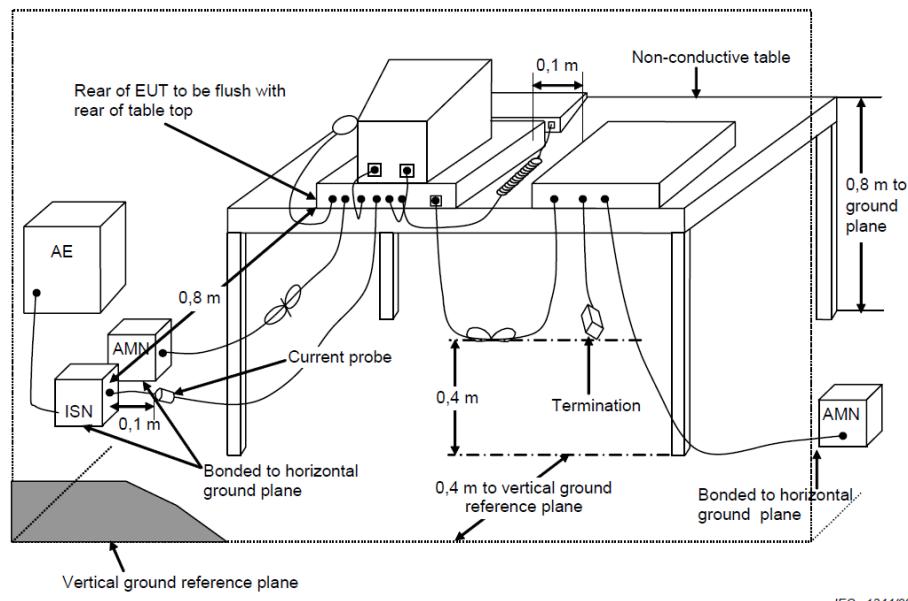

Measurement set up for AC Wireline Conducted Emissions Test

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 25 of 516

Asset#	Description	Manufacturer	Model#	Serial#	Calibration Due Date
158	Barometer/Thermometer	Control Company	4196	E2846	01 Dec 2016
184	Pulse Limiter	Rhode & Schwarz	ESH3Z2	357.8810.52	27 Oct 2016
190	LISN (two-line V-network)	Rhode & Schwarz	ESH3Z5	836679/006	29 Oct 2016
193	Receiver 20 Hz to 7 GHz	Rhode & Schwarz	ESI 7	838496/007	17 Oct 2016
307	BNC-CABLE	Megaphase	1689 1GVT4	15F50B002	27 Oct 2016
316	Dell desktop computer workstation with Vasona	Dell	Desktop	WS04	Not Required
372	AC Variable PS	California Instruments	1251P	L06951	Cal when used
388	LISN (3 Phase) 9kHz - 30MHz	Rohde & Schwarz	ESH2-Z5	892107/022	30 Oct 2016
ADAPT SMA#1	SMA Cable	Megaphase	SMA Cable #1	None	Cal when used

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 26 of 516

## 6. TEST SUMMARY

### List of Measurements

The following table represents the list of measurements required under the **FCC CFR47 Part 15.407** and **Industry Canada RSS-247** and **Industry Canada RSS-Gen**.

Section(s)	Test Items	Description	Condition	Result	Test Report Section
<b>15.407(a) A9.2(2) 4.6</b>	Maximum Conducted Output Power	Power Measurement	Conducted	Complies	7.1.1.1
<b>15.407(a) A9.2(2)</b>	Peak Power Spectral Density	PPSD	Conducted	Complies	7.1.1.2 (A.1.1)
<b>15.407(a) A9.2(2) 4.4</b>	26dB and 99% Emission BW	Emission bandwidth measurement	Conducted	Complies	7.1.1.3 (A.1.2)
<b>15.407(g) 15.31 2.1 4.5</b>	Frequency Stability	Limits: contained within band of operation at all times.	Applicant declaration	Complies	7.1.1.4

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 27 of 516

### List of Measurements (continued)

The following table represents the list of measurements required under the **FCC CFR 47 Part 15.407** and **Industry Canada RSS-247** and **Industry Canada RSS-Gen**.

Section(s)	Test Items	Description	Condition	Result	Test Report Section
<b>15.407(b)(2)</b> <b>15.205(a)</b> <b>15.209(a)</b> <b>2.2</b> <b>2.6</b> <b>A9.3(2)</b> <b>4.7</b>	Radiated Emissions		Radiated		7.1.2
	Transmitter Radiated Spurious Emissions	Emissions above 1 GHz		Complies	
	Radiated Band Edge	Band edge results		Complies	
<b>15.407(b)(6)</b> <b>15.205(a)</b> <b>15.209(a)</b> <b>2.2</b>	Radiated Emissions	Emissions <1 GHz (30M-1 GHz)		Complies	7.1.2.4
<b>15.407(b)(6)</b> <b>15.207</b> <b>7.2.2</b>	AC Wireline Conducted Emissions 150 kHz–30 MHz	Conducted Emissions	Conducted	Complies	7.1.3

Note 1: Test results reported in this document relate only to the items tested

Note 2: The required tests demonstrated compliance as per client declaration of test configuration, monitoring methodology and associated pass/fail criteria

Note 3: Section 4.7 Equipment Modifications highlights the equipment modifications that were required to bring the product into compliance with the above test matrix

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 28 of 516

## List of Measurements (cont'd)

### Dynamic Frequency Selection (DFS)

The following table represents the list of measurements required under the **FCC CFR47 Part 15.407(h)(2)** and **FCC Memorandum Opinion and Order FCC 06-96 (Compliance Measurement procedures for Unlicensed National Information Infrastructure devices operating in the 5250-5350 MHz and 5470-5725 MHz bands incorporating dynamic frequency selection).**

### Tests performed on Client Device with no radar detection

Section	Test Items	Description	Condition	Result	Test Report Section
	DFS	Dynamic Frequency Selection	Conducted	Complies	7.1.4
7.8.1	Detection Bandwidth	UNII Detection Bandwidth	Conducted	Not Applicable	
7.8.2.1	Performance Requirements Check	Initial Channel Availability Check Time	Conducted	Not Applicable	
7.8.2.2		Radar Burst at the Beginning of the Channel Availability Check Time	Conducted	Not Applicable	
7.8.2.3		Radar Burst at the End of the Channel Availability Check Time	Conducted	Not Applicable	
7.8.3	In-Service Monitoring	In-Service Monitoring for Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period	Conducted	Complies	
7.8.4	Radar Detection	Statistical Performance Check	Conducted	Not Applicable	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



## 7. TEST RESULTS

### 7.1. Device Characteristics

#### 7.1.1. Conducted Testing

##### 7.1.1.1. Maximum Conducted Output Power

###### Specification Limit

Conducted Test Conditions for Maximum Conducted Output Power			
<b>Standard:</b>	FCC CFR 47:15.407	<b>Ambient Temp. (°C):</b>	24.0 - 27.5
<b>Test Heading:</b>	Maximum Conducted Output Power	<b>Rel. Humidity (%):</b>	32 - 45
<b>Standard Section(s):</b>	15.407 (a)	<b>Pressure (mBars):</b>	999 - 1001
<b>Reference Document(s):</b>	See Normative References		

###### Test Procedure for Maximum Conducted Output Power Measurement

Method PM (Measurement using an RF average power meter). KDB 789033 defines a methodology using an average wideband power meter. Measurements were made while the EUT was operating in a continuous transmission mode (100% duty cycle) at the appropriate center frequency. All operational modes and frequency bands were measured independently and the resultant calculated. Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured and reported separately. A summation ( $\Sigma$ ) of each antenna port output power is provided which includes any offset due to Duty Cycle Correction Factor (DCCF). Testing was performed under ambient conditions at nominal voltage.

Test configuration and setup used for the measurement was per the Conducted Test Set-up section specified in this document.

Supporting Information

Calculated Power =  $A + G + Y + 10 \log(1/x)$  dBm

$A$  = Total Power  $[10^{\log(A)} + 10^{\log(G)} + 10^{\log(Y)} + 10^{\log(1/x)}]$

$G$  = Antenna Gain

$Y$  = Beamforming Gain

$x$  = Duty Cycle (average power measurements only)

###### Limits Maximum Conducted Output Power

###### Operating Frequency Band 5150-5250 MHz

###### 15.407 (a)(1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 30 of 516

transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **Operating Frequency Band 5250-5350 and 5470 – 5725 MHz**

##### **15. 407 (a)(2)**

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **Operating Frequency Band 5725 – 5850 MHz**

##### **15. 407 (a)(3)**

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 31 of 516

Equipment Configuration for Peak Transmit Power			
<b>Variant:</b>	802.11a	<b>Duty Cycle (%):</b>	94.0
<b>Data Rate:</b>	6.00 MBit/s	<b>Antenna Gain (dBi):</b>	2.60
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

Test Measurement Results									
Test Frequency	Measured Conducted Output Power + DCCF (+0.27 dB) (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	Margin	
	Port(s)								
MHz	a	b	c	d	$\Sigma$ Port(s) dBm	MHz	dBm	dB	
5180.0	17.68	17.72	17.96	--	22.56	--	24.00	-1.44	68.00
5200.0	17.63	17.67	17.76	--	22.46	--	24.00	-1.54	68.00
5240.0	17.46	17.50	17.72	--	22.33	--	24.00	-1.67	68.00

Traceability to Industry Recognized Test Methodologies								
		Work Instruction: WI-01 MEASURING RF OUTPUT POWER						
		Measurement Uncertainty: $\pm 1.33$ dB						

DCCF - Duty Cycle Correction Factor

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 32 of 516

Equipment Configuration for Peak Transmit Power			
<b>Variant:</b>	802.11ac-80	<b>Duty Cycle (%):</b>	85.0
<b>Data Rate:</b>	29.30 MBit/s	<b>Antenna Gain (dBi):</b>	2.60
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

Test Measurement Results									
Test Frequency	Measured Conducted Output Power + DCCF (+0.71 dB) (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	$\Sigma$ Port(s) dBm	MHz	dBm	dB	
5210.0	18.32	18.26	18.54	--	23.14	--	24.00	-0.86	70.00

Traceability to Industry Recognized Test Methodologies							
Work Instruction:		WI-01 MEASURING RF OUTPUT POWER					
Measurement Uncertainty:		±1.33 dB					

DCCF - Duty Cycle Correction Factor

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 33 of 516

#### Equipment Configuration for Peak Transmit Power

<b>Variant:</b>	802.11n HT-20	<b>Duty Cycle (%):</b>	94.0
<b>Data Rate:</b>	6.50 MBit/s	<b>Antenna Gain (dBi):</b>	2.60
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

<b>Test Frequency</b>	<b>Measured Conducted Output Power + DCCF (+0.27 dB) (dBm)</b>				<b>Calculated Total Power</b>	<b>Minimum 26 dB Bandwidth</b>	<b>Limit</b>	<b>Margin</b>	<b>EUT Power Setting</b>
	<b>Port(s)</b>								
<b>MHz</b>	<b>a</b>	<b>b</b>	<b>c</b>	<b>d</b>	<b><math>\Sigma</math> Port(s) dBm</b>	<b>MHz</b>	<b>dBm</b>	<b>dB</b>	
<b>5180.0</b>	17.76	17.54	18.05	--	22.56	--	24.00	-1.44	70.00
<b>5200.0</b>	17.63	17.52	17.84	--	22.44	--	24.00	-1.56	70.00
<b>5240.0</b>	17.75	17.82	17.83	--	22.57	--	24.00	-1.43	70.00

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

DCCF - Duty Cycle Correction Factor

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 34 of 516

Equipment Configuration for Peak Transmit Power			
<b>Variant:</b>	802.11n HT-40	<b>Duty Cycle (%):</b>	85.0
<b>Data Rate:</b>	13.50 MBit/s	<b>Antenna Gain (dBi):</b>	2.60
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

Test Measurement Results									
Test Frequency	Measured Conducted Output Power + DCCF (+0.71 dB) (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	$\Sigma$ Port(s) dBm	MHz	dBm	dB	
5190.0	18.40	18.26	18.64	--	23.20	--	24.00	-0.80	72.00
5230.0	18.18	18.34	18.40	--	23.07	--	24.00	-0.93	72.00

Traceability to Industry Recognized Test Methodologies							
Work Instruction:	WI-01 MEASURING RF OUTPUT POWER						
Measurement Uncertainty:	±1.33 dB						

DCCF - Duty Cycle Correction Factor

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 35 of 516

#### Equipment Configuration for Peak Transmit Power

<b>Variant:</b>	802.11a	<b>Duty Cycle (%):</b>	94.0
<b>Data Rate:</b>	6.00 MBit/s	<b>Antenna Gain (dBi):</b>	2.60
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

<b>Test Frequency</b>	<b>Measured Conducted Output Power + DCCF (+0.27 dB) (dBm)</b>				<b>Calculated Total Power</b>	<b>Minimum 26 dB Bandwidth</b>	<b>Limit</b>	<b>Margin</b>	<b>EUT Power Setting</b>
	<b>Port(s)</b>								
<b>MHz</b>	<b>a</b>	<b>b</b>	<b>c</b>	<b>d</b>	$\Sigma$ <b>Port(s) dBm</b>	<b>MHz</b>	<b>dBm</b>	<b>dBm</b>	
<b>5260.0</b>	17.83	17.89	16.96	--	22.62	41.884	24.00	-1.38	80.00
<b>5300.0</b>	17.96	17.87	17.08	--	22.70	41.583	24.00	-1.30	80.00
<b>5320.0</b>	18.02	17.76	17.14	--	22.70	40.982	24.00	-1.30	80.00

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 36 of 516

#### Equipment Configuration for Peak Transmit Power

<b>Variant:</b>	802.11ac-80	<b>Duty Cycle (%):</b>	85
<b>Data Rate:</b>	29.30 MBit/s	<b>Antenna Gain (dBi):</b>	2.60
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

<b>Test Frequency</b>	<b>Measured Conducted Output Power + DCCF (+0.71 dB) (dBm)</b>				<b>Calculated Total Power</b>	<b>Minimum 26 dB Bandwidth</b>	<b>Limit</b>	<b>Margin</b>	<b>EUT Power Setting</b>
	<b>Port(s)</b>								
<b>MHz</b>	<b>a</b>	<b>b</b>	<b>c</b>	<b>d</b>	<b><math>\Sigma</math> Port(s) dBm</b>	<b>MHz</b>	<b>dBm</b>	<b>dBm</b>	
<b>5290.0</b>	18.90	18.90	17.41	--	23.23	195.992	24.00	-0.77	82.00

#### Traceability to Industry Recognized Test Methodologies

<b>Work Instruction:</b>	WI-03 MEASURING RF SPECTRUM MASK
<b>Measurement Uncertainty:</b>	±2.81 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 37 of 516

#### Equipment Configuration for Peak Transmit Power

<b>Variant:</b>	802.11n HT-20	<b>Duty Cycle (%):</b>	94
<b>Data Rate:</b>	6.50 MBit/s	<b>Antenna Gain (dBi):</b>	2.60
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

<b>Test Frequency</b>	<b>Measured Conducted Output Power + DCCF (+0.27 dB) (dBm)</b>				<b>Calculated Total Power</b>	<b>Minimum 26 dB Bandwidth</b>	<b>Limit</b>	<b>Margin</b>	<b>EUT Power Setting</b>
	<b>Port(s)</b>								
<b>MHz</b>	<b>a</b>	<b>b</b>	<b>c</b>	<b>d</b>	$\Sigma$ Port(s) dBm	MHz	dBm	dBm	
<b>5260.0</b>	19.42	17.85	18.22	--	23.32	42.385	24.00	-0.68	82.00
<b>5300.0</b>	19.86	17.78	17.28	--	23.23	44.389	24.00	-0.77	80.00
<b>5320.0</b>	20.02	17.85	17.26	--	23.32	19.940	24.00	-0.68	80.00

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 38 of 516

#### Equipment Configuration for Peak Transmit Power

<b>Variant:</b>	802.11n HT-40	<b>Duty Cycle (%):</b>	85
<b>Data Rate:</b>	13.50 MBit/s	<b>Antenna Gain (dBi):</b>	2.60
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

<b>Test Frequency</b>	<b>Measured Conducted Output Power + DCCF (+0.71 dB) (dBm)</b>				<b>Calculated Total Power</b>	<b>Minimum 26 dB Bandwidth</b>	<b>Limit</b>	<b>Margin</b>	<b>EUT Power Setting</b>
	<b>Port(s)</b>								
<b>MHz</b>	<b>a</b>	<b>b</b>	<b>c</b>	<b>d</b>	$\Sigma$ <b>Port(s) dBm</b>	<b>MHz</b>	<b>dBm</b>	<b>dBm</b>	
<b>5270.0</b>	19.71	19.01	18.89	--	23.99	45.691	24.00	-0.01	84.00
<b>5310.0</b>	19.30	19.12	18.83	--	23.86	45.691	24.00	-0.14	84.00

#### Traceability to Industry Recognized Test Methodologies

<b>Work Instruction:</b>	WI-03 MEASURING RF SPECTRUM MASK
<b>Measurement Uncertainty:</b>	±2.81 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 39 of 516

#### Equipment Configuration for Peak Transmit Power

<b>Variant:</b>	802.11a	<b>Duty Cycle (%):</b>	94.0
<b>Data Rate:</b>	6.00 MBit/s	<b>Antenna Gain (dBi):</b>	2.50
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

<b>Test Frequency</b>	<b>Measured Conducted Output Power + DCCF (+0.27 dB) (dBm)</b>				<b>Calculated Total Power</b>	<b>Minimum 26 dB Bandwidth</b>	<b>Limit</b>	<b>Margin</b>	<b>EUT Power Setting</b>
	<b>Port(s)</b>								
<b>MHz</b>	<b>a</b>	<b>b</b>	<b>c</b>	<b>d</b>	$\Sigma$ Port(s) dBm	MHz	dBm	dBm	
<b>5500.0</b>	18.09	17.85	19.12	--	23.16	34.369	24.00	-0.84	80.00
<b>5580.0</b>	17.51	17.76	18.36	--	22.66	35.972	24.00	-1.34	80.00
<b>5720.0</b>	17.14	17.12	17.79	--	22.13	36.072	24.00	-1.87	80.00

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 40 of 516

Equipment Configuration for Peak Transmit Power			
<b>Variant:</b>	802.11ac-80	<b>Duty Cycle (%):</b>	85.0
<b>Data Rate:</b>	29.30 MBit/s	<b>Antenna Gain (dBi):</b>	2.50
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

Test Measurement Results									
Test Frequency	Measured Conducted Output Power + DCCF (+0.71 dB) (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	Margin	
	Port(s)								
MHz	a	b	c	d	$\Sigma$ Port(s) dBm	MHz	dBm	dB	
5530.0	19.44	18.64	19.09	--	23.84	145.491	24.00	-0.16	70.00
5610.0	19.39	18.70	19.26	--	23.89	147.896	24.00	-0.11	70.00
5690.0	19.35	18.87	19.40	--	23.98	145.491	24.00	-0.02	70.00

Traceability to Industry Recognized Test Methodologies									
Work Instruction:		WI-03 MEASURING RF SPECTRUM MASK							
Measurement Uncertainty:		$\pm 2.81$ dB							

DCCF - Duty Cycle Correction Factor

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 41 of 516

#### Equipment Configuration for Peak Transmit Power

<b>Variant:</b>	802.11n HT-20	<b>Duty Cycle (%):</b>	94
<b>Data Rate:</b>	6.50 MBit/s	<b>Antenna Gain (dBi):</b>	2.50
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

<b>Test Frequency</b>	<b>Measured Conducted Output Power + DCCF (+0.27 dB) (dBm)</b>				<b>Calculated Total Power</b>	<b>Minimum 26 dB Bandwidth</b>	<b>Limit</b>	<b>Margin</b>	<b>EUT Power Setting</b>
	<b>Port(s)</b>								
<b>MHz</b>	<b>a</b>	<b>b</b>	<b>c</b>	<b>d</b>	$\Sigma$ <b>Port(s) dBm</b>	<b>MHz</b>	<b>dBm</b>	<b>dBm</b>	
<b>5500.0</b>	19.56	17.49	19.02	--	23.55	38.277	24.00	-0.45	80.00
<b>5580.0</b>	18.95	17.38	18.34	--	23.04	38.377	24.00	-0.96	80.00
<b>5720.0</b>	18.49	16.77	18.06	--	22.60	37.876	24.00	-1.40	80.00

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 42 of 516

#### Equipment Configuration for Peak Transmit Power

<b>Variant:</b>	802.11n HT-40	<b>Duty Cycle (%):</b>	85
<b>Data Rate:</b>	13.5 MBit/s	<b>Antenna Gain (dBi):</b>	2.50
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

<b>Test Frequency</b>	<b>Measured Conducted Output Power + DCCF (+0.27 dB) (dBm)</b>				<b>Calculated Total Power</b>	<b>Minimum 26 dB Bandwidth</b>	<b>Limit</b>	<b>Margin</b>	<b>EUT Power Setting</b>
	<b>Port(s)</b>								
<b>MHz</b>	<b>a</b>	<b>b</b>	<b>c</b>	<b>d</b>	$\Sigma$ Port(s) dBm	MHz	dBm	dBm	
<b>5510.0</b>	18.95	18.67	18.32	--	23.43	89.379	24.00	-0.57	84.00
<b>5550.0</b>	18.70	18.76	18.30	--	23.36	88.778	24.00	-0.64	84.00
<b>5710.0</b>	18.10	18.42	17.59	--	22.82	87.375	24.00	-1.18	84.00

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 43 of 516

Equipment Configuration for Peak Transmit Power			
<b>Variant:</b>	802.11a	<b>Duty Cycle (%):</b>	94.0
<b>Data Rate:</b>	6.00 MBit/s	<b>Antenna Gain (dBi):</b>	2.50
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

Test Measurement Results									
Test Frequency	Measured Conducted Output Power + DCCF (+0.27 dB) (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	Margin	
	Port(s)								
MHz	a	b	c	d	$\Sigma$ Port(s) dBm	MHz	dBm	dB	
5745.0	20.83	20.46	20.68	--	25.43	--	30.00	-4.57	88.00
5785.0	20.68	20.42	20.51	--	25.31	--	30.00	-4.69	88.00
5825.0	20.97	20.48	20.56	--	25.45	--	30.00	-4.55	88.00

Traceability to Industry Recognized Test Methodologies									
Work Instruction:		WI-03 MEASURING RF SPECTRUM MASK							
Measurement Uncertainty:		$\pm 2.81$ dB							

DCCF - Duty Cycle Correction Factor

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 44 of 516

Equipment Configuration for Peak Transmit Power			
<b>Variant:</b>	802.11ac-80	<b>Duty Cycle (%):</b>	85.0
<b>Data Rate:</b>	29.30 MBit/s	<b>Antenna Gain (dBi):</b>	2.50
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

Test Measurement Results									
Test Frequency	Measured Conducted Output Power + DCCF (+0.71 dB) (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	Margin	
	Port(s)								
MHz	a	b	c	d	$\Sigma$ Port(s) dBm	MHz	dBm	dB	
5775.0	21.18	20.62	20.86	--	25.66	--	30.00	-4.34	88.00

Traceability to Industry Recognized Test Methodologies								
		Work Instruction: WI-03 MEASURING RF SPECTRUM MASK						
		Measurement Uncertainty: $\pm 2.81$ dB						

DCCF - Duty Cycle Correction Factor

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 45 of 516

Equipment Configuration for Peak Transmit Power			
<b>Variant:</b>	802.11n HT-20	<b>Duty Cycle (%):</b>	94.0
<b>Data Rate:</b>	6.50 MBit/s	<b>Antenna Gain (dBi):</b>	2.50
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

Test Measurement Results									
Test Frequency	Measured Conducted Output Power + DCCF (+0.27 dB) (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	Margin	
	Port(s)								
MHz	a	b	c	d	$\Sigma$ Port(s) dBm	MHz	dBm	dB	
5745.0	20.56	20.33	20.37	--	25.19	--	30.00	-4.81	88.00
5785.0	20.62	20.17	20.30	--	25.14	--	30.00	-4.86	88.00
5825.0	20.95	20.55	20.57	--	25.46	--	30.00	-4.54	88.00

Traceability to Industry Recognized Test Methodologies								
		Work Instruction: WI-03 MEASURING RF SPECTRUM MASK						
		Measurement Uncertainty: $\pm 2.81$ dB						

DCCF - Duty Cycle Correction Factor

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 46 of 516

Equipment Configuration for Peak Transmit Power			
<b>Variant:</b>	802.11n HT-40	<b>Duty Cycle (%):</b>	85.0
<b>Data Rate:</b>	13.50 MBit/s	<b>Antenna Gain (dBi):</b>	2.50
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

Test Measurement Results									
Test Frequency	Measured Conducted Output Power + DCCF (+0.71 dB) (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	Margin	
	Port(s)								
MHz	a	b	c	d	$\Sigma$ Port(s) dBm	MHz	dBm	dB	
5755.0	20.96	20.42	20.87	--	25.52	--	30.00	-4.48	80.00
5795.0	20.93	20.43	20.72	--	25.47	--	30.00	-4.53	80.00

Traceability to Industry Recognized Test Methodologies								
Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK							
Measurement Uncertainty:	±2.81 dB							

DCCF - Duty Cycle Correction Factor

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 47 of 516

### 7.1.1.2. Maximum Conducted Output Power IC RSS-247 for 5150 – 5250 MHz band.

Conducted Test Conditions for Maximum Conducted Output Power			
<b>Standard:</b>	Industry Canada RSS-247	<b>Ambient Temp. (°C):</b>	24.0 - 27.5
<b>Test Heading:</b>	Maximum Conducted Output Power	<b>Rel. Humidity (%):</b>	32 - 45
<b>Standard Section(s):</b>	6.2.1 (1), 6.2.4 (1)	<b>Pressure (mBars):</b>	999 - 1001
<b>Reference Document(s):</b>	See Normative References		

#### Test Procedure for Maximum Conducted Output Power Measurement

Method PM (Measurement using an RF average power meter). KDB 789033 defines a methodology using an average wideband power meter. Measurements were made while the EUT was operating in a continuous transmission mode (100% duty cycle) at the appropriate center frequency. All operational modes and frequency bands were measured independently and the resultant calculated. Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured and reported separately. A summation ( $\Sigma$ ) of each antenna port output power is provided which includes any offset due to Duty Cycle Correction Factor (DCCF). Testing was performed under ambient conditions at nominal voltage.

Test configuration and setup used for the measurement was per the Conducted Test Set-up section specified in this document.

#### Supporting Information

$$\text{Calculated Power} = A + G + Y + 10 \log (1/x) \text{ dBm}$$

$$A = \text{Total Power} [10^{\text{Log10}} (10^{a/10} + 10^{b/10} + 10^{c/10} + 10^{d/10})]$$

$$G = \text{Antenna Gain}$$

$$Y = \text{Beamforming Gain}$$

$$x = \text{Duty Cycle (average power measurements only)}$$

#### Limits Maximum Conducted Output Power

##### 6.2.1 Operating Frequency Band 5150-5250 MHz

###### (1) Power Limits

The maximum e.i.r.p. shall not exceed 200 mW or  $10 + 10 \log_{10} B$ , dBm, whichever power is less. B is the 99% emission bandwidth in megahertz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band

##### 6.2.2 Operating Frequency Band 5250-5350 MHz

###### (1) Power Limits

The maximum conducted output power shall not exceed 250 mW or  $11 + 10 \log_{10} B$ , dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

The maximum e.i.r.p. shall not exceed 1.0 W or  $17 + 10 \log_{10} B$ , dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

##### 6.2.3 Operating Frequency Band 5470 – 5600 and 5650 – 5725 MHz

Until further notice, devices subject to this section shall not be capable of transmitting in the band 5600-5650 MHz. This restriction is for the protection of Environment Canada's weather radars operating in this band

###### (1) Power Limits

The maximum conducted output power shall not exceed 250 mW or  $11 + 10 \log_{10} B$ , dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band. The maximum e.i.r.p. shall not exceed 1.0 W or  $17 + 10 \log_{10} B$ , dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

##### 6.2.4 Operating Frequency Band 5725-5850 MHz

###### (1) Power Limits

For equipment operating in the band 5725-5850 MHz, the minimum 6 dB bandwidth shall be at least 500 kHz.

The maximum conducted output power shall not exceed 1 W. The power spectral density shall not exceed 30 dBm in any 500 kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 48 of 516

---

corresponding reduction in transmitter conducted power. Fixed point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications and multiple collocated transmitters transmitting the same information.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 49 of 516

**Equipment Configuration for Peak Transmit Power**

<b>Variant:</b>	802.11a	<b>Duty Cycle (%):</b>	94
<b>Data Rate:</b>	6 MBit/s	<b>Antenna Gain (dBi):</b>	2.00
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	N/A
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

<b>Test Frequency</b>	<b>Measured Conducted Output Power (dBm)</b>				<b>Calculated Total Power</b>	<b>Calculated Total EIRP</b>	<b>EIRP Limit</b>	<b>Margin</b>	<b>EUT Power Setting</b>
	<b>Port(s)</b>								
<b>MHz</b>	<b>a</b>	<b>b</b>	<b>c</b>	<b>d</b>	$\Sigma$ Port(s) dBm	dBm	dBm	dBm	
<b>5180.0</b>	10.62	11.26	10.43		15.56	17.56	23	-5.44	46
<b>5200.0</b>	10.20	10.98	10.25		15.26	17.26	23	-5.74	46
<b>5240.0</b>	10.24	10.96	10.10		15.22	17.22	23	-5.78	46

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 50 of 516

#### Equipment Configuration for Peak Transmit Power

<b>Variant:</b>	802.11ac-40	<b>Duty Cycle (%):</b>	94
<b>Data Rate:</b>	13.5 MBit/s	<b>Antenna Gain (dBi):</b>	2.00
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	N/A
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Calculated Total EIRP	EIRP Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	$\Sigma$ Port(s) dBm	dBm	dBm	dBm	
5190.0	11.32	12.34	11.43		16.49	18.49	23	-4.51	50.00
5230.0	11.29	11.29	11.46		16.12	18.12	23	-4.88	50.00

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 51 of 516

<b>Variant:</b>	802.11ac-80	<b>Duty Cycle (%):</b>	84
<b>Data Rate:</b>	29.3 MBit/s	<b>Antenna Gain (dBi):</b>	2.00
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	N/A
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Calculated Total EIRP	EIRP Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	$\Sigma$ Port(s) dBm	dBm	dBm	dBm	
5210.0	11.69	12.38	11.45		16.63	18.63	23	-4.37	50.00

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 52 of 516

#### Equipment Configuration for Peak Transmit Power

<b>Variant:</b>	802.11n HT-20	<b>Duty Cycle (%):</b>	95
<b>Data Rate:</b>	6.5 MBit/s	<b>Antenna Gain (dBi):</b>	2.00
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	N/A
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Calculated Total EIRP	EIRP Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	$\Sigma$ Port(s) dBm	dBm	dBm	dBm	
5180.0	10.56	11.35	10.56		15.61	17.61	23	-5.39	48.00
5200.0	10.62	11.41	10.37		15.59	17.59	23	-5.41	48.00
5240.0	10.36	11.36	10.61		15.56	17.56	23	-5.44	48.00

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 53 of 516

#### Equipment Configuration for Peak Transmit Power

<b>Variant:</b>	802.11n HT-40	<b>Duty Cycle (%):</b>	87
<b>Data Rate:</b>	13.5 MBit/s	<b>Antenna Gain (dBi):</b>	2.00
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	N/A
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Calculated Total EIRP	EIRP Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	$\Sigma$ Port(s) dBm	dBm	dBm	dBm	
5190.0	11.30	12.23	11.34		16.42	18.42	23	-4.58	50.00
5230.0	11.37	12.02	11.35		16.37	18.37	23	-4.63	50.00

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 54 of 516

### 7.1.1.3. Peak Power Spectral Density FCC 15.407

Conducted Test Conditions for Power Spectral Density			
<b>Standard:</b>	FCC CFR 47:15.407	<b>Ambient Temp. (°C):</b>	24.0 - 27.5
<b>Test Heading:</b>	Power Spectral Density	<b>Rel. Humidity (%):</b>	32 - 45
<b>Standard Section(s):</b>	15.407 (a)	<b>Pressure (mBars):</b>	999 - 1001
<b>Reference Document(s):</b>	See Normative References		

#### Test Procedure for Power Spectral Density

The in-band power spectral density was measured using the test technique specified in KDB 789033. A 1 MHz measurement bandwidth was implemented for the analyzer sweep. Once the sweep is complete the analyzer trace data is downloaded and used for post processing purposes.

Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured separately. The Peak Power Spectral Density is the highest level found across the emission bandwidth. With multiple antenna port measurements the numerical analyzer data from each port is summed (a) and a link to this additional graphic is provided.

Test configuration and setup used for the measurement was per the Conducted Test Set-up section specified in this document.

Measure and sum the spectra across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The individual spectra are then summed mathematically in linear power units. Unlike in-band power measurements, in which the sum involves a single measured value (output power) from each output, measurements for compliance with PSD limits involve summing entire spectra across corresponding frequency bins on the various outputs. Consistency is maintained for any device with multiple transmitter outputs to be certain the individual outputs are all aligned with the same span and same number of points. In this instance, the linear power spectrum value within the first spectral bin of output 0 is summed with that in the first spectral bin of output 1, and the first spectral bin of output 2, and so on up to the Nth output to obtain the true value for the first frequency bin of the summed spectrum. The summed spectrum value for each frequency bin is computed in this fashion. These summed spectral values were post processed and the resulting numerical and graphical data presented.

NOTE: It may be observed that spectrum in some plots break the limit line however this in itself does NOT constitute a failure. In all cases a spectrum summation plot is provided in order to prove compliance. A failure occurs only after the summation of all spectrum plots have been summed and are found to be greater than the limit line.

#### Supporting Information

Calculated Power =  $A + 10 \log(1/x)$  dBm

$A = \text{Total Power Spectral Density} [10^{\text{a}/10} + 10^{\text{b}/10} + 10^{\text{c}/10} + 10^{\text{d}/10}]$

x = Duty Cycle

#### Limits Power Spectral Density

##### Operating Frequency Band 5150-5250 MHz

###### 15.407 (a)(1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 55 of 516

corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **Operating Frequency Band 5250-5350 and 5470 – 5725 MHz**

##### **15. 407 (a)(2)**

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **Operating Frequency Band 5725 – 5850 MHz**

##### **15. 407 (a)(3)**

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

#### Supporting Information

Calculated Power =  $A + 10 \log (1/x) \text{ dBm}$

$A = \text{Total Power Spectral Density} [10 \log_{10} (10^{(a/10)} + 10^{(b/10)} + 10^{(c/10)} + 10^{(d/10)})]$   
 $x = \text{Duty Cycle}$

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 56 of 516

Equipment Configuration for Power Spectral Density			
<b>Variant:</b>	802.11a	<b>Duty Cycle (%):</b>	94.0
<b>Data Rate:</b>	6.00 MBit/s	<b>Antenna Gain (dBi):</b>	2.60
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

Test Measurement Results							
Test Frequency	Measured Power Spectral Density				Amplitude Summation + DCCF (+0.27 dB)	Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5180.0	7.390	5.711	6.336	--	10.776	11.0	-0.2
5200.0	5.652	6.407	5.846	--	10.684	11.0	-0.3
5240.0	6.302	5.321	5.495	--	9.705	11.0	-1.3

Traceability to Industry Recognized Test Methodologies							
Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK						
Measurement Uncertainty:	±2.81 dB						

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 57 of 516

Equipment Configuration for Power Spectral Density			
<b>Variant:</b>	802.11ac-80	<b>Duty Cycle (%):</b>	85.0
<b>Data Rate:</b>	29.30 MBit/s	<b>Antenna Gain (dBi):</b>	2.60
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

Test Measurement Results							
Test Frequency	Measured Power Spectral Density				Amplitude Summation + DCCF (+0.71 dB)	Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5210.0	<a href="#">0.126</a>	<a href="#">0.017</a>	<a href="#">0.169</a>	--	<a href="#">5.086</a>	11.0	-5.9

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 58 of 516

Equipment Configuration for Power Spectral Density			
<b>Variant:</b>	802.11n HT-20	<b>Duty Cycle (%):</b>	94.0
<b>Data Rate:</b>	6.50 MBit/s	<b>Antenna Gain (dBi):</b>	2.60
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

Test Measurement Results							
Test Frequency	Measured Power Spectral Density				Amplitude Summation + DCCF (+0.27 dB)	Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5180.0	5.738	5.287	6.003	--	10.297	11.0	-0.7
5200.0	5.103	5.791	5.752	--	10.027	11.0	-0.9
5240.0	5.240	5.251	5.434	--	9.997	11.0	-1.0

Traceability to Industry Recognized Test Methodologies							
Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK						
Measurement Uncertainty:	±2.81 dB						

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 59 of 516

Equipment Configuration for Power Spectral Density			
<b>Variant:</b>	802.11n HT-40	<b>Duty Cycle (%):</b>	85.0
<b>Data Rate:</b>	13.50 MBit/s	<b>Antenna Gain (dBi):</b>	2.60
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

Test Measurement Results							
Test Frequency	Measured Power Spectral Density				Amplitude Summation + DCCF (+0.71 dB)	Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5190.0	<a href="#">2.631</a>	<a href="#">1.951</a>	<a href="#">1.699</a>	--	<a href="#">6.796</a>	11.0	-4.2
5230.0	<a href="#">0.614</a>	<a href="#">1.179</a>	<a href="#">2.146</a>	--	<a href="#">5.756</a>	11.0	-5.2

Traceability to Industry Recognized Test Methodologies							
Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK						
Measurement Uncertainty:	±2.81 dB						

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 60 of 516

Equipment Configuration for Peak Power Spectral Density			
<b>Variant:</b>	802.11a	<b>Duty Cycle (%):</b>	94.0
<b>Data Rate:</b>	6.00 MBit/s	<b>Antenna Gain (dBi):</b>	2.60
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

Test Measurement Results							
Test Frequency	Measured Power Spectral Density				Amplitude Summation + DCCF (+0.27 dB)	Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5260.0	6.909	6.864	6.067	--	10.648	11.0	-0.4
5300.0	6.735	6.906	5.717	--	10.158	11.0	-0.8
5320.0	6.502	6.542	6.087	--	10.579	11.0	-0.4

Traceability to Industry Recognized Test Methodologies							
Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK						
Measurement Uncertainty:	±2.81 dB						

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 61 of 516

Equipment Configuration for Peak Power Spectral Density			
<b>Variant:</b>	802.11ac-80	<b>Duty Cycle (%):</b>	85.0
<b>Data Rate:</b>	29.30 MBit/s	<b>Antenna Gain (dBi):</b>	2.60
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

Test Measurement Results							
Test Frequency	Measured Power Spectral Density				Amplitude Summation + DCCF (+0.71 dB)	Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5290.0	<a href="#">1.250</a>	<a href="#">1.168</a>	<a href="#">-0.290</a>	--	<a href="#">4.827</a>	11.0	-6.2

Traceability to Industry Recognized Test Methodologies							
Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK						
Measurement Uncertainty:	±2.81 dB						

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 62 of 516

Equipment Configuration for Peak Power Spectral Density			
<b>Variant:</b>	802.11n HT-20	<b>Duty Cycle (%):</b>	94.0
<b>Data Rate:</b>	6.5 MBit/s	<b>Antenna Gain (dBi):</b>	2.60
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

Test Measurement Results							
Test Frequency	Measured Power Spectral Density				Amplitude Summation + DCCF (+0.27 dB)	Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5260.0	<a href="#">7.458</a>	<a href="#">6.058</a>	<a href="#">6.436</a>	--	<a href="#">10.445</a>	11.0	-0.6
5300.0	<a href="#">8.559</a>	<a href="#">6.326</a>	<a href="#">6.267</a>	--	<a href="#">10.983</a>	11.0	-0.1
5320.0	<a href="#">7.847</a>	<a href="#">6.708</a>	<a href="#">5.126</a>	--	<a href="#">11.000</a>	11.0	-0.0

Traceability to Industry Recognized Test Methodologies							
Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK						
Measurement Uncertainty:	±2.81 dB						

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 63 of 516

Equipment Configuration for Peak Power Spectral Density			
<b>Variant:</b>	802.11n HT-40	<b>Duty Cycle (%):</b>	85.0
<b>Data Rate:</b>	13.5 MBit/s	<b>Antenna Gain (dBi):</b>	2.60
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

Test Measurement Results							
Test Frequency	Measured Power Spectral Density				Amplitude Summation + DCCF (+0.71 dB)	Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5270.0	<a href="#">3.249</a>	<a href="#">4.326</a>	<a href="#">2.685</a>	--	<a href="#">7.193</a>	11.0	-3.8
5310.0	<a href="#">3.919</a>	<a href="#">3.116</a>	<a href="#">2.504</a>	--	<a href="#">7.231</a>	11.0	-3.8

Traceability to Industry Recognized Test Methodologies							
Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK						
Measurement Uncertainty:	±2.81 dB						

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 64 of 516

Equipment Configuration for Peak Power Spectral Density			
<b>Variant:</b>	802.11a	<b>Duty Cycle (%):</b>	94.0
<b>Data Rate:</b>	6 MBit/s	<b>Antenna Gain (dBi):</b>	2.50
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

Test Measurement Results							
Test Frequency	Measured Power Spectral Density				Amplitude Summation + DCCF (+0.27 dB)	Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5500.0	6.664	6.183	7.629	--	10.725	11.0	-0.3
5580.0	6.293	7.016	6.746	--	10.877	11.0	-0.1
5720.0	6.046	6.150	6.669	--	9.827	11.0	-1.2

Traceability to Industry Recognized Test Methodologies							
Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK						
Measurement Uncertainty:	±2.81 dB						

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 65 of 516

Equipment Configuration for Peak Power Spectral Density			
<b>Variant:</b>	802.11ac-80	<b>Duty Cycle (%):</b>	85.0
<b>Data Rate:</b>	29.30 MBit/s	<b>Antenna Gain (dBi):</b>	2.50
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

Test Measurement Results							
Test Frequency	Measured Power Spectral Density				Amplitude Summation + DCCF (+0.71 dB)	Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5530.0	<a href="#">0.612</a>	<a href="#">1.313</a>	<a href="#">-0.005</a>	--	<a href="#">4.860</a>	11.0	-6.1
5610.0	<a href="#">0.404</a>	<a href="#">-0.090</a>	<a href="#">0.575</a>	--	<a href="#">5.249</a>	11.0	-5.7
5690.0	<a href="#">-0.559</a>	<a href="#">0.172</a>	<a href="#">-0.927</a>	--	<a href="#">3.696</a>	11.0	-7.3

Traceability to Industry Recognized Test Methodologies							
Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK						
Measurement Uncertainty:	±2.81 dB						

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 66 of 516

Equipment Configuration for Peak Power Spectral Density			
<b>Variant:</b>	802.11n HT-20	<b>Duty Cycle (%):</b>	94
<b>Data Rate:</b>	6.5 MBit/s	<b>Antenna Gain (dBi):</b>	2.50
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

Test Measurement Results							
Test Frequency	Measured Power Spectral Density				Amplitude Summation + DCCF (+0.27 dB)	Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5500.0	<a href="#">7.697</a>	<a href="#">6.229</a>	<a href="#">8.138</a>	--	<a href="#">10.993</a>	11.0	-0.0
5580.0	<a href="#">7.509</a>	<a href="#">6.036</a>	<a href="#">6.506</a>	--	<a href="#">10.982</a>	11.0	-0.0
5720.0	<a href="#">7.128</a>	<a href="#">5.059</a>	<a href="#">6.228</a>	--	<a href="#">10.325</a>	11.0	-0.7

Traceability to Industry Recognized Test Methodologies							
Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK						
Measurement Uncertainty:	±2.81 dB						

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 67 of 516

Equipment Configuration for Peak Power Spectral Density			
<b>Variant:</b>	802.11n HT-40	<b>Duty Cycle (%):</b>	85.0
<b>Data Rate:</b>	13.50 MBit/s	<b>Antenna Gain (dBi):</b>	2.50
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

Test Measurement Results							
Test Frequency	Measured Power Spectral Density				Amplitude Summation + DCCF (+0.71 dB)	Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5510.0	<a href="#">3.141</a>	<a href="#">3.207</a>	<a href="#">3.931</a>	--	<a href="#">7.385</a>	11.0	-3.6
5550.0	<a href="#">2.511</a>	<a href="#">3.009</a>	<a href="#">2.739</a>	--	<a href="#">6.712</a>	11.0	-4.3
5710.0	<a href="#">2.558</a>	<a href="#">3.001</a>	<a href="#">2.437</a>	--	<a href="#">6.714</a>	11.0	-4.3

Traceability to Industry Recognized Test Methodologies							
Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK						
Measurement Uncertainty:	$\pm 2.81$ dB						

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 68 of 516

Equipment Configuration for Power Spectral Density			
<b>Variant:</b>	802.11a	<b>Duty Cycle (%):</b>	94.0
<b>Data Rate:</b>	6.00 MBit/s	<b>Antenna Gain (dBi):</b>	2.50
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

Test Measurement Results							
Test Frequency	Measured Power Spectral Density				Amplitude Summation + DCCF (+0.27 dB)	Limit	Margin
	Port(s) (dBm/500 KHz)						
MHz	a	b	c	d	dBm/500 KHz	dBm/500 KHz	dB
5745.0	6.409	5.565	5.978	--	10.277	30.0	-19.7
5785.0	5.804	5.340	5.895	--	9.688	30.0	-20.3
5825.0	6.258	5.460	6.468	--	10.527	30.0	-19.4

Traceability to Industry Recognized Test Methodologies							
Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK						
Measurement Uncertainty:	±2.81 dB						

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 69 of 516

Equipment Configuration for Power Spectral Density			
<b>Variant:</b>	802.11ac-80	<b>Duty Cycle (%):</b>	85.0
<b>Data Rate:</b>	29.30 MBit/s	<b>Antenna Gain (dBi):</b>	2.50
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

Test Measurement Results							
Test Frequency	Measured Power Spectral Density				Amplitude Summation + DCCF (+0.71 dB)	Limit	Margin
	Port(s) (dBm/500 KHz)						
MHz	a	b	c	d	dBm/500 KHz	dBm/500 KHz	dB
5775.0	<a href="#">0.097</a>	<a href="#">-0.166</a>	<a href="#">-0.274</a>	--	<a href="#">4.440</a>	30.0	-25.5

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 70 of 516

Equipment Configuration for Power Spectral Density			
<b>Variant:</b>	802.11n HT-20	<b>Duty Cycle (%):</b>	94.0
<b>Data Rate:</b>	6.50 MBit/s	<b>Antenna Gain (dBi):</b>	2.50
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

Test Measurement Results							
Test Frequency	Measured Power Spectral Density				Amplitude Summation + DCCF (+0.27 dB)	Limit	Margin
	Port(s) (dBm/500 KHz)						
MHz	a	b	c	d	dBm/500 KHz	dBm/500 KHz	dB
5745.0	6.250	5.865	6.873	--	10.721	30.0	-19.3
5785.0	6.004	5.466	6.426	--	10.537	30.0	-19.4
5825.0	6.379	5.863	5.980	--	10.080	30.0	-19.9

Traceability to Industry Recognized Test Methodologies							
Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK						
Measurement Uncertainty:	±2.81 dB						

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 71 of 516

Equipment Configuration for Power Spectral Density			
<b>Variant:</b>	802.11n HT-40	<b>Duty Cycle (%):</b>	85.0
<b>Data Rate:</b>	13.50 MBit/s	<b>Antenna Gain (dBi):</b>	2.50
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

Test Measurement Results							
Test Frequency	Measured Power Spectral Density				Amplitude Summation + DCCF (+0.71 dB)	Limit	Margin
	Port(s) (dBm/500 KHz)						
MHz	a	b	c	d	dBm/500 KHz	dBm/500 KHz	dB
5755.0	<a href="#">2.222</a>	<a href="#">1.881</a>	<a href="#">2.723</a>	--	<a href="#">5.924</a>	30.0	-24.0
5795.0	<a href="#">1.732</a>	<a href="#">0.559</a>	<a href="#">1.764</a>	--	<a href="#">6.155</a>	30.0	-23.8

Traceability to Industry Recognized Test Methodologies							
Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK						
Measurement Uncertainty:	±2.81 dB						

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 72 of 516

#### 7.1.1.4. Peak Power Spectral Density IC RSS-247 for 5150 – 5250 MHz band.

Conducted Test Conditions for Power Spectral Density			
<b>Standard:</b>	IC RSS-247	<b>Ambient Temp. (°C):</b>	24.0 - 27.5
<b>Test Heading:</b>	Power Spectral Density	<b>Rel. Humidity (%):</b>	32 - 45
<b>Standard Section(s):</b>	6.2.x (1)	<b>Pressure (mBars):</b>	999 - 1001
<b>Reference Document(s):</b>	See Normative References		

##### Test Procedure for Maximum Conducted Output Power Measurement

Method PM (Measurement using an RF average power meter). KDB 789033 defines a methodology using an average wideband power meter. Measurements were made while the EUT was operating in a continuous transmission mode (100% duty cycle) at the appropriate center frequency. All operational modes and frequency bands were measured independently and the resultant calculated. Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured and reported separately. A summation ( $\Sigma$ ) of each antenna port output power is provided which includes any offset due to Duty Cycle Correction Factor (DCCF). Testing was performed under ambient conditions at nominal voltage.

Test configuration and setup used for the measurement was per the Conducted Test Set-up section specified in this document.

Supporting Information

Calculated Power =  $A + G + Y + 10 \log(1/x)$  dBm

$A$  = Total Power  $[10^{\log_{10}(A)} + 10^{\log_{10}(G)} + 10^{\log_{10}(Y)} + 10^{\log_{10}(1/x)}]$

$G$  = Antenna Gain

$Y$  = Beamforming Gain

$x$  = Duty Cycle (average power measurements only)

##### Limits Maximum Conducted Output Power

###### 6.2.1 Operating Frequency Band 5150-5250 MHz

###### (1) Power Limits

The maximum e.i.r.p. shall not exceed 200 mW or  $10 + 10 \log_{10}(B)$ , dBm, whichever power is less. B is the 99% emission bandwidth in megahertz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band

###### 6.2.2 Operating Frequency Band 5250-5350 MHz

###### (1) Power Limits

The maximum conducted output power shall not exceed 250 mW or  $11 + 10 \log_{10}(B)$ , dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

The maximum e.i.r.p. shall not exceed 1.0 W or  $17 + 10 \log_{10}(B)$ , dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

###### 6.2.3 Operating Frequency Band 5470 – 5600 and 5650 – 5725 MHz

Until further notice, devices subject to this section shall not be capable of transmitting in the band 5600-5650 MHz. This restriction is for the protection of Environment Canada's weather radars operating in this band

###### (1) Power Limits

The maximum conducted output power shall not exceed 250 mW or  $11 + 10 \log_{10}(B)$ , dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band. The maximum e.i.r.p. shall not exceed 1.0 W or  $17 + 10 \log_{10}(B)$ , dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

###### 6.2.4 Operating Frequency Band 5725-5850 MHz

###### (1) Power Limits

For equipment operating in the band 5725-5850 MHz, the minimum 6 dB bandwidth shall be at least 500 kHz. Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices RSS-247 10 The maximum conducted output power shall not exceed 1 W. The power spectral density shall not exceed 30 dBm in any 500 kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed point-to-point operations exclude the use of point-to-multipoint3 systems, omnidirectional applications and multiple collocated transmitters transmitting the same information.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 73 of 516

Equipment Configuration for Peak Power Spectral Density			
<b>Variant:</b>	802.11a	<b>Duty Cycle (%):</b>	94.0
<b>Data Rate:</b>	6 MBit/s	<b>Antenna Gain (dBi):</b>	2.00
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

Test Measurement Results							
Test Frequency	Measured Power Spectral Density				Calculated EIRP Amplitude	EIRP Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5180.0	<a href="#">-0.923</a>	<a href="#">-0.136</a>	<a href="#">-0.668</a>		<a href="#">5.200</a>	10	-4.80
5200.0	<a href="#">-1.224</a>	<a href="#">-0.081</a>	<a href="#">-0.856</a>		<a href="#">5.275</a>	10	-4.73
5240.0	<a href="#">-0.415</a>	<a href="#">-1.005</a>	<a href="#">-1.517</a>		<a href="#">5.139</a>	10	-4.86

Traceability to Industry Recognized Test Methodologies							
Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK						
Measurement Uncertainty:	±2.81 dB						

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 74 of 516

#### Equipment Configuration for Peak Power Spectral Density

<b>Variant:</b>	802.11ac-40	<b>Duty Cycle (%):</b>	93.9
<b>Data Rate:</b>	13.5 MBit/s	<b>Antenna Gain (dBi):</b>	2.00
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

Test Frequency	Measured Power Spectral Density				Calculated EIRP Amplitude	EIRP Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5190.0	<a href="#">-1.977</a>	<a href="#">-1.060</a>	<a href="#">-1.768</a>		<a href="#">4.750</a>	10	-5.25
5230.0	<a href="#">-2.558</a>	<a href="#">-1.362</a>	<a href="#">-2.383</a>		<a href="#">4.032</a>	10	-5.97

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 75 of 516

#### Equipment Configuration for Peak Power Spectral Density

<b>Variant:</b>	802.11ac-80	<b>Duty Cycle (%):</b>	83.8
<b>Data Rate:</b>	29.3 MBit/s	<b>Antenna Gain (dBi):</b>	2.00
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

Test Frequency	Measured Power Spectral Density				Calculated EIRP Amplitude	EIRP Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5210.0	<a href="#">-5.378</a>	<a href="#">-4.445</a>	<a href="#">-5.431</a>		<a href="#">0.465</a>	10	-9.54

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 76 of 516

Equipment Configuration for Peak Power Spectral Density			
<b>Variant:</b>	802.11n HT-20	<b>Duty Cycle (%):</b>	94.5
<b>Data Rate:</b>	6.5 MBit/s	<b>Antenna Gain (dBi):</b>	2.00
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

Test Measurement Results							
Test Frequency	Measured Power Spectral Density				Calculated EIRP Amplitude	EIRP Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5180.0	<a href="#">-0.994</a>	<a href="#">0.133</a>	<a href="#">-0.745</a>		<a href="#">5.362</a>	10	-4.64
5200.0	<a href="#">-1.035</a>	<a href="#">0.056</a>	<a href="#">-0.780</a>		<a href="#">5.073</a>	10	-4.93
5240.0	<a href="#">-0.882</a>	<a href="#">0.039</a>	<a href="#">-1.171</a>		<a href="#">5.247</a>	10	-4.75

Traceability to Industry Recognized Test Methodologies							
Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK						
Measurement Uncertainty:	±2.81 dB						

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 77 of 516

Equipment Configuration for Peak Power Spectral Density			
<b>Variant:</b>	802.11n HT-40	<b>Duty Cycle (%):</b>	86.6
<b>Data Rate:</b>	13.5 MBit/s	<b>Antenna Gain (dBi):</b>	2.00
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

Test Measurement Results							
Test Frequency	Measured Power Spectral Density				Calculated EIRP Amplitude	EIRP Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5190.0	<a href="#">-2.881</a>	<a href="#">-1.974</a>	<a href="#">-3.338</a>		<a href="#">3.27</a>	10	-6.77
5230.0	<a href="#">-4.263</a>	<a href="#">-3.219</a>	<a href="#">-4.158</a>		<a href="#">1.45</a>	10	-8.55

Traceability to Industry Recognized Test Methodologies							
Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK						
Measurement Uncertainty:	±2.81 dB						

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 78 of 516

### 7.1.1.5. 26 dB and 99 % Bandwidth

Conducted Test Conditions for 26 dB and 99% Bandwidth			
<b>Standard:</b>	FCC CFR 47:15.407	<b>Ambient Temp. (°C):</b>	24.0 - 27.5
<b>Test Heading:</b>	26 dB and 99 % Bandwidth	<b>Rel. Humidity (%):</b>	32 - 45
<b>Standard Section(s):</b>	15.407 (a)	<b>Pressure (mBars):</b>	999 - 1001
<b>Reference Document(s):</b>	KDB 789033 - D01 DTS General UNII Test Procedures v01		

#### Test Procedure for 26 dB and 99% Bandwidth Measurement

The bandwidth at 26 dB and 99 % is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency. KDB 789033 Section 5.1 Emission Bandwidth was used in order to prove compliance. The Resolution Bandwidth was set to approximately 1% of the emission bandwidth.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 79 of 516

Equipment Configuration for 26 dB & 99% Occupied Bandwidth			
<b>Variant:</b>	802.11a	<b>Duty Cycle (%):</b>	94.0
<b>Data Rate:</b>	6.00 MBit/s	<b>Antenna Gain (dBi):</b>	2.60
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

Test Measurement Results							
Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)		
	Port(s)						
MHz	a	b	c	d	Highest	Lowest	
5180.0	<a href="#">42.886</a>	<a href="#">40.581</a>	<a href="#">41.583</a>	--	42.886	40.581	
5200.0	<a href="#">41.984</a>	<a href="#">40.782</a>	<a href="#">42.886</a>	--	42.886	40.782	
5240.0	<a href="#">43.287</a>	<a href="#">40.481</a>	<a href="#">41.082</a>	--	43.287	40.481	

Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)		
	Port(s)						
MHz	a	b	c	d	Highest	Lowest	
5180.0	<a href="#">25.852</a>	<a href="#">23.747</a>	<a href="#">24.549</a>	--	25.852	23.747	
5200.0	<a href="#">25.651</a>	<a href="#">23.848</a>	<a href="#">24.349</a>	--	25.651	23.848	
5240.0	<a href="#">25.952</a>	<a href="#">23.447</a>	<a href="#">24.549</a>	--	25.952	23.447	

Traceability to Industry Recognized Test Methodologies		
Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK	
Measurement Uncertainty:	±2.81 dB	

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 80 of 516

Equipment Configuration for 26 dB & 99% Occupied Bandwidth			
<b>Variant:</b>	802.11ac-80	<b>Duty Cycle (%):</b>	85.0
<b>Data Rate:</b>	29.30 MBit/s	<b>Antenna Gain (dBi):</b>	2.60
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

Test Measurement Results							
Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)		
	Port(s)						
MHz	a	b	c	d	Highest	Lowest	
5210.0	<a href="#">193.587</a>	<a href="#">187.174</a>	<a href="#">185.571</a>	--	193.587	185.571	

Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)		
	Port(s)						
MHz	a	b	c	d	Highest	Lowest	
5210.0	<a href="#">115.030</a>	<a href="#">107.014</a>	<a href="#">107.415</a>	--	115.030	107.014	

Traceability to Industry Recognized Test Methodologies							
Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK						
Measurement Uncertainty:	±2.81 dB						

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 81 of 516

Equipment Configuration for 26 dB & 99% Occupied Bandwidth			
<b>Variant:</b>	802.11n HT-20	<b>Duty Cycle (%):</b>	94.0
<b>Data Rate:</b>	6.50 MBit/s	<b>Antenna Gain (dBi):</b>	2.60
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

Test Measurement Results							
Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)		
	Port(s)						
MHz	a	b	c	d	Highest	Lowest	
5180.0	40.080	37.876	37.475	--	40.080	37.475	
5200.0	39.279	37.976	37.475	--	39.279	37.475	
5240.0	39.279	36.874	37.475	--	39.279	36.874	

Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)		
	Port(s)						
MHz	a	b	c	d	Highest	Lowest	
5180.0	25.752	23.647	24.248	--	25.752	23.647	
5200.0	25.351	23.246	23.948	--	25.351	23.246	
5240.0	24.950	22.445	23.447	--	24.950	22.445	

Traceability to Industry Recognized Test Methodologies							
Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK						
Measurement Uncertainty:	±2.81 dB						

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 82 of 516

Equipment Configuration for 26 dB & 99% Occupied Bandwidth			
<b>Variant:</b>	802.11n HT-40	<b>Duty Cycle (%):</b>	85.0
<b>Data Rate:</b>	13.50 MBit/s	<b>Antenna Gain (dBi):</b>	2.60
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

Test Measurement Results							
Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)		
	Port(s)						
MHz	a	b	c	d	Highest	Lowest	
5190.0	<a href="#">97.996</a>	<a href="#">89.780</a>	<a href="#">92.585</a>	--	97.996	89.780	
5230.0	<a href="#">97.194</a>	<a href="#">89.379</a>	<a href="#">92.585</a>	--	97.194	89.379	

Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)		
	Port(s)						
MHz	a	b	c	d	Highest	Lowest	
5190.0	<a href="#">58.517</a>	<a href="#">48.898</a>	<a href="#">52.104</a>	--	58.517	48.898	
5230.0	<a href="#">57.916</a>	<a href="#">49.098</a>	<a href="#">51.703</a>	--	57.916	49.098	

Traceability to Industry Recognized Test Methodologies							
Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK						
Measurement Uncertainty:	±2.81 dB						

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 83 of 516

#### Equipment Configuration for 26 dB & 99% Occupied Bandwidth

<b>Variant:</b>	802.11a	<b>Duty Cycle (%):</b>	94
<b>Data Rate:</b>	6.00 MBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)	
	Port(s)					
MHz	a	b	c	d	Highest	Lowest
5260.0	<a href="#">44.188</a>	<a href="#">44.389</a>	<a href="#">41.884</a>		44.389	41.884
5300.0	<a href="#">43.587</a>	<a href="#">43.487</a>	<a href="#">41.583</a>		43.587	41.583
5320.0	<a href="#">42.285</a>	<a href="#">41.784</a>	<a href="#">40.982</a>		42.285	40.982

Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)	
	Port(s)					
MHz	a	b	c	d	Highest	Lowest
5260.0	<a href="#">28.557</a>	<a href="#">27.555</a>	<a href="#">26.954</a>		28.557	26.954
5300.0	<a href="#">27.555</a>	<a href="#">26.954</a>	<a href="#">25.852</a>		27.555	25.852
5320.0	<a href="#">27.355</a>	<a href="#">26.453</a>	<a href="#">26.653</a>		27.355	26.453

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 84 of 516

**Equipment Configuration for 26 dB & 99% Occupied Bandwidth**

<b>Variant:</b>	802.11ac-80	<b>Duty Cycle (%):</b>	85
<b>Data Rate:</b>	29.30 MBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)			
	Port(s)							
MHz	a	b	c	d	Highest	Lowest		
5290.0	<a href="#">195.992</a>	<a href="#">195.992</a>	<a href="#">195.992</a>	--	195.992	195.992		
Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)			
	Port(s)							
MHz	a	b	c	d	Highest	Lowest		
5290.0	<a href="#">127.455</a>	<a href="#">121.042</a>	<a href="#">107.014</a>	--	127.455	107.014		

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 85 of 516

Equipment Configuration for 26 dB & 99% Occupied Bandwidth			
<b>Variant:</b>	802.11n HT-20	<b>Duty Cycle (%):</b>	94
<b>Data Rate:</b>	6.50 MBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

Test Measurement Results							
Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)		
	Port(s)						
MHz	a	b	c	d	Highest	Lowest	
5260.0	<a href="#">43.988</a>	<a href="#">43.487</a>	<a href="#">42.385</a>	--	43.988	42.385	
5300.0	<a href="#">43.487</a>	<a href="#">41.884</a>	<a href="#">41.683</a>	--	43.487	41.683	
5320.0	<a href="#">41.884</a>	<a href="#">43.788</a>	<a href="#">42.986</a>	--	43.788	41.884	

Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)		
	Port(s)						
MHz	a	b	c	d	Highest	Lowest	
5260.0	<a href="#">27.956</a>	<a href="#">27.555</a>	<a href="#">27.154</a>	--	27.956	27.154	
5300.0	<a href="#">25.651</a>	<a href="#">26.152</a>	<a href="#">25.752</a>	--	26.152	25.651	
5320.0	<a href="#">25.952</a>	<a href="#">27.054</a>	<a href="#">26.353</a>	--	27.054	25.952	

Traceability to Industry Recognized Test Methodologies		
Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK	
Measurement Uncertainty:	±2.81 dB	

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 86 of 516

Equipment Configuration for 26 dB & 99% Occupied Bandwidth			
<b>Variant:</b>	802.11n HT-40	<b>Duty Cycle (%):</b>	85
<b>Data Rate:</b>	13.50 MBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

Test Measurement Results							
Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)		
	Port(s)						
MHz	a	b	c	d	Highest	Lowest	
5270.0	<a href="#">91.383</a>	<a href="#">92.585</a>	<a href="#">89.178</a>	--	92.585	89.178	
5310.0	<a href="#">89.178</a>	<a href="#">90.581</a>	<a href="#">87.976</a>	--	90.581	87.976	

Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)		
	Port(s)						
MHz	a	b	c	d	Highest	Lowest	
5270.0	<a href="#">63.327</a>	<a href="#">63.727</a>	<a href="#">63.727</a>	--	63.727	63.327	
5310.0	<a href="#">62.725</a>	<a href="#">62.525</a>	<a href="#">62.124</a>	--	62.725	62.124	

Traceability to Industry Recognized Test Methodologies							
Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK						
Measurement Uncertainty:	±2.81 dB						

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 87 of 516

#### Equipment Configuration for 26 dB & 99% Occupied Bandwidth

<b>Variant:</b>	802.11a	<b>Duty Cycle (%):</b>	94
<b>Data Rate:</b>	6.00 MBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)	
	Port(s)					
MHz	a	b	c	d	Highest	Lowest
5500.0	<a href="#">35.972</a>	<a href="#">34.369</a>	<a href="#">38.577</a>	--	38.577	34.369
5580.0	<a href="#">36.072</a>	<a href="#">35.972</a>	<a href="#">38.778</a>	--	38.778	35.972
5720.0	<a href="#">36.072</a>	<a href="#">36.072</a>	<a href="#">37.776</a>	--	37.776	36.072

Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)	
	Port(s)					
MHz	a	b	c	d	Highest	Lowest
5500.0	<a href="#">21.643</a>	<a href="#">21.042</a>	<a href="#">28.156</a>	--	28.156	21.042
5580.0	<a href="#">21.944</a>	<a href="#">20.541</a>	<a href="#">28.056</a>	--	28.056	20.541
5720.0	<a href="#">22.144</a>	<a href="#">21.443</a>	<a href="#">27.255</a>	--	27.255	21.443

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 88 of 516

Equipment Configuration for 26 dB & 99% Occupied Bandwidth			
<b>Variant:</b>	802.11ac-80	<b>Duty Cycle (%):</b>	85
<b>Data Rate:</b>	29.3 MBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

Test Measurement Results							
Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)		
	Port(s)						
MHz	a	b	c	d	Highest	Lowest	
5530.0	<a href="#">195.992</a>	<a href="#">195.992</a>	<a href="#">177.154</a>	--	195.992	177.154	
5610.0	<a href="#">172.345</a>	<a href="#">147.896</a>	<a href="#">150.301</a>	--	172.345	147.896	
5690.0	<a href="#">187.174</a>	<a href="#">187.174</a>	<a href="#">187.174</a>	--	187.174	187.174	

Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)		
	Port(s)						
MHz	a	b	c	d	Highest	Lowest	
5530.0	<a href="#">104.609</a>	<a href="#">111.824</a>	<a href="#">96.994</a>	--	111.824	96.994	
5610.0	<a href="#">78.557</a>	<a href="#">77.355</a>	<a href="#">77.355</a>	--	78.557	77.355	
5690.0	<a href="#">95.391</a>	<a href="#">105.010</a>	<a href="#">93.788</a>	--	105.010	93.788	

Traceability to Industry Recognized Test Methodologies		
Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK	
Measurement Uncertainty:	±2.81 dB	

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 89 of 516

Equipment Configuration for 26 dB & 99% Occupied Bandwidth			
<b>Variant:</b>	802.11n HT-20	<b>Duty Cycle (%):</b>	94
<b>Data Rate:</b>	6.5 MBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

Test Measurement Results							
Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)		
	Port(s)						
MHz	a	b	c	d	Highest	Lowest	
5500.0	<a href="#">46.593</a>	<a href="#">38.277</a>	<a href="#">43.687</a>	--	46.593	38.277	
5580.0	<a href="#">45.992</a>	<a href="#">38.377</a>	<a href="#">44.790</a>	--	45.992	38.377	
5720.0	<a href="#">45.291</a>	<a href="#">37.876</a>	<a href="#">44.489</a>	--	45.291	37.876	

Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)		
	Port(s)						
MHz	a	b	c	d	Highest	Lowest	
5500.0	<a href="#">31.663</a>	<a href="#">24.048</a>	<a href="#">30.661</a>	--	31.663	24.048	
5580.0	<a href="#">30.962</a>	<a href="#">23.347</a>	<a href="#">30.862</a>	--	30.962	23.347	
5720.0	<a href="#">30.661</a>	<a href="#">23.246</a>	<a href="#">30.261</a>	--	30.661	23.246	

Traceability to Industry Recognized Test Methodologies							
Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK						
Measurement Uncertainty:	±2.81 dB						

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 90 of 516

#### Equipment Configuration for 26 dB & 99% Occupied Bandwidth

<b>Variant:</b>	802.11n HT-40	<b>Duty Cycle (%):</b>	85
<b>Data Rate:</b>	13.5 MBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)	
	Port(s)					
MHz	a	b	c	d	Highest	Lowest
5510.0	<a href="#">91.182</a>	<a href="#">91.182</a>	<a href="#">89.379</a>	--	91.182	89.379
5550.0	<a href="#">91.784</a>	<a href="#">88.778</a>	<a href="#">89.379</a>	--	91.784	88.778
5710.0	<a href="#">89.780</a>	<a href="#">87.375</a>	<a href="#">89.780</a>	--	89.780	87.375

Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)	
	Port(s)					
MHz	a	b	c	d	Highest	Lowest
5510.0	<a href="#">66.733</a>	<a href="#">65.731</a>	<a href="#">66.132</a>	--	66.733	65.731
5550.0	<a href="#">65.731</a>	<a href="#">65.731</a>	<a href="#">65.331</a>	--	65.731	65.331
5710.0	<a href="#">64.729</a>	<a href="#">65.731</a>	<a href="#">64.729</a>	--	65.731	64.729

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 91 of 516

**Equipment Configuration for 26 dB & 99% Occupied Bandwidth**

<b>Variant:</b>	802.11a	<b>Duty Cycle (%):</b>	94.0
<b>Data Rate:</b>	6.00 MBit/s	<b>Antenna Gain (dBi):</b>	2.50
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)			
	Port(s)							
MHz	a	b	c	d	Highest	Lowest		
5745.0	<a href="#">41.383</a>	<a href="#">37.876</a>	<a href="#">39.379</a>	--	41.383	37.876		
5785.0	<a href="#">42.184</a>	<a href="#">41.884</a>	<a href="#">39.479</a>	--	42.184	39.479		
5825.0	<a href="#">43.387</a>	<a href="#">40.381</a>	<a href="#">40.080</a>	--	43.387	40.080		

Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)			
	Port(s)							
MHz	a	b	c	d	Highest	Lowest		
5745.0	<a href="#">22.846</a>	<a href="#">20.240</a>	<a href="#">20.541</a>	--	22.846	20.240		
5785.0	<a href="#">23.547</a>	<a href="#">21.944</a>	<a href="#">21.944</a>	--	23.547	21.944		
5825.0	<a href="#">24.649</a>	<a href="#">22.044</a>	<a href="#">22.144</a>	--	24.649	22.044		

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 92 of 516

Equipment Configuration for 26 dB & 99% Occupied Bandwidth			
<b>Variant:</b>	802.11ac-80	<b>Duty Cycle (%):</b>	85.0
<b>Data Rate:</b>	29.30 MBit/s	<b>Antenna Gain (dBi):</b>	2.50
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

Test Measurement Results							
Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)		
	Port(s)						
MHz	a	b	c	d	Highest	Lowest	
5775.0	<a href="#">192.786</a>	<a href="#">179.158</a>	<a href="#">183.567</a>	--	192.786	179.158	

Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)		
	Port(s)						
MHz	a	b	c	d	Highest	Lowest	
5775.0	<a href="#">109.820</a>	<a href="#">94.990</a>	<a href="#">100.200</a>	--	109.820	94.990	

Traceability to Industry Recognized Test Methodologies							
Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK						
Measurement Uncertainty:	±2.81 dB						

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 93 of 516

Equipment Configuration for 26 dB & 99% Occupied Bandwidth			
<b>Variant:</b>	802.11n HT-20	<b>Duty Cycle (%):</b>	94.0
<b>Data Rate:</b>	6.50 MBit/s	<b>Antenna Gain (dBi):</b>	2.50
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

Test Measurement Results							
Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)		
	Port(s)						
MHz	a	b	c	d	Highest	Lowest	
5745.0	<a href="#">41.784</a>	<a href="#">36.172</a>	<a href="#">35.170</a>	--	41.784	35.170	
5785.0	<a href="#">38.176</a>	<a href="#">36.473</a>	<a href="#">35.170</a>	--	38.176	35.170	
5825.0	<a href="#">38.277</a>	<a href="#">36.473</a>	<a href="#">35.170</a>	--	38.277	35.170	

Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)		
	Port(s)						
MHz	a	b	c	d	Highest	Lowest	
5745.0	<a href="#">22.946</a>	<a href="#">19.639</a>	<a href="#">20.341</a>	--	22.946	19.639	
5785.0	<a href="#">23.848</a>	<a href="#">20.441</a>	<a href="#">21.142</a>	--	23.848	20.441	
5825.0	<a href="#">23.747</a>	<a href="#">20.541</a>	<a href="#">21.142</a>	--	23.747	20.541	

Traceability to Industry Recognized Test Methodologies							
Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK						
Measurement Uncertainty:	±2.81 dB						

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 94 of 516

Equipment Configuration for 26 dB & 99% Occupied Bandwidth			
<b>Variant:</b>	802.11n HT-40	<b>Duty Cycle (%):</b>	85.0
<b>Data Rate:</b>	13.50 MBit/s	<b>Antenna Gain (dBi):</b>	2.50
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

Test Measurement Results							
Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)		
	Port(s)						
MHz	a	b	c	d	Highest	Lowest	
5755.0	<a href="#">94.188</a>	<a href="#">85.170</a>	<a href="#">89.980</a>	--	94.188	85.170	
5795.0	<a href="#">93.988</a>	<a href="#">85.371</a>	<a href="#">90.180</a>	--	93.988	85.371	

Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)		
	Port(s)						
MHz	a	b	c	d	Highest	Lowest	
5755.0	<a href="#">53.307</a>	<a href="#">39.880</a>	<a href="#">46.092</a>	--	53.307	39.880	
5795.0	<a href="#">52.104</a>	<a href="#">41.683</a>	<a href="#">48.297</a>	--	52.104	41.683	

Traceability to Industry Recognized Test Methodologies							
Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK						
Measurement Uncertainty:	±2.81 dB						

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 95 of 516

---

### 7.1.1.6. Frequency Stability

**FCC, Part 15 Subpart C §15.407(g)  
Industry Canada RSS-247**

#### Test Procedure

The manufacturer of the equipment is responsible for ensuring that the frequency stability is such that emissions are always maintained within the band of operation under all conditions.

#### Manufacturer Declaration

The frequency stability of the reference oscillator sets the frequency stability of the RF transceiver signals. Therefore, all of the RF signals should have  $\pm 20$ ppm stability.

This stability accounts for room temp tolerance of the crystal oscillator circuit, frequency variation across temperature, and crystal ageing.

$\pm 20$ ppm at 5.250 GHz translates to a maximum frequency shift of  $\pm 105$  KHz. As the edge of the channels is at least one MHz from either of the band edges,  $\pm 105$  KHz is more than sufficient to guarantee that the intentional emission will remain in the band over the entire operating range of the EUT.

#### Specification

#### Limits

**§15.407 (g)** Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 96 of 516

### 7.1.2. Radiated Emission Testing

Radiated Test Conditions for Radiated Spurious and Band-Edge Emissions			
<b>Standard:</b>	FCC CFR 47:15.407	<b>Ambient Temp. (°C):</b>	20.0 - 24.5
<b>Test Heading:</b>	Radiated Spurious and Band-Edge Emissions	<b>Rel. Humidity (%):</b>	32 - 45
<b>Standard Section(s):</b>	15.407 (b), 15.205, 15.209	<b>Pressure (mBars):</b>	999 - 1001
<b>Reference Document(s):</b>	See Normative References		

#### Test Procedure for Radiated Spurious and Band-Edge Emissions

Radiated emissions for restricted bands above 1 GHz are measured in the anechoic chamber at a 3-meter distance on every azimuth in both horizontal and vertical polarities. The emissions are recorded and maximized as a function of azimuth by rotation through 360° with a spectrum analyzer in peak hold mode. Depending on the frequency band spanned a notch filter and waveguide filter was used to remove the fundamental frequency. The highest emissions relative to the limit are listed for each frequency spanned. Measurements on any restricted band frequency or frequencies above 1 GHz are based on the use of measurement instrumentation employing peak and average detectors. All measurements were performed using a resolution bandwidth of 1 MHz.

Test configuration and setup for Undesirable Measurement were per the Radiated Test Set-up specified in this document.

15.407 (b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.

(5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

(6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.

(7) The provisions of §15.205 apply to intentional radiators operating under this section.

(8) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.

#### Limits for Restricted Bands (15.205, 15.209)

Peak emission: 74 dBuV/m

Average emission: 54 dBuV/m

#### Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

FS = R + AF + CORR - FO

where:

FS = Field Strength

R = Measured Spectrum analyzer Input Amplitude

AF = Antenna Factor

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 97 of 516

CORR = Correction Factor = CL – AG + NFL

CL = Cable Loss

AG = Amplifier Gain

FO = Distance Falloff Factor

NFL = Notch Filter Loss or Waveguide Loss

Example:

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength (dB $\mu$ V/m);

$$E = \frac{1000000 \times \sqrt{30P}}{3} \mu\text{V/m}$$

where P is the EIRP in Watts

Therefore: -27 dBm/MHz equates to 68.23 dB $\mu$ V/m

Conversion between dBmV/m (or dBmV) and mV/m (or mV) are as follows:

Level (dBmV/m) = 20 \* Log (level (mV/m))

40 dBmV/m = 100 mV/m

48 dBmV/m = 250 mV/m

#### **Restricted Bands of Operation (15.205)**

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 98 of 516

## FCC Restricted Bands

Frequency Band			
MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

(b) Except as provided in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

(c) Except as provided in paragraphs (d) and (e) of this section, regardless of the field strength limits specified elsewhere in this subpart, the provisions of this section apply to emissions from any intentional radiator.

(d) The following devices are exempt from the requirements of this section:

- (1) Swept frequency field disturbance sensors operating between 1.705 and 37 MHz provided their emissions only sweep through the bands listed in paragraph (a) of this section, the sweep is never stopped with the fundamental emission within the bands listed in paragraph (a) of this section, and the fundamental emission is outside of the bands listed in paragraph (a) of this section more than 99% of the time the device is actively transmitting, without compensation for duty cycle.
- (2) Transmitters used to detect buried electronic markers at 101.4 kHz which are employed by telephone companies.
- (3) Cable locating equipment operated pursuant to §15.213.
- (4) Any equipment operated under the provisions of §15.253, 15.255, and 15.256 in the frequency band 75-85 GHz, or §15.257 of this part.
- (5) Biomedical telemetry devices operating under the provisions of §15.242 of this part are not subject to the restricted band 608-614 MHz but are subject to compliance within the other restricted bands.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 99 of 516

- (6) Transmitters operating under the provisions of subparts D or F of this part.
- (7) Devices operated pursuant to §15.225 are exempt from complying with this section for the 13.36-13.41 MHz band only.
- (8) Devices operated in the 24.075-24.175 GHz band under §15.245 are exempt from complying with the requirements of this section for the 48.15-48.35 GHz and 72.225-72.525 GHz bands only, and shall not exceed the limits specified in §15.245(b).
- (9) Devices operated in the 24.0-24.25 GHz band under §15.249 are exempt from complying with the requirements of this section for the 48.0-48.5 GHz and 72.0-72.75 GHz bands only, and shall not exceed the limits specified in §15.249(a).
- (e) Harmonic emissions appearing in the restricted bands above 17.7 GHz from field disturbance sensors operating under the provisions of §15.245 shall not exceed the limits specified in §15.245(b).

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


### 7.1.2.1. Radiated Spurious Emissions

#### TX Spur Ethertronics M380510 Antenna:



##### RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS

Variant: 802.11a, Test Freq: 5180.00 MHz, Antenna: Ethertronics M380510, Power Setting: 76, Duty Cycle (%): 100

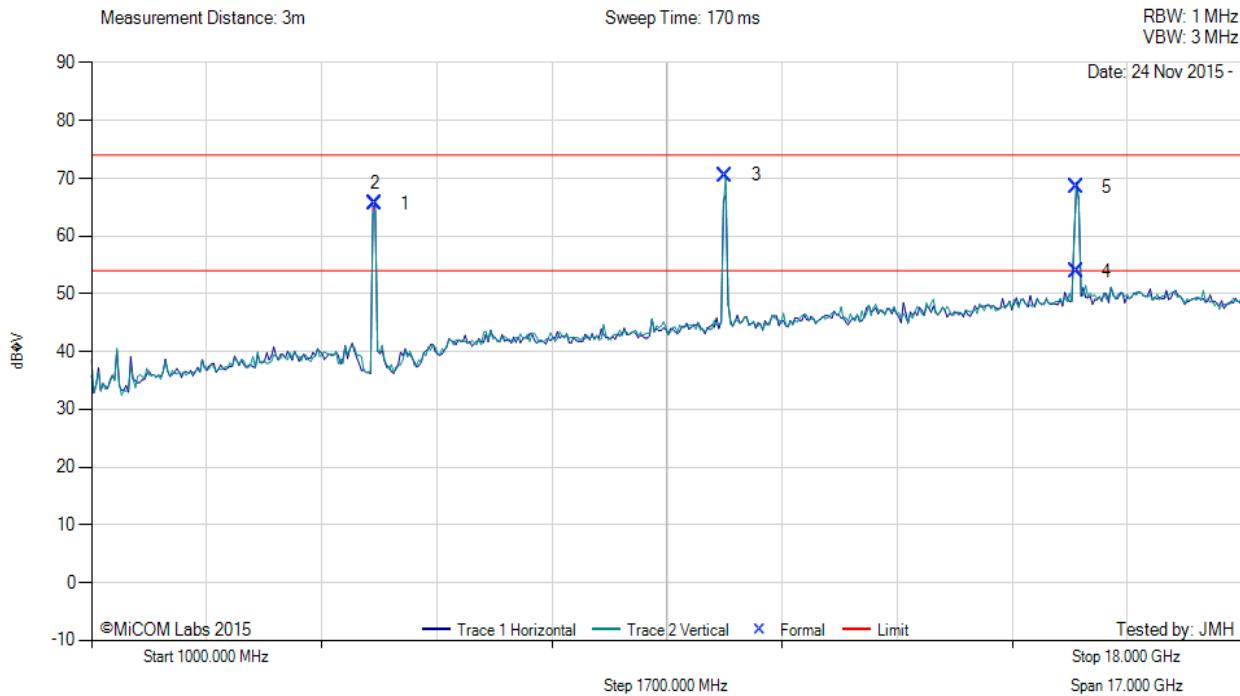

Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail
1	5187.01	73.48	3.68	-11.49	65.67	Fundamental	Horizontal					FUND
3	10365.57	70.19	5.59	-5.23	70.55	Peak (NRB)	Vertical	151	1	--	--	Pass
4	15544.93	48.43	5.97	-0.55	53.85	Max Avg	Horizontal	168	116	54.0	-0.2	Pass
5	15544.93	63.08	5.97	-0.55	68.50	Max Peak	Horizontal	168	116	74.0	-5.5	Pass

**Test Notes:** EUT on 150cm table. Powered by delta MDS-030AAC15 PS  
 FUND – Fundamental  
 NRB – Non-Restricted Band

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 101 of 516



#### RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS

Variant: 802.11a, Test Freq: 5200.00 MHz, Antenna: Ethertronics M380510, Power Setting: 76, Duty Cycle (%): 100

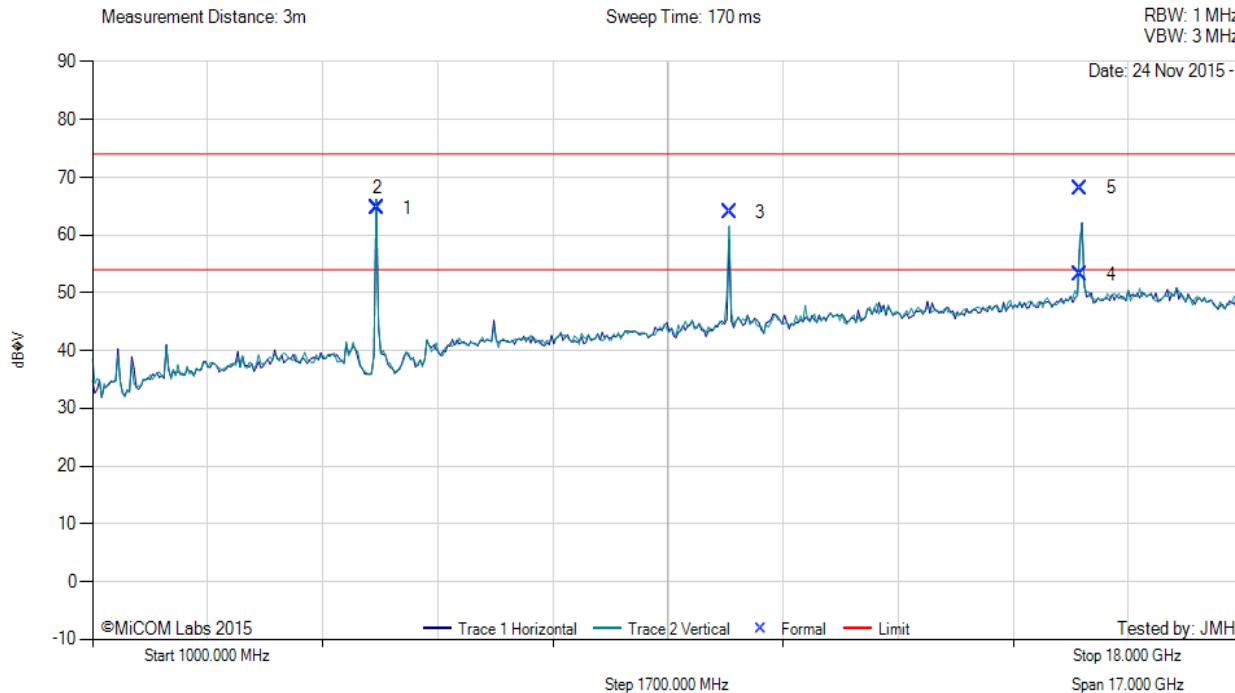

Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail
1	5201.08	72.51	3.66	-11.46	64.71	Fundamental	Horizontal					FUND
3	10405.58	63.48	5.45	-4.99	63.94	Peak (NRB)	Vertical	148	1	--	--	Pass
4	15593.59	47.41	6.00	-0.27	53.14	Max Avg	Horizontal	163	110	54.0	-0.9	Pass
5	15593.59	62.42	6.00	-0.27	68.15	Max Peak	Horizontal	163	110	74.0	-5.9	Pass

**Test Notes:** EUT on 150cm table. Powered by delta MDS-030AAC15 PS

FUND – Fundamental

NRB – Non-Restricted Band

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 102 of 516



#### RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS

Variant: 802.11a, Test Freq: 5240.00 MHz, Antenna: Ethertronics M380510, Power Setting: 76, Duty Cycle (%): 100

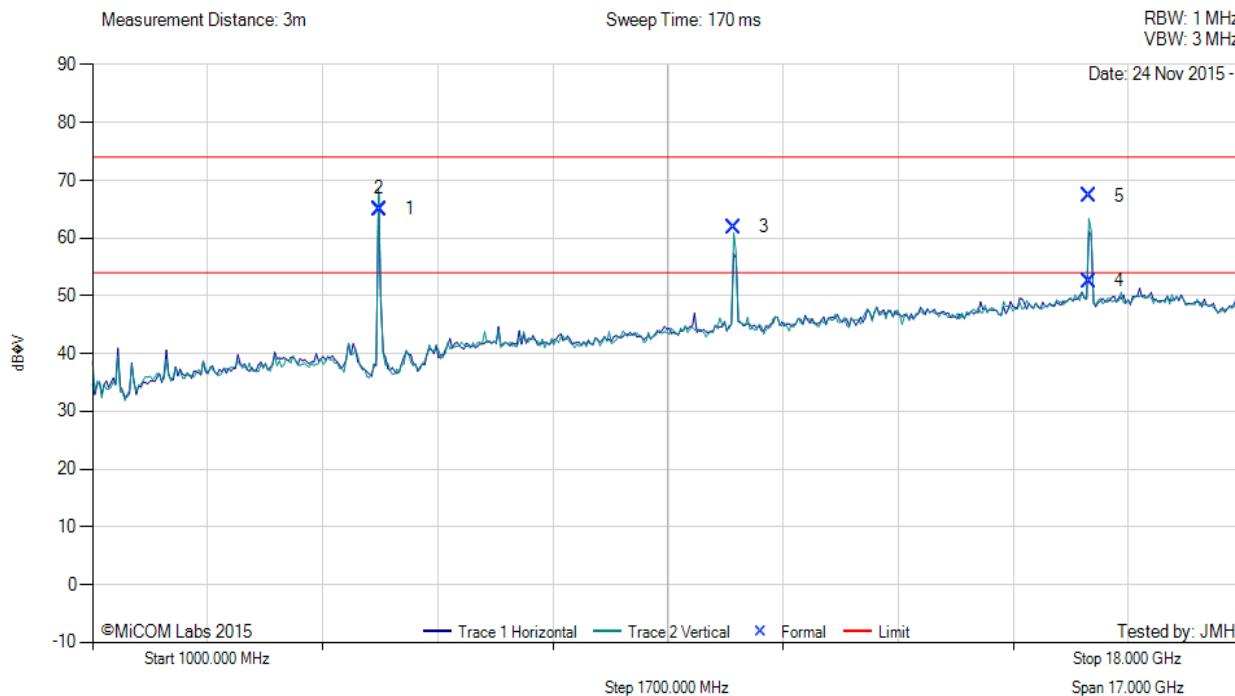

Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail
1	5236.67	72.74	3.63	-11.37	65.00	Fundamental	Vertical					FUND
3	10475.95	60.91	5.45	-4.49	61.87	Peak (NRB)	Vertical	148	1	--	--	Pass
4	15721.76	46.32	6.11	0.17	52.60	Max Avg	Vertical	194	228	54.0	-1.4	Pass
5	15721.76	61.04	6.11	0.17	67.32	Max Peak	Vertical	194	228	74.0	-6.7	Pass


**Test Notes:** EUT on 150cm table. Powered by delta MDS-030AAC15 PS

FUND – Fundamental

NRB – Non-Restricted Band

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


<b>Test Freq.</b>	5260 MHz	<b>Engineer</b>	SB
<b>Variant</b>	802.11a; 6 Mbs	<b>Temp (°C)</b>	20
<b>Freq. Range</b>	1000 MHz - 18000 MHz	<b>Rel. Hum. (%)</b>	46
<b>Power Setting</b>	80	<b>Press. (mBars)</b>	1001
<b>Antenna</b>	BT Dongle	<b>Duty Cycle (%)</b>	100
<b>Test Notes 1</b>	Laptop w/ PCMCIA Adapter mini HDMI cable to radio module;		
<b>Test Notes 2</b>			

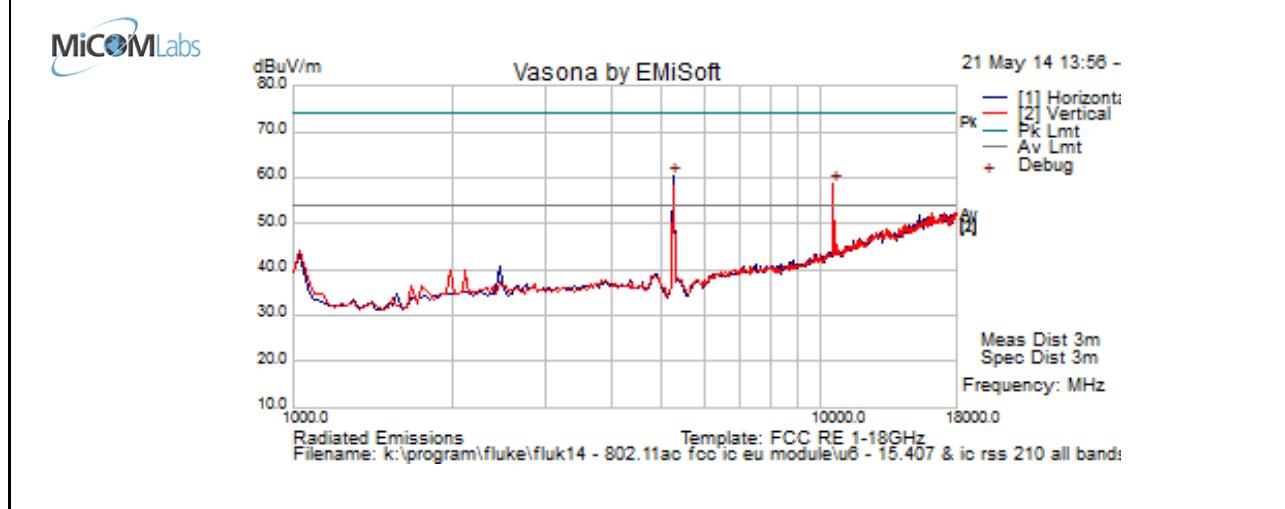

Formally measured emission peaks													
Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments	
5258.517	56.7	5.9	-2.2	60.4	Peak [Scan]	H	150					FUND	
10539.078	45.9	9.0	3.7	58.7	Peak [Scan]	V	150					NRB	
Legend:	TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


<b>Test Freq.</b>	5300 MHz	<b>Engineer</b>	SB
<b>Variant</b>	802.11a; 6 Mbs	<b>Temp (°C)</b>	20
<b>Freq. Range</b>	1000 MHz - 18000 MHz	<b>Rel. Hum. (%)</b>	46
<b>Power Setting</b>	80	<b>Press. (mBars)</b>	1001
<b>Antenna</b>	BT Dongle	<b>Duty Cycle (%)</b>	100
<b>Test Notes 1</b>	Laptop w/ PCMCIA Adapter mini HDMI cable to radio module;		
<b>Test Notes 2</b>			

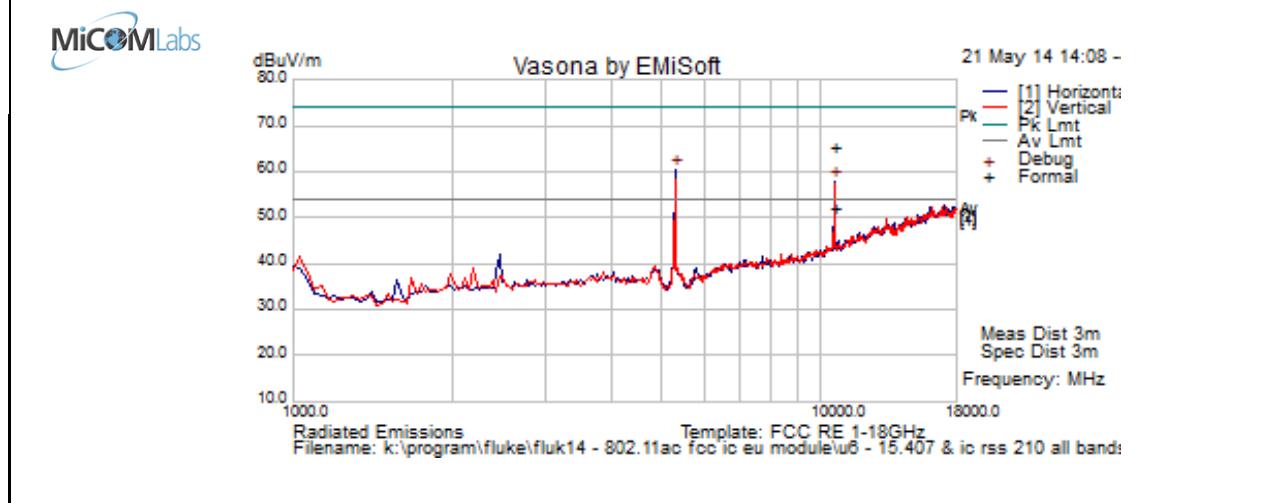

Formally measured emission peaks													
Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments	
10602.955	52.5	9.0	3.9	65.4	Peak Max	H	112	308	74.0	-8.6	Pass	RB	
10602.955	39.0	9.0	3.9	51.9	Average Max	H	112	308	54.0	-2.1	Pass	RB	
5292.585	56.8	6.0	-2.1	60.6	Peak [Scan]	H	150					FUND	
Legend:		TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission											
		NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205											

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

<b>Test Freq.</b>	5320 MHz	<b>Engineer</b>	SB
<b>Variant</b>	802.11a; 6 Mbs	<b>Temp (°C)</b>	20
<b>Freq. Range</b>	1000 MHz - 18000 MHz	<b>Rel. Hum. (%)</b>	46
<b>Power Setting</b>	80	<b>Press. (mBars)</b>	1001
<b>Antenna</b>	BT Dongle	<b>Duty Cycle (%)</b>	100
<b>Test Notes 1</b>	Laptop w/ PCMCIA Adapter mini HDMI cable to radio module;		
<b>Test Notes 2</b>			

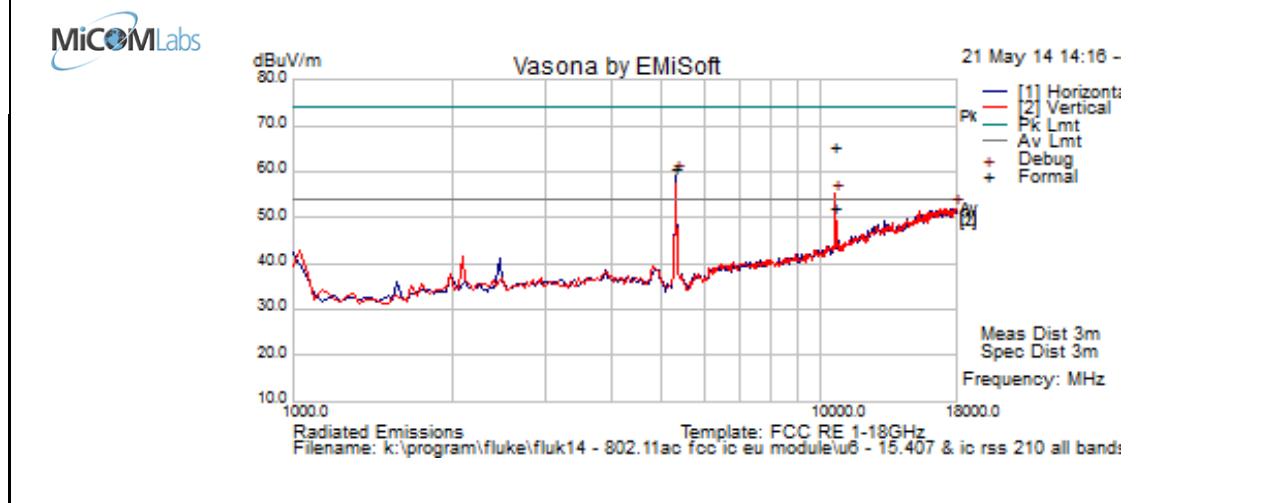

Formally measured emission peaks												
Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
10639.529	48.1	9.0	4.0	61.1	Peak Max	V	99	284	74.0	-12.9	Pass	RB
10639.529	35.1	9.0	4.0	48.1	Average Max	V	99	284	54.0	-5.9	Pass	RB
5326.653	55.2	6.0	-1.9	59.2	Peak [Scan]	H	150					FUND

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission  
 NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 106 of 516



#### RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS

Variant: 802.11a, Test Freq: 5500.00 MHz, Antenna: Ethertronics M380510, Power Setting: 74, Duty Cycle (%): 100

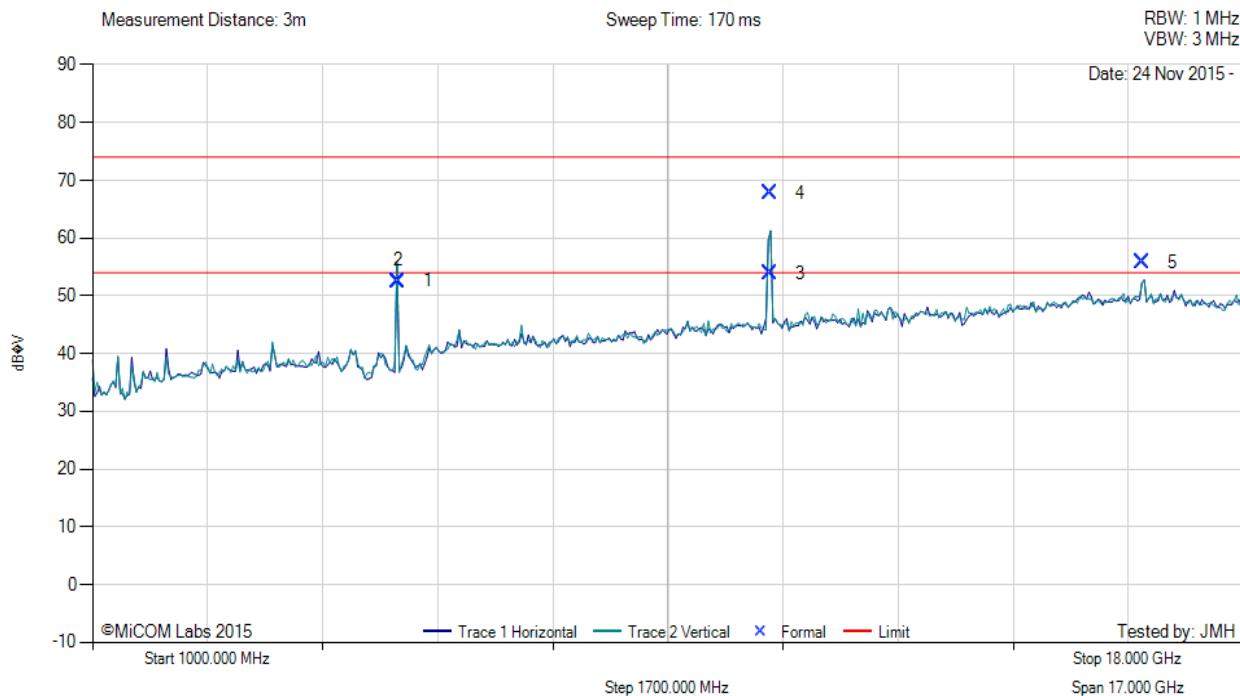


Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail
1	5507.29	60.01	3.75	-11.18	52.58	Fundamental	Vertical					FUND
3	11003.77	52.53	5.58	-4.23	53.88	Max Avg	Horizontal	192	132	54.0	-0.1	Pass
4	11003.77	66.41	5.58	-4.23	67.76	Max Peak	Horizontal	192	132	74.0	-6.2	Pass
5	16498.12	48.10	6.01	1.68	55.79	Peak (NRB)	Horizontal	198	0	--	--	Pass

**Test Notes:** EUT on 150cm table. Powered by delta MDS-030AAC15 PS

FUND – Fundamental

NRB – Non-Restricted Band

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

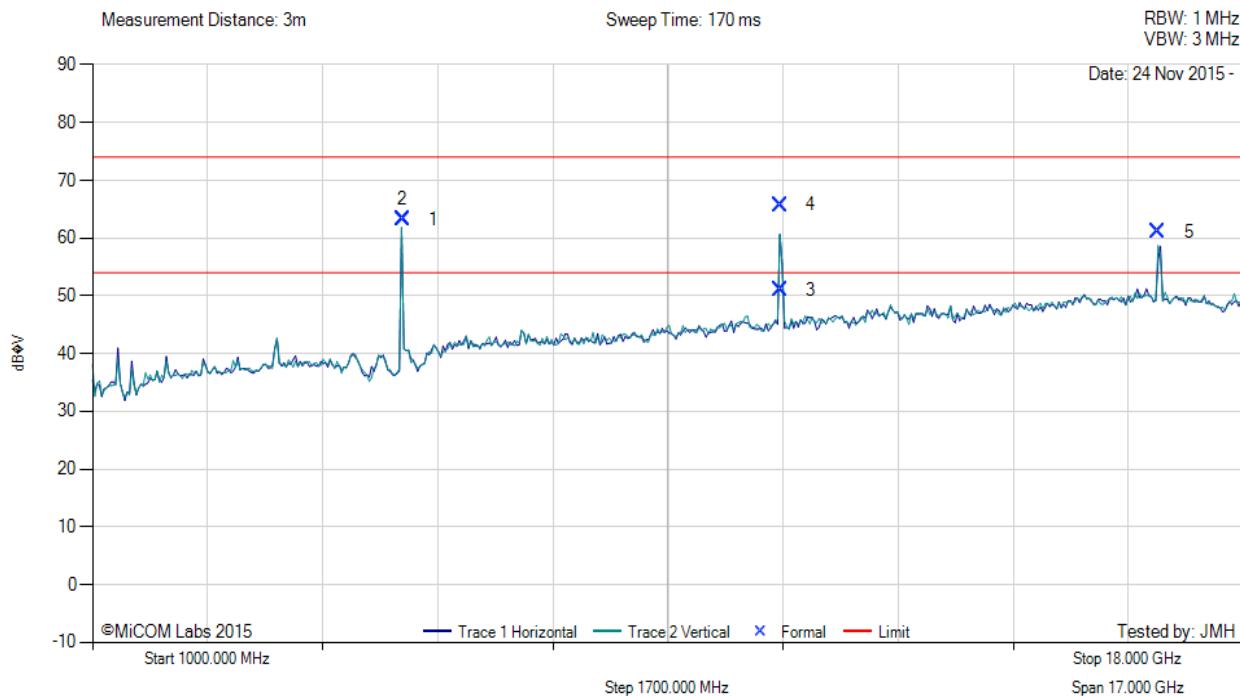


Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail
1	5578.40	70.58	3.81	-11.20	63.19	Fundamental	Horizontal					FUND
3	11165.41	49.50	5.63	-4.07	51.06	Max Avg	Horizontal	192	127	54.0	-2.9	Pass
4	11165.41	64.18	5.63	-4.07	65.74	Max Peak	Horizontal	192	127	74.0	-8.3	Pass
5	16743.13	53.57	6.07	1.50	61.14	Peak (NRB)	Vertical	101	262	--	--	Pass

**Test Notes:** EUT on 150cm table. Powered by delta MDS-030AAC15 PS  
 FUND – Fundamental  
 NRB – Non-Restricted Band



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 108 of 516

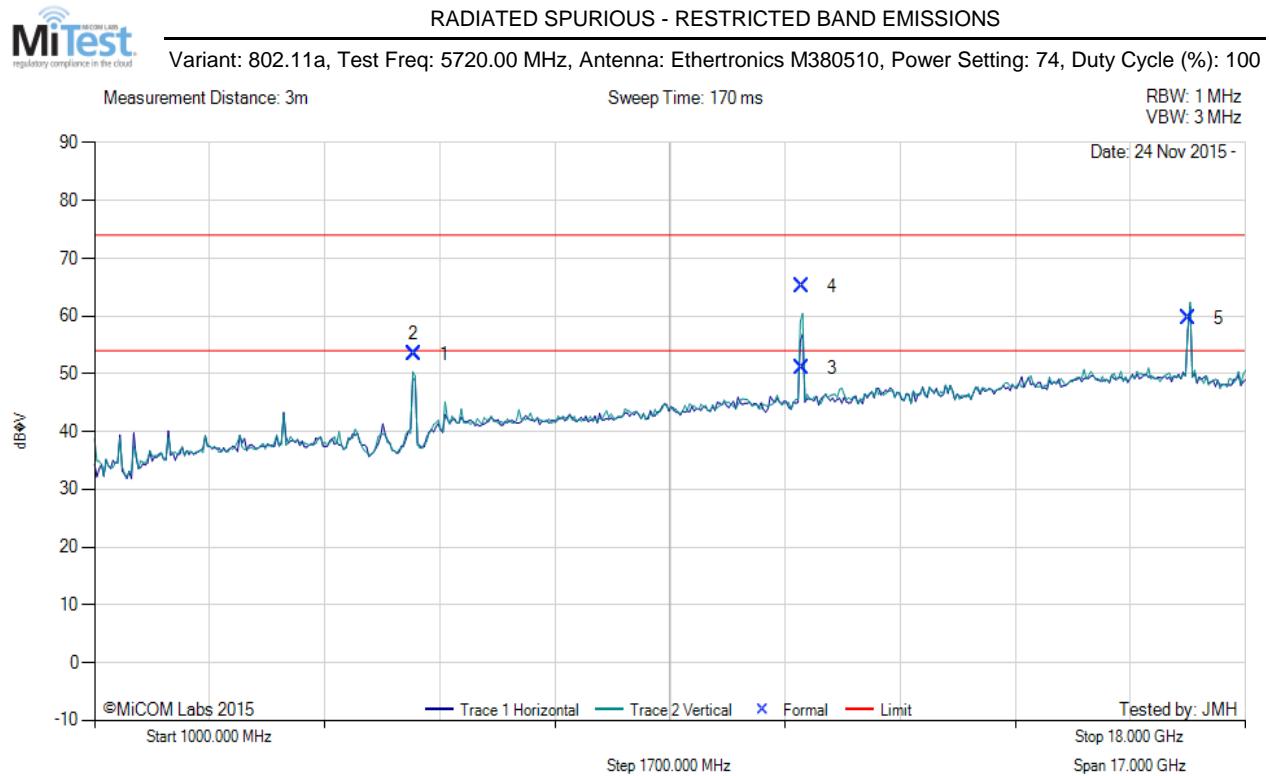

Num	Frequency MHz	Raw dB <sub>µ</sub> V	Cable Loss	AF dB	Level dB <sub>µ</sub> V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB <sub>µ</sub> V/m	Margin dB	Pass /Fail
1	5717.03	60.39	3.81	-10.75	53.45	Fundamental	Vertical					FUND
3	11440.20	50.65	5.35	-4.93	51.07	Max Avg	Vertical	188	211	54.0	-2.9	Pass
4	11440.20	64.73	5.35	-4.93	65.15	Max Peak	Vertical	188	211	74.0	-8.9	Pass
5	17156.87	52.83	6.35	0.39	59.57	Peak (NRB)	Vertical	101	0	--	--	Pass

**Test Notes:** EUT on 150cm table. Powered by delta MDS-030AAC15 PS  
FUND – Fundamental  
NRB – Non-Restricted Band

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 109 of 516



#### RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS

Variant: 802.11a, Test Freq: 5745.00 MHz, Antenna: Ethertronics M380510, Power Setting: 84, Duty Cycle (%): 100

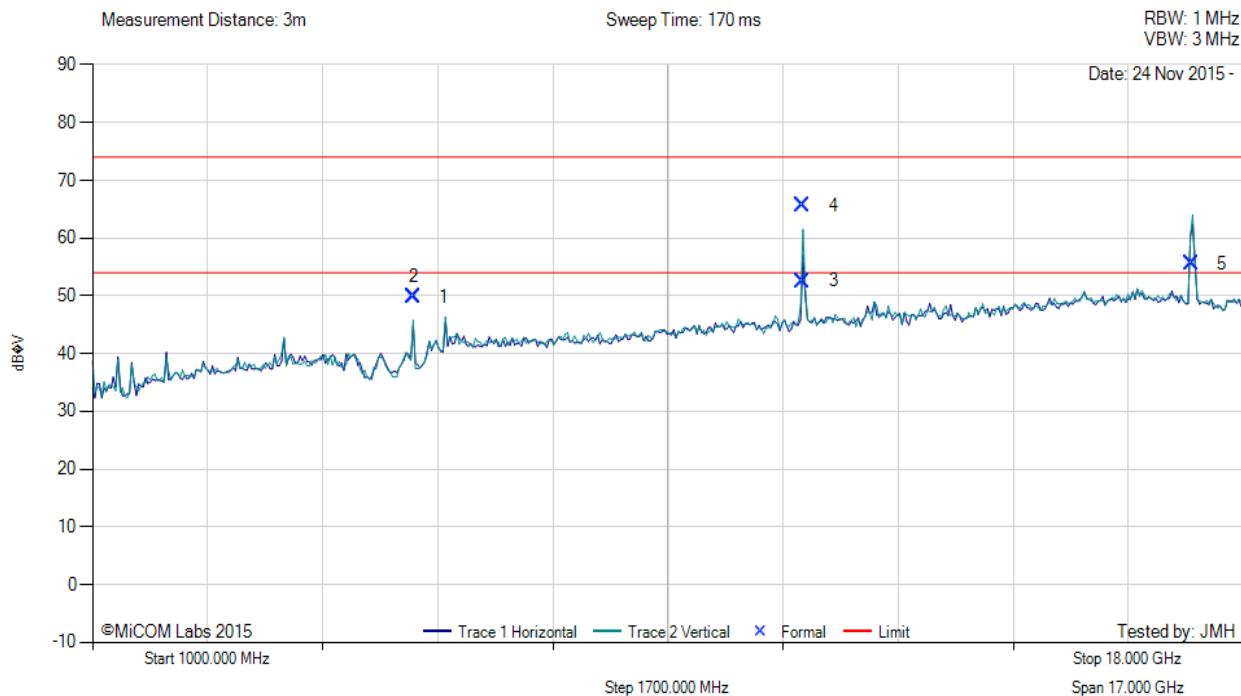

Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail
1	5739.45	56.72	3.82	-10.67	49.87	Fundamental	Vertical					FUND
3	11493.27	52.00	5.44	-4.84	52.60	Max Avg	Vertical	197	331	54.0	-1.4	Pass
4	11493.27	65.00	5.44	-4.84	65.60	Max Peak	Vertical	197	331	74.0	-8.4	Pass
5	17234.39	48.75	6.43	0.35	55.53	Peak (NRB)	Vertical	198	360	--	--	Pass

**Test Notes:** EUT on 150cm table. Powered by delta MDS-030AAC15 PS


FUND – Fundamental

NRB – Non-Restricted Band

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS

Variant: 802.11a, Test Freq: 5785.00 MHz, Antenna: Ethertronics M380510, Power Setting: 82

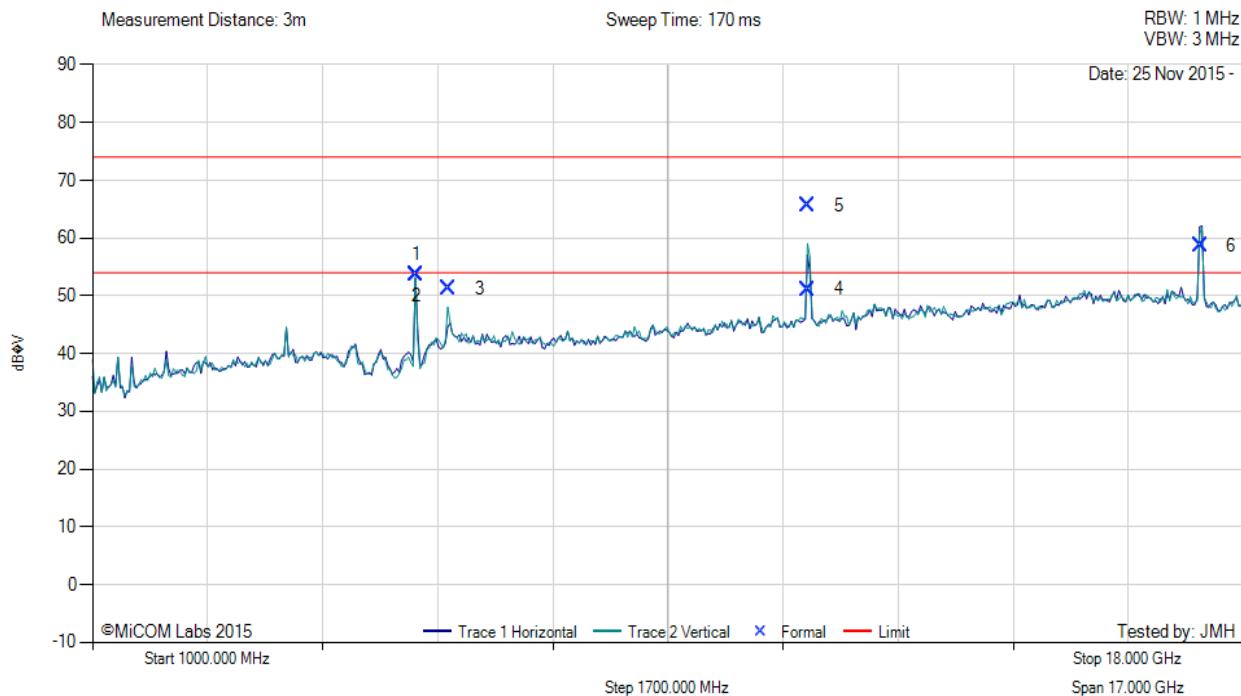

Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail
1	5786.97	60.33	3.79	-10.43	53.69	Fundamental	Horizontal					FUND
3	6265.33	55.84	3.93	-8.53	51.24	Peak (NRB)	Vertical	200	0	--	--	Pass
4	11570.30	50.30	5.46	-4.64	51.12	Max Avg	Vertical	197	321	54.0	-2.9	Pass
5	11570.30	64.76	5.46	-4.64	65.58	Max Peak	Vertical	197	321	74.0	-8.4	Pass
6	17367.01	52.40	6.41	-0.07	58.74	Peak (NRB)	Horizontal	151	35	--	--	Pass

**Test Notes:** EUT on 150cm table. Powered by delta MDS-030AAC15 PS


FUND – Fundamental

NRB – Non-Restricted Band

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS

Variant: 802.11a, Test Freq: 5825.00 MHz, Antenna: Ethertronics M380510, Power Setting: 82

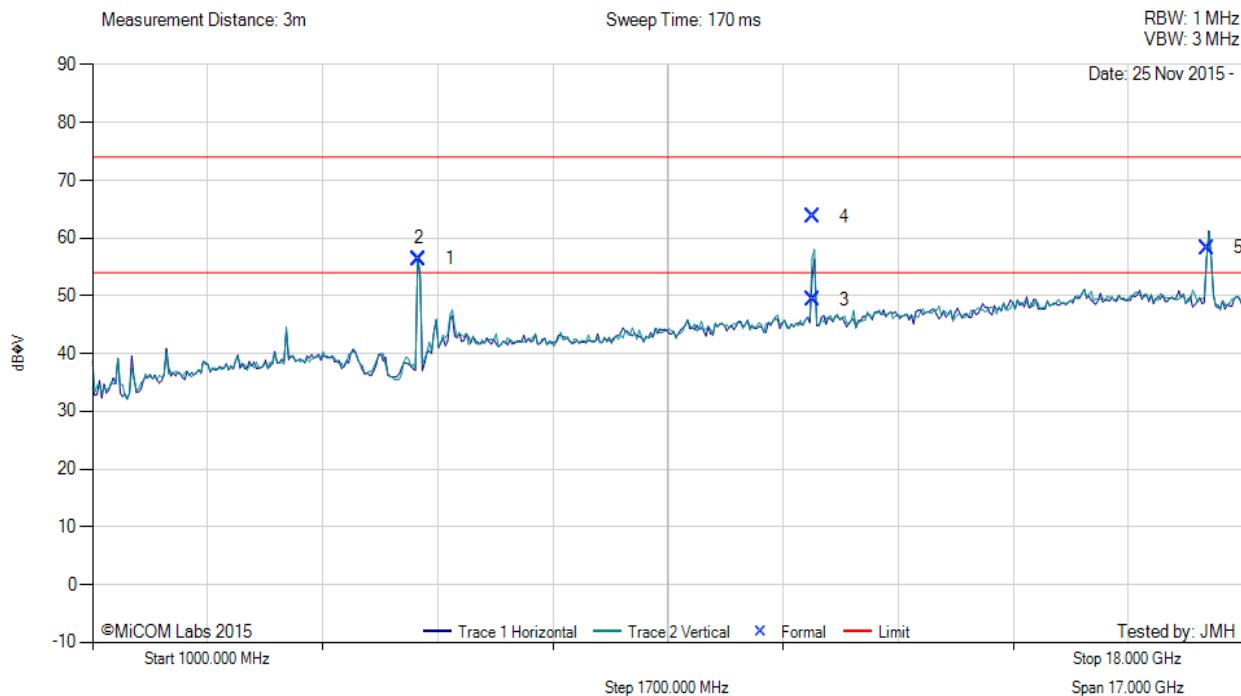

Num	Frequency MHz	Raw dB <sub>AV</sub>	Cable Loss	AF dB	Level dB <sub>AV</sub> /m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB <sub>AV</sub> /m	Margin dB	Pass /Fail
1	5824.77	62.84	3.83	-10.24	56.43	Fundamental	Horizontal					FUND
3	11649.30	48.40	5.44	-4.47	49.37	Max Avg	Vertical	193	315	54.0	-4.6	Pass
4	11649.30	62.72	5.44	-4.47	63.69	Max Peak	Vertical	193	315	74.0	-10.3	Pass
5	17472.95	52.68	6.23	-0.57	58.34	Peak (NRB)	Horizontal	151	0	--	--	Pass


**Test Notes:** EUT on 150cm table. Powered by delta MDS-030AAC15 PS

FUND – Fundamental

NRB – Non-Restricted Band

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

**TX Spur Laird MAF95310 Antenna:**

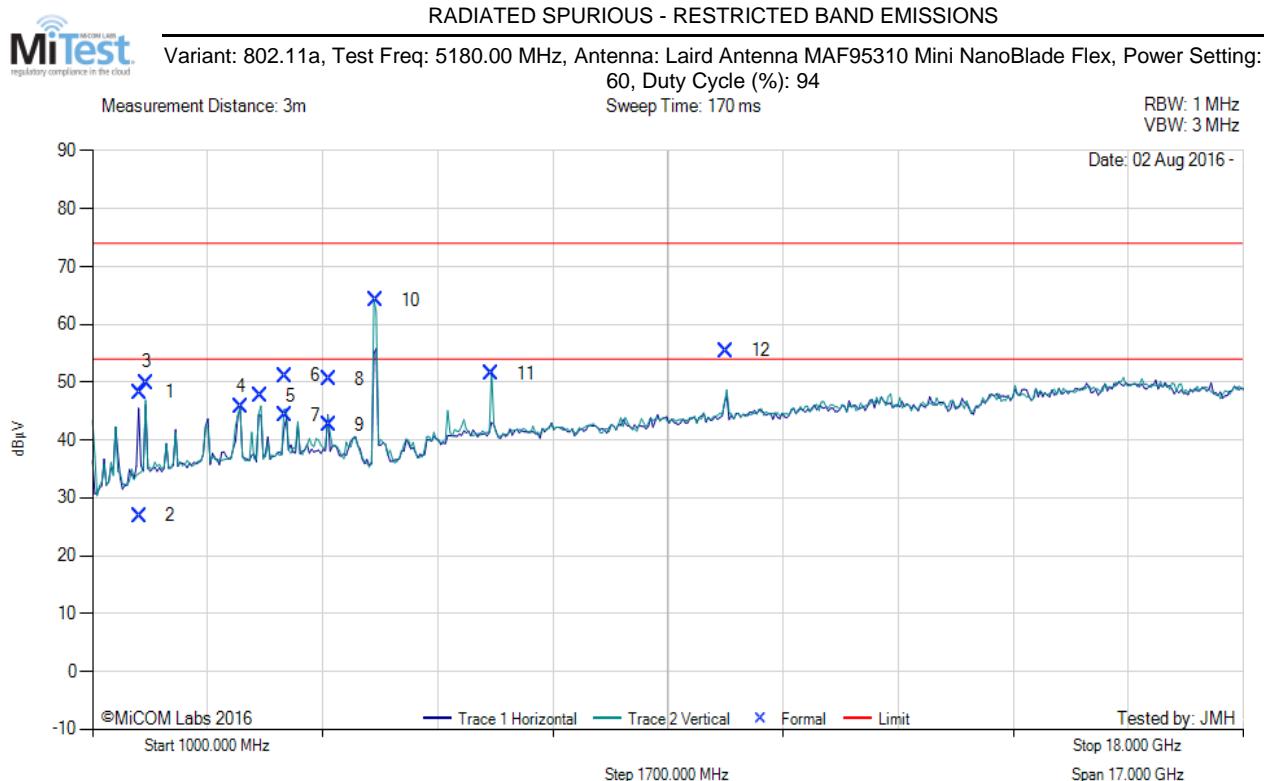


Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	1694.01	60.78	2.42	-14.96	48.24	Max Peak	Horizontal	152	353	74.0	-25.8	Pass
2	1694.01	39.45	2.42	-14.96	26.91	Max Avg	Horizontal	152	353	54.0	-27.1	Pass
3	1799.93	61.09	2.47	-13.65	49.91	Peak (NRB)	Vertical	151	160	--	--	Pass
4	3200.22	54.02	3.00	-11.29	45.73	Peak (NRB)	Horizontal	151	231	--	--	Pass
5	3483.38	55.82	3.10	-11.26	47.66	Peak (NRB)	Vertical	151	177	--	--	Pass
6	3846.61	58.70	3.21	-10.82	51.09	Max Peak	Vertical	136	142	74.0	-22.9	Pass
7	3846.61	51.87	3.21	-10.82	44.26	Max Avg	Vertical	136	142	54.0	-9.7	Pass
8	4500.03	58.57	3.49	-11.60	50.46	Max Peak	Horizontal	130	49	74.0	-23.5	Pass
9	4500.03	50.68	3.49	-11.60	42.57	Max Avg	Horizontal	130	49	54.0	-11.4	Pass
10	5181.16	72.02	3.69	-11.50	64.21	Fundamental	Vertical	151	1	--	--	
11	6893.79	54.86	4.15	-7.50	51.51	Peak (NRB)	Vertical	151	0	--	--	Pass
12	10358.44	55.14	5.55	-5.28	55.41	Peak (NRB)	Vertical	151	0	--	--	Pass

**Test Notes:** EUT on 150cm table powered by Fairway PS.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS

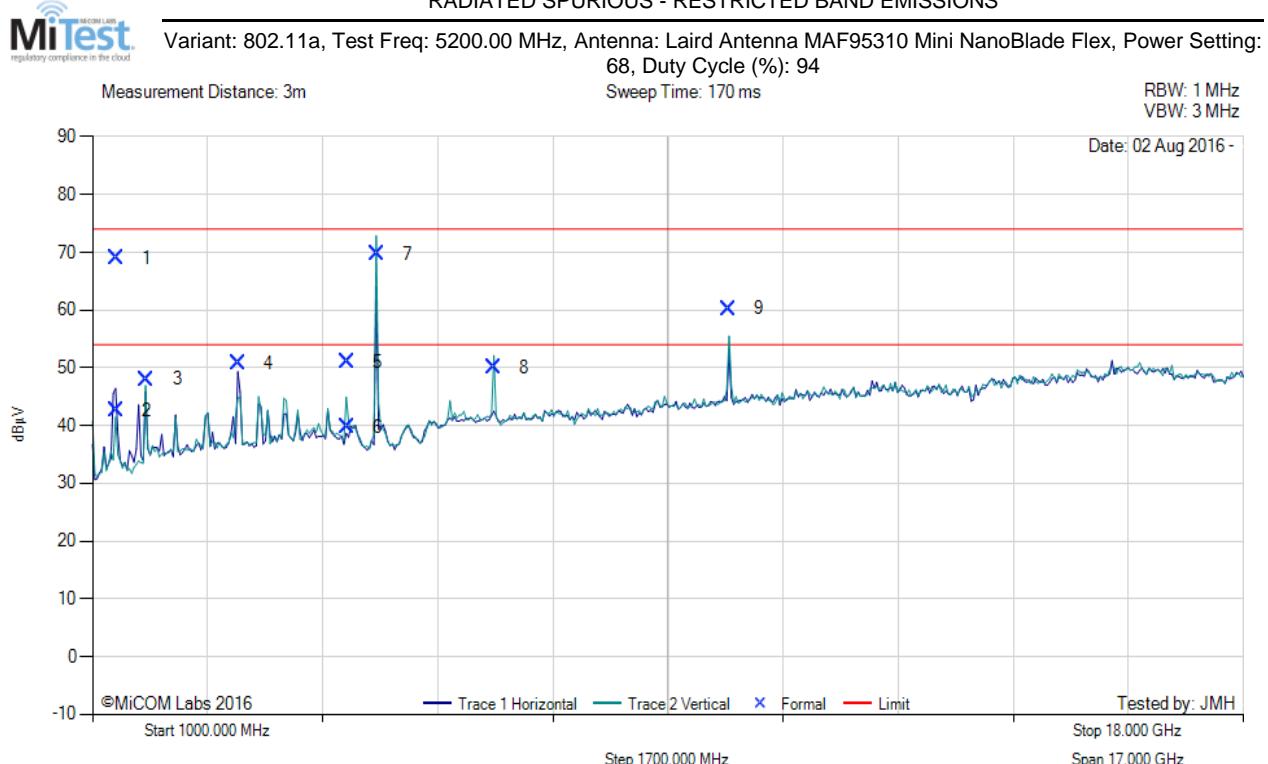

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	1349.83	82.02	2.20	-15.19	69.03	Max Peak	Horizontal	186	336	74.0	-5.0	Pass
2	1349.83	55.62	2.20	-15.19	42.63	Max Avg	Horizontal	186	336	54.0	-11.4	Pass
3	1799.98	59.17	2.47	-13.65	47.99	Peak (NRB)	Vertical	152	199	--	--	Pass
4	3149.86	58.94	2.99	-11.15	50.78	Peak (NRB)	Horizontal	152	150	--	--	Pass
5	4766.73	58.56	3.60	-11.12	51.04	Max Peak	Vertical	160	352	74.0	-23.0	Pass
6	4766.73	47.22	3.60	-11.12	39.70	Max Avg	Vertical	160	352	54.0	-14.3	Pass
7	5202.93	77.56	3.65	-11.45	69.76	Fundamental	Vertical	101	1	--	--	
8	6933.13	53.37	4.11	-7.49	49.99	Peak (NRB)	Vertical	152	0	--	--	Pass
9	10399.00	59.88	5.39	-5.05	60.22	Peak (NRB)	Vertical	152	0	--	--	Pass

**Test Notes:** EUT on 150cm table powered by Fairway PS.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 114 of 516

#### RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS




Variant: 802.11a, Test Freq: 5240.00 MHz, Antenna: Laird Antenna MAF95310 Mini NanoBlade Flex, Power Setting: 68, Duty Cycle (%): 94

Measurement Distance: 3m

Sweep Time: 170 ms

RBW: 1 MHz

VBW: 3 MHz

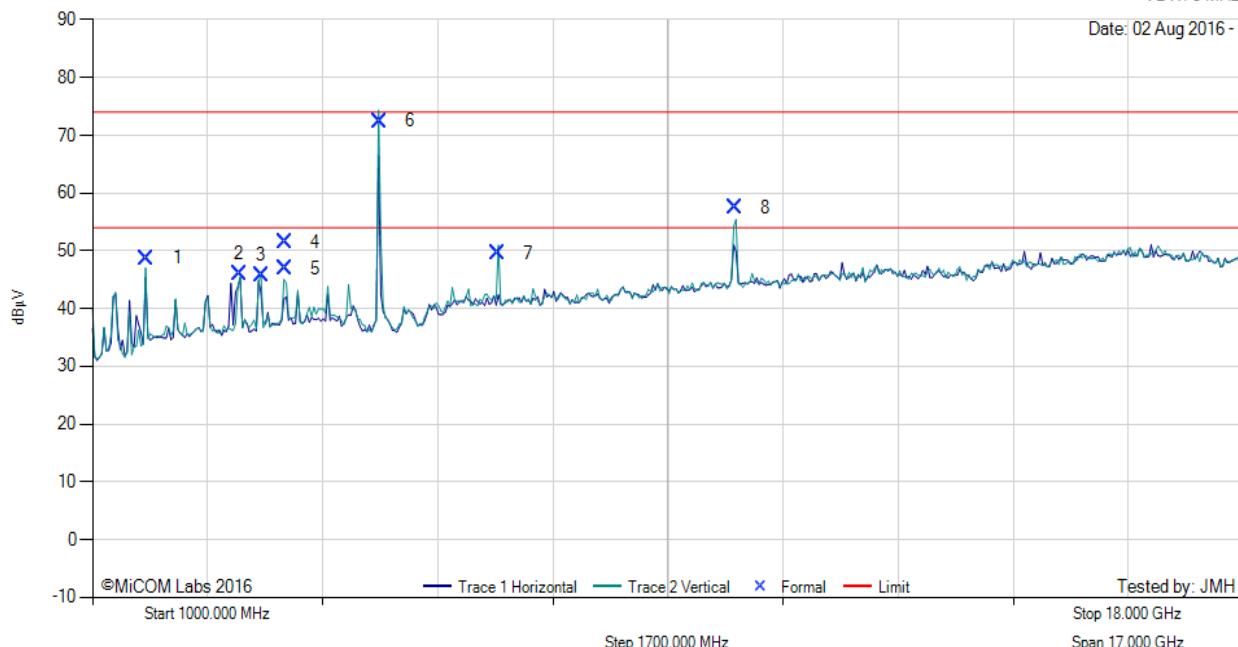

Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail
1	1799.93	59.95	2.47	-13.65	48.77	Peak (NRB)	Vertical	151	136	--	--	Pass
2	3166.79	54.22	2.99	-11.19	46.02	Peak (NRB)	Horizontal	151	309	--	--	Pass
3	3493.33	53.92	3.11	-11.26	45.77	Peak (NRB)	Vertical	151	246	--	--	Pass
4	3843.31	59.09	3.21	-10.82	51.48	Max Peak	Vertical	145	142	74.0	-22.5	Pass
5	3843.31	54.48	3.21	-10.82	46.87	Max Avg	Vertical	145	142	54.0	-7.1	Pass
6	5237.40	80.16	3.63	-11.37	72.42	Fundamental	Vertical	101	1	--	--	
7	6986.46	52.89	4.13	-7.45	49.57	Peak (NRB)	Vertical	151	1	--	--	Pass
8	10489.10	56.47	5.44	-4.40	57.51	Peak (NRB)	Vertical	151	1	--	--	Pass

**Test Notes:** EUT on 150cm table powered by Fairway PS.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS

**MiTest**  
regulatory compliance in the cloud


Variant: 802.11a, Test Freq: 5260.00 MHz, Antenna: Laird Antenna MAF95310 Mini NanoBlade Flex, Power Setting: 80, Duty Cycle (%): 94

Measurement Distance: 3m

Sweep Time: 170 ms

RBW: 1 MHz

VBW: 3 MHz

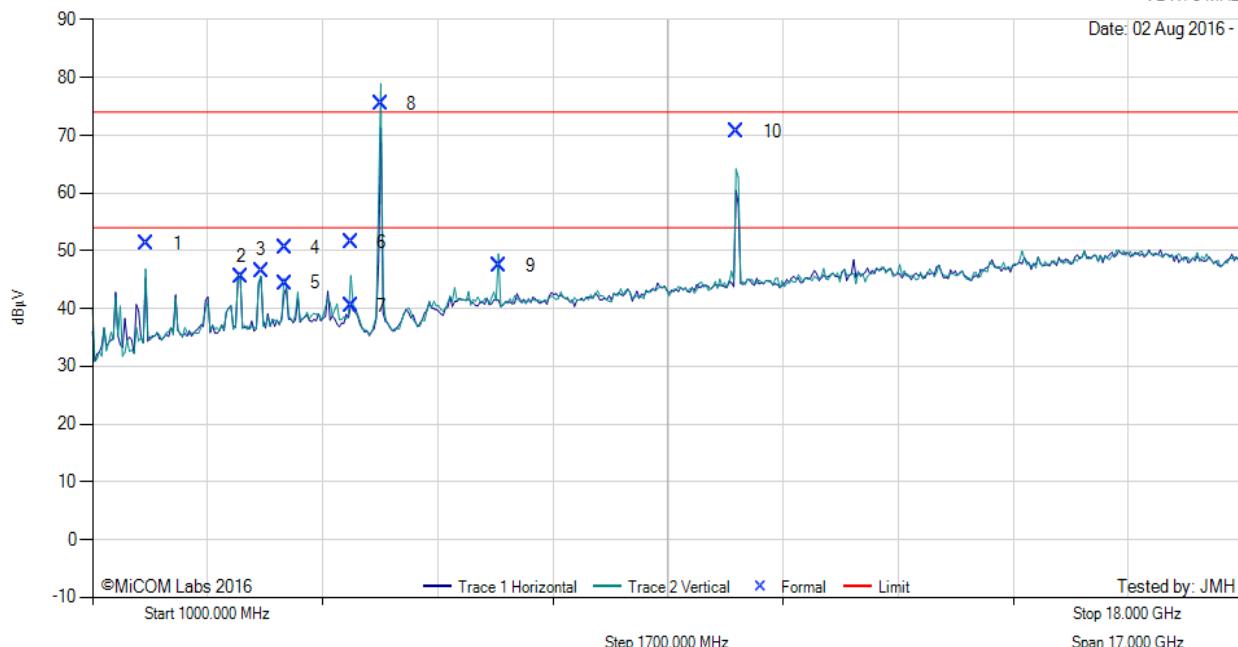

Num	Frequency MHz	Raw dB <sub>μV</sub>	Cable Loss dB	AF dB	Level dB <sub>μV/m</sub>	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB <sub>μV/m</sub>	Margin dB	Pass /Fail
1	1799.95	62.36	2.47	-13.65	51.18	Peak (NRB)	Vertical	151	171	--	--	Pass
2	3200.32	53.82	3.00	-11.29	45.53	Peak (NRB)	Vertical	151	171	--	--	Pass
3	3493.21	54.76	3.11	-11.26	46.61	Peak (NRB)	Vertical	151	171	--	--	Pass
4	3846.72	58.17	3.21	-10.82	50.56	Max Peak	Vertical	140	121	74.0	-23.4	Pass
5	3846.72	52.04	3.21	-10.82	44.43	Max Avg	Vertical	140	121	54.0	-9.6	Pass
6	4822.17	59.07	3.54	-11.15	51.46	Max Peak	Vertical	155	359	74.0	-22.5	Pass
7	4822.17	48.13	3.54	-11.15	40.52	Max Avg	Vertical	155	359	54.0	-13.5	Pass
8	5263.61	83.04	3.67	-11.27	75.44	Fundamental	Vertical	101	1	--	--	
9	7013.22	50.66	4.18	-7.42	47.42	Peak (NRB)	Vertical	151	171	--	--	Pass
10	10518.36	69.42	5.44	-4.22	70.64	Peak (NRB)	Vertical	151	1	--	--	Pass

**Test Notes:** EUT on 150cm table powered by Fairway PS.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS




Variant: 802.11a, Test Freq: 5300.00 MHz, Antenna: Laird Antenna MAF95310 Mini NanoBlade Flex, Power Setting: 80, Duty Cycle (%): 94

Measurement Distance: 3m

Sweep Time: 170 ms

RBW: 1 MHz  
VBW: 3 MHz

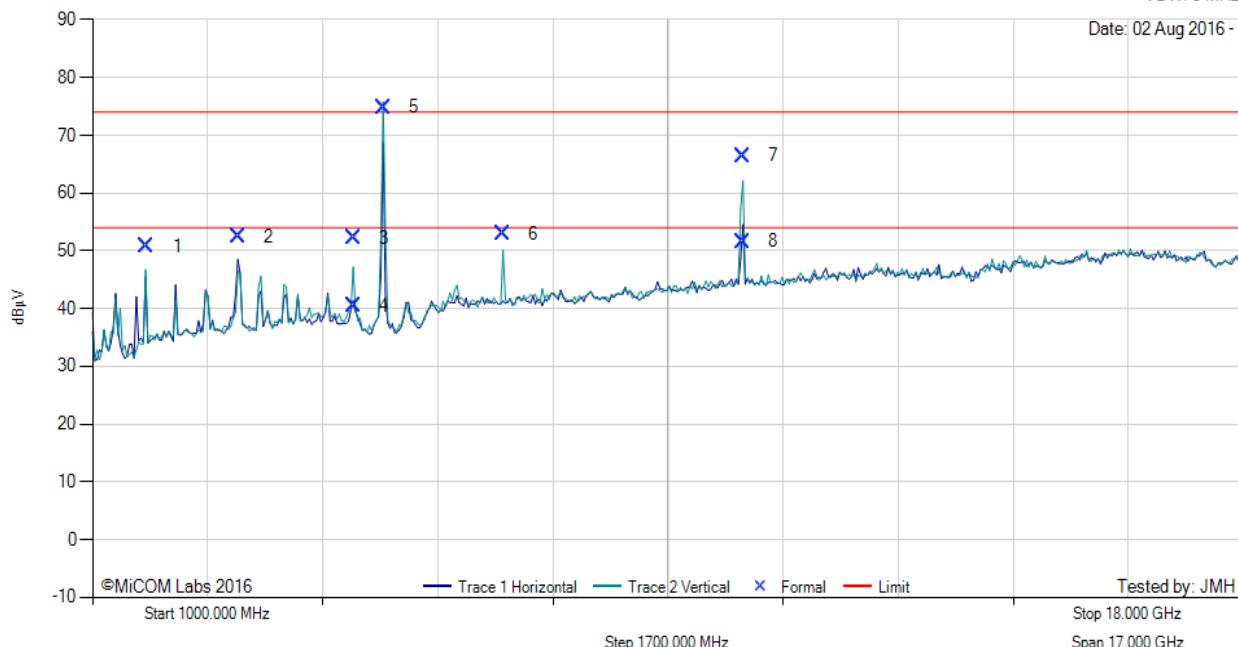

Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail
1	1799.84	61.97	2.47	-13.65	50.79	Peak (NRB)	Vertical	100	176	--	--	Pass
2	3149.89	60.60	2.99	-11.15	52.44	Peak (NRB)	Horizontal	100	1	--	--	Pass
3	4859.47	59.85	3.58	-11.21	52.22	Max Peak	Vertical	146	354	74.0	-21.8	Pass
4	4859.47	48.12	3.58	-11.21	40.49	Max Avg	Vertical	146	354	54.0	-13.5	Pass
5	5297.84	82.10	3.81	-11.10	74.81	Fundamental	Vertical	101	1	--	--	
6	7066.52	56.06	4.18	-7.34	52.90	Peak (NRB)	Vertical	100	0	--	--	Pass
7	10602.44	64.80	5.57	-3.93	66.44	Max Peak	Vertical	100	1	74.0	-7.6	Pass
8	10602.44	49.99	5.57	-3.93	51.63	Max Avg	Vertical	100	1	54.0	-2.4	Pass

**Test Notes:** EUT on 150cm table powered by Fairway PS.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS




Variant: 802.11a, Test Freq: 5320.00 MHz, Antenna: Laird Antenna MAF95310 Mini NanoBlade Flex, Power Setting: 56, Duty Cycle (%): 94

Measurement Distance: 3m

Sweep Time: 170 ms

RBW: 1 MHz

VBW: 3 MHz

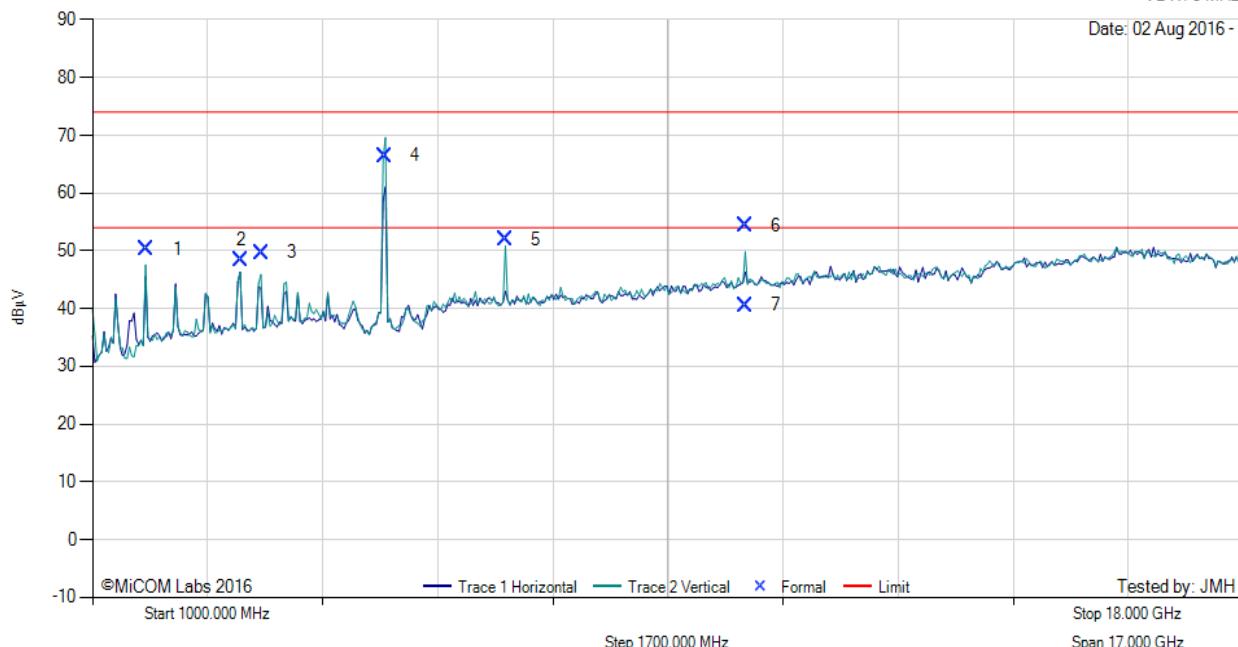

Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail
1	1799.89	61.52	2.47	-13.65	50.34	Peak (NRB)	Vertical	200	185	--	--	Pass
2	3199.92	56.62	3.00	-11.29	48.33	Peak (NRB)	Horizontal	200	57	--	--	Pass
3	3493.64	57.82	3.11	-11.26	49.67	Peak (NRB)	Vertical	200	185	--	--	Pass
4	5316.75	73.74	3.76	-11.07	66.43	Fundamental	Vertical	101	1	--	--	
5	7093.19	55.10	4.23	-7.33	52.00	Peak (NRB)	Vertical	200	5	--	--	Pass
6	10636.27	52.77	5.46	-3.89	54.34	Max Peak	Vertical	178	354	74.0	-19.7	Pass
7	10636.27	39.02	5.46	-3.89	40.59	Max Avg	Vertical	178	354	54.0	-13.4	Pass

**Test Notes:** EUT on 150cm table powered by Fairway PS.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS


**MiTest**  
regulatory compliance in the cloud

Variant: 802.11a, Test Freq: 5500.00 MHz, Antenna: Laird Antenna MAF95310 Mini NanoBlade Flex, Power Setting: 58, Duty Cycle (%): 94

Measurement Distance: 3m

Sweep Time: 170 ms

RBW: 1 MHz  
VBW: 3 MHz

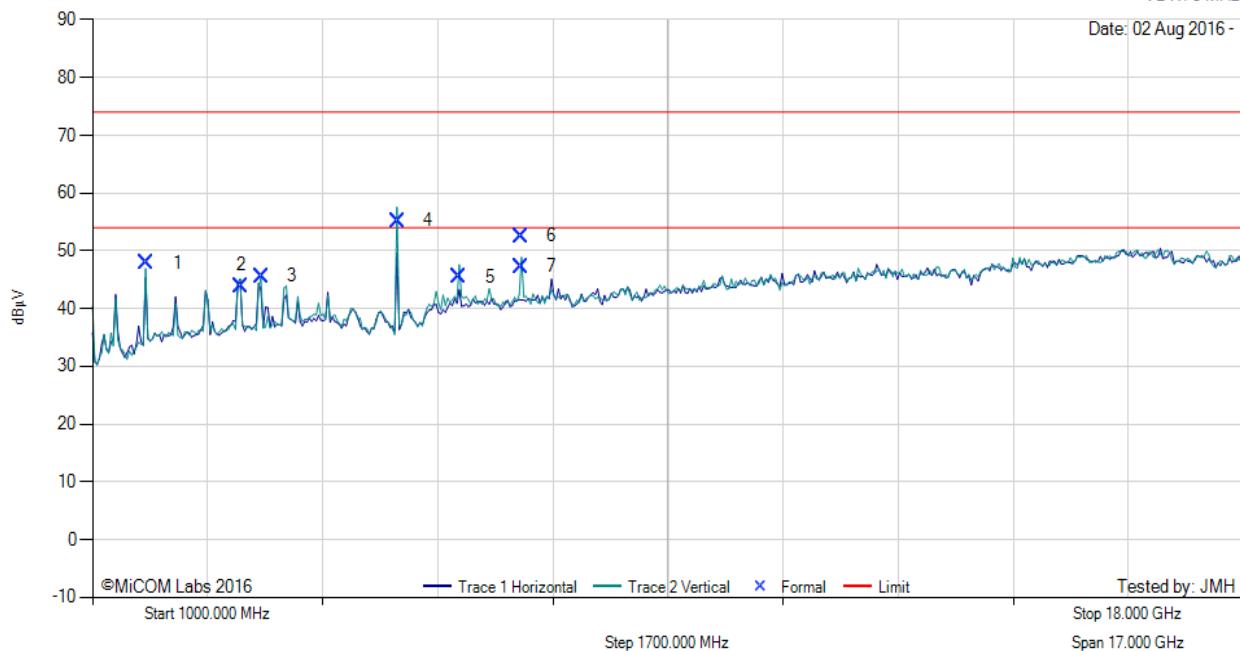

Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail
1	1799.91	59.03	2.47	-13.65	47.85	Peak (NRB)	Vertical	151	195	--	--	Pass
2	3199.99	52.21	3.00	-11.29	43.92	Peak (NRB)	Horizontal	151	195	--	--	Pass
3	3493.41	53.80	3.11	-11.26	45.65	Peak (NRB)	Vertical	151	167	--	--	Pass
4	5503.52	62.60	3.75	-11.18	55.17	Fundamental	Vertical	101	1	--	--	
5	6416.52	49.58	3.98	-8.01	45.55	Peak (NRB)	Vertical	151	117	--	--	Pass
6	7333.15	55.52	4.28	-7.24	52.56	Max Peak	Vertical	149	359	74.0	-21.4	Pass
7	7333.15	50.24	4.28	-7.24	47.28	Max Avg	Vertical	149	359	54.0	-6.7	Pass

**Test Notes:** EUT on 150cm table powered by Fairway PS.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS




Variant: 802.11a, Test Freq: 5580.00 MHz, Antenna: Laird Antenna MAF95310 Mini NanoBlade Flex, Power Setting: 80, Duty Cycle (%): 94

Measurement Distance: 3m

Sweep Time: 170 ms

RBW: 1 MHz  
VBW: 3 MHz

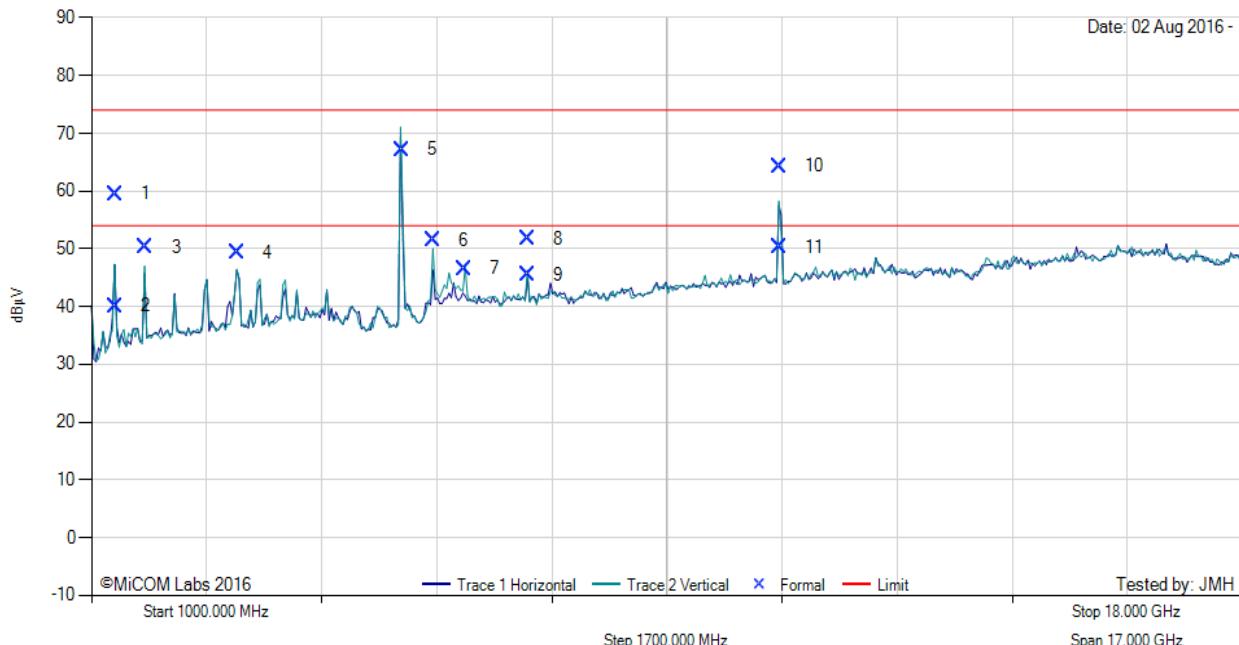

Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail
1	1350.27	72.48	2.20	-15.19	59.49	Max Peak	Horizontal	119	225	74.0	-14.5	Pass
2	1350.27	53.05	2.20	-15.19	40.06	Max Avg	Horizontal	119	225	54.0	-13.9	Pass
3	1799.93	61.40	2.47	-13.65	50.22	Peak (NRB)	Vertical	157	181	--	--	Pass
4	3149.68	57.42	2.99	-11.15	49.26	Peak (NRB)	Horizontal	157	181	--	--	Pass
5	5582.73	74.59	3.79	-11.19	67.19	Fundamental	Vertical	101	1	--	--	
6	6043.16	57.29	3.88	-9.66	51.51	Peak (NRB)	Vertical	157	55	--	--	Pass
7	6509.95	50.47	4.02	-7.93	46.56	Peak (NRB)	Vertical	157	0	--	--	Pass
8	7439.87	54.50	4.30	-7.13	51.67	Max Peak	Vertical	125	13	74.0	-22.3	Pass
9	7439.87	48.33	4.30	-7.13	45.50	Max Avg	Vertical	125	13	54.0	-8.5	Pass
10	11163.64	62.68	5.67	-4.07	64.28	Max Peak	Vertical	128	13	74.0	-9.7	Pass
11	11163.64	48.72	5.67	-4.07	50.32	Max Avg	Vertical	128	13	54.0	-3.7	Pass

**Test Notes:** EUT on 150cm table powered by Fairway PS.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS




Variant: 802.11a, Test Freq: 5720.00 MHz, Antenna: Laird Antenna MAF95310 Mini NanoBlade Flex, Power Setting: 80, Duty Cycle (%): 94

Measurement Distance: 3m

Sweep Time: 170 ms

RBW: 1 MHz  
VBW: 3 MHz

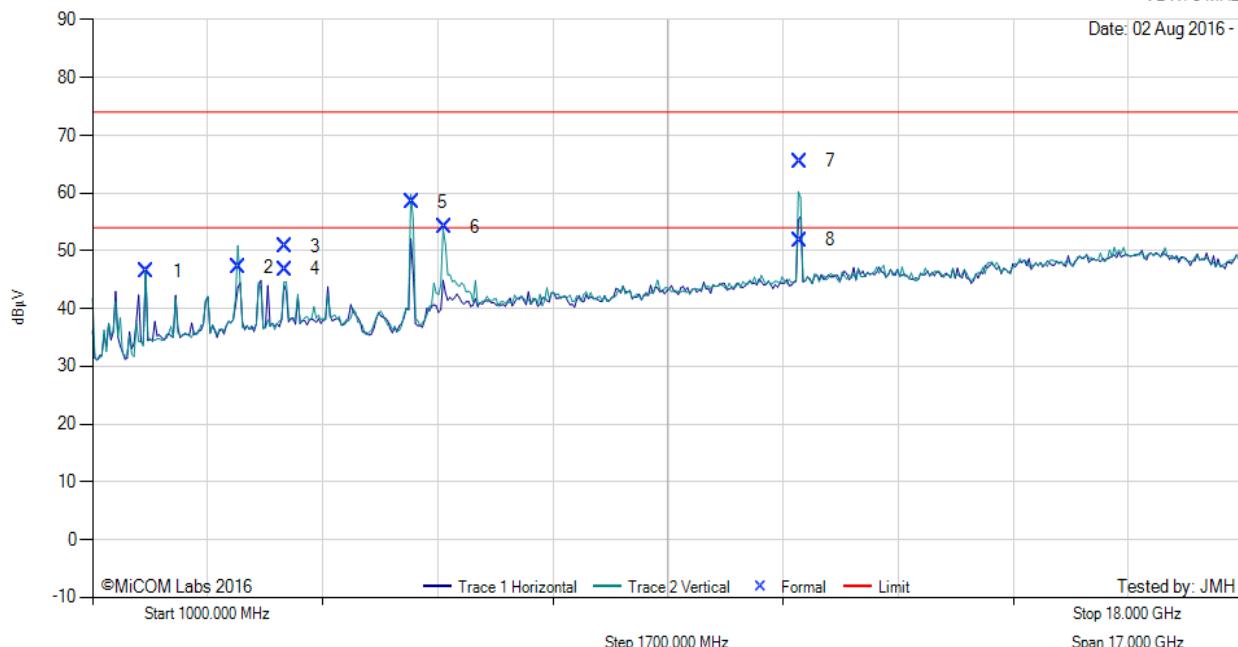


Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail
1	1799.88	57.61	2.47	-13.65	46.43	Peak (NRB)	Vertical	150	200	--	--	Pass
2	3149.79	55.40	2.99	-11.15	47.24	Peak (NRB)	Vertical	150	164	--	--	Pass
3	3846.68	58.43	3.21	-10.82	50.82	Max Peak	Vertical	138	139	74.0	-23.2	Pass
4	3846.68	54.44	3.21	-10.82	46.83	Max Avg	Vertical	138	139	54.0	-7.2	Pass
5	5712.38	65.36	3.83	-10.77	58.42	Fundamental	Vertical	150	1	--	--	
6	6195.03	59.18	3.90	-8.95	54.13	Peak (NRB)	Vertical	150	62	--	--	Pass
7	11440.16	65.11	5.35	-4.93	65.53	Max Peak	Vertical	146	10	74.0	-8.5	Pass
8	11440.16	51.44	5.35	-4.93	51.86	Max Avg	Vertical	146	10	54.0	-2.1	Pass

**Test Notes:** EUT on 150cm table powered by Fairway PS.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS

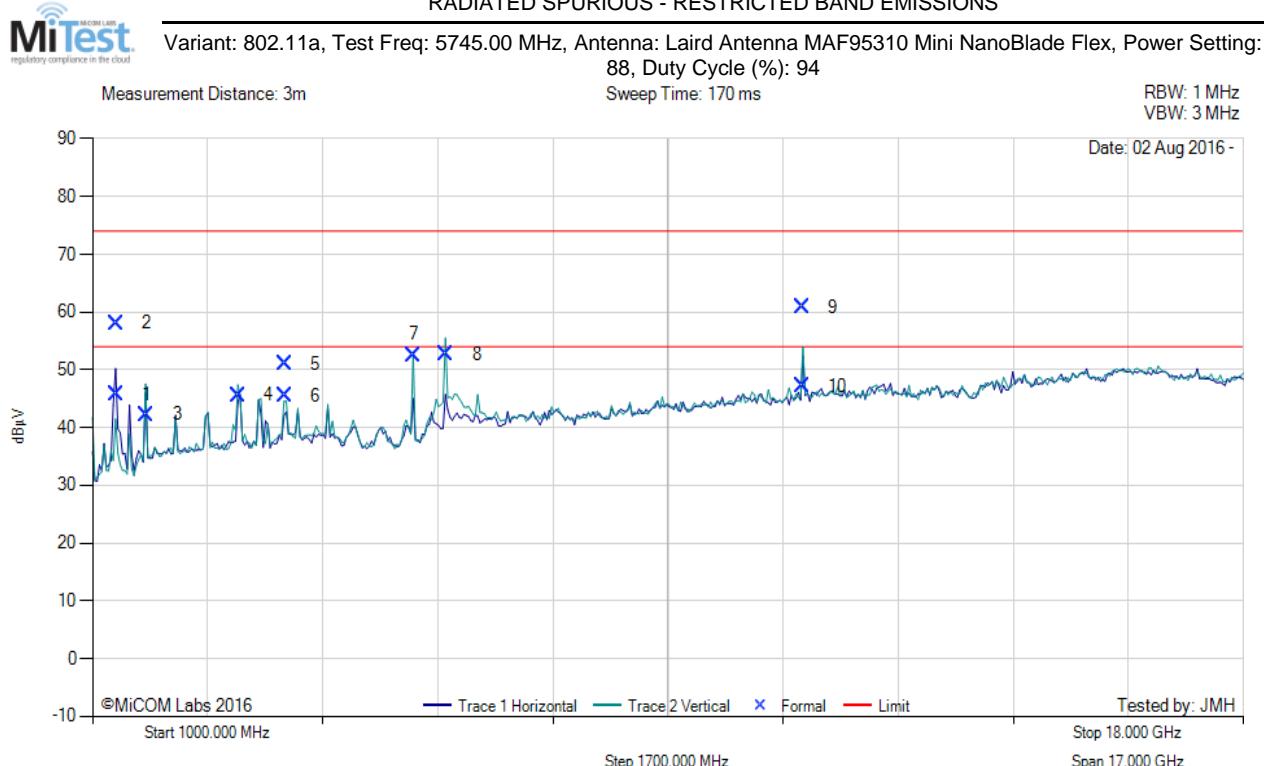


Num	Frequency MHz	Raw dB <sub>μ</sub> V	Cable Loss dB	AF dB	Level dB <sub>μ</sub> V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB <sub>μ</sub> V/m	Margin dB	Pass /Fail
1	1350.06	58.73	2.20	-15.19	45.74	Max Avg	Horizontal	151	1	54.0	-8.3	Pass
2	1350.06	71.09	2.20	-15.19	58.10	Max Peak	Horizontal	151	1	74.0	-15.9	Pass
3	1799.92	53.46	2.47	-13.65	42.28	Peak (NRB)	Vertical	151	1	--	--	Pass
4	3149.86	53.74	2.99	-11.15	45.58	Peak (NRB)	Vertical	151	1	--	--	Pass
5	3843.23	58.56	3.21	-10.82	50.95	Max Peak	Vertical	136	120	74.0	-23.1	Pass
6	3843.23	53.04	3.21	-10.82	45.43	Max Avg	Vertical	136	120	54.0	-8.6	Pass
7	5737.51	59.43	3.82	-10.67	52.58	Fundamental	Vertical	151	1	--	--	
8	6224.97	57.54	3.92	-8.74	52.72	Peak (NRB)	Vertical	151	1	--	--	Pass
9	11490.63	60.27	5.45	-4.84	60.88	Max Peak	Vertical	130	16	74.0	-13.1	Pass
10	11490.63	46.51	5.45	-4.84	47.12	Max Avg	Vertical	130	16	54.0	-6.9	Pass

**Test Notes:** EUT on 150cm table powered by Fairway PS.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS

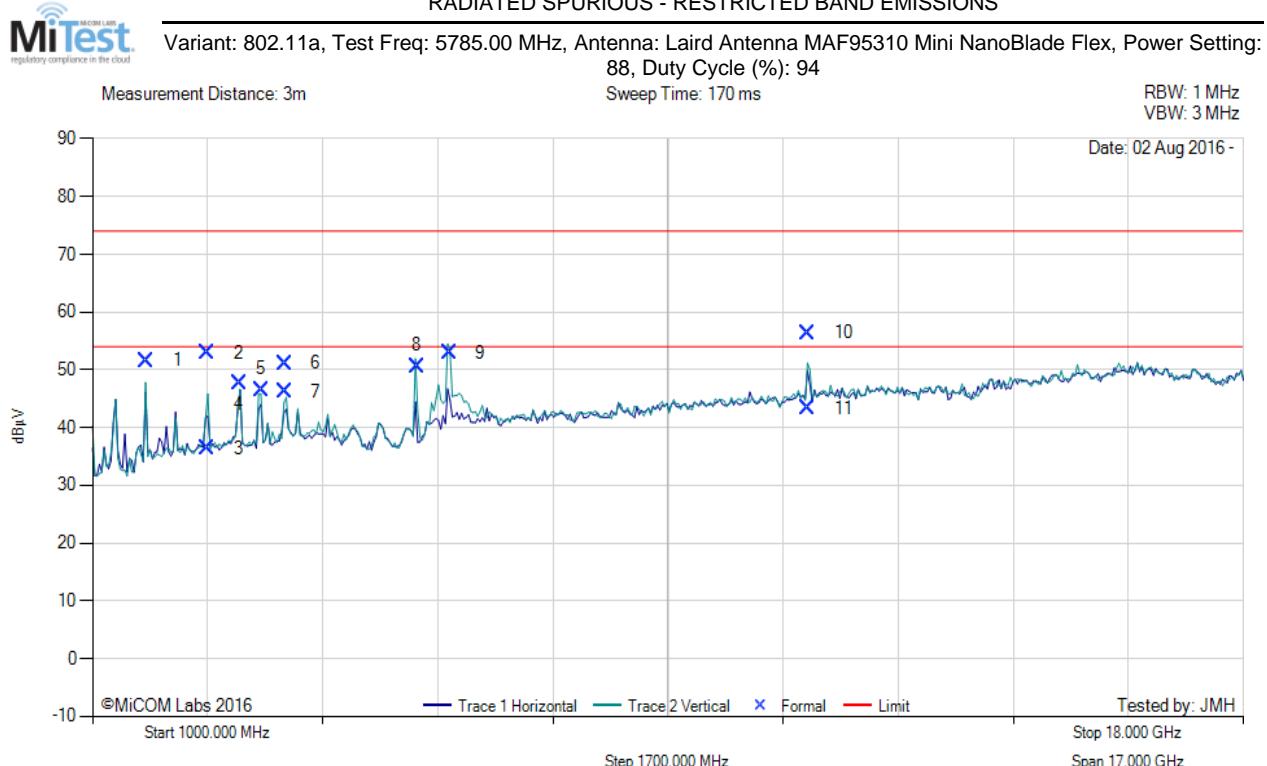

Num	Frequency MHz	Raw dB <sub>µV</sub>	Cable Loss dB	AF dB	Level dB <sub>µV/m</sub>	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB <sub>µV/m</sub>	Margin dB	Pass /Fail
1	1799.93	62.80	2.47	-13.65	51.62	Peak (NRB)	Vertical	151	230	--	--	Pass
2	2700.10	61.47	2.84	-11.39	52.92	Max Peak	Vertical	115	358	74.0	-21.1	Pass
3	2700.10	44.94	2.84	-11.39	36.39	Max Avg	Vertical	115	358	54.0	-17.6	Pass
4	3168.65	55.89	2.99	-11.20	47.68	Peak (NRB)	Horizontal	151	1	--	--	Pass
5	3493.38	54.71	3.11	-11.26	46.56	Peak (NRB)	Vertical	151	0	--	--	Pass
6	3843.29	58.69	3.21	-10.82	51.08	Max Peak	Vertical	150	146	74.0	-22.9	Pass
7	3843.29	53.81	3.21	-10.82	46.20	Max Avg	Vertical	150	146	54.0	-7.8	Pass
8	5788.70	57.31	3.79	-10.42	50.68	Fundamental	Vertical	101	1	--	--	
9	6274.47	57.56	3.92	-8.50	52.98	Peak (NRB)	Vertical	151	1	--	--	Pass
10	11570.74	55.58	5.44	-4.64	56.38	Max Peak	Vertical	139	0	74.0	-17.6	Pass
11	11570.74	42.59	5.44	-4.64	43.39	Max Avg	Vertical	139	0	54.0	-10.6	Pass

**Test Notes:** EUT on 150cm table powered by Fairway PS.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS




Variant: 802.11a, Test Freq: 5825.00 MHz, Antenna: Laird Antenna MAF95310 Mini NanoBlade Flex, Power Setting: 88, Duty Cycle (%): 94

Measurement Distance: 3m

Sweep Time: 170 ms

RBW: 1 MHz  
VBW: 3 MHz

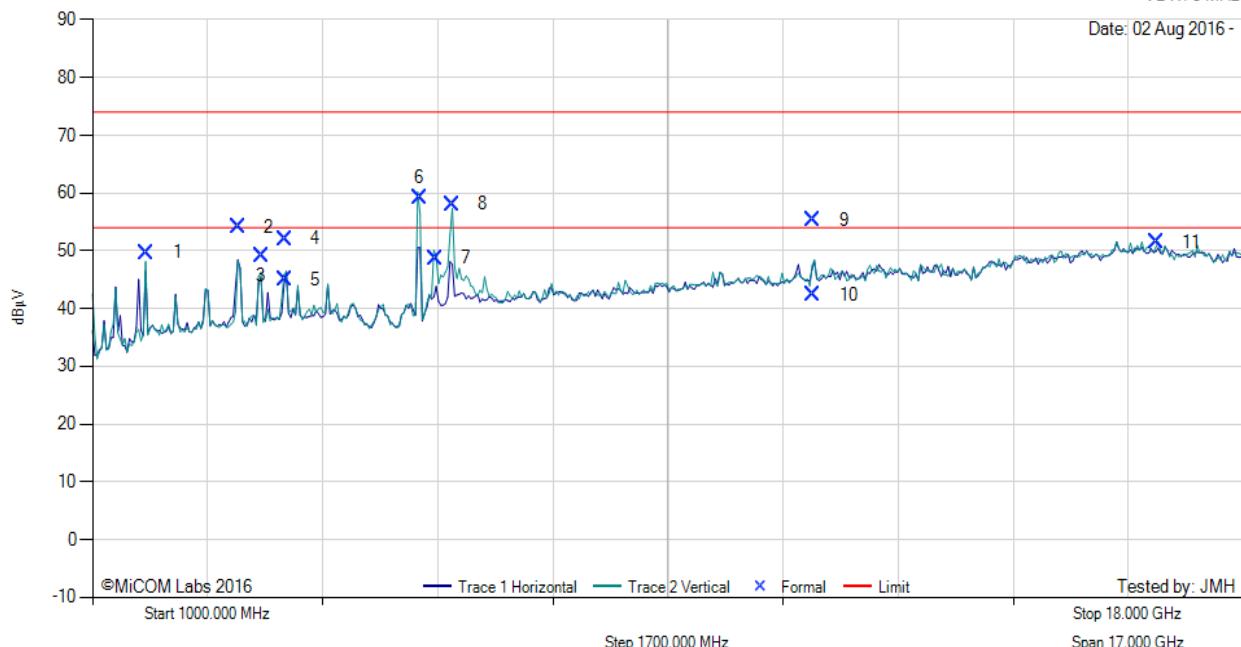

Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail
1	1800.02	60.90	2.47	-13.65	49.72	Peak (NRB)	Vertical	148	0	--	--	Pass
2	3150.03	62.30	2.99	-11.15	54.14	Peak (NRB)	Horizontal	148	0	--	--	Pass
3	3493.22	57.39	3.11	-11.26	49.24	Peak (NRB)	Vertical	148	145	--	--	Pass
4	3846.63	59.66	3.21	-10.82	52.05	Max Peak	Vertical	133	134	74.0	-22.0	Pass
5	3846.63	52.55	3.21	-10.82	44.94	Max Avg	Vertical	133	134	54.0	-9.1	Pass
6	5828.70	65.48	3.84	-10.23	59.09	Fundamental	Vertical	101	0	--	--	
7	6059.35	54.47	3.88	-9.64	48.71	Peak (NRB)	Vertical	200	0	--	--	Pass
8	6311.78	62.50	3.92	-8.36	58.06	Peak (NRB)	Vertical	200	0	--	--	Pass
9	11647.27	54.34	5.45	-4.47	55.32	Max Peak	Vertical	183	178	74.0	-18.7	Pass
10	11647.27	41.35	5.45	-4.47	42.33	Max Avg	Vertical	183	178	54.0	-11.7	Pass
11	16719.48	43.78	6.09	1.55	51.42	Peak (NRB)	Vertical	200	148	--	--	Pass

**Test Notes:** EUT on 150cm table powered by Fairway PS.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 124 of 516

### 7.1.2.2. Radiated Band-Edge Emissions

#### Band Edge Ethertronics M380510 Antenna:

Equipment Configuration for Radiated Low Band-Edge Emissions								
<b>Variant:</b>	802.11a, HT-20, HT-40, ac80			<b>Duty Cycle (%):</b>	100			
<b>Data Rate:</b>	6-28.5 Mbit/s			<b>Antenna Gain (dBi):</b>	3.2			
<b>Modulation:</b>	OFDM			<b>Beam Forming Gain (Y):</b>	Not Applicable			
<b>TPC:</b>	Not Applicable			<b>Tested By:</b>	JMH			
<b>Antenna:</b>	M380510							
<b>Engineering Test Notes:</b>								

Test Measurement Results									
<b>Channel Frequency:</b>	5180, 5190, 5210 MHz								
<b>Band-Edge Frequency:</b>	5150 MHz								
<b>Test Frequency Range:</b>	4500 - 5150 MHz								
Band-Edge Markers and Limit									
modes	Peak Amplitude (dBuV)	Peak Limit (dBuV)	Peak Margin dB	Peak Frequency (MHz)	AVG Amplitude (dBuV)	AVG Limit (dBuV)	AVG Margin dB	AVG Frequency (MHz)	Power Setting
a	72.74	74	-1.26	5150.00	53.37	54	-0.63	5148.70	78*
HT-20	73.35	74	-1.65	5148.87	48.17	54	-5.83	5147.39	71*
HT-40	73.95	74	-0.05	5147.39	52.30	54	-1.70	5147.39	57*
ac80	70.73	74	-3.27	5147.39	53.43	54	-0.57	5147.39	53*

\*Power Reduction Required

Traceability to Industry Recognized Test Methodologies								
Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS							
Measurement Uncertainty:	$\leq 40 \text{ GHz} \pm 2.37 \text{ dB}$ , $> 40 \text{ GHz} \pm 4.6 \text{ dB}$							

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 125 of 516

Equipment Configuration for Radiated High Band-Edge Emissions			
<b>Variant:</b>	802.11a, HT-20, HT-40, ac80	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	6-28.5 Mbit/s	<b>Antenna Gain (dBi):</b>	3.2
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Antenna:</b>	M380510		
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

<b>Channel Frequency:</b>	5320, 5310, 5290 MHz									
<b>Band-Edge Frequency:</b>	5350 MHz									
<b>Test Frequency Range:</b>	5350 - 5460 MHz									
	<b>Band-Edge Markers and Limit</b>									
modes		Peak Amplitude (dBuV)	Peak Limit (dBuV)	Peak Margin dB	Peak Frequency (MHz)	AVG Amplitude (dBuV)	AVG Limit (dBuV)	AVG Margin dB	AVG Frequency (MHz)	Power Setting
<b>a</b>	<b>71.81</b>	74	-2.19	5351.54	<b>53.4</b>	54	-0.6	5350	80	
<b>HT20</b>	<b>72.99</b>	74	-1.01	5350.44	<b>48.74</b>	54	-5.26	5350	75*	
<b>HT40</b>	<b>73.65</b>	74	-0.35	5350.44	<b>53.85</b>	54	-0.15	5350.44	63*	
<b>AC80</b>	<b>71.03</b>	74	-2.97	5351.54	<b>53.46</b>	54	-0.54	5353.52	60*	

\*Power Reduction Required

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	$\leq 40 \text{ GHz} \pm 2.37 \text{ dB}$ , $> 40 \text{ GHz} \pm 4.6 \text{ dB}$

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 126 of 516

Equipment Configuration for Radiated Low Band-Edge Emissions			
<b>Variant:</b>	802.11a, HT-20, HT-40, ac80	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	6-28.5 Mbit/s	<b>Antenna Gain (dBi):</b>	3.2
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Antenna:</b>	M380510		
<b>Engineering Test Notes:</b>			

Test Measurement Results								
Band-Edge Markers and Limit								
modes	Peak Amplitude (dBuV)	Peak Limit (dBuV)	Peak Margin dB	Peak Frequency (MHz)	AVG Amplitude (dBuV)	AVG Limit (dBuV)	AVG Margin dB	AVG Frequency (MHz)
	a	61.02	74	-12.98	5414.14	50.6	54	-3.4
HT20	65.1	74	-8.9	5457.57	50.28	54	-3.72	5418.55
HT40	72.89	74	-1.11	5459.77	53.94	54	-0.06	5460
AC80	70.25	74	-3.75	5450.96	52.92	54	-1.08	5457.13
								56*

\*Power Reduction Required

Traceability to Industry Recognized Test Methodologies									
Work Instruction: WI-05 MEASUREMENT OF SPURIOUS EMISSIONS									
Measurement Uncertainty:		$\leq 40 \text{ GHz} \pm 2.37 \text{ dB}$ , $> 40 \text{ GHz} \pm 4.6 \text{ dB}$							

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 127 of 516

## Band Edge 5725 MHz and 5850 MHz

All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.

Equipment Configuration for Radiated Band-Edge Emissions			
<b>Variant:</b>	802.11a, HT-20, HT-40, ac80	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	6-28.5 Mbit/s	<b>Antenna Gain (dBi):</b>	3.2
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	JMH
<b>Antenna:</b>	M380510		
<b>Engineering Test Notes:</b>			

## Test Measurement Results

<b>Channel Frequency:</b>	5745, 5755, 5775 MHz								
<b>Band-Edge Frequency:</b>	5725 MHz								
<b>Test Frequency Range:</b>	5600 - 5725 MHz								
	<b>5725 Band-Edge Markers and Limit</b>								
modes	<b>&gt; 10 MHz Measurement (dBuV)</b>	<b>&gt; 10 MHz Limit (dBuV)</b>	<b>&gt; 10 MHz Margin dB</b>	<b>&gt; 10 MHz Frequency (MHz)</b>	<b>&lt; 10 MHz Measurement (dBuV)</b>	<b>&lt; 10 MHz Limit (dBuV)</b>	<b>&lt; 10 MHz Margin dB</b>	<b>&lt; 10 MHz Frequency (MHz)</b>	<b>Power Setting</b>
<b>a</b>	<u>64.51</u>	68.23	-3.72	5714.65	<u>74.92</u>	78.23	-3.28	5721.91	88
<b>HT20</b>	<u>64.65</u>	68.23	-3.58	5714.42	<u>76.25</u>	78.23	-1.98	5724.08	84*
<b>HT40</b>	<u>67.40</u>	68.23	-0.83	5713.93	<u>71.59</u>	78.23	-6.64	5722.15	76*
<b>AC80</b>	<u>67.52</u>	68.23	-0.71	5712.01	<u>68.48</u>	78.23	-9.85	5722.15	71*

\*Power Reduction Required

Traceability to Industry Recognized Test Methodologies									
		Work Instruction: WI-05 MEASUREMENT OF SPURIOUS EMISSIONS							
		Measurement Uncertainty: $\leq 40 \text{ GHz} \pm 2.37 \text{ dB}$ , $> 40 \text{ GHz} \pm 4.6 \text{ dB}$							

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 128 of 516

#### Equipment Configuration for Radiated High Band-Edge Emissions

<b>Variant:</b>	802.11a, HT-20, HT-40, ac80	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	6-28.5 Mbit/s	<b>Antenna Gain (dBi):</b>	3.2
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	JMH
<b>Antenna:</b>	M380510		
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

<b>Channel Frequency:</b>	5825, 5815, 5775 MHz								
<b>Band-Edge Frequency:</b>	5850 MHz								
<b>Test Frequency Range:</b>	5850 - 5900 MHz								
<b>5850 Band-Edge Markers and Limit</b>									
<b>modes</b>	<b>&gt; 10 MHz Measurement (dBuV)</b>	<b>&gt; 10 MHz Limit (dBuV)</b>	<b>&gt; 10 MHz Margin dB</b>	<b>&gt; 10 MHz Frequency (MHz)</b>	<b>&lt; 10 MHz Measurement (dBuV)</b>	<b>&lt; 10 MHz Limit (dBuV)</b>	<b>&lt; 10 MHz Margin dB</b>	<b>&lt; 10 MHz Frequency (MHz)</b>	<b>Power Setting</b>
<b>a</b>	<b><u>63.91</u></b>	68.23	-4.32	5860.00	<b><u>74.94</u></b>	78.23	-3.29	5850.00	88
<b>HT20</b>	<b><u>64.09</u></b>	68.23	-4.14	5861.50	<b><u>74.34</u></b>	78.23	-3.89	5418.55	88
<b>HT40</b>	<b><u>54.10</u></b>	68.23	-14.13	5862.00	<b><u>57.18</u></b>	78.23	-21.05	5852.00	80*
<b>AC80</b>	<b><u>67.58</u></b>	68.23	-0.65	5862.51	<b><u>70.64</u></b>	78.23	-7.59	5852.00	77*

\*Power Reduction Required

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	≤40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 129 of 516

### Band Edge Laird MAF95310 Antenna:

#### Equipment Configuration for Restricted Lower Band-Edge Emissions

<b>Antenna:</b>	Laird Antenna MAF95310 Mini NanoBlade Flex	<b>Variant:</b>	802.11a
<b>Antenna Gain (dBi):</b>	Not Applicable	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	94
<b>Channel Frequency (MHz):</b>	5180.00	<b>Data Rate:</b>	6.00 MBit/s
<b>Power Setting:</b>	55	<b>Tested By:</b>	JMH

#### Test Measurement Results

Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail
#1	5100.88	16.10	3.58	34.13	53.81	Max Avg	Vertical	174	356	54.0	-0.2	Pass
#2	5101.03	26.34	3.58	34.13	64.05	Max Peak	Vertical	174	356	74.0	-10.0	Pass
#3	5150.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--

Test Notes: EUT on 150cm table powered by Fairway PS. Power reduced to meet Band Edge Limit.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 130 of 516

**Equipment Configuration for Restricted Lower Band-Edge Emissions**

<b>Antenna:</b>	Laird Antenna MAF95310 Mini NanoBlade Flex	<b>Variant:</b>	802.11ac-80
<b>Antenna Gain (dBi):</b>	3.38	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	94
<b>Channel Frequency (MHz):</b>	5210.00	<b>Data Rate:</b>	29.30 MBit/s
<b>Power Setting:</b>	43	<b>Tested By:</b>	JMH

**Test Measurement Results**

Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail
#1	5145.46	15.83	3.69	34.11	53.63	Max Avg	Vertical	174	356	54.0	-0.4	Pass
#2	5149.49	34.15	3.67	34.11	71.93	Max Peak	Vertical	174	356	74.0	-2.1	Pass
#3	5150.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--

Test Notes: EUT on 150cm table powered by Fairway PS. Power reduced to meet Band Edge Limit

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 131 of 516

**Equipment Configuration for Restricted Lower Band-Edge Emissions**

<b>Antenna:</b>	Laird Antenna MAF95310 Mini NanoBlade Flex	<b>Variant:</b>	802.11n HT-20
<b>Antenna Gain (dBi):</b>	3.38	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	94
<b>Channel Frequency (MHz):</b>	5180.00	<b>Data Rate:</b>	6.50 MBit/s
<b>Power Setting:</b>	60	<b>Tested By:</b>	JMH

**Test Measurement Results**

Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail
#1	5105.11	15.85	3.57	34.13	53.55	Max Avg	Vertical	174	356	54.0	-0.5	Pass
#2	5105.96	27.77	3.57	34.13	65.47	Max Peak	Vertical	174	356	74.0	-8.5	Pass
#3	5150.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--

Test Notes: EUT on 150cm table powered by Fairway PS. Power reduced to meet Band Edge Limit

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 132 of 516

**Equipment Configuration for Restricted Lower Band-Edge Emissions**

<b>Antenna:</b>	Laird Antenna MAF95310 Mini NanoBlade Flex	<b>Variant:</b>	802.11n HT-40
<b>Antenna Gain (dBi):</b>	3.38	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	94
<b>Channel Frequency (MHz):</b>	5190.00	<b>Data Rate:</b>	13.50 MBit/s
<b>Power Setting:</b>	47	<b>Tested By:</b>	JMH

**Test Measurement Results**

Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail
#1	5150.00	15.67	3.67	34.11	53.45	Max Avg	Vertical	174	356	54.0	-0.6	Pass
#2	5150.00	32.90	3.67	34.11	70.68	Max Peak	Vertical	174	356	74.0	-3.3	Pass
#3	5150.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--

Test Notes: EUT on 150cm table powered by Fairway PS. Power reduced to meet Band Edge Limit

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 133 of 516

**Equipment Configuration for Restricted Lower Band-Edge Emissions**

<b>Antenna:</b>	Laird Antenna MAF95310 Mini NanoBlade Flex	<b>Variant:</b>	802.11a
<b>Antenna Gain (dBi):</b>	3.38	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	94
<b>Channel Frequency (MHz):</b>	5500.00	<b>Data Rate:</b>	6.00 MBit/s
<b>Power Setting:</b>	51	<b>Tested By:</b>	JMH

**Test Measurement Results**

Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail
#1	5421.07	15.58	3.75	34.35	53.68	Max Avg	Vertical	169	356	54.0	-0.3	Pass
#2	5421.07	26.00	3.75	34.35	64.10	Max Peak	Vertical	169	356	74.0	-9.9	Pass
#4	5470.00	6.26	3.76	34.32	44.34	Max Avg	Vertical	169	356	68.2	-23.9	Pass
#3	5460.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--
#5	5470.00	--	--	--	--	Band-Edge	--	--	--	--	--	--

Test Notes: EUT on 150cm table powered by Fairway PS. Power reduced to meet Band Edge Limit.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 134 of 516

**Equipment Configuration for Restricted Lower Band-Edge Emissions**

<b>Antenna:</b>	Laird Antenna MAF95310 Mini NanoBlade Flex	<b>Variant:</b>	802.11ac-80
<b>Antenna Gain (dBi):</b>	3.38	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	94
<b>Channel Frequency (MHz):</b>	5530.00	<b>Data Rate:</b>	29.30 MBit/s
<b>Power Setting:</b>	45	<b>Tested By:</b>	JMH

**Test Measurement Results**

Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail
#1	5459.59	15.59	3.79	34.31	53.69	Max Avg	Vertical	169	356	54.0	-0.3	Pass
#2	5459.59	31.35	3.79	34.31	69.45	Max Peak	Vertical	169	356	74.0	-4.6	Pass
#4	5470.00	17.26	3.76	34.32	55.34	Max Avg	Vertical	169	356	68.2	-12.9	Pass
#3	5460.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--
#5	5470.00	--	--	--	--	Band-Edge	--	--	--	--	--	--

Test Notes: EUT on 150cm table powered by Fairway PS. Power reduced to meet Band Edge Limit.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 135 of 516

**Equipment Configuration for Restricted Lower Band-Edge Emissions**

<b>Antenna:</b>	Laird Antenna MAF95310 Mini NanoBlade Flex	<b>Variant:</b>	802.11n HT-20
<b>Antenna Gain (dBi):</b>	3.38	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	94
<b>Channel Frequency (MHz):</b>	5500.00	<b>Data Rate:</b>	6.50 MBit/s
<b>Power Setting:</b>	58	<b>Tested By:</b>	JMH

**Test Measurement Results**

Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail
#1	5416.86	26.52	3.73	34.35	64.60	Max Peak	Vertical	169	356	74.0	-9.4	Pass
#2	5419.32	15.59	3.74	34.35	53.68	Max Avg	Vertical	169	356	54.0	-0.3	Pass
#4	5470.00	8.03	3.76	34.32	46.11	Max Avg	Vertical	169	356	68.2	-22.1	Pass
#3	5460.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--
#5	5470.00	--	--	--	--	Band-Edge	--	--	--	--	--	--

Test Notes: EUT on 150cm table powered by Fairway PS. Power reduced to meet Band Edge Limit.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 136 of 516

**Equipment Configuration for Restricted Lower Band-Edge Emissions**

<b>Antenna:</b>	Laird Antenna MAF95310 Mini NanoBlade Flex	<b>Variant:</b>	802.11n HT-40
<b>Antenna Gain (dBi):</b>	3.38	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	94
<b>Channel Frequency (MHz):</b>	5510.00	<b>Data Rate:</b>	13.50 MBit/s
<b>Power Setting:</b>	58	<b>Tested By:</b>	JMH

**Test Measurement Results**

Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail
#1	5460.00	13.31	3.79	34.31	51.41	Max Avg	Vertical	169	356	54.0	-2.6	Pass
#2	5460.00	35.72	3.79	34.31	73.82	Max Peak	Vertical	169	356	74.0	-0.2	Pass
#4	5469.63	22.14	3.76	34.32	60.22	Max Avg	Vertical	169	356	68.2	-8.0	Pass
#3	5460.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--
#5	5470.00	--	--	--	--	Band-Edge	--	--	--	--	--	--

Test Notes: EUT on 150cm table powered by Fairway PS. Power reduced to meet Band Edge Limit.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 137 of 516

**Equipment Configuration for Restricted Upper Band-Edge Emissions**

<b>Antenna:</b>	Laird Antenna MAF95310 Mini NanoBlade Flex	<b>Variant:</b>	802.11a
<b>Antenna Gain (dBi):</b>	3.38	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	94
<b>Channel Frequency (MHz):</b>	5320.00	<b>Data Rate:</b>	6.00 MBit/s
<b>Power Setting:</b>	49	<b>Tested By:</b>	JMH

**Test Measurement Results**

Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail
#2	5401.08	15.80	3.70	34.38	53.88	Max Avg	Vertical	178	357	54.0	-0.1	Pass
#3	5401.36	25.71	3.70	34.38	63.79	Max Peak	Vertical	178	357	74.0	-10.2	Pass
#1	5350.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--

Test Notes: EUT on 150cm table powered by Fairway PS. Power reduced to meet Band Edge Limit

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 138 of 516

Equipment Configuration for Restricted Upper Band-Edge Emissions

<b>Antenna:</b>	Laird Antenna MAF95310 Mini NanoBlade Flex	<b>Variant:</b>	802.11ac-80
<b>Antenna Gain (dBi):</b>	3.38	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	94
<b>Channel Frequency (MHz):</b>	5290.00	<b>Data Rate:</b>	29.30 MBit/s
<b>Power Setting:</b>	42	<b>Tested By:</b>	JMH

Test Measurement Results

Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail
#1	5350.00	15.27	3.70	34.51	53.48	Max Avg	Vertical	178	357	54.0	-0.5	Pass
#2	5350.00	33.48	3.70	34.51	71.69	Max Peak	Vertical	178	357	74.0	-2.3	Pass
#3	5350.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--

Test Notes: EUT on 150cm table powered by Fairway PS. Power reduced to meet Band Edge Limit.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 139 of 516

**Equipment Configuration for Restricted Upper Band-Edge Emissions**

<b>Antenna:</b>	Laird Antenna MAF95310 Mini NanoBlade Flex	<b>Variant:</b>	802.11n HT-20
<b>Antenna Gain (dBi):</b>	3.38	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	94
<b>Channel Frequency (MHz):</b>	5320.00	<b>Data Rate:</b>	6.50 MBit/s
<b>Power Setting:</b>	56	<b>Tested By:</b>	JMH

**Test Measurement Results**

Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail
#2	5393.23	27.12	3.69	34.40	65.21	Max Peak	Vertical	178	357	74.0	-8.8	Pass
#3	5399.40	15.61	3.70	34.39	53.70	Max Avg	Vertical	178	357	54.0	-0.3	Pass
#1	5350.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--

Test Notes: EUT on 150cm table powered by Fairway PS. Power reduced to meet Band Edge Limit

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 140 of 516

**Equipment Configuration for Restricted Upper Band-Edge Emissions**

<b>Antenna:</b>	Laird Antenna MAF95310 Mini NanoBlade Flex	<b>Variant:</b>	802.11n HT-40
<b>Antenna Gain (dBi):</b>	3.38	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	94
<b>Channel Frequency (MHz):</b>	5310.00	<b>Data Rate:</b>	13.50 MBit/s
<b>Power Setting:</b>	48	<b>Tested By:</b>	JMH

**Test Measurement Results**

Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail
#1	5350.00	15.37	3.70	34.51	53.58	Max Avg	Vertical	178	357	54.0	-0.4	Pass
#2	5350.00	34.39	3.70	34.51	72.60	Max Peak	Vertical	178	357	74.0	-1.4	Pass
#3	5350.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--

Test Notes: EUT on 150cm table powered by Fairway PS. Power reduced to meet Band Edge Limit.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 141 of 516

**Equipment Configuration for 5725 MHz Radiated Band-Edge Emissions**

<b>Antenna:</b>	Laird Antenna MAF95310 Mini NanoBlade Flex	<b>Variant:</b>	802.11a
<b>Antenna Gain (dBi):</b>	3.38	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	94
<b>Channel Frequency (MHz):</b>	5745.00	<b>Data Rate:</b>	6.00 MBit/s
<b>Power Setting:</b>	87	<b>Tested By:</b>	JMH

**Test Measurement Results**

Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail
#1	5666.26	24.12	3.77	34.23	62.12	Max Avg	Vertical	165	339	68.2	-6.1	Pass
#2	5725.00	39.61	3.79	34.35	77.75	Max Avg	Vertical	165	339	78.2	-0.5	Pass
#3	5725.00	--	--	--	--	Band-Edge	--	--	--	--	--	--

Test Notes: EUT on 150cm table powered by Fairway PS. Power reduced to meet Band Edge Limit.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 142 of 516

**Equipment Configuration for 5725 MHz Radiated Band-Edge Emissions**

<b>Antenna:</b>	Laird Antenna MAF95310 Mini NanoBlade Flex	<b>Variant:</b>	802.11ac-80
<b>Antenna Gain (dBi):</b>	3.38	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	94
<b>Channel Frequency (MHz):</b>	5775.00	<b>Data Rate:</b>	29.30 MBit/s
<b>Power Setting:</b>	72	<b>Tested By:</b>	JMH

**Test Measurement Results**

Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail
#1	5715.00	29.80	3.81	34.34	67.95	Max Avg	Vertical	165	339	68.2	-0.3	Pass
#2	5725.00	30.72	3.79	34.35	68.86	Max Avg	Vertical	165	339	78.2	-9.4	Pass
#3	5725.00	--	--	--	--	Band-Edge	--	--	--	--	--	--

Test Notes: EUT on 150cm table powered by Fairway PS. Power reduced to meet Band Edge Limit.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 143 of 516

**Equipment Configuration for 5725 MHz Radiated Band-Edge Emissions**

<b>Antenna:</b>	Laird Antenna MAF95310 Mini NanoBlade Flex	<b>Variant:</b>	802.11n HT-20
<b>Antenna Gain (dBi):</b>	3.38	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	94
<b>Channel Frequency (MHz):</b>	5745.00	<b>Data Rate:</b>	6.50 MBit/s
<b>Power Setting:</b>	85	<b>Tested By:</b>	JMH

**Test Measurement Results**

Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail
#1	5715.00	22.55	3.81	34.34	60.70	Max Avg	Vertical	165	339	68.2	-7.5	Pass
#2	5725.00	39.41	3.79	34.35	77.55	Max Avg	Vertical	165	339	78.2	-0.7	Pass
#3	5725.00	--	--	--	--	Band-Edge	--	--	--	--	--	--

Test Notes: EUT on 150cm table powered by Fairway PS. Power reduced to meet Band Edge Limit.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 144 of 516

**Equipment Configuration for 5725 MHz Radiated Band-Edge Emissions**

<b>Antenna:</b>	Laird Antenna MAF95310 Mini NanoBlade Flex	<b>Variant:</b>	802.11n HT-40
<b>Antenna Gain (dBi):</b>	3.38	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	94
<b>Channel Frequency (MHz):</b>	5755.00	<b>Data Rate:</b>	13.50 MBit/s
<b>Power Setting:</b>	76	<b>Tested By:</b>	JMH

**Test Measurement Results**

Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail
#1	5715.00	29.70	3.81	34.34	67.85	Max Avg	Vertical	165	339	68.2	-0.4	Pass
#2	5725.00	33.92	3.79	34.35	72.06	Max Avg	Vertical	165	339	78.2	-6.2	Pass
#3	5725.00	--	--	--	--	Band-Edge	--	--	--	--	--	--

Test Notes: EUT on 150cm table powered by Fairway PS. Power reduced to meet Band Edge Limit.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 145 of 516

**Equipment Configuration for 5850 MHz Radiated Band-Edge Emissions**

<b>Antenna:</b>	Laird Antenna MAF95310 Mini NanoBlade Flex	<b>Variant:</b>	802.11a
<b>Antenna Gain (dBi):</b>	3.38	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	94
<b>Channel Frequency (MHz):</b>	5825.00	<b>Data Rate:</b>	6.00 MBit/s
<b>Power Setting:</b>	88	<b>Tested By:</b>	JMH

**Test Measurement Results**

Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail
#2	5850.42	25.63	3.81	34.63	64.07	Max Avg	Vertical	165	339	78.2	-14.2	Pass
#3	5897.24	22.79	3.82	34.76	61.37	Max Avg	Vertical	165	339	78.2	-16.9	Pass
#1	5850.00	--	--	--	--	Band-Edge	--	--	--	--	--	--

Test Notes: EUT on 150cm table powered by Fairway PS.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 146 of 516

**Equipment Configuration for 5850 MHz Radiated Band-Edge Emissions**

<b>Antenna:</b>	Laird Antenna MAF95310 Mini NanoBlade Flex	<b>Variant:</b>	802.11ac-80
<b>Antenna Gain (dBi):</b>	3.38	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	94
<b>Channel Frequency (MHz):</b>	5775.00	<b>Data Rate:</b>	29.30 MBit/s
<b>Power Setting:</b>	78	<b>Tested By:</b>	JMH

**Test Measurement Results**

Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail
#1	5850.00	31.90	3.81	34.63	70.34	Max Avg	Vertical	165	339	78.2	-7.9	Pass
#3	5860.21	29.38	3.86	34.65	67.89	Max Avg	Vertical	165	339	78.2	-10.3	Pass
#2	5850.00	--	--	--	--	Band-Edge	--	--	--	--	--	--

Test Notes: EUT on 150cm table powered by Fairway PS. Power reduced to meet Band Edge Limit.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 147 of 516

**Equipment Configuration for 5850 MHz Radiated Band-Edge Emissions**

<b>Antenna:</b>	Laird Antenna MAF95310 Mini NanoBlade Flex	<b>Variant:</b>	802.11n HT-20
<b>Antenna Gain (dBi):</b>	3.38	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	94
<b>Channel Frequency (MHz):</b>	5825.00	<b>Data Rate:</b>	6.50 MBit/s
<b>Power Setting:</b>	88	<b>Tested By:</b>	JMH

**Test Measurement Results**

Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail
#1	5850.00	33.06	3.81	34.63	71.50	Max Avg	Vertical	165	339	78.2	-6.7	Pass
#3	5860.00	21.80	3.86	34.65	60.31	Max Avg	Vertical	165	339	78.2	-17.9	Pass
#2	5850.00	--	--	--	--	Band-Edge	--	--	--	--	--	--

Test Notes: EUT on 150cm table powered by Fairway PS.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 148 of 516

**Equipment Configuration for 5850 MHz Radiated Band-Edge Emissions**

<b>Antenna:</b>	Laird Antenna MAF95310 Mini NanoBlade Flex	<b>Variant:</b>	802.11n HT-40
<b>Antenna Gain (dBi):</b>	3.38	<b>Modulation:</b>	OFDM
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	94
<b>Channel Frequency (MHz):</b>	5795.00	<b>Data Rate:</b>	13.50 MBit/s
<b>Power Setting:</b>	80	<b>Tested By:</b>	JMH


**Test Measurement Results**

Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail
#2	5857.58	20.38	3.85	34.65	58.88	Max Avg	Vertical	165	339	78.2	-19.4	Pass
#3	5860.00	20.97	3.86	34.65	59.48	Max Avg	Vertical	165	339	78.2	-18.8	Pass
#1	5850.00	--	--	--	--	Band-Edge	--	--	--	--	--	--

Test Notes: EUT on 150cm table powered by Fairway PS.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### 7.1.2.3. Digital Emissions (30M-1 GHz)

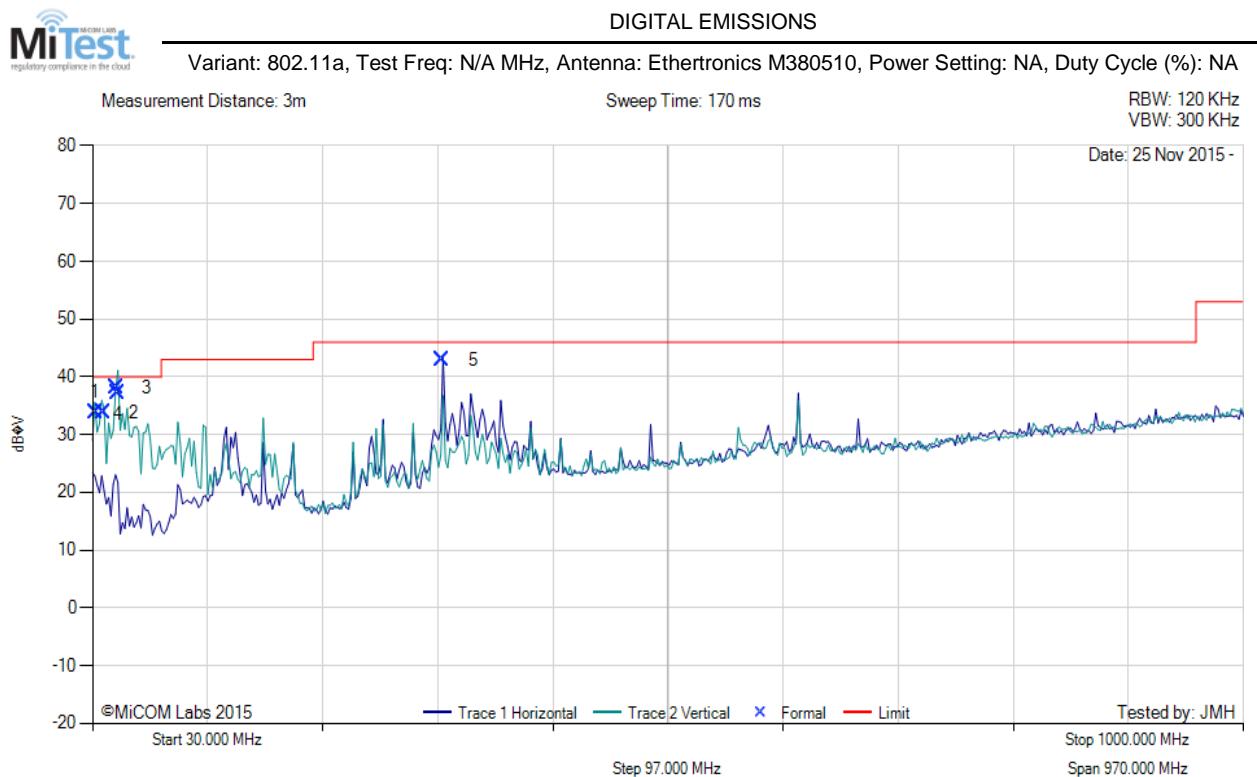

Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail
1	32.40	41.60	3.44	-11.21	33.83	MaxQP	Vertical	100	144	40.0	-6.2	Pass
2	38.94	47.01	3.49	-16.67	33.83	MaxQP	Vertical	100	216	40.0	-6.2	Pass
3	50.45	57.75	3.57	-23.14	38.18	MaxQP	Vertical	100	171	40.0	-1.8	Pass
4	51.06	57.00	3.58	-23.44	37.14	MaxQP	Vertical	100	151	40.0	-2.9	Pass
5	325.00	54.64	4.78	-16.54	42.88	MaxQP	Horizontal	100	226	46.0	-3.1	Pass

**Test Notes:** EUT on 150cm table. Battery powered. ENET connected to Hub outside chamber.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 150 of 516

---

### Laboratory Measurement Uncertainty for Radiated Emissions

Measurement uncertainty	+5.6/ -4.5 dB
-------------------------	---------------

### Traceability

Method
Measurements were made per work instruction WI-03 'Measurement of Radiated Emissions'

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 151 of 516

---

### **7.1.3. AC Wireline Conducted Emissions (150 kHz – 30 MHz)**

#### **Test Procedure**


The EUT is configured in accordance with ANSI C63.4. The conducted emissions are measured in a shielded room with a spectrum analyzer in peak hold in the first instance. Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation. The highest emissions relative to the limit are listed.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

## ac/dc Adaptor Wireline Emissions

<b>Model Number</b>	AIRCHECK 2	<b>Engineer</b>	JMH
<b>Variant</b>	ac Wireline 110V 60 Hz	<b>Temp (°C)</b>	16.5
<b>Freq. Range</b>	0.150 MHz - 30 MHz	<b>Rel. Hum.(%)</b>	34
<b>Power Setting</b>	NA	<b>Press. (mBars)</b>	1015
<b>Antenna</b>	N/A		
<b>Test Notes 1</b>	EUT SN#HM100165 Delta Electronics PS Model: MDS-030AAC15		
<b>Test Notes 2</b>	Class B Limits		

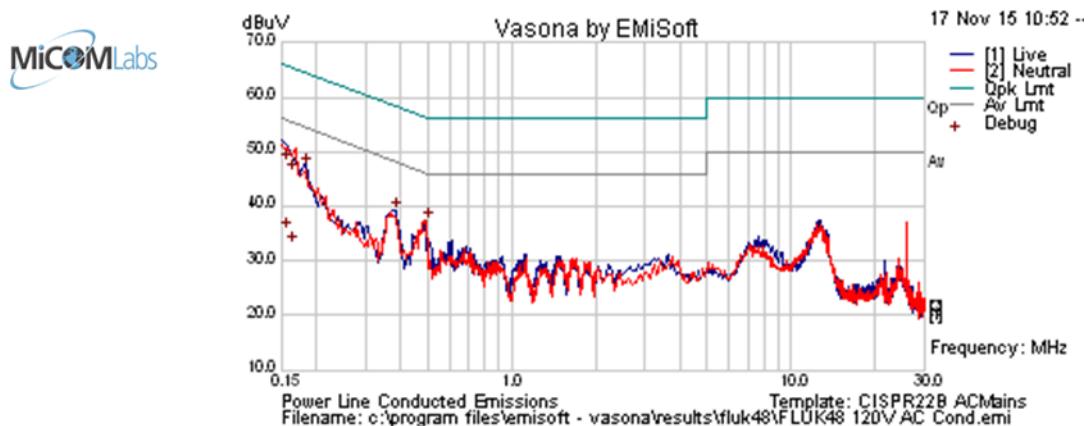

### Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	Factors dB	Level dBuV	Measurement Type	Line	Limit dBuV	Margin dB	Pass /Fail	Comments
0.154	38.2	9.8	0.1	48.1	Quasi Peak	Live	65.8	-17.7	Pass	
0.154	25.4	9.8	0.1	35.3	Average	Live	55.8	-20.5	Pass	
0.162	36.3	9.8	0.1	46.2	Quasi Peak	Neutral	65.4	-19.2	Pass	
0.162	22.8	9.8	0.1	32.7	Average	Neutral	55.4	-22.7	Pass	
0.184	37.3	9.8	0.1	47.2	Peak [Scan]	Live	54.3	-7.1	Pass	
0.382	29.4	9.8	0.1	39.2	Peak [Scan]	Live	48.2	-9.0	Pass	
0.497	27.5	9.8	0.1	37.4	Peak [Scan]	Neutral	46.1	-8.7	Pass	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 153 of 516

## Specification

### Limit

**§15.207 (a)** Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu\Omega$  line impedance stabilization network (LISN), see §15.207 (a) matrix below. Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

#### RSS-Gen §7.2.2

The radio frequency voltage that is conducted back into the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in the table below. The tighter limit applies at the frequency range boundaries.

#### §15.207 (a) and RSS-Gen §7.2.2 Limit Matrix

The lower limit applies at the boundary between frequency ranges

Frequency of Emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency

#### Laboratory Measurement Uncertainty for Conducted Emissions

Measurement uncertainty	$\pm 2.64$ dB
-------------------------	---------------

### Traceability

Method
Measurements were made per work instruction WI-EMC-01 'Measurement of Conducted Emissions'

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

#### 7.1.4. Dynamic Frequency Selection (DFS)

**FCC, Part 15 Subpart C §15.407(h)**  
**FCC 06-96 Memorandum Opinion and Order**  
**Industry Canada RSS-247**

##### 7.1.4.1. Interference Threshold values, Master or Client incorporating In-Service Monitoring

Maximum Transmit Power	Value (see note)
≥ 200 milliwatt	-64 dBm
< 200 milliwatt	-62 dBm

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna

DFS Response requirement values

Parameter	Value
<i>Non-occupancy period</i>	Minimum 30 minutes
<i>Channel Availability Check Time</i>	60 seconds
<i>Channel Move Time</i>	10 seconds See Note 1.
<i>Channel Closing Transmission Time</i>	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
<i>U-NII Detection Bandwidth</i>	Minimum 80% of the 99% power bandwidth See Note 3.

Note 1: The instant that the *Channel Move Time* and the *Channel Closing Transmission Time* begins is as follows:

- For the Short pulse radar Test Signals this instant is the end of the *Burst*.
- For the Frequency Hopping radar Test Signal, this instant is the end of the last radar *Burst* generated.
- For the Long Pulse radar Test Signal this instant is the end of the 12 second period defining the radar transmission.

Note 2: The *Channel Closing Transmission Time* is comprised of 200 milliseconds starting at the beginning of the *Channel Move Time* plus any additional intermittent control signals required to facilitate *Channel* changes (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the *U-NII Detection Bandwidth* detection test, radar type 1 is used and for each frequency step the minimum percentage of detection is 90%. Measurements are performed with no data traffic.

#### 7.1.4.2. Radar Test Waveforms

This section provides the parameters for required test waveforms, minimum percentage of successful detections, and the minimum number of trials that must be used for determining DFS conformance. Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

##### Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Trials
1	1	1428	18	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120

A minimum of 30 unique waveforms are required for each of the short pulse radar types 2 through 4. For short pulse radar type 1, the same waveform is used a minimum of 30 times. If more than 30 waveforms are used for short pulse radar types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. The aggregate is the average of the percentage of successful detections of short pulse radar types 1-4.

##### Long Pulse Radar Test Waveform

Radar Type	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Number of Pulses per Burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

The parameters for this waveform are randomly chosen. Thirty unique waveforms are required for the Long Pulse radar test signal. If more than 30 waveforms are used for the Long Pulse radar test signal, then each additional waveform must also be unique and not repeated from the previous waveforms.


Each waveform is defined as follows:

- 1) The transmission period for the Long Pulse Radar test signal is 12 seconds.
- 2) There are a total of 8 to 20 *Bursts* in the 12 second period, with the number of *Bursts* being randomly chosen. This number is *Burst Count*.
- 3) Each *Burst* consists of 1 to 3 pulses, with the number of pulses being randomly chosen. Each *Burst* within the 12 second sequence may have a different number of pulses.
- 4) The pulse width is between 50 and 100 microseconds, with the pulse width being randomly chosen. Each pulse within a *Burst* will have the same pulse width. Pulses in different *Bursts* may have different pulse widths.
- 5) Each pulse has a linear FM chirp between 5 and 20 MHz, with the chirp width being randomly chosen. Each pulse within a *Burst* will have the same chirp width. Pulses in different *Bursts* may have different chirp widths. The chirp is centered on the pulse. For example, with a radar frequency of 5300 MHz and a 20 MHz chirped signal, the chirp starts at 5290 MHz and ends at 5310 MHz.
- 6) If more than one pulse is present in a *Burst*, the time between the pulses will be between 1000 and 2000 microseconds, with the time being randomly chosen. If three pulses are present in a *Burst*, the time between the first and second pulses is chosen independently of the time between the second and third pulses.
- 7) The 12 second transmission period is divided into even intervals. The number of intervals is equal to *Burst\_Count*. Each interval is of length  $(12,000,000 / \text{Burst\_Count})$  microseconds. Each interval contains one *Burst*. The start time for the *Burst*, relative to the beginning of the interval, is between 1 and  $[(12,000,000 / \text{Burst\_Count}) - (\text{Total Burst Length}) + (\text{One Random PRI Interval})]$  microseconds, with the start time being randomly chosen. The step interval for the start time is 1 microsecond. The start time for each *Burst* is chosen independently.

**A representative example of a Long Pulse radar test waveform:**

- 1) The total test signal length is 12 seconds.
- 2) 8 *Bursts* are randomly generated for the *Burst\_Count*.
- 3) *Burst 1* has 2 randomly generated pulses.
- 4) The pulse width (for both pulses) is randomly selected to be 75 microseconds.
- 5) The PRI is randomly selected to be at 1213 microseconds.
- 6) *Bursts 2* through 8 are generated using steps 3 – 5.
- 7) Each *Burst* is contained in even intervals of 1,500,000 microseconds. The starting location for Pulse 1, *Burst 1* is randomly generated (1 to 1,500,000 minus the total *Burst 1* length + 1 random PRI interval) at the 325,001 microsecond step. *Bursts 2* through 8 randomly fall in successive 1,500,000 microsecond intervals (i.e. *Burst 2* falls in the 1,500,001 – 3,000,000 microsecond range).

**Graphical representation of the Long Pulse radar Test Waveform.**

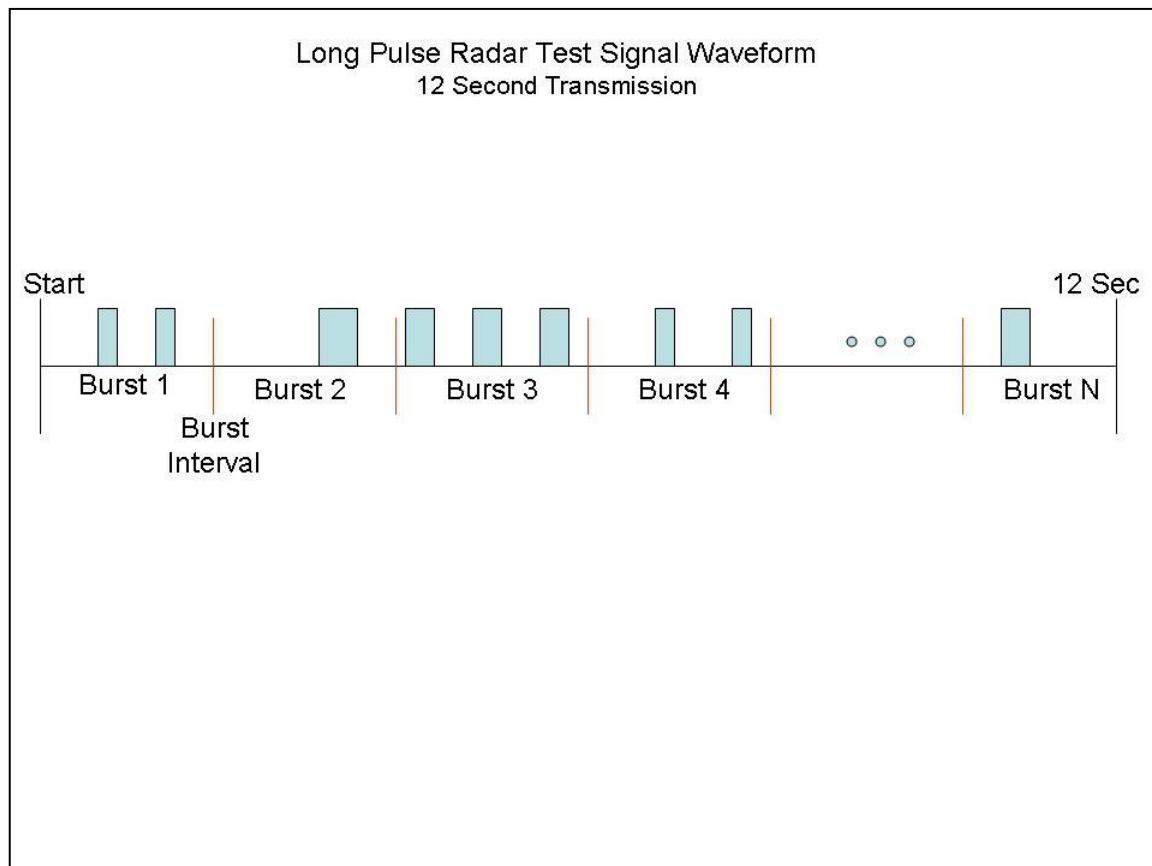

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### 7.1.4.3. Frequency Hopping Radar Test Waveform

**Frequency Hopping Radar Test Waveform**


Radar Type	Pulse Width (usec)	PRI (usec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Trials
6	1	333	9	.333	300	70%	30

For the Frequency Hopping Radar Type, the same *Burst* parameters are used for each waveform. The hopping sequence is different for each waveform and a 100-length segment is selected from the hopping sequence defined by the following algorithm:

### 7.1.4.4. Radar Waveform Calibration

The following equipment setup was used to calibrate the conducted Radar Waveform. A spectrum analyzer was used to establish the test signal level for each radar type. During this process there were no transmissions by either the Master or Client Device. The spectrum analyzer was switched to the zero span (Time Domain) mode at the frequency of the Radar Waveform generator. Peak detection was utilized. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (VBW) were set to 3 MHz.

The signal generator amplitude was set so that the power level measured at the spectrum analyzer was -61dBm (Ref Section 5.1). The 30dB amplifier gain was entered as an amplitude offset on the spectrum analyzer.

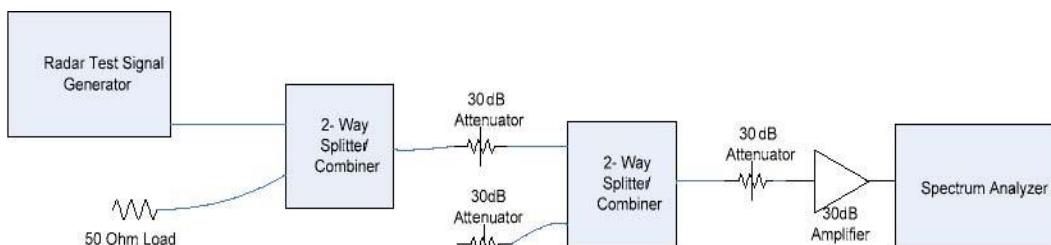


**Conducted Calibration Setup**

#### 7.1.4.5. DFS Test Set Up

Setup for Conducted Measurements where the EUT is the Client device with injection of Radar Test Waveforms at the Master.

#### Support Equipment Configuration

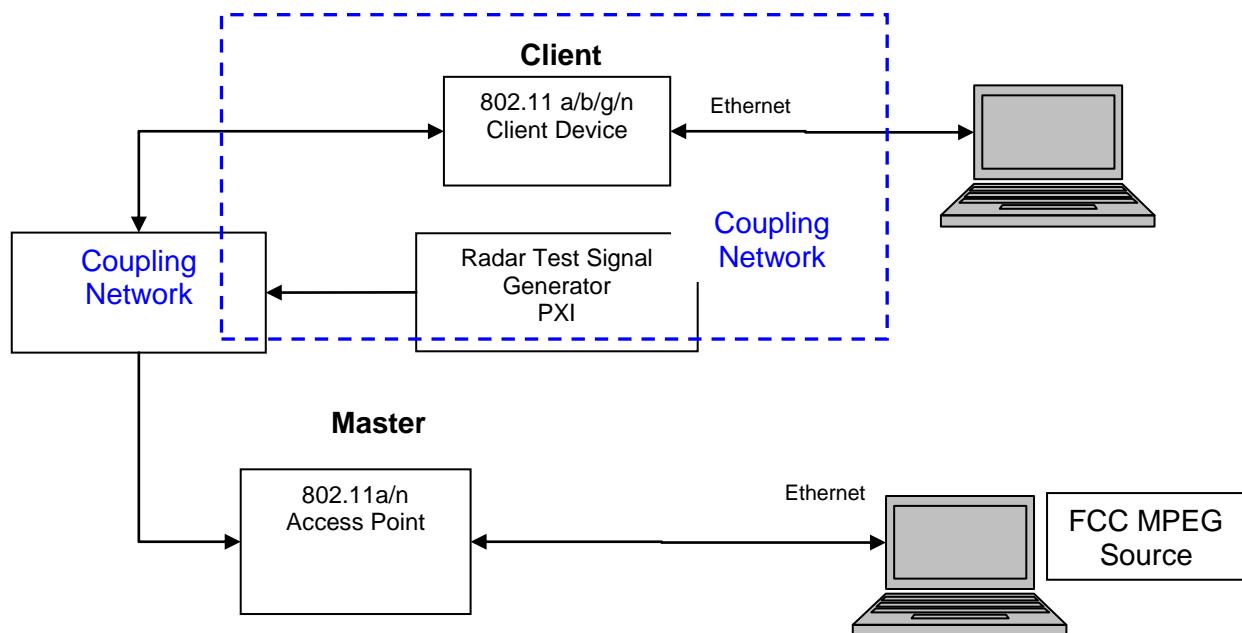

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** NetScout Systems BCM43460  
**To:** FCC 47 CFR Part 15.407 & IC RSS-247  
**Serial #:** NTCT66-pca 2.1-U5 Rev B  
**Issue Date:** 26th August 2016  
**Page:** 160 of 516

The EUT is a Client Device without radar detection.

**Applicability of DFS Requirements Prior to Use of a Channel**  
**(Ref Table 1 of FCC 06-96)**

<b>Requirement</b>	<b>Operational Mode</b>		
	<b>Master</b>	<b>Client Without Radar Detection</b>	<b>Client With Radar Detection</b>
<i>Non-Occupancy Period</i>	Yes	Not required	Yes
<i>DFS Detection Threshold</i>	Yes	Not required	Yes
<i>Channel Availability Check Time</i>	Yes	Not required	Not required
<i>Uniform Spreading</i>	Yes	Not required	Not required
<i>U-NII Detection Bandwidth</i>	Yes	Not required	Yes

**Applicability of DFS requirements during normal operation**  
**(Ref Table 2 of FCC 06-96)**

<b>Requirement</b>	<b>Operational Mode</b>		
	<b>Master</b>	<b>Client Without Radar Detection</b>	<b>Client With Radar Detection</b>
<i>DFS Detection Threshold</i>	Yes	Not required	Yes
<i>Channel Closing Transmission Time</i>	Yes	Yes	Yes
<i>Channel Move Time</i>	Yes	Yes	Yes
<i>U-NII Detection Bandwidth</i>	Yes	Not required	Yes

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

#### 7.1.4.6. DFS Test Results

##### 7.1.4.6.1. In-Service Monitoring for Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period

###### FCC §15.407(h)(2)(iii)

The steps below define the procedure to determine the above mentioned parameters when a radar Burst with a level equal to the DFS Detection Threshold is generated on the Operating Channel of the U-NII device.

A U-NII device operating as a Client Device will associate with the EUT (Master). The requisite MPEG video file ("TestFile.mpg" available on the NTIA website at the following link <http://ntiacsd.ntia.doc.gov/dfs/>) is streamed from the master device (AP) to the client.

###### Channel Closing Transmission Time - Measurement

The test system was set-up to capture all transmission data for access point events above a threshold level of -50 dBm. The test equipment time stamps all captured events.

A Type 1 waveform was introduced to the EUT, from which a 12 second transmission record was digitally captured. The start of the Type 1 radar waveform is indicated in the test result plot as "Start Waveform", the end of the waveform is indicated as "End waveform".

Channel Closing Transmission Time, and the Channel Move Time start immediately after the last radar pulse is transmitted.

The aggregate of all pulses seen after the end of the radar injection are measured as the "Channel Closing Transmission time".

The last EUT activity after the end of the radar pulse is identified and used to determine the "Channel Mode Time"

## 5,500 MHz (802.11a)

**Channel Closing Transmission Time** = 29.83 mSecs (limit 260 mSecs)

**Channel Move Time** = 353.28 mSecs (limit 10 Secs)

### Channel Move Time, Channel Closing Transmission Time for Type 1 Radar Captured by the Test System - 0 to 12 seconds




This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

#### 7.1.4.6.2. 30 Minute Non-Occupancy Period

The EUT is monitored for more than 30 minutes following the channel close/move time to verify no transmissions resume on this Channel.

#### 30 Minute Non-Occupancy Period Type 1 Radar 5,500MHz 802.11a

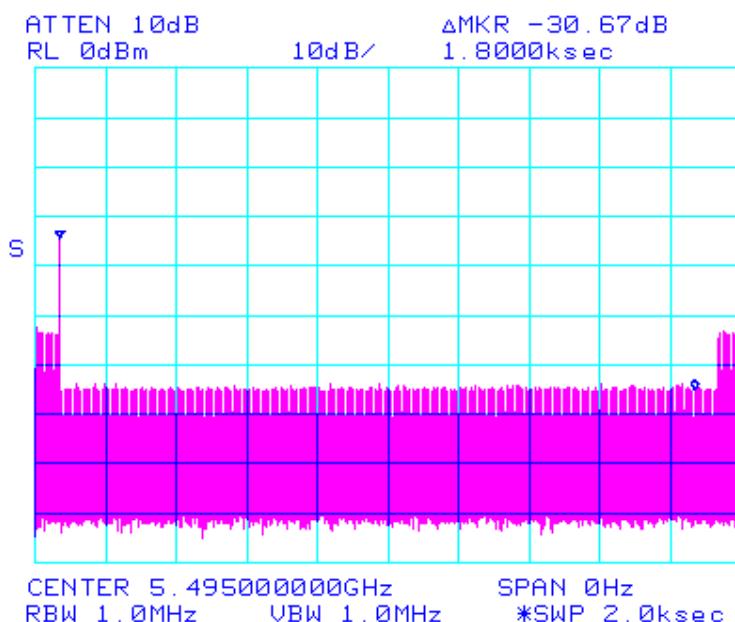

#### Measurement Uncertainty Time/Power

Measurement uncertainty		
-	Time	4%
-	Power	1.33dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

## **8. PHOTOGRAPHS**


### **8.1. Conducted Test Setup**



---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

## 8.2. Radiated Emissions < 1 GHz

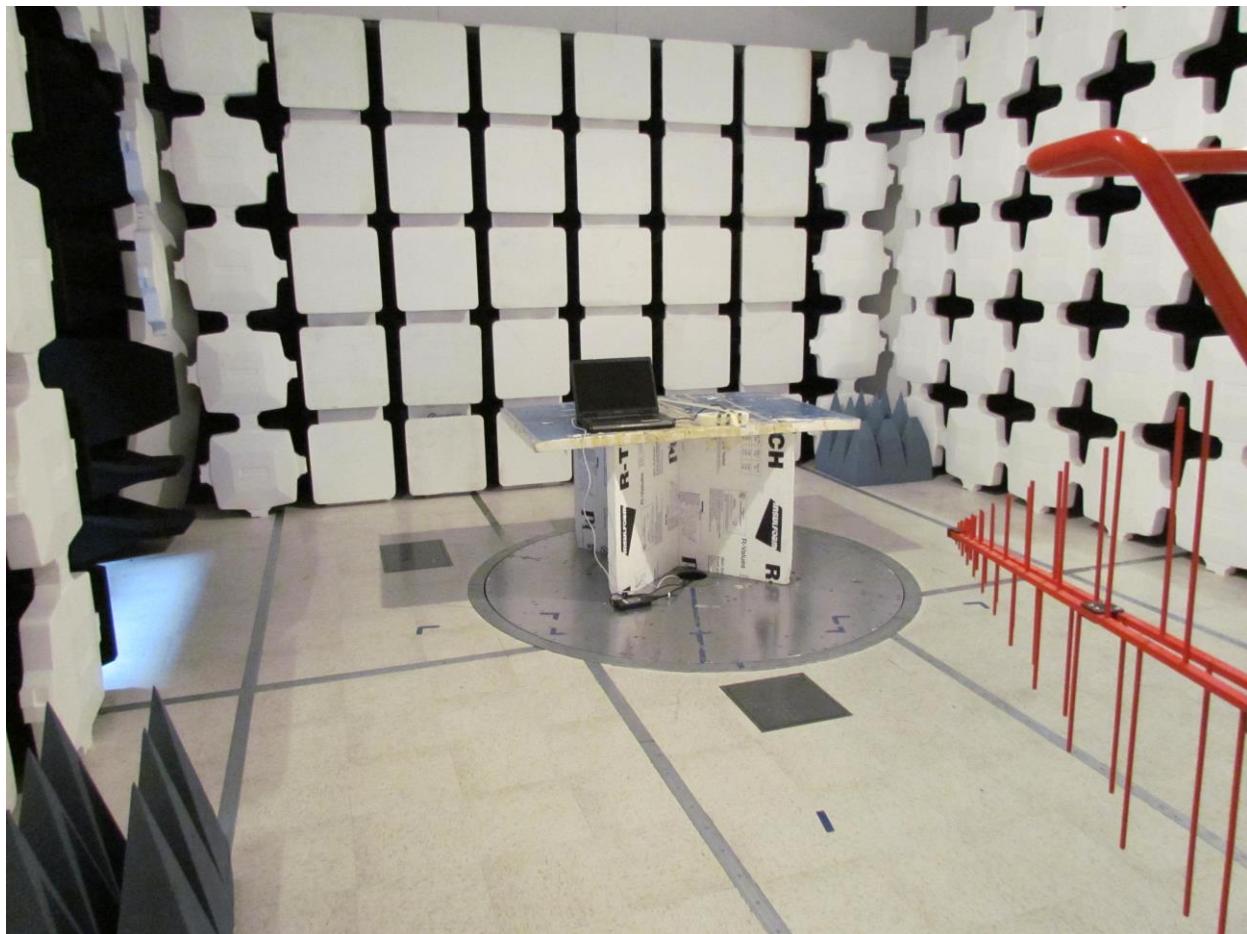

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### 8.3. Radiated Emissions > 1 GHz

Module in Sensor6 Integral Host



---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

#### 8.4. AC Wireline Emissions


Front:



---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Side:

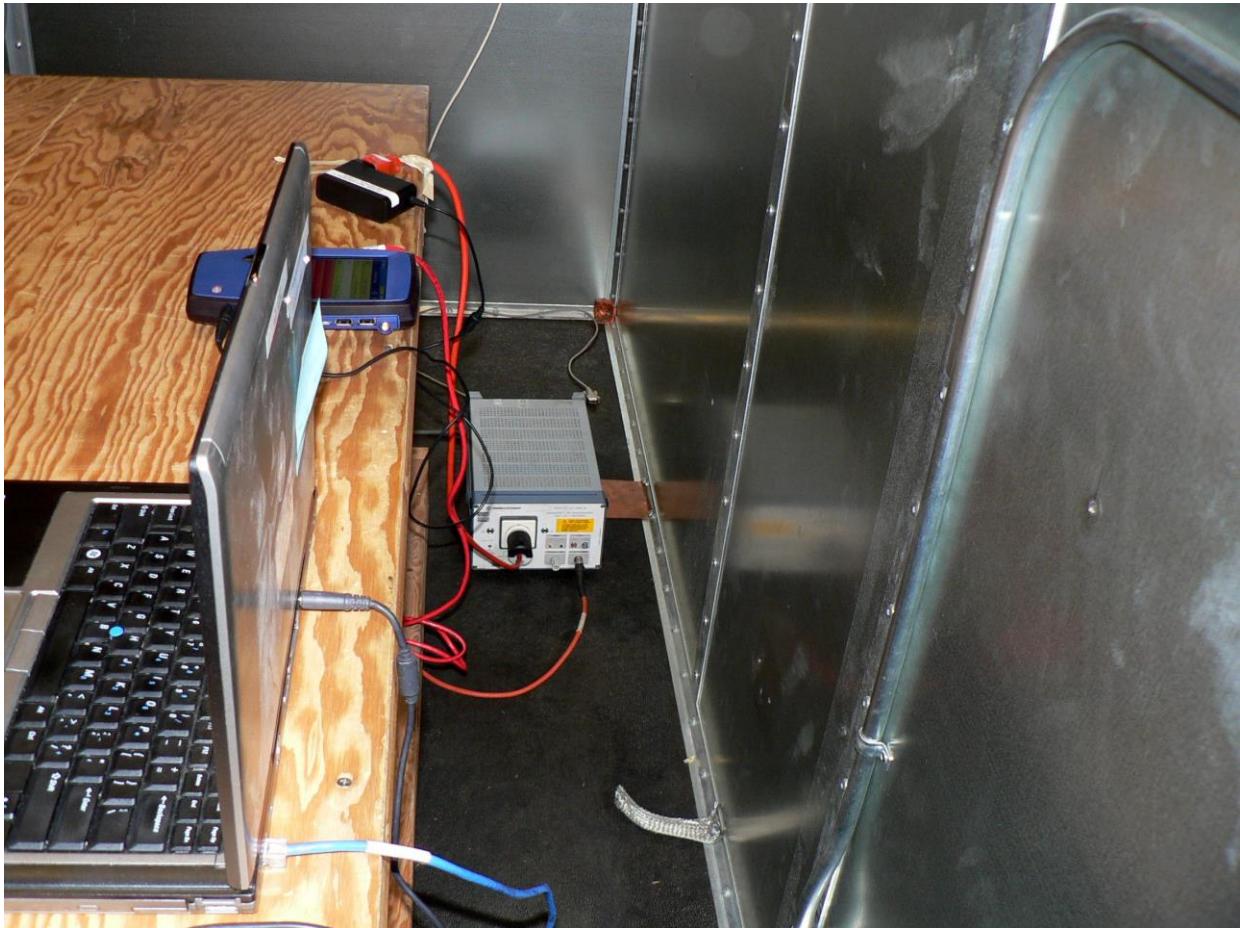


---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

## 8.5. Dynamic Frequency Selection Test Set-Up

**General DFS Test Setup**

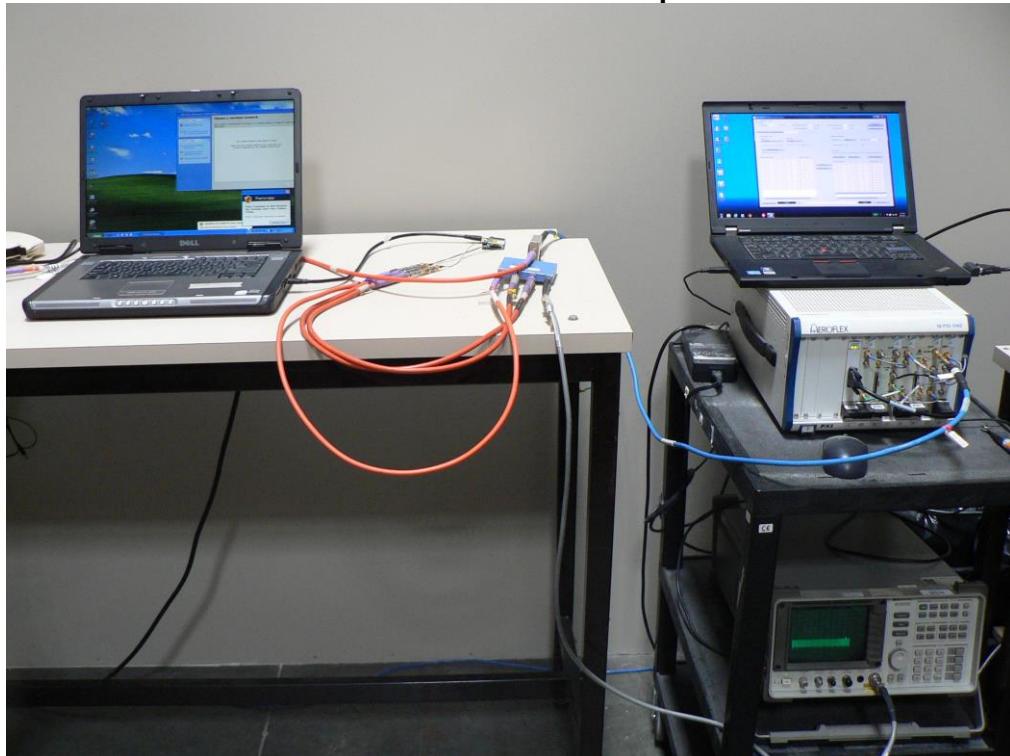

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.