FCC Part 15

TEST REPORT

For

Bluetooth GPS Receiver

Model Name: GR29, GR30, GR31, GR32, GR33, GR34, GR35, GR36, GR37, GR38, GR39, GR40

FCC ID: WA9GR29

Report No.: SZAGC164080501E6

Date of Issue: May 14, 2008

Prepared For

SHENZHEN SUNKIN TECH CO., LTD.

2806 Room, West Tower, Nanshan Digital and Culture Industrial Base, No.10128, Shennan Road, Nanshan District, Shenzhen, China

TEL: 86-755-8622 6911

FAX: 86-755-8622 6805

Prepared By

Shenzhen Attestation of Global Compliance Science & Technology Co., Ltd.

Suite B11/B12, 4F, Huafeng Mall, Chuangye 2nd Road,

25 District, Bao'an, Shenzhen

TEL: 86-755-2974 2358

FAX: 86-755-2600 8484

VERIFICATION OF COMPLIANCE

A 11 /	
Applicant:	SHENZHEN SUNKIN TECH CO., LTD.
Manufacturer	SHENZHEN SUNKIN TECH CO., LTD.
Product Description:	Bluetooth GPS Receiver
Brand Name:	
Model Number:	GR29, GR30, GR31, GR32, GR33, GR34, GR35, GR36, GR37, GR38, GR39, GR40
FCC ID	WA9GR29
Report Number:	SZAGC164080501E6
Date of Test:	May 06, 2008-May 13, 2008

WE HEREBY CERTIFY THAT:

The above equipment was tested by Shenzhen Attestation of Global Compliance Science & Technology Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2003) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 15.247.

Tested By:

Tony Tian May 14, 2008

Checked By:

Randy He

Randy He

May 14, 2008

Kny 2hny

Authorized By

King Zhang

May 14, 2008

TABLE OF CONTENTS

1. GEN	NERAL INFORMATION	4
1.1	PRODUCT DESCRIPTION	4
1.2	RELATED SUBMITTAL(S) / GRANT (S)	4
1.3	TEST METHODOLOGY	4
1.4	TEST FACILITY	4
1.5	SPECIAL ACCESSORIES	4
1.6	EQUIPMENT MODIFICATIONS	4
2. SYS	STEM TEST CONFIGURATION	5
2.1	CONFIGURATION OF TESTED SYSTEM	5
2.2	EQUIPMENT USED IN TESTED SYSTEM	5
3. SUN	MMARY OF TEST RESULTS	6
4. DES	SCRIPTION OF TEST MODES	6
5. CO	NDUCTION EMISSIONS	7
5.1	MEASUREMENT PROCEDURE:	7
5.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	7
5.3	MEASUREMENT EQUIPMENT USED:	7
5.4	LIMITS AND MEASUREMENT RESULT:	8
6. MAX	XIMUM OUTPUT POWER	9
6.1	MEASUREMENT PROCEDURE:	9
6.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	9
6.3	MEASUREMENT EQUIPMENT USED:	11
6.4	LIMITS AND MEASUREMENT RESULT:	12
7. 20 C	DB BANDWIDTH	14
7.1	MEASUREMENT PROCEDURE	14
7.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	14
7.3	MEASUREMENT EQUIPMENT USED:	14
7.4	LIMITS AND MEASUREMENT RESULTS:	14
8. MAX	XIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY	16
8.1	MEASUREMENT PROCEDURE:	16
8.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	16
8.3	MEASUREMENT EQUIPMENT USED:	16
8.4	LIMITS AND MEASUREMENT RESULT:	16
9. OU	T OF BAND EMISSION	19
9.1	MEASUREMENT PROCEDURE:	19
9.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	19
9.3	MEASUREMENT EQUIPMENT USED:	19

10.1 MEASUREMENT PROCEDURE	26 26
10.1 MEASUREMENT PROCEDURE	26
10.1 WE/GOTCHWEIVI I ROOLDOTC	
10.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	26
10.3 MEASUREMENT EQUIPMENT USED	20
10.4 LIMITS AND MEASUREMENT RESULT:	26
11. TIME OF OCCUPANCY (DWELL TIME)	28
11.1 MEASUREMENT PROCEDURE	28
11.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	28
11.3 MEASUREMENT EQUIPMENT USED	28
11.4 LIMITS AND MEASUREMENT RESULT	28
12. FREQUENCY SEPARATION	31
12.1 MEASUREMENT PROCEDURE	31
12.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	31
12.3 MEASUREMENT EQUIPMENT USED	31
12.4 LIMITS AND MEASUREMENT RESULT	31
APPENDIX 1	32
PHOTOGRAPHS OF SET UP	32
APPENDIX 2	35
PHOTOGRAPHS OF EUT	

1. GENERAL INFORMATION

1.1 PRODUCT DESCRIPTION

The EUT is a short range, lower power; **Bluetooth GPS Receiver** designed as an "Communication Device". It is designed by way of utilizing the FHSS technology to achieve the system operation.

A major technical description of EUT is described as following:

Operation Frequency	2.402 GHz to 2.480 GHz
Rated Output Power	-8.76 dBm
Modulation	FHSS
Number of channels	79
Antenna Designation	Dedicated Antenna with Maximum 1.5 dBi
Power Supply	DC 5.0 V Power by Battery

1.2 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for FCC ID: **WA9GR29** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

1.3 TEST METHODOLOGY

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 (2003). Radiated testing was performed at an antenna to EUT distance 3 meters.

1.4 TEST FACILITY

All measurement facilities used to collect the measurement data are located at World Standardization Certification & Testing Co., Ltd. 1-2/F, Dachong Keji Building, No.28 of Tonggu Road, Nanshan District, Shenzhen, China

FCC Registration Number: 989301

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with preselectors and quasi-peak detectors are used to perform radiated measurements.

1.5 SPECIAL ACCESSORIES

Not available for this EUT intended for grant.


1.6 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

2. SYSTEM TEST CONFIGURATION

2.1 CONFIGURATION OF TESTED SYSTEM

USB MODE:



BT MODE:

EUT (Bluetooth GPS Receiver)

2.2 EQUIPMENT USED IN TESTED SYSTEM

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID
1	Bluetooth GPS Receiver		GR29	WA9GR29
2	Computer	HP	520	

3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.207	Conduction Emission	Compliant
§15.209	Radiated Emission	Compliant
§15.247	Maximum Output Power	Compliant
§15.247	20 dB Bandwidth	Compliant
§15.247	Band Edges	Compliant
§15.247	Spurious Emission	Compliant
§15.247	Frequency Separation	Compliant
§15.247	Number of Hopping Frequency	Compliant
§15.247	Time of Occupancy	Compliant
§15.247	Peak Power Density	Compliant

4. DESCRIPTION OF TEST MODES


- 1. The EUT has been set to operate continuously on the lowest, the middle and the highest operation frequency individually.
- 2. The EUT stays in continuous transmitting mode on the operation frequency being set.3. The EUT also be tested under USB Mode.

5. CONDUCTION EMISSIONS

5.1 MEASUREMENT PROCEDURE:

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4.
- 2. Support equipment, if needed, was placed as per ANSI C63.4.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- 4. The EUT received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5. All support equipments received AC power from a second LISN, if any.
- 6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.

5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

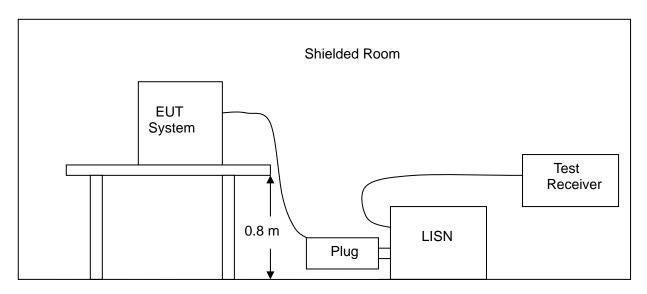


5.3 MEASUREMENT EQUIPMENT USED:


CONDUCTED EMISSION TEST SITE					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
EMI TEST RECEIVER	HP	8546A/8546 0A	3625A00349 3448A00325	2007-10	2008-10
LISN	AFJ	LS16	16010222119	2008-04	2009-04

5.4 LIMITS AND MEASUREMENT RESULT:

LINE CONDUCTED EMISSION TEST - L1

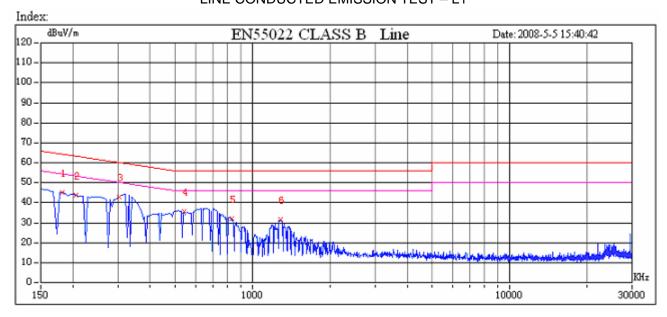

LINE CONDUCTED EMISSION TEST - L2

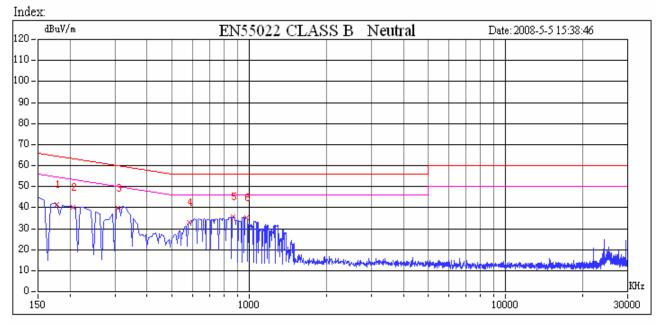

6. MAXIMUM OUTPUT POWER

6.1 MEASUREMENT PROCEDURE:


CONDUCTED METHOD

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 3. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 4. Set SPA Centre Frequency = Operation Frequency, RBW= 1 MHz, VBW= 1 MHz.
- 5. Set SPA Trace 1 Max hold, then View.


RADIATED METHOD According to ANSI C63.4:2003


6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

CONDUCTED METHOD

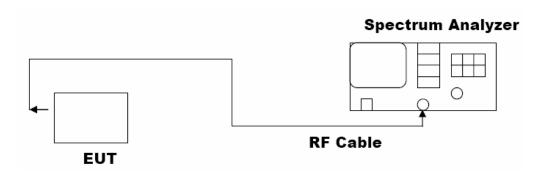



RADIATED METHOD RADIATED MISSION TEST SETUP BELOW 1000MHz

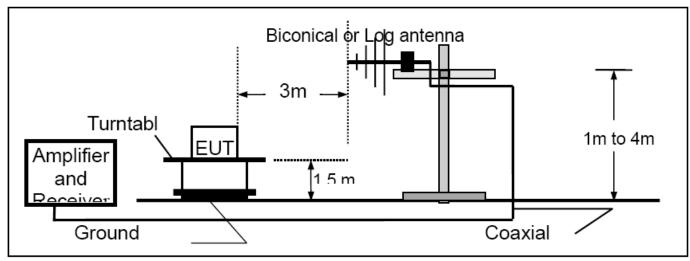

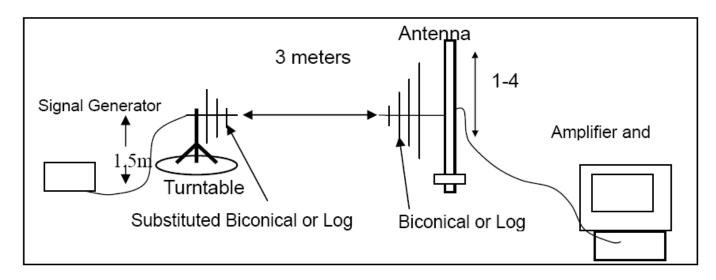

RADIATED EMISSION TEST SETUP UP ABOVE 1000MHz

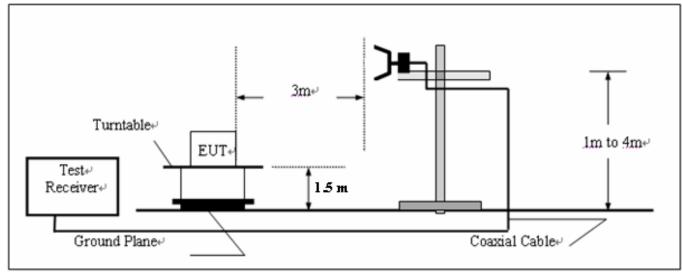

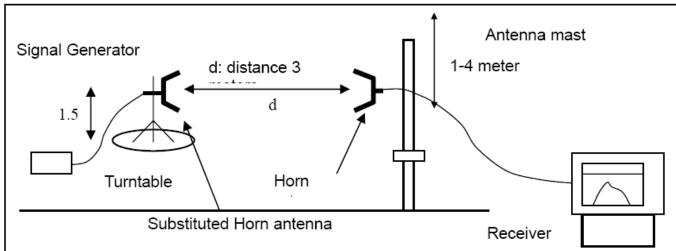


6.3 MEASUREMENT EQUIPMENT USED:

3M ANECHOIC CHAMBER RADIATION TEST SITE						
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.	
EMI Test Receiver	R&S	ESCS30	100343	2008-04	2009-04	
AMPLIFIER	HP	HP8447E	2945A02715	2008-04	2009-04	
ANTENNA	Sunol Sciences Corp.	JB3	A021907	2008-04	2009-04	
ANTENNA	Sunol Sciences Corp.	JB3	A021907	2008-04	2009-04	
Spectrum Analyzer	Agilent	E4440A	US41421290	2008-04	2009-04	

6.4 LIMITS AND MEASUREMENT RESULT:


LIMITS AND MEASUREMENT RESULT							
Applicable	Fraguanay		Measurement Result				
Limits	Frequency	EIRP (dBm)	Conducted (dBm)	Criteria			
30 dBm	2.402GHz	-8.76	-10.45	PASS			
30 dBm	2.449GHz	-9.51	-11.25	PASS			
30 dBm	2.480GHz	-9.74	-11.13	PASS			

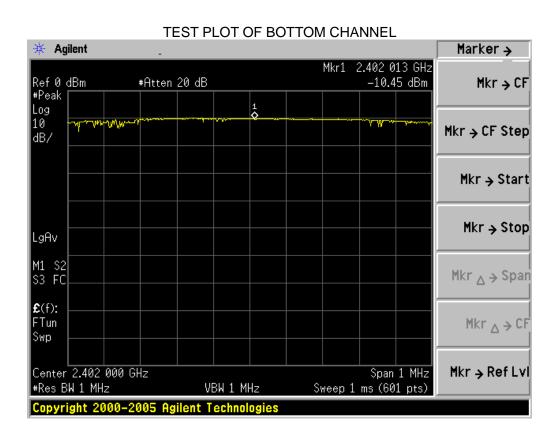

TEST PLOT OF MIDDLE CHANNEL



TEST PLOT OF TOP CHANNEL

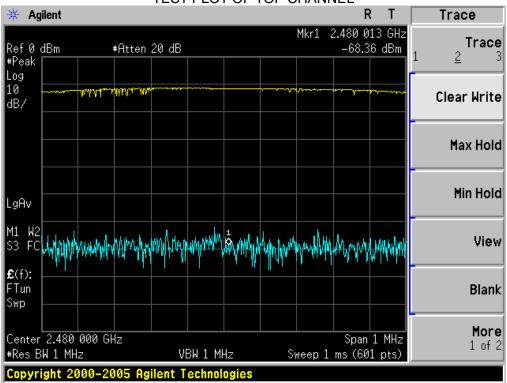

7. 20 DB BANDWIDTH

7.1 MEASUREMENT PROCEDURE

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 3, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Centre Frequency = Operation Frequency, RBW= 100 KHz, VBW= 100 KHz.
- 4. Set SPA Trace 1 Max hold, then View.

7.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The Same as described in Section 6.2


7.3 MEASUREMENT EQUIPMENT USED:

The same as described in Section 6.3


7.4 LIMITS AND MEASUREMENT RESULTS:

LIMITS AND MEASUREMENT RESULT					
Applicable Limits		Measurement Result			
Applicable Limits	Test Da	Criteria			
	Bottom Channel	998.525	PASS		
	Middle Channel	971.635	PASS		
	Top Channel	962.835	PASS		




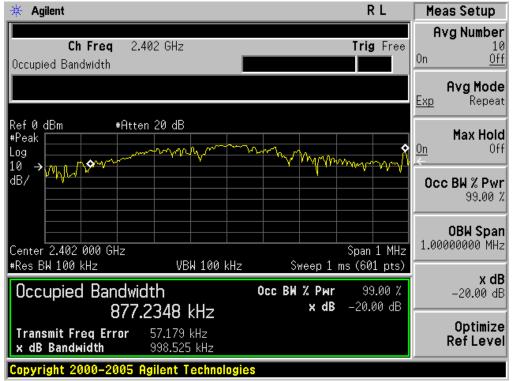

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

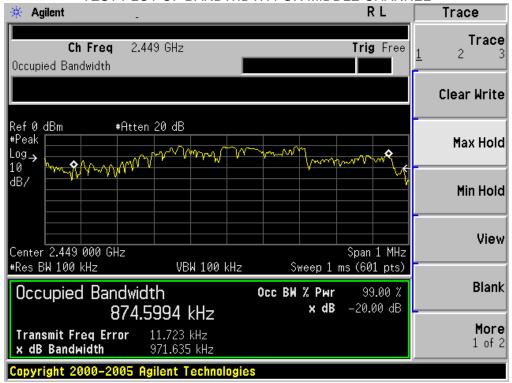

TEST PLOT OF BANDWIDTH FOR TOP CHANNEL

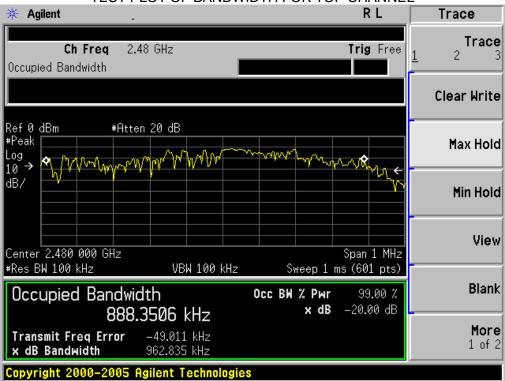


8. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY

8.1 MEASUREMENT PROCEDURE:

- (1). The EUT was placed on a turn table which is 0.8m above ground plane.
- (2). Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- (3), Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- (4). Set SPA Centre Frequency = Operation Frequency, RBW= 3 KHz, VBW= 10 KHz., Sweep time= Auto
- (5). Set SPA Trace 1 Max hold, then View.

8.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

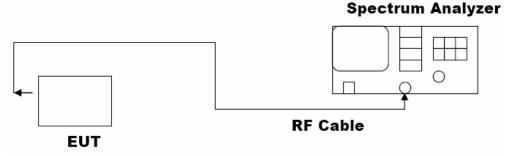


8.3 MEASUREMENT EQUIPMENT USED:

SHIELDING ROOM					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Agilent	E4440A	US41421290	04/16/2007	04/15/2008


8.4 LIMITS AND MEASUREMENT RESULT:

LIMITS AND MEASUREMENT RESULT						
Applicable Limits		Measurement Result				
Applicable Littlis	Test Data (dl	Criteria				
	Bottom Channel	-22.75	PASS			
8 dBm/3KHz	Middle Channel	-22.88	PASS			
	Top Channel	-24.42	PASS			


TEST PLOT OF SPECTRAL DENSITY - BOTTOM CHANNEL

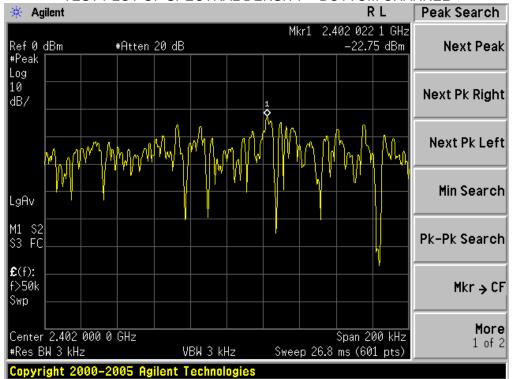

TEST PLOT OF SPECTRAL DENSITY - MIDDLE CHANNEL

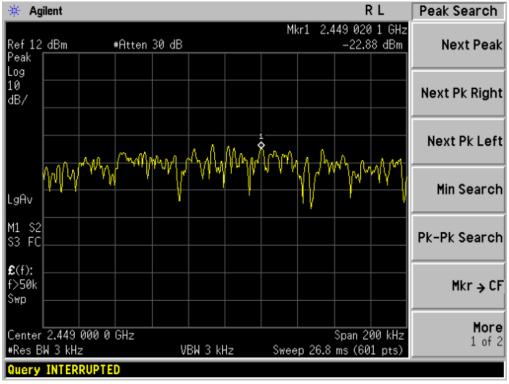

TEST PLOT OF SPECTRAL DENSITY - TOP CHANNEL

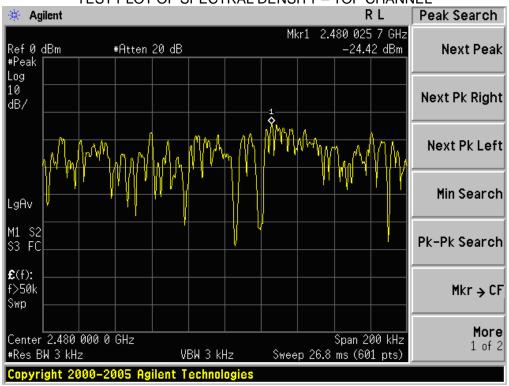

9. OUT OF BAND EMISSION

9.1 **MEASUREMENT PROCEDURE:**

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 3, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Centre Frequency = Operation Frequency, RBW= 100 KHz, VBW= 100 KHz.
- 4. Set SPA Trace 1 Max hold, then View.

TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)The Same as described in section 6.2 9.2


MEASUREMENT EQUIPMENT USED: 9.3

The Same as described in section 6.3


9.4 **LIMITS AND MEASUREMENT RESULT:**

LIMITS AND MEASUREMENT RESULT				
Applicable Limite	Measurement R	esult		
Applicable Limits	Test Data	Criteria		
In any 100 KHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produce by the intentional radiator shall be at least 20 dB below that in	At least -20dBc than the limit Specified on the BOTTOM Channel	PASS		
100KHz bandwidth within the band that contains the highest level of the desired power. In addition, radiation emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in§15.209(a))	At least -20dBc than the limit	PASS		


TEST PLOT OF BAND ELDG FOR BOTTOM CHANNEL

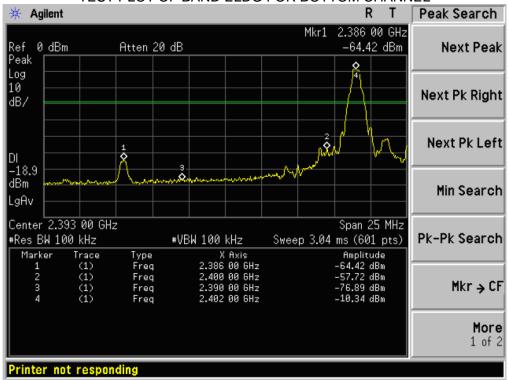


TEST PLOT OF BAND ELDG FOR TOP CHANNEL

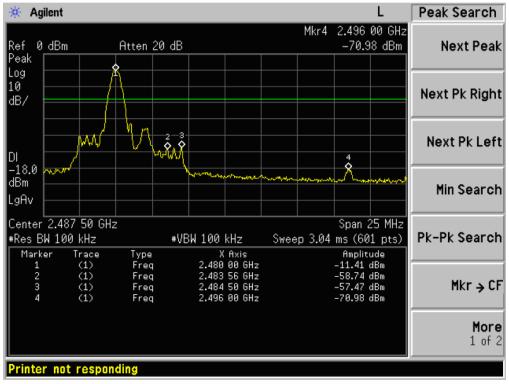


TEST PLOT OF OUT OF BAND EMISSIONS FOR BOTTOM CHANNEL - 1

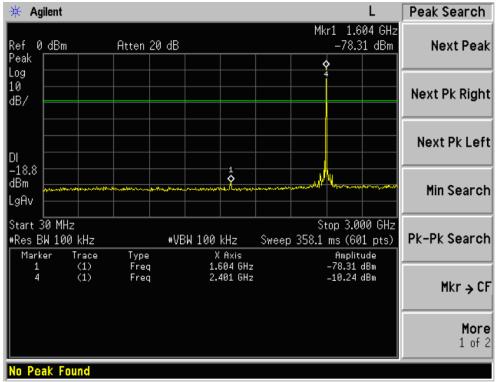


TEST PLOT OF OUT OF BAND EMISSIONS FOR BOTTOM CHANNEL - 2

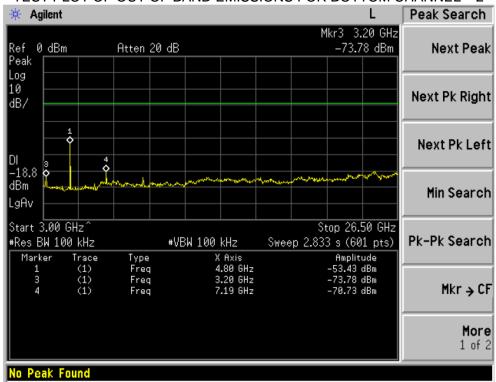


TEST PLOT OF OUT OF BAND EMISSIONS FOR MIDDLE CHANNEL - 1

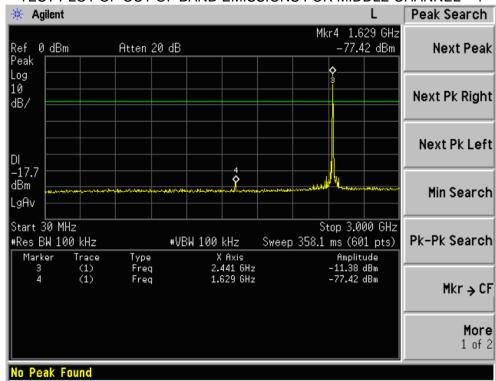


TEST PLOT OF OUT OF BAND EMISSIONS FOR MIDDLE CHANNEL - 2

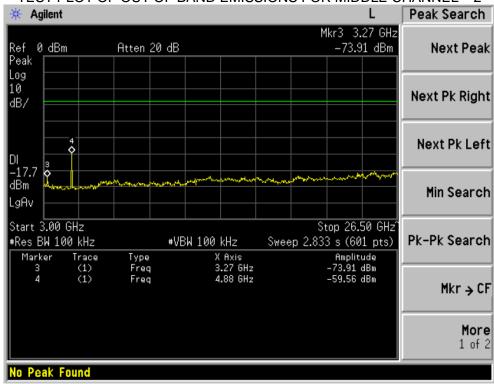

TEST PLOT OF OUT OF BAND EMISSIONS FOR TOP CHANNEL - 1

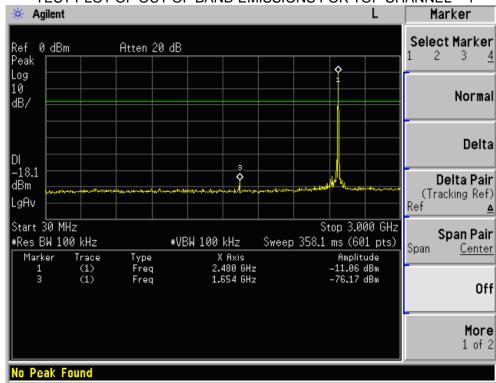



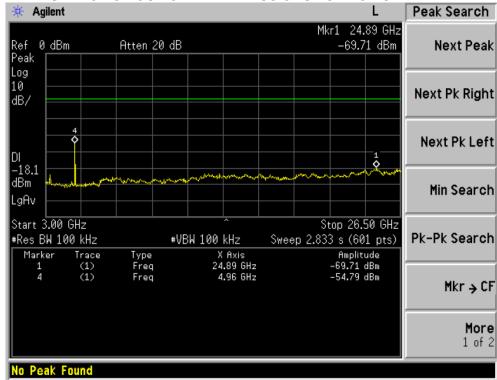

RADIATED EMISSION TEST RESULT:

Emissi	Emission for Bottom/Middle/Top Channel Below 1GHz USB mode & Transmitting					
Frequency	Antenna Pol.	Field Strength	Field Strength	Limit (PK)	Limit (AV)	Memo
MHz	H/V	dBuV/m (PK)	dBuV/m (AV)	dBuV/m	dBuV/m	Memo
	H/V					*
	H/V					*
	H/V					*
	H/V					*

	Band Edge Emission for Bottom Channel					
Frequency	Antenna Pol.	Field Strength	Field Strength	Limit (PK)	Limit (AV)	Memo
GHz	H/V	dBuV/m (PK)	dBuV/m (AV)	dBuV/m	dBuV/m	ivienio
2.386	Н	46.03	40.17	74	54	*
2.400	Н	54.10	47.24	74	54	*
2.386	V	45.11	39.77	74	54	*
2.400	V	52.22	45.12	74	54	*

	Band Edge Emission for Top Channel					
Frequency	Antenna Pol.	Field Strength	Field Strength	Limit (PK)	Limit (AV)	Memo
GHz	H/V	dBuV/m (PK)	dBuV/m (AV)	dBuV/m	dBuV/m	IVIEITIO
2.483	Н	52.04	46.63	74	54	*
2.484	Н	52.22	47.01	74	54	*
2.496	Н	45.19	39.23	74	54	*
2.483	V	50.19	44.21	74	54	*
2.484	V	50.33	45.01	74	54	*
2.496	V	44.09	37.13	74	54	*

Report No.:SZAGC164080501E6 Page 24 of 39

	Restricted Band Emission for Bottom Channel					
Frequency	Antenna Pol.	Field Strength	Field Strength	Limit (PK)	Limit (AV)	Memo
GHz	H/V	dBuV/m (PK)	dBuV/m (AV)	dBuV/m	dBuV/m	Memo
4.81	Н	57.11	44.47	74	54	*
4.81	V	56.21	43.61	74	54	*
Above	Н			74	54	*
4.81 GHz	V			74	54	*

	Restricted Band Emission for Middle Channel					
Frequency	Antenna Pol.	Field Strength	Field Strength	Limit (PK)	Limit (AV)	Memo
GHz	H/V	dBuV/m (PK)	dBuV/m (AV)	dBuV/m	dBuV/m	IVIEITIO
4.88	Н	51.67	40.38	74	54	*
4.88	V	50.38	40.01	74	54	*
Above	Н			74	54	*
4.88 GHz	V			74	54	*

	Restricted Band Emission for Top Channel					
Frequency	Antenna Pol.	Antenna Pol. Field Strength Field Strength Limit (PK) Limit (AV)				Memo
GHz	H/V	dBuV/m (PK)	dBuV/m (AV)	dBuV/m	dBuV/m	IVIEITIO
4.95	Н	55.19	43.63	74	54	*
4.95	V	53.78	41.29	74	54	*
Above	Н			74	54	*
4.95GHz	V	-		74	54	*

Note: "--" Indicated the test value is much lower to limit.

10. NUMBER OF HOPPING FREQUENCY

10.1 MEASUREMENT PROCEDURE

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer.
- 3. Set the spectrum analyzer Start = 2.4GHz Stop = 2.4835GHz, Sweep = Auto
- 4. Set the Spectrum Analyzer as RBW = VBW = 1MHz

10.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 6.2


10.3 MEASUREMENT EQUIPMENT USED

The Same as described in section 6.3


10.4 LIMITS AND MEASUREMENT RESULT:

TOTAL NO. OF	LIMIT (NO. OF CH)	MEASUREMENT (NO. OF CH)	RESULT
HOPPING CHANNEL	>=15	79	PASS

TEST PLOT FOR NO. OF TOTAL CHANNELS - 1

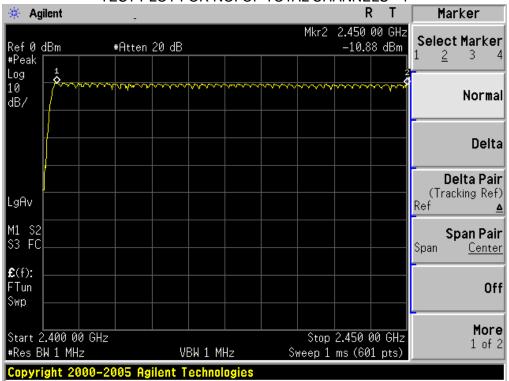

TEST PLOT FOR NO. OF TOTAL CHANNELS - 2

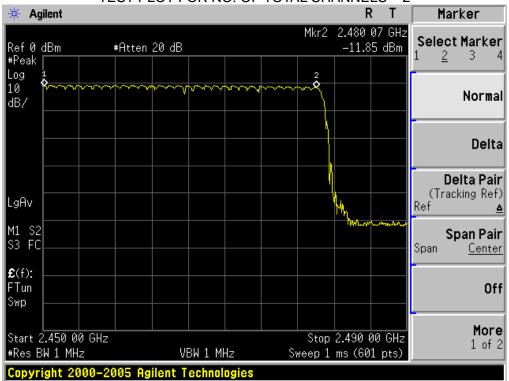

11. TIME OF OCCUPANCY (DWELL TIME)

11.1 MEASUREMENT PROCEDURE

- 1. Place the EUT on the table and set it in transmitting mode
- 2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer
- 3. Set center frequency of spectrum analyzer = Operating frequency
- 4. Set the spectrum analyzer as RBW, VBW=1MHz, Span = 0 Hz,

11.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 6.2

11.3 MEASUREMENT EQUIPMENT USED

The same as described in section 6.3

11.4 LIMITS AND MEASUREMENT RESULT

The dwell time = Time Slot Length * Hop Rate / Number of Hopping Channels * 0.4 * 79 L-CH:

DH1 Time Slot = 0.152 (ms) * (1600/(2*79))*31.6 = 48.6 (ms)


M-CH:

DH1 Time Slot = 0.155 (ms) * (1600/(2*79))*31.6 = 49.6 (ms)


H-CH:

DH1 Time Slot = 0.155 (ms) * (1600/(2*79))*31.6 = 48.6 (ms)


DWELL TIME TEST PLOT OF BOTTOM CHANNEL

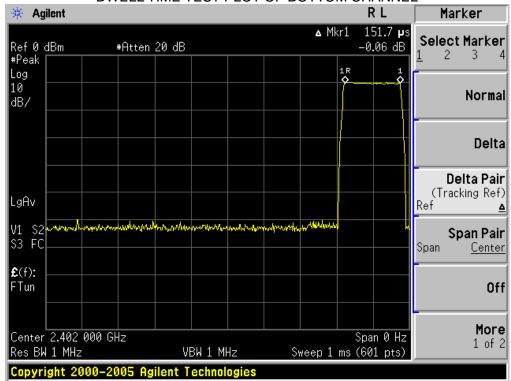

DWELL TIME TEST PLOT OF MIDDLE CHANNEL

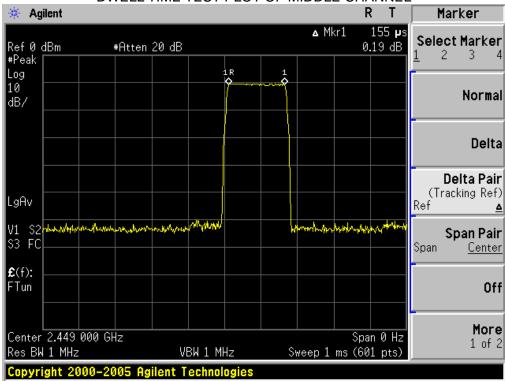

DWELL TIME TEST PLOT OF TOP CHANNEL

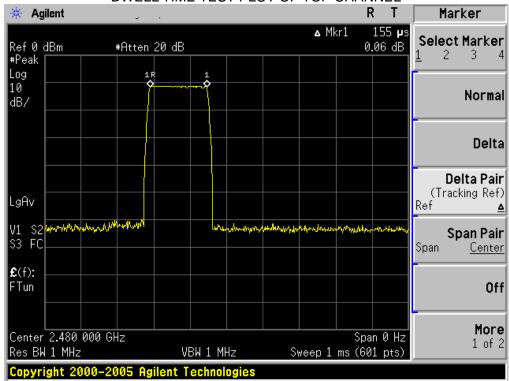

12. FREQUENCY SEPARATION

12.1 MEASUREMENT PROCEDURE

- 1. Place the EUT on the table and set it in transmitting mode
- 2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer
- 3. Set center frequency of spectrum analyzer = Middele of Operating frequency
- 4. Set the spectrum analyzer as RBW, VBW=100KHz, Span = 5 MHz,

12.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 6.2


12.3 MEASUREMENT EQUIPMENT USED

The same as described in section 6.3

12.4 LIMITS AND MEASUREMENT RESULT

CHANNEL SEPARATION	LIMIT	RESULT
KHz	KHz	Pass
1000	>=25 KHz or 2/3 20 dB BW	F 055




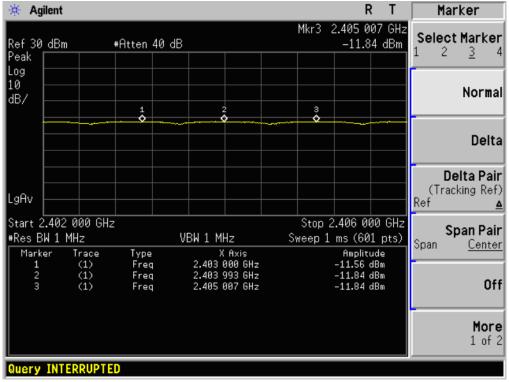


APPENDIX 1

PHOTOGRAPHS OF SET UP



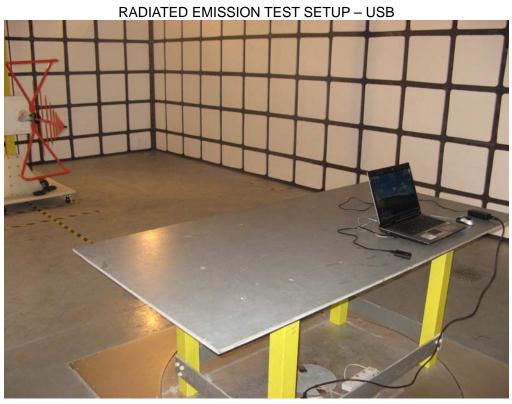

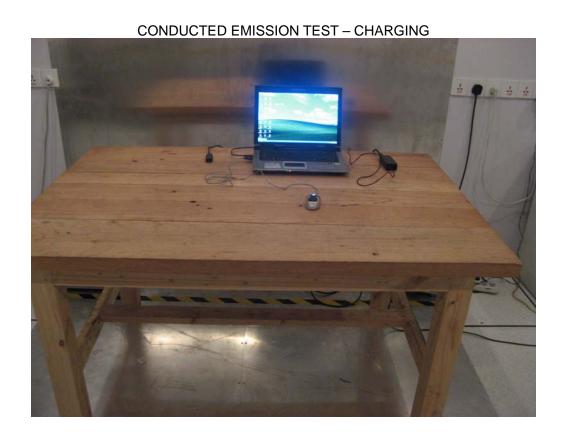

APPENDIX 2

PHOTOGRAPHS OF EUT

FRONT VIEW OF SAMPLE



BACK VIEW OF EUT










TOP VIEW OF SAMPLE




BOTTOM VIEW OF SAMPLE



INTERNAL VIEW OF SAMPLE – 1

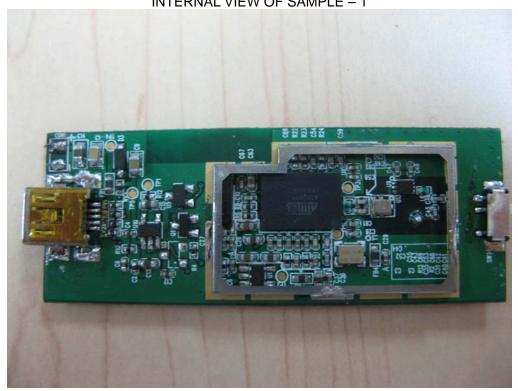

INTERNAL VIEW OF SAMPLE – 2

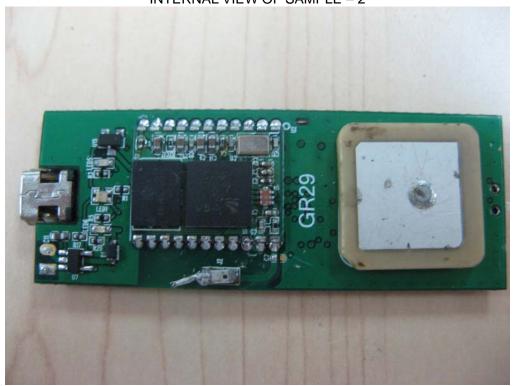

----END OF REPORT----