

FCC TEST REPORT

FCC ID: WAGACCEL-7450T

Applicant: KONG YUE ELECTRONICS & INFORMATION INDUSTRY LTD

Address: 18 Kongyue road, Jinguzhou Zone, Xinhui district, Jiangmen city,Guangdong Province, China.

Equipment Under Test (EUT) :

Product Name: Dot-matrix Printer

Model No.: Accel-7450T

Standards: FCC Part 15 Subpart B:2009


Date of Test: June 15, 2011 ~ June 17, 2011

Date of Issue: June 28, 2011

Test Engineer: Olic huang



Reviewed By: Philo zhong



| | |
|---------------------|------|
| Test Result: | PASS |
|---------------------|------|

Prepared By:

Waltek Services (Shenzhen) Co., Ltd.

1/F, Fukangtai Building, West Baima Rd., Songgang Street, Baoan District,
Shenzhen 518105, China

Tel :+86-755-27553488

Fax:+86-755-27553868

- ◆ The sample detailed above has been tested to the requirements of Council Directives ANSI C63.4:2003. The test results have been reviewed against the Directives above and found to meet their essential requirements.

WALTEK SERVICES

Reference No.: WT11062763-D-E-F

2 Test Summary

| Test | Test Requirement | Test Method | Class / Severity | Result |
|---|-------------------------------|------------------|------------------|--------|
| Radiated Emission (30MHz to 1GHz) | FCC Part 15 Subpart B:2009 | ANSI C63.4: 2003 | Class B | PASS |
| Conducted Emission (150KHz to 30MHz) | FCC Part 15 Subpart B:2009 | ANSI C63.4: 2003 | Class B | PASS |

3 Contents

| | |
|---|-----------|
| 1 COVER PAGE..... | 1 |
| 2 TEST SUMMARY..... | 2 |
| 3 CONTENTS..... | 3 |
| 4 GENERAL INFORMATION | 4 |
| 4.1 CLIENT INFORMATION..... | 4 |
| 4.2 GENERAL DESCRIPTION OF E.U.T..... | 4 |
| 4.3 DETAILS OF E.U.T..... | 4 |
| 4.4 DESCRIPTION OF SUPPORT UNITS | 4 |
| 4.5 STANDARDS APPLICABLE FOR TESTING | 4 |
| 4.6 TEST FACILITY | 5 |
| 4.7 TEST LOCATION | 5 |
| 5 EQUIPMENT USED DURING TEST | 6 |
| 6 EMISSIONS TEST RESULTS | 7 |
| 6.1 CONDUCTED EMISSION DATA | 7 |
| 6.1.1 <i>E.U.T. Operation</i> | 7 |
| 6.1.2 <i>EUT Setup</i> | 8 |
| 6.1.3 <i>Conducted Emission Test Result</i> | 8 |
| 6.1.4 <i>Photograph – Conducted Emission Test Setup</i> | 11 |
| 6.2 RADIATION EMISSION DATA | 12 |
| 6.2.1 <i>Measurement Uncertainty</i> | 12 |
| 6.2.2 <i>EUT Setup</i> | 13 |
| 6.2.3 <i>Test Procedure</i> | 14 |
| 6.2.4 <i>Corrected Amplitude & Margin Calculation</i> | 14 |
| 6.2.5 <i>Summary of Test Results</i> | 14 |
| 6.2.6 <i>Photograph – Radiation Emission Test Setup</i> | 17 |
| 7 PHOTOGRAPHS - CONSTRUCTIONAL DETAILS..... | 18 |
| 7.1 EUT – FRONT VIEW | 18 |
| 7.2 EUT – BACK VIEW | 18 |
| 7.3 EUT – OPEN VIEW | 19 |
| 7.4 PCB OF MAINBOARD – FRONT VIEW | 19 |
| 7.5 PCB OF MAINBOARD – BACK VIEW | 20 |
| 7.6 PCB OF POWER – FRONT VIEW | 20 |
| 7.7 PCB OF POWER – BACK VIEW..... | 21 |
| 8 FCC LABEL..... | 22 |

4 General Information

4.1 Client Information

Applicant: KONG YUE ELECTRONICS & INFORMATION INDUSTRY LTD

Address of Applicant: 18 Kongyue road, Jinguzhou Zone, Xinhui district, Jiangmen city,Guangdong Province, China.

Manufacturer: KONG YUE ELECTRONICS & INFORMATION INDUSTRY LTD

Address of Manufacturer: 18 Kongyue road, Jinguzhou Zone, Xinhui district, Jiangmen city,Guangdong Province, China.

4.2 General Description of E.U.T.

Product Name: Dot-matrix Printer

Model No.: Accel-7450T

Communication Port: Parallel interface, Serial interface, Ethernet interface, USB port

4.3 Details of E.U.T.

Technical Data: 120VAC, 60Hz

4.4 Description of Support Units

The EUT has been tested as an independent unit. All the test was performed in the condition of AC 120V/60Hz input.

4.5 Standards Applicable for Testing

The customer requested FCC tests for a Dot-matrix Printer. The standards used were FCC Part 15 Subpart B:2009.

4.6 Test Facility

The test facility has a test site registered with the following organizations:

- **IC – Registration No.: 7760A**

Waltek Services(Shenzhen) Co., Ltd. has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files. Registration 7760A, Aug.03, 2010.

- **FCC – Registration No.: 880581**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 880581, May 26, 2011.

4.7 Test Location

All the tests were performed at:

Waltek Services(Shenzhen) Co., Ltd. at 1/F, Fukangtai Building, West Baima Rd., Songgang Street, Baoan District, Shenzhen, China

5 Equipment Used during Test

| Equipment Name | Manufacturer Model | Equipment No | Internal No | Specification | Cal. Date | Due Date | Cert. No | Uncertainty |
|--|-------------------------------------|--------------|-------------|---------------|-----------|----------|--------------|---------------------------------------|
| EMC Analyzer | Agilent/ E7405A | MY451149 43 | W2008001 | 9k-26.5GHz | Aug-2010 | Aug-2011 | Wws20 081596 | ±1dB |
| Trilog Broadband Antenne 30-3000 MHz | SCHWARZBECK MESS-ELEKTROM/VULB9163 | 336 | W2008002 | 30-3000 MHz | Aug-2010 | Aug-2011 | - | ±1dB |
| Broad-band Horn Antenna 1-18 GHz | SCHWARZBECK MESS-ELEKTROM/BBHA9120D | 667 | W2008003 | 1-18GHz | Aug-2010 | Aug-2011 | - | f<10 GHz: ±1dB 10GHz<f<18 GHz: ±1.5dB |
| Broadband Preamplifier 0.5-18 GHz | SCHWARZBECK MESS-ELEKTROM/BBV 9718 | 9718-148 | W2008004 | 0.5-18GHz | Aug-2010 | Aug-2011 | - | ±1.2dB |
| 10m Coaxial Cable with N-male Connectors usable up to 18GHz, | SCHWARZBECK MESS-ELEKTROM/AK 9515 H | - | - | - | Aug-2010 | Aug-2011 | - | - |
| 10m 50 Ohm Coaxial Cable with N-plug, individual length, usable up to 3(5)GHz, Connector | SCHWARZBECK MESS-ELEKTROM/AK 9513 | - | - | - | Aug-2010 | Aug-2011 | - | - |
| Positioning Controller | C&C LAB/CC-C-IF | - | - | - | N/A | N/A | - | - |
| Color Monitor | SUNSPO/ SP-14C | - | - | - | N/A | N/A | - | - |
| Test Receiver | ROHDE&SCHWARZ/ ESPI | 101155 | W2005001 | 9k-3GHz | Aug-2010 | Aug-2011 | Wws20 080942 | ±1dB |
| EMI Receiver | Beijingkehuan | KH3931 | - | 9k-1GHz | Aug-2010 | Aug-2011 | - | - |
| Two-Line V-Network | ROHDE&SCHWARZ/ ENV216 | 100115 | W2005002 | 50Ω/50μH | Aug-2010 | Aug-2011 | Wws20 080941 | ±10% |
| V-LISN | SCHWARZBECK MESS-ELEKTRONIK | NSLK 8128 | 8128-259 | 9k-30MHz | Aug-2010 | Aug-2011 | - | - |
| PC | Lenovo | T2900D | - | - | Aug-2010 | Aug-2011 | - | - |
| Display | viewsonic | S27996-1W | - | - | Aug-2010 | Aug-2011 | - | ±0.5dB |
| K/B | DELL | L100 | - | - | Aug-2010 | Aug-2011 | - | ±0.5dB |
| Mouse | acer | M-UVACR1 | - | - | Aug-2010 | Aug-2011 | - | ±0.5dB |

WALTEK SERVICES

Reference No.: WT11062763-D-E-F

6 Emissions Test Results

6.1 Conducted Emission Data

| | |
|-------------------|--|
| Test Requirement: | FCC Part 15.107 |
| Test Method: | ANSI C63.4:2003 |
| Test Result: | PASS |
| Frequency Range: | 150kHz to 30MHz |
| Class: | Class B |
| Limit: | 66-56 dB μ V between 0.15MHz & 0.5MHz 56 dB μ V between 0.5MHz & 5MHz 60 dB μ V between 5MHz & 30MHz |
| Detector: | Peak for pre-scan (9kHz Resolution Bandwidth) Quasi-Peak & Average if maximised peak within 6dB of Average Limit |

6.1.1 E.U.T. Operation

Operating Environment:

| | |
|-----------------------|-----------|
| Temperature: | 25.5 °C |
| Humidity: | 51 % RH |
| Atmospheric Pressure: | 1012 mbar |

EUT Operation:


The EUT was pretested in Connect to PC via USB Cable and print mode, Connect to PC via Ethernet Cable and print mode, Connect to PC via Serial Cable and print mode, Connect to PC via Parallel Cable and print mode, and the worse case was Connect to PC via Parallel Cable and print mode, so the data show was that mode only.

The EUT was tested according to ANSI C63.4:2003. The frequency spectrum from 150kHz to 30MHz was investigated.

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

6.1.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.4:2003, The specification used in this report was the FCC Part15 B 15.107 limits.

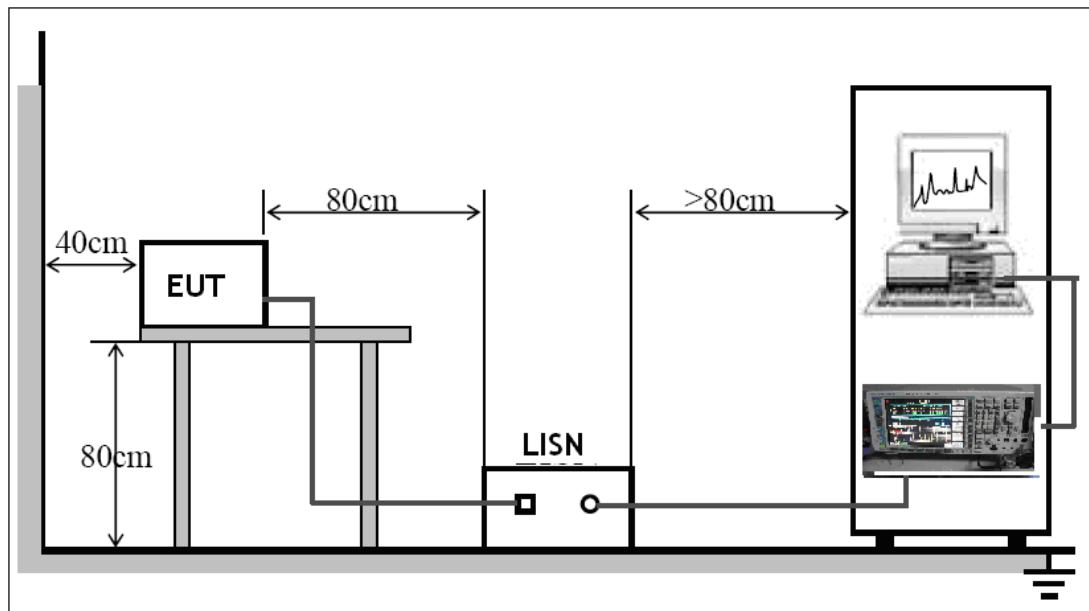


The EUT was placed on the test table in shielding room

6.1.3 Conducted Emission Test Result

An initial pre-scan was performed on the live and neutral lines.


Test Mode: Connect to PC via Parallel Cable and print

Live line:

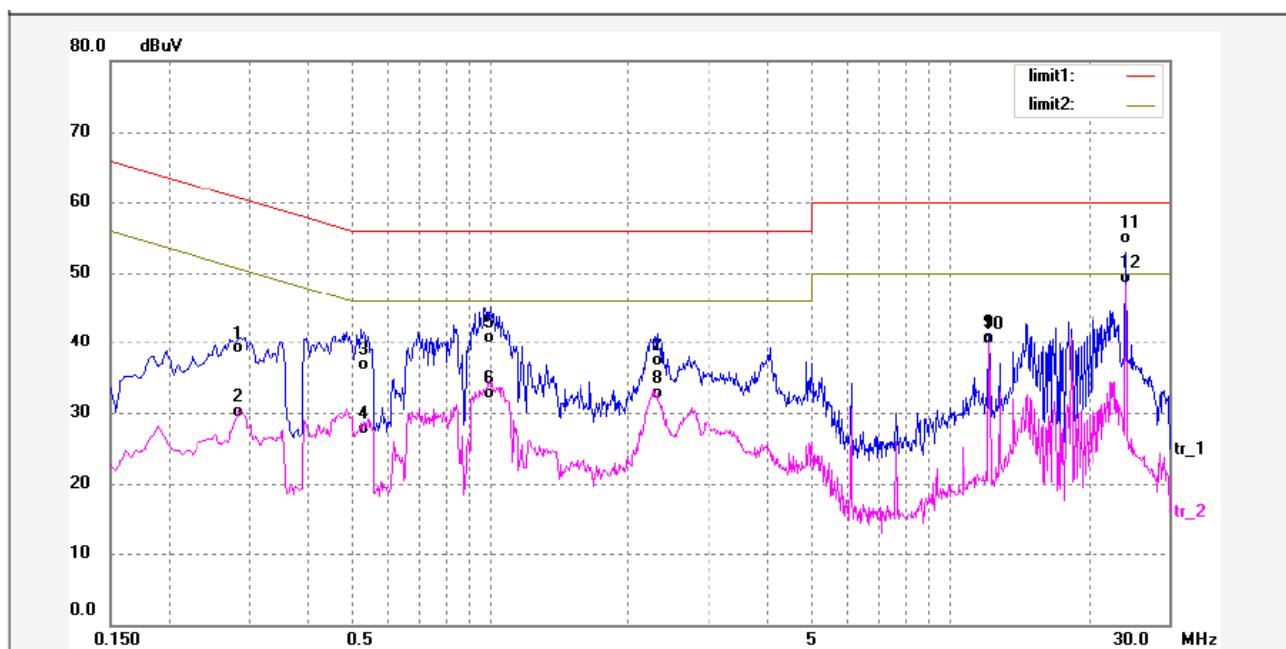

| No. | Freq. (MHz) | Reading (dBuV) | Factor (dB) | Result (dBuV) | Limit dBuV | Margin (dB) | Detector | Remark |
|-----|-------------|----------------|-------------|---------------|------------|-------------|----------|--------|
| 1 | 0.2860 | 27.62 | 10.61 | 38.23 | 60.64 | -22.41 | QP | |
| 2 | 0.2860 | 18.66 | 10.61 | 29.27 | 50.64 | -21.37 | AVG | |
| 3 | 0.5260 | 24.33 | 11.66 | 35.99 | 56.00 | -20.01 | QP | |
| 4 | 0.5260 | 15.16 | 11.66 | 26.82 | 46.00 | -19.18 | AVG | |
| 5 | 1.0060 | 27.74 | 12.19 | 39.93 | 56.00 | -16.07 | QP | |
| 6 | 1.0060 | 19.74 | 12.19 | 31.93 | 46.00 | -14.07 | AVG | |
| 7 | 2.3179 | 24.23 | 12.26 | 36.49 | 56.00 | -19.51 | QP | |
| 8 | 2.3179 | 19.56 | 12.26 | 31.82 | 46.00 | -14.18 | AVG | |
| 9 | 12.2500 | 27.81 | 12.15 | 39.96 | 60.00 | -20.04 | QP | |
| 10 | 12.2500 | 27.51 | 12.15 | 39.66 | 50.00 | -10.34 | AVG | |
| 11 | 24.2060 | 41.48 | 12.53 | 54.01 | 60.00 | -5.99 | QP | |
| 12 | 24.2060 | 35.99 | 12.53 | 48.52 | 50.00 | -1.48 | AVG | |

Neutral line:

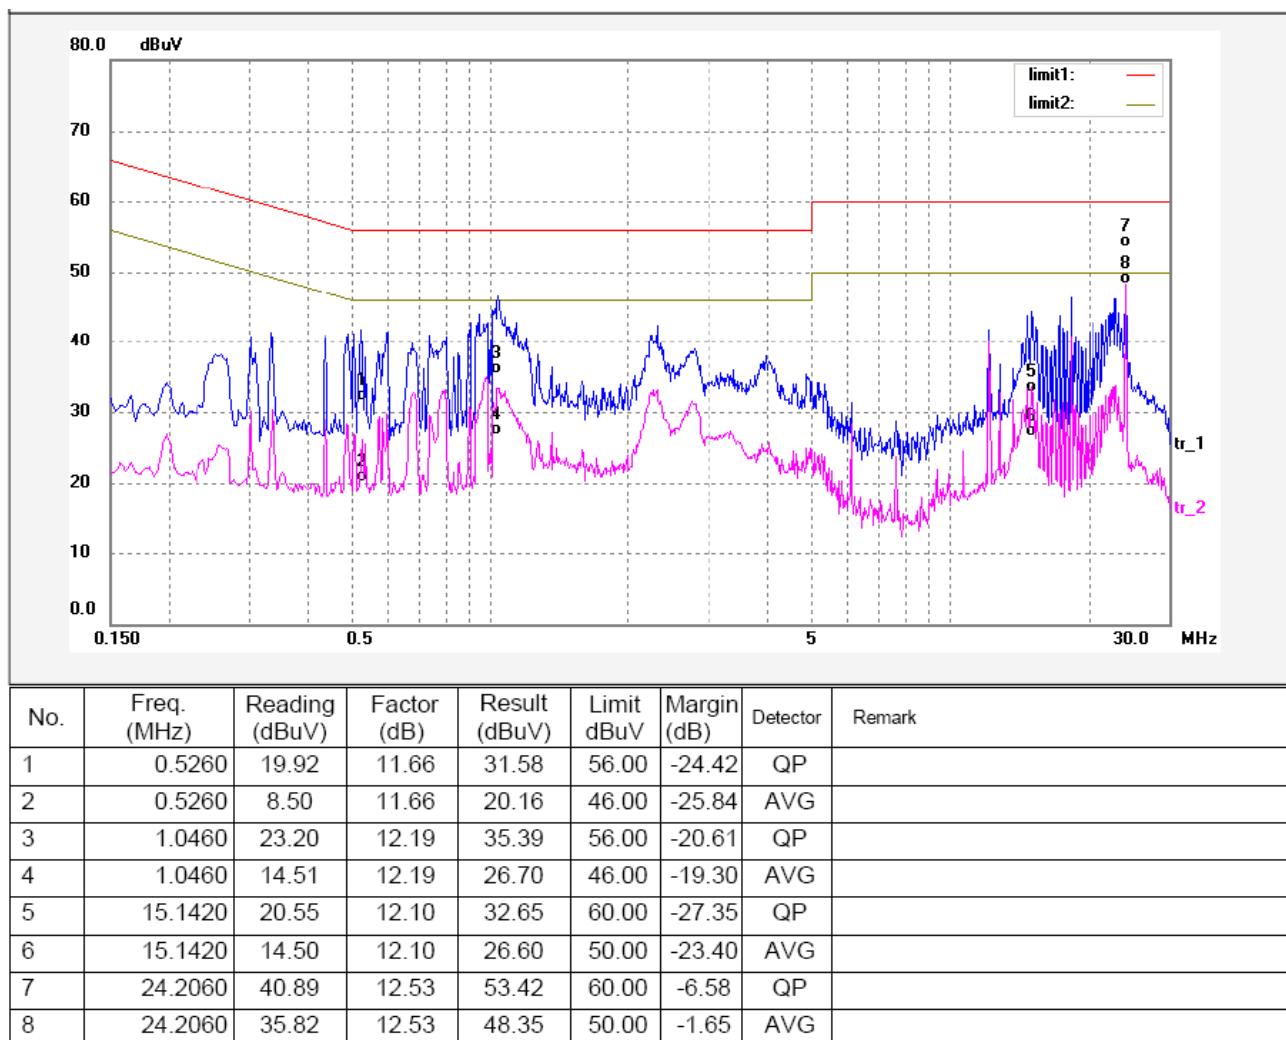

6.1.4 Photograph – Conducted Emission Test Setup

Front View



Back View



6.2 Radiation Emission Data

| | |
|-----------------------|--|
| Test Requirement: | FCC Part15.109 |
| Test Method: | ANSI C63.4:2003 |
| Test Result: | PASS |
| Frequency Range: | 30MHz to 1GHz |
| Measurement Distance: | 3m |
| Class: | Class B |
| Limit: | 40.0 dB μ V/m between 30MHz & 88MHz 43.5 dB μ V/m between 88MHz & 216MHz 46.0 dB μ V/m between 216MHz & 960MHz 54.0 dB μ V/m above 960MHz |
| Detector: | Peak for pre-scan (120kHz resolution bandwidth) Quasi-Peak if maximised peak within 6dB of limit |

EUT Operation :

The EUT was pretested in Connect to PC via USB Cable and print mode, Connect to PC via Ethernet Cable and print mode, Connect to PC via Serial Cable and print mode, Connect to PC via Parallel Cable and print mode, and the worse case was Connect to PC via Parallel Cable and print mode, so the data show was that mode only.


6.2.1 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Waltek EMC Lab is ± 5.03 dB.

6.2.2 EUT Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.4:2003, The specification used in this report was the FCC Part15 B limits.

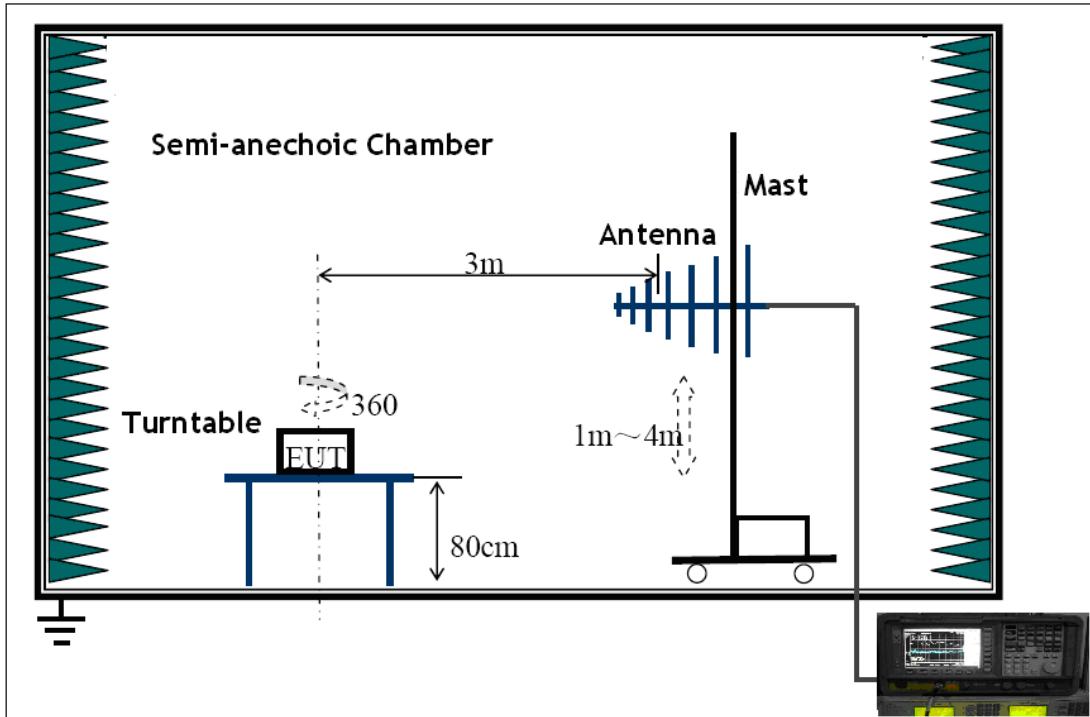

The EUT was placed on the test table in shielding room.

6.2.3 Test Procedure

The radiated emissions test.

Maximizing procedure was performed on the six (6) highest emissions to ensure EUT is compliant with all installation combinations.

All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB μ V of specification limits), and are distinguished with a "Qp" in the data table.

The EUT was under normal mode during the final qualification test and the configuration was used to represent the worst case results.

6.2.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB μ V means the emission is 7dB μ V below the maximum limit for Class B. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Corr. Ampl.} - \text{Class B Limit}$$

6.2.5 Summary of Test Results

According to the data in this section, the EUT complied with the FCC Part15 B standards.


Test Mode: Connect to PC via Parallel Cable and print

Antenna polarization: Vertical

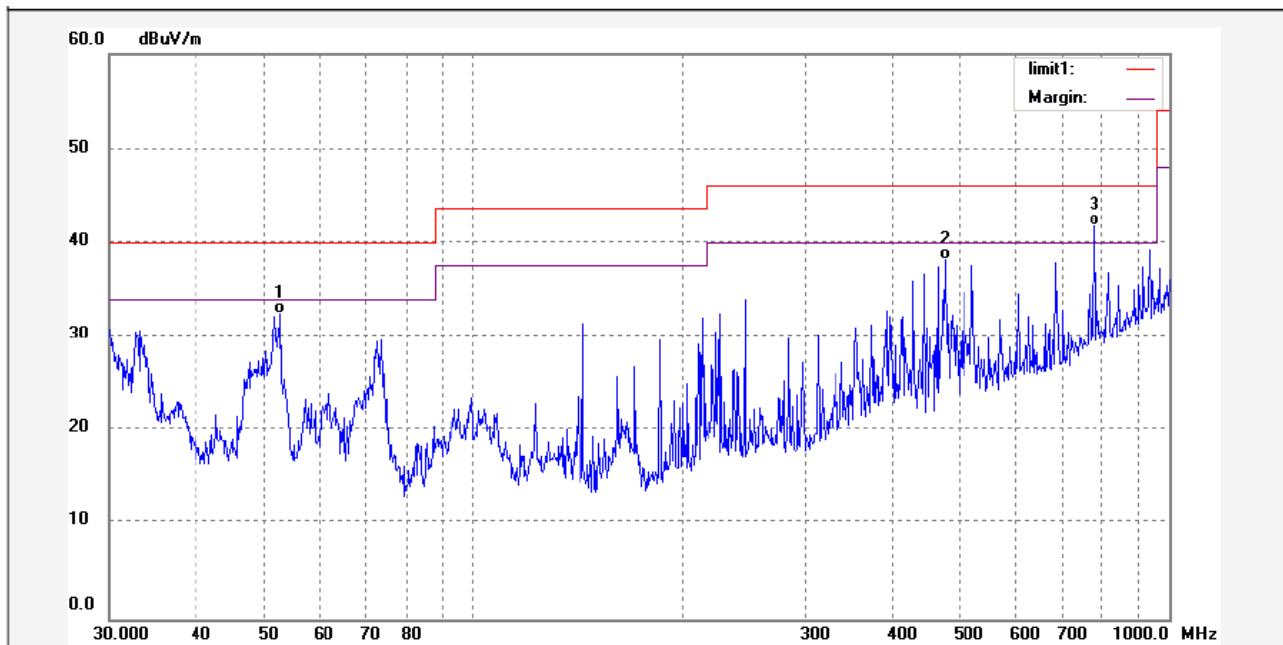

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|--------|
| 1 | 52.8197 | 18.17 | 14.31 | 32.48 | 40.00 | -7.52 | QP | |
| 2 | 476.4624 | 15.87 | 22.36 | 38.23 | 46.00 | -7.77 | QP | |
| 3 | 781.9606 | 12.70 | 29.08 | 41.78 | 46.00 | -4.22 | QP | |

Antenna polarization: Horizontal

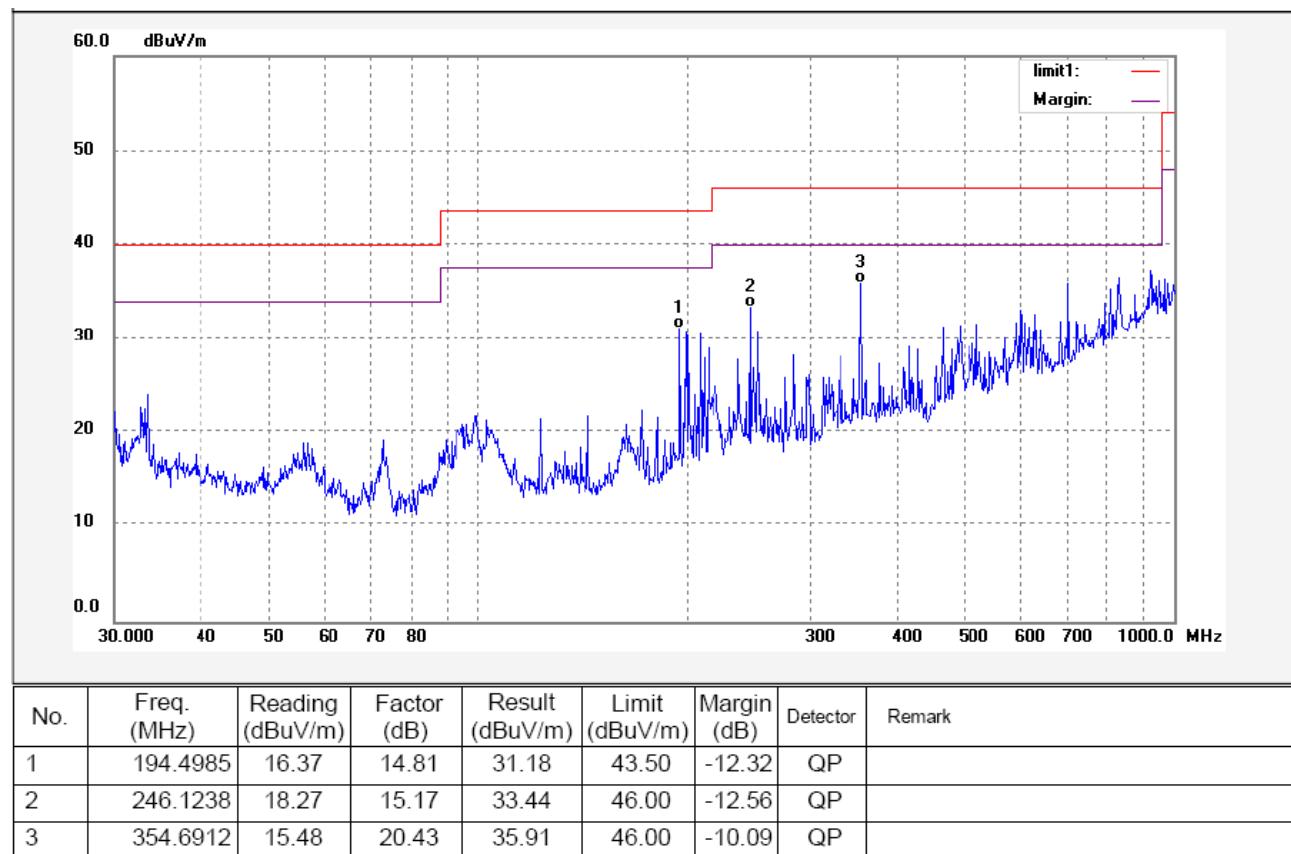

WALTEK SERVICES


Reference No.: WT11062763-D-E-F

6.2.6 Photograph – Radiation Emission Test Setup

Front View



Back View

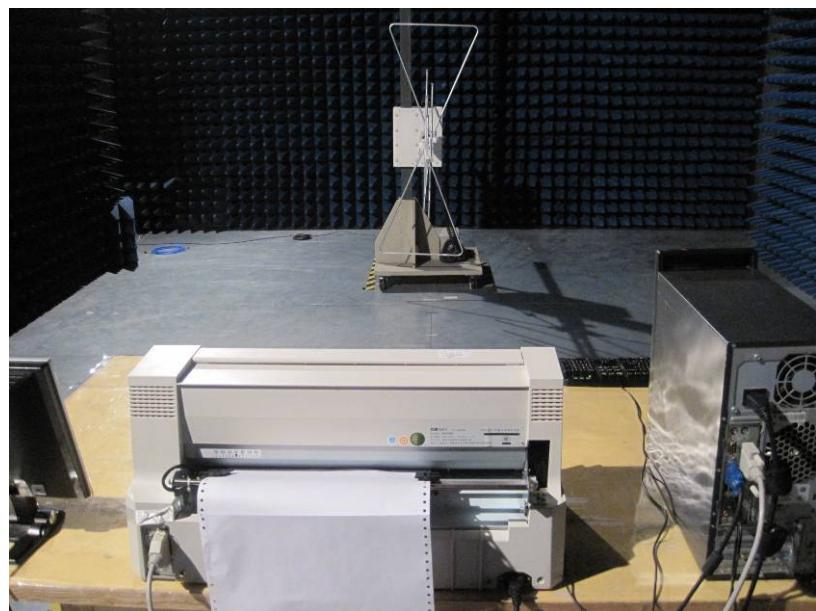

7 Photographs - Constructional Details

7.1 EUT – Front View



7.2 EUT – Back View




7.3 EUT – Open View




7.4 PCB of Mainboard – Front View




7.5 PCB of Mainboard – Back View

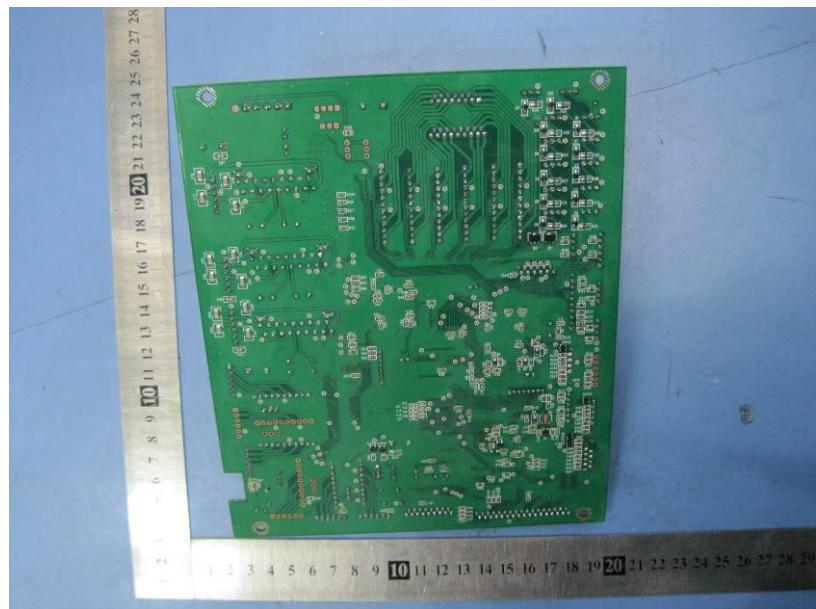

7.6 PCB of Power – Front View

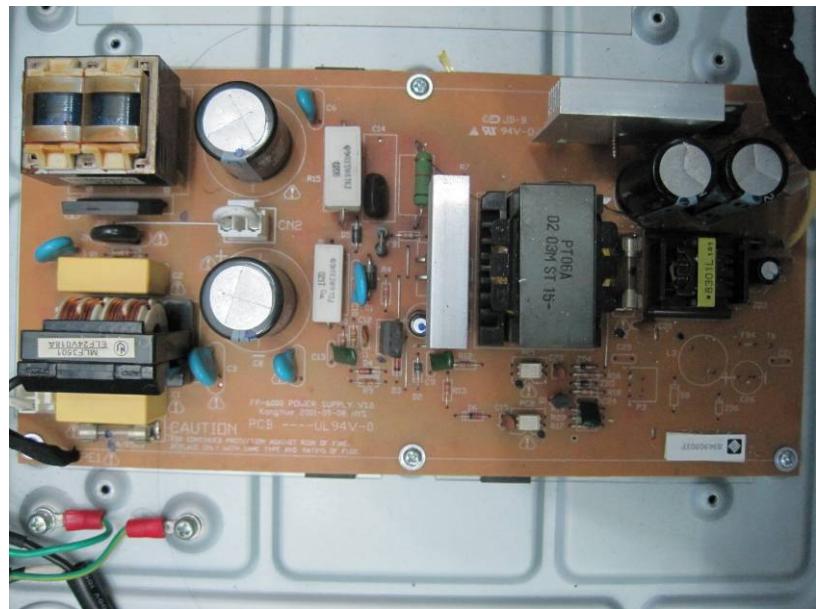

7.7 PCB of Power – Back View

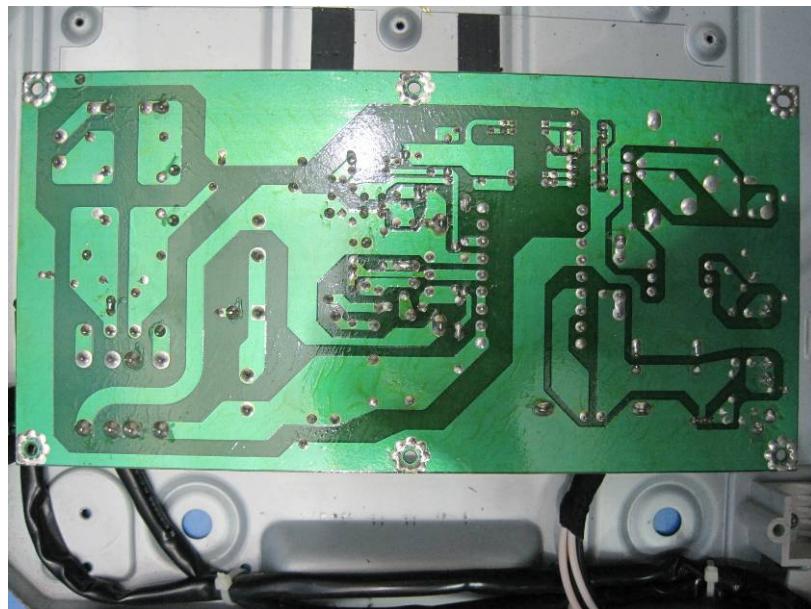

8 FCC Label

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:(1)this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation

The Label must not be a stick-on paper. The Label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

