



Test Report

FCC Part15 Subpart C & RSS-247 Issue 2 (Class II permissive change)

Product Name : EZ-BT Module
Model No. : CYBT-343026-01;CYBT-343029-01;
CYBT-143038-01;CYBT-343151-02
FCC ID : WAP3026
IC : 7922A-3026

Applicant : Cypress Semiconductor
Address : 198 Champion Ct, San Jose, California 95134,United
States

Date of Receipt : Nov. 07, 2018
Test Date : Nov. 07, 2018 ~ Nov. 23, 2018
Issued Date : Nov. 23, 2018
Report No. : 18B2048R-RF-US-P06V01
Report Version : V1.0

Note: This report is based on DEKRA report No.1752099R-RF-US-P06V01, only adds a new model CYBT-343151-02, so we only test spurious emission, band-edge and power.

The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by A2LA, TAF or any agency of the government.

The test report shall not be reproduced without the written approval of DEKRA Testing & Certification (Suzhou) Co., Ltd.


Test Report Certification

Issued Date : Nov. 23, 2018
Report No. : 18B2048R-RF-US-P06V01



Product Name : EZ-BT Module
Applicant : Cypress Semiconductor
Address : 198 Champion Ct, San Jose, California 95134, United States
Manufacturer : Cypress Semiconductor
Address : 198 Champion Ct, San Jose, California 95134, United States
Model No. : CYBT-343026-01; CYBT-343029-01;
CYBT-143038-01; CYBT-343151-02
FCC ID : WAP3026
IC : 7922A-3026
EUT Voltage : DC 2.3-3.6V
Test Voltage : AC120V/60Hz
Applicable Standard : FCC CFR Title 47 Part 15 Subpart C
ANSI C63.10:2013;
KDB 558074 D01v05
RSS-Gen Issue 5 / RSS-247 Issue 2
Test Result : Complied
Performed Location : DEKRA Testing & Certification (Suzhou) Co., Ltd.
No.99 Hongye Rd., Suzhou Industrial Park, Suzhou, 215006,
Jiangsu, China
TEL: +86-512-6251-5088 / FAX: +86-512-6251-5098
FCC Designation Number: CN1199; ISED Lab Code: 4075B

Documented By : 
(Project Assistant: Kathy Feng)

Reviewed By : 
(Senior Engineer: Frank He)

Approved By : 
(Engineer Supervisor: Jack Zhang)

TABLE OF CONTENTS

Description	Page
1. General Information.....	6
1.1. EUT Description.....	6
1.2. Working Frequency of Each Channel:.....	7
1.3. Antenna information.....	8
1.4. Mode of Operation.....	9
1.5. Tested System Details.....	9
1.6. Configuration of Tested System.....	10
1.7. EUT Exercise Software.....	11
2. Technical Test.....	12
2.1. Summary of Test Result.....	12
2.2. Test Frequency configuration:.....	13
2.3. Test Environment.....	14
2.4. Measurement Uncertainty.....	14
3. AC Power Line Conducted Emission.....	15
3.1. Test Equipment.....	15
3.2. Test Setup.....	15
3.3. Limit.....	16
3.4. Test Procedure.....	16
3.5. Test Result.....	17
4. Emissions in restricted frequency bands.....	19
4.1. Test Equipment.....	19
4.2. Test Setup.....	20
4.3. Limit.....	21
4.4. Test Procedure.....	24
4.5. EUT test Axis definition.....	25
4.6. Test Result.....	26
5. Radiated Emission Band Edge.....	34
5.1. Test Equipment.....	34
5.2. Test Setup.....	35
5.3. Limit.....	35
5.4. Test Procedure.....	36
5.5. EUT test definition.....	37
5.6. Duty Cycle.....	38
6.7 Test Result.....	39
6. Fundamental emission output power.....	47
6.1. Test Equipment.....	47
6.2. Test Setup.....	47

6.3. Limit.....	48
6.4. Test Procedure.....	49
6.5. EUT test definition.....	50
6.6. Test Result.....	51

History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
18B2048R-RF-US-P06V01	V1.0	Initial Issued Report	Nov. 23, 2018

1. General Information

1.1. EUT Description

Product Name	EZ-BT Module
Model No.	CYBT-343026-01;CYBT-343029-01; CYBT-143038-01;CYBT-343151-02
EUT Voltage	DC 2.3-3.6V
Test Voltage	AC 120V/60Hz
Bluetooth Specification	V4.0
Frequency Range	2402- 2480 MHz
Channel Number	V4.0: 40
Channel Separation	V4.0: 2MHz
Type of Modulation	V4.0: GFSK
Data Rate	V4.0: 1Mbps(GFSK)
Antenna Type	Reference to Antenna List
Peak Antenna Gain	Reference to Antenna List

Note: Module CYBT-343151-02 shares the same PCB with original module except that working temperature is changed from -40~85 to -40~105°C. Part of device P/N has changed to meet the working temperature requirement. The RF character of this new module and original modules is the same.

1.2. Working Frequency of Each Channel:

Bluetooth Working Frequency of Each Channel: (For V4.0)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
00	2402 MHz	01	2404 MHz	02	2406 MHz	03	2408 MHz
04	2410 MHz	05	2412 MHz	06	2414 MHz	07	2416 MHz
08	2418 MHz	09	2420 MHz	10	2422 MHz	11	2424 MHz
12	2426 MHz	13	2428 MHz	14	2430 MHz	15	2432 MHz
16	2434 MHz	17	2436 MHz	18	2438 MHz	19	2440 MHz
20	2442 MHz	21	2444 MHz	22	2446 MHz	23	2448 MHz
24	2450 MHz	25	2452 MHz	26	2454 MHz	27	2456 MHz
28	2458 MHz	29	2460 MHz	30	2462 MHz	31	2464 MHz
32	2466 MHz	33	2468 MHz	34	2470 MHz	35	2472 MHz
36	2474 MHz	37	2476 MHz	38	2478 MHz	39	2480 MHz

1.3. Antenna information

Model No.	N/A					
Antenna manufacturer	N/A					
Antenna Delivery	☒	1*TX+1*RX	☐	2*TX+2*RX	☐	3*TX+3*RX
Antenna technology	☒	SISO				
	☐	MIMO	☐	Basic		
			☐	CDD		
			☐	Sectorized		
			☐	Beam-forming		
Antenna Type	☐	External	☐	Dipole		
			☐	Sectorized		
	☒	Internal	☐	PIFA		
			☒	PCB		
			☐	Ceramic Chip Antenna		
			☐	Metal plate type F antenna		
Antenna Technology	Ant Gain (dBi)					
☒ SISO	-0.5					

1.4. Mode of Operation

Test Mode
Mode 1: Transmit-1Mbps(GFSK_BLE)


1.5. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:


No.	Product	Manufacturer	Model No.	Serial No.	Power Cord
1	Notebook	Think Pad	2526	LV-A3285	Power by adapter
A	USB cable	N/A	N/A	N/A	Shielded,0.5m
B	USB cable	N/A	N/A	N/A	Shielded,10m

1.6. Configuration of Tested System

Test setup Diagram- AC Line Conducted Emission Test

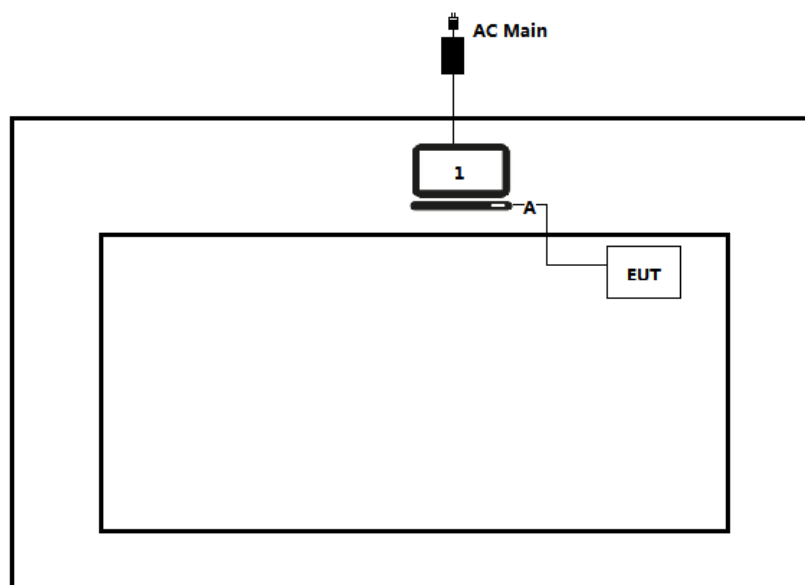

Test setup Diagram- Radiated Emission

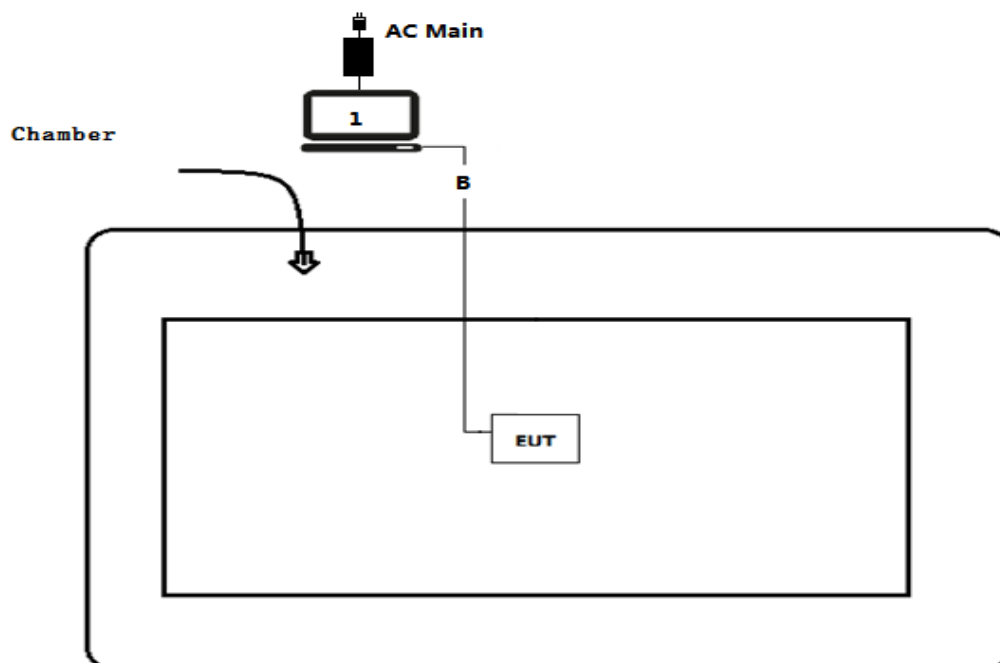

1.7. EUT Exercise Software

1	Setup the EUT and simulators as shown on above.
2	Turn on the power of all equipment.
3	Run [Bluetool] software, and set the test mode and channel, then press OK to start continue receive.

2. Technical Test

2.1. Summary of Test Result

For FCC:

Performed Test Item	Normative References	Limit	Result
AC Power Line Conducted Emission	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.207	FCC 15.207	PASS
Emissions in restricted frequency bands	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.209	FCC 15.209	PASS
Radiated Emission Band Edge	FCC CFR Title 47 Part 15 Subpart C: 2015 15.247(d)	FCC 15.209	PASS
Fundamental emission output power	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.247(b)(3)	$\leq 30\text{dBm}$	PASS

For ISED:

Performed Test Item	Normative References	Limit	Result
AC Power Line Conducted Emission	RSS-Gen Issue 5 Section 8.8	RSS-Gen	PASS
Emissions in restricted frequency bands	RSS-Gen Issue 5 Section 8.10	RSS-Gen	PASS
Radiated Emission Band Edge	RSS-247 Issue 2 Section A5.5	RSS-247	PASS
Fundamental emission output power	RSS-247 Issue 2 Section A5.4(4)	$\leq 30\text{dBm}$	PASS

2.2. Test Frequency configuration:

Modulation Mode	Channel	Frequency	Channel	Frequency	Channel	Frequency
BLE	00	2402 MHz	19	2440 MHz	39	2480MHz

2.3. Test Environment

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	21
Humidity (%RH)	25-75	50
Barometric pressure (mbar)	860-1060	950-1000

2.4. Measurement Uncertainty

Test Items	Uncertainty
AC Power Line Conducted Emission	$\pm 2.02\text{dB}$
Radiated Emission	Below 1GHz $\pm 3.8\text{ dB}$
	Above 1GHz $\pm 3.9\text{ dB}$
RF Antenna Port Conducted Emission	$\pm 1.27\text{dB}$
Radiated Emission Band Edge	$\pm 3.9\text{dB}$
Occupied Bandwidth	$\pm 1\text{kHz}$
Power Spectral Density	$\pm 1.27\text{dB}$


3. AC Power Line Conducted Emission

3.1. Test Equipment

AC Power Line Conducted Emission / TR-1					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
EMI Test Receiver	R&S	ESCI	100906	2017.03.05	2019.03.04
Two-Line V-Network	R&S	ENV 216	101189	2017.07.16	2019.07.15
Two-Line V-Network	R&S	ENV 216	101044	2017.09.16	2019.09.15
50ohm Coaxial Switch	Anritsu	MP59B	6200464462	N/A	N/A
50ohm Termination	SHX	TF2	07081402	2017.09.16	2019.09.15
Temperature/Humidity Meter	Zhichen	ZC1-2	TR1-TH	2017.01.04	2019.01.03

Note: All equipment are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

3.2. Test Setup

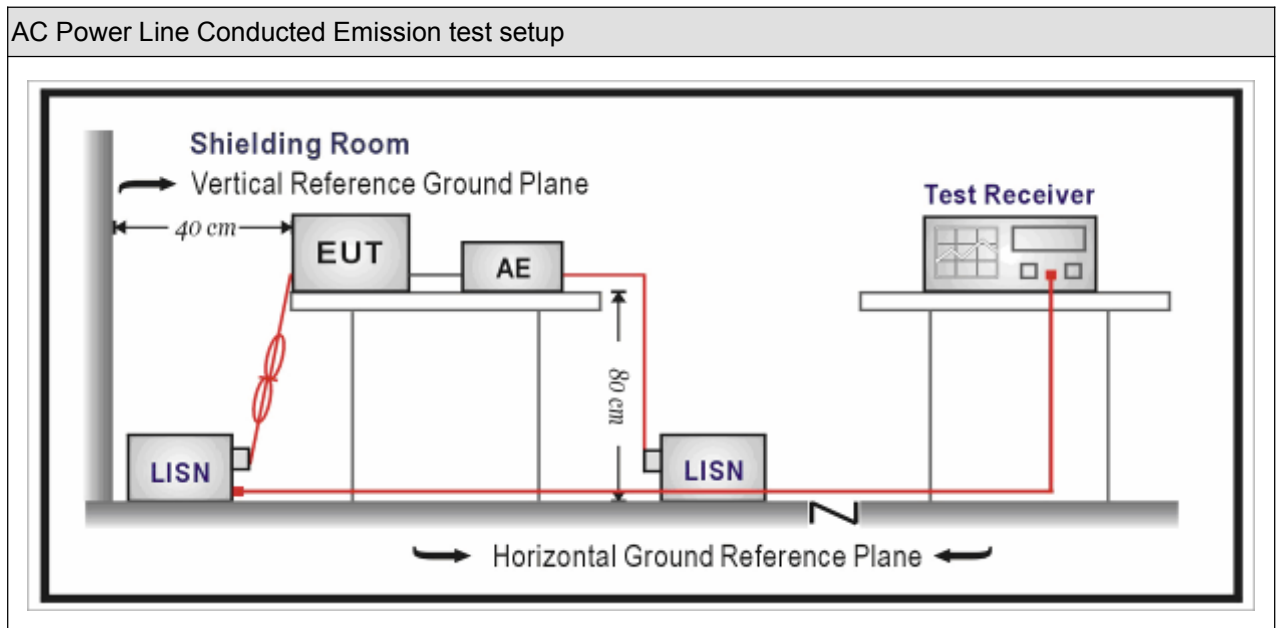

3.3. Limit


Frequency of Emission (MHz)	Conducted Limit	
	Quasi-peak (dB μ V)	Average (dB μ V)
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50
Note 1: The lower limit shall apply at the transition frequencies.		
Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.		

3.4. Test Procedure

Test Method			
	References Rule	Chapter	Item
☒	ANSI C63.10-2013	6.2	Standard test method for ac power-line conducted emissions from unlicensed wireless devices
☒	ANSI C63.4-2014	7	AC power-line conducted emission measurements

3.5. Test Result

Site: TR1	Time: 2018/11/23 - 02:40
Limit: FCC_Part15.207_CE	Margin: 0
Probe: ENV216_101044(0.009-30MHz)	Polarity: Line
EUT: EZ-BT Module	Power: AC 120V/60Hz
Note: Mode 1	

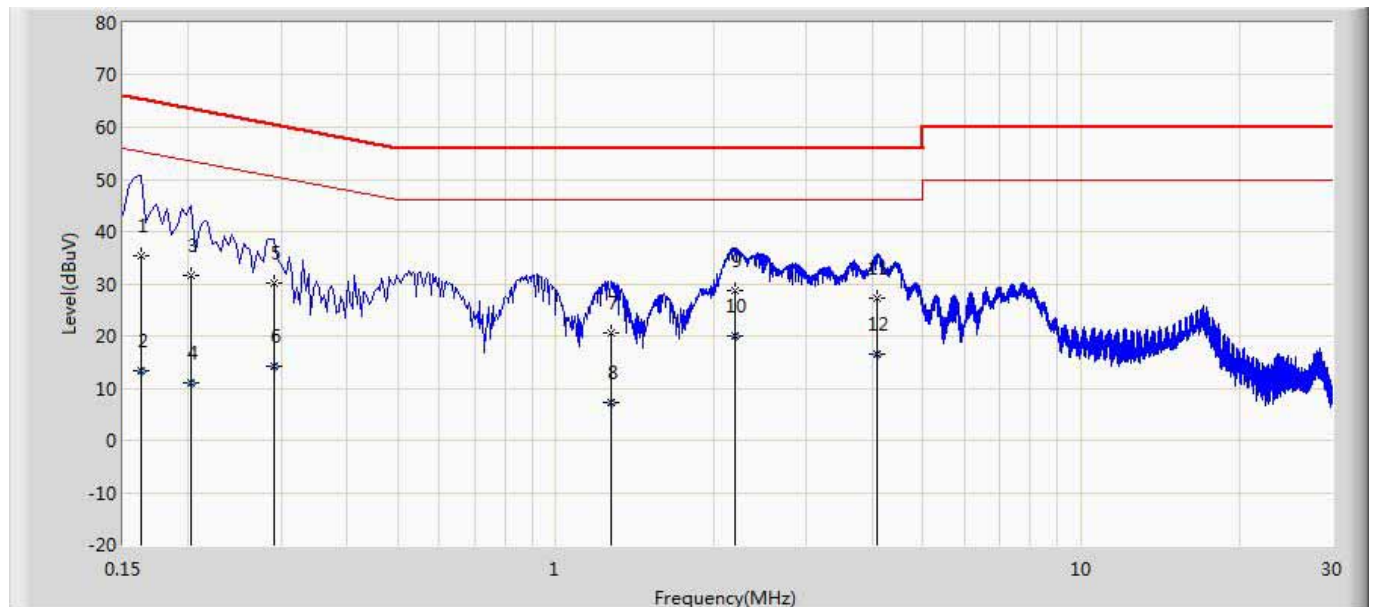


No	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1		0.162	35.504	25.884	-29.857	65.361	9.620	QP
2		0.162	13.428	3.808	-41.932	55.361	9.620	AV
3		0.202	31.658	22.036	-31.870	63.528	9.622	QP
4		0.202	10.948	1.326	-42.580	53.528	9.622	AV
5		0.290	30.073	20.452	-30.451	60.524	9.622	QP
6		0.290	14.294	4.672	-36.231	50.524	9.622	AV
7		1.270	20.612	10.945	-35.388	56.000	9.667	QP
8		1.270	7.105	-2.562	-38.895	46.000	9.667	AV
9		2.194	28.692	18.987	-27.308	56.000	9.706	QP
10	*	2.194	20.139	10.433	-25.861	46.000	9.706	AV
11		4.090	27.171	17.420	-28.829	56.000	9.751	QP
12		4.090	16.421	6.670	-29.579	46.000	9.751	AV

Note:

1. " * ", means this data is the worst emission level.
2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

Site: TR1	Time: 2018/11/23 - 02:51
Limit: FCC_Part15.207_CE	Margin: 0
Probe: ENV216_101044(0.009-30MHz)	Polarity: Neutral
EUT: EZ-BT Module	Power: AC 120V/60Hz
Note: Mode 1	

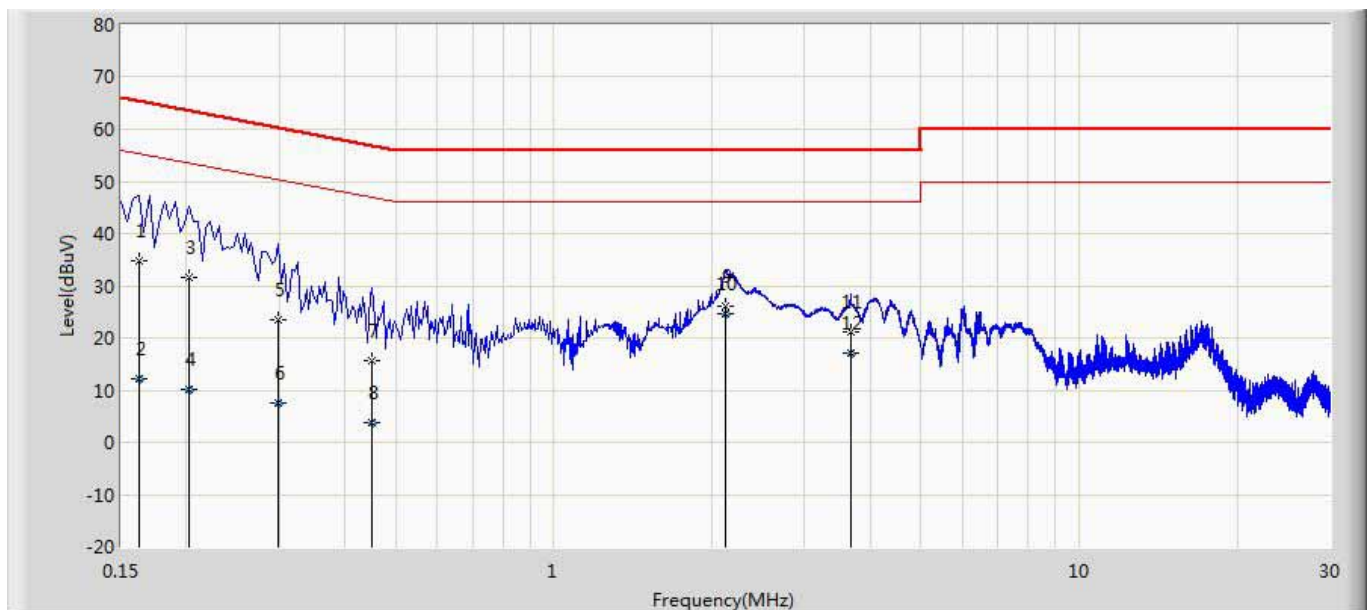

No	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1		0.162	34.916	25.316	-30.445	65.361	9.600	QP
2		0.162	12.033	2.433	-43.328	55.361	9.600	AV
3		0.202	31.603	22.001	-31.925	63.528	9.603	QP
4		0.202	10.106	0.503	-43.422	53.528	9.603	AV
5		0.298	23.588	13.984	-36.710	60.298	9.605	QP
6		0.298	7.502	-2.103	-42.796	50.298	9.605	AV
7		0.450	15.692	6.069	-41.184	56.875	9.623	QP
8		0.450	3.656	-5.967	-43.219	46.875	9.623	AV
9		2.126	26.009	16.330	-29.991	56.000	9.680	QP
10	*	2.126	24.780	15.100	-21.220	46.000	9.680	AV
11		3.678	21.173	11.447	-34.827	56.000	9.726	QP
12		3.678	17.179	7.452	-28.821	46.000	9.726	AV

Note:

1. " * ", means this data is the worst emission level.
2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

4. Emissions in restricted frequency bands


4.1. Test Equipment

Radiated Emission(Below 1GHz) / AC-2					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
EMI Test Receiver	R&S	ESCI	100573	2018.03.29	2019.03.28
Loop Antenna	R&S	HFH2-Z2	833799/003	2018.11.16	2019.11.15
Bilog Antenna	Teseq GmbH	CBL6112D	27611	2018.10.16	2019.10.15
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC2-C	2018.03.02	2019.03.01
Temperature/Humidity Meter	Zhichen	ZC1-2	AC2-TH	2018.01.03	2019.01.02
Note: All equipment are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.					


Radiated Emission(Above 1GHz) / AC-5					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	E4446A	MY45300103	2018.01.04	2019.01.03
Preamplifier	Miteq	NSP1800-25	1364185	2018.05.06	2019.05.05
Preamplifier	QuieTek	AP-040G	CHM-0906001	2018.05.06	2019.05.05
DRG Horn	ETS-Lindgren	3117	00123988	2018.01.22	2019.01.21
Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	294	2017.11.25	2018.11.24
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C1	2018.03.02	2019.03.01
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C2	2018.03.02	2019.03.01
Coaxial Cable	Huber+Suhner	SUCOFLEX 102	AC5-C3	2018.03.02	2019.03.01
EMI Receiver	Agilent	N9038A	MY51210196	2018.06.10	2019.06.09
Temperature/Humidity Meter	Zhichen	ZC1-2	AC5-TH	2018.01.04	2019.01.03
Note: All equipment are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.					

4.2. Test Setup


Below 30MHz Test Setup:

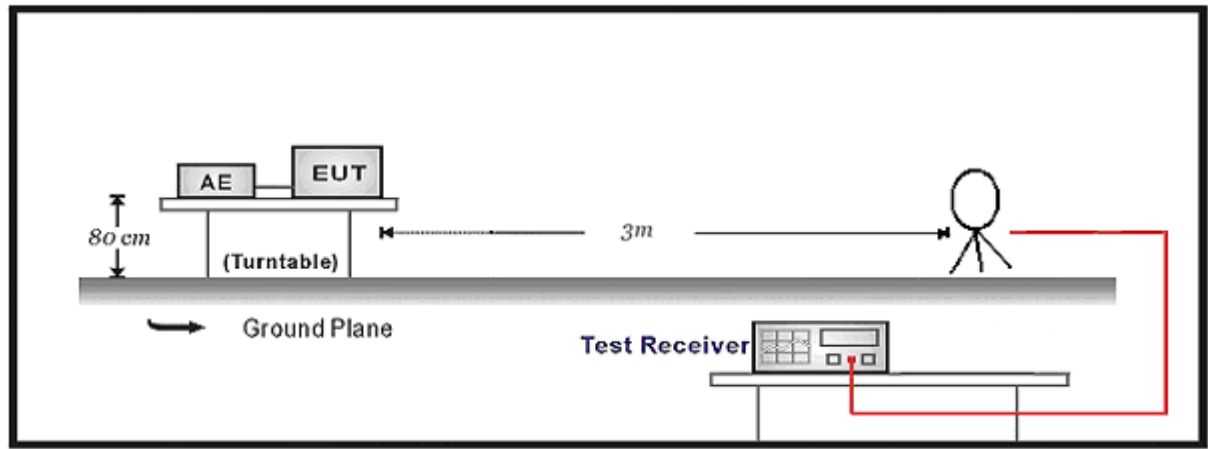

30MHz-1GHz Test Setup:

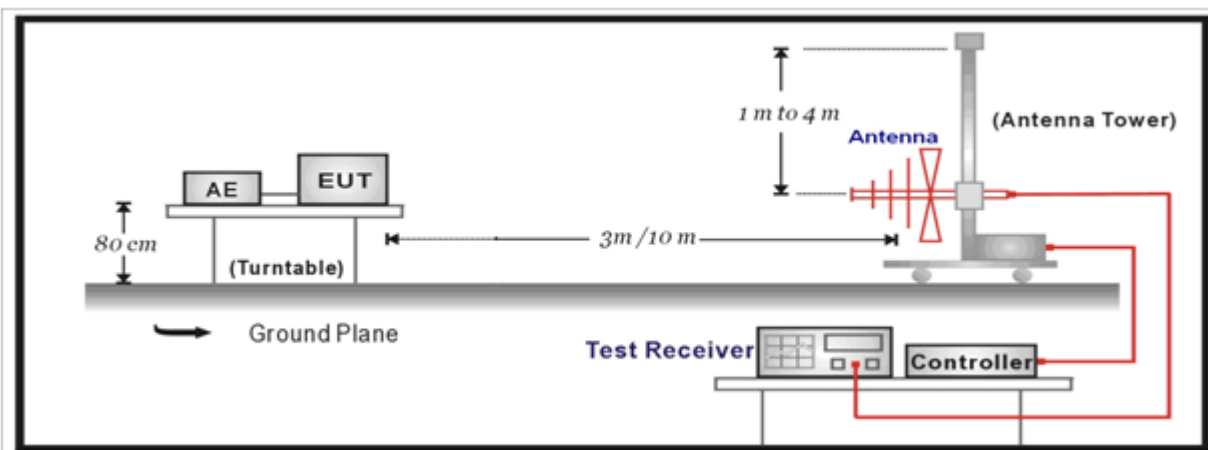

Above 1GHz Test Setup:

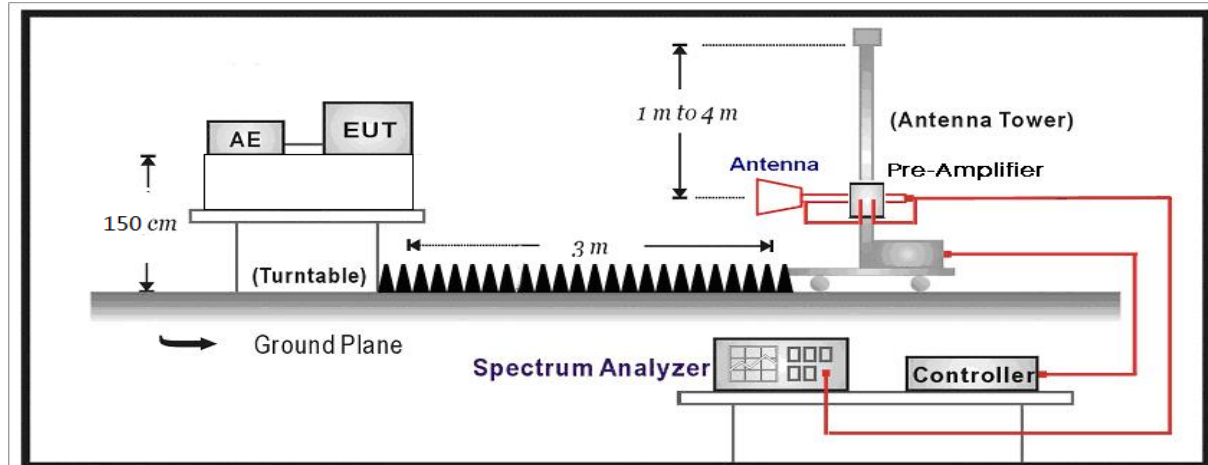

4.3. Limit

For FCC:

Restricted Bands of operation			
Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 – 0.110	16.42 – 16.423	399.9 – 410	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	608 – 614	5.35 – 5.46
2.1735 – 2.1905	16.80425 – 16.80475	960 – 1240	7.25 – 7.75
4.125 – 4.128	25.5 – 25.67	1300 – 1427	8.025 – 8.5
4.17725 – 4.17775	37.5 – 38.25	1435 – 1626.5	9.0 – 9.2
4.20725 – 4.20775	73 – 74.6	1645.5 – 1646.5	9.3 – 9.5
6.215 – 6.218	74.8 – 75.2	1660 – 1710	10.6 – 12.7
6.26775 – 6.26825	108 – 121.94	1718.8 – 1722.2	13.25 – 13.4
6.31175 – 6.31225	123 – 138	2200 – 2300	14.47 – 14.5
8.291 – 8.294	149.9 – 150.05	2310 – 2390	15.35 – 16.2
8.362 – 8.366	156.52475 – 156.52525	2483.5 – 2500	17.7 – 21.4
8.37625 – 8.38675	156.7 – 156.9	2690 – 2900	22.01 – 23.12
8.81425 – 8.81475	162.0125 – 167.17	3260 – 3267	23.6 – 24.0
12.29 – 12.293	167.72 – 173.2	3332 – 3339	31.2 – 31.8
12.51975 – 12.52025	240 – 285	3345.8 – 3358	36.43 – 36.5
12.57675 – 12.57725	322 – 335.4	3600 – 4400	
13.36 – 13.41			

For ISED:

Restricted Bands of operation

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
	13.36 - 13.41	960 - 1427	9.0 - 9.2
0.495 - 0.505	16.42 - 16.423	1435 - 1626.5	9.3 - 9.5
2.1735 - 2.1905	16.69475 - 16.69525	1645.5 - 1646.5	10.6 - 12.7
3.020 - 3.026	16.80425 - 16.80475	1660 - 1710	13.25 - 13.4
4.125 - 4.128	25.5 - 25.67	1718.8 - 1722.2	14.47 - 14.5
4.17725 - 4.17775	37.5 - 38.25	2200 - 2300	15.35 - 16.2
4.20725 - 4.20775	73 - 74.6	2310 - 2390	17.7 - 21.4
5.677 - 5.683	74.8 - 75.2	2483.5 - 2500	22.01 - 23.12
6.215 - 6.218	108 - 138	2655 - 2900	23.6 - 24.0
6.26775 - 6.26825	149.9 - 150.05	3260 - 3267	31.2 - 31.8
6.31175 - 6.31225	156.52475 - 156.52525	3332 - 3339	36.43 - 36.5
8.291 - 8.294	156.7 - 156.9	3345.8 - 3358	Above 38.6
8.362 - 8.366	162.0125 - 167.17	3500 - 4400	
8.37625 - 8.38675	167.72 - 173.2	4500 - 5150	
8.41425 - 8.41475	240 - 285	5350 - 5460	
12.29 - 12.293	322 - 335.4	7250 - 7750	
12.51975 - 12.52025	399.9 - 410	8025 - 8500	
12.57675 - 12.57725	608 - 614	--	

Restricted Band Emissions Limit			
Frequency (MHz)	Field strength (μ V/m)	Field strength (dB μ V/m)	Measurement distance (m)
0.009 - 0.49	2400/F(kHz)	48.5 – 13.8	300 _(Note 1)
0.49 - 1.705	24000/F(kHz)	33.8 - 23	30 _(Note 1)
1.705 - 30	30	29.5	30 _(Note 1)
30 - 88	100	40	3 _(Note 2)
88 - 216	150	43.5	3 _(Note 2)
216 - 960	200	46	3 _(Note 2)
Above 960	500	54	3 _(Note 2)




Note 1: At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade).

Note 2: At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

4.4. Test Procedure


Test Method				
	References Rule		Chapter	Description
☐	ANSI C63.10		11.11	Emissions in non-restricted frequency bands
	☐	ANSI C63.10	11.11.2	Reference level measurement
	☐	ANSI C63.10	11.11.3	Emission level measurement
☒	ANSI C63.10		11.12	Emissions in restricted frequency bands
	☒	ANSI C63.10	11.12.1	Radiated emission measurements
	☒	ANSI C63.10	11.12.2.7	Radiated spurious emission test
	☒	ANSI C63.10	6.4	Radiated emissions from unlicensed wireless devices below 30 MHz
		ANSI C63.10	6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz
		ANSI C63.10	6.6	Radiated emissions from unlicensed wireless devices above 1 GHz
	☐	ANSI C63.10	11.12.2.3	Quasi-peak measurement procedure
		ANSI C63.10	11.12.2.4	Peak power measurement procedure
		ANSI C63.10	11.12.2.5	Average power measurement procedures
	☐	ANSI C63.10	11.12.2.5.1	Trace averaging with continuous EUT transmission at full power
		ANSI C63.10	11.12.2.5.2	Trace averaging across ON and OFF times of the EUT transmissions followed by duty cycle correction
		☒ ANSI C63.10	11.12.2.5.3	Reduced VBW averaging across ON and OFF times of the EUT transmissions with max hold

4.5. EUT test Axis definition

Item	Emissions in restricted frequency bands			
Device Category	☐	Fixed point-to-point		
	☐	Emit multiple directional beams, simultaneously or sequentially		
	☒	Other cases		
Test mode	Mode 1			
Test method	☒	Radiated		
		X Axis	Y Axis	Z Axis
				
		Worst Axis ☒	Worst Axis ☐	Worst Axis ☐
	☐	Conducted		
	☐	Chain 0		
				
	☐	Chain 0	Chain 1	
				
	☐	Chain 0	Chain 1	Chain 2
				


4.6. Test Result

Site: AC5	Time: 2018/11/16 - 14:42
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ-BT Module	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2402MHz by BLE	

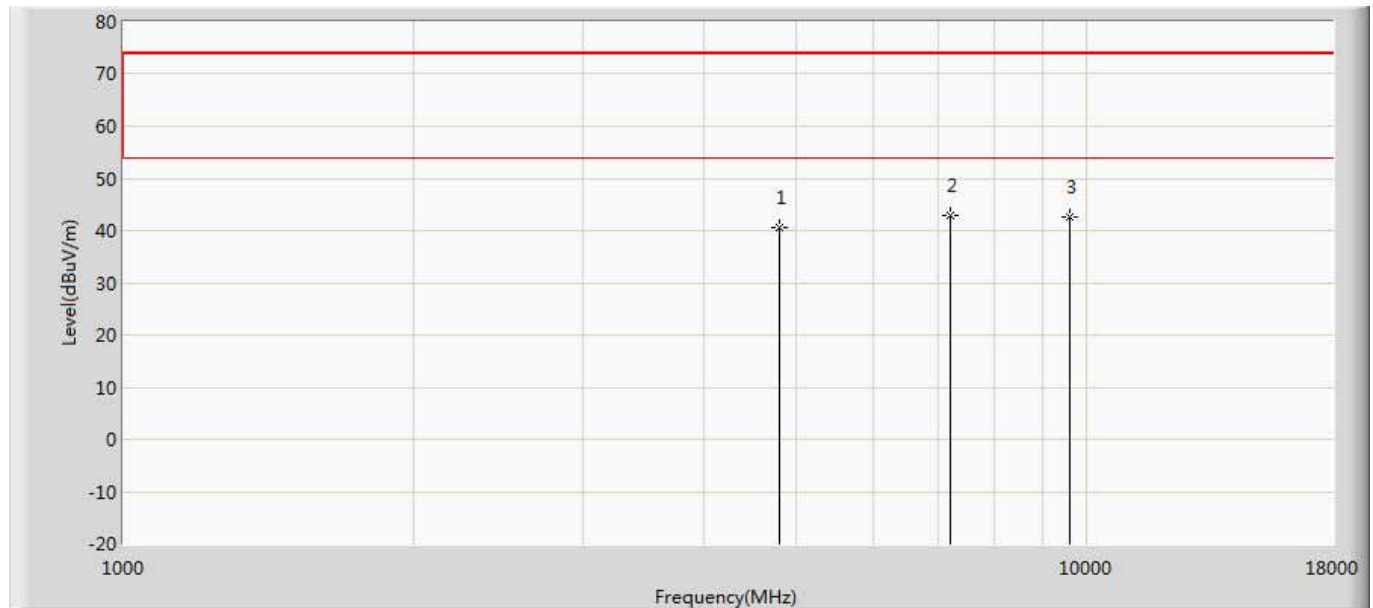


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4804.000	40.653	42.376	-33.347	74.000	-1.723	PK
2	*	7206.000	42.785	40.866	-31.215	74.000	1.919	PK
3		9608.000	42.516	37.617	-31.484	74.000	4.899	PK

Site: AC5	Time: 2018/11/16 - 14:42
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ-BT Module	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2402MHz by BLE	

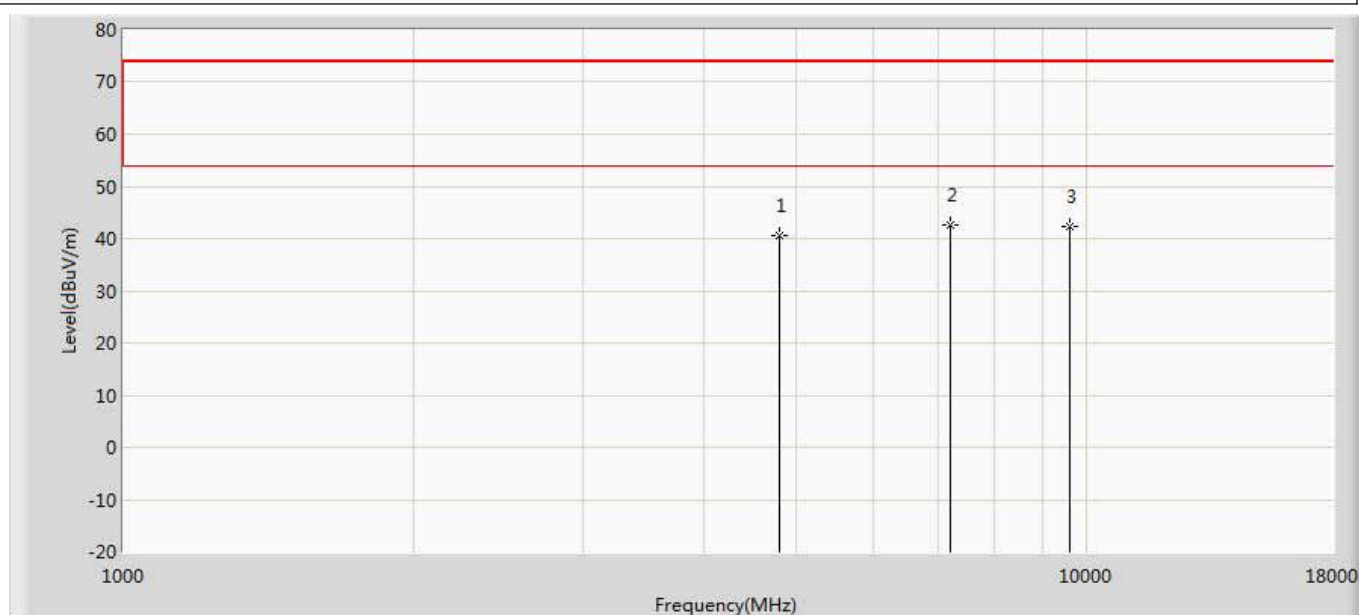


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4804.000	40.554	42.277	-33.446	74.000	-1.723	PK
2	*	7206.000	42.590	40.671	-31.410	74.000	1.919	PK
3		9608.000	42.427	37.528	-31.573	74.000	4.899	PK

Site: AC5	Time: 2018/11/16 - 14:42
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ-BT Module	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2440MHz by BLE	

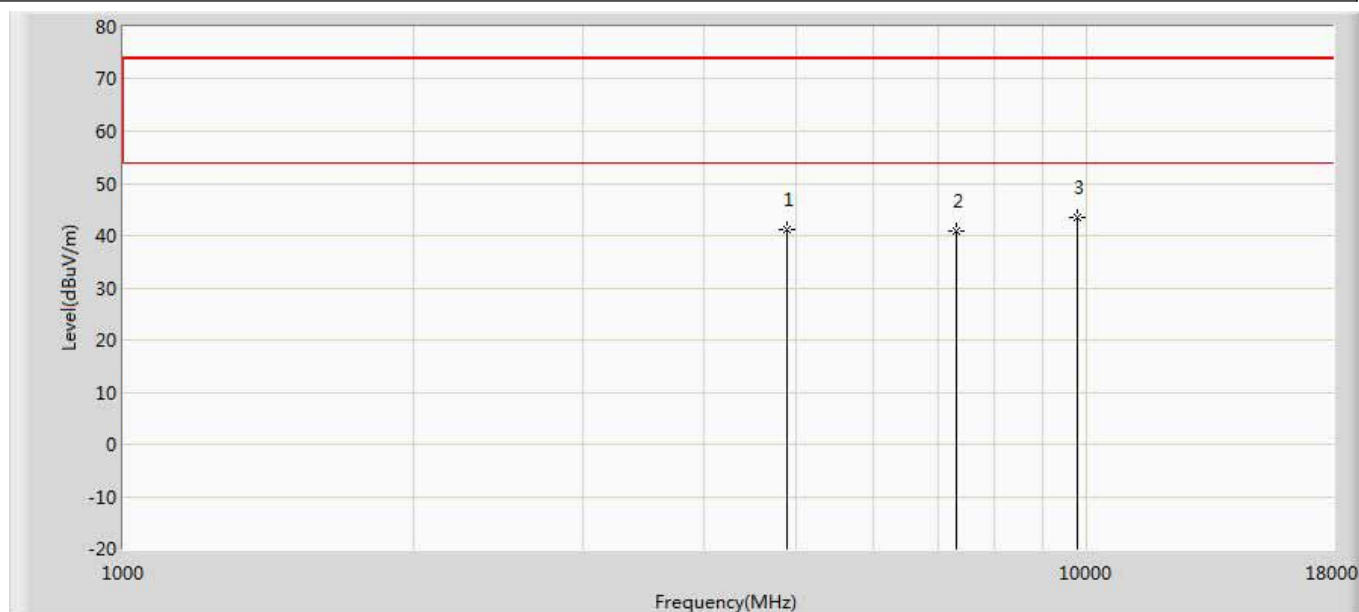


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4880.000	41.120	42.404	-32.880	74.000	-1.284	PK
2		7320.000	40.962	39.079	-33.038	74.000	1.884	PK
3	*	9760.000	43.437	37.625	-30.563	74.000	5.812	PK

Site: AC5	Time: 2018/11/16 - 14:42
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ-BT Module	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2440MHz by BLE	

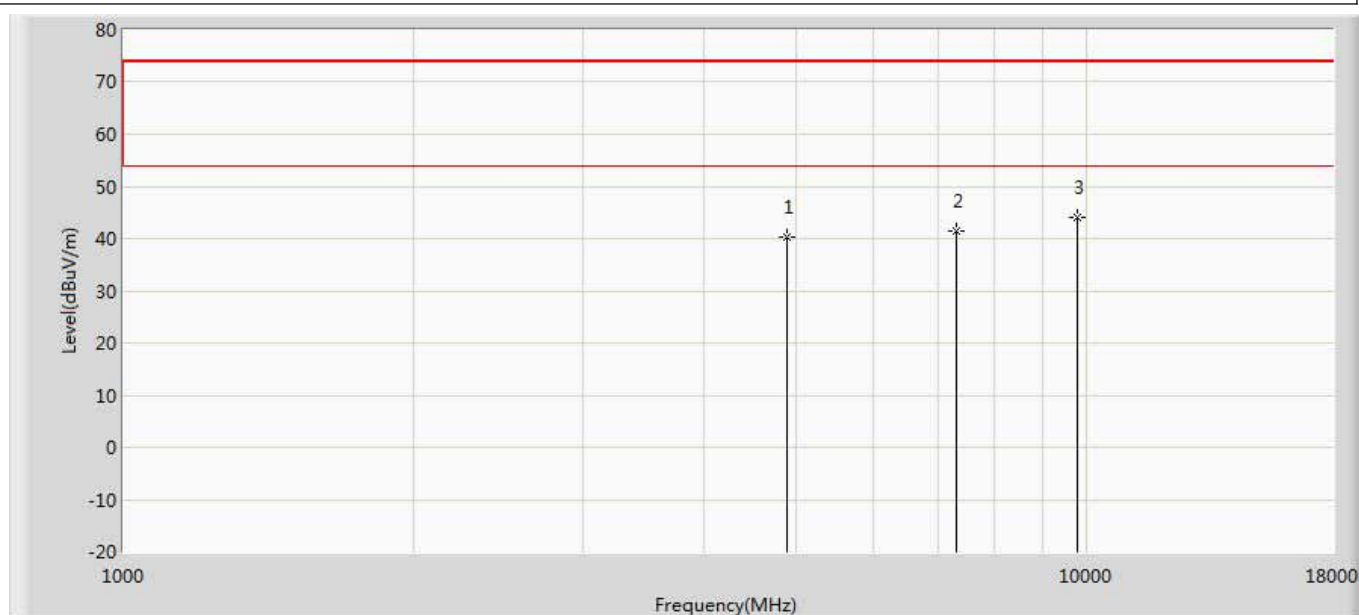


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4880.000	40.168	41.452	-33.832	74.000	-1.284	PK
2		7320.000	41.569	39.686	-32.431	74.000	1.884	PK
3	*	9760.000	43.934	38.122	-30.066	74.000	5.812	PK

Site: AC5	Time: 2018/11/16 - 14:42
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ-BT Module	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2480MHz by BLE	

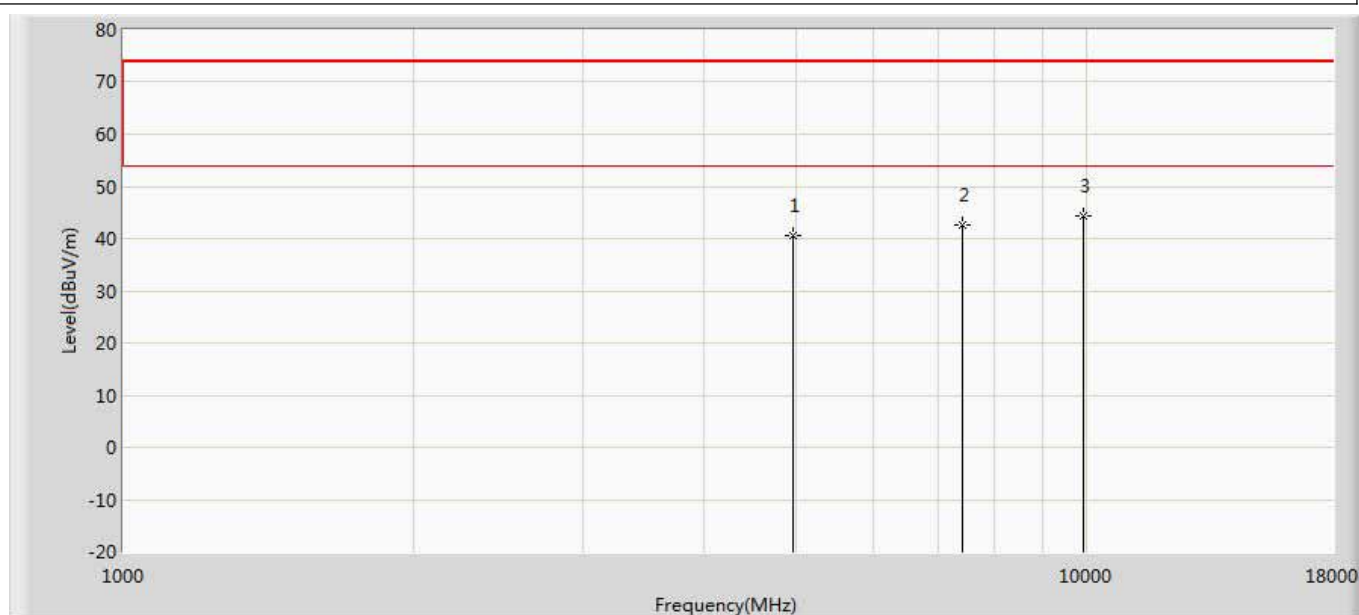

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4960.000	40.695	41.843	-33.305	74.000	-1.148	PK
2		7440.000	42.558	40.132	-31.442	74.000	2.426	PK
3	*	9920.000	44.254	39.000	-29.746	74.000	5.253	PK


Site: AC5	Time: 2018/11/16 - 14:42
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ-BT Module	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2480MHz by BLE	

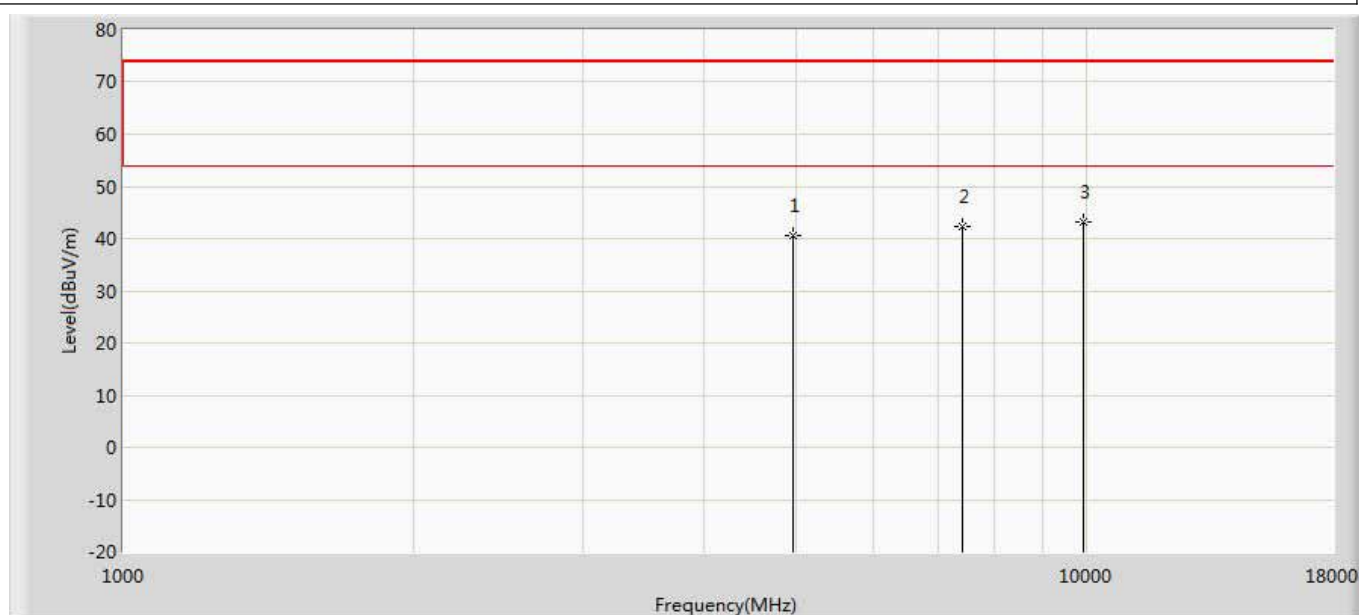

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4960.000	40.633	41.781	-33.367	74.000	-1.148	PK
2		7440.000	42.209	39.783	-31.791	74.000	2.426	PK
3	*	9920.000	43.227	37.973	-30.773	74.000	5.253	PK

The worst case of Radiated Emission below 1GHz:

Site: AC3	Time: 2018/11/22 - 23:47
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: AC3_3m (30-1000MHz)	Polarity: Horizontal
EUT: EZ-BT Module	Power: AC 120V/60Hz
Note: Mode 1	

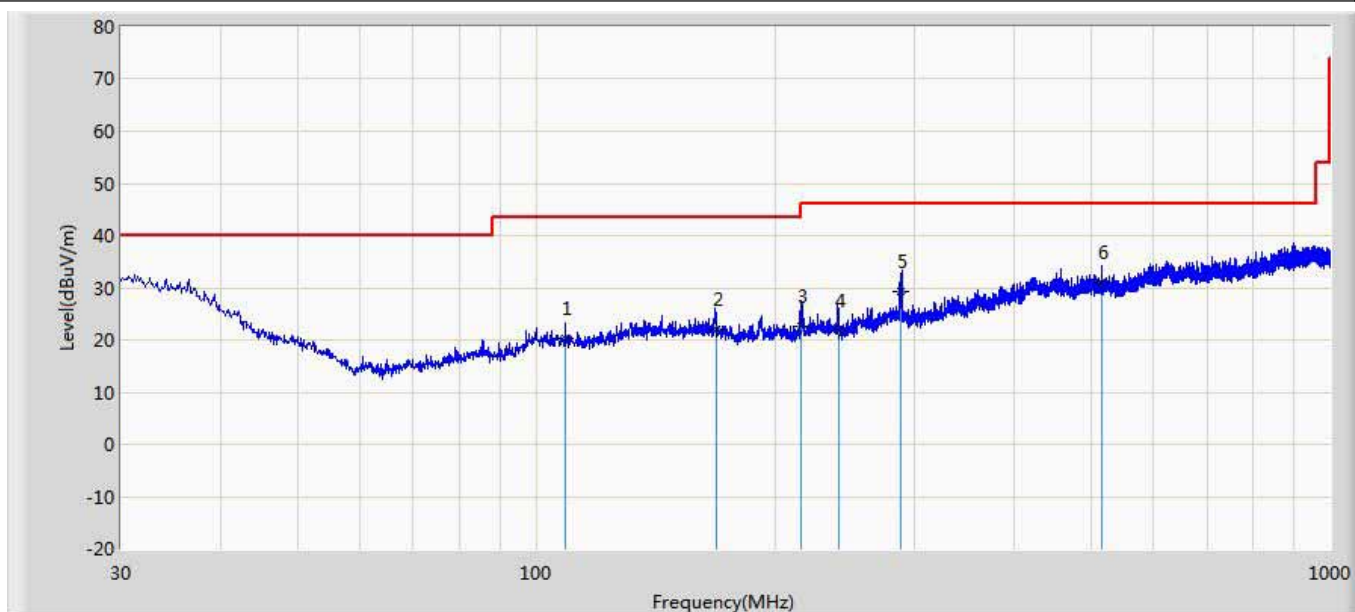


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		108.747	20.286	4.254	-23.214	43.500	16.032	QP
2		168.589	21.922	4.587	-21.578	43.500	17.335	QP
3		215.887	22.606	5.254	-20.894	43.500	17.352	QP
4		240.725	21.702	4.251	-24.298	46.000	17.451	QP
5		288.500	29.356	8.583	-16.644	46.000	20.772	QP
6	*	515.524	31.041	4.218	-14.959	46.000	26.822	QP

Note:

1. " * ", means this data is the worst emission level.
2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

Site: AC3	Time: 2018/11/22 - 23:48
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: AC3_3m (30-1000MHz)	Polarity: Vertical
EUT: EZ-BT Module	Power: AC 120V/60Hz
Note: Mode 1	

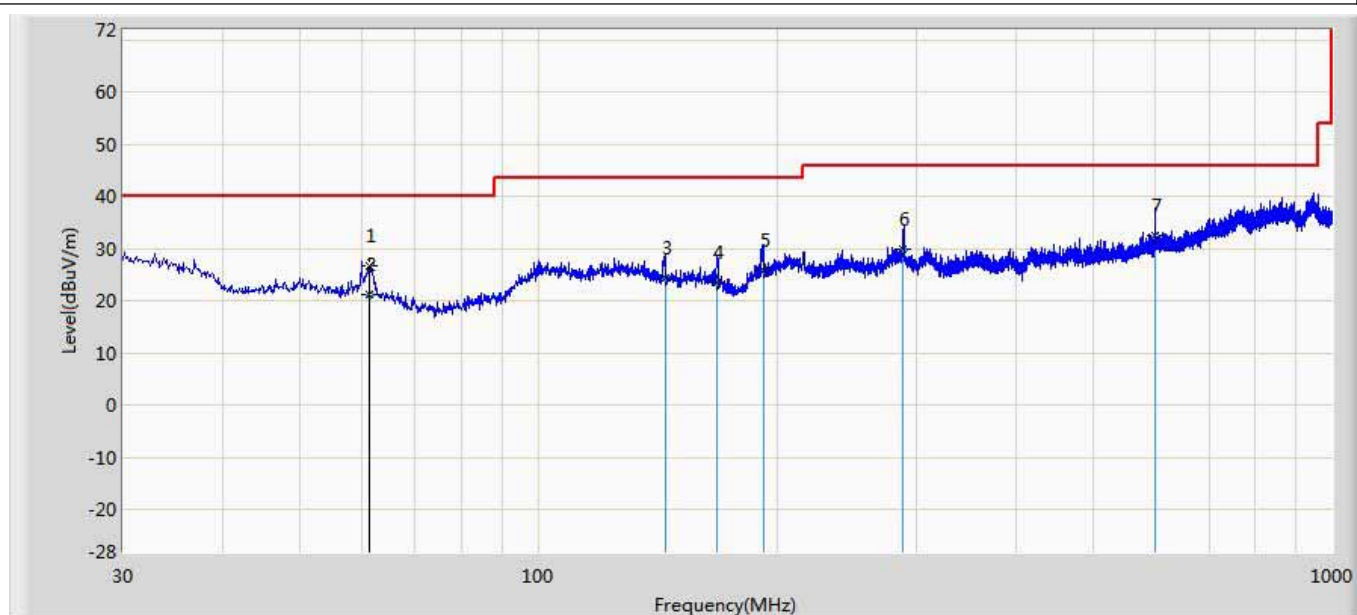

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
2		61.248	21.193	5.267	-18.807	40.000	15.926	QP
3		144.587	24.524	5.451	-18.976	43.500	19.074	QP
4		167.847	23.634	5.258	-19.866	43.500	18.376	QP
5		192.535	25.934	4.548	-17.566	43.500	21.385	QP
6		288.548	29.885	5.259	-16.115	46.000	24.625	QP
7		599.547	32.503	5.247	-13.497	46.000	27.255	QP

Note:

1. " * ", means this data is the worst emission level.
2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).


5. Radiated Emission Band Edge

5.1. Test Equipment

Radiated Emission Band Edge(Above 1GHz) / AC-5					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
EMI Receiver	Agilent	N9038A	MY51210196	2018.07.16	2019.07.15
Pre-Amplifier	Miteq	NSP1800-25	1364185	2018.05.03	2019.05.02
DRG Horn Antenna	ETS-Lindgren	3117	00167055	2018.07.12	2019.07.11
Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	294	2018.09.18	2019.09.17
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C1	2018.02.28	2019.02.27
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C2	2018.02.28	2019.02.27
Temperature/Humidity Meter	Zhichen	ZC1-2	AC5-TH	2018.01.05	2019.01.04

5.2. Test Setup

Above 1GHz Test Setup:

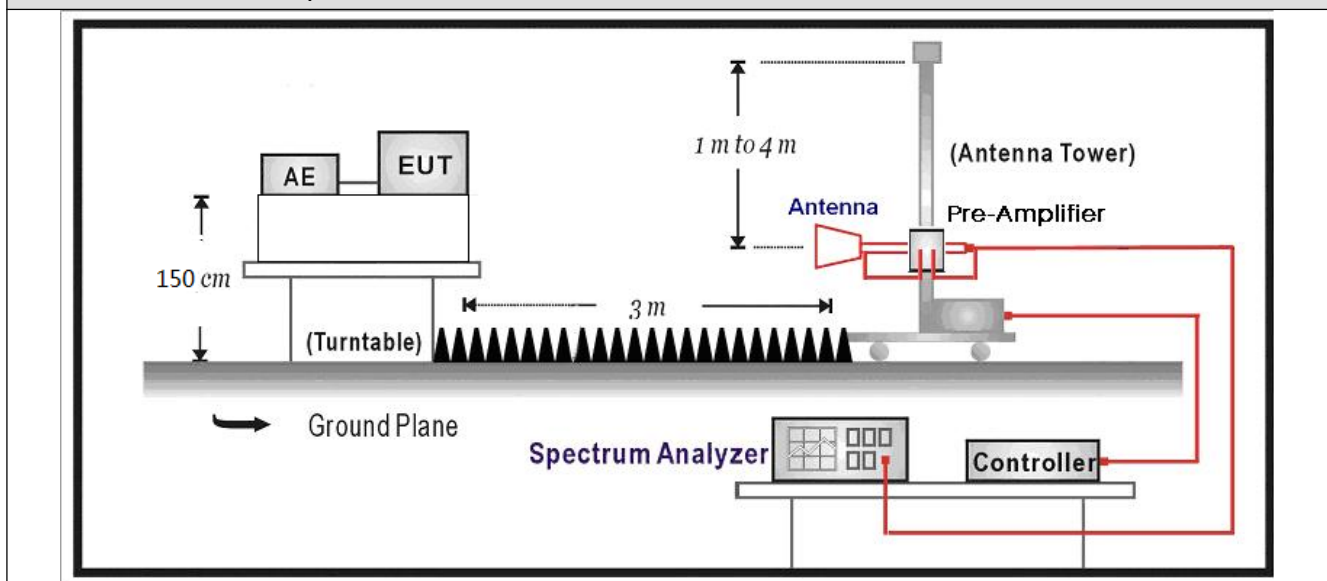

5.3. Limit

Band edge Limit




Frequency bands (MHz)	Detector	Limit (dB μ V/m)	RBW (MHz)	Distance (m)
2310-2390	PK	74	1	3
2483.5-2500	AV	54	1	3

Note: The field strength of emissions appearing within these frequency bands shall not exceed the limits.

5.4. Test Procedure

Test Method						
	References Rule			Chapter	Description	
☒	ANSI C63.10			6.10	Band-edge testing	
	☒	ANSI C63.10		6.10.5	Restricted-band band-edge measurements	
	☐	ANSI C63.10		6.10.6	Marker-delta method	
☒	ANSI C63.10			11.12	Emissions in restricted frequency bands	
	☒	ANSI C63.10		11.12.1	Radiated emission measurements	
	☒	ANSI C63.10		11.12.2.7	Radiated spurious emission test	
☐	ANSI C63.10			6.4	Radiated emissions from unlicensed wireless devices below 30 MHz	
☐	ANSI C63.10			6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz	
☒	ANSI C63.10			6.6	Radiated emissions from unlicensed wireless devices above 1 GHz	
		☐	ANSI C63.10	11.12.2.3	Quasi-peak measurement procedure	
		☒	ANSI C63.10	11.12.2.4	Peak power measurement procedure	
		☒	ANSI C63.10	11.12.2.5	Average power measurement procedures	
			☐	ANSI C63.10	11.12.2.5.1	Trace averaging with continuous EUT transmission at full power
			☐	ANSI C63.10	11.12.2.5.2	Trace averaging across ON and OFF times of the EUT transmissions followed by duty cycle correction
			☒	ANSI C63.10	11.12.2.5.3	Reduced VBW averaging across ON and OFF times of the EUT transmissions with max hold


5.5. EUT test definition

Item	Radiated Emission Band Edge			
Device Category	☐	Fixed point-to-point		
	☐	Emit multiple directional beams, simultaneously or sequentially		
	☒	Other cases		
Test mode	Mode 1			
Test method	☒	Radiated		
		X Axis	Y Axis	Z Axis
				
		Worst Axis ☒	Worst Axis ☐	Worst Axis ☐
	☐	Conducted		
	☐	Chain 0		
				
	☐	Chain 0	Chain 1	
				
	☐	Chain 0	Chain 1	Chain 2
				

5.6. Duty Cycle


Test Mode	Tx On (ms)	Tx Off (ms)	Reduced VBW (kHz)	Tx On + Tx Off (ms)	Duty Cycle
BLE	2.12	0.37	0.51	2.49	85.14%

BLE

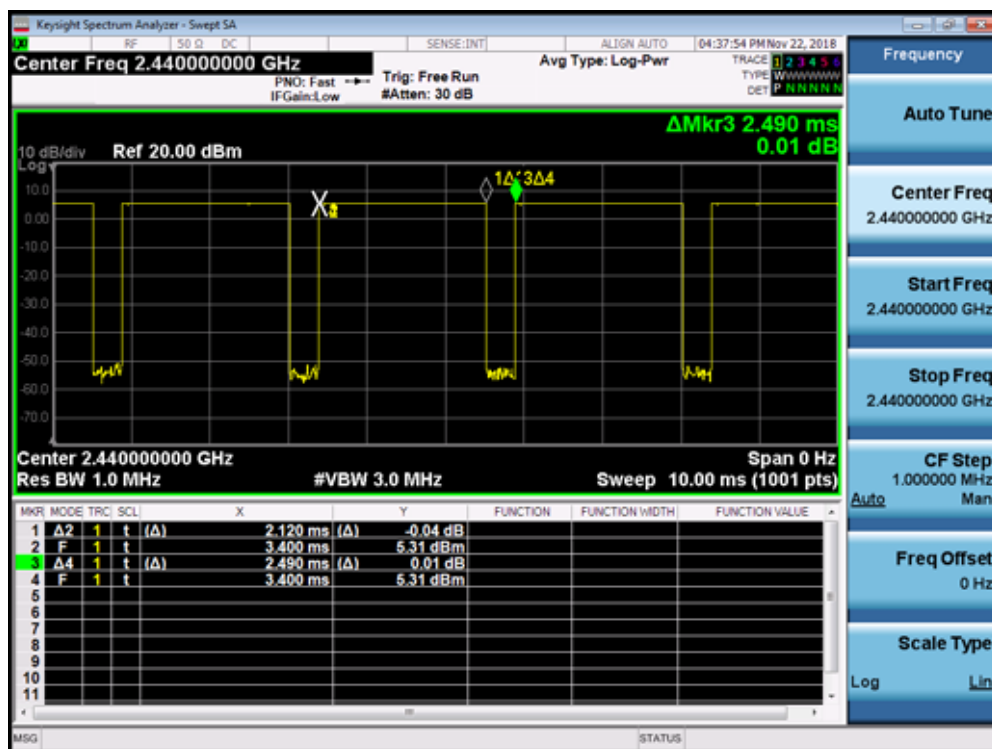


6.7 Test Result

Site: AC5	Time: 2018/11/16 - 13:37
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ-BT Module	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2402MHz by BLE	

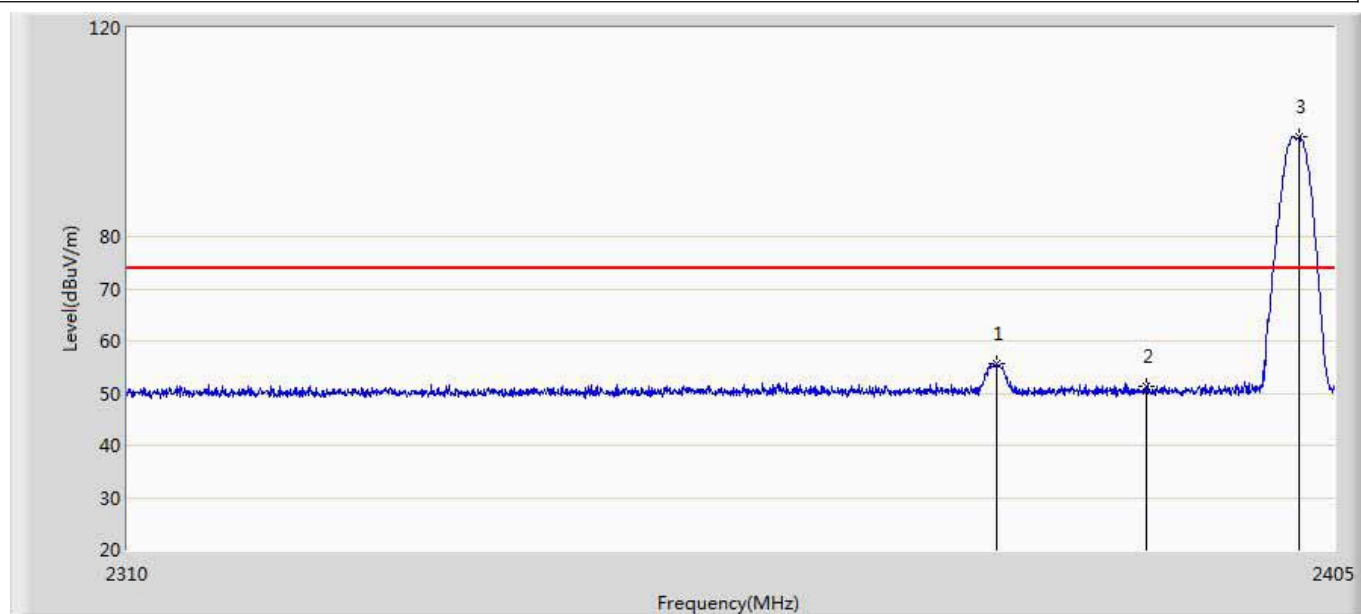


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2378.067	55.689	20.034	-18.311	74.000	35.655	PK
2		2390.000	51.201	15.519	-22.799	74.000	35.682	PK
3	*	2402.198	99.071	63.358	25.071	74.000	35.714	PK

Site: AC5	Time: 2018/11/16 - 13:40
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ-BT Module	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2402MHz by BLE	

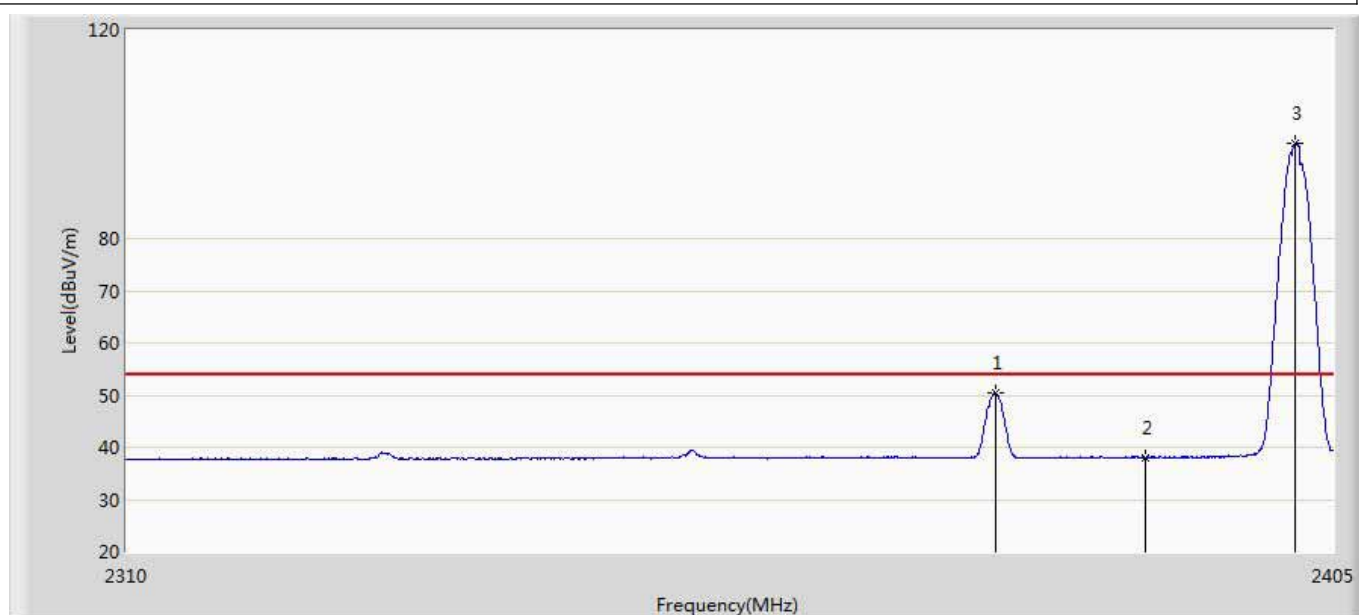


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2378.115	49.582	13.927	-4.418	54.000	35.655	AV
2		2390.000	38.048	2.366	-15.952	54.000	35.682	AV
3	*	2401.960	98.161	62.448	44.161	54.000	35.712	AV

Site: AC5	Time: 2018/11/16 - 13:41
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ-BT Module	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2402MHz by BLE	

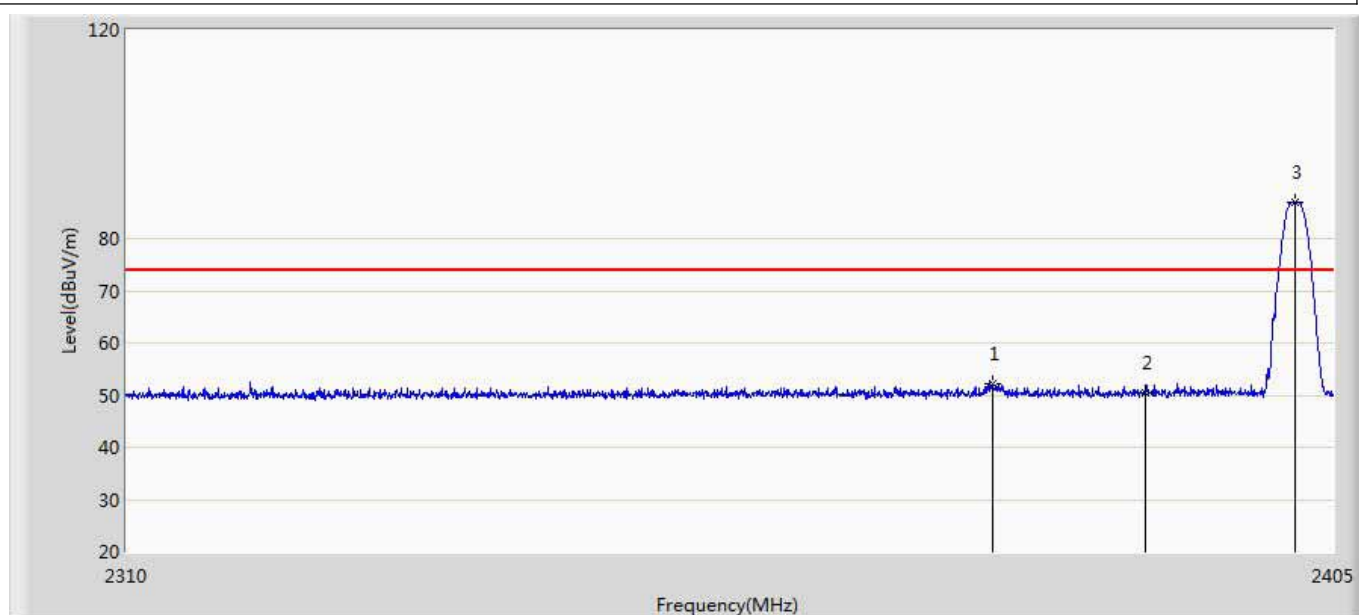


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2377.830	52.189	16.534	-21.811	74.000	35.655	PK
2		2390.000	50.438	14.756	-23.562	74.000	35.682	PK
3	*	2401.913	86.873	51.161	12.873	74.000	35.712	PK

Site: AC5	Time: 2018/11/16 - 13:43
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ-BT Module	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2402MHz by BLE	

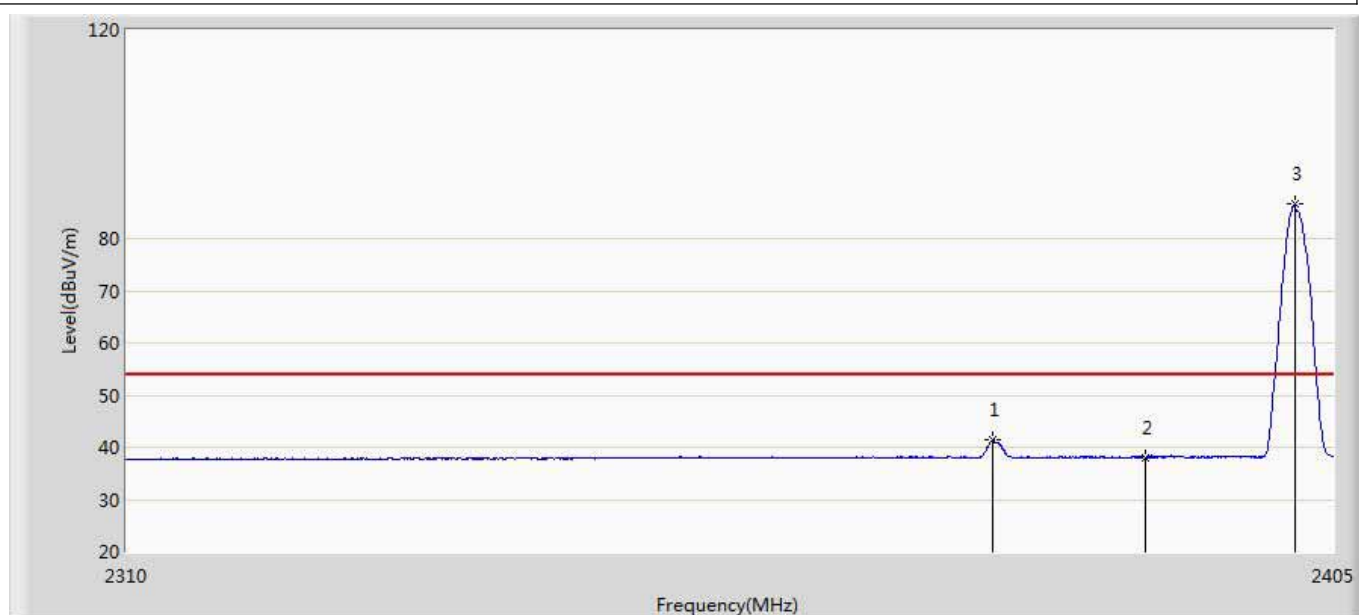


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2377.782	41.459	5.805	-12.541	54.000	35.655	AV
2		2390.000	38.067	2.385	-15.933	54.000	35.682	AV
3	*	2401.913	86.581	50.869	32.581	54.000	35.712	AV

Site: AC5	Time: 2018/11/16 - 13:46
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ-BT Module	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2480MHz by BLE	

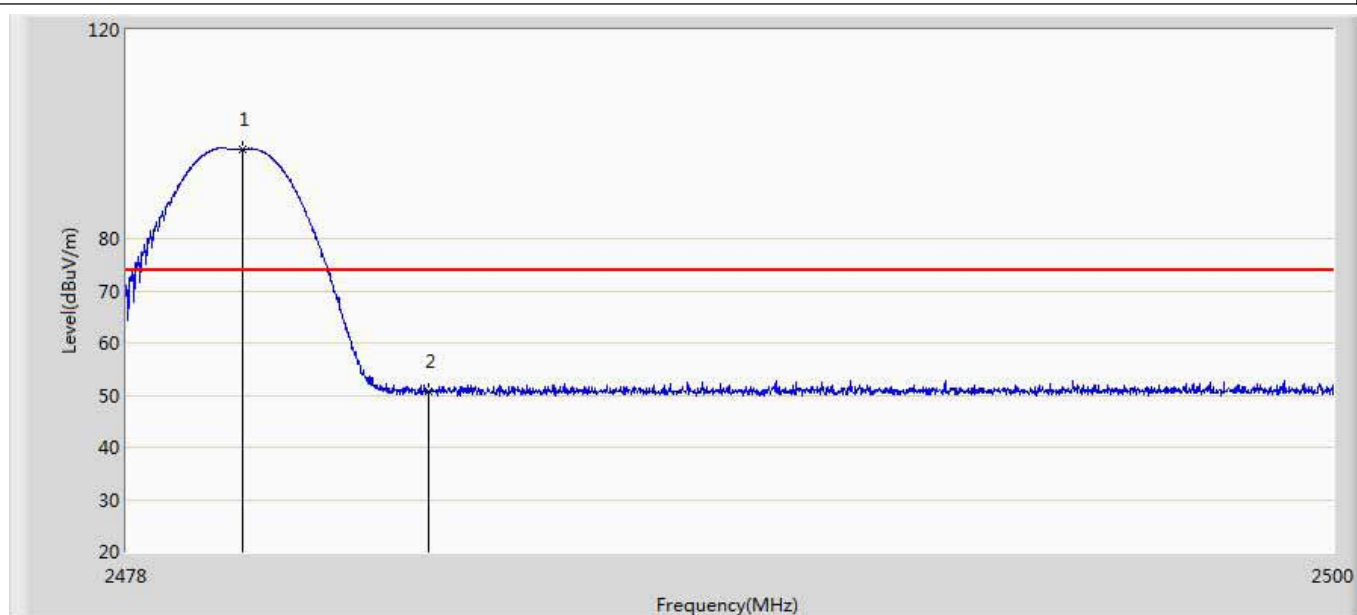


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2480.112	97.187	61.320	23.187	74.000	35.867	PK
2		2483.500	50.717	14.825	-23.283	74.000	35.891	PK

Site: AC5	Time: 2018/11/16 - 13:48
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ-BT Module	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2480MHz by BLE	

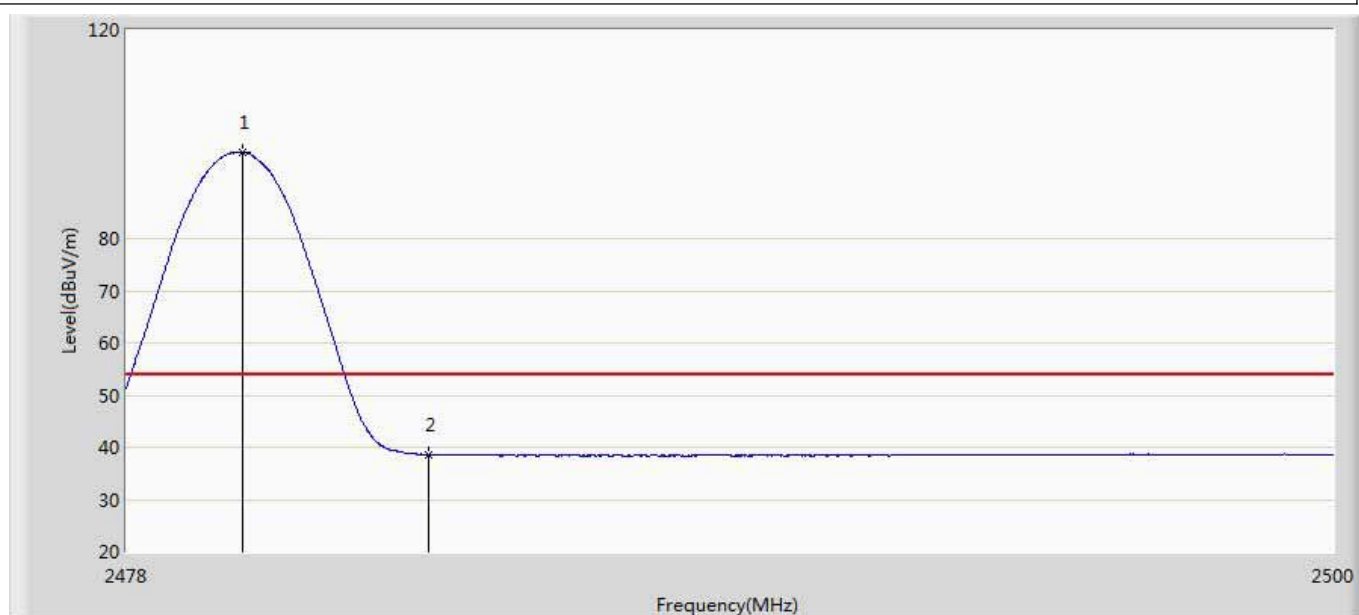


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2480.112	96.566	60.699	42.566	54.000	35.867	AV
2		2483.500	38.560	2.668	-15.440	54.000	35.891	AV

Site: AC5	Time: 2018/11/16 - 13:49
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ-BT Module	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2480MHz by BLE	

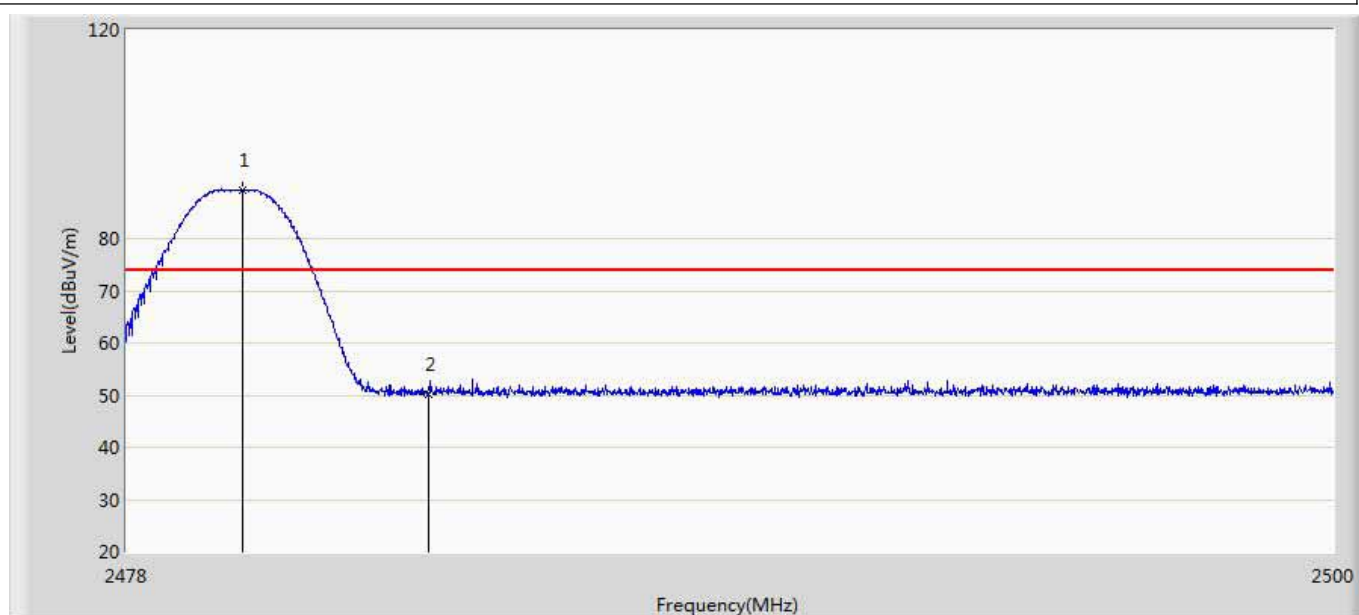

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2480.112	89.266	53.399	15.266	74.000	35.867	PK
2		2483.500	50.130	14.238	-23.870	74.000	35.891	PK

Site: AC5	Time: 2018/11/16 - 13:50
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ-BT Module	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2480MHz by BLE	

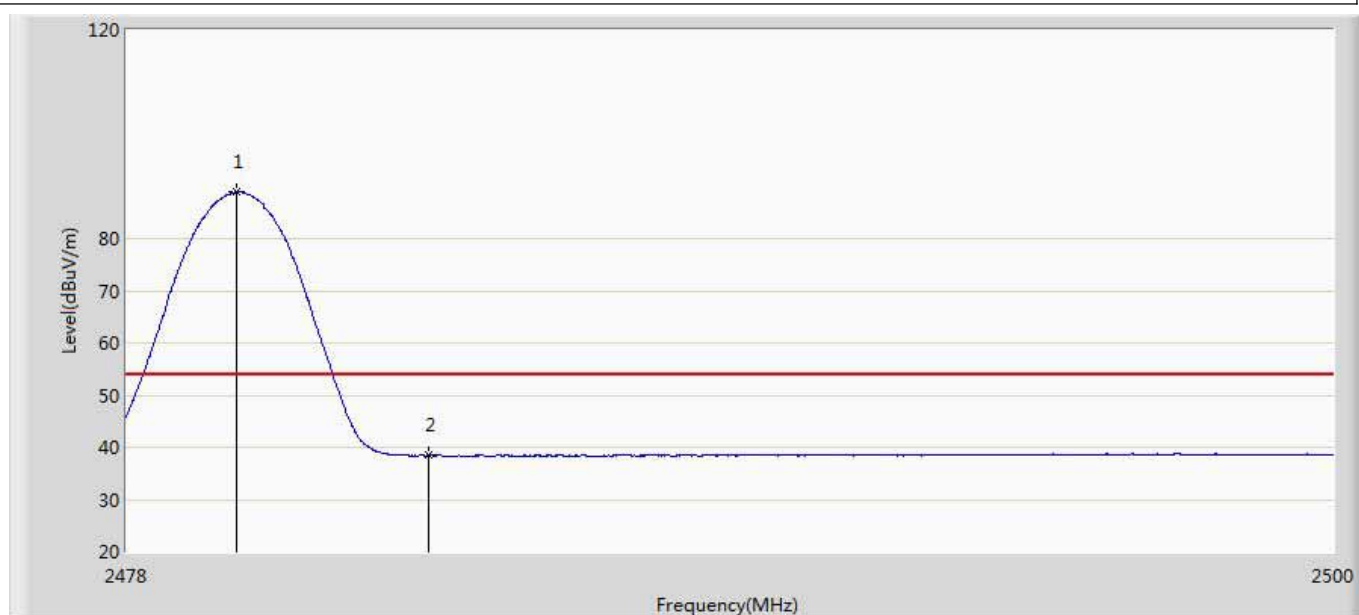

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2480.013	88.920	53.054	34.920	54.000	35.866	AV
2		2483.500	38.461	2.569	-15.539	54.000	35.891	AV


6. Fundamental emission output power

6.1. Test Equipment

Fundamental emission output power/ TR-8					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	E4446A	MY45300103	2018.01.04	2019.01.03
Spectrum Analyzer	Agilent	N9010A	MY48030494	2018.01.04	2019.01.03
Wideband Peak Power Meter	Anritsu	ML2495A	0905006	2018.10.14	2019.10.13
Power Sensor	Anritsu	MA2411B	0846014	2018.10.14	2019.10.13
Temperature/Humidity Meter	zhicheng	ZC1-2	TR8-TH	2018.04.10	2019.04.09

Note: All equipment are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

6.2. Test Setup

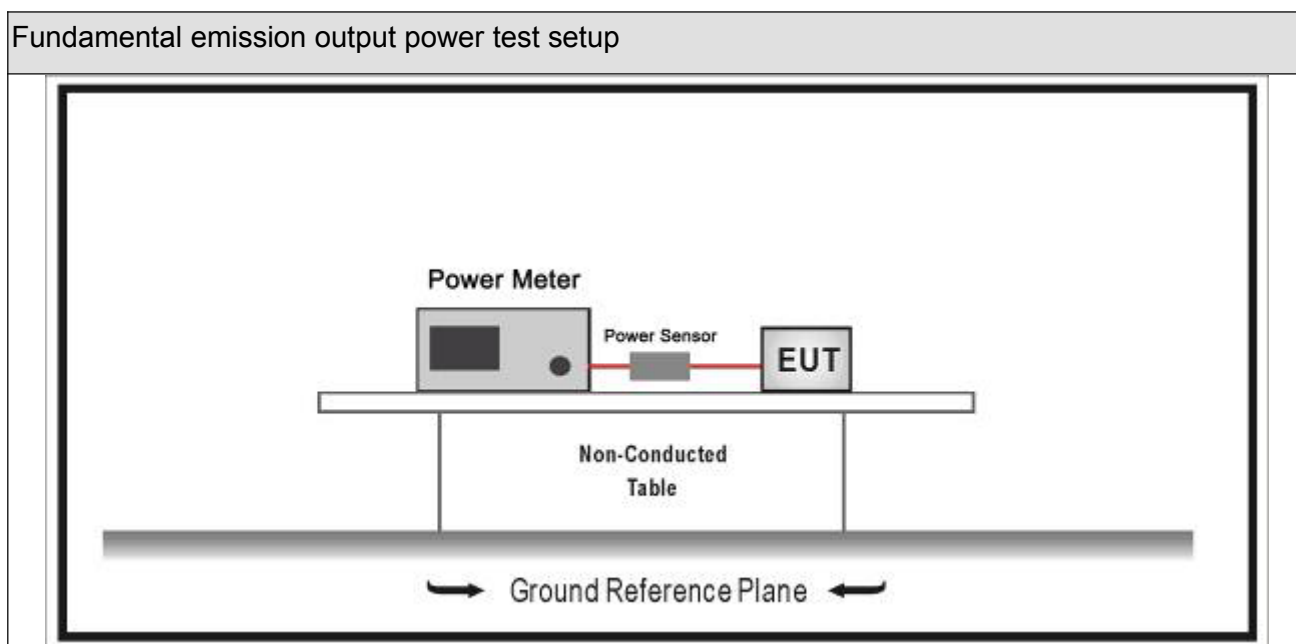



6.3. Limit

Fundamental emission output power Limit		
☒	$G_{TX} < 6\text{dBi}$	$P_{out} \leq 30\text{dBm}$
☐	$G_{TX} > 6\text{dBi}$	
☐	Non-Fix point-point	$P_{out} \leq 30 - (G_{TX} - 6)$
☐	Fix point-point	$P_{out} \leq 30 - [(G_{TX} - 6)]/3$
☐	Point-to-multipoint	$P_{out} \leq 30 - (G_{TX} - 6)$
☐	Overlap Beams	$P_{out} \leq 30 - [(G_{TX} - 6)]/3$
☐	Aggregate power transmitted simultaneously on all beams	$P_{out} \leq 30 - [(G_{TX} - 6)]/3$
☐	single directional beam	$P_{out} \leq 30 - [(G_{TX} - 6)]/3 + 8\text{dB}$
Note 1 : G_{TX} directional gain of transmitting antennas.		
Note 2 : P_{out} is maximum peak conducted output power .		

6.4. Test Procedure

Fundamental emission output power Test Method						
	References Rule			Chapter	Description	
☒	ANSI C63.10			11.9	Fundamental emission output power	
	☒	ANSI C63.10		11.9.1	Maximum peak conducted output power	
		☐	ANSI C63.10	11.9.1.1	RBW ≥ DTS bandwidth	
		☐	ANSI C63.10	11.9.1.2	Integrated band power method	
		☒	ANSI C63.10	11.9.1.3	PKPM1 Peak power meter method	
	☐	ANSI C63.10		11.9.2	Maximum conducted (average) output power	
		☐	ANSI C63.10		11.9.2.2	Measurement using a spectrum analyzer (SA)
			☐	ANSI C63.10	11.9.2.2.2	Method AVGSA-1(Duty cycle≥98%)
			☐	ANSI C63.10	11.9.2.2.3	Method AVGSA-1A(Duty cycle≥98%)
			☐	ANSI C63.10	11.9.2.2.4	Method AVGSA-2(Duty cycle≤98%)
			☐	ANSI C63.10	11.9.2.2.5	Method AVGSA-2A(Duty cycle≤98%)
			☐	ANSI C63.10	11.9.2.2.4	Method AVGSA-3
			☐	ANSI C63.10	11.9.2.2.5	Method AVGSA-3A
		☐	ANSI C63.10		11.9.2.3	Measurement using a power meter (PM)
			☐	ANSI C63.10	11.9.2.3.1	Method AVGPM
			☐	ANSI C63.10	11.9.2.3.2	Method AVGPM-G

6.5. EUT test definition

Item	Fundamental emission output power			
Device Category	☐	Fixed point-to-point		
	☐	Emit multiple directional beams, simultaneously or sequentially		
	☒	Other cases		
Test mode	Mode 1			
Test method	☐	Radiated		
		X Axis	Y Axis	Z Axis
				
		Worst Axis ☐	Worst Axis ☐	Worst Axis ☐
	☒	Conducted		
	☒	Chain 0		
				
	☐	Chain 0	Chain 1	
				
	☐	Chain 0	Chain 1	Chain 2
				

6.6. Test Result

Product Name	:	EZ-BT Module	Power	:	AC 120V/60Hz
Test Mode	:	Mode 1	Test Site	:	TR-8
Test Date	:	2018.11.19			

Mode	Channel	Test Frequency (MHz)	Measurement Power Output (dBm)	Limit (dBm)	Result
1	00	2402	4.51	30	Pass
1	19	2440	5.37	30	Pass
1	39	2480	4.41	30	Pass

————— The End —————