



Test Report

FCC Part15 Subpart C & RSS-247 Issue 2 (Class II permissive change)

Product Name : EZ-BT Module
Model No. : CYBT-343026-01;CYBT-343029-01;
CYBT-143038-01;CYBT-343151-02
FCC ID : WAP3026
IC : 7922A-3026

Applicant : Cypress Semiconductor
Address : 198 Champion Ct, San Jose, California 95134,United
States

Date of Receipt : Nov. 07, 2018
Test Date : Nov. 07, 2018 ~ Nov. 23, 2018
Issued Date : Nov. 23, 2018
Report No. : 18B2048R-RF-US-P06V02
Report Version : V1.0

Note: This report is based on DEKRA report No. 1752099R-RF-US-P06V02, only adds a new model CYBT-343151-02, so we only test spurious emission, band edge and power.

The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by A2LA, TAF or any agency of the government.

The test report shall not be reproduced without the written approval of DEKRA Testing & Certification (Suzhou) Co., Ltd.

Test Report Certification

Issued Date : Nov. 23, 2018


Report No. : 18B2048R-RF-US-P06V02



Product Name : EZ-BT Module
Applicant : Cypress Semiconductor
Address : 198 Champion Ct, San Jose, California 95134, United States
Manufacturer : Cypress Semiconductor
Address : 198 Champion Ct, San Jose, California 95134, United States
Model No. : CYBT-343026-01; CYBT-343029-01;
CYBT-143038-01; CYBT-343151-02
FCC ID : WAP3026
IC : 7922A-3026
EUT Voltage : DC 2.3-3.6V
Test Voltage : AC120V/60Hz
Applicable Standard : FCC CFR Title 47 Part 15 Subpart C: 2015
ANSI C63.10: 2013
RSS-Gen Issue 5 / RSS-247 Issue 2
Test Result : Complied
Performed Location : DEKRA Testing & Certification (Suzhou) Co., Ltd.
No.99 Hongye Rd., Suzhou Industrial Park, Suzhou, 215006,
Jiangsu, China
TEL: +86-512-6251-5088 / FAX: +86-512-6251-5098
FCC Designation Number: CN1199; ISED Lab Code: 4075B

Documented By


:



(Project Assistant: Kathy Feng)

Reviewed By

:



(Senior Engineer: Frank He)

Approved By

:



(Engineer Supervisor: Jack Zhang)

TABLE OF CONTENTS

Description	Page
1. General Information.....	6
1.1. EUT Description.....	6
1.2 Antenna information.....	8
1.3 Mode of Operation.....	9
1.4 Tested System Details.....	10
1.5 Configuration of Tested System.....	11
1.6 EUT Exercise Software.....	12
2. Technical Test.....	13
2.1. Summary of Test Result.....	13
2.2. Test Environment.....	14
3. Conducted Emission.....	15
3.1. Test Equipment.....	15
3.2. Test Setup.....	15
3.3. Limit.....	16
3.4. Test Procedure.....	16
3.5. Uncertainty.....	16
3.6. Test Result.....	17
4. Emissions in restricted frequency bands.....	17
4.1. Test Equipment.....	19
4.2. Test Setup.....	20
4.3. Limit.....	21
4.4. Test Procedure.....	24
4.5. Uncertainty.....	24
4.6. Test Result.....	25
5. Peak Output Power.....	43
5.1. Test Equipment.....	45
5.2. Test Setup.....	45
5.3. Limit.....	46
6. Test Procedure.....	46
5.4. Uncertainty.....	46
5.5. Test Result.....	47
6. Radiated Emission Band Edge.....	48
6.1. Test Equipment.....	48
6.2. Test Setup.....	49
6.3. Limit.....	49
6.4. Test Procedure.....	50
6.5. Uncertainty.....	50

6.6. Duty Factor.....	51
6.7. Test Result.....	53

History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
18B2048R-RF-US-P06V02	V1.0	Initial Issued Report	Nov. 23, 2018

1. General Information

1.1. EUT Description

Product Name	EZ-BT Module
Model No.	CYBT-343026-01;CYBT-343029-01; CYBT-143038-01;CYBT-343151-02
EUT Voltage	DC 2.3-3.6V
Test Voltage	AC120V/60Hz
Bluetooth Specification	V3.0
Frequency Range	2402- 2480 MHz
Channel Number	V3.0: 79
Channel Separation	V3.0: 1MHz
Type of Modulation	V3.0: GFSK, Pi/4 DQPSK, 8DPSK
Data Rate	V3.0: 1Mbps(GFSK), 2Mbps(Pi/4 DQPSK), 3Mbps(8DPSK)
Antenna Type	Reference to Antenna List
Peak Antenna Gain	Reference to Antenna List

Note: Module CYBT-343151-02 shares the same PCB with original module except that working temperature is changed from -40~85 to -40~105 . Part of device P/N has changed to meet the working temperature requirement. The RF character of this new module and original modules is the same.

Bluetooth Working Frequency of Each Channel: (For FHSS)

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
00	2402 MHz	01	2403 MHz	02	2404 MHz	03	2405 MHz
04	2406 MHz	05	2407 MHz	06	2408 MHz	07	2409 MHz
08	2410 MHz	09	2411 MHz	10	2412 MHz	11	2413 MHz
12	2414 MHz	13	2415 MHz	14	2416 MHz	15	2417 MHz
16	2418 MHz	17	2419 MHz	18	2420 MHz	19	2421 MHz
20	2422 MHz	21	2423 MHz	22	2424 MHz	23	2425 MHz
24	2426 MHz	25	2427 MHz	26	2428 MHz	27	2429 MHz
28	2430 MHz	29	2431 MHz	30	2432 MHz	31	2433 MHz
32	2434 MHz	33	2435 MHz	34	2436 MHz	35	2437 MHz
36	2438 MHz	37	2439 MHz	38	2440 MHz	39	2441 MHz
40	2442 MHz	41	2443 MHz	42	2444 MHz	43	2445 MHz
44	2446 MHz	45	2447 MHz	46	2448 MHz	47	2449 MHz
48	2450 MHz	49	2451 MHz	50	2452 MHz	51	2453 MHz
52	2454 MHz	53	2455 MHz	54	2456 MHz	55	2457 MHz
56	2458 MHz	57	2459 MHz	58	2460 MHz	59	2461 MHz
60	2462 MHz	61	2463 MHz	62	2464 MHz	63	2465 MHz
64	2466 MHz	65	2467 MHz	66	2468 MHz	67	2469 MHz
68	2470 MHz	69	2471 MHz	70	2472 MHz	71	2473 MHz
72	2474 MHz	73	2475 MHz	74	2476 MHz	75	2477 MHz
76	2478 MHz	77	2479 MHz	78	2480 MHz	N/A	N/A

1.2 Antenna information

Model No.	N/A					
Antenna manufacturer	N/A					
Antenna Delivery	☒	1*TX+1*RX	☐	2*TX+2*RX	☐	3*TX+3*RX
Antenna technology	☒	SISO				
	☐	MIMO	☐	Basic		
			☐	CDD		
			☐	Beam-forming		
Antenna Type	☐	External	☐	Dipole		
	☒	Internal	☐	PIFA		
			☒	PCB		
			☐	Ceramic Chip Antenna		
			☐	Metal plate type F antenna		
Antenna Gain	-0.5dBi					

1.3 Mode of Operation

DEKRA has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: Transmitter-1Mbps(GFSK_DH5)
Mode 2: Transmitter-2Mbps(Pi/4 DQPSK_DH5)
Mode 3: Transmitter-3Mbps(8DPSK_DH5)


1.4 Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:


Product		Manufacturer	Model No.	Serial No.	Power Cord
1	Notebook	Think Pad	2526	LV-A3285	Power by adapter
A	USB Cable	N/A	N/A	N/A	Shield, 0.75m
B	USB Cable	N/A	N/A	N/A	Shield, 10m

1.5 Configuration of Tested System

Test setup Diagram- AC Line Conducted Emission Test

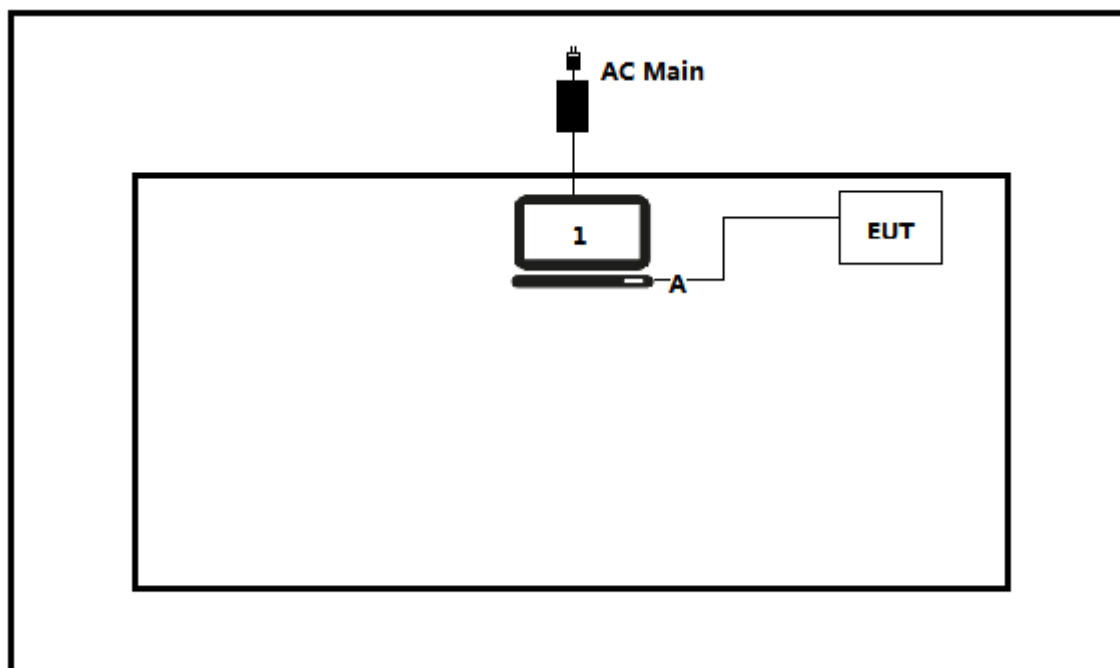

Test setup Diagram- Radiated Emission

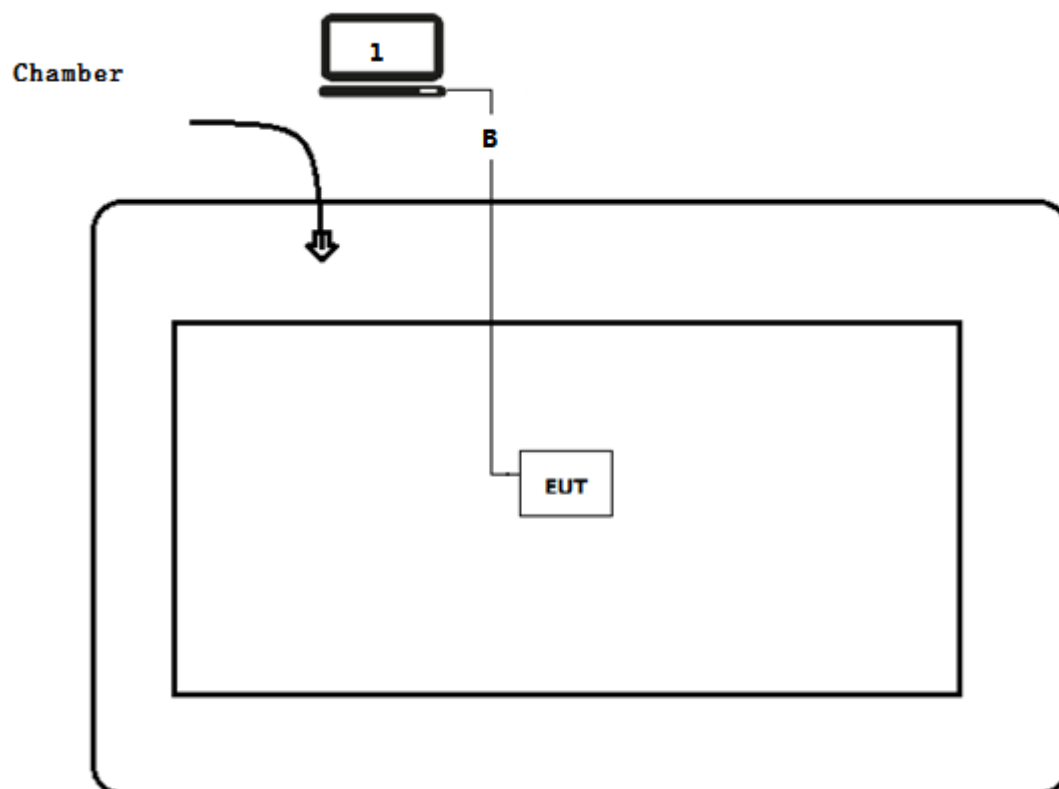

1.6 EUT Exercise Software

1	Setup the EUT and simulators as shown on above.
2	Turn on the power of all equipment.
3	Run [Bluetool] software, and set the test mode and channel, then press OK to start continue Transmit.

2. Technical Test

2.1. Summary of Test Result

For FCC:

Performed Test Item	Normative References	Limit	Result
AC Power Line Conducted Emission	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.207	FCC 15.207	PASS
Emissions in restricted frequency bands	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.209	FCC 15.209	PASS
Radiated Emission Band Edge	FCC CFR Title 47 Part 15 Subpart C: 2015 15.247(d)	FCC 15.209	PASS
Fundamental emission output power	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.247(b)(3)	$\leq 30\text{dBm}$	PASS

For ISED:

Performed Test Item	Normative References	Limit	Result
AC Power Line Conducted Emission	RSS-Gen Issue 5 Section 8.8	RSS-Gen	PASS
Emissions in restricted frequency bands	RSS-Gen Issue 5 Section 8.10	RSS-Gen	PASS
Radiated Emission Band Edge	RSS-247 Issue 2 Section A5.5	RSS-247	PASS
Fundamental emission output power	RSS-247 Issue 2 Section A5.4(4)	$\leq 30\text{dBm}$	PASS

2.2. Test Environment

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	21
Humidity (%RH)	25-75	50
Barometric pressure (mbar)	860-1060	950-1000


3. Conducted Emission

3.1. Test Equipment

AC Power Line Conducted Emission / TR-1					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
EMI Test Receiver	R&S	ESCI	100906	2018.03.05	2019.03.04
Two-Line V-Network	R&S	ENV 216	101189	2018.07.16	2019.07.15
Two-Line V-Network	R&S	ENV 216	101044	2017.09.15	2019.09.15
50ohm Coaxial Switch	Anritsu	MP59B	6200464462	N/A	N/A
50ohm Termination	SHX	TF2	07081402	2017.09.15	2019.09.15
Temperature/Humidity Meter	Zhichen	ZC1-2	TR1-TH	2018.01.05	2019.01.04

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

3.2. Test Setup

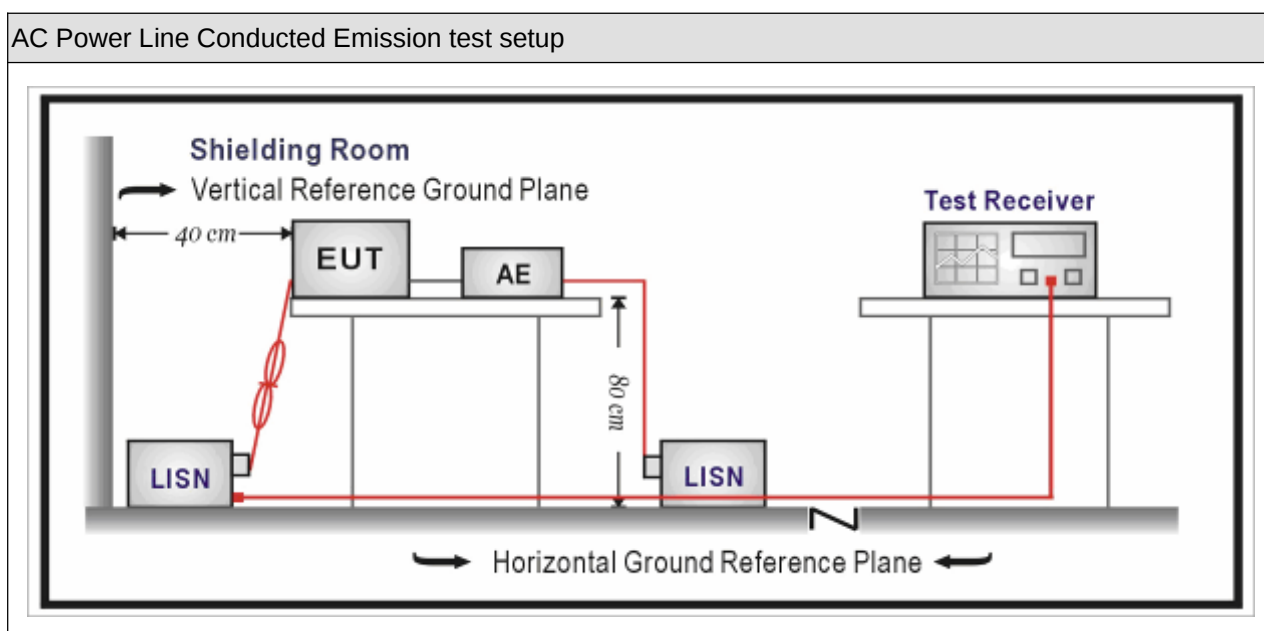

3.3. Limit

Frequency of Emission (MHz)	Conducted Limit	
	Quasi-peak (dB μ V)	Average (dB μ V)
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50
Note 1: The lower limit shall apply at the transition frequencies.		
Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.		

3.4. Test Procedure


Test Method			
	References Rule	Chapter	Item
☒	ANSI C63.10-2013	6.2	Standard test method for ac power-line conducted emissions from unlicensed wireless devices
☒	ANSI C63.4-2014	7	AC power-line conducted emission measurements

3.5. Uncertainty

The measurement uncertainty is defined as ± 2.02 dB

3.6. Test Result

Site: TR1	Time: 2018/11/23 - 02:40
Limit: FCC_Part15.207_CE	Margin: 0
Probe: ENV216_101044(0.009-30MHz)	Polarity: Line
EUT: EZ-BT Module	Power: AC 120V/60Hz
Note: Mode 1	

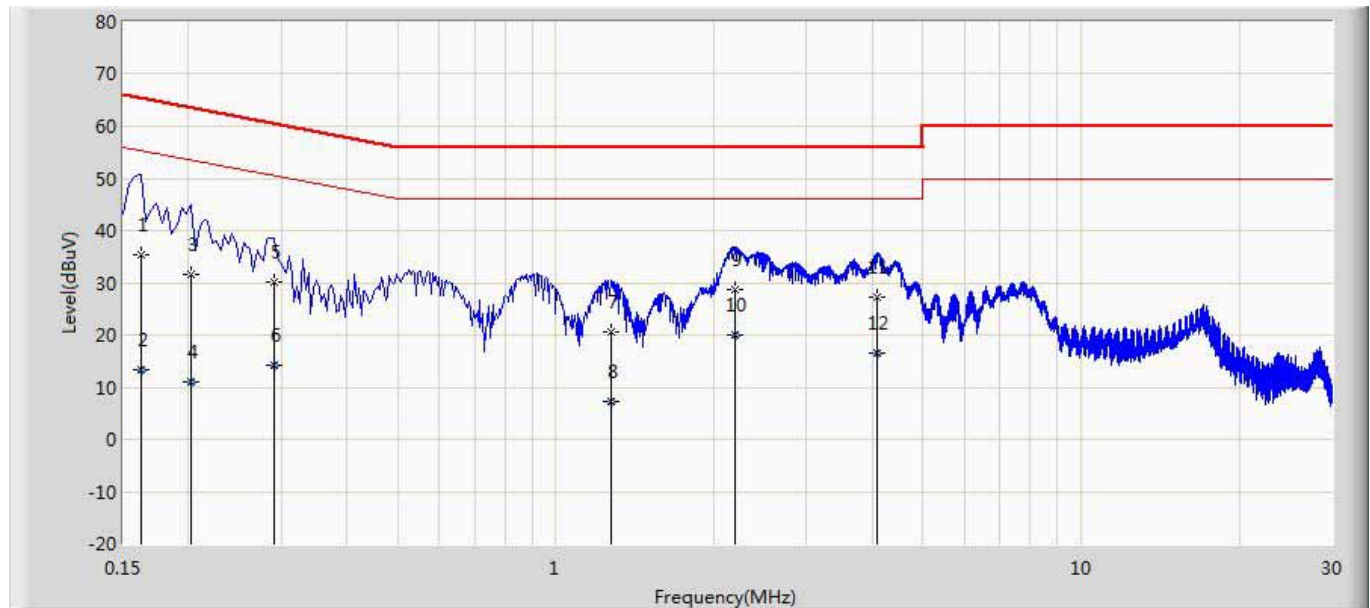


No	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1		0.162	35.504	25.884	-29.857	65.361	9.620	QP
2		0.162	13.428	3.808	-41.932	55.361	9.620	AV
3		0.202	31.658	22.036	-31.870	63.528	9.622	QP
4		0.202	10.948	1.326	-42.580	53.528	9.622	AV
5		0.290	30.073	20.452	-30.451	60.524	9.622	QP
6		0.290	14.294	4.672	-36.231	50.524	9.622	AV
7		1.270	20.612	10.945	-35.388	56.000	9.667	QP
8		1.270	7.105	-2.562	-38.895	46.000	9.667	AV
9		2.194	28.692	18.987	-27.308	56.000	9.706	QP
10	*	2.194	20.139	10.433	-25.861	46.000	9.706	AV
11		4.090	27.171	17.420	-28.829	56.000	9.751	QP
12		4.090	16.421	6.670	-29.579	46.000	9.751	AV

Note:

1. " * ", means this data is the worst emission level.
2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

Site: TR1	Time: 2018/11/23 - 02:51
Limit: FCC_Part15.207_CE	Margin: 0
Probe: ENV216_101044(0.009-30MHz)	Polarity: Neutral
EUT: EZ-BT Module	Power: AC 120V/60Hz
Note: Mode 1	

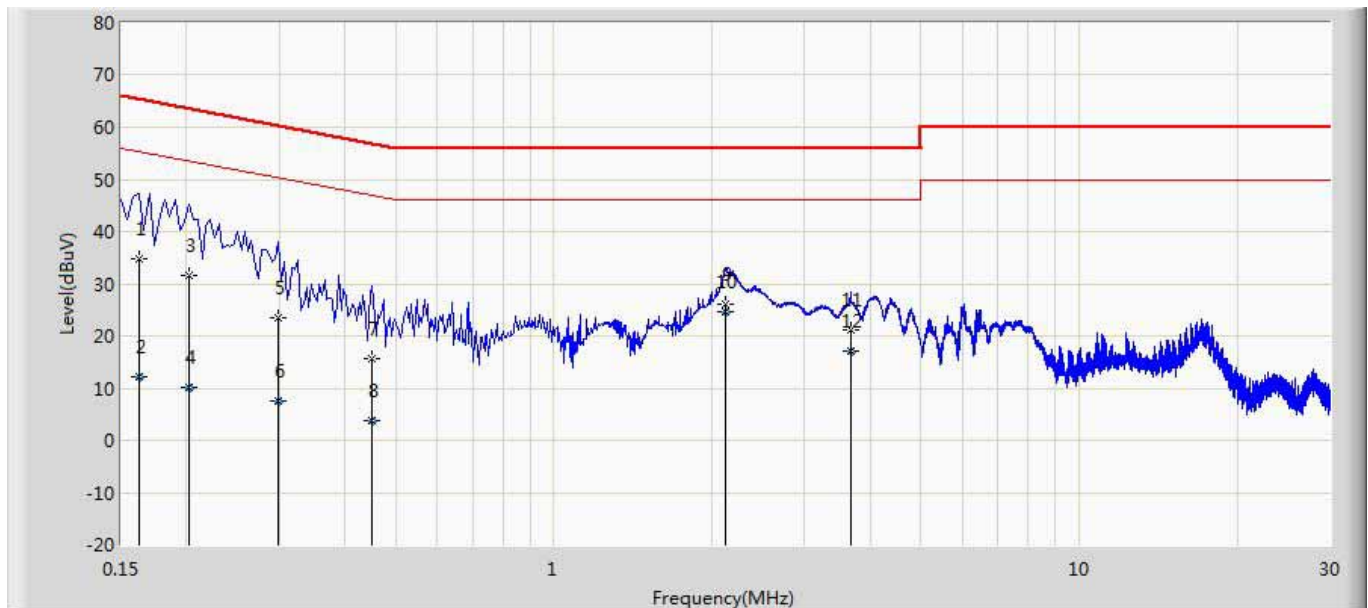

No	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1		0.162	34.916	25.316	-30.445	65.361	9.600	QP
2		0.162	12.033	2.433	-43.328	55.361	9.600	AV
3		0.202	31.603	22.001	-31.925	63.528	9.603	QP
4		0.202	10.106	0.503	-43.422	53.528	9.603	AV
5		0.298	23.588	13.984	-36.710	60.298	9.605	QP
6		0.298	7.502	-2.103	-42.796	50.298	9.605	AV
7		0.450	15.692	6.069	-41.184	56.875	9.623	QP
8		0.450	3.656	-5.967	-43.219	46.875	9.623	AV
9		2.126	26.009	16.330	-29.991	56.000	9.680	QP
10	*	2.126	24.780	15.100	-21.220	46.000	9.680	AV
11		3.678	21.173	11.447	-34.827	56.000	9.726	QP
12		3.678	17.179	7.452	-28.821	46.000	9.726	AV

Note:

1. " * ", means this data is the worst emission level.
2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

4. Emissions in restricted frequency bands


4.1. Test Equipment

Radiated Emission(Below 1GHz) / AC-2					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
EMI Test Receiver	R&S	ESCI	100573	2018.03.29	2019.03.28
Loop Antenna	R&S	HFH2-Z2	833799/003	2018.11.16	2019.11.15
Bilog Antenna	Teseq GmbH	CBL6112D	27611	2018.10.16	2019.10.15
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC2-C	2018.03.02	2019.03.01
Temperature/Humidity Meter	Zhichen	ZC1-2	AC2-TH	2018.01.04	2019.01.03
Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.					


Radiated Emission(Above 1GHz) / AC-5					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	E4446A	MY45300103	2018.01.04	2019.01.03
Preamplifier	Miteq	NSP1800-25	1364185	2018.05.06	2019.05.05
Preamplifier	QuieTek	AP-040G	CHM-0906001	2018.05.06	2019.05.05
DRG Horn	ETS-Lindgren	3117	00123988	2018.01.22	2019.01.21
Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	294	2017.11.25	2018.11.24
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C1	2018.03.02	2019.03.01
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C2	2018.03.02	2019.03.01
Coaxial Cable	Huber+Suhner	SUCOFLEX 102	AC5-C3	2018.03.02	2019.03.01
EMI Receiver	Agilent	N9038A	MY51210196	2018.06.10	2019.06.09
Temperature/Humidity Meter	Zhichen	ZC1-2	AC5-TH	2018.01.04	2019.01.03
Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.					

4.2. Test Setup


Below 30MHz Test Setup:

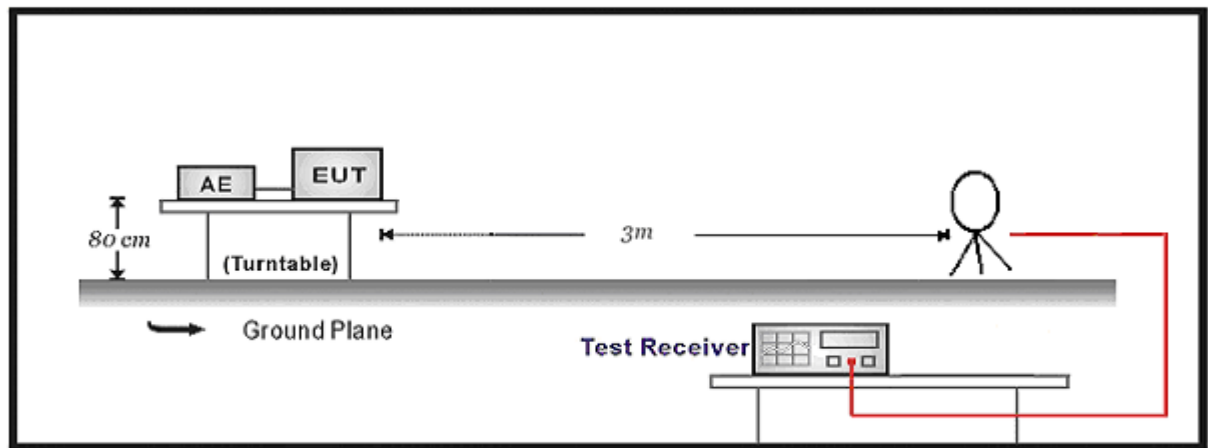

30MHz-1GHz Test Setup:

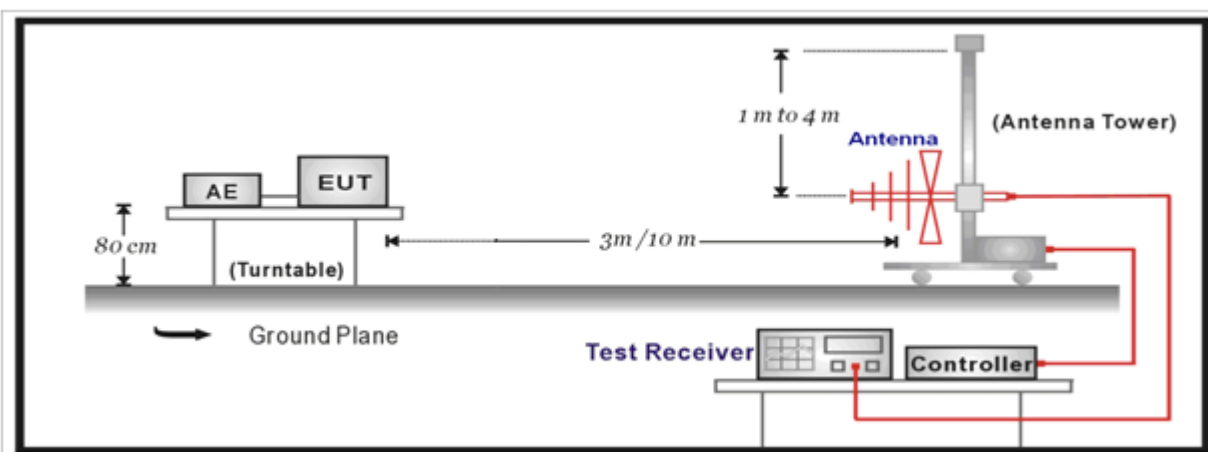

Above 1GHz Test Setup:

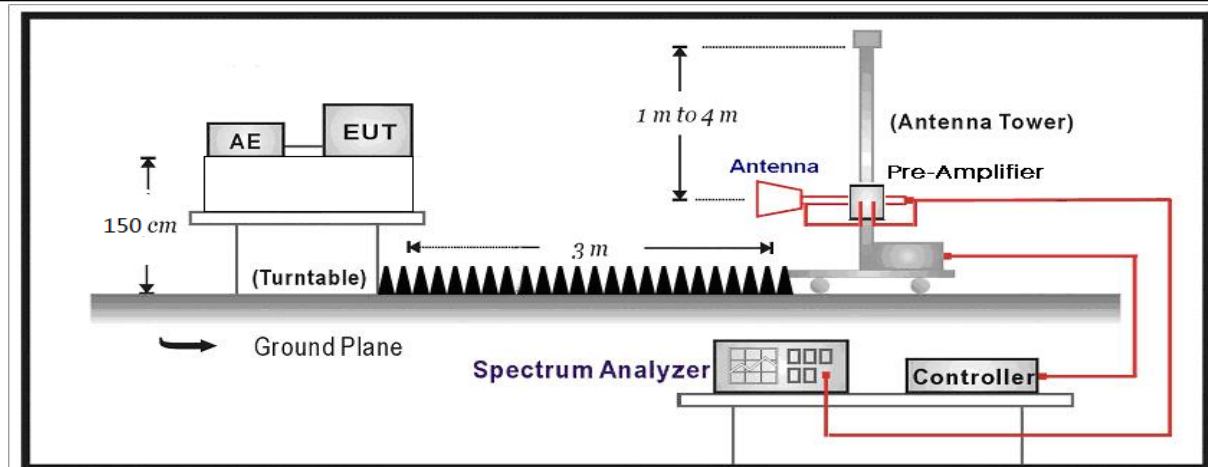

4.3. Limit

For FCC:

Restricted Bands of operation			
Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 – 0.110	16.42 – 16.423	399.9 – 410	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	608 – 614	5.35 – 5.46
2.1735 – 2.1905	16.80425 – 16.80475	960 – 1240	7.25 – 7.75
4.125 – 4.128	25.5 – 25.67	1300 – 1427	8.025 – 8.5
4.17725 – 4.17775	37.5 – 38.25	1435 – 1626.5	9.0 – 9.2
4.20725 – 4.20775	73 – 74.6	1645.5 – 1646.5	9.3 – 9.5
6.215 – 6.218	74.8 – 75.2	1660 – 1710	10.6 – 12.7
6.26775 – 6.26825	108 – 121.94	1718.8 – 1722.2	13.25 – 13.4
6.31175 – 6.31225	123 – 138	2200 – 2300	14.47 – 14.5
8.291 – 8.294	149.9 – 150.05	2310 – 2390	15.35 – 16.2
8.362 – 8.366	156.52475 – 156.52525	2483.5 – 2500	17.7 – 21.4
8.37625 – 8.38675	156.7 – 156.9	2690 – 2900	22.01 – 23.12
8.81425 – 8.81475	162.0125 – 167.17	3260 – 3267	23.6 – 24.0
12.29 – 12.293	167.72 – 173.2	3332 – 3339	31.2 – 31.8
12.51975 – 12.52025	240 – 285	3345.8 – 3358	36.43 – 36.5
12.57675 – 12.57725	322 – 335.4	3600 – 4400	
13.36 – 13.41			

For ISED:

Restricted Bands of operation

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
	13.36 - 13.41	960 - 1427	9.0 - 9.2
0.495 - 0.505	16.42 - 16.423	1435 - 1626.5	9.3 - 9.5
2.1735 - 2.1905	16.69475 - 16.69525	1645.5 - 1646.5	10.6 - 12.7
3.020 - 3.026	16.80425 - 16.80475	1660 - 1710	13.25 - 13.4
4.125 - 4.128	25.5 - 25.67	1718.8 - 1722.2	14.47 - 14.5
4.17725 - 4.17775	37.5 - 38.25	2200 - 2300	15.35 - 16.2
4.20725 - 4.20775	73 - 74.6	2310 - 2390	17.7 - 21.4
5.677 - 5.683	74.8 - 75.2	2483.5 - 2500	22.01 - 23.12
6.215 - 6.218	108 - 138	2655 - 2900	23.6 - 24.0
6.26775 - 6.26825	149.9 - 150.05	3260 - 3267	31.2 - 31.8
6.31175 - 6.31225	156.52475 - 156.52525	3332 - 3339	36.43 - 36.5
8.291 - 8.294	156.7 - 156.9	3345.8 - 3358	Above 38.6
8.362 - 8.366	162.0125 - 167.17	3500 - 4400	
8.37625 - 8.38675	167.72 - 173.2	4500 - 5150	
8.41425 - 8.41475	240 - 285	5350 - 5460	
12.29 - 12.293	322 - 335.4	7250 - 7750	
12.51975 - 12.52025	399.9 - 410	8025 - 8500	
12.57675 - 12.57725	608 - 614	--	

Restricted Band Emissions Limit			
Frequency (MHz)	Field strength (μ V/m)	Field strength (dB μ V/m)	Measurement distance (m)
0.009 - 0.49	2400/F(kHz)	48.5 – 13.8	300 _(Note 1)
0.49 - 1.705	24000/F(kHz)	33.8 - 23	30 _(Note 1)
1.705 - 30	30	29.5	30 _(Note 1)
30 - 88	100	40	3 _(Note 2)
88 - 216	150	43.5	3 _(Note 2)
216 - 960	200	46	3 _(Note 2)
Above 960	500	54	3 _(Note 2)

Note 1: At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade).

Note 2: At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

4.4. Test Procedure


Test Method			
	References Rule	Chapter	Description
☒	ANSI C63.10	6.4	Radiated emissions from unlicensed wireless devices below 30 MHz
☒	ANSI C63.10	6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz
☒	ANSI C63.10	6.6	Radiated emissions from unlicensed wireless devices above 1 GHz

4.5. Uncertainty

The measurement uncertainty above 1G is defined as ± 3.9 dB
below 1G is defined as ± 3.8 dB


4.6. Test Result

Site: AC5	Time: 2018/11/16 - 14:43
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ-BT Module	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2402MHz by DH5	

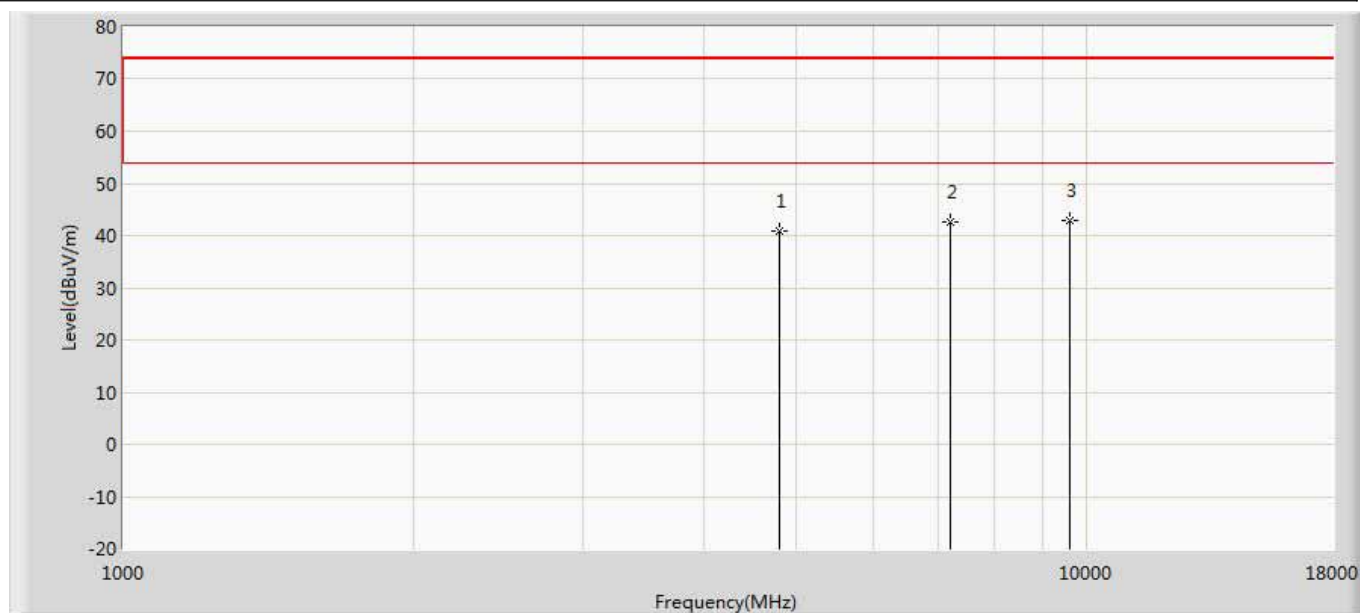


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4804.000	40.794	42.517	-33.206	74.000	-1.723	PK
2		7206.000	42.471	40.552	-31.529	74.000	1.919	PK
3	*	9608.000	42.815	37.916	-31.185	74.000	4.899	PK

Site: AC5	Time: 2018/11/16 - 14:43
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ-BT Module	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2402MHz by DH5	

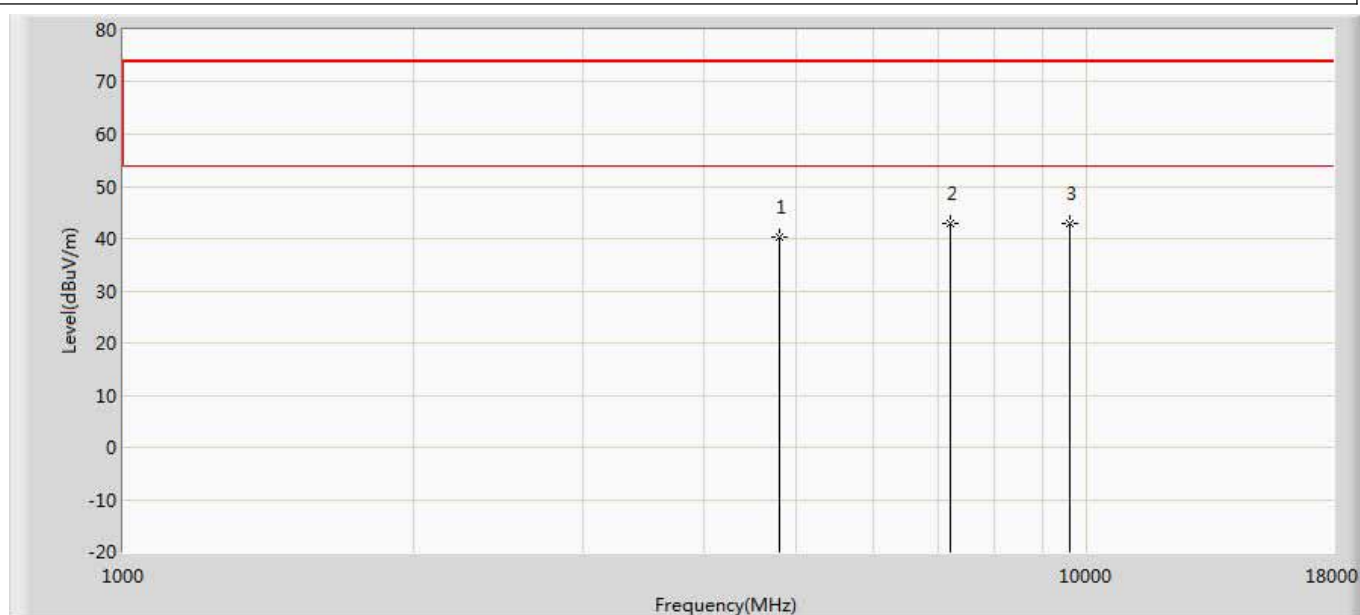


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4804.000	40.381	42.104	-33.619	74.000	-1.723	PK
2		7206.000	42.838	40.919	-31.162	74.000	1.919	PK
3	*	9608.000	42.917	38.018	-31.083	74.000	4.899	PK

Site: AC5	Time: 2018/11/16 - 14:43
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ-BT Module	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2441MHz by DH5	

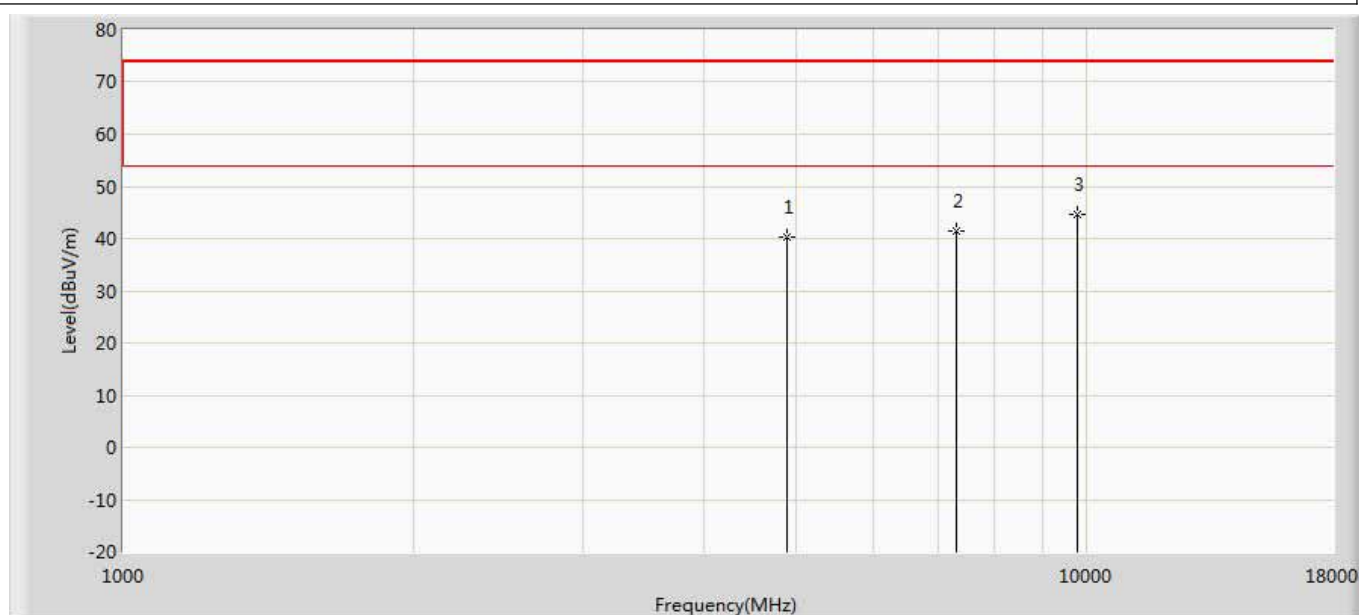


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4882.000	40.323	41.640	-33.677	74.000	-1.317	PK
2		7323.000	41.409	39.501	-32.591	74.000	1.909	PK
3	*	9764.000	44.537	38.537	-29.463	74.000	6.001	PK

Site: AC5	Time: 2018/11/16 - 14:43
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ-BT Module	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2441MHz by DH5	

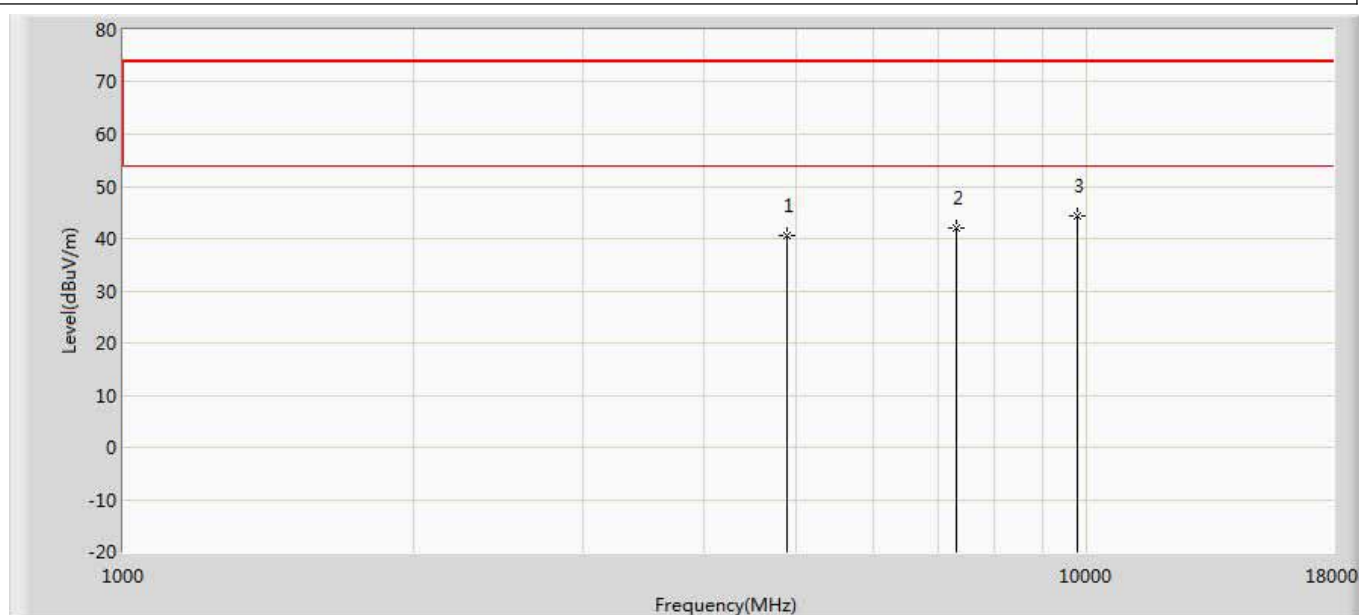


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4882.000	40.521	41.838	-33.479	74.000	-1.317	PK
2		7323.000	42.129	40.221	-31.871	74.000	1.909	PK
3	*	9764.000	44.431	38.431	-29.569	74.000	6.001	PK

Site: AC5	Time: 2018/11/16 - 14:43
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ-BT Module	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2480MHz by DH5	

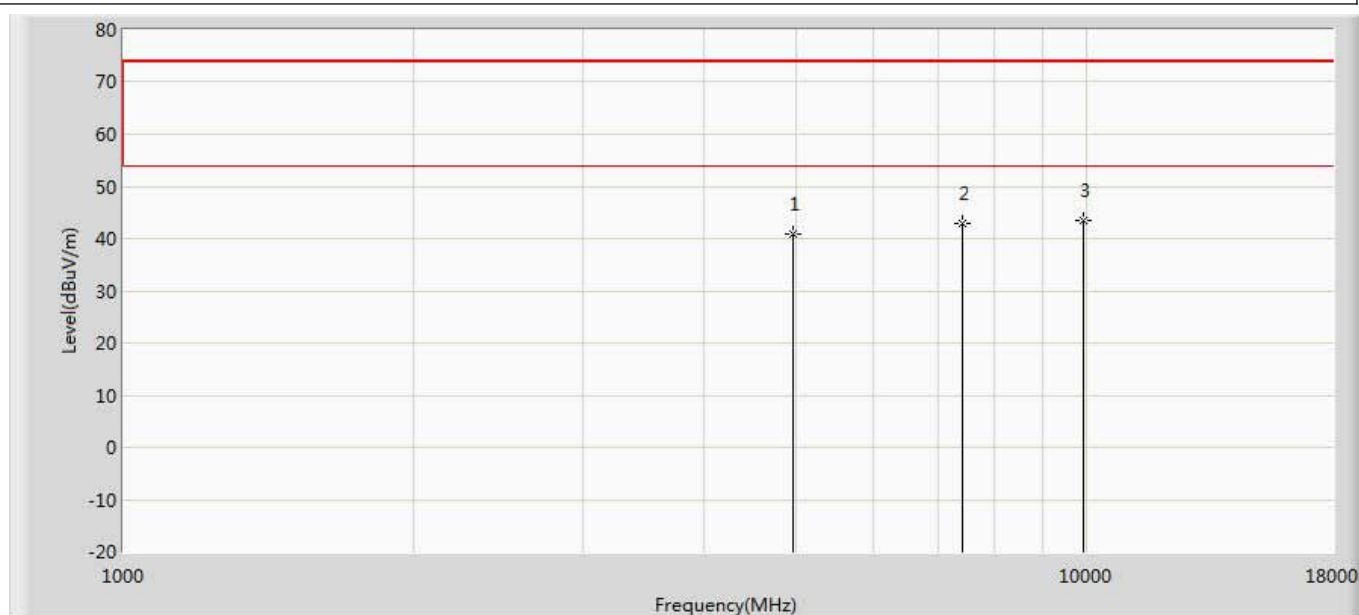


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4960.000	40.769	41.917	-33.231	74.000	-1.148	PK
2		7440.000	42.838	40.412	-31.162	74.000	2.426	PK
3	*	9920.000	43.388	38.134	-30.612	74.000	5.253	PK

Site: AC5	Time: 2018/11/16 - 14:43
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ-BT Module	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2480MHz by DH5	

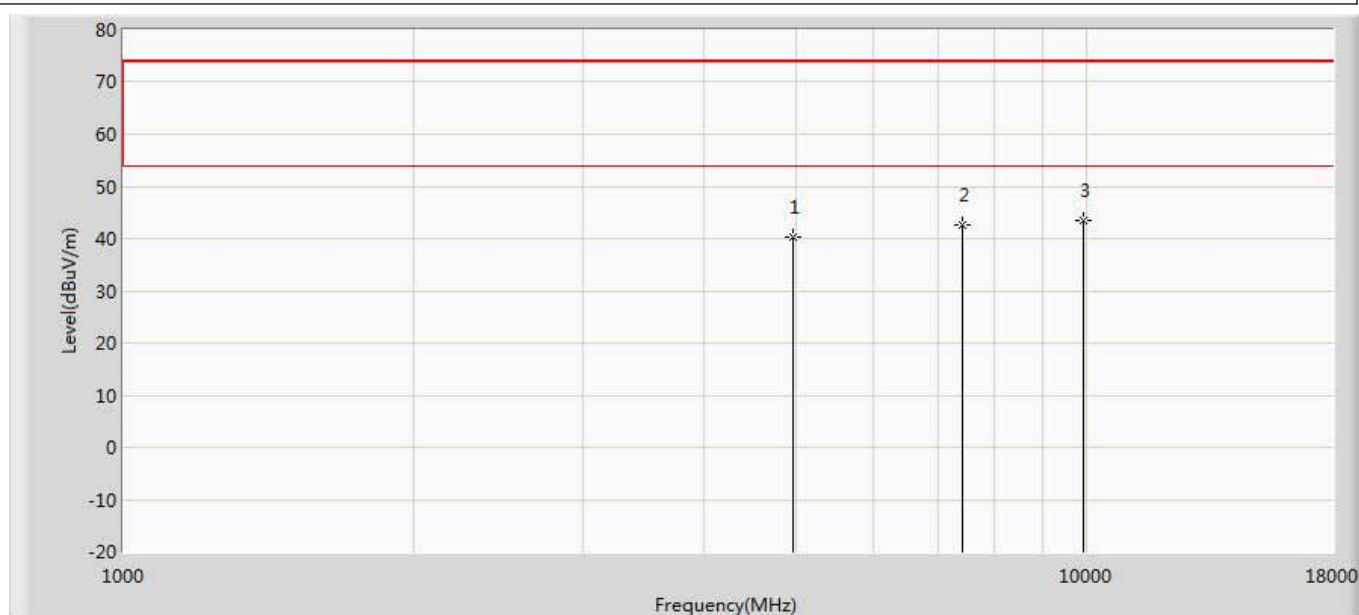


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4960.000	40.417	41.565	-33.583	74.000	-1.148	PK
2		7440.000	42.592	40.166	-31.408	74.000	2.426	PK
3	*	9920.000	43.395	38.141	-30.605	74.000	5.253	PK

Site: AC5	Time: 2018/11/16 - 14:43
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ-BT Module	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2402MHz by 2DH5	

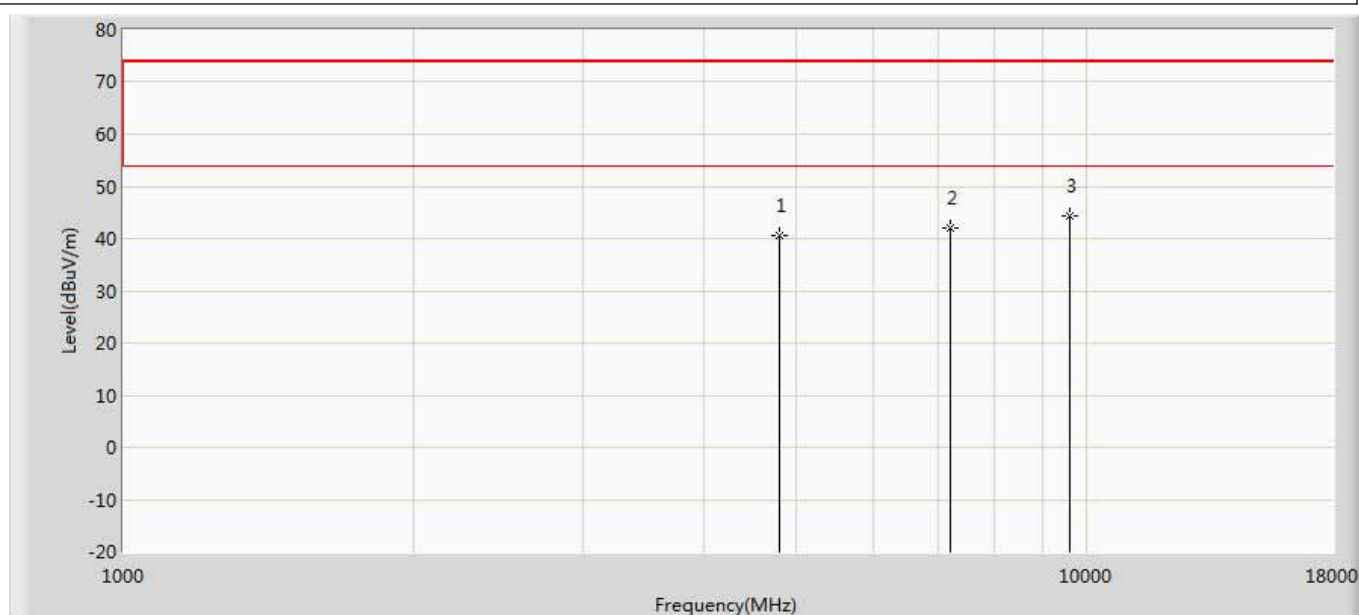


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4804.000	40.494	42.217	-33.506	74.000	-1.723	PK
2		7206.000	42.146	40.227	-31.854	74.000	1.919	PK
3	*	9608.000	44.206	39.307	-29.794	74.000	4.899	PK

Site: AC5	Time: 2018/11/16 - 14:43
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ-BT Module	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2402MHz by 2DH5	

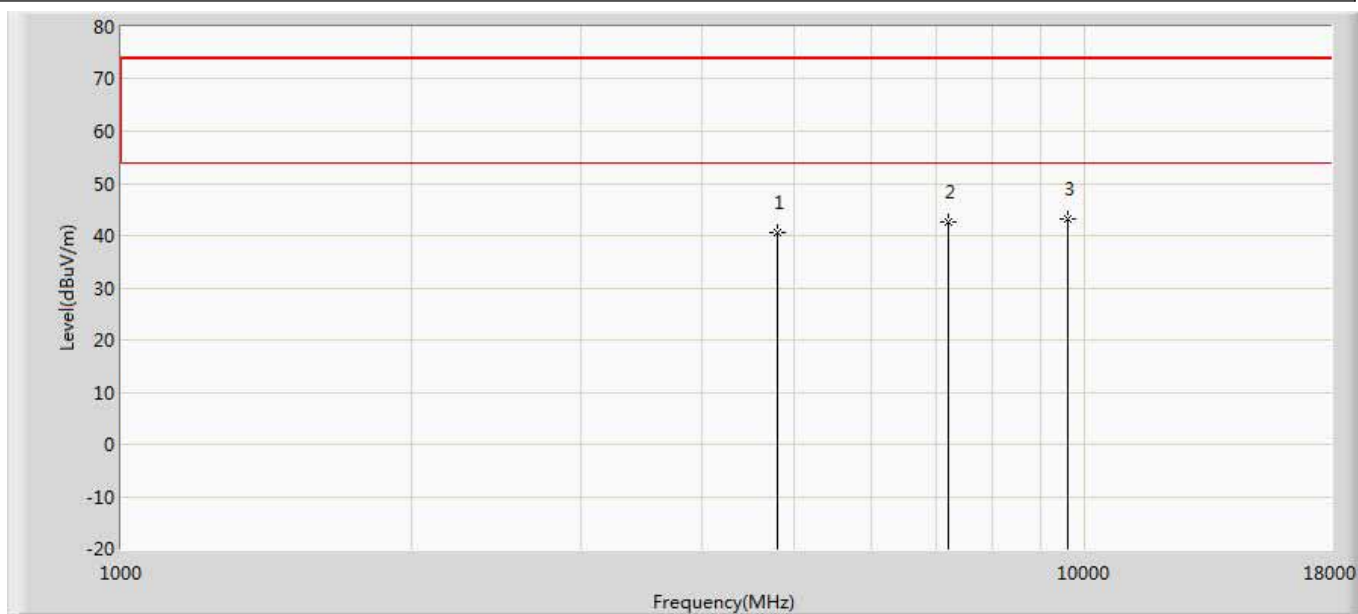


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4804.000	40.590	42.313	-33.410	74.000	-1.723	PK
2		7206.000	42.621	40.702	-31.379	74.000	1.919	PK
3	*	9608.000	43.276	38.377	-30.724	74.000	4.899	PK

Site: AC5	Time: 2018/11/16 - 14:44
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ-BT Module	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2441MHz by 2DH5	

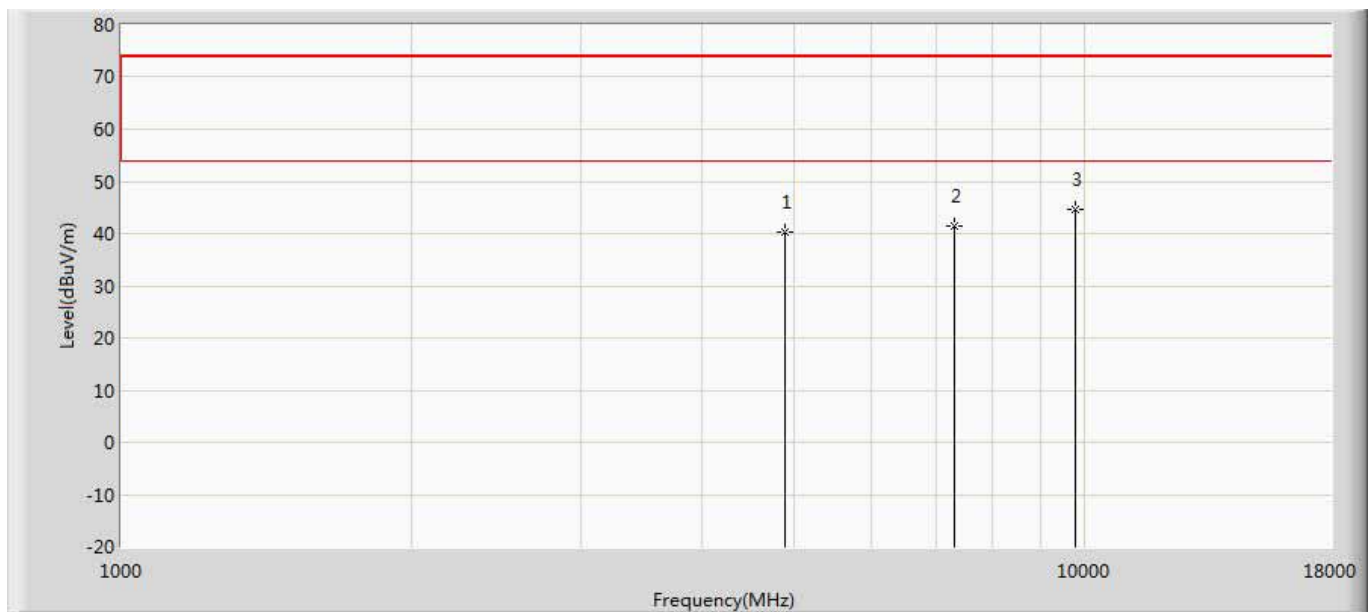


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4882.000	40.432	41.749	-33.568	74.000	-1.317	PK
2		7323.000	41.503	39.595	-32.497	74.000	1.909	PK
3	*	9764.000	44.765	38.765	-29.235	74.000	6.001	PK

Site: AC5	Time: 2018/11/16 - 14:44
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ-BT Module	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2441MHz by 2DH5	

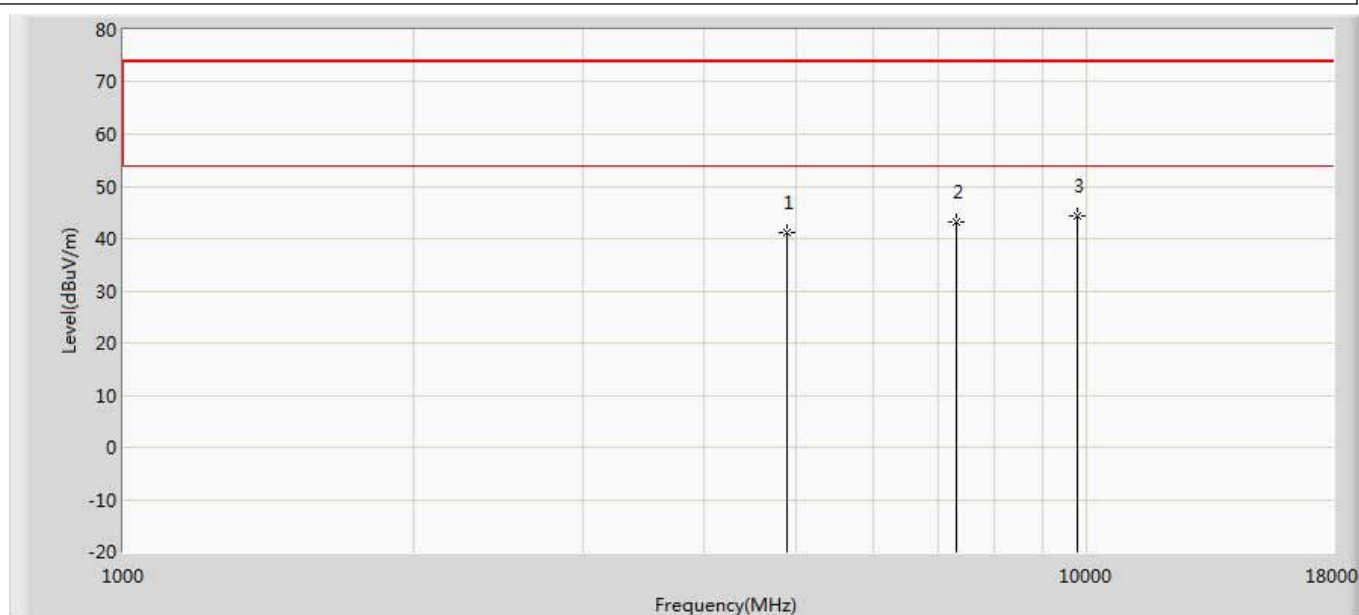


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4882.000	41.138	42.455	-32.862	74.000	-1.317	PK
2		7323.000	43.199	41.291	-30.801	74.000	1.909	PK
3	*	9764.000	44.277	38.277	-29.723	74.000	6.001	PK

Site: AC5	Time: 2018/11/16 - 14:44
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ-BT Module	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2480MHz by 2DH5	

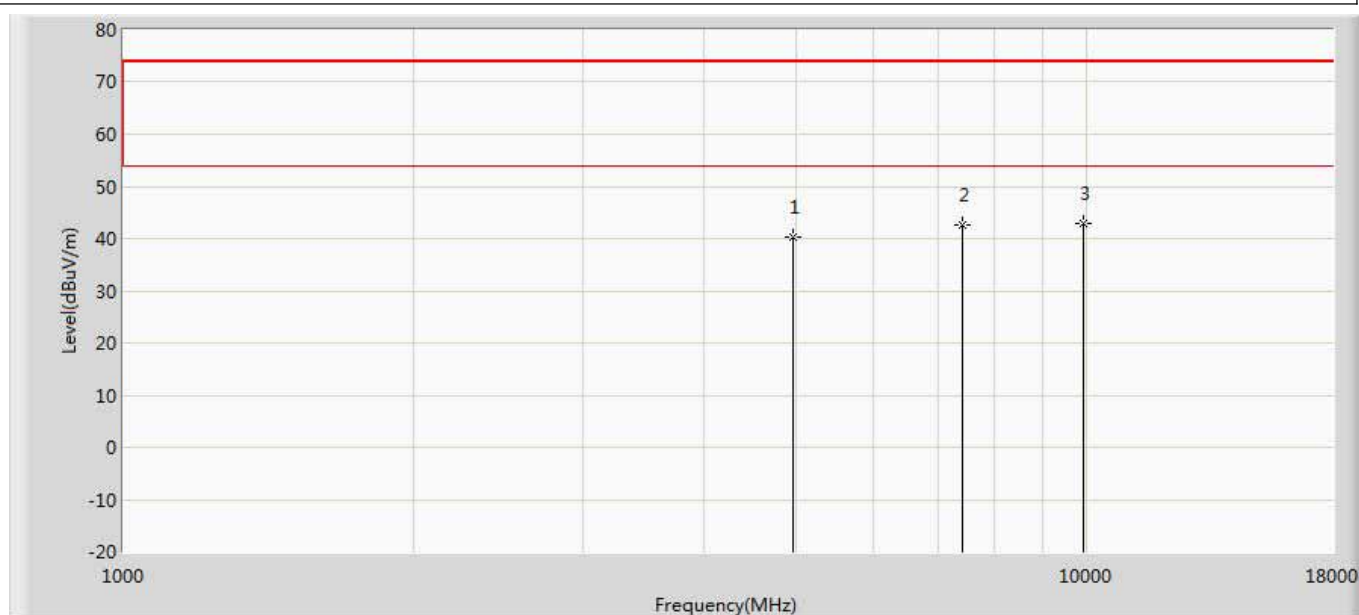


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4960.000	40.233	41.381	-33.767	74.000	-1.148	PK
2		7440.000	42.474	40.048	-31.526	74.000	2.426	PK
3	*	9920.000	42.923	37.669	-31.077	74.000	5.253	PK

Site: AC5	Time: 2018/11/16 - 14:44
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ-BT Module	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2480MHz by 2DH5	

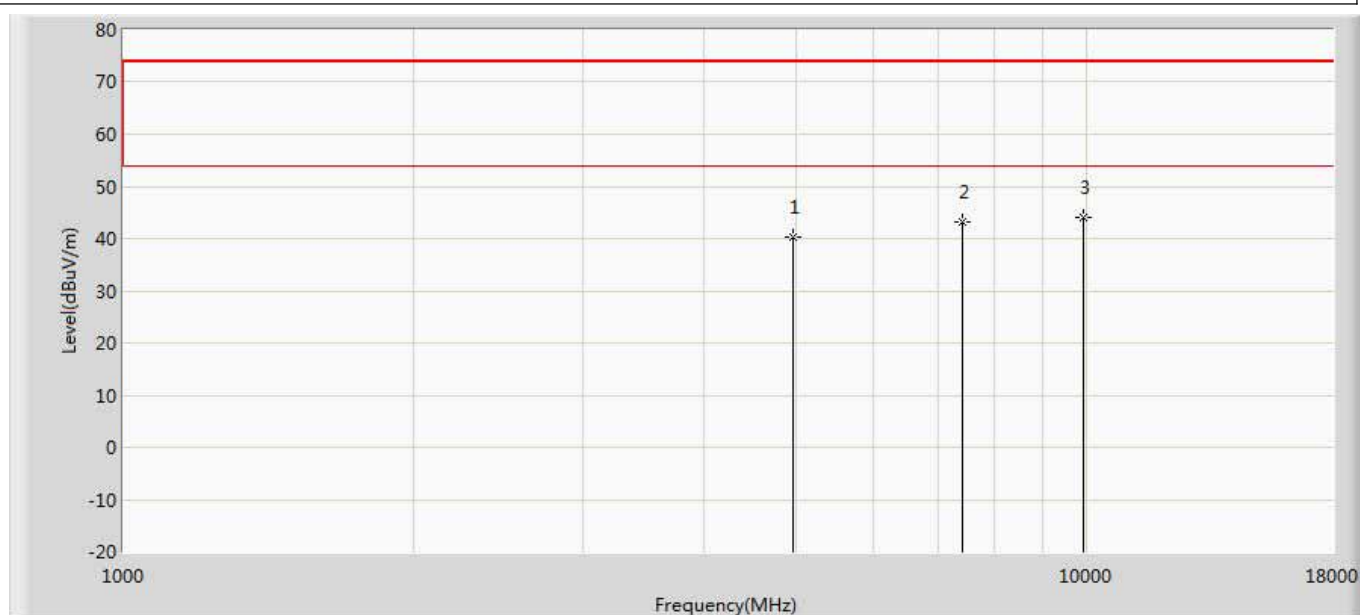


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4960.000	40.236	41.384	-33.764	74.000	-1.148	PK
2		7440.000	43.289	40.863	-30.711	74.000	2.426	PK
3	*	9920.000	44.091	38.837	-29.909	74.000	5.253	PK

Site: AC5	Time: 2018/11/16 - 14:44
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ-BT Module	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2402MHz by 3DH5	

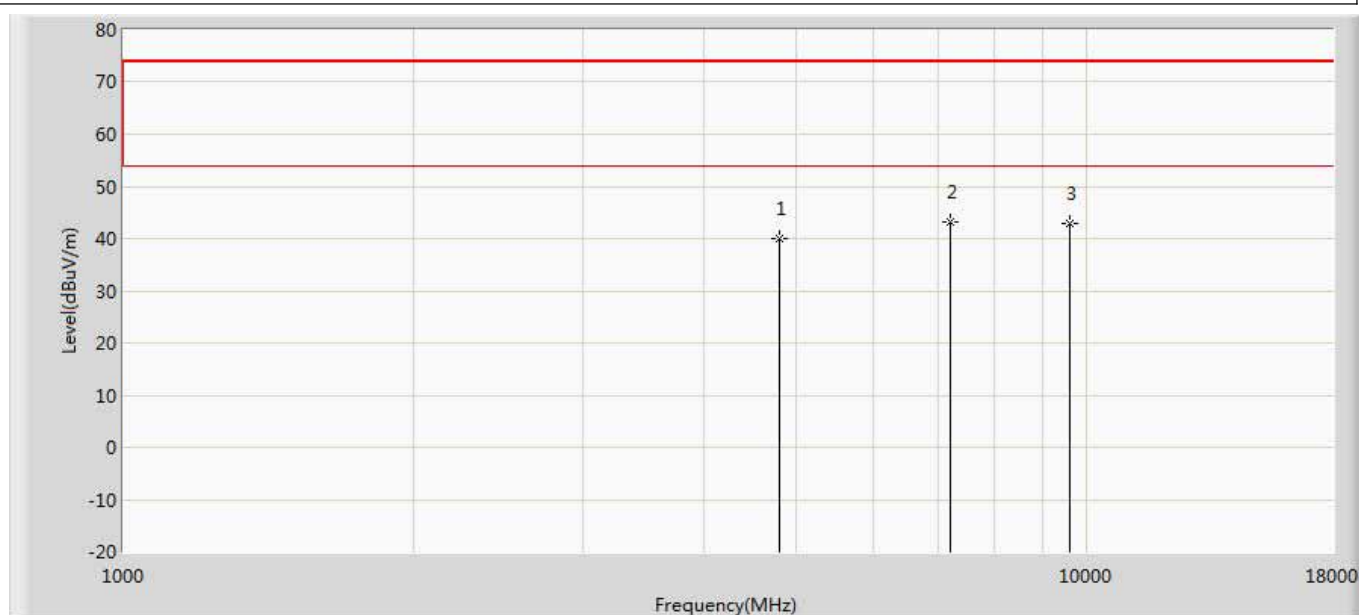


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4804.000	40.036	41.759	-33.964	74.000	-1.723	PK
2	*	7206.000	43.069	41.150	-30.931	74.000	1.919	PK
3		9608.000	42.900	38.001	-31.100	74.000	4.899	PK

Site: AC5	Time: 2018/11/16 - 14:44
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ-BT Module	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2402MHz by 3DH5	

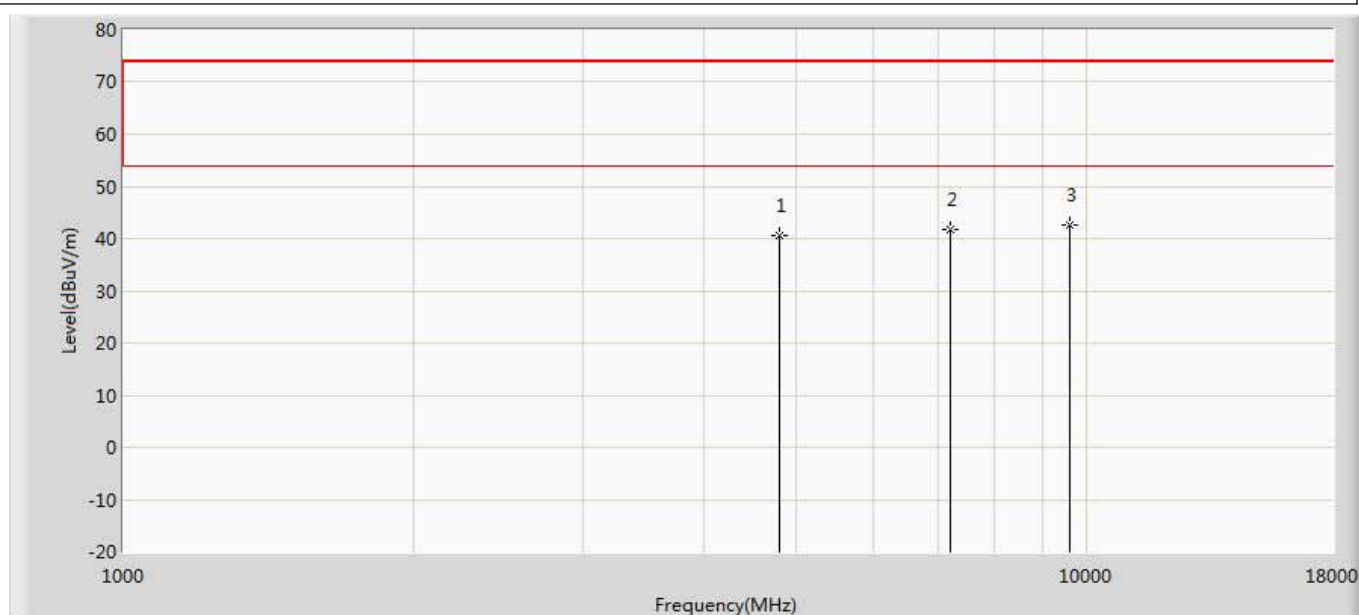


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4804.000	40.678	42.401	-33.322	74.000	-1.723	PK
2		7206.000	41.633	39.714	-32.367	74.000	1.919	PK
3	*	9608.000	42.668	37.769	-31.332	74.000	4.899	PK

Site: AC5	Time: 2018/11/16 - 14:44
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ-BT Module	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2441MHz by 3DH5	

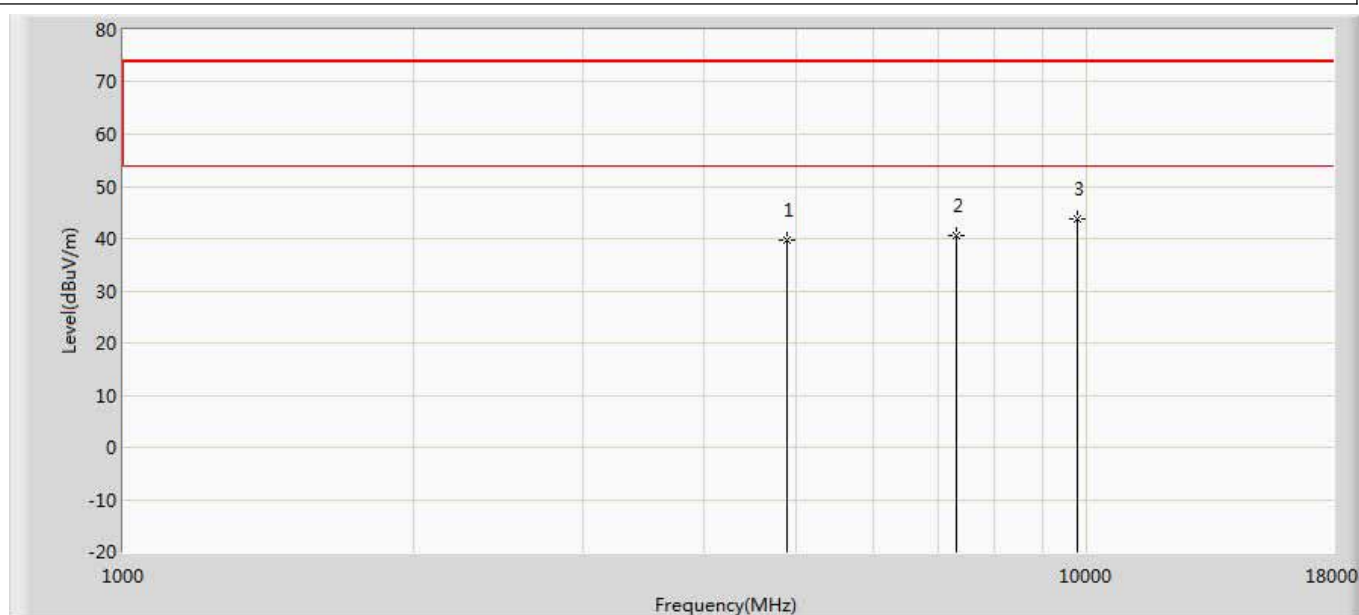


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4882.000	39.743	41.060	-34.257	74.000	-1.317	PK
2		7323.000	40.549	38.641	-33.451	74.000	1.909	PK
3	*	9764.000	43.673	37.673	-30.327	74.000	6.001	PK

Site: AC5	Time: 2018/11/16 - 14:44
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ-BT Module	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2441MHz by 3DH5	

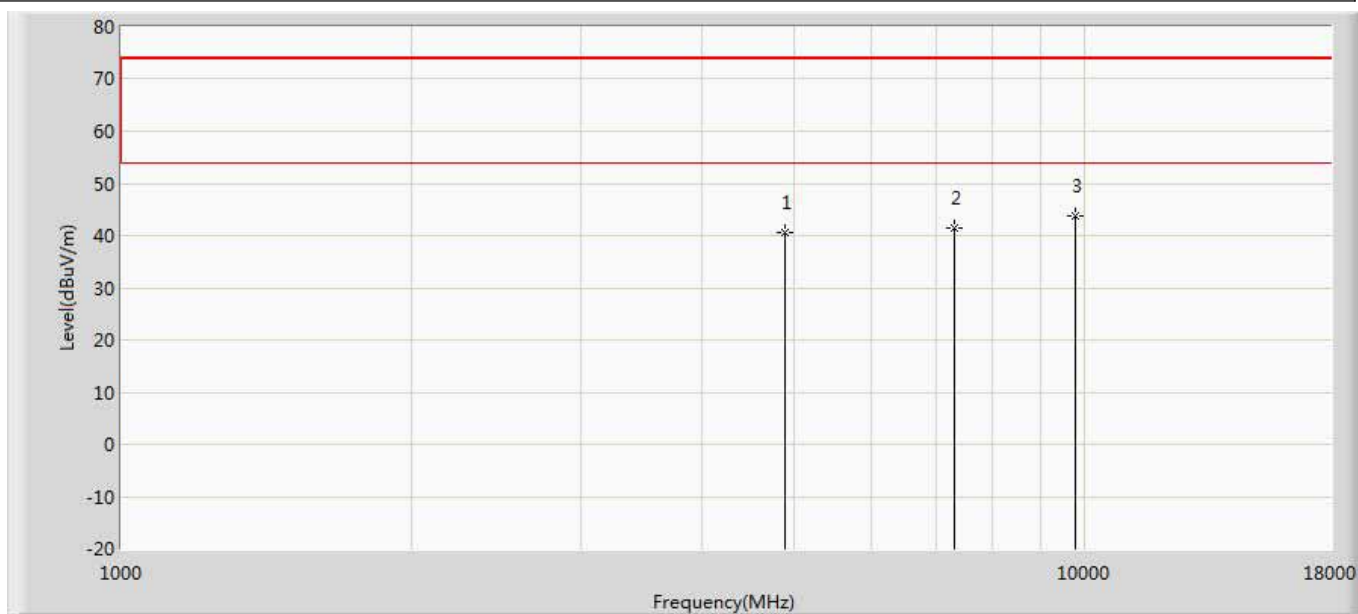


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4882.000	40.475	41.792	-33.525	74.000	-1.317	PK
2		7323.000	41.478	39.570	-32.522	74.000	1.909	PK
3	*	9764.000	43.719	37.719	-30.281	74.000	6.001	PK

Site: AC5	Time: 2018/11/16 - 14:44
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ-BT Module	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2480MHz by 3DH5	

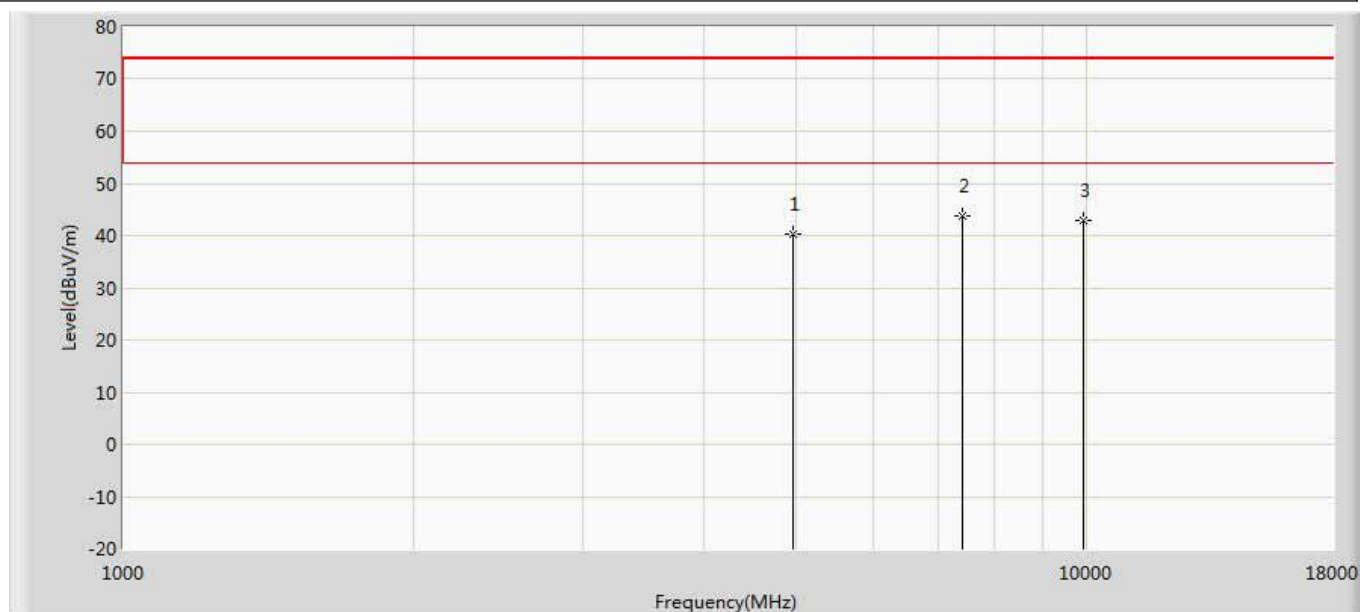

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4960.000	40.359	41.507	-33.641	74.000	-1.148	PK
2	*	7440.000	43.825	41.399	-30.175	74.000	2.426	PK
3		9920.000	42.978	37.724	-31.022	74.000	5.253	PK


Site: AC5	Time: 2018/11/16 - 14:44
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ-BT Module	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2480MHz by 3DH5	

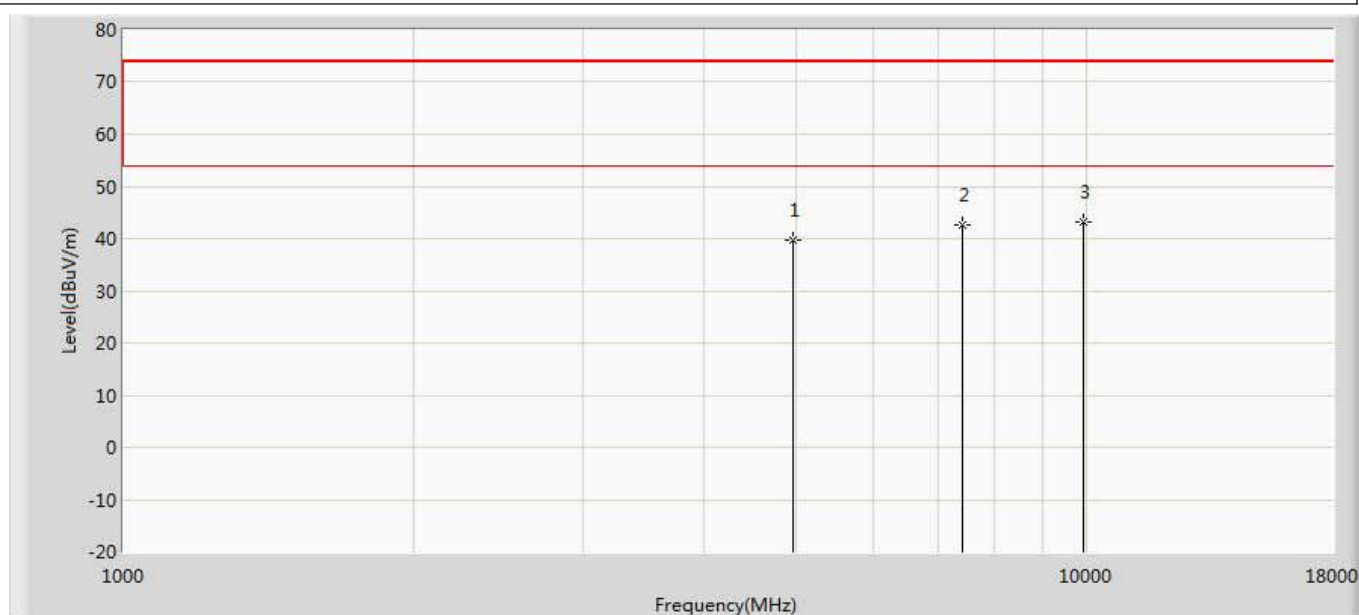

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4960.000	39.703	40.851	-34.297	74.000	-1.148	PK
2		7440.000	42.525	40.099	-31.475	74.000	2.426	PK
3	*	9920.000	43.223	37.969	-30.777	74.000	5.253	PK

The worst case of Radiated Emission below 1GHz:

Site: AC3	Time: 2018/11/22 - 23:47
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: AC3_3m (30-1000MHz)	Polarity: Horizontal
EUT: EZ-BT Module	Power: AC 120V/60Hz
Note: Mode 1	

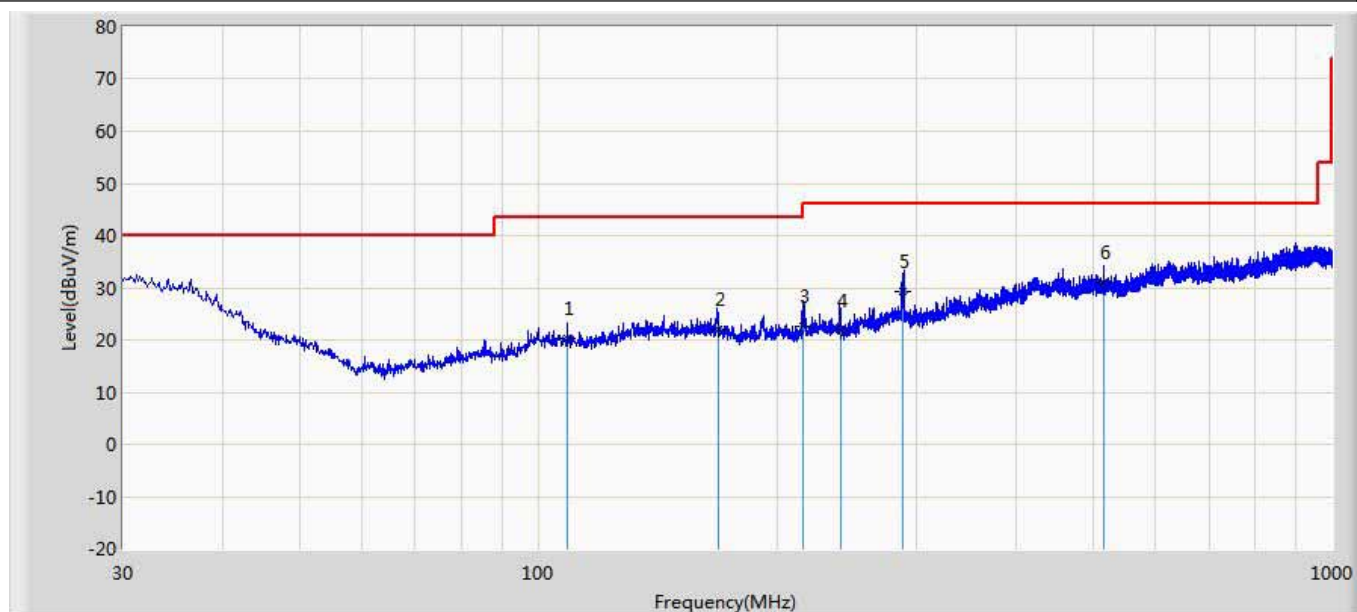


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		108.747	20.286	4.254	-23.214	43.500	16.032	QP
2		168.589	21.922	4.587	-21.578	43.500	17.335	QP
3		215.887	22.606	5.254	-20.894	43.500	17.352	QP
4		240.725	21.702	4.251	-24.298	46.000	17.451	QP
5		288.500	29.356	8.583	-16.644	46.000	20.772	QP
6	*	515.524	31.041	4.218	-14.959	46.000	26.822	QP

Note:

1. " * ", means this data is the worst emission level.
2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

Site: AC3	Time: 2018/11/22 - 23:48
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: AC3_3m (30-1000MHz)	Polarity: Vertical
EUT: EZ-BT Module	Power: AC 120V/60Hz
Note: Mode 1	

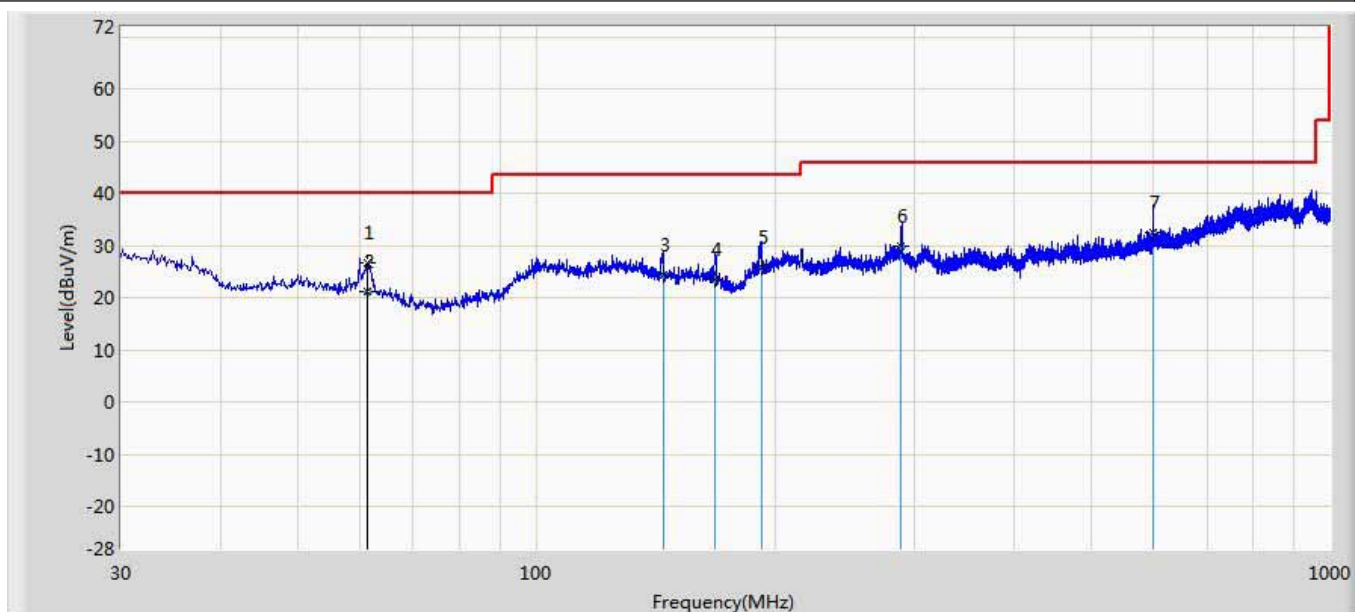

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
2		61.248	21.193	5.267	-18.807	40.000	15.926	QP
3		144.587	24.524	5.451	-18.976	43.500	19.074	QP
4		167.847	23.634	5.258	-19.866	43.500	18.376	QP
5		192.535	25.934	4.548	-17.566	43.500	21.385	QP
6		288.548	29.885	5.259	-16.115	46.000	24.625	QP
7		599.547	32.503	5.247	-13.497	46.000	27.255	QP

Note:


1. " * ", means this data is the worst emission level.
2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

5. Peak Output Power

5.1. Test Equipment

Peak Output Power / TR-8					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2018.02.04	2019.02.03
EXA Spectrum Analyzer	Keysight	N9010A	MY55370495	2018.04.09	2019.04.08
MXA Signal Analyzer	Keysight	N9020A	MY56060147	2018.04.09	2019.04.08
Temperature/Humidity Meter	zhichen	ZC1-2	TR8-TH	2018.04.10	2019.04.09
Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.					

5.2. Test Setup

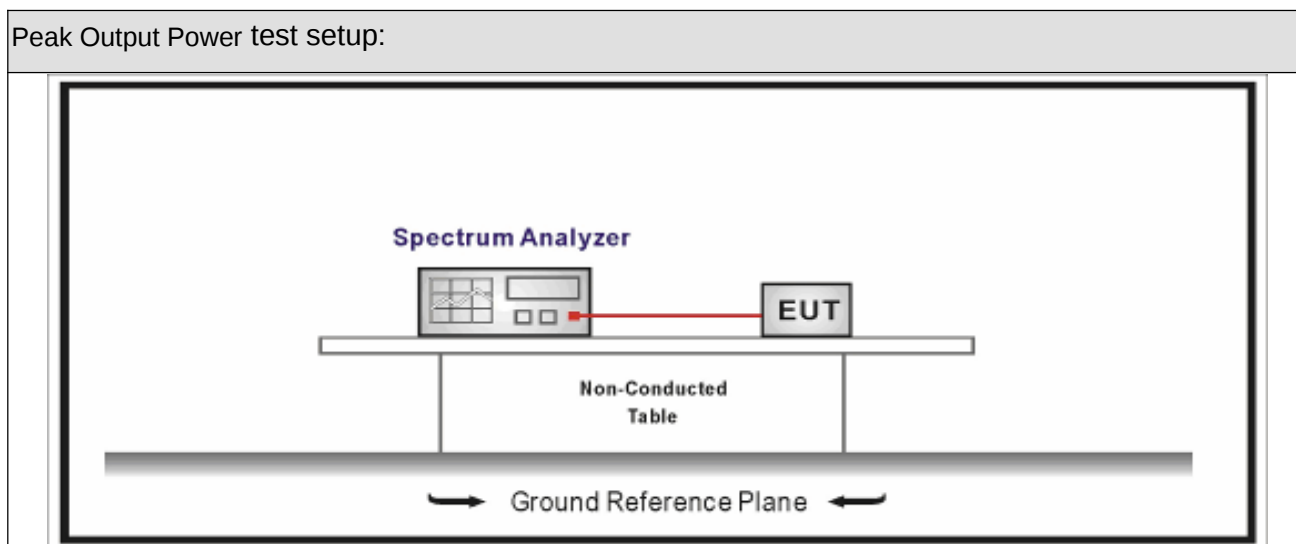

5.3. Limit

Peak Output Power	
☐	Frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.
☒	Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.
☐	For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels

6. Test Procedure

Test Method			
	References Rule	Chapter	Description
☒	ANSI C63.10	7.8.5	Output power test procedure for frequency-hopping spread-spectrum (FHSS) devices

5.4. Uncertainty

The measurement uncertainty is defined as ± 1.0 dB

5.5. Test Result

Product Name	:	EZ-BT Module	Power	:	AC 120V/60Hz
Test Mode	:	Mode 1-3	Test Site	:	TR-8
Test Date	:	2018.11.19			

Mode	Channel No.	Frequency (MHz)	Measurement Power Output (dBm)	Limit (dBm)	Result
DH5	00	2402	7.87	21.00	Pass
	39	2441	7.62	21.00	Pass
	78	2480	7.14	21.00	Pass
2DH5	00	2402	6.21	21.00	Pass
	39	2441	6.13	21.00	Pass
	78	2480	5.19	21.00	Pass
3DH5	00	2402	6.81	21.00	Pass
	39	2441	6.64	21.00	Pass
	78	2480	5.40	21.00	Pass


6. Radiated Emission Band Edge

6.1. Test Equipment

Radiated Emission(Above 1GHz) / AC-5					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
EMI Receiver	Agilent	N9038A	MY51210196	2018.07.16	2019.07.15
Pre-Amplifier	Miteq	NSP1800-25	1364185	2018.05.03	2019.05.02
DRG Horn Antenna	ETS-Lindgren	3117	00167055	2018.07.12	2019.07.11
Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	294	2018.09.18	2019.09.17
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C1	2018.02.28	2019.02.27
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C2	2018.02.28	2019.02.27
Temperature/Humidity Meter	Zhichen	ZC1-2	AC5-TH	2018.01.05	2019.01.04

6.2. Test Setup

Above 1GHz Test Setup:

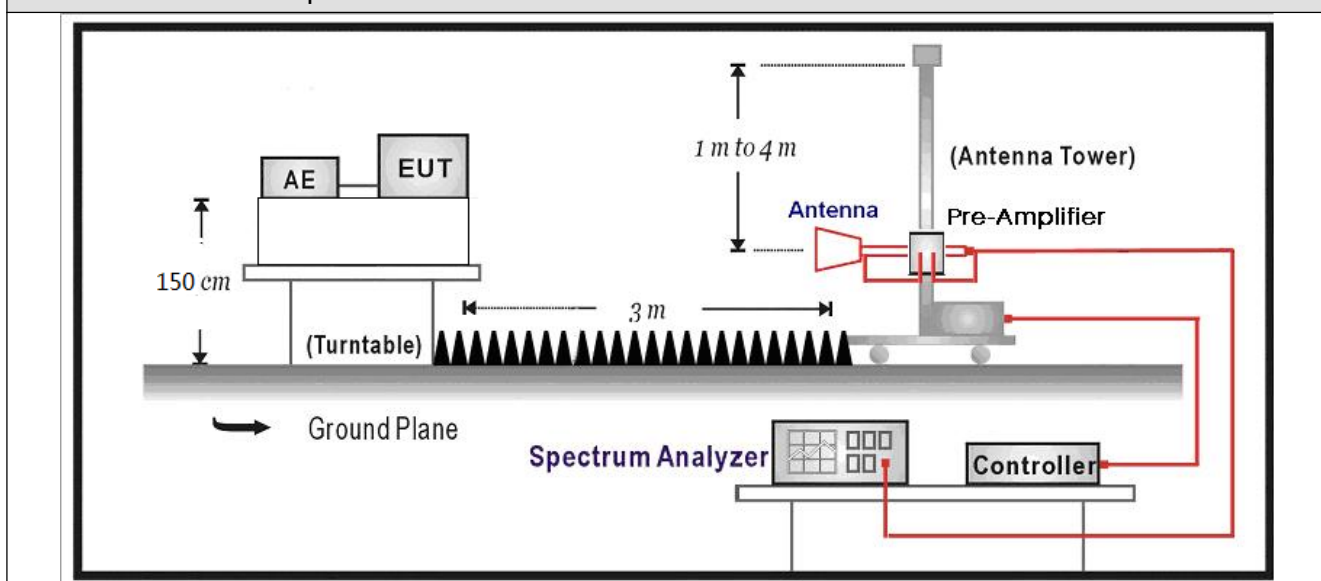

6.3. Limit

Band edge Limit				
Frequency bands (MHz)	Detector	Limit (dB μ V/m)	RBW (MHz)	Distance (m)
2310-2390	PK	74	1	3
2483.5-2500	AV	54	1	3

Note: The field strength of emissions appearing within these frequency bands shall not exceed the limits.

6.4. Test Procedure

Test Method			
	References Rule	Chapter	Description
☒	DA 00-705	N/A	duty cycle correction factor
☒	ANSI C63.10	6.10	Band-edge testing
	☒ ANSI C63.10	6.10.5	Restricted-band band-edge measurements
	☐ ANSI C63.10	6.10.6	Marker-delta method
☐	ANSI C63.10	6.4	Radiated emissions from unlicensed wireless devices below 30 MHz
☐	ANSI C63.10	6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz
☒	ANSI C63.10	6.6	Radiated emissions from unlicensed wireless devices above 1 GHz

6.5. Uncertainty

The measurement uncertainty above 1G is defined as ± 3.9 dB
 below 1G is defined as ± 3.8 dB

6.6. Duty Factor

Test Mode	Tx On (ms)	Tx Off (ms)	Reduced VBW (Hz)	Tx On + Tx Off (ms)	Duty Cycle
1Mbps(GFSK_DH5)	-	-	10	-	100%
2Mbps(Pi/4DQPSK_DH5)	-	-	10	-	100%
3Mbps(8DPSK_DH5)	-	-	10	-	100%

1Mbps(GFSK_DH5)



2Mbps(Pi/4DQPSK_DH5)




3Mbps(8DPSK_DH5)




6.7. Test Result

Site: AC5	Time: 2018/11/16 - 10:40
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ-BT Module	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2402MHz by DH5	

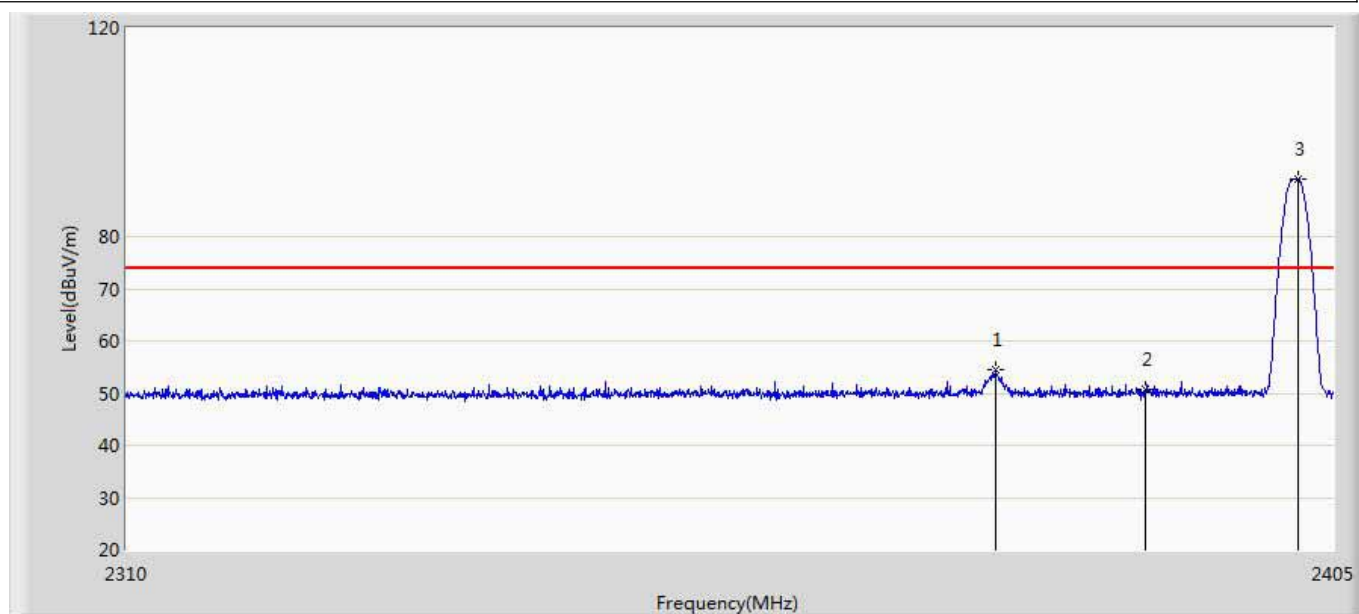


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2378.020	53.209	17.554	-20.791	74.000	35.655	PK
2		2390.000	50.585	14.903	-23.415	74.000	35.682	PK
3	*	2402.198	91.097	55.384	17.097	74.000	35.714	PK

Site: AC5	Time: 2018/11/16 - 11:11
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ-BT Module	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2402MHz by DH5	

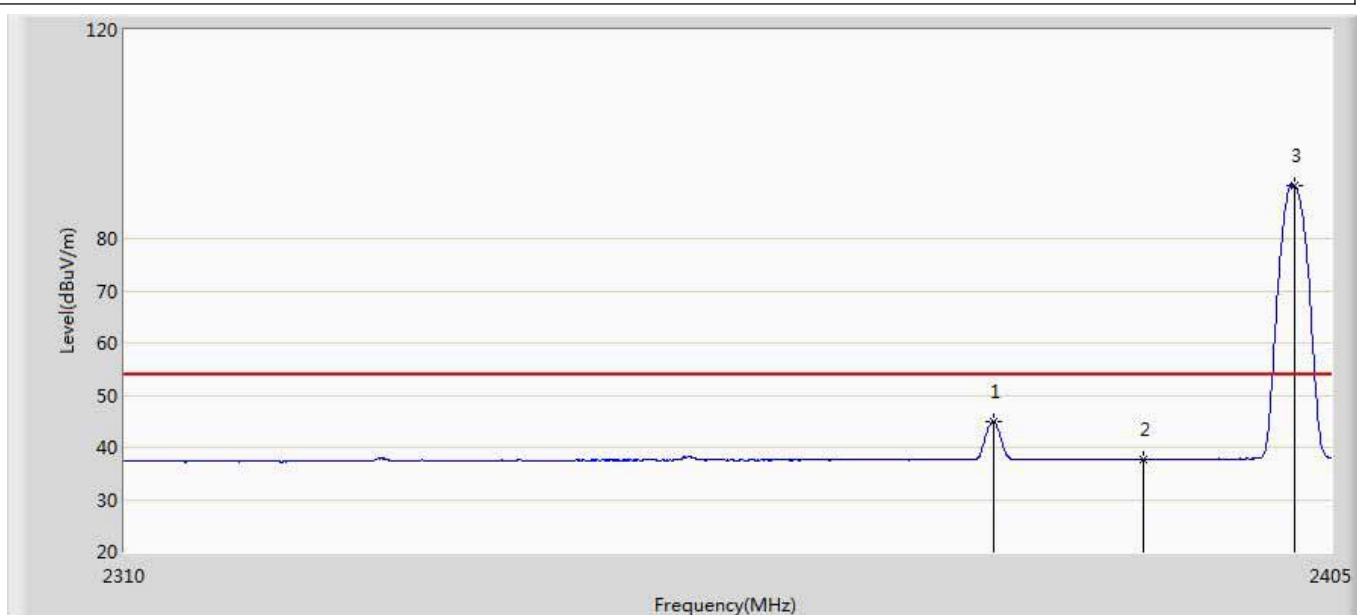


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2378.115	44.915	9.260	-9.085	54.000	35.655	AV
2		2390.000	37.694	2.012	-16.306	54.000	35.682	AV
3	*	2402.055	90.066	54.353	36.066	54.000	35.712	AV

Site: AC5	Time: 2018/11/16 - 11:13
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ-BT Module	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2402MHz by DH5	

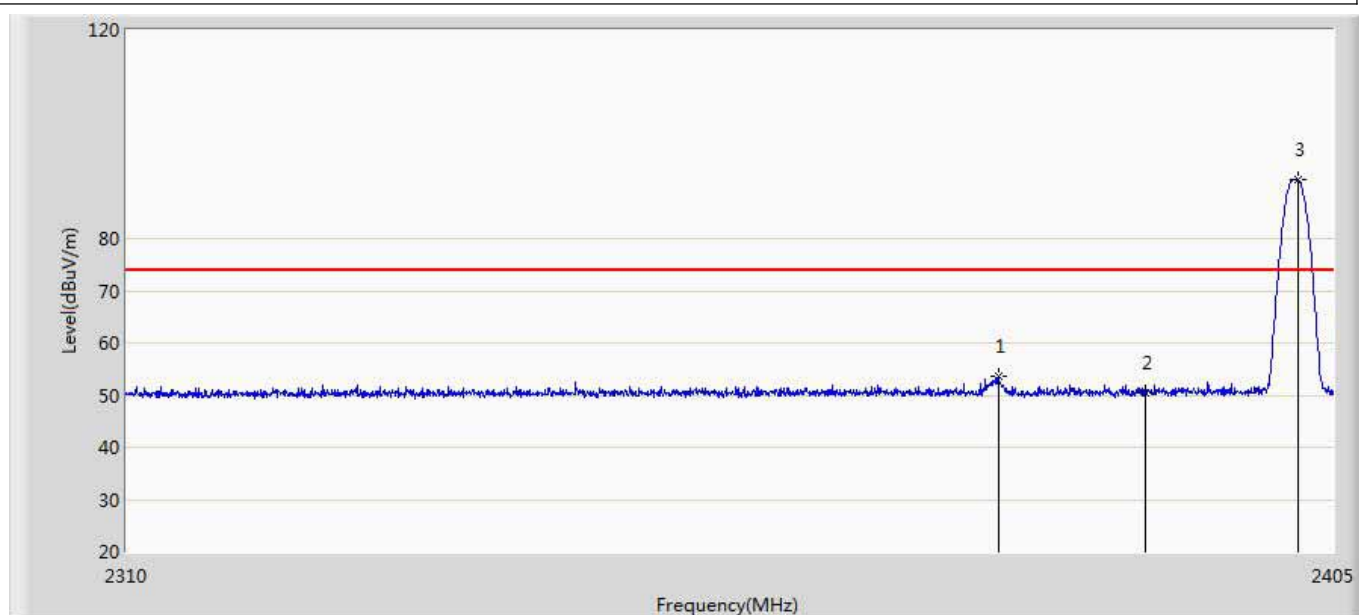


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2378.258	53.547	17.891	-20.453	74.000	35.656	PK
2		2390.000	50.578	14.896	-23.422	74.000	35.682	PK
3	*	2402.198	91.244	55.531	17.244	74.000	35.714	PK

Site: AC5	Time: 2018/11/16 - 11:15
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ-BT Module	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2402MHz by DH5	

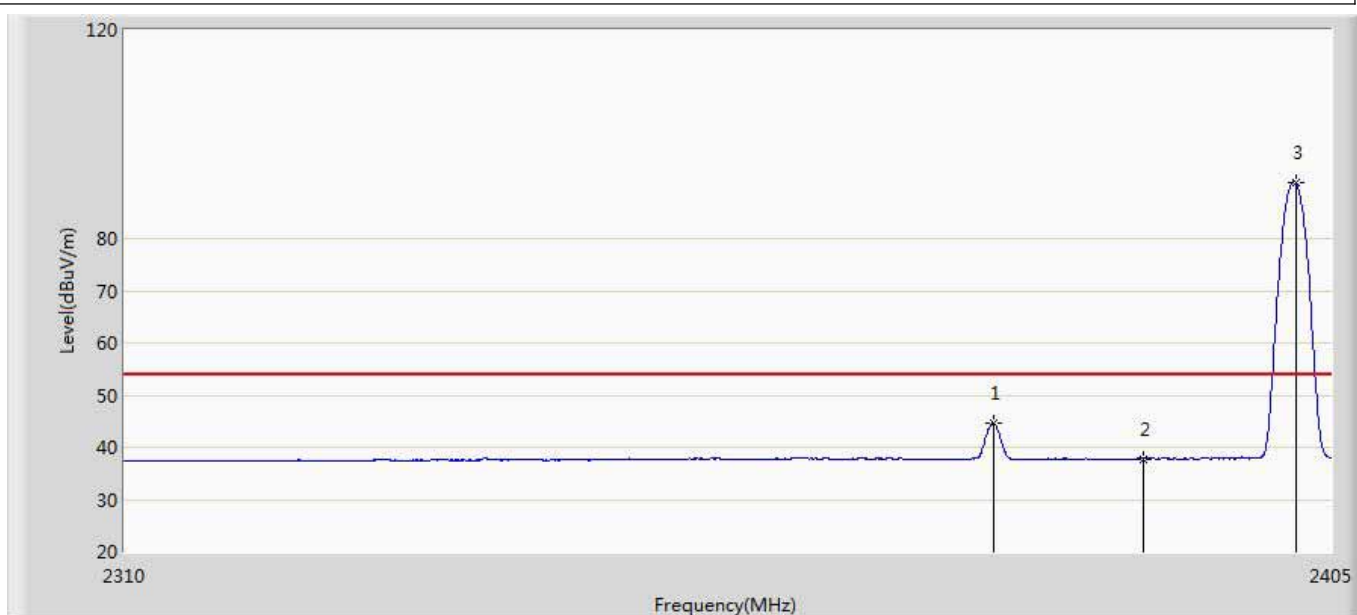


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2378.115	44.493	8.838	-9.507	54.000	35.655	AV
2		2390.000	37.799	2.117	-16.201	54.000	35.682	AV
3	*	2402.198	90.680	54.967	36.680	54.000	35.714	AV

Site: AC5	Time: 2018/11/16 - 11:21
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ-BT Module	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2480MHz by DH5	

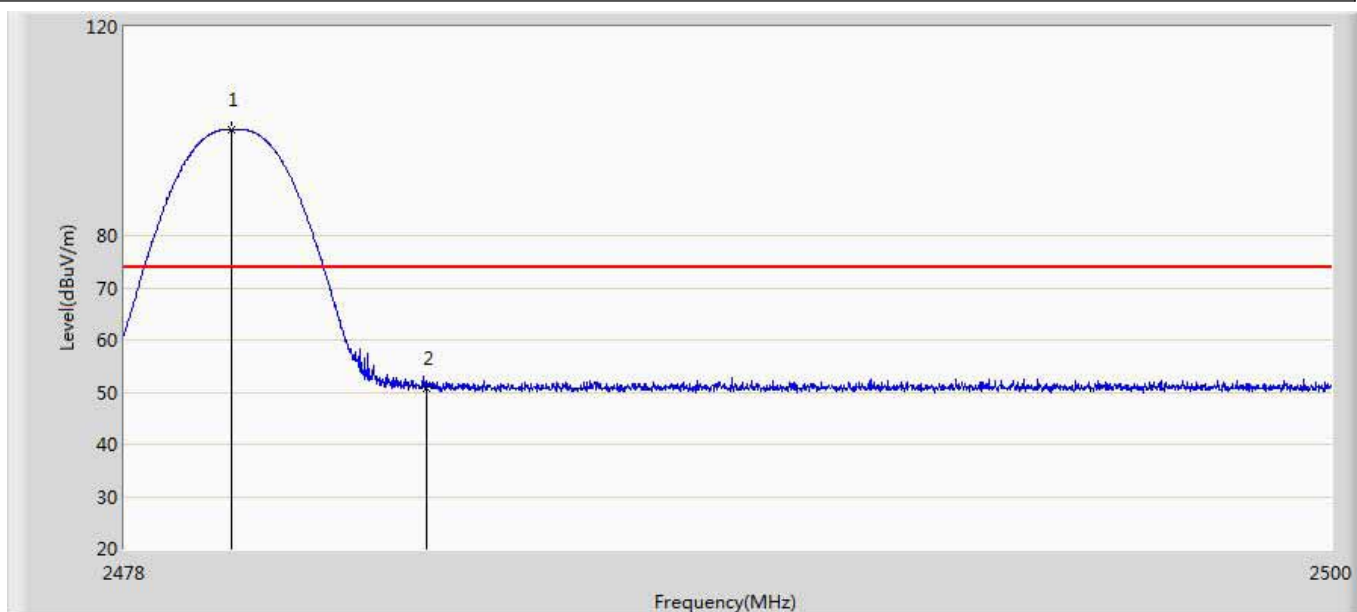


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2479.947	100.262	64.396	26.262	74.000	35.866	PK
2		2483.500	50.664	14.772	-23.336	74.000	35.891	PK

Site: AC5	Time: 2018/11/16 - 11:24
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ-BT Module	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2480MHz by DH5	

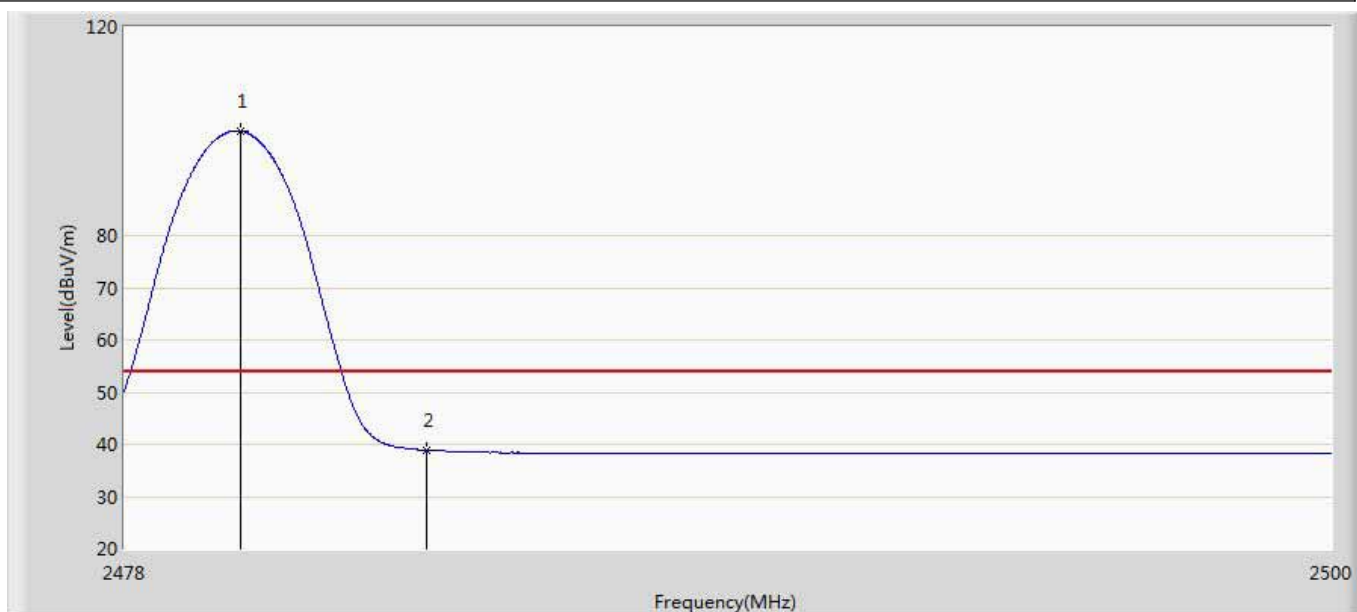


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2480.112	100.021	64.154	46.021	54.000	35.867	AV
2		2483.500	38.775	2.883	-15.225	54.000	35.891	AV

Site: AC5	Time: 2018/11/16 - 11:26
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ-BT Module	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2480MHz by DH5	

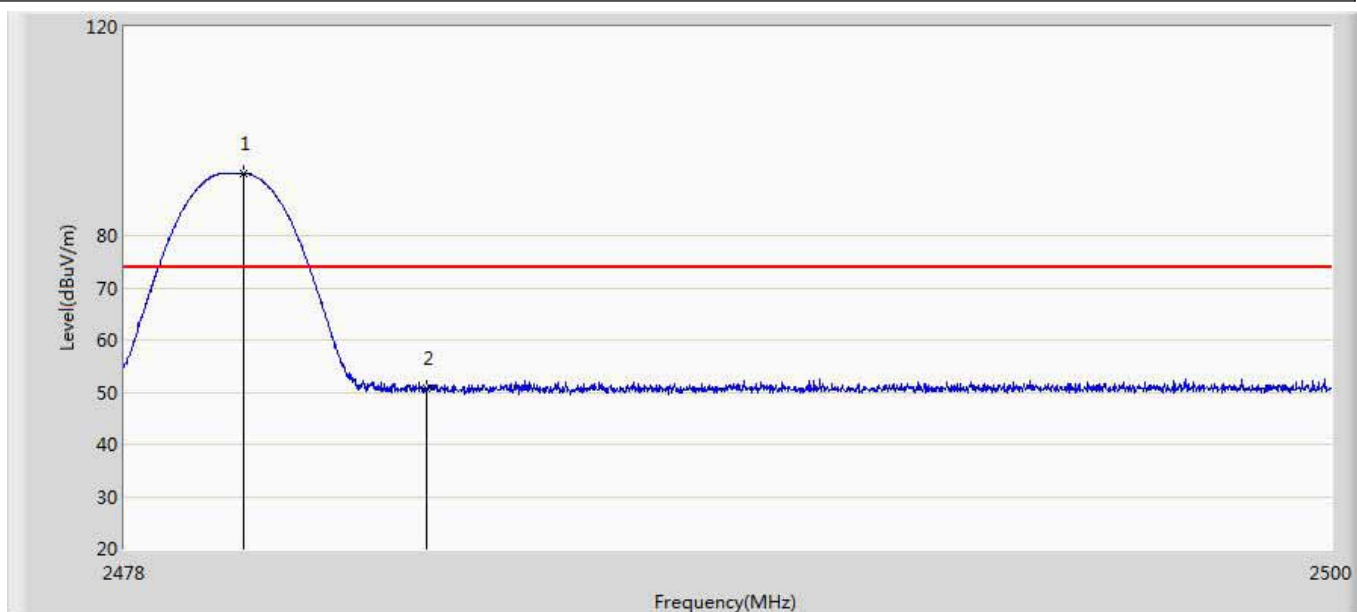


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2480.178	91.969	56.101	17.969	74.000	35.867	PK
2		2483.500	50.729	14.837	-23.271	74.000	35.891	PK

Site: AC5	Time: 2018/11/16 - 11:28
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ-BT Module	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2480MHz by DH5	

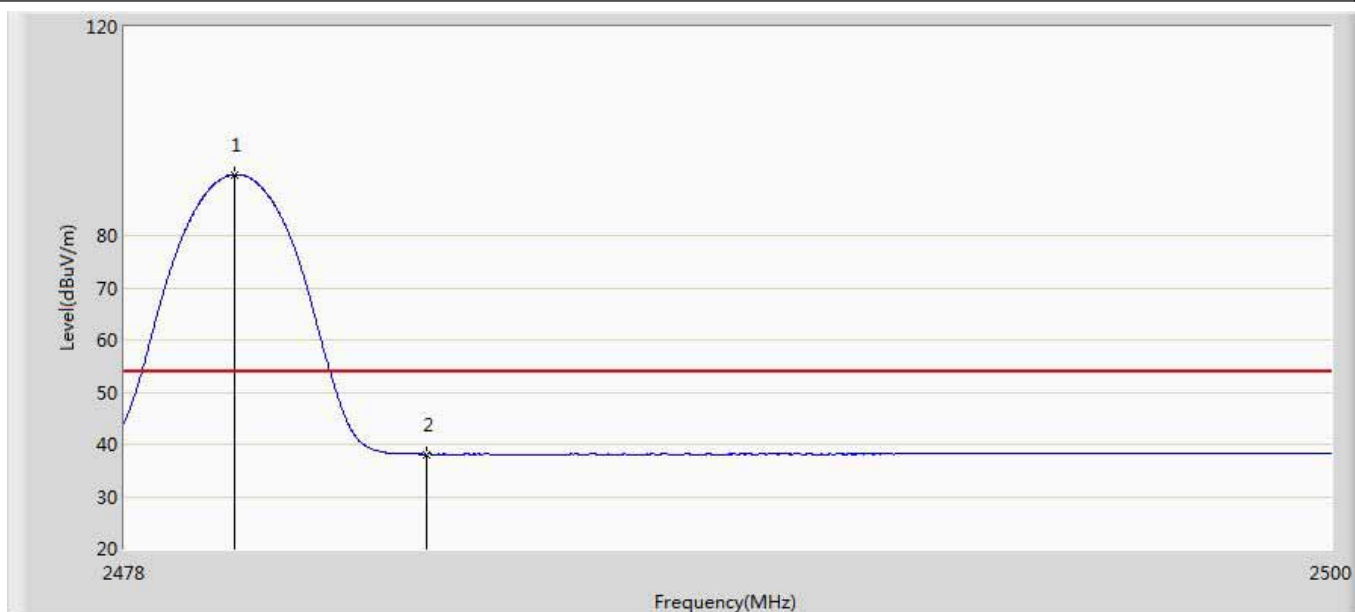


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2480.013	91.716	55.850	37.716	54.000	35.866	AV
2		2483.500	38.114	2.222	-15.886	54.000	35.891	AV

Site: AC5	Time: 2018/11/16 - 11:30
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ-BT Module	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2402MHz by 2DH5	

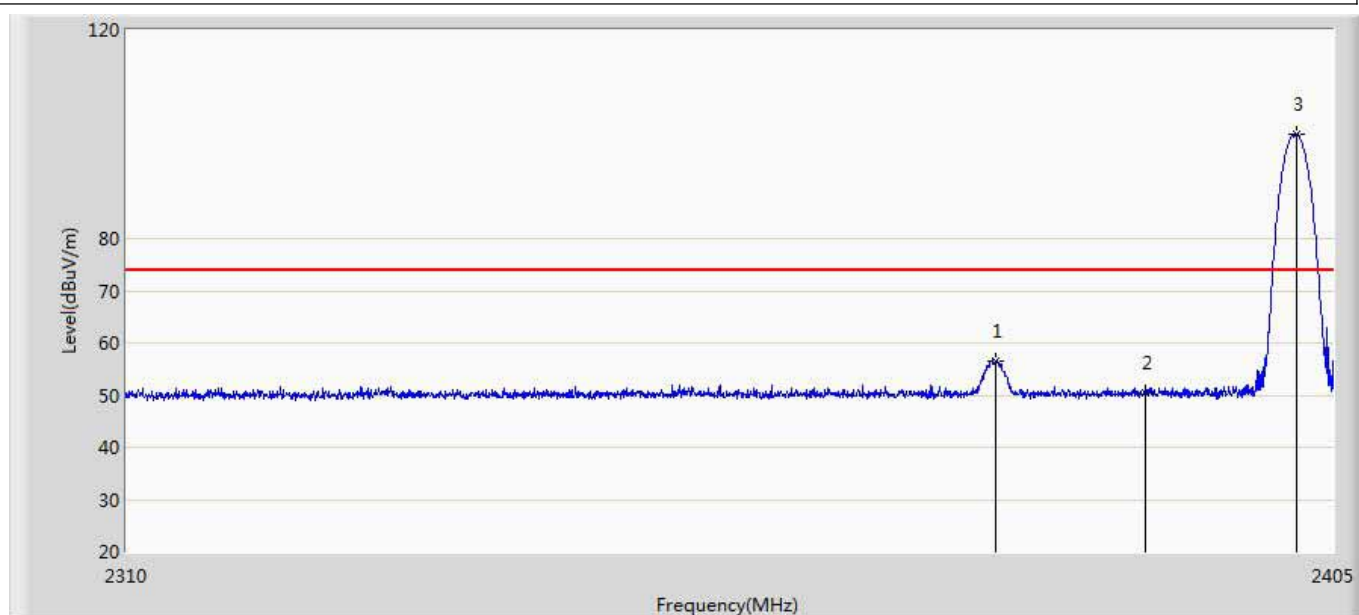


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2378.115	56.509	20.854	-17.491	74.000	35.655	PK
2		2390.000	50.373	14.691	-23.627	74.000	35.682	PK
3	*	2402.055	100.006	64.293	26.006	74.000	35.712	PK

Site: AC5	Time: 2018/11/16 - 11:32
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ-BT Module	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2402MHz by 2DH5	

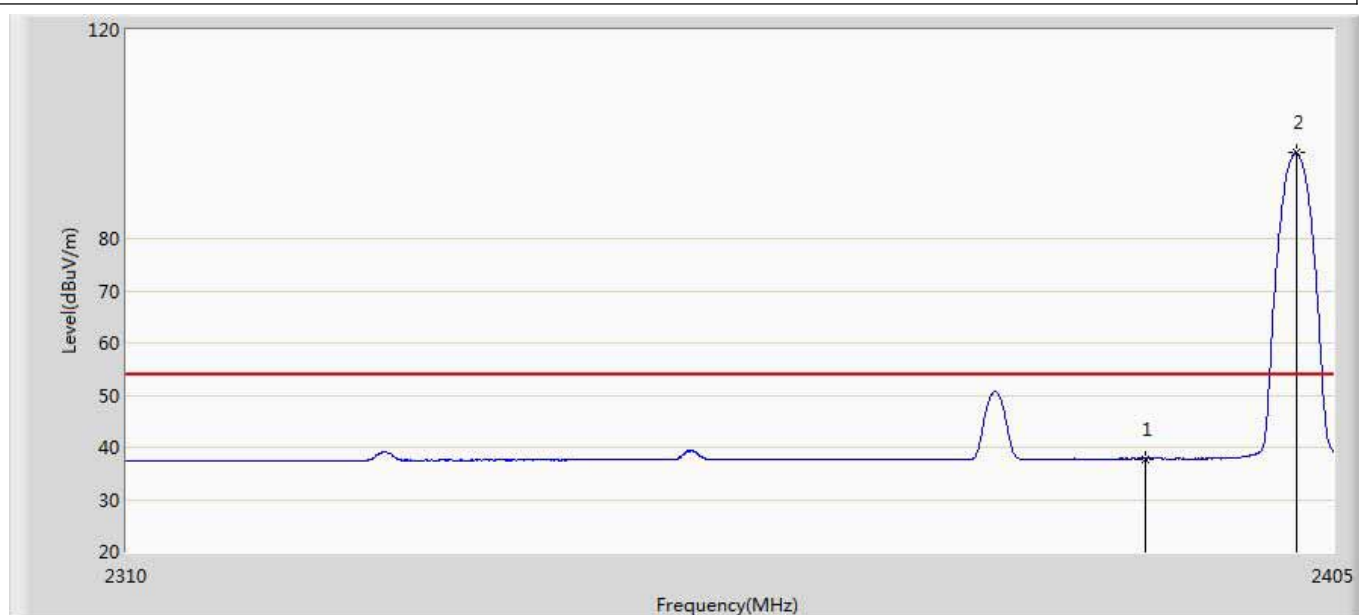


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	37.802	2.120	-16.198	54.000	35.682	AV
2	*	2402.055	96.521	60.808	42.521	54.000	35.712	AV

Site: AC5	Time: 2018/11/16 - 11:34
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ-BT Module	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2402MHz by 2DH5	

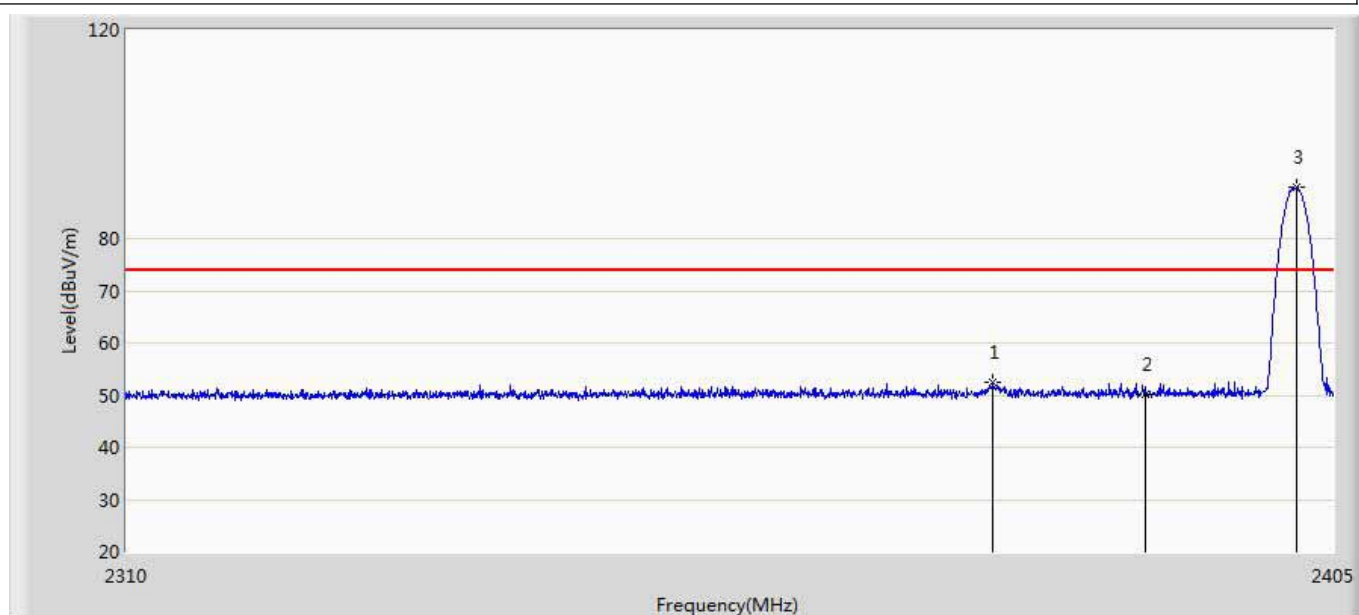


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2377.830	52.511	16.856	-21.489	74.000	35.655	PK
2		2390.000	50.253	14.571	-23.747	74.000	35.682	PK
3	*	2402.103	89.757	54.044	15.757	74.000	35.713	PK

Site: AC5	Time: 2018/11/16 - 11:35
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ-BT Module	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2402MHz by 2DH5	

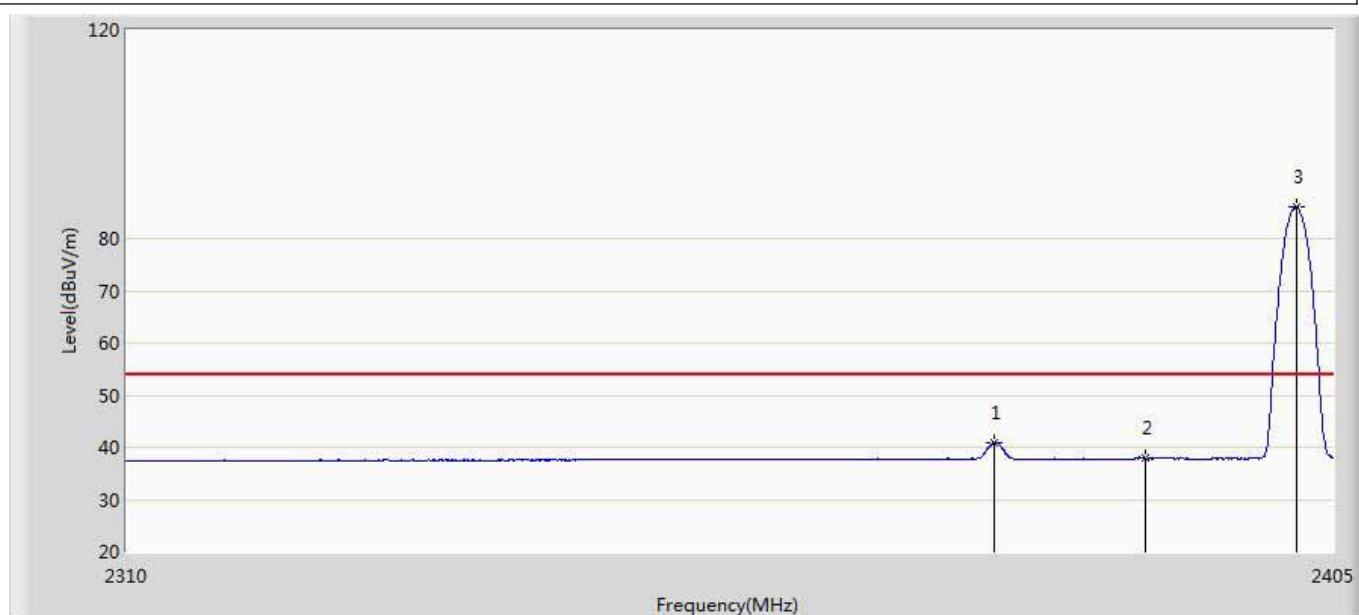


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2377.972	40.999	5.344	-13.001	54.000	35.655	AV
2		2390.000	37.865	2.183	-16.135	54.000	35.682	AV
3	*	2402.055	86.150	50.437	32.150	54.000	35.712	AV

Site: AC5	Time: 2018/11/16 - 11:38
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ-BT Module	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2480MHz by 2DH5	

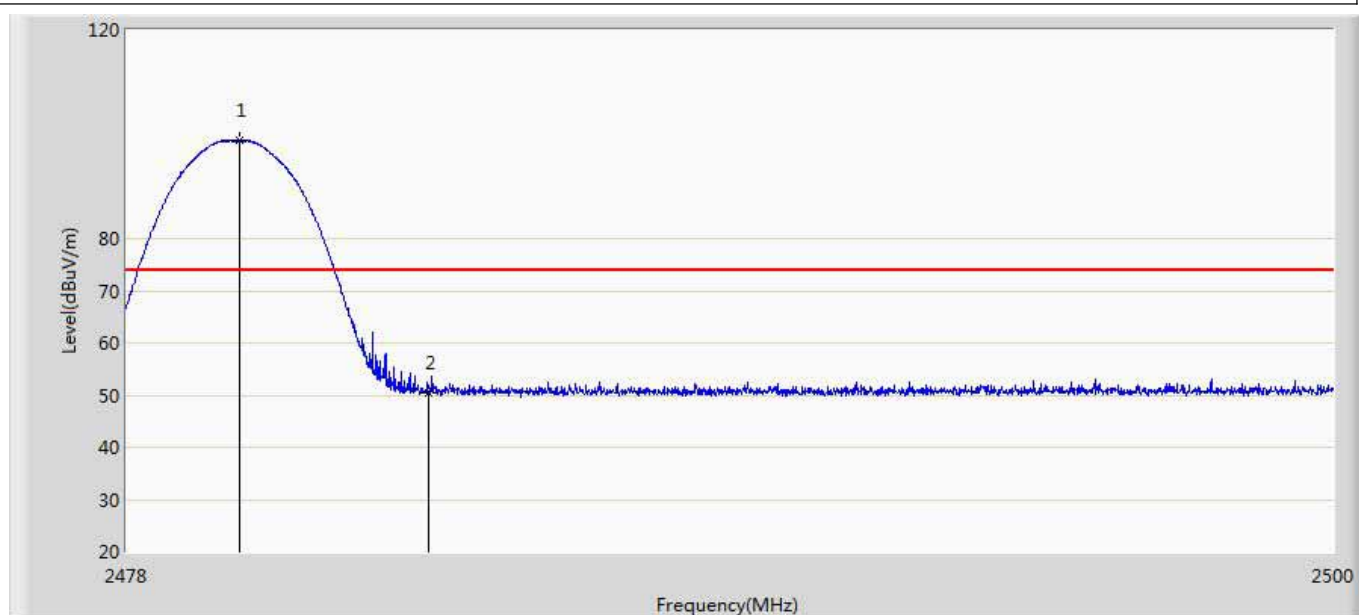


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2480.046	98.816	62.949	24.816	74.000	35.866	PK
2		2483.500	50.413	14.521	-23.587	74.000	35.891	PK

Site: AC5	Time: 2018/11/16 - 11:41
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ-BT Module	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2480MHz by 2DH5	

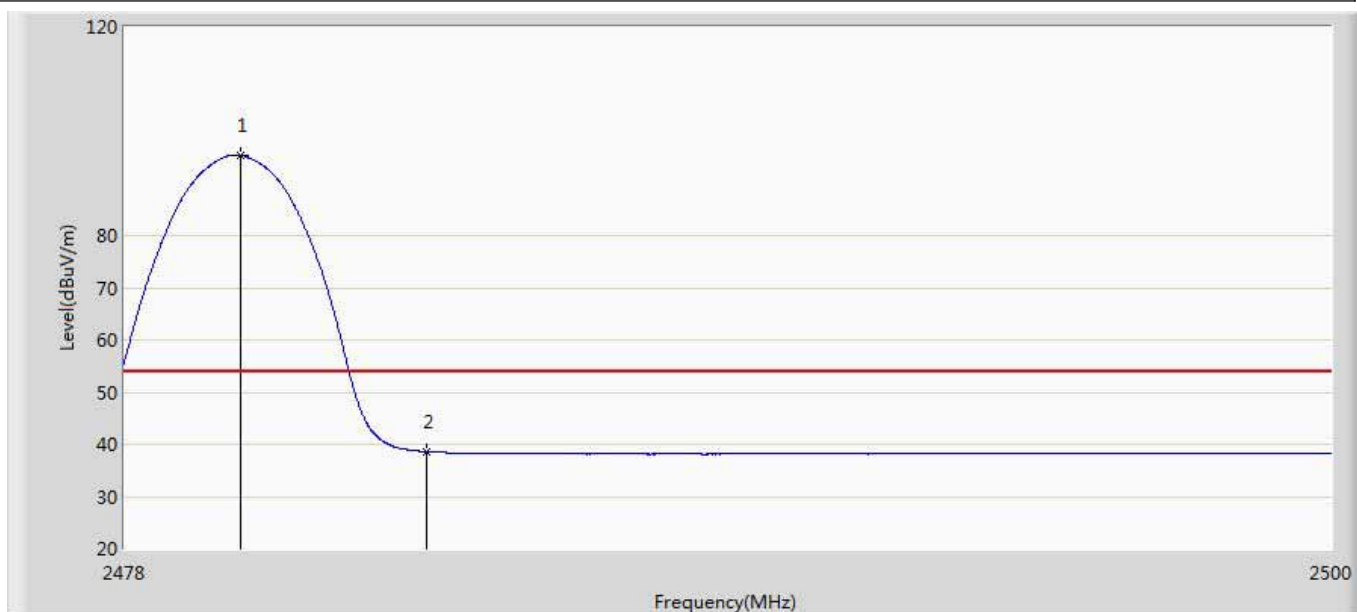


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2480.112	95.387	59.520	41.387	54.000	35.867	AV
2		2483.500	38.629	2.737	-15.371	54.000	35.891	AV

Site: AC5	Time: 2018/11/16 - 11:42
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ-BT Module	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2480MHz by 2DH5	

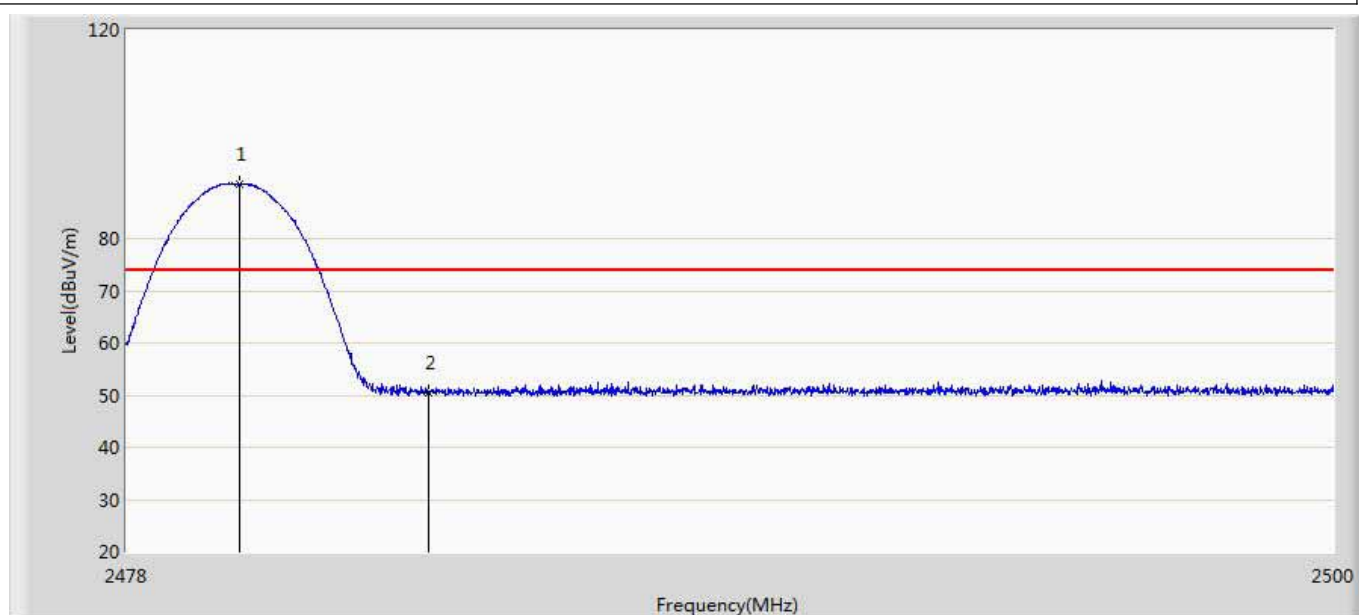


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2480.046	90.401	54.534	16.401	74.000	35.866	PK
2		2483.500	50.556	14.664	-23.444	74.000	35.891	PK

Site: AC5	Time: 2018/11/16 - 11:44
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ-BT Module	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2480MHz by 2DH5	

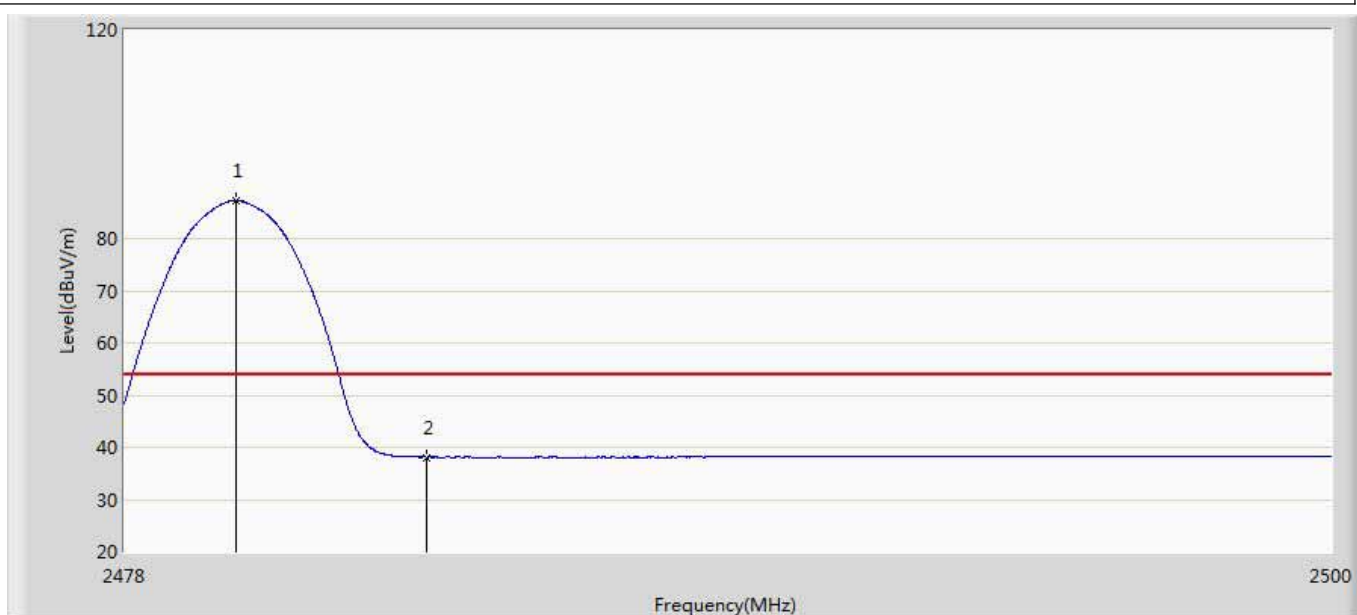


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2480.024	87.244	51.377	33.244	54.000	35.866	AV
2		2483.500	38.094	2.202	-15.906	54.000	35.891	AV

Site: AC5	Time: 2018/11/16 - 13:11
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ-BT Module	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2402MHz by 3DH5	

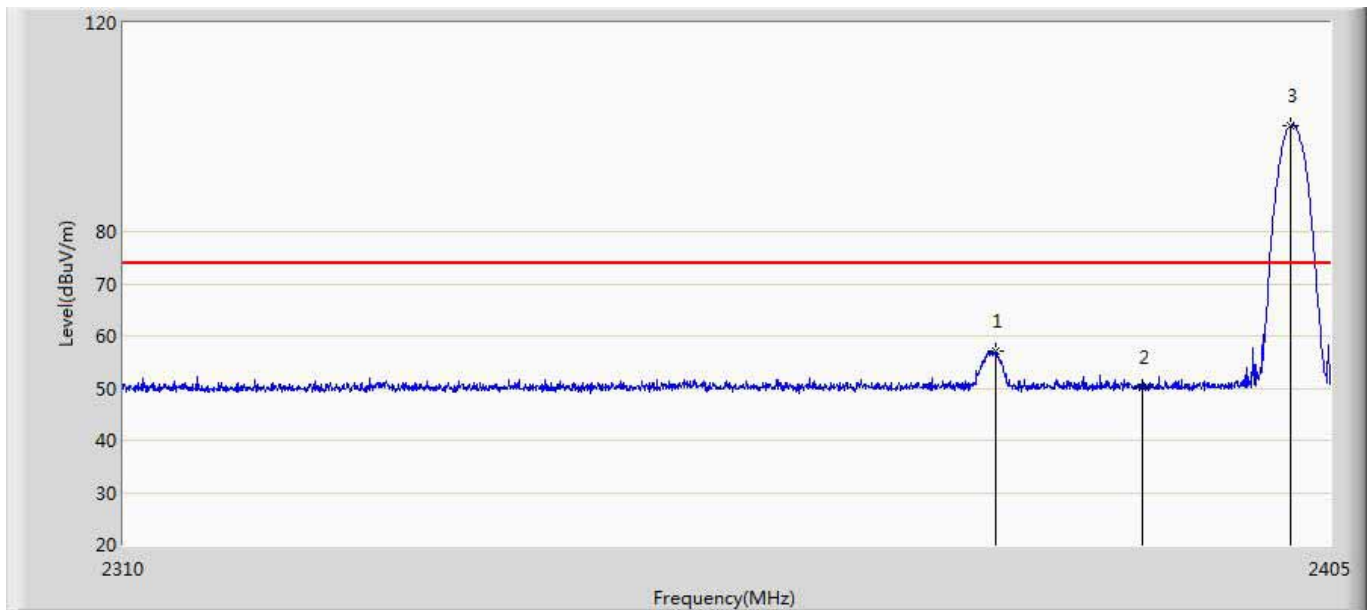


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2378.258	56.746	21.090	-17.254	74.000	35.656	PK
2		2390.000	50.227	14.545	-23.773	74.000	35.682	PK
3	*	2401.865	100.313	64.601	26.313	74.000	35.712	PK

Site: AC5	Time: 2018/11/16 - 13:14
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ-BT Module	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2402MHz by 3DH5	

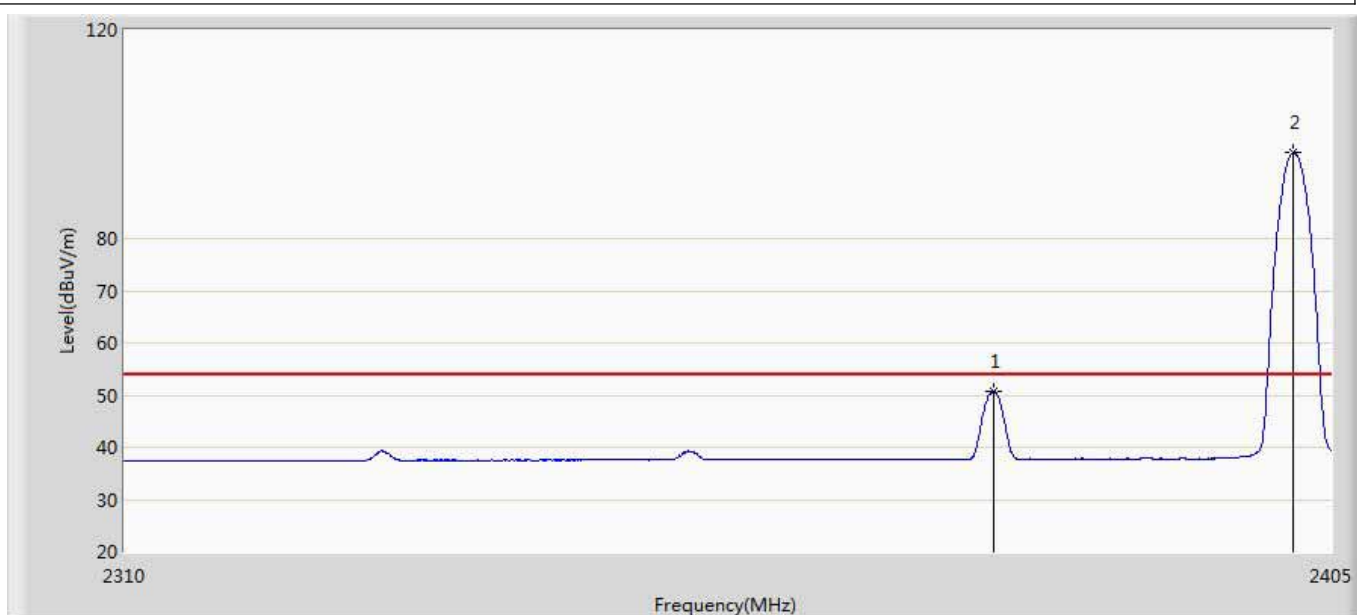


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2378.115	50.776	15.121	-3.224	54.000	35.655	AV
2	*	2401.913	96.452	60.740	42.452	54.000	35.712	AV

Site: AC5	Time: 2018/11/16 - 13:16
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ-BT Module	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2402MHz by 3DH5	

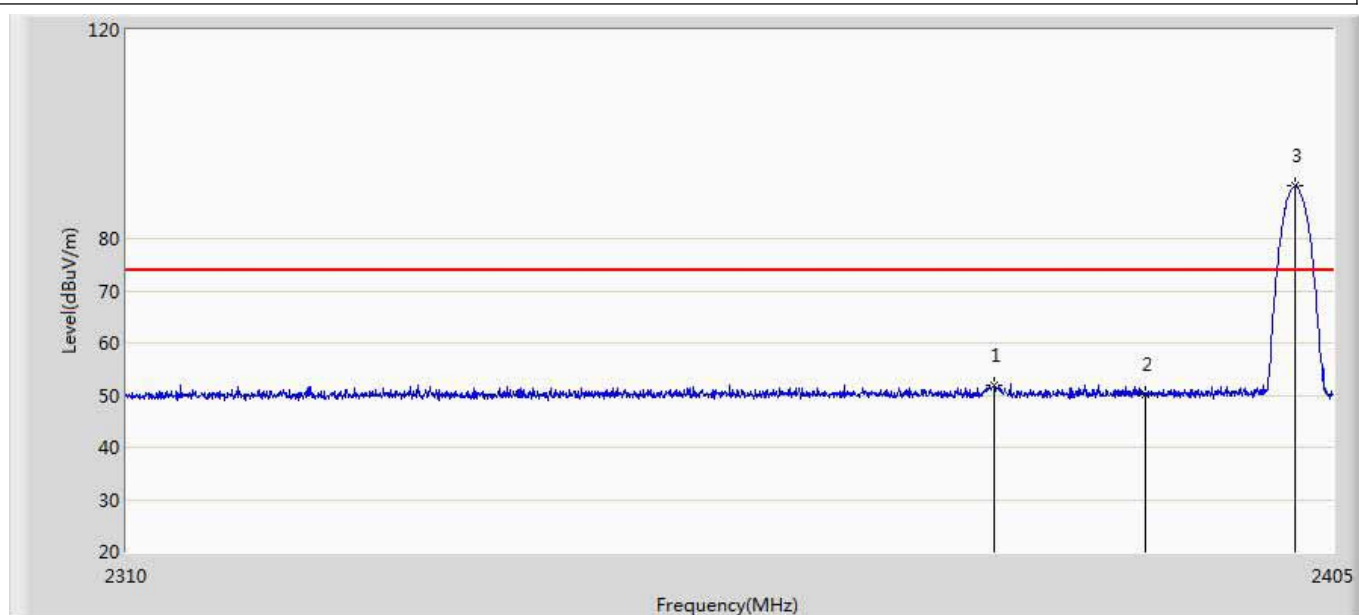


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2377.925	51.997	16.342	-22.003	74.000	35.655	PK
2		2390.000	50.126	14.444	-23.874	74.000	35.682	PK
3	*	2401.913	90.035	54.323	16.035	74.000	35.712	PK

Site: AC5	Time: 2018/11/16 - 13:17
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ-BT Module	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2402MHz by 3DH5	

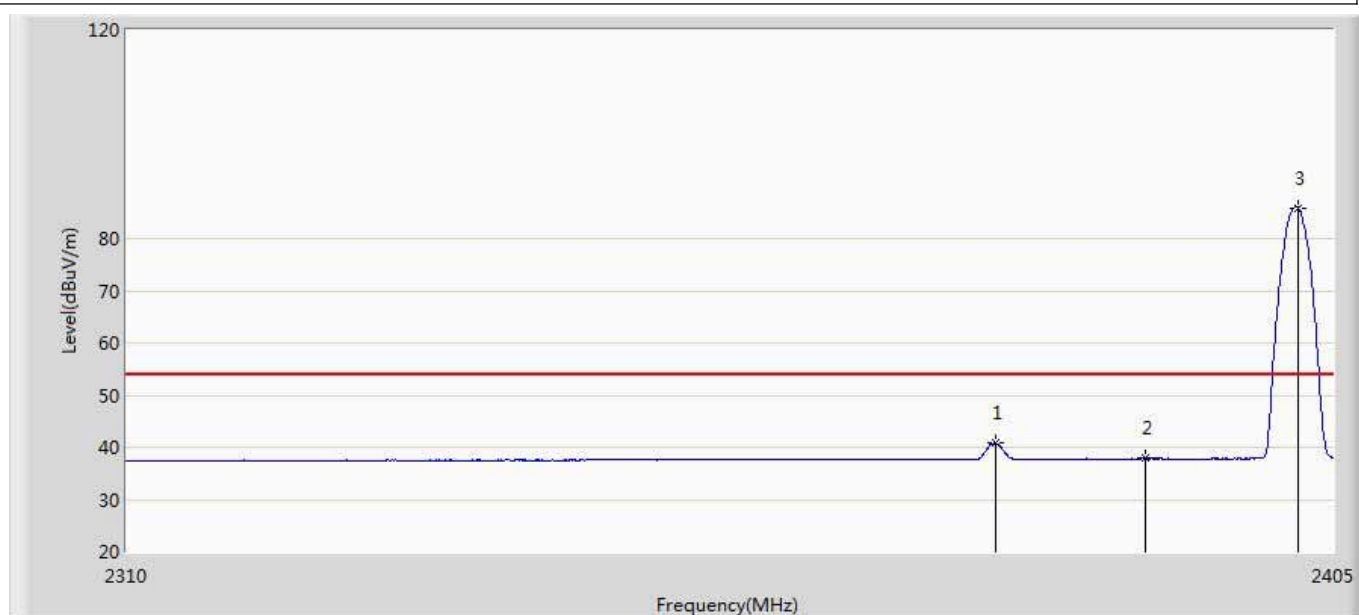


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2378.115	40.756	5.101	-13.244	54.000	35.655	AV
2		2390.000	37.844	2.162	-16.156	54.000	35.682	AV
3	*	2402.198	85.918	50.205	31.918	54.000	35.714	AV

Site: AC5	Time: 2018/11/16 - 13:19
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ-BT Module	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2480MHz by 3DH5	

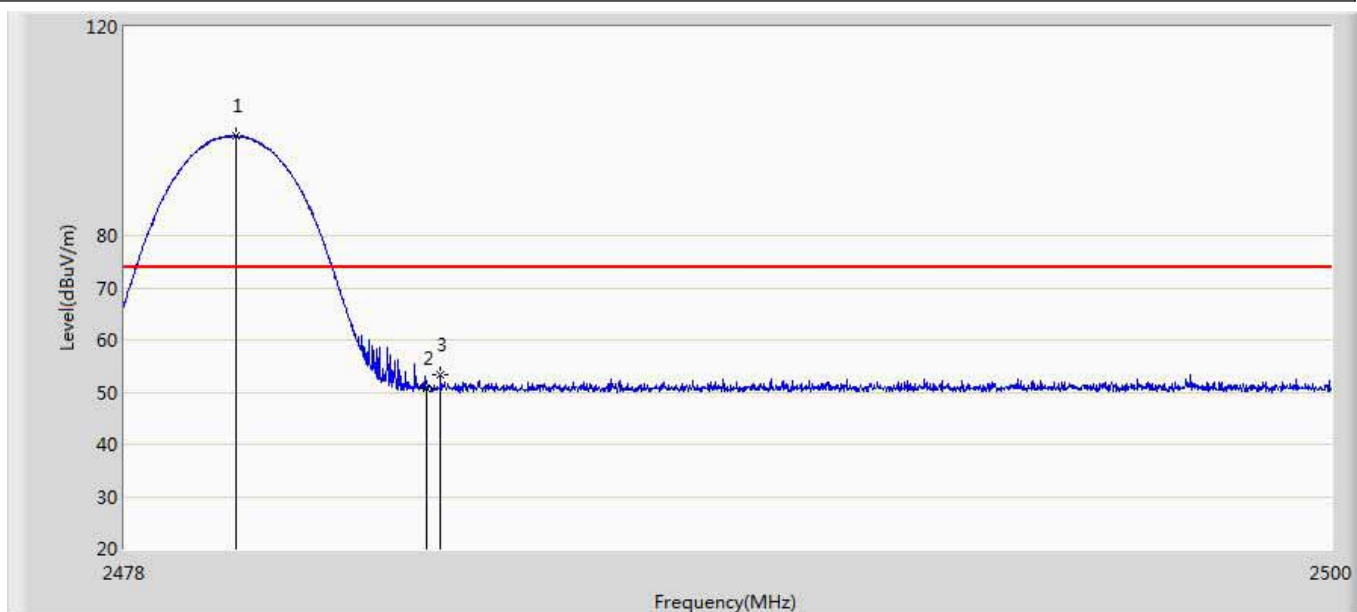


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2480.024	99.204	63.337	25.204	74.000	35.866	PK
2		2483.500	50.614	14.722	-23.386	74.000	35.891	PK
3		2483.742	53.301	17.408	-20.699	74.000	35.894	PK

Site: AC5	Time: 2018/11/16 - 13:22
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ-BT Module	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2480MHz by 3DH5	

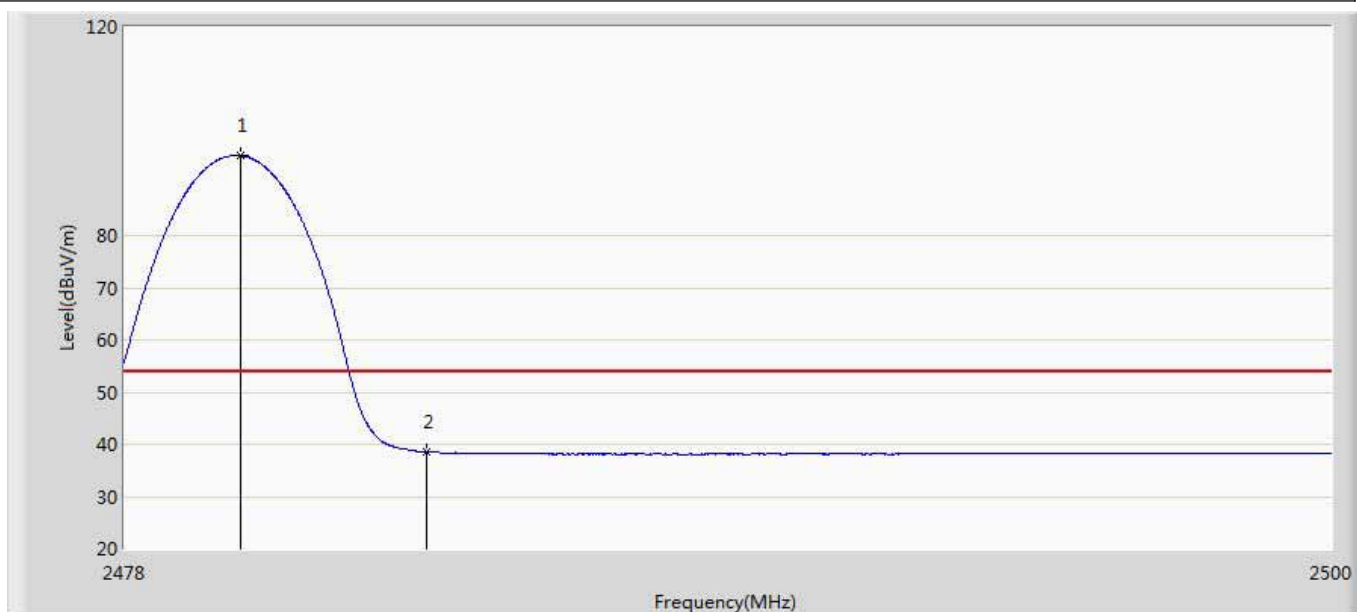


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2480.112	95.334	59.467	41.334	54.000	35.867	AV
2		2483.500	38.537	2.645	-15.463	54.000	35.891	AV

Site: AC5	Time: 2018/11/16 - 13:23
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ-BT Module	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2480MHz by 3DH5	

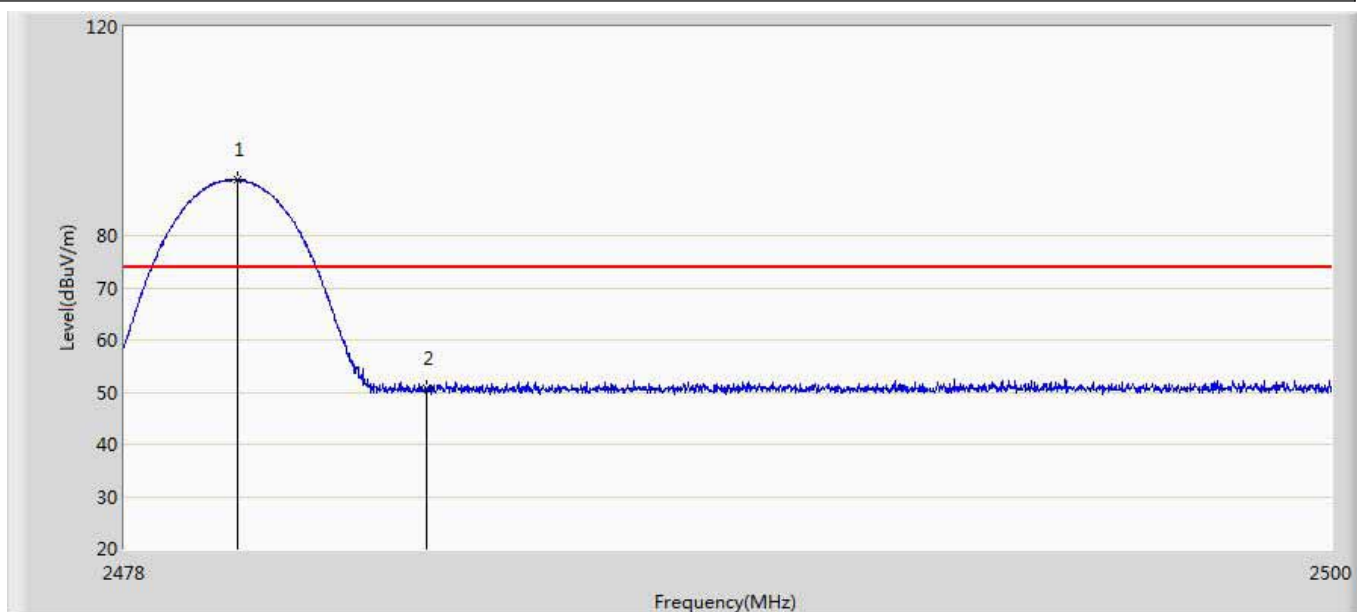

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2480.057	90.748	54.881	16.748	74.000	35.867	PK
2		2483.500	50.758	14.866	-23.242	74.000	35.891	PK

Site: AC5	Time: 2018/11/16 - 13:24
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ-BT Module	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2480MHz by 3DH5	

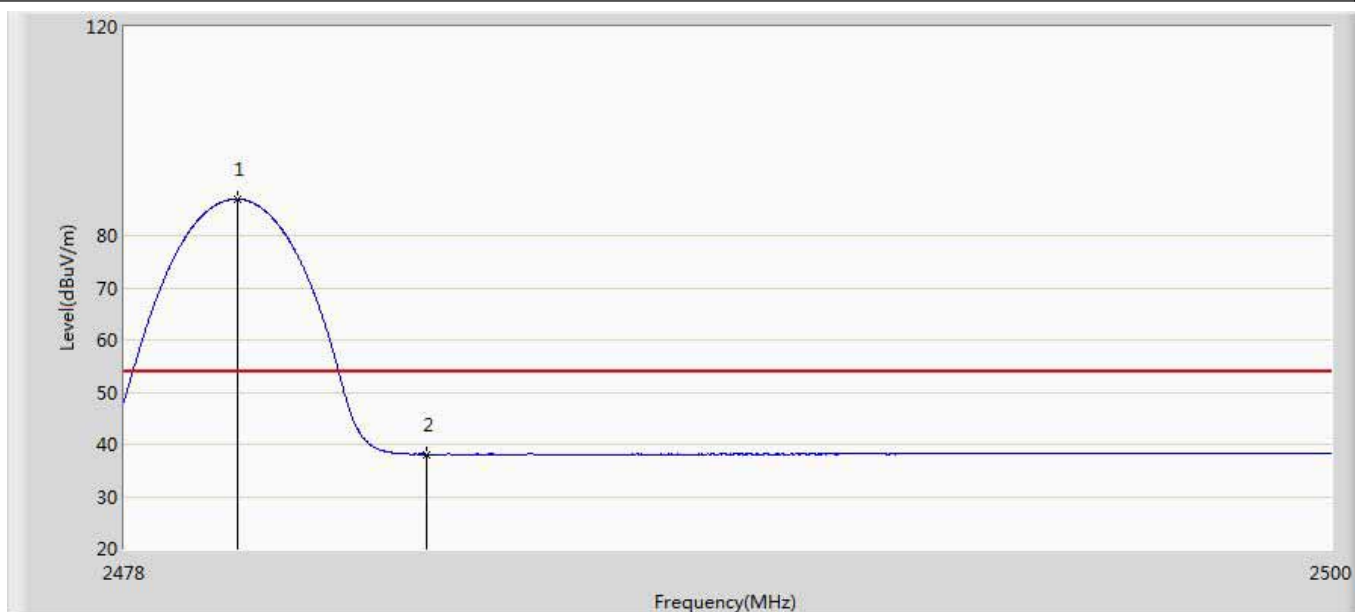

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2480.046	86.998	51.131	32.998	54.000	35.866	AV
2		2483.500	38.081	2.189	-15.919	54.000	35.891	AV

————— The End —————