

Date: 2008-07-07 Page 1 of 17

No. : HM161674

Applicant (AQA001): Aquatic AV

1476 Camden Ave, Campbell, CA 95008

Manufacturer: Aquatic AV

1476 Camden Ave, Campbell, CA 95008

Description of Samples: Product: iPod Media Player

Brand Name: Aquatic AV Model Number: AQ-DM-1R

FCC ID: WBQAQPAVRFMPIP

Date Samples Received: 2008-06-19

Date Tested: 2008-06-25

Investigation Requested: Perform ElectroMagnetic Interference measurement in

accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2007 and ANSI C63.4:2003 for FCC Certification.

Conclusions: The submitted product <u>COMPLIED</u> with the requirements of

Federal Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described above and on Section 2.2 in this

Test Report.

Remarks: For additional models details, see page 4.

Dr. LEE Kam Chuen, ElectroMagnetic Compatibility Department For and on behalf of



Date: 2008-07-07 Page 2 of 17

No. : HM161674

CONTENT:

	Cover Content	Page 1 of 17 Page 2-3 of 17
<u>1.0</u>	General Details	
1.1	Test Laboratory	Page 4 of 17
1.2	Applicant Details Applicant Manufacturer	Page 4 of 17
1.3	Equipment Under Test [EUT] Description of EUT operation	Page 5 of 17
1.4	Date of Order	Page 5 of 17
1.5	Submitted Sample	Page 5 of 17
1.6	Test Duration	Page 5 of 17
1.7	Country of Origin	Page 5 of 17
<u>2.0</u>	Technical Details	
2.1	Investigations Requested	Page 6 of 17
2.2	Test Standards and Results Summary	Page 6 of 17
<u>3.0</u>	<u>Test Results</u>	
3.1	Emission	Page 7-10 of 17
3.2	20dB Bandwidth Emission of Fundamental Emission	Page 11-12 of 17



Date: 2008-07-07 Page 3 of 17

No. : HM161674

Appendix A

List of Measurement Equipment Page 13 of 17

Appendix B

Periodic operation Page 14-15 of 17

Appendix C

Photographs Page 16-17 of 17



Date : 2008-07-07 Page 4 of 17

No. : HM161674

1.0 General Details

1.1 Test Laboratory

The Hong Kong Standards and Testing Centre Ltd. EMC Laboratory 10 Dai Wang Street, Taipo Industrial Estate New Territories, Hong Kong

1.2 Applicant Details Applicant

Aquatic AV 1476 Camden Ave, Campbell, CA 95008

Manufacturer

Aquatic AV 1476 Camden Ave, Campbell, CA 95008



Date: 2008-07-07 Page 5 of 17

No. : HM161674

1.3 Equipment Under Test [EUT] Description of Sample

Model Name: iPod Media Player
Manufacturer: Aquatic AV
Brand Name: Aquatic AV
Model Number: AQ-DM-1R

Additional Model Number(s): AQ-DM-2, AQ-DM-2B

Input Voltage: 3Vd.c. ("CR3123" size battery x 1)

1.3.1 Description of EUT Operation

The Equipment Under Test (EUT) is a Aquatic AV, iPod Media Player. The EUT transmit RF signal while any buttons is being pressed, Modulation provided by IC; the type of modulation is GFSK.

1.4 Date of Order

2008-06-19

1.5 Submitted Sample(s):

1 Sample

1.6 Test Duration

2008-06-23

1.7 Country of Origin

China



Date : 2008-07-07 Page 6 of 17

No. : HM161674

2.0 Technical Details

2.1 Investigations Requested

Perform Electromagnetic Interference measurements in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2007 Regulations and ANSI C63.4:2003 for FCC Certification.

2.2 Test Standards and Results Summary Tables

EMISSION Results Summary									
Test Condition	Test Requirement	Test Method	Class /	7	Test Resul	lt			
			Severity	Pass	Failed	N/A			
Field Strength of Fundamental Emissions & Spurious Emissions	FCC 47CFR 15.231a	ANSI C63.4:2003	N/A						
Radiated Emissions, 30MHz to 1GHz	FCC 47CFR 15.209	ANSI C63.4:2003	N/A						

Note: N/A - Not Applicable



Date: 2008-07-07 Page 7 of 17

No. : HM161674

3.0 Test Results

3.1 Emission

3.1.1 Radiated Emissions (30 – 1000MHz)


Test Requirement: FCC 47CFR 15.231a
Test Method: ANSI C63.4:2003
Test Date: 2007-06-23
Mode of Operation: Tx mode

Test Method:

The sample was placed 0.8m above the ground plane of semi-anechoic Chamber*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

*: Semi-anechoic chamber located on the G/F of The Hong Kong Standards and Testing Centre Ltd. with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 607756.

Test Setup:

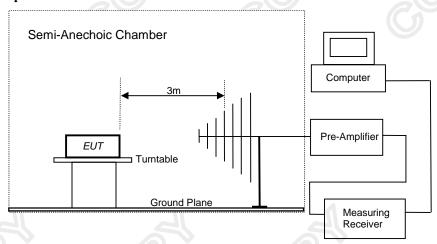



Date : 2008-07-07 Page 8 of 17

No. : HM161674

Limits for Field Strength of Fundamental Emissions [FCC 47CFR 15.231a]:

Frequency Range of	Field Strength of	Field Strength of
Fundamental	Fundamental Emission	Spurious Emission
	[Average]	[Average]
[MHz]	$[\mu V/m]$	$[\mu V/m]$
40.66-40.70	2,250	225
70-130	1,250	125
130-174	1,250 to 3,750 *	125 to 375 *
174-260	3,750	375
260-470	3,750 to 12,500 *	375 to 1,250 *
Above 470	12,500	1,250

Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follows: for the band 130-174 MHz, μ V/m at 3 meters=56.81818(F)-6136.3636; for the band 260-470 MHz, μ V/m at 3 meters =41.6667(F)-7083.3333. The maximum permissible unwanted emission level is 20dB below the maximum permitted fundamental level.

Results:

	Field Strength of Fundamental Emissions									
	Peak Value									
Frequency	Frequency Measured Correction Field Field Limit E-Field									
	Level @3m Factor Strength Strength @3m Polarity									
MHz	MHz $dB\mu V$ dB/m $dB\mu V/m$ $\mu V/m$ $\mu V/m$									
2448.00	48.3	29.3	77.6	7,585.78	125,000.0	Horizontal				

	Field Strength of Fundamental Emissions									
	Average Value									
Frequency	Frequency Measured Correction Field Field Limit E-Field									
	Level @3m Factor Strength Strength @3m Polarity									
MHz	MHz $dB\mu V = dB/m = dB\mu V/m = \mu V/m = \mu V/m$									
2448.00	41.2	29.3	70.5	3,349.65	12,500.0	Horizontal				



Date: 2008-07-07 Page 9 of 17

No. : HM161674

Results:

Field Strength of Spurious Emissions Average Value									
Frequency	Mea	sured	Correction		Field		Field	Limit @3m	E-Field
	Level	@3m	Factor	S	trength	Strength			Polarity
MHz	dE	$3 \mu V$	dB/m	ďΒ	μV/m		μV/m	μV/m	
4896.00	<	1.0	29.1	<	30.1	<	32.0	1,250.0	Vertical
7344.00	<	1.0	26.7	<	27.7	<	24.3	1,250.0	Vertical
9792.00	<	1.0	32.2	<	33.2	<	45.7	1,250.0	Vertical
12240.00	<	1.0	38.8	<	39.8	<	97.7	1,250.0	Vertical
14688.00	<	1.0	17.4	<	18.4	<	8.3	1,250.0	Vertical
17136.00	<	1.0	17.2	<	18.2	<	8.1	1,250.0	Vertical
19584.00	<	1.0	18.8	<	19.8	<	9.8	1,250.0	Vertical
22032.00	<	1.0	19.7	<	20.7	<	10.8	1,250.0	Vertical
24480.00	<	1.0	20.6	<	21.6	<	12.0	1,250.0	Vertical

Remarks:

+: Denotes restricted band of operation.

Measurements were made using a peak detector. Any emission less than 1000 MHz and falling within the restricted bands of FCC Rules Part 15 Section 15.205 were not adjusted for averaging and the limits of FCC Rules Part 15 Section 15.209 were applied.

No further spurious emissions found between lowest internal frequency and 30MHz

Correction Factor includes Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty : 30MHz to 1GHz 5.2dB

: 1GHz to 18GHz 5.1dB



Date: 2008-07-07 Page 10 of 17

No. : HM161674

Limits for Radiated Emissions [FCC 47 CFR 15.209]:

Frequency Range [MHz]	Quasi-Peak Limits [μV/m]
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Results:

Radiated Emissions Ouasi-Peak										
Frequency										
	Level @3m Factor Strength Strength Polarity									
MHz	MHz $dB\mu V$ dB/m $dB\mu V/m$ $\mu V/m$ $\mu V/m$									
	Emissions detected are more than 20 dB below the FCC Limits									

Remarks:

No further spurious emissions found between lowest internal frequency and 30MHz

Correction Factor includes Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty : 30MHz to 1GHz 5.2dB



Date: 2008-07-07 Page 11 of 17

No.: HM161674

3.2 20dB Bandwidth of Fundamental Emission

Test Requirement: FCC 47 CFR 15.231a

Test Method: ANSI C63.4:2003 (Section 13.1.7)

Test Date: 2008-06-23 Mode of Operation: On mode

Test Method:

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

Test Setup:

As Test Setup of clause 3.1.1 in this test report.



Date : 2008-07-07 Page 12 of 17

No. : HM161674

Limits for 20 dB Bandwidth of Fundamental Emission:

Frequency Range	20dB Bandwidth
[MHz]	[MHz]
2448	1.88

20dB Bandwidth of Fundamental Emission Delta 2 [T1] RF Att 0 dB Ref Lvl 31.85 dB VBW 30 kHz 97 dByV -883.64228457 kHz SWT Unit dByV 7.5 ms [T1] 36,48 dByV A2 [T1] .85 dB -883.64228457 kHz .77 dB [T1] 1.87644038 MHz INI IVIEW 1MA Center 2.448296249 GHz 259,375 kHz/ Span 2.59375 MHz



Date: 2008-07-07 Page 13 of 17

No. : HM161674

Appendix A

List of Measurement Equipment

Radiated Emission

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL	DUE CAL
EM215	MULTIDEVICE CONTROLER	EMCO	2090	00024676	N/A	N/A
EM216	MINI MAST SYSTEM	EMCO	2075	00026842	N/A	N/A
EM217	ELECTRIC POWERED TURNTABLE	EMCO	2088	00029144	N/A	N/A
EM218	ANECHOIC CHAMBER	ETS-Linggren	FACT-3		2006/05/02	2009/05/02
EM219	BICONILOG ANTENNA	EMCO	3142C	00029071	2006/08/23	2008/08/23
EM229	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESIB40	100248	2007/07/20	2008/08/20
EM022	LOOP ANTENNA	EMCO	6502	1189-2424	2006/07/26	2009/07/26
EM020	HORN ANTENNA	EMCO	3115	4032	2006/07/11	2009/07/11

Remarks:-

CM Corrective Maintenance

N/A Not Applicable or Not Available

TBD To Be Determined

The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong




Date: 2008-07-07 Page 14 of 17

No.: HM161674

Appendix B

Periodic Operation [FCC 47CFR 15.231(a2)]

According to FCC 47CFR15.231 (a2). A transmitter automatically activated must automatically deactivate within not more than 5 seconds of being released. The EUT ceases transmission almost immediately upon being released and appears to finish the current packet being transmitted. Therefore the longest period of time the transmitter should take to deactivate is a packet length.

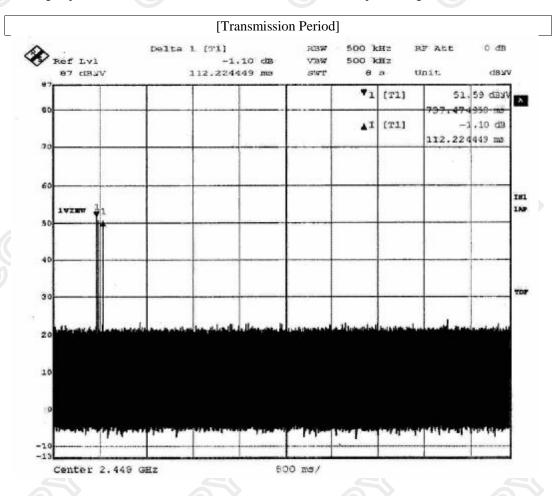


10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Date: 2008-07-07 Page 15 of 17

No. : HM161674

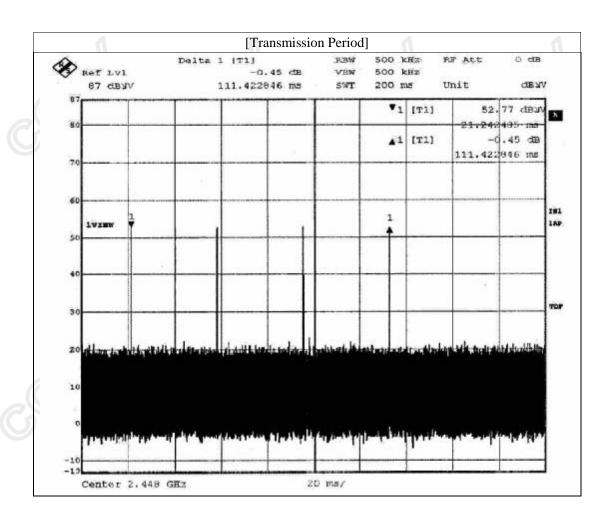

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Date : 2008-07-07 Page 16 of 17

No. : HM161674


Appendix C

Photographs of EUT





Inner Circuit Top View





Date: 2008-07-07 Page 17 of 17

No. : HM161674

Photographs of EUT



***** End of Test Report *****

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org