

Electromagnetic Emission

FCC MEASUREMENT REPORT

CERTIFICATION OF

FCC PART15 Subpart B COMPLIANCE

PRODUCT	:	LCD Monitor with PC
MODEL/TYPE NO	:	VM032
FCC ID	:	WBSVM032
TRADE NAME	:	 VIEWMAX Corporation
APPLICANT	:	1214 Sicox Tower, 513-14, Sangdaewon-Dong, Jungwon-Gu, Seongnam City, Gyeonggi-Do, Korea.
FCC CLASSIFICATION	:	JBC : Part 15 Class B Computing Device/Personal Computer
FCC RULE PART(S)	:	FCC Part 15 Subpart B Class B
FCC PROCEDURE	:	Certification
DATES OF TEST	:	May 08, 2008
TEST REPORT No.	:	BWS-08-EF-0024
TEST LAB.	:	BWS TECH Inc. (Registration No. : 553281)

This **LCD Monitor with PC** has been tested in accordance with the measurement procedures specified in ANSI C63.4-2003 at the BWS TECH/EMC Test Laboratory and has been shown to be complied with the electromagnetic emission limits specified in FCC Rule Part15 Subpart B Section15.107 and 15.109

I attest to the accuracy of data. All measurement herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them. The results of testing in this report apply to the product/system which was tested only. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

May. 10, 2008
(Date)



Nam, Tae-Hyun
Chief Engineer
Laboratory Division

BWS TECH Inc.

www.bws.co.kr

611-1, Maesan-ri, Mohyeon-myeon, Yongin-si, Gyeonggi-do 449-853, Korea
TEL: +82 31 333 5997 FAX: +82 31 333 0017

TABLE OF CONTENTS

	Pages
1. General Information	3
2. Description of Test Facility	4
3. Product Information	5
4. Description of Tests	6-7
5. Test Condition	8-9
6. Test Results	10-15
7. Sample Calculation and Other Information	16
8. Test Equipment List	17
 Appendix 1. Test Setup Photos	
Appendix 2. FCC ID Label and location	
Appendix 3. External Photos of EUT	
Appendix 4. Internal Photos of EUT	
Appendix 5. Block Diagram	
Appendix 6. Operational description	
Appendix 7. Modification of EUT	

FCC TEST REPORT

Scope – Measurement and determination of electromagnetic emission(EME) of radio frequency devices including intentional radiators and/or unintentional radiators for compliance with the technical rules and regulations of the U.S Federal Communications Commission(FCC).

1. General Information

Applicant Name : VIEWMAX Corporation
Applicant Address : 1214 Sicox Tower, 513-14, Sangdaewon-Dong, Jungwon-Gu, Seongnam City, Gyeonggi-Do, Korea.
Manufacturer Name : VIEWMAX Corporation
Manufacturer Address : 1214 Sicox Tower, 513-14, Sangdaewon-Dong, Jungwon-Gu, Seongnam City, Gyeonggi-Do, Korea.
Contact Person : Seung, Park
Phone/Fax : Phone : +82-31-745-7812 / Fax : +82-31-745-7815

- **EUT Type** : LCD Monitor with PC
- **Model Number** : VM032
- **FCC Identifier** : WBSVM032
- **S/N :** : Prototype
- **FCC Rule Part(s)** : Part 15 Subpart B Class B
- **CPU Clock** : 2.2GHz
- **Test Procedure** : ANSI C63.4-2003
- **Date of Tests** : May 08, 2008
- **Place of Tests** : BWS TECH Inc.
EMC Testing Lab (FCC Registration Number : 553281)
611-1, Maesan-ri, Mohyeon-myeon, Yongin-si, Gyeonggi-do
449-853, Korea
TEL: +82 31 333 5997 FAX: +82 31 333 0017
- **Test Report No.** : BWS-08-EF-0024

2. Description of Test Facility

The measurement for radiated emission test were practiced at the open area test site of BWS TECH Inc. Measurement for conducted emission test were practiced at the semi EMC Anechoic Chamber test site of BWS TECH Inc. facility located at **611-1, Maesan-ri, Mohyeon-myeon, Yongin-si, Gyeonggi-do 449-853, Korea**. The site is constructed in conformance with the requirements of the ANSI C63.4-2003 and CISPR Publication 16. The BWS TECH measurement facility has been filed to the Commission with the FCC for 3 and 10 meter site configurations. Detailed description of test facility was found to be in compliance with the requirements of Section 2.948 FCC Rules according to the ANSI C63.4-2003 and registered to the Federal Communications Commission(Registration Number : 553281).

The measurement procedure described in American National Standard for Method of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ANSI C.63.4-2003) was used in determining radiated and conducted emissions from the VIEWMAX Corporation LCD Monitor with PC Model : VM032.

3. Product Information

3.1 Equipment Description

Specification

Mainboard Specifications

Category	Specifications
CPU Type	Intel® Core™ Solo/Duo or Core™ 2 Duo, Core™ 2 Quad, Pentium™ D, Celeron™
CPU Socket	LGA775
System Chipset	NVIDIA® GeForce 73PV
Memory Type	DDR2 533/667/800 MHz
Memory Slot	2 x DIMM
Standard Memory	2 GB (2 x 1 GB)
Maximum Memory	4 GB (2 x 2 GB)
Ethernet LAN Chip	Realtek® RTL 8211BL
Audio Chip	Realtek® ALC888
Rear Connectors	1 x DVI, 1 x RJ45 LAN, 1 x Azalia Audio Rack, 4 x USB 2.0, 2 x PS/2,
Onboard Slots & Internal Connectors	2 x DDR2 DIMM, 4 x SATA II, 1 x PCIe *1, 1 x CD audio in, 2 x Front panel, 6 x USB 2.0, 2 x Cooling fans, 1 x Front audio,
Operating System	Windows™ XP Pro (Standard) Windows™ Vista™ Premium (Optional)

The VM032, VM042(H) and VM047 series systems come with a MSI P6NGM mainboard. The technical specifications of the mainboard are listed in table below.

Flat Panel Screen Specifications

Model	VM015	VM019	VM032	VM042	VM042H	VM047
Screen Size (Diagonal)	15" (381mm)	19" (482.6mm)	32" (812.8mm)	42" (1066.8mm)	42" (1066.8mm)	47" (1193.8mm)
Resolution	1024 x 768	1280 x 1024	1366 x 768	1366 x 768	1920 x 1080	1920 x 1080
Active Area (mm)	304.128 x 228.096	376.320 x 301.056	697.6845 x 392.256	930.25 x 523.01	930.24 x 523.28	1039.68 x 584.82
Pixel Pitch (mm)	0.297 x 0.297	0.098 x 0.294	0.51075 x 0.17025	0.227 x 0.681	0.4845 x 0.4845	0.5415 x 0.5415
LCD Colors	16.2 Million	16.2 Million	16.7 Million	16.7 Million	16.7 Million	16.7 Million
Viewing Angle	130 / 110	160 / 160	178 / 178	178 / 178	178 / 178	178 / 178
Brightness (cd/m²)	400	300	500	500	500	500
Contrast Ratio	500:1	800:1	1000:1	1000:1	1000:1	1000:1
Response Time	25 msec	10 msec	10 msec	8 msec	8 msec	8 msec
Power Consumption	14.6 W	24.0 W	113.7 W	167.4 W	168.8 W	247.2 W
Input Voltage	3.3 V	5.0 V	24.0 V	24.0 V	24.0 V	24.0 V
Electrical Interface	1ch LVDS	2ch LVDS	1ch LVDS	1ch LVDS	2ch LVDS	2ch LVDS

3.2 Variations covered by this report

Model Difference : N/A.

3.3 Additional Information Related to Testing

Test results apply only to the particular sample tested and functionality described in this test report. This report may be reproduced in full. Partial reproduction may only be made with the written permission of the BWS TECH Inc.

4. Description of Tests

4.1 Conducted Emission Measurement

Conducted emissions measurements were made in accordance with section 11, "Measurement of Information Technology Equipment" of ANSI C63.4-2003. The measurement were performed over the frequency range of 0.15MHz to 30MHz using a 50Ω /50uH LISN as the input transducer to a Spectrum Analyzer or a Field Intensity Meter. The measurements were made with the detector set for "Peak" amplitude within an bandwidth of 10KHz or for "quasi-peak" within a bandwidth of 9KHz.

The line-conducted emission test is conducted inside a shielded anechoic chamber room with 1m x 1.5m x 0.8m wooden table which is placed 40cm away from the vertical wall and 1.5m away from the side wall of the chamber room. Two LISNs are bonded to bottom plane of the shielded room. The EUT is powered from the FCC LISN and the support equipment is powered from the another Com-power LISN. Power to the LISNs is filtered by a noise cut power line filters. All electrical cables are shielded by braided tinned steel tubing with inner ϕ 1.2cm. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and these supply lines will be connected to the Com-power LISN. All interconnecting cables more than 1m were shortened by non-inductive bundling(serpentine fashion) to a 1m length. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the Test Receiver to determine the frequency producing the max. Emission from the EUT. The frequency producing the max. Level was reexamined using the detector function set to the CISPR Quasi-Peak mode by manual, after scanned by automatic Peak mode from 0.15 to 30MHz. The bandwidth of the Spectrum Analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was maximized by switching power lines, varying the mode of operation or resolution, clock or data exchange speed, if applicable, whichever determined the worst-case emission. Each emission reported was calibrated using self-calibrating mode.

Photographs of the worst-case emission can be seen in photographs of conducted emission test setup.

4.2 Radiated Emission Measurement

Preliminary measurements were made at indoors 3 meter semi EMC Anechoic Chamber using broadband antennas, broadband amplifier, and spectrum analyzer to determine the emission frequencies producing the maximum EME.

Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth with respect to the antenna were noted for each frequency found. The spectrum was scanned from 30 to 1000MHz using bilog antenna and above 1000MHz, linearly polarized double ridge horn antennas were used. Above 1GHz, linearly polarized double ridge horn antennas were used. The measurements were performed with three frequencies which were selected as bottom, middle and top frequency in the operating band. Emission level from the EUT with various configurations were examined on the spectrum analyzer connected with the RF amplifier and plotted graphically.

Final measurements were made outdoors open site at 3-meter test range using bilog antenna. The output from the antenna was connected, via a pre-selector or a preamplifier, to the input of the EMI Measuring Receiver and Spectrum analyzer(for above 1GHz). The detector function was set to the quasi-peak or peak mode as appropriate. The measurement bandwidth on the Field strength receiver was set to at least 120kHz (1MHz for measurement above 1GHz), with all post-detector filtering no less than 10 times the measurement bandwidth. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.

Each frequency found during preliminary measurement was examined and investigated as the same set up and configuration which produced the maximum emission. The EUT, support equipment and interconnecting cables were configured to the set-up producing the maximum emission for the frequency and were placed on top of a 0.8-meter high non-metallic 1m x 1.5 meter table. The turntable containing the system was rotated and the antenna height was varied 1 to 4 meters and stopped at the azimuth or height producing the maximum emission.

Each emission was maximized by varying the mode of operating frequencies of the EUT. The system was tested in all the three orthogonal planes and changing the polarity of the antenna. The worst case emissions are recorded in the data tables. If necessary, the radiated emission measurement could be performed at a closer distance to ensure higher accuracy and the results were extrapolated to the specified distance using an inverse linear distance extrapolation factor(20dB/decade) as per section 15.31(f).

Photographs of the worst-case emission test setup can be seen in Appendix 1.

5. Test Condition

5.1 Test Configuration

The device was configured for testing in a typical fashion (as a customer would normally use it). During the tests, the EUT and the supported equipments were installed to meet FCC requirement and operated in a manner which tends to maximize its emission level in a typical application.

Radiated Emission Test

Preliminary radiated emission tests were performed using the procedure in ANSI C63.4/2003 Clause 8.3 to determine the worst operating condition. Final radiated emission tests were conducted at 3 meter open field test site.


5.2 EUT operation

EUT was tested according to the following operation modes provided by the specifications given by the manufacturer, and reported the worst emissions.

Operation Modes	Worst Case Mode
“H” Pattern Displaying Mode	<input checked="" type="checkbox"/>

5.3 Test System layout on EUT and peripherals

Interface cable _____ Power cable _____

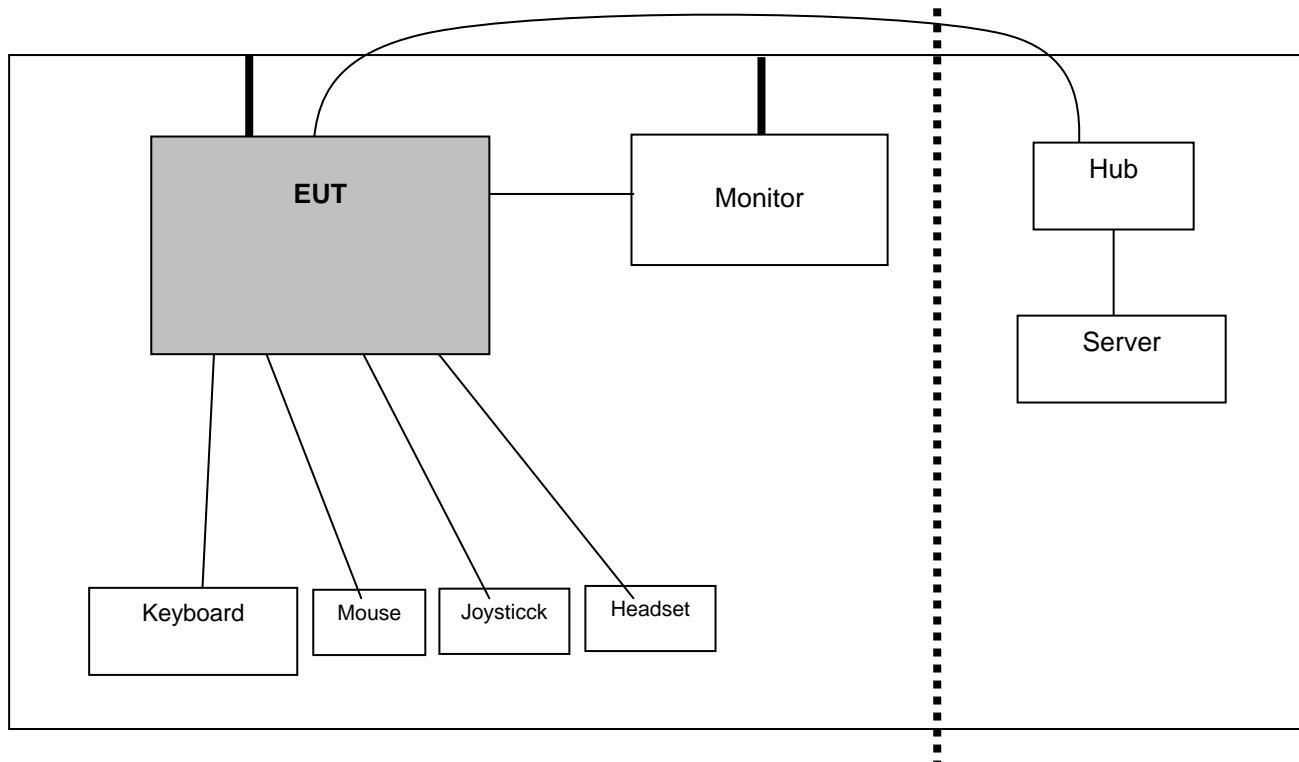

5.4 Peripherals / Support Equipment Used

Following peripheral devices and interface cables were connected during the measurement:

Type of Peripheral Equipment Used:

Description	Model Name	Serial No.	Manufacturer	FCC ID
EUT	VM032	prototype	VIEWMAX Corporation	WBSVM032
LCD Monitor	FP737s	99L8372RSK5130038 5TABRSK	BenQ	DoC
Keyboard	SK-2880	BC35A0AJ6U14QP	YETFOUNDATE	DoC
Mouse	SMOP5000WX-BK	06100006422	SAMSUNG	DoC
Joystick	Side Winder Game Pad USB	N/A	Microsoft	DoC
Headset	-	-	-	N/A

Type of Cables Used:

Device from	Device to	Type of Cable	Length(m)	Type of shield
EUT	Keyboard	PS/2	2.0	Unshielded
EUT	Mouse	PS/2	1.8	Unshielded
EUT	Joystick	USB	1.8	Unshielded
EUT	Headset	MIC, LINE OUT	2.3	Unshielded
EUT	Power Socket	Inlet	1.5	Unshielded
EUT	Monitor	DVI	1.8	Shielded
EUT	Hub	RJ-45	20.0	Shielded
EUT	Loop	VIDEO	1.5	Shielded

6. TEST RESULTS

6.1 Summary of Test Results

The measurement results were obtained with the EUT tested in the conditions described in this report. Detailed measurement data and plots showing the maximum emission of the EUT are reported.

FCC Rule Parts	Measurement Required	Result
15.107(a)	Conducted Emission	PASS
15.109(a)	Radiated Emissions below 1000MHz	PASS
15.33(b)	Radiated Emissions above 1000MHz	PASS

The data collected shows that the VIEWMAX Corporation LCD Monitor with PC models : VM032 and family models comply with technical requirements of the Part 15.107 and 15.109, 15.33 of the FCC Rules.

Note : Modification to EUT

The device tested has been made some modification to improve EMI status during a preliminary measurement and applied to the final measurement. The following EMI suppression device(s) was added and/or modified during testing.

1. Added ferrite core (refer to appendix 7. Internal photos of EUT)
2. Added ferrite core (refer to appendix 7. Internal photos of EUT)
3. Added ferrite core (refer to appendix 7. Internal photos of EUT)
4. Added ferrite core (refer to appendix 7. Internal photos of EUT)
5. Added ferrite core (refer to appendix 7. Internal photos of EUT)
6. Added ferrite core (refer to appendix 7. Internal photos of EUT)
7. Added ferrite core (refer to appendix 7. Internal photos of EUT)
8. Apply to gasket (refer to appendix 7. Internal photos of EUT)

6.2 Conducted Emissions

EUT : LCD Monitor with PC VM032
 Limit apply to : FCC Part15 Subpart B Class B Section 15.107(a)
 Test Date : May 08, 2008
 Operating Condition : "H" Pattern Displaying Mode
 Environment Condition : Temperature : 24 °C Humidity Level : 31 %RH
 Result : Passed by -2.66dB (AV)

The following table shows the highest levels of conducted emissions on both phase of Hot and Neutral line.

Tabulated Conducted Emission Test Data

Detector Mode ; CISPR Quasi Peak mode (6dB Bandwidth : 9kHz).

Test data sheets follow

Freq [MHz]	Correcton		Phase [H/N]	Quasi-Peak Mode				Average Mode				
	AMN	C.L		Limit	Reading	Emissio n	Margin	Limit	Reading	Emission Level	Margin	
				[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	
0.150	0.06	0.03	H	66.00	40.62	40.71	-25.29	56.00				
0.186	0.06	0.03	H	65.00	40.35	40.44	-24.56	55.00				
0.310	0.08	0.22	H	61.40	31.94	32.24	-29.16	51.40				
0.338	0.08	0.22	H	60.70	32.35	32.65	-28.05	50.70				
0.394	0.08	0.24	N	59.10	39.85	40.17	-18.93	49.10				
0.450	0.07	0.28	N	57.40	46.64	46.99	-10.41	47.40	43.01	43.36	-4.04	
0.558	0.07	0.30	H	56.00	38.37	38.74	-17.26	46.00				
0.610	0.07	0.30	H		42.71	43.08	-12.92					
1.218	0.04	0.43	H		45.77	46.24	-9.76		42.71	43.18	-2.82	
1.830	0.03	0.52	H		46.57	47.12	-8.88		42.79	43.34	-2.66	
2.022	0.03	0.55	N		39.33	39.91	-16.09					
2.366	0.03	0.57	N		37.75	38.35	-17.65					
6.094	0.06	0.90	H	60.00	28.81	29.77	-30.23	50.00				
7.922	0.06	1.00	H		28.28	29.34	-30.66					
13.706	0.06	1.20	H		44.41	45.67	-14.33					
16.070	0.07	1.22	N		40.11	41.40	-18.60					
23.978	0.08	1.50	N		31.32	32.90	-27.10					
26.014	0.16	1.53	N		34.04	35.73	-24.27					

NOTES :

1. H : Hot Line , N :Neutral Line
2. Emission Level = Reading + Correction Factor
3. Margin = Emission Level – Limit
4. Measurement uncertainty estimated at ± 1.38 dB.

The measurement uncertainty is given with a confidence of 95.45 % with the coverage factor, $k=2$.

6.3 Radiated Emissions

EUT : LCD Monitor with PC VM032
 Limit apply to : FCC Part15 Subpart B Class B Section 15.109(a)
 Test Date : May 08, 2008
 Operating Condition : "H" Pattern Displaying Mode
 Environment Condition : Temperature : 22 °C Humidity Level : 39 %RH
 Result : Passed by -2.70dB

Radiated Emission(below 1000MHz) Test Data

The following table shows the highest levels of radiated emissions on both polarization of horizontal and vertical.

Detector mode : CISPR Quasi-Peak mode (6dB Bandwidth : 120 kHz)

Measurement Distance : 3 meters

Frequency [MHz]	Reading [dB μ V]	Polarization [*H/**V]	Ant.Factor [dB]	Cable Loss [dB]	Limit [dB μ V/m]	Emission Level [dB μ V/m]	Margin [dB]
35.51	21.73	V	12.03	1.34	40.00	35.10	-4.90
50.01	19.63	V	12.17	1.60	40.00	33.40	-6.60
59.80	22.49	V	12.27	1.75	40.00	36.50	-3.50
73.93	23.80	V	9.72	1.89	40.00	35.40	-4.60
133.33	22.86	V	12.51	2.53	43.50	37.90	-5.60
221.73	22.11	H	10.38	3.31	46.00	35.80	-10.20
295.67	24.68	H	13.27	3.85	46.00	41.80	-4.20
369.55	23.13	H	15.07	4.31	46.00	42.50	-3.50
443.46	20.89	H	16.77	4.74	46.00	42.40	-3.60
533.33	19.14	H	18.31	5.26	46.00	42.70	-3.30
767.06	10.97	H	22.35	6.58	46.00	39.90	-6.10
800.05	13.93	H	22.64	6.73	46.00	43.30	-2.70
920.68	12.05	H	23.86	7.29	46.00	43.20	-2.80

NOTES :

- * H : Horizontal polarization , ** V : Vertical polarization
- Emission Level = Reading + Antenna factor + Cable loss
- Margin value = Emission Level - Limit
- All other emissions not reported were more than 25dB below the permitted limit.
- Measurement uncertainty estimated at ± 1.38 dB.

The measurement uncertainty is given with a confidence of 95.45 % with the coverage factor, k=2.



Tested by Lee, Cheol-Ho

EUT	: LCD Monitor with PC VM032
Limit apply to	: FCC Part15 Subpart B Class B Section 15.33(b)
Test Date	: May 08, 2008
Operating Condition	: "H" Pattern Displaying Mode
Environment Condition	: Temperature : 22 °C Humidity Level : 39 %RH
Result	: Passed

Radiated Emission(above 1000MHz) Test Data

The following table shows the highest levels of radiated emissions on both polarization of horizontal and vertical.

Detector mode : Average mode (Bandwidth : 1 MHz)

Measurement Distance : 3 meters

NOTES :

6. * H : Horizontal polarization , ** V : Vertical polarization
7. Emission Level = Reading + Antenna factor + Cable loss
8. Margin value = Emission Level - Limit
9. All other emissions not reported were more than 25dB below the permitted limit.
10. Measurement uncertainty estimated at ± 1.38 dB.

The measurement uncertainty is given with a confidence of 95.45 % with the coverage factor, $k=2$.


Seach

Tested by Lee, Cheol-Ho

Plots of Conducted Emission Test

RS

RBW 9 kHz
 MT 100 ms
 Att 0 dB AUTO PREAMP OFF

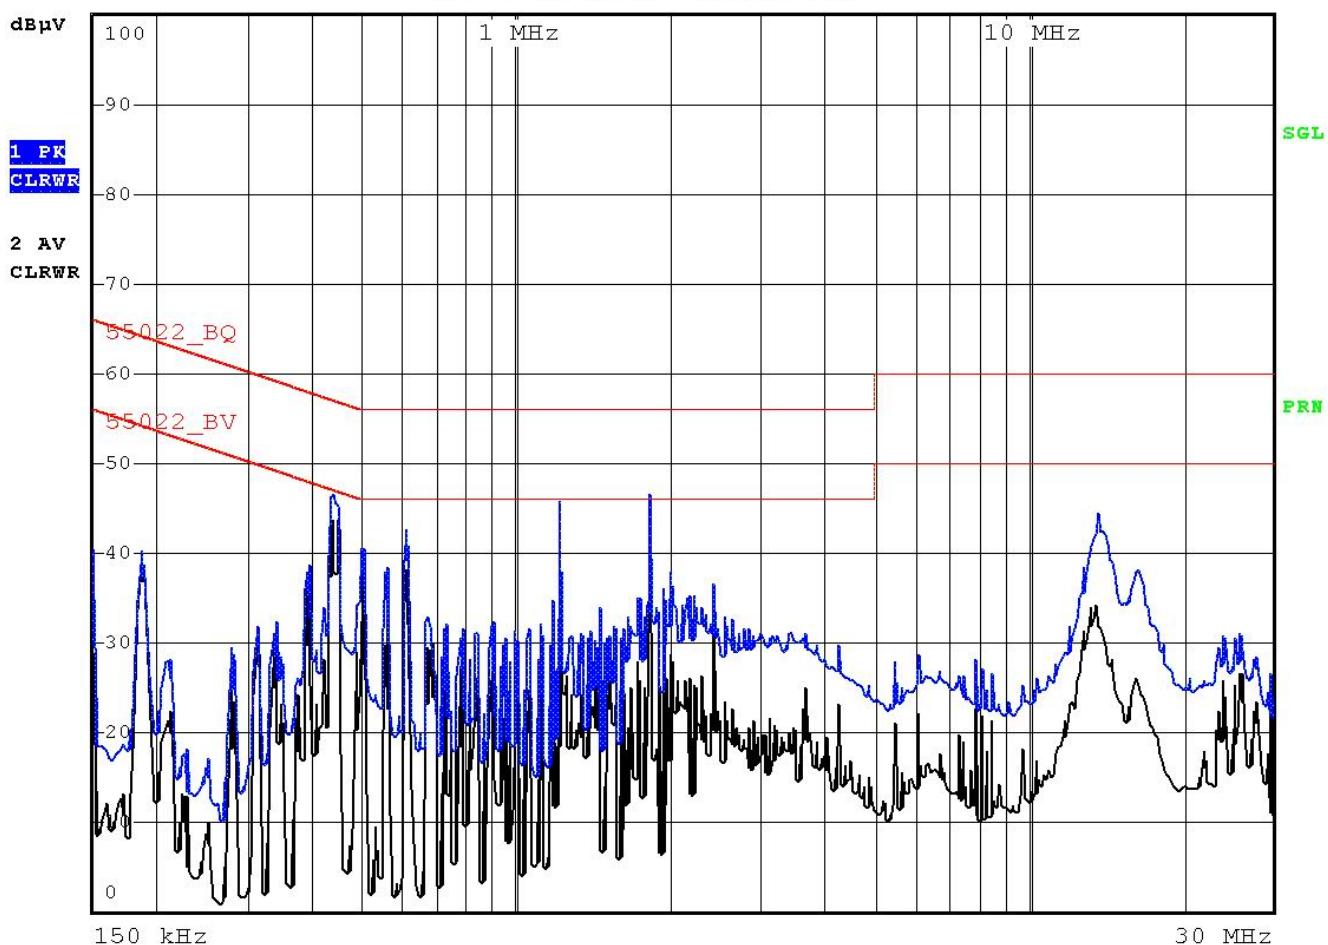

Test Mode: HOT


Model Name: VM032

Classification: FCC Part 15 Subpart B Class B

Plots of Conducted Emission Test

R
S

RBW 9 kHz
 MT 20 ms
 Att 0 dB AUTO PREAMP OFF

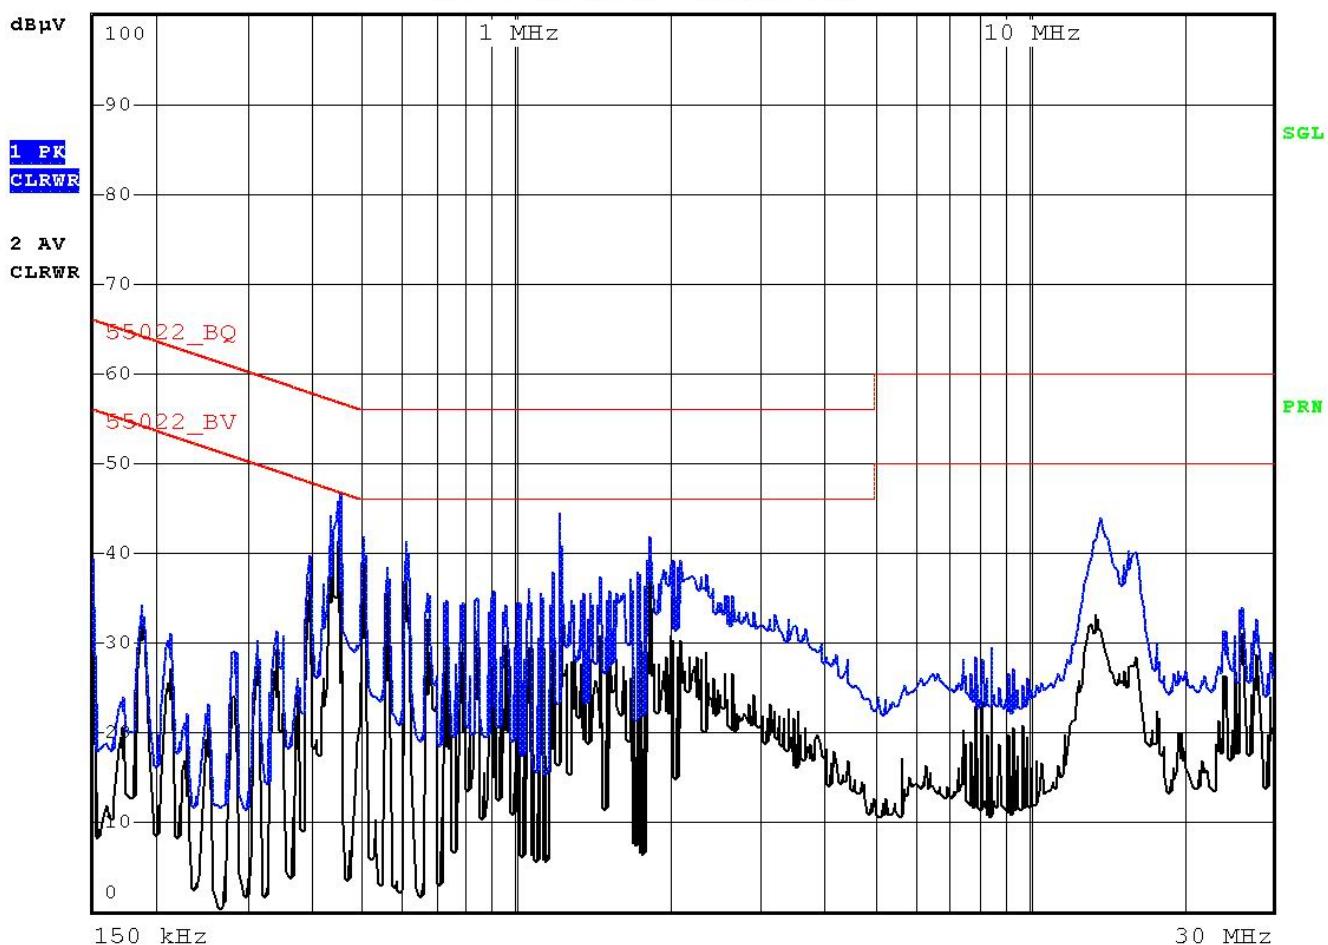

Test Mode: NEUTRAL

Model Name: VM032

Classification: FCC Part 15 Subpart B Class B

7. Sample Calculation and Other Information

7.1 Sample Calculations

$$\text{dB}\mu\text{V} = 20 \log 10 (\mu\text{V}/\text{m})$$

$$\mu\text{V} = 10^{(\text{dB}\mu\text{V}/20)}$$

EX. 1.

@ 1.830 MHz Class B limit = 46.00 dB μ V

Reading = 42.79 dB μ V (calibrated level)

AMN factor + Cable Loss = 0.55 dB

Total = 43.34 dB μ V/m

Margin = 43.34 - 46.00 = -2.66

2.66 dB ; below limit

EX. 2.

@ 800.05 MHz Class B limit = 46.00 dB μ V/m

Reading = 13.93dB μ V(calibrated level)

Antenna factor + Cable Loss = 29.37 dB

Total = 43.30 dB μ V/m

$10^{(43.12/20)} = \mu\text{V}/\text{m}$

Margin = 43.30 - 46.00 = -2.70 dB

2.70 dB ; below limit

8. TEST EQUIPMENTS LIST

The listing below denotes the test equipments utilized for the test(s).

Equipment Type	Model	Manufacture	Serial No	Cal Due Date	Use
TEST RECEIVER	ESPI	ROHDE & SCHWARZ	100063	11. 19. 2008	<input checked="" type="checkbox"/>
Conducted Cable	N/A	N/A	N/A	N/A	<input checked="" type="checkbox"/>
LISN	FCC-LISN-50-50-2-02	FCC	03074	11. 02. 2008	<input checked="" type="checkbox"/>
LISN multiline	L1-115	Com-Power	241017	12. 01. 2008	<input checked="" type="checkbox"/>
Bilog Antenna	VULB 9160	SCHWARZBECK	9160-3052	06. 01. 2009	<input checked="" type="checkbox"/>
Open Site Cable	OSC-30	N/A	BWS-01	N/A	<input checked="" type="checkbox"/>
Antenna Mast	JAC-3	DAIL EMC	N/A	N/A	<input checked="" type="checkbox"/>
Antenna Turntable Controller	JAC-2	JAEMC	N/A	N/A	<input checked="" type="checkbox"/>
EMI RECEIVER	ESVN30	ROHDE & SCHWARZ	832854/010	07. 13. 2008	<input checked="" type="checkbox"/>
Horn Antenna	BBHA-120D	SCHWARZBECK	BBHA9120D 234	03. 15. 2008	<input checked="" type="checkbox"/>
Spectrum Analyzer	R3273	ADVANTEST	150100195	06. 25. 2008	<input checked="" type="checkbox"/>
RF Amplifier	8449B	AGILENT	3008A00809	02. 24. 2009	<input checked="" type="checkbox"/>