



## Test Report

Prepared for: Packet Power, LLC

Model: EMB1

Description: Battery Powered Environmental Monitor

Serial Number: N/A

FCC ID: ECGP5EMB1  
IC: 8751A-P5EMB1

To

FCC Part 15.247 FHSS

Date of Issue: January 30, 2015

On the behalf of the applicant:

Packet Power, LLC  
2716 Summer St NE  
Minneapolis, MN 55413

Attention of:

Steve VanTassel, CEO  
Ph: (612) 396-8704  
E-mail: [steve@packetpower.com](mailto:steve@packetpower.com)

Prepared by  
Compliance Testing, LLC  
1724 S. Nevada Way  
Mesa, AZ 85204  
(480) 926-3100 phone / (480) 926-3598 fax  
[www.compliancetesting.com](http://www.compliancetesting.com)  
Project No: p14b0019



Alex Macon  
Project Test Engineer

This report may not be reproduced, except in full, without written permission from Compliance Testing.  
All results contained herein relate only to the samples tested.



### Test Report Revision History

Revision	Date	Revised By	Reason for Revision
1.0	December 15, 2014	Alex Macon	Original Document
2.0	January 30, 2015	Alex Macon	Updated Timing explanation, added Restricted Band plot and added antenna gain information



## Table of Contents

<u>Description</u>	<u>Page</u>
Standard Test Conditions and Engineering Practices	6
Peak Output Power	10
Radiated Spurious Emissions	11
Emissions at Band Edges	12
Occupied Bandwidth	15
Dwell Time	16
Number of Hopping Channels	17
Test Equipment Utilized	18



**ILAC / A2LA**

Compliance Testing, LLC, has been accredited in accordance with the recognized International Standard ISO/IEC 17025:2005. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to the joint ISO-ILAC-IAF Communiqué dated January 2009).

The tests results contained within this test report all fall within our scope of accreditation, unless noted in the table below.

Please refer to <http://www.compliancetesting.com/labscope.html> for current scope of accreditation.

Testing Certificate Number: **2152.01**



**FCC Site Reg. #349717**

**IC Site Reg. #2044A-2**

**Non-accredited tests contained in this report:**

**N/A**



**The applicant has been cautioned as to the following**

**15.21 - Information to User**

The user's manual or instruction manual for an intentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

**15.27(a) - Special Accessories**

Equipment marketed to a consumer must be capable of complying with the necessary regulations in the configuration in which the equipment is marketed. Where special accessories, such as shielded cables and/or special connectors are required to enable an unintentional or intentional radiator to comply with the emission limits in this part, the equipment must be marketed with, i.e. shipped and sold with, those special accessories. However, in lieu of shipping or packaging the special accessories with the unintentional or intentional radiator, the responsible party may employ other methods of ensuring that the special accessories are provided to the consumer, without an additional charge.

Information detailing any alternative method used to supply the special accessories for a grant of equipment authorization or retained in the verification records, as appropriate. The party responsible for the equipment, as detailed in 2.909 of this chapter, shall ensure that these special accessories are provided with the equipment. The instruction manual for such devices shall include appropriate instructions on the first page of text concerned with the installation of the device that these special accessories must be used with the device. It is the responsibility of the user to use the needed special accessories supplied with the equipment.



## Standard Test Conditions and Engineering Practices

All tests and measurement data shown were performed in accordance with FCC Rules and Regulations, Volume II; Part 2 and the following individual Parts: 15.247 Operation within bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

Except as noted herein, the following conditions and procedures were observed during the testing:

In accordance with ANSI C63.4-2009, ANSI C63.10-2009, FCC DA 00-705, and unless otherwise indicated in the specific measurement results, the ambient temperature of the actual EUT was maintained within the range of 10 to 40C (50 to 104F) unless the particular equipment requirements specified testing over a different temperature range. Also, unless otherwise indicated, the humidity levels were in the range of 10% to 90% relative humidity.

Environmental Conditions		
Temperature (°C)	Humidity (%)	Pressure (mbar)
24.3 – 21.7	36.4 – 41.9	967.1 – 971.2

Measurement results, unless otherwise noted, are worst case measurements.



## Test Results Summary

Specification	Test Name	Pass, Fail, N/A	Comments
15.247(b)	Peak Output Power	Pass	
15.247(d)	Conducted Spurious Emissions	N/A	Device incorporates an integral antenna.
15.247(d), 15.209(a), 15.205	Radiated Spurious Emissions	Pass	
15.247(d), 15.209(a), 15.205	Emissions At Band Edges	Pass	
15.247(a)	Occupied Bandwidth	Pass	
15.247(a)	Dwell Time	Pass	
15.247(a)	Number of Hopping Channels	Pass	
15.207	A/C Powerline Conducted Emissions	N/A	EUT is a DC powered device



### **EUT Description**

**Model:** EMB1

**Description:** Battery Powered Environmental Monitor

**Firmware:** N/A

**Software:** NMX Packet Power URL

**Serial Number:**

**Additional Information:**

The EUT is an Ethernet Gateway which incorporates a 900 MHz radio with an integral antenna.

### **EUT Operation during Tests**

EUT was placed in test modes using the NMX Packet Power URL paired with the node configurator.

#### **15.203: Antenna Requirement:**

The antenna is permanently attached to the EUT

The antenna uses a unique coupling

The EUT must be professionally installed

The antenna requirement does not apply



**Accessories:**

Qty	Description	Manufacturer	Model	S/N
1	Node Configurator	Packet Power	63E1-0200-2014-001D	N/A
1	Power Supply	Globtek	GT-41134-0606-1.0	N/A

**Cables:** None

**Modifications:** None



## Peak Output Power

**Name of Test:**

Peak Output Power

**Test Equipment Utilized:**

i00103, i00379, i00428

**Engineer:** Alex Macon

**Test Date:** 12/3/14

## Test Procedure

The EUT was tested in a semi-anechoic chamber set 3m from the receiving antenna. A spectrum analyzer was used to verify that the EUT met the requirements. The antenna and cable correction factors were summed and entered into the spectrum analyzer as an offset to ensure accurate readings. The EUT incorporates a 9 dBi antenna.

## Test Setup



## Transmitter Peak Output Power

Tuned Frequency (MHz)	Recorded Measurement	Specification Limit	Result
902.4	5.50 uW	1 Watt	Pass
914.8	4.88 uW	1 Watt	Pass
927.6	4.76 uW	1 Watt	Pass



## Radiated Spurious Emissions

**Name of Test:**

Radiated Spurious Emissions

**Engineer:** Alex Macon

**Test Equipment Utilized:**


i00271, i00349, i00379, i00428

**Test Date:** 12/10/14

### Test Procedure

The EUT was tested in a semi-anechoic chamber set 3m from the receiving antenna. A spectrum analyzer was used to verify that the EUT met the requirements for Radiated Spurious Emissions. The antenna and cable correction factors were summed with the amplifier gain and entered into the spectrum analyzer as an offset to ensure accurate readings. The spectrum for each tuned frequency was examined to the 10<sup>th</sup> harmonic.

### Test Setup

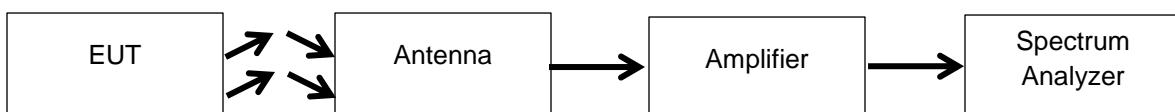

Detector Settings	RBW	VBW
Peak	1 MHz	3 MHz
Average	1 MHz	30 Hz

### Radiated Spurious Emissions

Tuned Frequency (MHz)	Emission Frequency (MHz)	Peak Monitored Level (dBuV/m)	Peak Limit (dBuV/m)	Average Monitored Level (dBuV/m)	Average Limit (dBuV/m)	Result
902.4	1810.0	45.15	74.0	Note 1	54.0	Pass
902.4	2260.0	39.76	74.0	Note 1	54.0	Pass
902.4	2710.0	36.86	74.0	Note 1	54.0	Pass
914.8	1832.5	47.02	74.0	Note 1	54.0	Pass
914.8	2282.5	41.28	74.0	Note 1	54.0	Pass
914.8	2755.0	37.61	74	Note 1	54.0	Pass
927.6	1855.0	47.59	74.0	Note 1	54.0	Pass
927.6	2327.5	42.01	74.0	Note 1	54.0	Pass
927.6	2777.5	37.53	74.0	Note 1	54.0	Pass

Note 1: Peak emission is below Average Limit.

No other emissions were detectable. All emissions were greater than 20dB below their respective limit.



## Emissions at Band Edges

**Name of Test:**

Emissions at Band Edges

**Engineer:** Alex Macon

**Test Equipment Utilized:**


i00103, i00379, i00428

**Test Date:** 12/3/14

### Test Procedure

The EUT was tested in a 3 meter semi-anechoic chamber. A spectrum analyzer was used to verify that the EUT met the requirements for band edge with both peak and average measurements. The cable and transducer correction factors were input into the analyzer as a reference level offset to ensure accurate readings.

### Test Setup

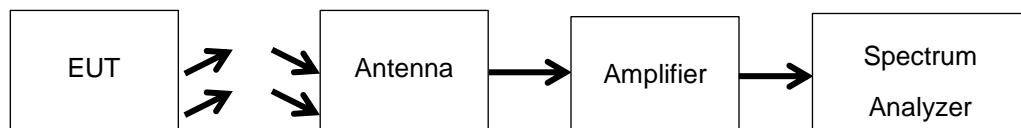


### Band Edge Emissions Summary


Tuned Frequency (MHz)	Emission Frequency (MHz)	Monitored Level	Detector	Limit	Result
902.4	901.9	-26.88 dBc	Peak	-20 dBc	Pass
927.6	928.04	-23.57 dBc	Peak	-20 dBc	Pass



### Band Edge 902.4 MHz

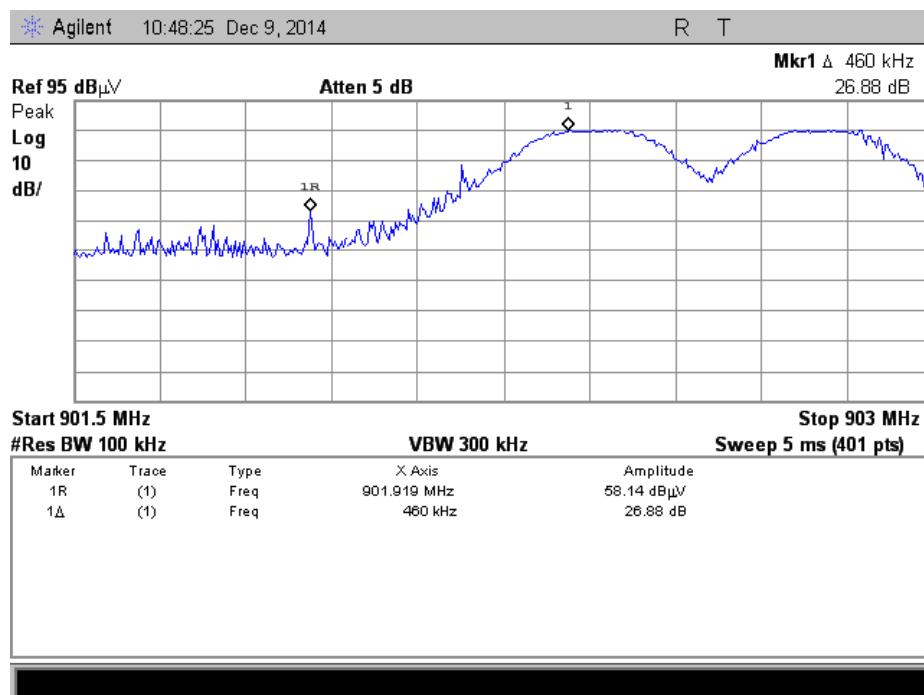


### Band Edge 927.8 MHz

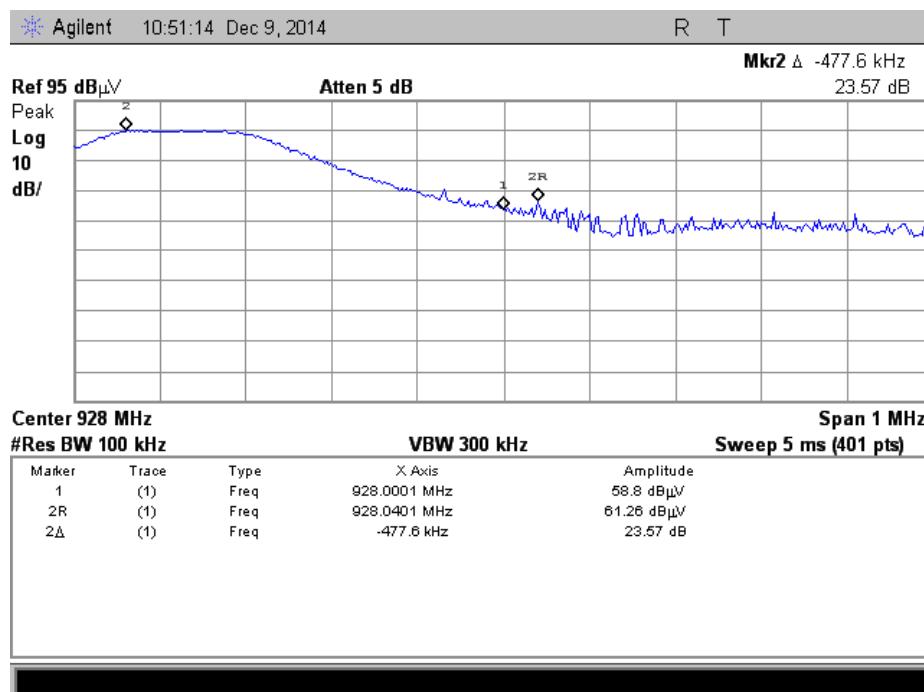




### Restricted Band 960 - 1000 MHz

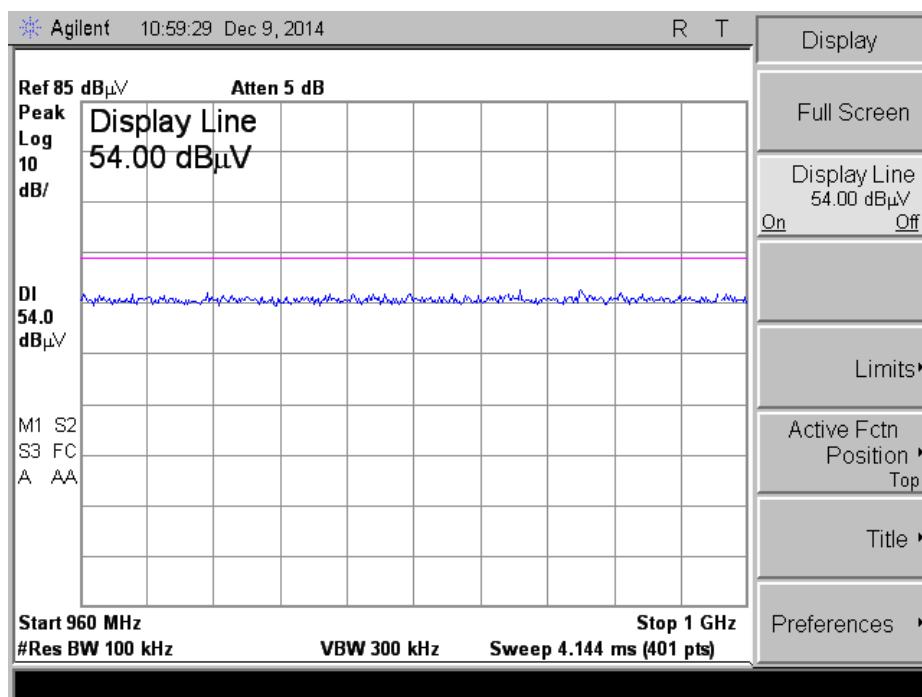

### Restricted Band 1000 - 1240 MHz

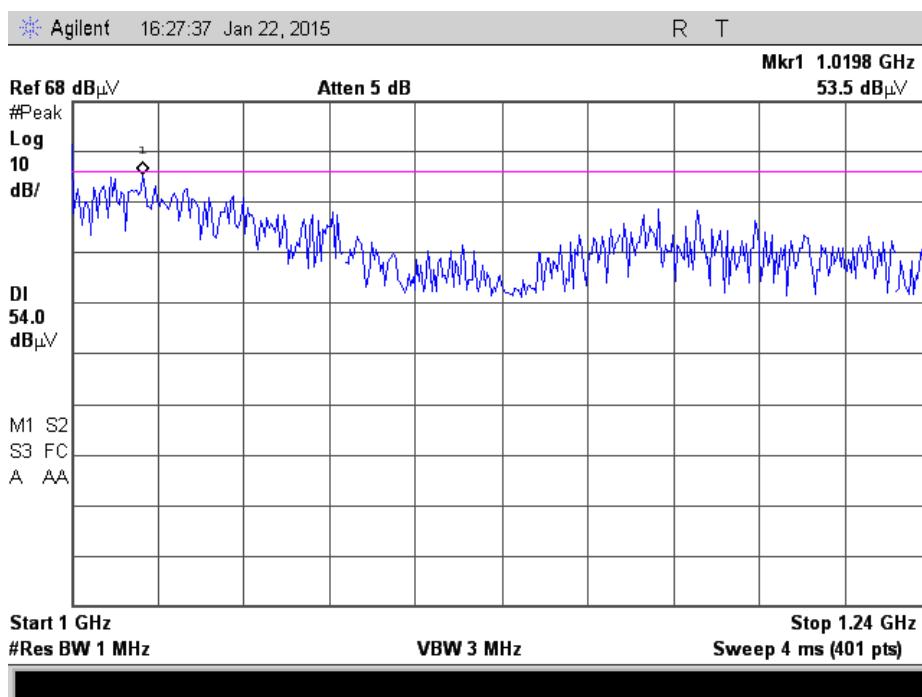

### Restricted Band Emissions Summary

Tuned Frequency (MHz)	Emission Frequency (MHz)	Peak Monitored Level (dB $\mu$ V/m)	Peak Limit (dB $\mu$ V/m)	Average Monitored Level (dB $\mu$ V/m)	Average Limit (dB $\mu$ V/m)	Result
927.6	1019.8	53.5	74.0	N/A	54.0	Pass




## Occupied Bandwidth

**Name of Test:** Occupied Bandwidth  
**Test Equipment Utilized:** i00103, i00379, i00428

**Engineer:** Alex Macon  
**Test Date:** 12/3/14

## Test Procedure

The EUT was tested in a 3 meter semi-anechoic chamber. The Span was set wide enough to capture the entire transmitting spectrum and the resolution bandwidth was set to at least 1% of the span. The analyzer was set to max hold and when the entire spectrum was captured, the 20dB and 99% bandwidths were measured to verify that the bandwidth met the specification.

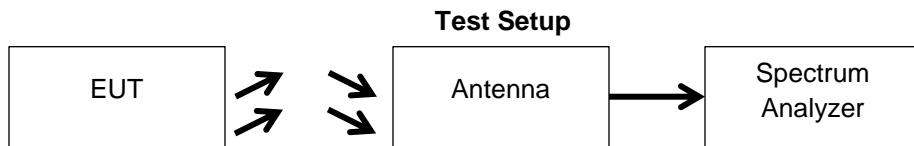

## 20 dB Bandwidth Summary

Frequency (MHz)	Recorded Measurement (kHz)
902.4	216
914.8	214
927.6	216

## 99% Bandwidth Summary

Frequency (MHz)	Recorded Measurement (kHz)
902.4	207
914.8	201
927.6	201



## Dwell Time

**Name of Test:**

Dwell Time

**Test Equipment Utilized:**

i00103, i00379, i00428


**Engineer:** Alex Macon

**Test Date:** 12/4/14

## Test Procedure

The EUT was tested in a 3 meter semi-anechoic chamber. The EUT was set to hopping mode with the spectrum analyzer set to a 0 Hz span. A single transmission was captured and the dwell time was recorded.

## Test Setup

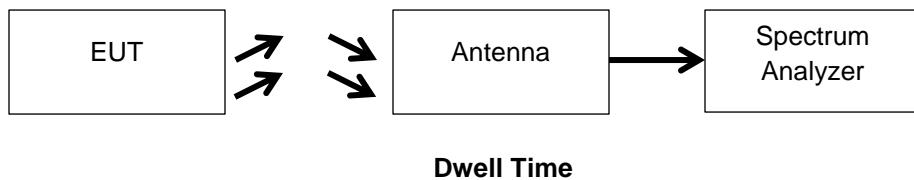

## Dwell Time

The Average Dwell time in a 20 second span is 10ms which is below the limit of 400ms

Due to the infrequent duty of the transmitter in normal operation, it was deemed impractical to measure the dwell time using a spectrum analyzer. The manufacturer has provided a detailed timing document to determine compliance.



## Number of Hopping Channels

**Name of Test:** Number of Hopping Channels  
**Test Equipment Utilized:** i00103, i00379, i00428

**Engineer:** Alex Macon  
**Test Date:** 12/4/14


## Test Procedure

The EUT was tested in a 3 meter semi-anechoic chamber. The Span was set to the specified band end points. The EUT was then set to operate in hopping mode. The MAX HOLD function of the spectrum analyzer was utilized to verify the number of hopping channels.

## Test Setup



## Number of Hopping Channels

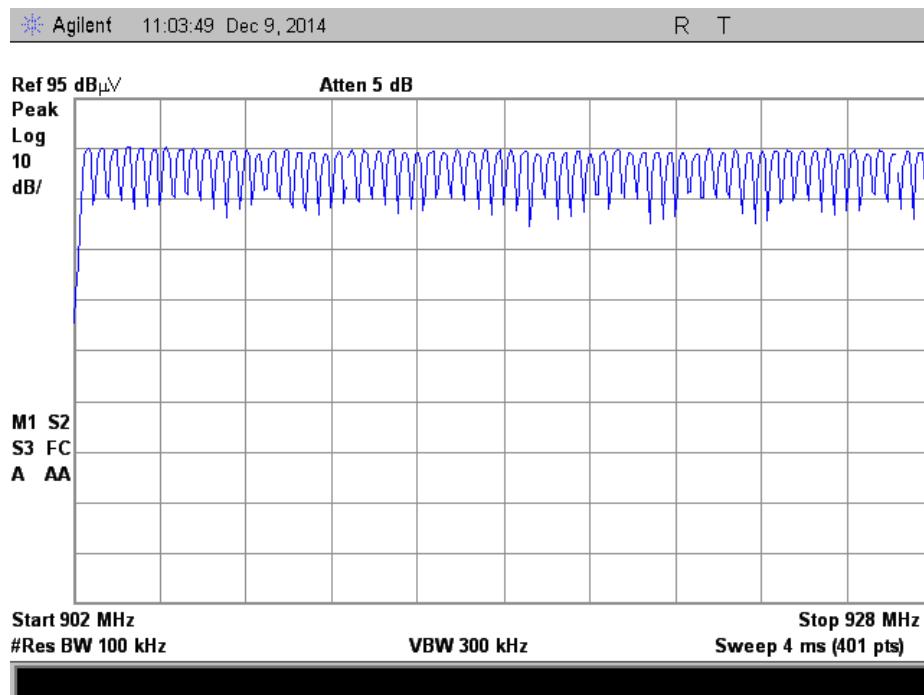

64 hopping channels were plotted.



### Test Equipment Utilized

Description	Manufacturer	Model #	CT Asset #	Last Cal Date	Cal Due Date
EMI Receiver	HP	8546A	i00033	2/24/14	2/24/15
Horn Antenna	EMCO	3115	i00103	12/11/12	12/11/14
High Pass Filter	Trilithic	4HX3400-3-XX	i00177	Verified on: 12/5/14	
Horn Antenna, Amplified	ARA	DRG-118/A	i00271	5/8/14	5/8/16
Humidity / Temp Meter	Newport	IBTHX-W-5	i00282	3/24/14	3/24/15
Voltmeter	Fluke	87III	i00319	2/22/14	2/22/15
Bi-Log Antenna	Schaffner	CBL 6111D	i00349	10/8/13	10/8/15
AC Power Source	Behlman	BL 6000	i00362	Verified on: 12/5/14	
EMI Analyzer	Agilent	E7405A	i00379	1/14/14	1/14/15
Thermo Hygrometer	Omega	RH81	i00408	4/15/13	4/15/15
3 Meter Semi-Anechoic Chamber	Panashield	3 Meter Semi-Anechoic Chamber	i00428	11/26/13	11/26/15
LISN	COM-Power	LI-125	i00446	7/25/14	7/25/15
LISN	COM-Power	LI-125A	i00447	7/25/14	7/25/15

In addition to the above listed equipment standard RF connectors and cables were utilized in the testing of the described equipment. Prior to testing these components were tested to verify proper operation.

END OF TEST REPORT