



DATE: 14 September 2010

I.T.L. (PRODUCT TESTING) LTD. FCC Radio Test Report for Maytronics Ltd.

Equipment under test:

Remote Control For Dolphin Supreme M5

RCU Dynamic 2010; RCU Basic 2010*

* See customer's declaration on page 6.

Written by:

D. Shidlowsky, Documentation

Approved by:

A. Sharabi, Test Engineer

Approved by:

I. Raz, EMC Laboratory Manager

This report must not be reproduced, except in full, without the written permission of I.T.L. (Product Testing) Ltd.

This report relates only to items tested.





Measurement/Technical Report for Maytronics Ltd.

Remote Control For Dolphin Supreme M5

RCU Dynamic 2010

FCC ID: WCH99954226-7

This report concerns: Original Grant: X

Class I Change: Class II Change:

Equipment type: Digital Transmission System

Limits used:

47CFR15 Section 15.247

Measurement procedure used is ANSI C63.4-2003.

Application for Certification Applicant for this device:

prepared by: (different from "prepared by")

Ishaishou Raz Yair Hadari
ITL (Product Testing) Ltd. Maytronics Ltd.
Kfar Bin Nun Kibbutz Yizrael

D.N. Shimshon 99780 D.N. Emek Yizrael 19350

Israel Israel

e-mail Sraz@itl.co.il Tel: +972-4-659-8111

Fax: +972- 4 - 652 - 2485 e-mail: yairh@maytronics.com



TABLE OF CONTENTS

1.	GENERA	L INFORMATION	
	1.1	Administrative Information	5
	1.2	List of Accreditations	
	1.3	Product Description	
	1.4	Test Methodology	
	1.5	Test Facility	
	1.6	Measurement Uncertainty	8
2.	SYSTEM	TEST CONFIGURATION	<u>c</u>
	2.1	Justification	
	2.2	EUT Exercise Software	
	2.3	Special Accessories	
	2.4	Equipment Modifications	
	2.5	Configuration of Tested System	
3.	TEST SE	TUP PHOTOGRAPHS	10
4.	6DB MINI	MUM BANDWIDTH	11
₹.	4.1	Test Specification	
	4.2	Test procedure	
	4.3	Test Results	
	4.4	Test Equipment Used	
5.	DADIATE	D POWER OUTPUT	
J.	5.1	Test Specification	
	5.2	Test procedure	
	5.3	Results Calculation	
	5.4	Test Equipment Used	
6.	DAND ED	OGE	
0.	6.1	Test procedure	
	6.2	Results table	
	6.3	Test Equipment Used	
7.		D EMISSION, 9 KHZ – 30 MHZ	
7.	7.1	Test Specification	
	7.1	Test Procedure	
	7.2	Measured Data	
	7.4	Test Instrumentation Used, Radiated Measurements	
	7.5	Field Strength Calculation	
8.	SPURIOU	JS RADIATED EMISSION 30 – 25000 MHZ	
•-	8.1	Test Specification	23
	8.2	Test Procedure	
	8.3	Test Data	
	8.4	Test Instrumentation Used, Radiated Measurements	27
	8.5	Field Strength Calculation 30 – 1000 MHz	28
9.		D_POWER SPECTRAL DENSITY	
	9.1	Test procedure	
	9.2	Results table	
	9.3	Test Equipment Used	
10.		A GAIN/INFORMATION	
11	RFFXPC)SURF/SAFFTY	3?



12.	APPENDI	X B - CORRECTION FACTORS	34
	12.1	Correction factors for CABLE	34
	12.2	Correction factors for CABLE	35
	12.3	Correction factors for CABLE	36
	12.6	Correction factors for LOG PERIODIC ANTENNA	37
	12.4	Correction factors for LOG PERIODIC ANTENNA	38
	12.5	Correction factors for BICONICAL ANTENNA	39
	12.6	Correction factors for Double-Ridged Waveguide Horn	40
		Correction factors for Horn Antenna	
		Correction factors for Horn Antenna	
	12.9	Correction factors for ACTIVE LOOP ANTENNA	43



1. General Information

1.1 Administrative Information

Manufacturer: Maytronics Ltd.

Manufacturer's Address: Kibbutz Yizrael

D.N. Emek Yizrael 19350

Israel

Tel: +972-4-659-8111 Fax: +972-4-652-2485

Manufacturer's Representative: Yair Hadari

Equipment Under Test (E.U.T): Remote Control For Dolphin

Supreme M5

Equipment Model No.: RCU Dynamic 2010, RCU Basic

2010 (See customer's declaration

on following page).

Equipment Part No.: 99954226

Date of Receipt of E.U.T: 26.01.10

Start of Test: 26.01.10

End of Test: 29.01.10

Test Laboratory Location: I.T.L (Product Testing) Ltd.

Kfar Bin Nun, ISRAEL 99780

Test Specifications: FCC Part 15 Subpart C





Date: July 19, 2010

DECLARATION

I herby declare that the

Remote Control Unit, RCU Dynamic 2010, P/N 99954226 is a full configuration model.

Another model,

Remote Control Unit, RCU Basic 2010, P/N 99954227 differs from the Remote Control Unit, RCU Dynamic 2010, P/N 99954226, only by software and graphics on the LCD display.

Please relate to them all (from an EMC point of view) as the same product.

Thank you

Signature:

Francois Roitsztein Quality Director Maytronics Ltd.



1.2 List of Accreditations

The EMC laboratory of I.T.L. is accredited by the following bodies:

- 1. The American Association for Laboratory Accreditation (A2LA) (U.S.A.), Certificate No. 1152.01.
- 2. The Federal Communications Commission (FCC) (U.S.A.), Registration No. 90715.
- 3. The Israel Ministry of the Environment (Israel), Registration No. 1104/01.
- 4. The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) (Japan), Registration Numbers: C-1350, R-1285.
- 5. Industry Canada (Canada), IC File No.: 46405-4025; Site No. IC 4025B-1.
- 6. TUV Product Services, England, ASLLAS No. 97201.
- 7. Nemko (Norway), Authorization No. ELA 207.

I.T.L. Product Testing Ltd. is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this test report have been determined in accordance with I.T.L.'s terms of accreditation unless stated otherwise in the report.



1.3 Product Description

The E.U.T. is a wireless remote control unit which enables automatic and manual operation of the Dolphin Supreme M5. The easily set parameters include cycle time, regular and ultraclean, climbing, and non-climbing.

1.4 Test Methodology

Radiated testing was performed according to the procedures in ANSI C63.4: 2003. Radiated testing was performed at an antenna to EUT distance of 3 meters.

1.5 Test Facility

The radiated emissions tests were performed at I.T.L.'s testing facility at Kfar Bin-Nun, Israel. This site is a FCC listed test laboratory (FCC Registration No. 90715, date of listing September 03, 2009). I.T.L.'s EMC Laboratory is also accredited by A2LA, certificate No. 1152.01.

1.6 Measurement Uncertainty

Radiated Emission

The Open Site complies with the ± 4 dB Normalized Site Attenuation requirements of ANSI C63.4-2003. In accordance with Paragraph 5.4.6.1 of this standard, this tolerance includes instrumentation calibration errors, measurement technique errors, and errors due to site anomalies.



2. System Test Configuration

2.1 Justification

Radiated emission screening was performed in 3 orthogonal orientations. The worst case orientation was the vertical position.

2.2 EUT Exercise Software

RCU_2009_99954226_22.02.10.hex software was used

2.3 Special Accessories

No special accessories were needed in order to achieve compliance.

2.4 Equipment Modifications

No modifications were needed in order to achieve compliance

2.5 Configuration of Tested System



Figure 1. Configuration of Tested System



3. Test Setup Photographs



Figure 2. Radiated Emission Test



4. 6dB Minimum Bandwidth


4.1 Test Specification

F.C.C. Part 15, Subpart C: 15.247(a)(2)

4.2 Test procedure

The E.U.T was placed on a non-metallic table, 0.8 meters above the ground plane, on a remote-controlled turntable in the OATS. The test distance was 3 meters. The transmitter unit operated with normal modulation. The EMI receiver was set to 30 kHz resolution BW. The spectrum bandwidth of the transmitter unit was measured and recorded. The test was performed to measure the transmitter occupied bandwidth. The EUT was set up as shown in Figure 3, and its proper operation was checked. The transmitter occupied bandwidth was measured with the EMI receiver as frequency delta between reference points on modulation envelope. The E.U.T. was tested at 2433 MHz.





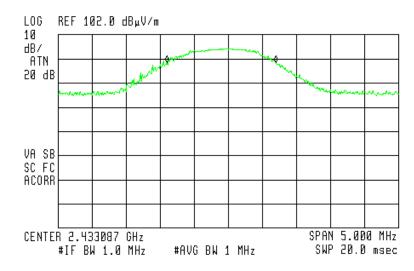


Figure 3. 2433 MHz



4.3 Test Results

E.U.T Description: Remote Control For Dolphin Supreme M5

Model: RCU Dynamic 2010 Part Number: 99954226

Operation	Bandwidth	Specification
Frequency	Reading	
(MHz)	(MHz)	(MHz)
2433.087	1.6	>0.5

Figure 4 Test Results

JUDGEMENT:	Passed
------------	--------

TEST PERSONNEL:

Tester Signature: _____ Date: 07.11.10

Typed/Printed Name: A. Sharabi



4.4 Test Equipment Used.

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	НР	85422E	3906A00276	November 10, 2009	1 year
RF Section	НР	85420E	3705A00248	November 10, 2009	1 year
Antenna Log Periodic	A.H. Systems	SAS-200/511	253	January 29, 2009	2 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A

Figure 5 Test Equipment Used



5. Radiated Power Output

5.1 Test Specification

F.C.C. Part 15, Subpart C: 15.247(b)

5.2 Test procedure

The E.U.T was placed on a non-metallic table, 0.8 meters above the ground plane, on a remote-controlled turntable in the OATS. The test distance was 3 meters.

The transmitter unit operated with normal modulation. The EMI receiver was set to 1 MHz resolution BW. The EUT was set up as shown in Figure 3, and its proper operation was checked.

The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization.

The E.U.T. was tested 2433 MHz.

Radiated output power levels were measured at selected operation frequencies and the results were converted to power level according to the formula as shown below:

$$P = \frac{(E_{V/m} \times d)^2}{(30 \times G)} [W]$$



🏇 13:14:07 JAN 26, 2010

ADRS / OPERATION

ACTV DET: PEAK

MEAS DET: PEAK QP AVG

MKR 2.433025 GHz 95.78 dB₄V/m

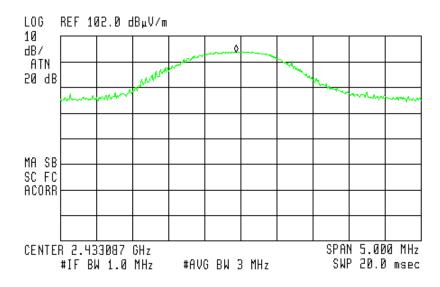


Figure 6 2433 MHz

5.3 Results Calculation

E.U.T Description: Remote Control For Dolphin Supreme M5

Model: RCU Dynamic 2010 Part Number: 99954226

Specification: F.C.C. Part 15, Subpart C

Frequency	Е	Е	Antenna Gain	Antenna Distance	Calculated Results	Limit	Margin
(MHz)	(dbµV/m	(V/m)	(dBi)	(m)	(mW)	(W)	(mW)
2433.00	95.78	0.06	1	3	1.08	1.0	-998.92

Figure 7 Test Results Table

JUDGEMENT:	Passed by 998.92 mW

TEST PERSONNEL:

Tester Signature: _____ Date: 07.11.10

Typed/Printed Name: A. Sharabi



5.4 Test Equipment Used.

Radiated Maximum Power Output

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
Receiver	НР	85422E	3906A00276	November 10, 2009	1 year
RF Section	НР	85420E	3705A00248	November 10, 2009	1 year
Antenna-Log Periodic	A.H.System	SAS-200/511	253	January 29, 2009	2 years
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	НР	LaserJet 2200	JPKGC19982	N/A	N/A

Figure 8 Test Equipment Used



6. Band Edge

[In Accordance with section 15.247(d)]

6.1 Test procedure

The E.U.T was placed on a non-metallic table, 0.8 meters above the ground plane, on a remote-controlled turntable in the OATS. The test distance was 3 meters.

The transmitter unit operated with normal modulation. The EMI receiver was set to 1 MHz resolution BW. The EUT was set up as shown in Figure 1, and its proper operation was checked.

The EMI receiver was adjusted to the transmission channel at the maximum radiated level. The display line was set to 20 dBc and the EMI receiver was set to the band edge frequencies.

Maximum power level below 2400 MHz and above 2483.5 MHz was measured relative to power level at 2410 MHz, and 2475 MHz correspondingly.

The E.U.T. was tested in 1 operating channel at the operating frequency of 2433 MHz.

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 2.399938 GHz
62.43 dB_µV/m

PREAMP ON

🌘 13:16:17 JAN 26, 2010

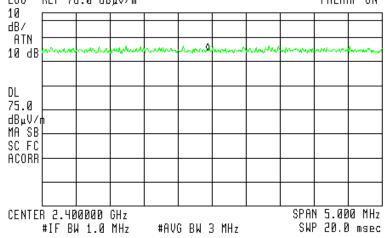


Figure 9 — 2433 MHz



4 13:17:07 JAN 26, 2010

ACTV DET: PEAK MEAS DET: PEAK QP AVG MKR 2.483438 GHz 62.87 dBµV∕m

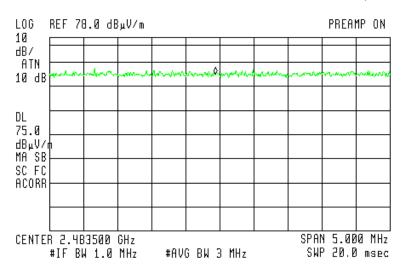


Figure 10 — 2433 MHz



6.2 Results table

E.U.T Description: Remote Control For Dolphin Supreme M5

Model: RCU Dynamic 2010 Part Number: 99954226

Specification: F.C.C. Part 15, Subpart C (15.247 (d))

Operation	Band Edge	Spectrum	Specification	Margin
Frequency	Frequency	Level		
(MHz)	(MHz)	(dBuV/m)	(dBuV/m)	(dB)
2433	2399.938	62.43	75.0	-12.57
2433	2483.438	62.87	75.0	-12.13

Figure 11 Band Edge

JUDGEMENT: Passed by 12.1 dB

TEST PERSONNEL:

Tester Signature: Date: 07.11.10

Typed/Printed Name: A. Sharabi



6.3 Test Equipment Used.

Band edge Spectrum

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
Receiver	НР	85422E	3906A00276	November 10, 2009	1 year
RF Section	НР	85420E	3705A00248	November 10, 2009	1 year
Antenna-Log Periodic	A.H.System	SAS-200/511	253	January 29, 2009	2 years
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	НР	LaserJet 2200	JPKGC19982	N/A	N/A

Figure 12 Test Equipment Used



7. Radiated Emission, 9 kHz – 30 MHz

7.1 Test Specification

9 kHz-30 MHz, FCC, Part 15, Subpart C, Section 209

7.2 Test Procedure

The E.U.T. operation mode and test set-up are as described in Section 3.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in Figure 3.1.

The frequency range 9 kHz-30 MHz was scanned.

The emissions were measured using a computerized EMI receiver complying to CISPR 16 requirements. The specification limits and applicable correction factors are loaded to the receiver via a 3.5" floppy disk.

In the frequency range 9 kHz-30MHz, the loop antenna was rotated on its vertical axis. The antenna height (center of loop) was 1 meter at a distance of 3 meters.

The E.U.T. was operated at the frequency of 2433 MHz. This frequency was measured using a peak detector.

The E.U.T. was tested in 1 operating channels and operation frequency of 2433 MHz.

7.3 Measured Data

JUDGEMENT: Passed

The EUT met the requirements of the F.C.C. Part 15, Subpart C, Section 209 specification.

No signals were detected in the frequency range of 9 kHz – 30 MHz.

TEST PERSONNEL:

Tester Signature: _____ Date: 07.11.10

Typed/Printed Name: A. Sharabi



7.4 Test Instrumentation Used, Radiated Measurements

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	НР	85422E	3906A00276	November 10, 2009	1 year
RF Section	НР	85420E	3705A00248	November 10, 2009	1 year
Active Loop Antenna	EMCO	6502	9506-2950	October 19, 2009	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	НР	LaserJet 2200	JPKGC19982	N/A	N/A

7.5 Field Strength Calculation

The field strength is calculated directly by the EMI Receiver software, and a "Correction Factors" data disk, using the following equation:

$$FS = RA + AF + CF$$

FS: Field Strength [dBμv/m]

RA: Receiver Amplitude [dBµv]

AF: Receiving Antenna Correction Factor [dB/m]

CF: Cable Attenuation Factor [dB]

Example: $FS = 30.7 \text{ dB}\mu\text{V}$ (RA) + 14.0 dB (AF) + 0.9 dB (CF) = 45.6 dB μV

No external pre-amplifiers are used.



8. Spurious Radiated Emission 30 – 25000 MHz

8.1 Test Specification

30 MHz-25000 MHz, F.C.C., Part 15, Subpart C

8.2 Test Procedure

The E.U.T. operation mode and test set-up are as described in Section 3.

See Section 3.1 Justification of the System Test Configuration concerning the E.U.T. orientation for this test.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground.

The frequency range 30 MHz-25000 MHz was scanned, and the list of the highest emissions was verified and updated accordingly.

The levels of the emissions within the frequency ranges of the restricted bands (Section 15.205 of FCC Part 15) were compared to the limits of the table in Section 15.209 (a), General Requirements.

The emissions were measured using a computerized EMI receiver complying to CISPR 16 requirements. The specification limits and applicable correction factors are loaded to the receiver via a 3.5" floppy disk.

In the frequency range 1-2.9 GHz, a computerized EMI receiver complying to CISPR 16 requirements was used.

In the frequency range 2.9-25.0 GHz, a spectrum analyzer including a low noise amplifier was used. During average measurements, the IF bandwidth was 1 MHz and the video bandwidth was 100Hz. During peak measurements, the IF bandwidth was 1 MHz and the video bandwidth was 3 MHz.

The test distance was 3 meters.

The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization. Verification of the E.U.T emissions was based on the following methods: turning the E.U.T on and off; using a frequency span less than 10 MHz; observation of the signal level during turntable rotation. (Background noise is not affected by the rotation of the E.U.T.)

In the frequency range 30-1000 MHz, the readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization.

The E.U.T. was tested in 1 operating channel and operation frequency of 2433 MHz.



8.3 Test Data

JUDGEMENT: Passed

The EUT met the requirements of the F.C.C. Part 15, Subpart C, specification. The results for all three operation channels were the same.

The signals in the band 30 MHz - 1.0 GHz were below the spectrum analyzer noise level, at least 20 dB below the specification limit.

The margin between the emission level and the specification limit is 9.0 dB in the worst case at the frequency of 4866.00 MHz, horizontal polarization.

TEST PERSONNEL:

Tester Signature: _____ Date: 07.11.10

Typed/Printed Name: A. Sharabi



Radiated Emission Above 1 GHz

E.U.T Description Remote Control For Dolphin Supreme

M5

Type RCU Dynamic 2010

Part Number: 99954226

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 25.0 GHz

Test Distance: 3 meters Detector: Peak

Operation Frequency	Freq.	Polarity	Peak Reading*	Peak. Specification	Peak. Margin
(MHz)	(MHz)	(H/V)	$(dB\mu V/m)$	$(dB\;\mu V/m)$	(dB)
2433.00	4866.00	Н	61.0	74.0	-13.0
2433.00	4866.00	V	58.0	74.0	-16.0

Figure 13. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL.

Detector: Peak

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

[&]quot;Peak Reading" includes correction factor.

^{* &}quot;Correction Factor" = Antenna Factor + Cable Loss- Low Noise Amplifier Gain



Radiated Emission Above 1 GHz

E.U.T Description Remote Control For Dolphin Supreme

M5

Type RCU Dynamic 2010

Part Number: 99954226

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 25.0 GHz

Test Distance: 3 meters Detector: Average

Operation Frequency: MHz

Operation Frequency	Freq.	Polarity	Average Reading*	Average Specification	Average Margin
(MHz)	(MHz)	(H/V)	$(dB\mu V/m)$	$(dB\;\mu V/m)$	(dB)
2433.00	4866.00	Н	45.0	54.0	-9.0
2433.00	4866.00	V	44.0	54.0	-10.0

Figure 14. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL.

Detector: Average

Notes:

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

* Correction Factor = Antenna Factor + Cable Loss- Low Noise Amplifier Gain

[&]quot;Average Reading" includes correction factor.



8.4 Test Instrumentation Used, Radiated Measurements

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Period
EMI Receiver	HP	85422E	3906A00276	November 10, 2009	1Year
RF Filter Section	НР	85420E	3705A00248	November 10, 2009	1Year
Antenna Biconical	ARA	BCD 235/B	1041	March 25, 2009	1Year
Antenna Log Periodic	ARA	LPD-2010/A	1038	March 6, 2009	1 Year
Antenna Log Periodic	A.H. Systems	SAS- 200/511	253	January 29, 2009	2 Years
Double Ridged Waveguide Horn Antenna	EMCO	3115	29845	March 16, 2008	2 Years
Horn Antenna	ARA	SWH-28	1008	December 23, 2008	2 Years
Horn Antenna	Narda	V637	0410	December 23, 2008	2 Years
Low Noise Amplifier	DBS MICROWAVE	LNA-DBS- 0411N313	013	January 13, 2010	1 Year
Low Noise Amplifier	Sophia Wireless	LNA 28-B	232	January 13, 2010	1 Year
Spectrum Analyzer	HP	8592L	3826A01204	March 17, 2009	1 Year
Spectrum Analyzer	HP	8546E	3442A00275	January 11, 2010	1 Year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	НР	LaserJet 2200	JPKGC19982	N/A	N/A



8.5 Field Strength Calculation 30 – 1000 MHz

The field strength is calculated directly by the EMI Receiver software, and a "Correction Factors" data disk, using the following equation:

$$[dB\mu v/m]$$
 FS = RA + AF + CF

FS: Field Strength [dB\u00e4v/m]

RA: Receiver Amplitude [dBµv]

AF: Receiving Antenna Correction Factor [dB/m]

CF: Cable Attenuation Factor [dB]

Example: $FS = 30.7 \text{ dB}\mu\text{V}$ (RA) + 14.0 dB (AF) + 0.9 dB (CF) = 45.6 dB μV

No external pre-amplifiers are used.



9. Radiated Power Spectral Density

[In accordance with section 15.247(e)]

9.1 Test procedure

The E.U.T was placed on a non-metallic table, 0.8 meters above the ground plane, on a remote-controlled turntable in the OATS. The test distance was 3 meters.

The transmitter unit operated with normal modulation. The EMI receiver was set to 1 MHz resolution BW. The EUT was set up as shown in Figure 1, and its proper operation was checked.

The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization.

The E.U.T. was tested in 1 operating channel and operation frequency of 2433 MHz.

Then the EMI receiver was set to 3 kHz resolution BW, span of 300.0 kHz, and sweep time of 100 seconds. The spectrum peaks were located at each of the 3 operating frequencies.

Radiated peak output power levels were converted to power level according to the formula as shown below:

$$P = \frac{(E_{V/m} \times d)^2}{(30 \times G)} [W]$$

🌆 13:24:03 JAN 26, 2010

ACTV DET: PEAK MEAS DET: PEAK QP AVG MKR 2.4330615 GHz 94.61 dBµV/m

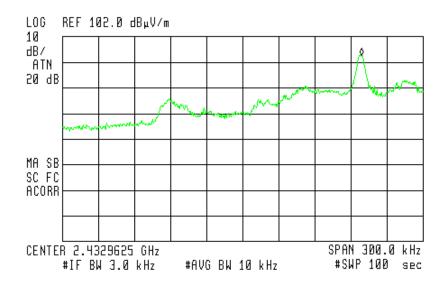


Figure 15 — 2433 MHz



9.2 Results table

E.U.T Description: Remote Control For Dolphin Supreme M5

Model: RCU Dynamic 2010 Part Number: 99954226

Specification: F.C.C. Part 15, Subpart C (15.247(e))

Frequency	Е	Spectral Density Result	Antenna Gain	Antenna Distance	Calculated Results	Spec.	Margi n
(MHz)	(dbµV/m	(V/m)	(dBi)	(m)	(mW)	(mW)	(mW)
2433	94.61	0.05	1	3	0.75	6.3	-5.55

Figure 16 Test Results

JUDGEMENT: Passed by 5.55 mW

TEST PERSONNEL:

Tester Signature: Date: 07.11.10

Typed/Printed Name: A. Sharabi



9.3 Test Equipment Used.

Transmitted Power Density

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	НР	85422E	3906A00276	November 10, 2009	1 year
RF Section	НР	85420E	3705A00248	November 10, 2009	1 year
Antenna Log Periodic	A.H. Systems	SAS-200/511	253	January 29, 2009	2 years
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	НР	LaserJet 2200	JPKGC19982	N/A	N/A

Figure 17 Test Equipment Used



10. Antenna Gain/Information

The antenna gain is 1 dBi simulated.



11. R.F Exposure/Safety

The E.U.T. is a handheld remote control.

Calculation of Maximum Permissible Exposure (MPE)
Based on Section 1.1307(b)(1) Requirements

(a) FCC limits at 2433 MHz is: $1 \frac{mW}{cm^2}$

Using table 1 of Section 1.1310 limit for general population/uncontrolled exposures, the above level is an average over 30 minutes.

(b) The power density produced by the E.U.T. is

$$S = \frac{P_t G_t}{4\pi R^2}$$

 $P_t G_T$ - Transmitted Power + Antenna Gain = 1.08 mw (Peak)

R- Distance from Transmitter using 0.05 m worst case

(c) The peak power density is:

$$S_p = \frac{1.08}{4\pi (0.5)^2} = 0.343 \frac{mW}{cm^2}$$

(f) This is below the FCC limit.



12. APPENDIX B - CORRECTION FACTORS

12.1 Correction factors for CABLE

from EMI receiver to test antenna at 3 meter range.

FREQUENCY	CORRECTION FACTOR
(MHz)	(dB)
10.0	0.3
20.0	0.6
30.0	0.8
40.0	0.9
50.0	1.1
60.0	1.2
70.0	1.3
80.0	1.4
90.0	1.6
100.0	1.7
150.0	2.0
200.0	2.3
250.0	2.7
300.0	3.1
350.0	3.4
400.0	3.7
450.0	4.0
500.0	4.3
600.0	4.7
700.0	5.3
800.0	5.9
900.0	6.3
1000.0	6.7

CORRECTION FACTOR
(dB)
7.3
7.8
8.4
9.1
9.9
11.2
12.2
13.0

- 1. The cable type is RG-214.
- 2. The overall length of the cable is 27 meters.
- 3. The above data is located in file 27MO3MO.CBL on the disk marked "Radiated Emission Tests EMI Receiver".



12.2 Correction factors for CABLE

from EMI receiver to test antenna at 3 meter range.

FREQUENCY	CORRECTION FACTOR
(GHz)	(dB)
1.0	1.2
2.0	1.6
3.0	2.0
4.0	2.4
5.0	3.0
6.0	3.4
7.0	3.8
8.0	4.2
9.0	4.6
10.0	5.0
12.0	5.8

- 1. The cable type is RG-8.
- 2. The overall length of the cable is 10 meters.



12.3 Correction factors for CABLE

from spectrum analyzer to test antenna above 2.9 GHz

FREQUENCY	CORRECTION FACTOR	FREQUENCY	CORRECTION FACTOR
(GHz)	(dB)	(GHz)	(dB)
1.0	1.9	14.0	9.1
2.0	2.7	15.0	9.5
3.0	3.5	16.0	9.9
4.0	4.2	17.0	10.2
5.0	4.9	18.0	10.4
6.0	5.5	19.0	10.7
7.0	6.0	20.0	10.9
8.0	6.5	21.0	11.2
9.0	7.0	22.0	11.6
10.0	7.5	23.0	11.9
11.0	7.9	24.0	12.3
12.0	8.3	25.0	12.6
13.0	8.7	26.0	13.0

- 1. The cable type is SUCOFLEX 104 E manufactured by SUHNER.
- 2. The cable is used for measurements above 2.9 GHz.
- 3. The overall length of the cable is 10 meters.



12.6 Correction factors for

Type LPD 2010/A at 3 and 10 meter ranges.

Distance of 3 meters

Distance of	
FREQUENCY	AFE
(MHz)	(dB/m)
200.0	9.1
250.0	10.2
300.0	12.5
400.0	15.4
500.0	16.1
600.0	19.2
700.0	19.4
800.0	19.9
900.0	21.2
1000.0	23.5

Distance of 10 meters

FREQUENCY	AFE
(MHz)	(dB/m)
200.0	9.0
250.0	10.1
300.0	11.8
400.0	15.3
500.0	15.6
600.0	18.7
700.0	19.1
800.0	20.2
900.0	21.1
1000.0	23.2

- 1. Antenna serial number is 1038.
- 2. The above lists are located in file number 38M3O.ANT for a 3 meter range, and file number 38M100.ANT for a 10 meter range.
- 3. The files mentioned above are located on the disk marked "Radiated Emission Test EMI Receiver".



12.4 Correction factors for LOG PERIODIC ANTENNA Type SAS-200/511 at 3 meter range.

FREQUENCY	ANTENNA
	FACTOR
(GHz)	(dB)
1.0	24.9
1.5	27.8
2.0	29.9
2.5	31.2
3.0	32.8
3.5	33.6
4.0	34.3
4.5	35.2
5.0	36.2
5.5	36.7
6.0	37.2
6.5	38.1

FREQUENCY	ANTENNA
	FACTOR
(GHz)	(dB)
7.0	38.6
7.5	39.2
8.0	39.9
8.5	40.4
9.0	40.8
9.5	41.1
10.0	41.7
10.5	42.4
11.0	42.5
11.5	43.1
12.0	43.4
12.5	44.4
13.0	44.6

- 1. Antenna serial number is 253.
- 2. The above lists are located in file number SAS3M0.ANT for a 3 meter range.
- 3. The files mentioned above are located on the disk marked "Antenna Factors".



12.5 Correction factors for BICONICAL ANTENNA Type BCD-235/B, at 3 meter range

FREQUENCY	AFE
(MHz)	(dB/m)
20.0	19.4
30.0	14.8
40.0	11.9
50.0	10.2
60.0	9.1
70.0	8.5
80.0	8.9
90.0	9.6
100.0	10.3
110.0	11.0
120.0	11.5
130.0	11.7
140.0	12.1
150.0	12.6
160.0	12.8
170.0	13.0
180.0	13.5
190.0	14.0
200.0	14.8
210.0	15.3
220.0	15.8
230.0	16.2
240.0	16.6
250.0	17.6
260.0	18.2
270.0	18.4
280.0	18.7
290.0	19.2
300.0	19.9
310	20.7
320	21.9
330	23.4
340	25.1
350	27.0

- 1. Antenna serial number is 1041.
- 2. The above list is located in file 19BC10M1.ANT on the disk marked "Radiated Emissions Tests EMI Receiver".



12.6 Correction factors for Double-Ridged Waveguide Horn Model: 3115, S/N 29845 at 3 meter range.

FREQUENCY	ANTENNA	ANTENN	FREQUENCY	ANTENNA	ANTENNA
	FACTOR	A Gain		FACTOR	Gain
(GHz)	(dB 1/m)	(dBi)	(GHz)	(dB 1/m)	(dBi)
1.0	24.8	5.4	10.0	38.8	11.4
1.5	26.1	7.6	10.5	38.9	11.8
2.0	28.6	7.7	11.0	39.0	12.1
2.5	29.8	8.4	11.5	39.6	11.8
3.0	31.4	8.4	12.0	39.8	12.0
3.5	32.4	8.7	12.5	39.6	12.5
4.0	33.7	8.6	13.0	40.0	12.5
4.5	33.4	9.9	13.5	39.8	13.0
5.0	34.5	9.7	14.0	40.2	13.0
5.5	35.1	9.9	14.5	40.6	12.9
6.0	35.4	10.4	15.0	41.3	12.4
6.5	35.6	10.8	15.5	39.5	14.6
7.0	36.2	10.9	16.0	38.8	15.5
7.5	37.3	10.4	16.5	40.0	14.6
8.0	37.7	10.6	17.0	41.4	13.4
8.5	38.3	10.5	17.5	44.8	10.3
9.0	38.5	10.8	18.0	47.2	8.1
9.5	38.7	11.1			



12.7 Correction factors for

Horn Antenna Model: SWH-28 at 1 meter range.

Г		1
EDECHENON		
FREQUENCY	AFE	Gain
(GHz)	(dB/m)	(dB1)
18.0	40.3	16.1
19.0	40.3	16.3
20.0	40.3	16.1
21.0	40.3	16.3
22.0	40.4	16.8
23.0	40.5	16.4
24.0	40.5	16.6
25.0	40.5	16.7
26.0	40.6	16.4



12.8 Correction factors for

Horn Antenna Model: V637

FREQUENCY	AFE	Gain
(GHz)	(dB/m)	(dB1)
26.0	43.6	14.9
27.0	43.7	15.1
28.0	43.8	15.3
29.0	43.9	15.5
30.0	43.9	15.8
31.0	44.0	16.0
32.0	44.1	16.2
33.0	44.1	16.4
34.0	44.1	16.7
35.0	44.2	16.9
36.0	44.2	17.1
37.0	44.2	17.4
38.0	44.2	17.6
39.0	44.2	17.8
40.0	44.2	18.0



12.9 Correction factors for ACTIVE LOOP ANTENNA Model 6502 S/N 9506-2950

	Magnetic	Electric
FREQUENCY	Antenna	Antenna
	Factor	Factor
(MHz)	(dB)	(dB)
.009	-35.1	16.4
.010	-35.7	15.8
.020	-38.5	13.0
.050	-39.6	11.9
.075	-39.8	11.8
.100	-40.0	11.6
.150	-40.0	11.5
.250	-40.0	11.6
.500	-40.0	11.5
.750	-40.1	11.5
1.000	-39.9	11.7
2.000	-39.5	12.0
3.000	-39.4	12.1
4.000	-39.7	11.9
5.000	-39.7	11.8
10.000	40.2	11.3
15.000	-40.7	10.8
20.000	-40.5	11.0
25.000	-41.3	10.2
30.000	42.3	9.2