



Test Report No. 9612319569

Applicant: Maytronics Ltd.

Equipment Under Test:

Single channel transmitter

Models: 99954735LF

***From The Standards Institution
Of Israel
Industry Division
Electronics & Telematics Laboratory
EMC Branch***



Certificate Number: AT-1359

**Test Report No.:** 9612319569**Page 2 of 23 pages****Title:** Single channel transmitter**Model:** 99954735LF**FCC ID:** WCH99956RF

Applicant:	Maytronics Ltd.
Address:	Kibbutz Yizre'el, 19350 Israel
Sample for test selected by:	The customer
The date of tests:	10 March 2016

Description of Equipment Under Test (EUT):	Single channel transmitter.
Model:	99954735LF
Software version of brain unit	Revision 011
Hardware version of brain unit	Revision 01
Manufactured by:	Maytronics Ltd.

Reference Documents:

- ❖ CFR 47 FCC: Rules and Regulations; Part 15. "Radio frequency devices";
Subpart C: "Intentional radiators" (2015).
Section 15.209. "Radiated emission limits, general requirements".
"Radiated Emission Limits, Additional Provisions";
Section 15.249. "Operation within the bands 902 – 928 MHz, 2400 – 2483.5 MHz, 5725 – 5875 MHz and 24.0 - 24.25 GHz".

This Test Report contains 23 pages and may be used only in full.	This Test Report applies only to the specimen tested and may not be applied to other specimens of the same product.
--	---

**Test Report No.:** 9612319569**Page 3 of 23 pages****Title:** Single channel transmitter**Model:** 99954735LF**FCC ID:** WCH99956RF

Table of Contents

1. EUT Description and operation	4
1.1. General description:	4
2. Test summary	5
2.1. Potential emission sources:	7
2.2. EUT setup and operation:	7
3. Measurements and derived results	7
3.1. Location of the Test Site:	7
3.2. Test condition:	7
3.3. Radiated emission test.	8
3.4. Test of field strength emission from intentional radiator.	9
3.5. Conducted emission test per 15.207.	15
3.6. Test of occupied bandwidth per 15.215(c)	17
4. Appendix 1. Test equipment used	18
5. Appendix 2: Antenna Factor and Cable Loss	19
6. Appendix 3: Test setups photo.	23

**Test Report No.: 9612319569****Page 4 of 23 pages****Title: Single channel transmitter****Model: 99954735LF****FCC ID: WCH99956RF**

1. EUT Description and operation

1.1. General description:

* Note: the customer supplied all information in clause below.

The EUT, is a communication module and is used to communicate by single channel RF transmission with a RCU by RF-FSK communication.

The power supply module provides the voltage to operate the module.

This power supply is connected to the mains and is outputting to the robot 29VDC. This is an outdoor appliance.

Single channel frequency:	2433 MHz
Type of modulation:	FSK
Effective radiated output power:	< 0 dBm
Antenna type:	Internal on PCB

The communication module mounted as power supply front panel.
External view is presented in photo # 1.



Photo 1. Front panel of P.S. view.

**Test Report No.:** 9612319569**Page 5 of 23 pages****Title:** Single channel transmitter**Model:** 99954735LF**FCC ID:** WCH99956RF

2. Test summary

Parameter	FCC Part 15 Reference paragraph	Verdict
Test of field strength emission from intentional radiators	“Radiated Emission Limits, Additional Provisions”; Section 15.249.	Comply

Electronics & Telematics
Laboratory

May 2016

Name: Eng. Yuri Rozenberg
Position: Head of EMC
Branch

Name: Michael Feldman
Position: Test Technician

Measurement uncertainty.

The test equipment has been calibrated according to its recommended procedures and is within the manufacturer's published limit of error.

The laboratory calibrates its standards by a third party (traceable to NIST, USA) on a regular basis according to equipment manufacturer requirements.

In the following table the uncertainty calculation is given.

Type of disturbance Test description	Calculated uncertainty U_{LAB}
Radiated disturbance electric field strength in a SAR at 3 m distance 9kHz – 30MHz 30 MHz – 1.0 GHz	± 2.54 dB ± 4.32 dB
electric field strength in a FAR at 3 m distance 1.0 – 18 GHz. 18 – 40 GHz.	± 4.47 dB ± 2.78 dB

**Test Report No.:** 9612319569**Page 6 of 23 pages****Title:** Single channel transmitter**Model:** 99954735LF**FCC ID:** WCH99956RF**Normative References.**

FCC 47 CFR Part 15, Subpart C, 2015	Radio Frequency Devices Subpart C – Intentional Radiators
ANSI C63.4: 2009	American National Standard for Method of Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
ANSI C63.10: 20013	American National Standard for Testing of Unlicensed Wireless Devices.

**Test Report No.:** 9612319569**Page 7 of 23 pages****Title:** Single channel transmitter**Model:** 99954735LF**FCC ID:** WCH99956RF

2.1. Potential emission sources:

The potential emission sources are detailed in Table 1.

Table 1. Potential emission sources

Frequency	Location
26 MHz	CC2510 MCU main clock
32.0 MHz	CC2541 MCU main clock
2433 MHz	RF signal

2.2. EUT setup and operation:

Test was performed in continuous transmission mode on single transmit carrier frequency 2433 MHz of 2400 – 2483.5 MHz frequency band.

3. Measurements and derived results

3.1. Location of the Test Site:

Radiated test was conducted at the EMC laboratory of the Standards Institution of Israel in Tel-Aviv.

3.2. Test condition:

Temperature: 22 °C. Humidity: 49 %. Atmospheric pressure: 1009 mbar.

**Test Report No.:** 9612319569**Page 8 of 23 pages****Title:** Single channel transmitter**Model:** 99954735LF**FCC ID:** WCH99956RF

3.3. Radiated emission test.

3.3.1. General:

Per FCC Part 15 Subpart C Sections 15.209, 15.249.

- * Initial scans were made using a peak detector but still using the appropriate ANSI IF bandwidth.
- * A tolerance limit was set 10 dB below the specification limit. Levels above the tolerance limit were retested using the Peak, QP or Average detectors.

3.3.2. Radiated emission measurements:

Preliminary investigation was performed from the lowest radio frequency signal generated in the equipment up to ten harmonic of a carrier frequency.

The final radiated emission measurements were performed in the semi Anechoic chamber at 3 m test distances. The EUT was operated in continue transmition mode. The transmitter was installed on a turn - table. Active Loop, Biconilog and Double Ridged Guide antennas were used. The measurements were performed at frequencies at which the signal level was 10 dB below the limit or less. The levels were maximized by rotating turtable through 360° and changing antenna-to-EUT polarization from vertical to horizontal. The worse case result was noted in tables.

3.3.3. Radiated emission test results:

Final result measurements are presented in tables and plots ## 1 - 10 in section 3.4.5.

**Test Report No.:** 9612319569**Page 9 of 23 pages****Title:** Single channel transmitter**Model:** 99954735LF**FCC ID:** WCH99956RF

3.4. Test of field strength emission from intentional radiator.

3.4.1. General:

Per FCC Part 15 Subpart C clause 15.249.

3.4.2. Requirements:

The field strength emissions from intentional radiators operated according to section 15.249 (a) shall comply with the follow limits.

Table 2. Section 15.249 limit.

Specified field strength limit of Fundamental mV/m/dB μ V/m	Specified field strength limit of Harmonics mV/dB μ V/m
50/94.0	500/54.0

Notes:

15.249 (d). The field strength for frequencies above 1000 MHz based on average limits. The field strength of emissions radiated on any frequency outside of the specified band, except for harmonics shall be attenuated by at least 50 dB below the level of fundamental or to the general radiated emissions limits in section 15.209 whichever is lesser attenuation.

15.249 (e). According to section 15.35(b). Any peak straight emissions shall not exceed permitted average limit by more than 20 dB.

3.4.3. Test procedure:

The test was conducted according to clause 15.249.

3.4.4. Test summary:

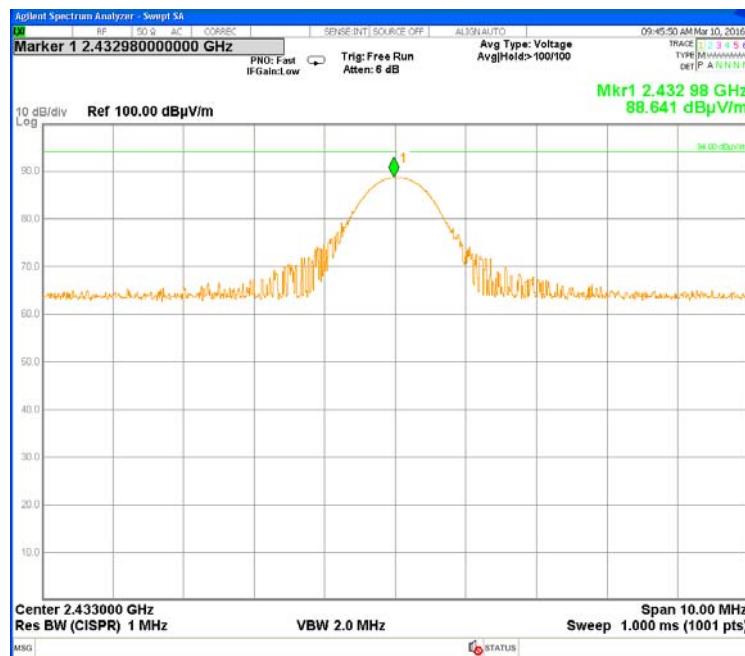
The tested unit meets the standard requirement.

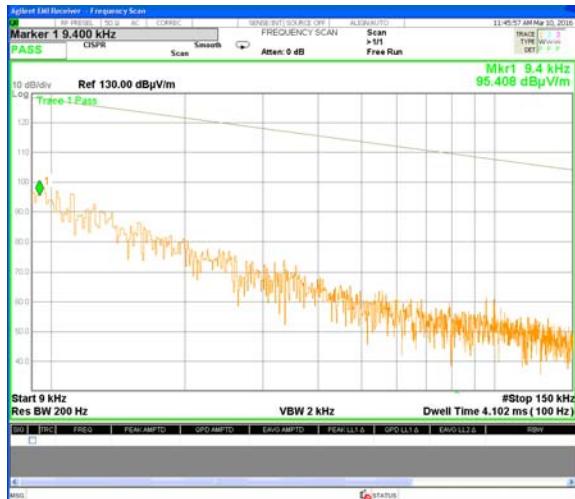
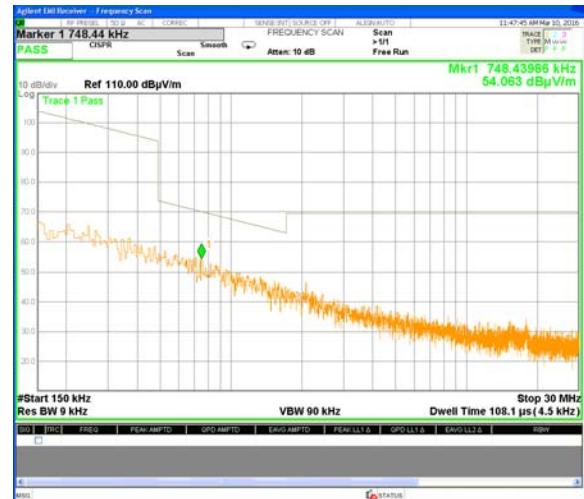
**Test Report No.: 9612319569****Page 10 of 23 pages****Title: Single channel transmitter****Model: 99954735LF****FCC ID: WCH99956RF****3.4.5. Test results:****Radiated emission result at carrier frequencies.**

Carrier frequency, MHz	Antenna pol. V/H	Peak Ampl. dB μ V/m	Peak. limit dB μ V/m	Specified Avg. limit dB μ V/m	Peak result below peak limit margin. dB	Peak result below average limit margin. dB	Ref. to plot #
2433.0	Hor.	88.6	114.0	94.0	25.4	5.4	1

Spurious emission results.

Freq. MHz	Antenna pol. V/H	Peak Ampl. dB μ V/m	Peak Ampl. limit, dB μ V/m	Margin dB	Avg. Ampl. dB μ V/m	Specified @3m limit, dB μ V/m	Margin dB	Ref. to plot #
41.9	V	-	-	-	24.3(QP)	40.0	15.7	4
75.7	V	-	-	-	20.7(QP)	40.0	19.3	4
2399.2	H	56.7	74.0	17.3	40.6	54.0	13.4	6
2484.2	H	55.0	74.0	19.0	42.6	54.0	11.4	7
4866	H	60.9	74.0	13.1	51.0	54.0	3.0	8
7299	H	55.0	74.0	19.0	44.0	54.0	10.0	9
23750	H	50.3	74	>20	-	-	-	11
23800	H	-	-	-	37.9	54.0	16.1	11

**Test Report No.: 9612319569****Page 11 of 23 pages****Title: Single channel transmitter****Model: 99954735LF****FCC ID: WCH99956RF****Plot # 1. Fundamental frequency test.**

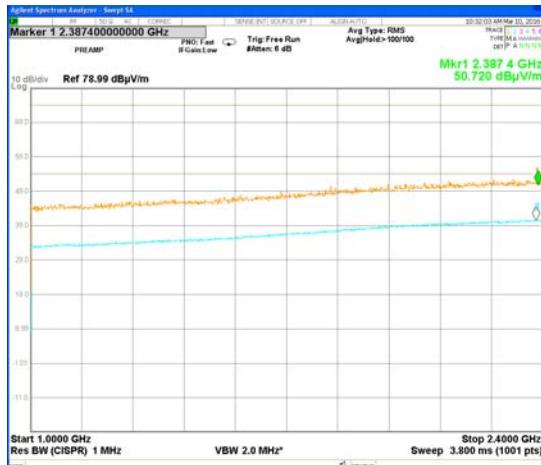
**Test Report No.: 9612319569****Page 12 of 23 pages****Title: Single channel transmitter****Model: 99954735LF****FCC ID: WCH99956RF****Plot # 2. Emissions scan 0.009 – 0.15 MHz.****Plot # 3. Emissions scan 0.15 MHz – 30 MHz.****Plot # 4. Spurious emissions scan in 30 MHz to 1000 MHz band.**



Test Report No.: 9612319569

Page 13 of 23 pages

Title: Single channel transmitter
Model: 99954735LF

FCC ID: WCH99956RF

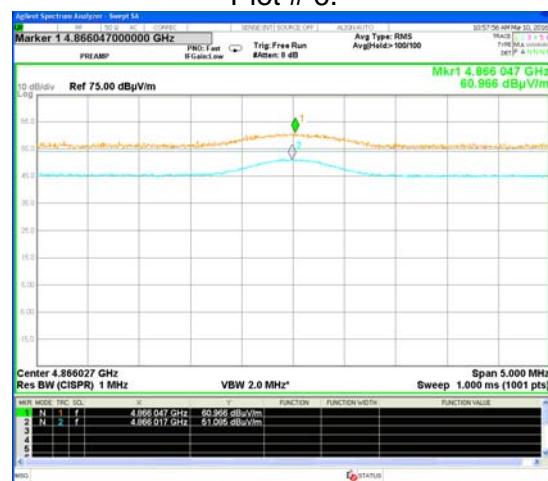
Plot # 5.



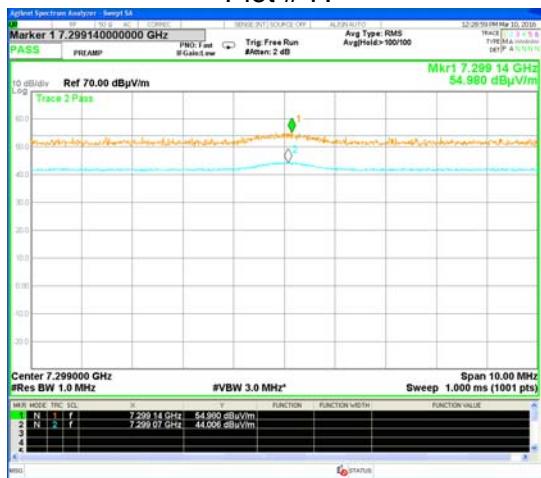
Plot # 6.



Plot # 7.



Plot # 8.



Plot # 9.



Plot # 10.

**Test Report No.: 9612319569****Page 14 of 23 pages****Title: Single channel transmitter****Model: 99954735LF****FCC ID: WCH99956RF**

**Test Report No.:** 9612319569**Page 15 of 23 pages****Title:** Single channel transmitter**Model:** 99954735LF**FCC ID:** WCH99956RF

3.5. Conducted emission test per 15.207.

3.5.1. Requirements:

Frequency, MHz	Conducted limit, dB μ V	
	QP	AVRG
0.15 - 0.5	66 - 56*	56 - 46*
0.5 - 5	56	46
5 - 30	60	50

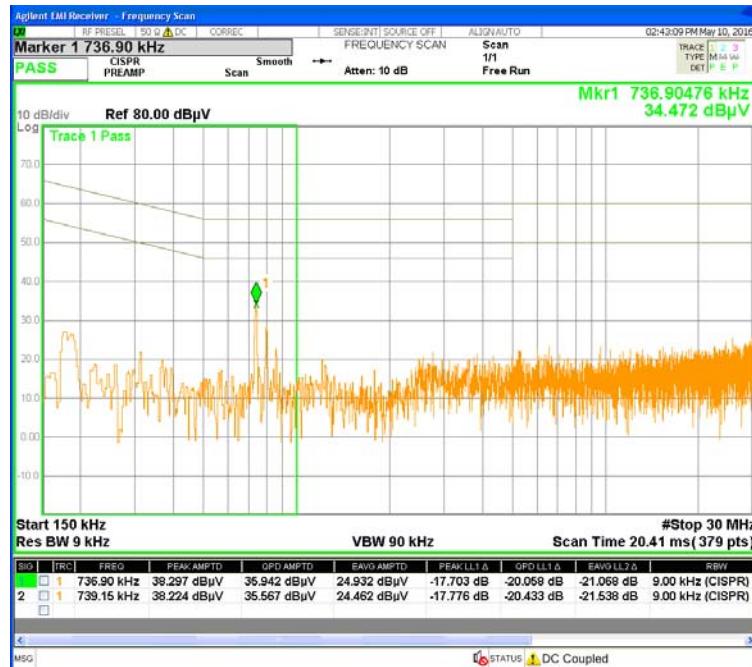
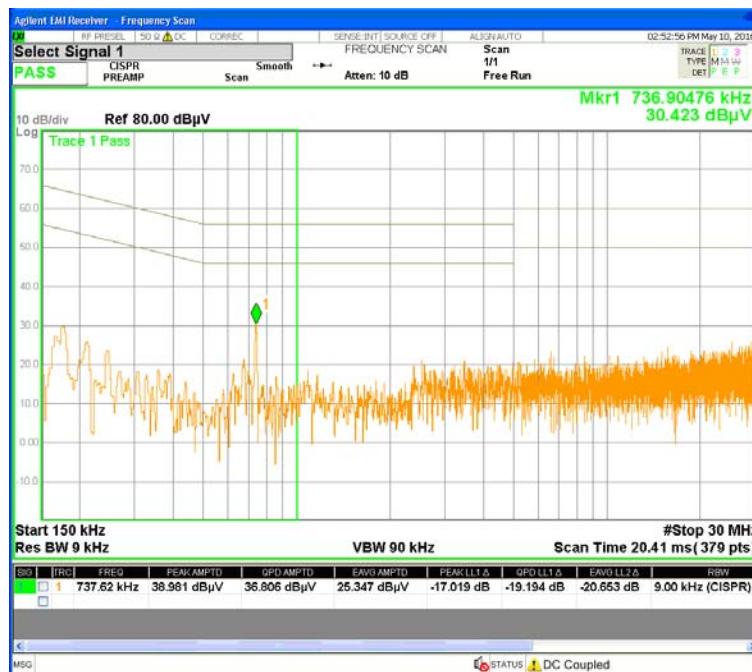
* Decreases linearly with the logarithm of the frequency.

EUT was placed on a wooden table in a shielded chamber at a height of 80 cm from the floor and 40 cm from the vertical reference plane. The measurements were performed at mains terminals by means of LISN, connected to spectrum analyzer in the frequency range as referred to in the table above. The measurements were made with quasi-peak (CISPR) and average detectors. The position of the EUT cables was varied to determine maximum emission level.

3.5.2. Test results:

Any results, (except of the presented in plots below) are found at least 20 dB below the specified limits.

Test result for line Phase present in plot # 12. For line Neutral in plot # 13.

**Test Report No.: 9612319569****Page 16 of 23 pages****Title: Single channel transmitter****Model: 99954735LF****FCC ID: WCH99956RF****Plot # 12. 120VAC, line PH.****Plot # 13. 120VAC, line N.**

**Test Report No.:** 9612319569**Page 17 of 23 pages****Title:** Single channel transmitter**Model:** 99954735LF**FCC ID:** WCH99956RF

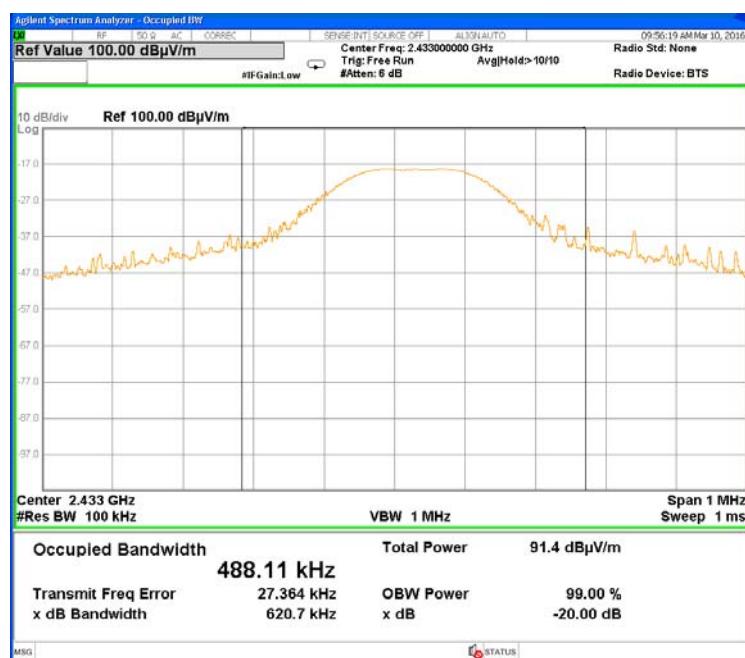
3.6. *Test of occupied bandwidth per 15.215(c)*

3.6.1. *Requirements:*

Intentional radiator must be designed to ensure that the 20 dB bandwidth of the emission is contained within the frequency band.

3.6.2. *Test results:*

Test result presented in plot below.



Plot # 14. Occupied bandwidth test result

3.6.3. *Test summary:*

20 dB occupied bandwidth is 620.7 kHz.
The tested unit meets the standard requirement.

**Test Report No.: 9612319569****Page 18 of 23 pages****Title: Single channel transmitter****Model: 99954735LF****FCC ID: WCH99956RF**

4. Appendix 1. Test equipment used

All measurements equipment is on SII calibration schedule with a recalibration interval not exceeding one year.

Test equipment used

No	Description	Manufacturer information			Due Calibration date
		Name	Model	Serial No	
1	MXE EMI Receiver 20 Hz -26.5 GHz	Agilent	N9038A	SII 650114	March 2017
2	Cable RF 1m	Huber-Suhner	Sucoflex 104	21325/4PE	October 2016
3	Double Ridged Guide Antenna 0.75 – 18 GHz	ETS-Lindgren	3115	00143138	December 2016
4	Broadband Horn antenna 15 – 40 GHz	Schwarzbeck Mess-Electronik	BBHA 9170	9170-341	December 2016
5	Double Ridged Waveguide Horn Antenna 1 – 18 GHz	ETS-Lindgren	3117	00139055	December 2016
6	Antenna Biconilog 26 – 6000 MHz	ETS-Lindgren	31142D	0146490	December 2016
7	Spectrum analyzer 20 Hz-40 GHz	Rohde&Schwarz	ESU 40	100168	November 2016
8	MXG Signal Generator 100 KHz - 20 GHz	Agilent	N5183A	6501148	May 2016
9	Attenuator 3 dB DC – 12.4 GHz	HP	8491A	50469	October 2016
10	USB preamplifier 2 GHz – 50 GHz	Keysight	U7227F	MY55380004	January 2016
11	EMI Receiver 9 kHz-6.5 GHz	HP	8546A+85460A	SII 4068	May 2016
12	LISN 9 kHz – 30 MHz	FCC	LISN 250-32-4-16	SII5023	October 2016
13	Transient limiter 0.009-200 MHz	HP	11947A	3107105	August 2016
14	Cable RF 4m	Huber-Suhner	Sucoflex 104PE	21329/4PE	October 2016
15	Cable RF 0.5m	Huber-Suhner	Multiflex 141	520201	October 2016
16	Active Loop antenna 1.0 kHz – 30 MHz	ETS-Lindgren	6507	00144641	December 2016

**Test Report No.: 9612319569****Page 19 of 23 pages****Title: Single channel transmitter****Model: 99954735LF****FCC ID: WCH99956RF**

5. Appendix 2: Antenna Factor and Cable Loss

Cable Loss. Mast 6 m set cable.

Point	Frequency, MHz	Cable Loss, dB	Point	Frequency, MHz	Cable Loss, dB
1	30	0.3	21	1000	2.5
2	50	0.4	22	1100	2.6
3	100	0.6	23	1200	2.8
4	150	0.8	24	1300	2.9
5	200	1.0	25	1400	3.1
6	250	1.1	26	1500	3.2
7	300	1.2	27	1600	3.3
8	350	1.3	28	1700	3.5
9	400	1.5	29	1800	3.6
10	450	1.6	30	1900	3.7
11	500	1.7	31	2000	3.9
12	550	1.8	32	2100	4.0
13	600	1.9	33	2200	4.1
14	650	1.9	34	2300	4.2
15	700	2.0	35	2400	4.4
16	750	2.1	36	2500	4.6
17	800	2.1	37	2600	4.7
18	850	2.2	38	2700	4.8
19	900	2.3	39	2800	4.9
20	950	2.4	40	2900	5.0

**Test Report No.: 9612319569****Page 20 of 23 pages****Title: Single channel transmitter****Model: 99954735LF****FCC ID: WCH99956RF****Antenna factor**

Biconilog Antenna, ETS-Lindgren mod. 31142D, S/N: 0146490 3m calibration.

No.	f / MHz	AF / dB/m	f / MHz	AF / dB/m	f / MHz	AF / dB/m
1	30	18.7	250	12.0	2750	31.0
2	35	15.7	300	13.8	3000	31.2
3	40	12.9	400	16.2	3250	32.7
4	45	10.6	500	18.6	3500	34.5
5	50	9.0	600	20.2	3750	34.3
6	60	7.3	700	21.8	4000	34.5
7	70	7.7	800	22.9	4250	35.3
8	80	8.2	900	24.1	4500	35.5
9	90	9.2	1000	24.8	4750	36.1
10	100	9.4	1250	26.9	5000	37.4
11	120	8.5	1500	30.2	5250	38.4
12	140	8.5	1750	28.5	5000	39.9
13	160	9.1	2000	28.9	5750	38.2
14	180	10.5	2250	29.8	6000	39.1
15	200	10.9	2500	32.5	-	-

**Test Report No.: 9612319569****Page 21 of 23 pages****Title: Single channel transmitter****Model: 99954735LF****FCC ID: WCH99956RF****Antenna Factor****Double Ridged Guide Antenna mfr ETS-Lindgren model 3115 1m calibration**

Point	Frequency (MHz)	Antenna Factor (dB/m)
1	1000	23.7
2	2000	28.5
3	3000	29.6
4	4000	32.5
5	4500	32.6
6	5000	33.5
7	6000	36.1
8	6500	36.5
9	7000	37.3
10	7500	38.0
11	8000	37.3
12	8500	37.9
13	9000	38.1
14	9500	38.5
15	10000	38.7
16	10500	38.8
17	11000	38.6
18	11500	38.8
19	12000	38.9
20	12500	39.3
21	13000	40.2
22	13500	40.8
23	14000	40.6
24	14500	40.4
25	15000	39.6
26	15500	39.5
27	16000	39.8
28	16500	40.4
29	17000	41.3
30	17500	42.8
31	18000	43.2

**Test Report No.: 9612319569****Page 22 of 23 pages****Title: Single channel transmitter****Model: 99954735LF****FCC ID: WCH99956RF****Cable Loss****Type: Sucoflex 104PE; Ser.No.21329/4PE; 4 m length**

Point	Frequency, GHz	Cable Loss, dB
1	0.0-1.0	1.7
2	1.0- 3.5	3.2
3	3.5- 5.5	4.0
4	5.5 - 7.5	4.7
5	7.5 - 9.5	5.3
6	9.5 - 10.5	5.6
7	10.5 - 12.5	6.2
8	12.5 - 14.5	6.8
9	14.5 - 16.5	7.5
10	16.5 - 18.0	8.1

Active Loop antenna mfr.ETS-Lindgren mod. 6507 S/N 144641.

Frequency, MHz	Magnetic Antenna factor dBs/m	Electric Antenna factor dB/m
0.009	-20.0	31.5
0.010	-21.0	30.5
0.020	-26.7	24.9
0.075	-32.4	19.1
0.100	-32.7	18.8
0.150	-32.9	18.6
0.250	-33.0	18.5
0.500	-33.0	18.5
0.750	-33.0	18.5
1.000	-32.8	18.7
2.000	-32.7	18.8
3.000	-32.9	18.7
4.000	-33.2	18.3
5.000	-33.4	18.2
10.000	-34.0	17.6
15.000	-34.2	17.3
20.000	-34.4	17.1
25.000	-34.8	16.7
30.000	-35.0	16.5



Test Report No.: 9612319569

Page 23 of 23 pages

Title: Single channel transmitter

Model: 99954735LF

FCC ID: WCH99956RF

6. Appendix 3: Test setups photo.



Photo 2.



Photo 3.



Photo 4.



Photo 5.