



Nemko

Nemko USA, Inc.
11696 Sorrento Valley Rd., Suite F
San Diego, CA 92121-1024
Phone (858) 755-5525 Fax (858) 452-1810



CERTIFICATION TEST REPORT
PART 15.247C

For The Wireless Network
Model: Vue Gateway

FCC ID: WD9-VG100T

PREPARED FOR:

Avaak, Inc.
5405 Morehouse Dr
San Diego, CA 92121

Prepared on: February 22, 2009

Report Number: 2008 06108695 FCC

Project Number: 103738-1

NEx Number: 108695

Total Pages: 32

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
February 22, 2009	Vue Gateway Certification Test Report FCC ID: WD9-VG100T	2008 06108695 FCC	2 of 32

DOCUMENT HISTORY

REVISION	DATE	COMMENTS
-	June 24, 2008	Prepared By: Alan Laudani
-	February 22, 2009	Initial Release: Alan Laudani

NOTE: Nemko USA, Inc. hereby makes the following statements so as to conform to Chapter 10 (Test Reports) Requirements of ANSI C63.4 (2003) "Methods and Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz":

- The unit described in this report was received at Nemko USA, Inc.'s facilities on June 16, 2008.
- Testing was performed on the unit described in this report on June 16, 2008 to June 20, 2008
- The Test Results reported herein apply only to the Unit actually tested, and to substantially identical Units.
- This report does not imply the endorsement of the Federal Communications Commission (FCC), Industry Canada, NVLAP or any other government agency.

This Report is the property of Nemko USA, Inc., and shall not be reproduced, except in full, without prior written approval of Nemko USA, Inc. However, all ownership rights are hereby returned unconditionally to Avaak, and approval is hereby granted to Avaak, and its employees and agents to reproduce all or part of this report for any legitimate business purpose without further reference to Nemko USA, Inc.

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
February 22, 2009	Vue Gateway Certification Test Report FCC ID: WD9-VG100T	2008 06108695 FCC	3 of 32

TABLE OF CONTENTS

DOCUMENT HISTORY	2
CERTIFICATION	4
1. ADMINISTRATIVE DATA AND TEST SUMMARY	5
1.1. ADMINISTRATIVE DATA	5
1.2. TEST SUMMARY	5
2. SYSTEM CONFIGURATION	6
2.1. DESCRIPTION AND METHOD OF EXERCISING THE EUT.....	6
2.2. SYSTEM COMPONENTS AND POWER CABLES.....	7
2.3. DEVICE INTERCONNECTION AND I/O CABLES	7
2.4. DESIGN MODIFICATIONS FOR COMPLIANCE	8
2.5. TECHNICAL SPECIFICATIONS OF THE EUT.....	8
3. DESCRIPTION OF TEST SITE AND ENVIRONMENT	9
3.1. DESCRIPTION OF TEST SITE	9
3.2. TEST ENVIRONMENT	9
4. DESCRIPTION OF TESTING METHODS	10
4.1. INTRODUCTION.....	10
4.2. CONFIGURATION AND METHODS OF MEASUREMENTS FOR CONDUCTED EMISSIONS	10
4.3. CONFIGURATION AND METHODS OF MEASUREMENTS FOR FREQUENCY IDENTIFICATION	10
4.4. CONFIGURATION AND METHODS OF MEASUREMENTS FOR RADIATED EMISSIONS	11
5. TEST RESULTS	12
5.1. CONDUCTED EMISSIONS TEST DATA – TRANSMIT MODE.....	12
5.2. CONDUCTED EMISSIONS TEST DATA – RECEIVE MODE	13
5.3. RADIATED EMISSIONS TEST DATA –	14
5.3. DUTY CYCLE MEASUREMENT	17
5.4. BANDWIDTH.....	18
5.5. POWER LEVEL AND RADIATED SPURIOUS EMISSIONS	22
5.6. FUNDAMENTAL EMISSIONS	24
5.7. NUMBER OF HOPPING CHANNELS.....	29
5.8. CHANNEL SEPARATION	30
5.9. TIME OF OCCUPANCY	30
5.10. TEST EQUIPMENT.....	32

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
February 22, 2009	Vue Gateway Certification Test Report FCC ID: WD9-VG100T	2008 06108695 FCC	4 of 32

CERTIFICATION

Nemko USA, Inc., an independent Electromagnetic Compatibility (EMC) Test Laboratory, produced this Test Report and performed the Radio Frequency Interference (RFI) testing and data evaluation contained herein.

Nemko USA, Inc.'s measurement facility is currently registered with the United States Federal Communications Commission (FCC) in accordance with the provisions of 47 United States Code (CFR) Part 2, Subpart I, Section 2.948(a). A current description of Nemko USA, Inc.'s measurement facility is on file with the FCC. Nemko USA Inc. has additionally satisfied the FCC that it complies with the requirements set forth in 47 CFR Part 2, Subpart I, Section 2.948(d) regarding the accreditation of EMC laboratories.

The RFI testing, test data collection and test data evaluation were accomplished in accordance with the ANSI C63.4-2003 Standard, and in accordance with the applicable sections of the FCC rules (47 CFR Parts 2 and 15). The testing was also accomplished in accordance with Industry Canada's ICES-003 standard for unintentional radiating device per EMCAB-3, Issue 3 (May 1998). The administrative summary of this test report provides a description of the test sample.

I hereby certify that the test data, test data evaluation, and equipment configurations used to compile this test report are a true and accurate representation of the test sample's radio frequency interference characteristics as of the test date(s), and, for the design of the test sample.



Alan Laudani
EMC Engineer

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
February 22, 2009	Vue Gateway Certification Test Report FCC ID: WD9-VG100T	2008 06108695 FCC	5 of 32

1. ADMINISTRATIVE DATA AND TEST SUMMARY

1.1. Administrative Data

CLIENT:	Avaak, Inc. 5405 Morehouse Dr San Diego, CA 92121
CONTACT:	Giora Goldman contact@company.com
E-Mail:	
DATE (S) OF TEST:	June 16, 2008 to February 22, 2009
EQUIPMENT UNDER TEST (EUT):	Wireless Network
MODEL:	Vue Gateway
SERIAL NUMBER:	NA
CONDITION UPON RECEIPT:	Suitable for Test
TEST SPECIFICATION:	FCC, Part 15.247, Subpart C Operation within the bands 902-928 MHz, 2400-2483.5 MHz, 5725-5850 MHz and 24.0-24.25 GHz bands and RSS 210 (Issue 7, June 2007) Annex 8 - Frequency Hopping and Digital Modulation Systems Operating in the Bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

1.2. Test Summary

Specification	Frequency Range	Compliance Status
FCC, CFR 47, Section 15.207	0.15 MHz - 30.00 MHz	PASS
FCC, CFR 47, Section 15.209	30 MHz – 10 th Harmonic	PASS
FCC CFR 47, §15.247 Plus Bandedge	2404 – 2474 MHz	PASS
RSS-210 - Low Power License Exempt Radio-communication Devices (All Frequency Bands)	2403.3 – 2479.1 MHz	PASS

The product is scanned from 30MHz to 10th harmonic of the highest fundamental frequency.
Refer to the test results section for further details.

Alan Laudani
 EMC Engineer

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
February 22, 2009	Vue Gateway Certification Test Report FCC ID: WD9-VG100T	2008 06108695 FCC	6 of 32

2. SYSTEM CONFIGURATION

2.1. Description and Method of Exercising the EUT

The Vue Gateway is a Wireless Network. It receives RF from a Wireless Vue Camera continuous video streaming using frequency hopping using frequencies from 2404 to 2474 MHz. It forwards this via Ethernet to a computer. Its internal Ethernet Clock is 25 MHz. The Vue Camera was sending digital signals for the Vue Gateway to receive and send via Ethernet to the support laptop. The test software displayed the camera's images. The laptop was removed from the radiated emissions setup by an extra long Ethernet cable to limit emissions detected to the Vue Gateway.

The EUT's performance during test was evaluated against the performance criterion specified by applicable test standards. Performance results are detailed in the test results section of this report.

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
February 22, 2009	Vue Gateway Certification Test Report FCC ID: WD9-VG100T	2008 06108695 FCC	7 of 32

2.2. System Components and Power Cables

DEVICE	MANUFACTURER MODEL # SERIAL #	POWER CABLE
EUT - Wireless Network	Avaak, Inc. Model: Vue Gateway Serial #: NA	5 VDC power supply cable
Vue Gateway Power Supply	CUI Inc. Model: EPS050100 Serial #: NA	2 prong wall wart
Support – Computer Laptop	Dell Model No. PP29L S/N 3Z9QNF1	18 Vdc power supply cable
Support – Computer Laptop Power Supply	Dell Model No. YT886 S/N CN-OYT886-73245-822-5065	1.5m, unshielded, 18 AWG, 3-wire, IEC connector
Support – Wireless Camera	Avaak, Inc. Model: Vue Camera Serial #: 001	NA

2.3. Device Interconnection and I/O Cables

Connection	I/O Cable
Vue Gateway to Computer	Ethernet 6 foot
Vue Gateway to Untermminated	USB – Not used
No Connections For Camera	

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
February 22, 2009	Vue Gateway Certification Test Report FCC ID: WD9-VG100T	2008 06108695 FCC	8 of 32

2.4. Design Modifications for Compliance

The following design modifications were made to the EUT during testing.

A 2 mH choke was added to reduce conducted emissions. Two ferrites were added to the 6-foot Ethernet cable, one at each end, to reduce radiated emissions. AVAAK will supply the Ethernet cable with ferrites with the Vue Gateway.

2.5. Technical Specifications of the EUT

Manufacturer: Avaak

Operating Frequency: 2404 MHz to 2474 MHz in the 2400-2483.5 MHz Band

Measured Power: 35 mW, 0 dBi antenna, conducted output power = measured radiated output power.

Modulation: Digital

Antenna Connector: None, internal integral antenna

Power Source: 120 Vac 60 Hz.

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
February 22, 2009	Vue Gateway Certification Test Report FCC ID: WD9-VG100T	2008 06108695 FCC	9 of 32

3. DESCRIPTION OF TEST SITE AND ENVIRONMENT

3.1. Description of Test Site

The test site is located at 11696 Sorrento Valley Road, Suite F, San Diego, CA 92121. The site is physically located 18 miles Northwest of downtown San Diego. The general area is a valley 1.5 miles east of the Pacific Ocean. This particular part of the valley tends to minimize ambient levels, i.e. radio and TV broadcast stations and land mobile communications. The three and ten-meter Open Area Test Site (OATS) is located behind the office/lab building. It conforms to the normalized site attenuation limits and construction specifications as set in the EN 55022 (1987), CISPR 16 and 22 (1985) and ANSI C63.4-2001 documents. The OATS normalized site attenuation characteristics are verified for compliance every year, and registered with the Federal Communications Commission under Registration Number 90579 and Industry Canada under 2040B-1 and 2040B-2.

3.2. Test Environment

All tests were performed under the following environmental conditions:

Temperature range	:	17 – 32 °C
Humidity range	:	29 - 99%
Pressure range	:	87 - 105 kPa
Power supply range	:	120VAC 60Hz (±15%)

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
February 22, 2009	Vue Gateway Certification Test Report FCC ID: WD9-VG100T	2008 06108695 FCC	10 of 32

4. DESCRIPTION OF TESTING METHODS

4.1. Introduction

As required in 47 CFR, Parts 2 and 15, the methods employed to test the radiated and conducted emissions (as applicable) of the EUT are those contained within the American National Standards Institute (ANSI) document ANSI C63.4-2003, titled "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz." All applicable FCC Rule Sections that provide further guidance for performance of such testing are also observed.

For General Test Configuration please refer to Figure 1 on the following page.

Digital devices sold in Canada are required to comply with the Interference Causing Equipment Standard for Digital Apparatus, ICES-003. These test methods and limits are specified in the Canadian Standards Association's (CSA) Standard C108.8-M1983 (1-1-94 version) and are "essentially equivalent" with FCC, Part 15 and CISPR 22 (EN55022) rules for unintentional radiators per EMCAB-3, Issue 3 (May 1998). No further testing is required for compliance to ICES-003.

4.2. Configuration and Methods of Measurements for Conducted Emissions

Section 7 of ANSI C63.4 determines the general configuration of the EUT and associated equipment, as well as the test platform for conducted emissions testing. Tabletop devices are placed on a non-conducting surface 80 centimeters above the ground plane floor and 40 centimeters from the ground plane wall. The EUT and associated system are configured to operate continuously, representing a "normally operating" mode. The EUT is powered via a Line Impedance Stabilization Network (LISN). The emissions are recorded using the required bandwidth of 9 kHz in the quasi-peak mode. The average amplitude is also observed employing a 10 kHz bandwidth to determine the presence of broadband RFI. When such interference is caused by broadband sources (as defined by the FCC and ANSI Rules), the deviation guidelines contained in Section 11.3.1 of ANSI C63.4 are employed, which allows a correction factor of 13 dB to be subtracted from the quasi-peak reading. The emission levels are then compared to the applicable FCC limits to determine compliance.

4.3. Configuration and Methods of Measurements for Frequency Identification

When performing all testing of equipment, the actual emissions of the EUT are segregated from ambient signals present within the laboratory or the open-field test range. Preliminary testing is performed to ensure that ambient signals are sufficiently low to allow for proper observation of the emissions from the EUT. Incoming power lines are filtered using a 120 dB, 30-ampere; 115/208-volt filter to assist in reducing ambient signals for tests of levels of conducted emissions. Ambients within the laboratory are compared to those noted at the nearby open-field site to discriminate between signals produced from the EUT and ambient signals. In the event that a significant emission is produced by the EUT at a frequency which is also demonstrating significant ambient signals, the spectrum analyzer is placed in the peak mode, the bandwidth is narrowed, the EUT's signal is centered on the analyzer, the scan width is expanded to 50 kHz while monitoring the audio to ensure that only the EUT signal is present, the analyzer is switched to quasi-peak mode, and the level of the EUT signal is recorded.

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
February 22, 2009	Vue Gateway Certification Test Report FCC ID: WD9-VG100T	2008 06108695 FCC	11 of 32

4.4. Configuration and Methods of Measurements for Radiated Emissions

Section 8 of ANSI C63.4 determines the general configuration and procedures for measuring the radiated emissions of equipment under test. Initially, the primary emission frequencies are identified inside the test lab by positioning a broadband receive antenna one meter from the EUT to locate frequencies of significant radiation. Next, the EUT and associated system are placed on a turntable on a ten meter open area test site (registered with the FCC in accord with its Rules and ANSI C63.4) and the receive antenna is located at a distance of ten meters from the EUT.

The EUT and associated system are configured to operate continuously, representing a “normally operating” mode. All significant radiated emissions are recorded when maximum radiation on each frequency is observed, in accordance with part 8 of ANSI C63.4-2003 and Section 15.33 of the FCC Rules. To ensure that the maximum emission at each discrete frequency of interest is observed, the receive antenna is varied in height from one to four meters and rotated to horizontal and vertical polarities, and the turntable is also rotated to determine the worst emitting configuration. The numerical results of the test are included herein to demonstrate compliance.

The numerical results that are applied to the emissions limits are arrived at by the following method:
Example: A=RR+CL+AF

A = Amplitude dB μ V/m

RR = Receiver Reading dB μ V

CL = cable loss dB

AF = antenna factor dB/m

Example Frequency = 110MHz

18.5 dB μ V (spectrum analyzer reading)

+3.0 dB (cable loss @ frequency)

21.5 dB μ V

+15.4 dB/m (antenna factor @ frequency)

36.9 dB μ V/m Final adjusted value



The final adjusted value is then compared to the appropriate emission limit to determine compliance.

DATE	DOCUMENT NAME	DOCUMENT #	PAGE
February 22, 2009	Vue Gateway Certification Test Report FCC ID: WD9-VG100T	2008 06108695 FCC	12 of 32

5. Test Results

5.1. Conducted Emissions Test Data – Transmit Mode



Client	Aavaak	Temperature	78	°F		
PAN #	103738-1	Relative Humidity	44	%		
EUT Name	Wireless Network	Barometric Pressure	29.99	"Hg		
EUT Model	Vue Gateway	Test Location	Enclosure 1			
Governing Doc	CFR 47, Part 15B	Test Engineer	A. Laudani			
Basic Standard	Sec. 15.207	Date	6-16-08			
Parameters	Peak RBW: 100kHz VBW: 100kHz ; Quasi-Peak: RBW 9kHz, VBW 30 kHz; Average: RBW 100 kHz, VBW 1 Hz; Quasi-Peak Limit Blue Line, Average Limit Green Line					
Legend	Quasi-Peak Limit Blue Line, Average Limit Green Line					

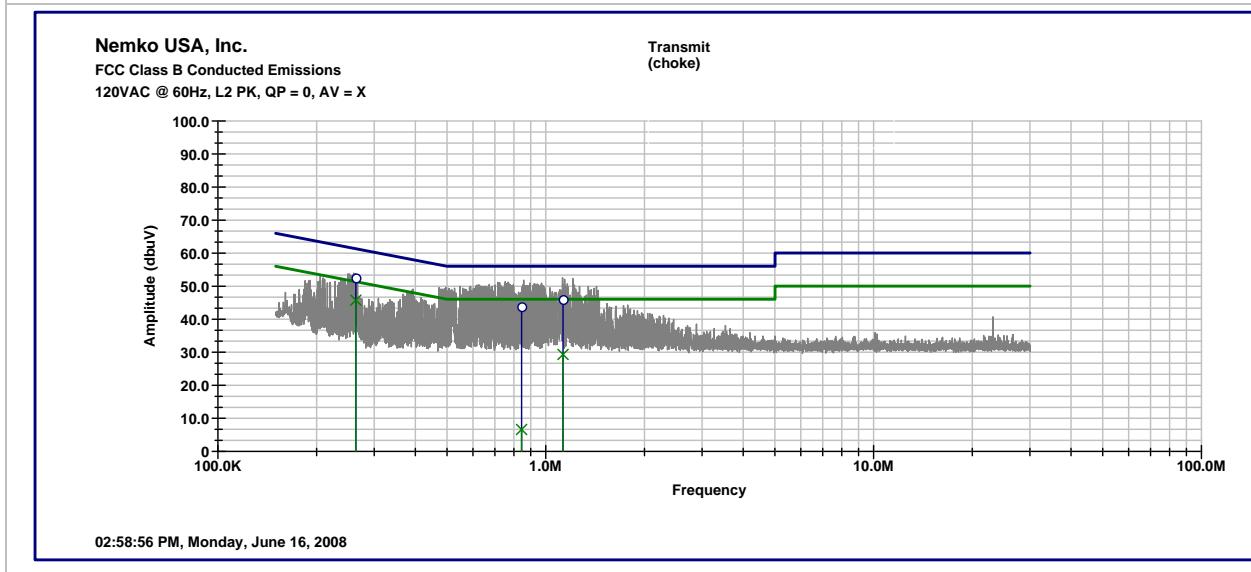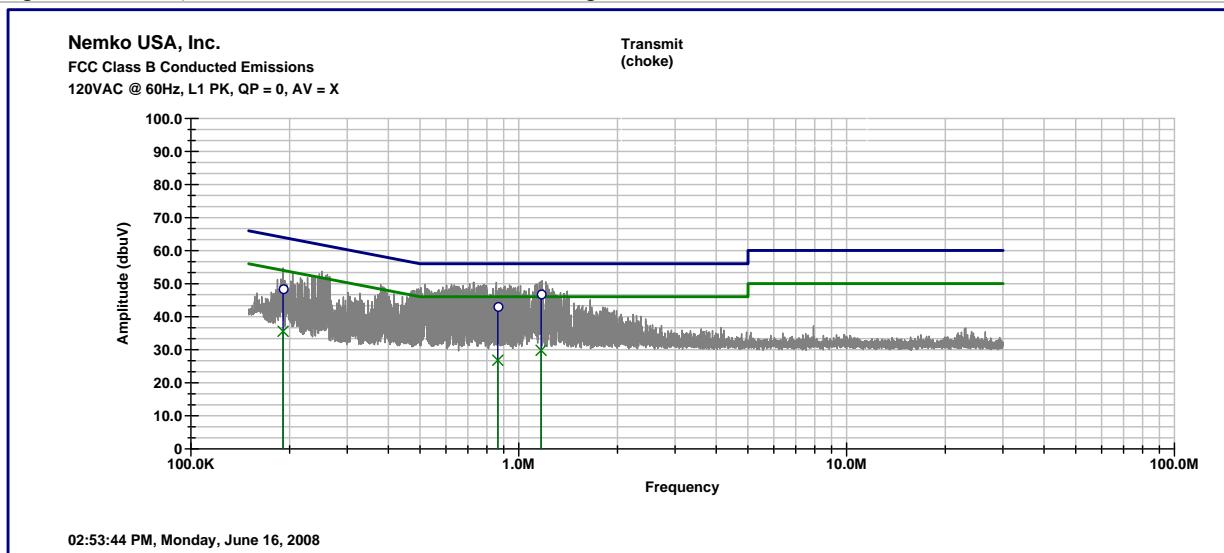

DATE	DOCUMENT NAME	DOCUMENT #	PAGE
February 22, 2009	Vue Gateway Certification Test Report FCC ID: WD9-VG100T	2008 06108695 FCC	13 of 32

5.2. Conducted Emissions Test Data – Receive mode

Client	Avaak	Temperature	78	°F
PAN #	103738-1	Relative Humidity	44	%
EUT Name	Wireless Network	Barometric Pressure	29.99	"Hg
EUT Model	Vue Gateway	Test Location	Enclosure 1	
Governing Doc	CFR 47, Part 15B	Test Engineer	A. Laudani	
Basic Standard	Sec. 15.107	Date	6-18-08	
Parameters	Peak RBW: 100kHz VBW: 100kHz Quasi-Peak: RBW 9kHz, VBW 30 kHz Average: RBW 100 kHz, VBW 1 Hz			
Legend	.Quasi-Peak Limit Blue Line, Average Limit Green Line			

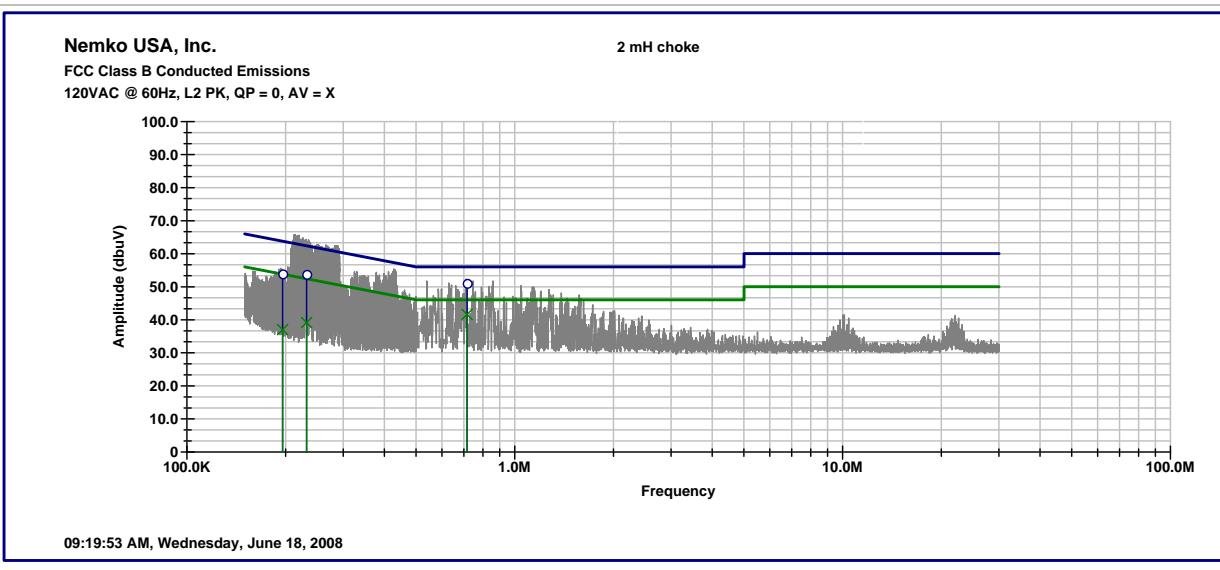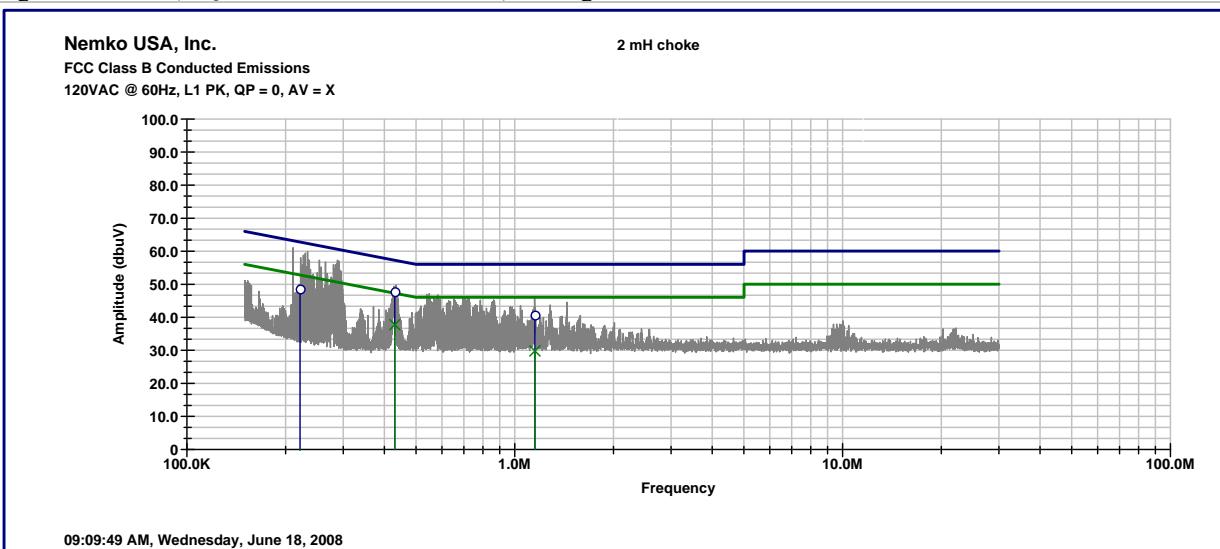

DATE	DOCUMENT NAME	DOCUMENT #	PAGE
February 22, 2009	Vue Gateway Certification Test Report FCC ID: WD9-VG100T	2008 06108695 FCC	14 of 32

5.3 Radiated Emissions Test Data –

Operational Mode

Radiated Emissions Data											
Job #:	13738-1	Date:	6-17-08					Page	1	of	1
NEX #:	108695	Time:	0900-1100								
Staff:	AAL										
Client Name:	Avaak					EUT Voltage:	120				
EUT Name:	Gateway					EUT Frequency:	60				
EUT Model #:	Vue Gateway					Phase:	1				
EUT Serial #:	na					NOATS					
EUT Config.:	Camera sending Photos thru Ethernet					SOATS	X				
Specification:	CFR47 Part 15, Subpart C. Transmitting Normal Mode										
Loop Ant. #:	NA					Quasi-Peak	RBW: 120 kHz				
Bicon Ant. #:	115					Video Bandwidth	300 kHz				
Log Ant. #:	110					Peak	RBW: 1 MHz				
DRG Ant. #:	NA					Video Bandwidth	3 MHz				
Cable LF#:	SOATS					Average	RBW: 1 MHz				
Cable HF#:	NA					Video Bandwidth	10 Hz				
Preamp LF#:	901					Measurements below 1 GHz are Quasi-Peak values, unless otherwise stated.					
Preamp HF#:	NA					Measurements above 1 GHz are Average values, unless otherwise stated.					
Meas. Freq. (MHz)	Meter Reading Vertical	Meter Reading Horizontal	Det.	EUT Side F/L/R/B	Ant. Height m	Max. Reading (dB μ V)	Corrected Reading (dB μ V/m)	Spec. limit (dB μ V/m)	CR/SL Diff. (dB)	Pass Fail	Comment
75.0	51.5	50.5	Q		1.0	51.5	28.1	40.0	-11.9	Pass	
125.0	51.9	49.5	Q		1.0	51.9	33.6	43.5	-9.9	Pass	
144.0	45.0	40.8	P		1.0	45	27.2	43.5	-16.3	Pass	
225.0	54.6	46.5	Q		1.0	54.6	35.3	46.0	-10.7	Pass	
250.0	58.2	60.2	Q		1.0	60.2	42.0	46.0	-4.0	Pass	
275.0	43.8	54.8	Q		1.0	54.8	38.0	46.0	-8.0	Pass	
288.0	39.5	53.1	P		1.0	53.1	36.8	46.0	-9.2	Pass	
300.0	43.3	54.0	Q		1.0	54	37.9	46.0	-8.1	Pass	
311.2	42.0	41.0	P		1.0	42	26.9	46.0	-19.1	Pass	
340.0	41.0	47.0	P		1.0	47	31.8	46.0	-14.2	Pass	
375.0	51.6	54.2	Q		1.0	54.2	39.2	46.0	-6.8	Pass	
400.0	53.0	53.6	Q		1.0	53.6	39.0	46.0	-7.0	Pass	
460.0	42.0	44.0	P		1.0	44	31.5	46.0	-14.5	Pass	
479.9	47.0	51.5	Q		1.0	51.5	39.8	46.0	-6.2	Pass	
575.9	50.0	53.3	Q		1.0	53.3	42.9	46.0	-3.1	Pass	
672.0	52.5	48.9	Q		1.0	52.5	43.8	46.0	-2.2	Pass	
960.0	40.4	38.0	P		1.0	40.4	36.2	74.0	-37.8	Pass	

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
February 22, 2009	Vue Gateway Certification Test Report FCC ID: WD9-VG100T	2008 06108695 FCC	15 of 32

Measurement Notes:

- Emissions reported above, Emissions were searched over a range of 30 MHz to 25000 MHz
- No other emissions found within 20 dB of the limits.
- Normal operation mode

Example Frequency = 575.9 MHz

53.3 dBuV (spectrum analyzer reading Quasi-Peak)

+3.2 dB (cable loss @ frequency)

+18.2 dB/m (antenna factor @ frequency)

-31.8 dB preamplifier

42.9 dBuV/m Final adjusted value

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
February 22, 2009	Vue Gateway Certification Test Report FCC ID: WD9-VG100T	2008 06108695 FCC	16 of 32

Standby mode

Radiated Emissions Data

Job # :	13738-1	Date :	6-17-08	Page	1	of	1
NEX #:	108695	Time :	0900--1100				
Client Name :	Avaak			EUT Voltage :	120		
EUT Name :	Gateway			EUT Frequency :	60		
EUT Model #:	Vue Gateway			Phase:	1		
EUT Serial #:				NOATS			
EUT Config. :	STANDBY			SOATS	X		
Specification :	CFR47 Part 15, Subpart B, Class B			Distance < 1000 MHz:	3 m		
Loop Ant. #:	NA	Temp. (°C) :	16--23	Distance > 1000 MHz:	3 m		
Bicon Ant.#:	115	Humidity (%) :	97--57				
Log Ant. #:	110	Spec An. #:	911				
DRG Ant. #	NA	Spec An. Display #:	911				
Cable LF#:	SOATS	QP #:	911				
Cable HF#:	NA	PreSelect#:	NA				
Preamp LF#:	901						
Preamp HF#	NA						

Measurements below 1 GHz are Quasi-Peak values, unless otherwise stated.
Measurements above 1 GHz are Average values, unless otherwise stated.

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
February 22, 2009	Vue Gateway Certification Test Report FCC ID: WD9-VG100T	2008 06108695 FCC	17 of 32

5.3. Duty Cycle Measurement


RSS-210 Annex 8.1(4)

Duty cycle = 6.6 microseconds in 100ms

Duty cycle = 0.066

Duty Cycle Factor = $20 * \log(.066) = -23.6\text{dB}$

FCC limits DCF to -20dB

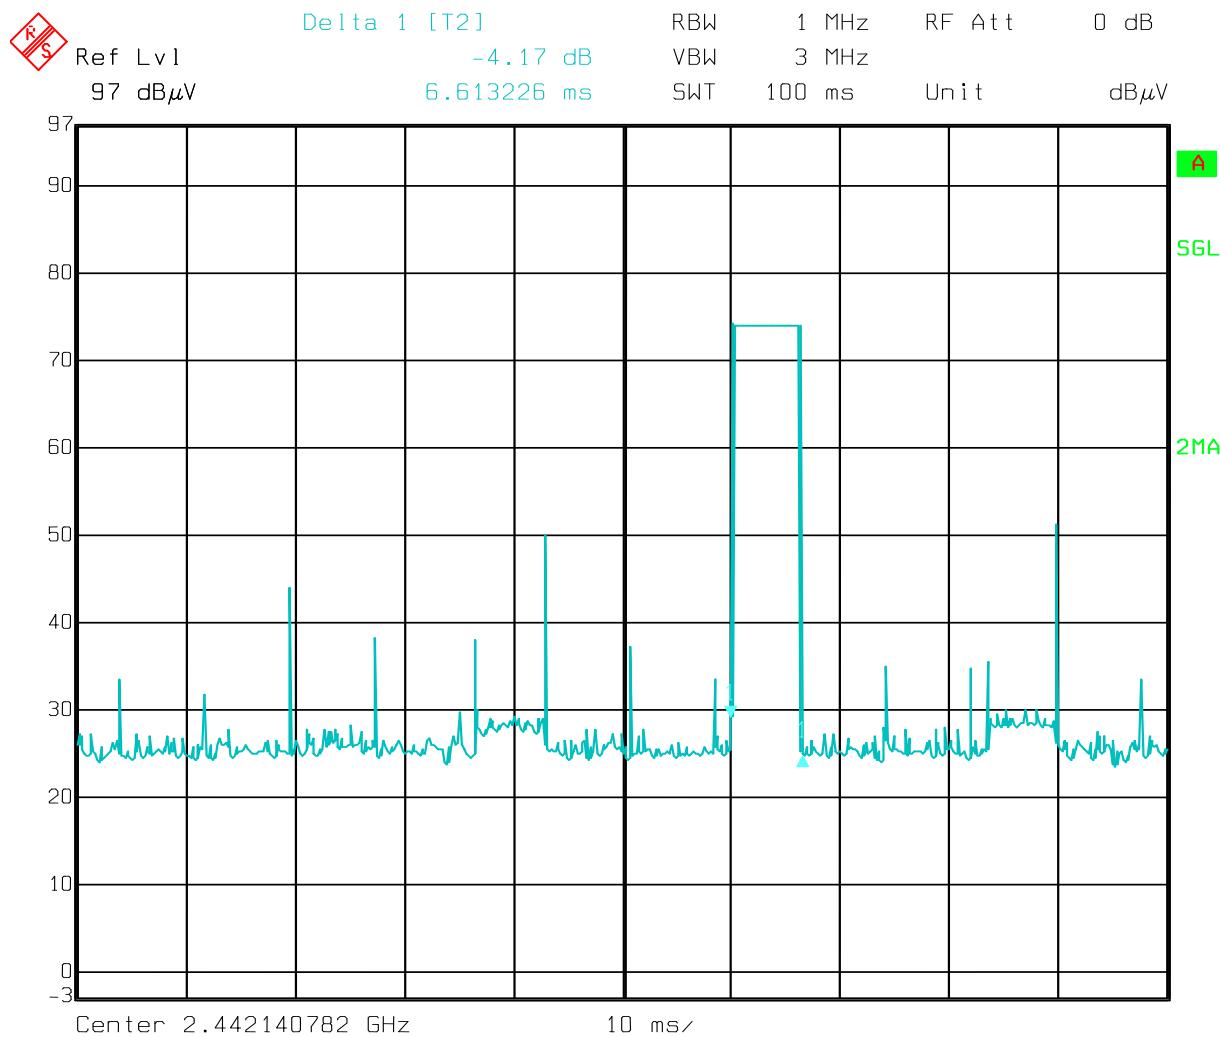

Date: 19.JUN.2008 08:53:52

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
February 22, 2009	Vue Gateway Certification Test Report FCC ID: WD9-VG100T	2008 06108695 FCC	18 of 32

5.4. Bandwidth

RSS-210 Annex 8.1(4)


(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power now greater than 125mW.

15.247(a)(1)

Test Results:

Low Channel	Mid Channel	High Channel
2.42 MHz	2.24 MHz	2.40 MHz

DATE	DOCUMENT NAME	DOCUMENT #	PAGE
February 22, 2009	Vue Gateway Certification Test Report FCC ID: WD9-VG100T	2008 06108695 FCC	19 of 32

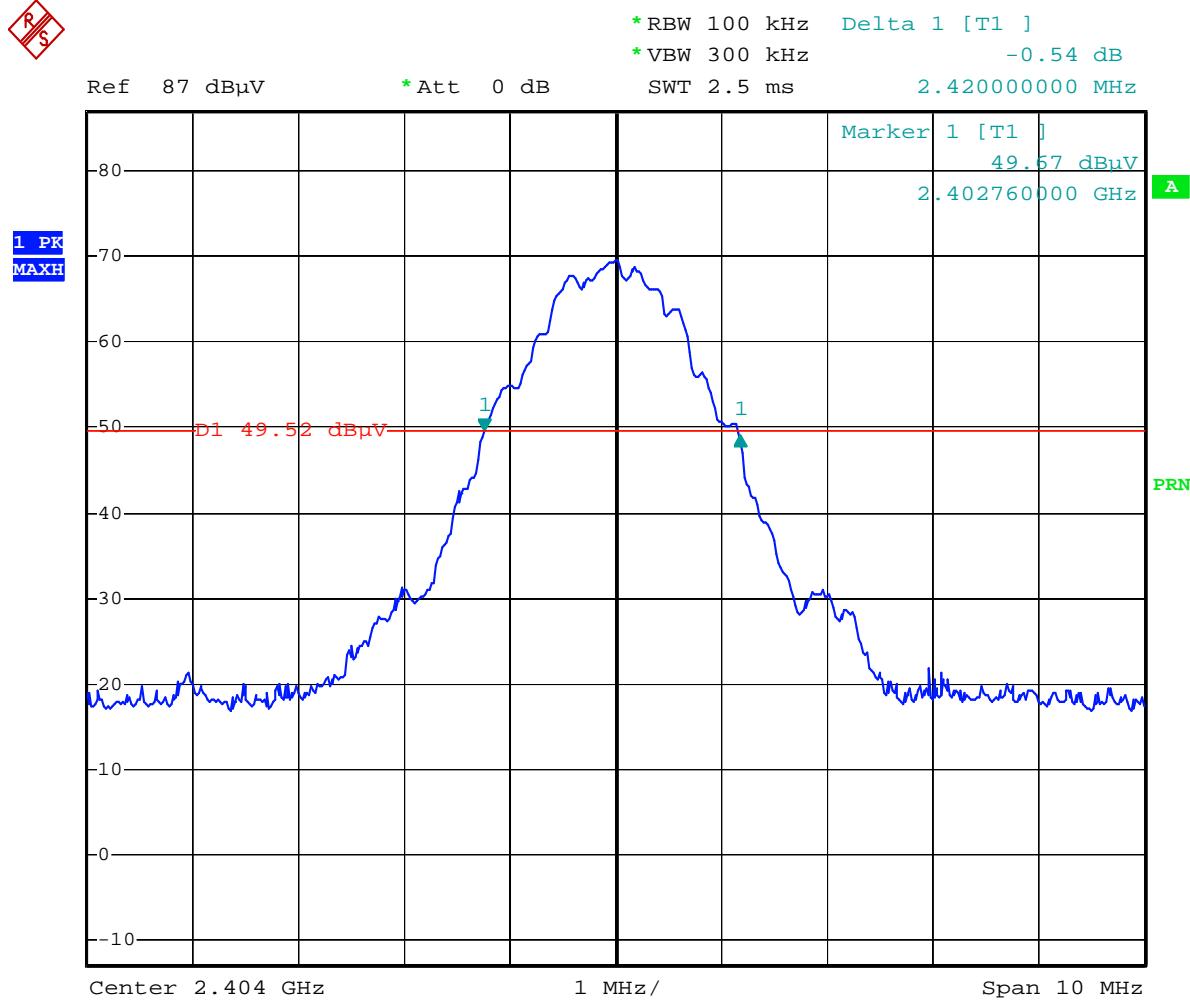

Date: 23.JUN.2008 15:55:19


Low Channel

Nemko USA, Inc.

11696 Sorrento Valley Road, Suite F,
San Diego, CA 92121
Phone (858) 755-5525 Fax (858) 452-1810

DATE	DOCUMENT NAME	DOCUMENT #	PAGE
February 22, 2009	Vue Gateway Certification Test Report FCC ID: WD9-VG100T	2008 06108695 FCC	20 of 32

RS

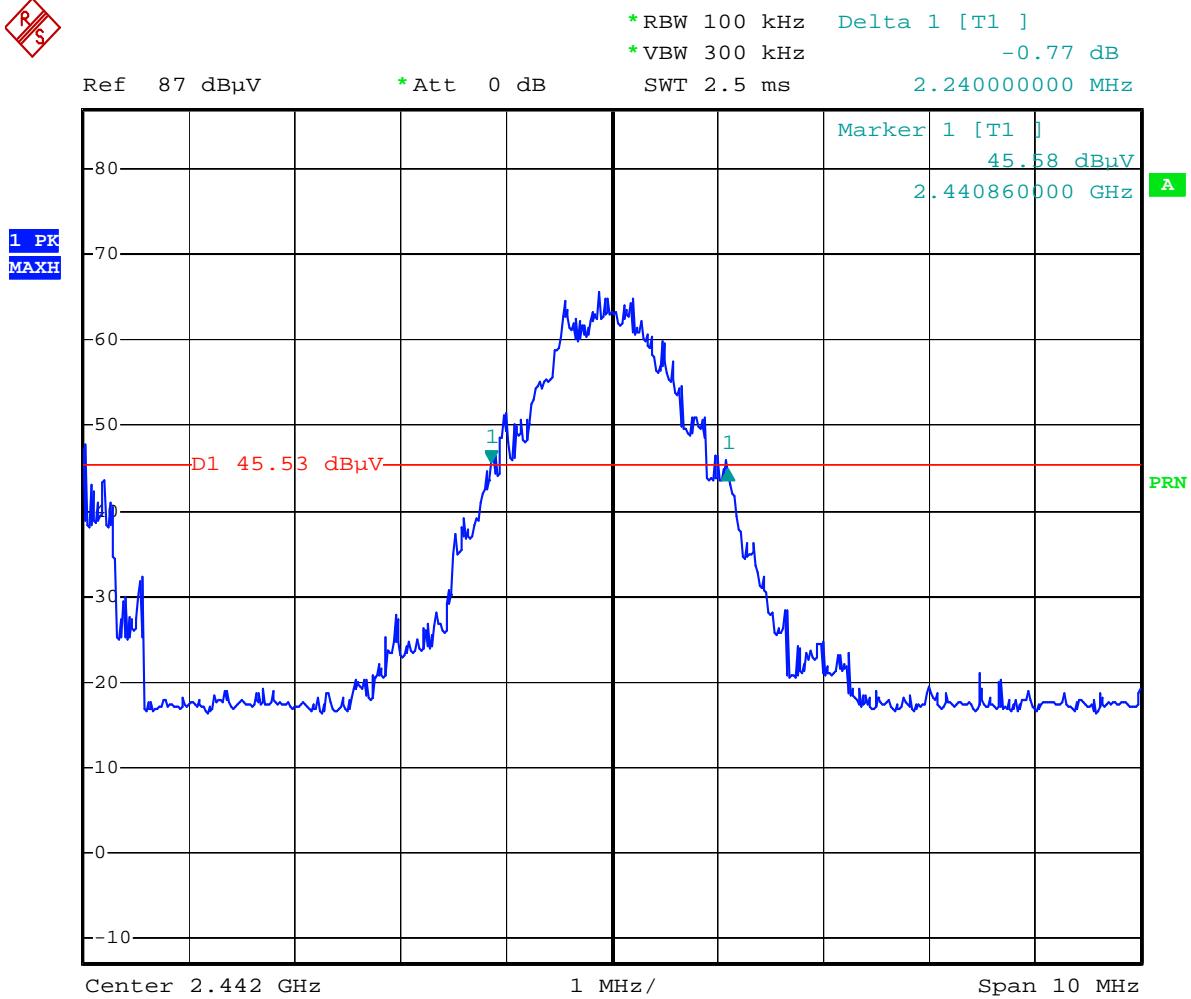

Date: 23.JUN.2008 15:48:43


Mid Channel

Nemko USA, Inc.

11696 Sorrento Valley Road, Suite F,
San Diego, CA 92121
Phone (858) 755-5525 Fax (858) 452-1810

DATE	DOCUMENT NAME	DOCUMENT #	PAGE
February 22, 2009	Vue Gateway Certification Test Report FCC ID: WD9-VG100T	2008 06108695 FCC	21 of 32

RS

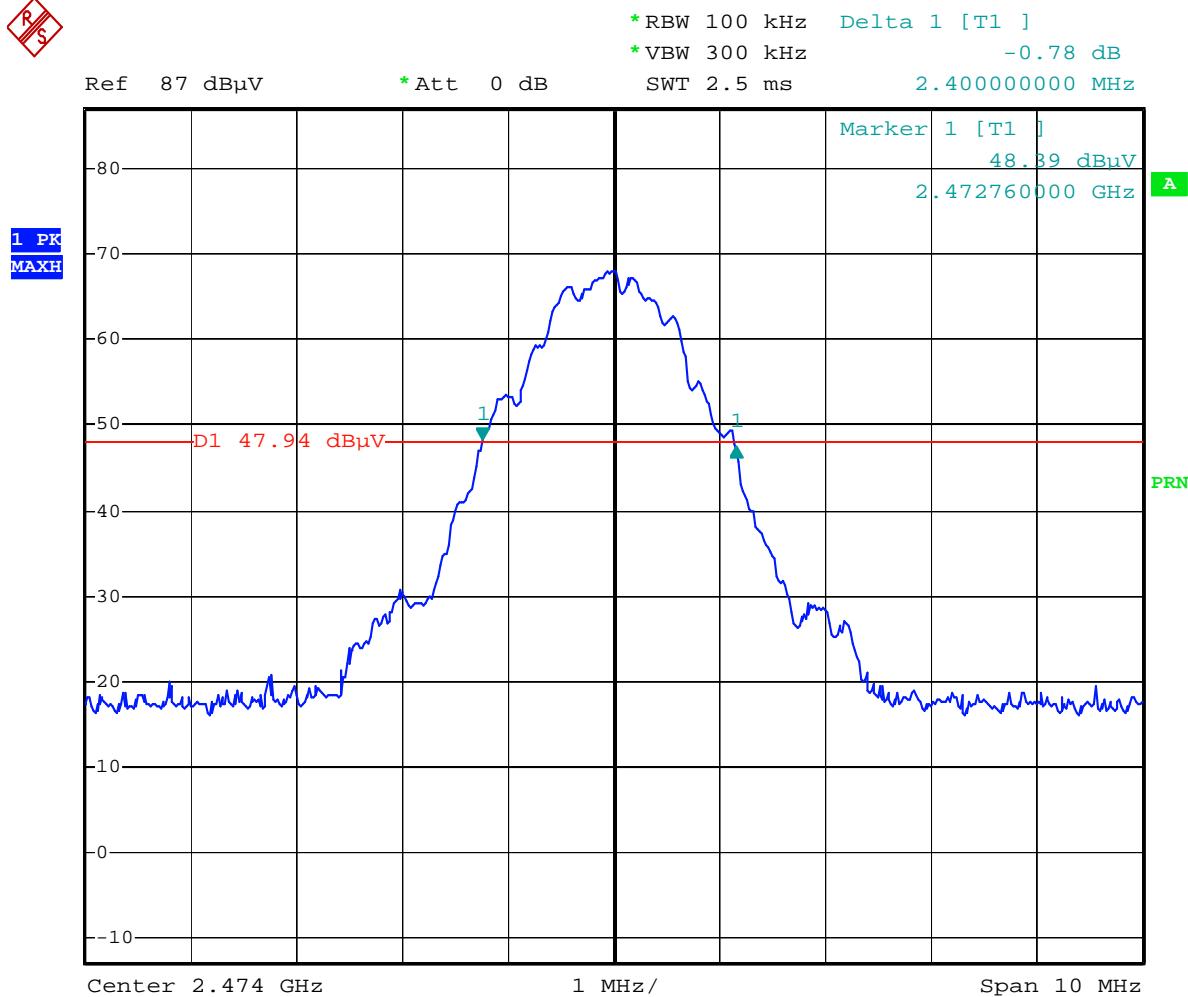

Date: 23.JUN.2008 16:25:04

High Channel

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
February 22, 2009	Vue Gateway Certification Test Report FCC ID: WD9-VG100T	2008 06108695 FCC	22 of 32

5.5. Power Level and Radiated Spurious Emissions

RSS-210 Annex 8.4(2)

(a) Operation under the provisions of this Section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:

(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system-hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average of each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

The EUT had no conducted emissions measurement capacity therefore radiated emission measurements were performed.

Power Level Limits 125 mWatt or 116.2 dBuV/m @3m. EUT complies.

$$10^{[(\text{Field Strength in dBuV/m} - 120)/20]} = \text{Field Strength in V/m}$$

$$[(\text{Field Strength in V/m} \times 3\text{m})/5.5]^2 = \text{Power in Watts}$$

$$\text{Peak } 76.5 + 28.3 \text{ Ant. Fac.} + 5.9 \text{ cable loss} = 110.7 \text{ dB}\mu\text{V/m}$$

Max HOLD Measured 110.7 dBuV/m @ 3m which translates to a RF power of 0.0352 W.

0 dBi antenna, conducted output power = radiated output power.

Test Results: From table next page


Radiated Power		
Low Channel	Mid Channel	High Channel
108.5 dBuV/m	107.8 dBuV/m	110.7 dBuV/m
13.3 dBm	12.6 dBm	15.5 dBm 35.2 mW

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
February 22, 2009	Vue Gateway Certification Test Report FCC ID: WD9-VG100T	2008 06108695 FCC	23 of 32

Limit at 2400 MHz: 108.5 peak measured in 100 kHz BW $-20\text{dBc} = 88.5\text{dBuV/m}$

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
February 22, 2009	Vue Gateway Certification Test Report FCC ID: WD9-VG100T	2008 06108695 FCC	24 of 32

5.6. Fundamental Emissions

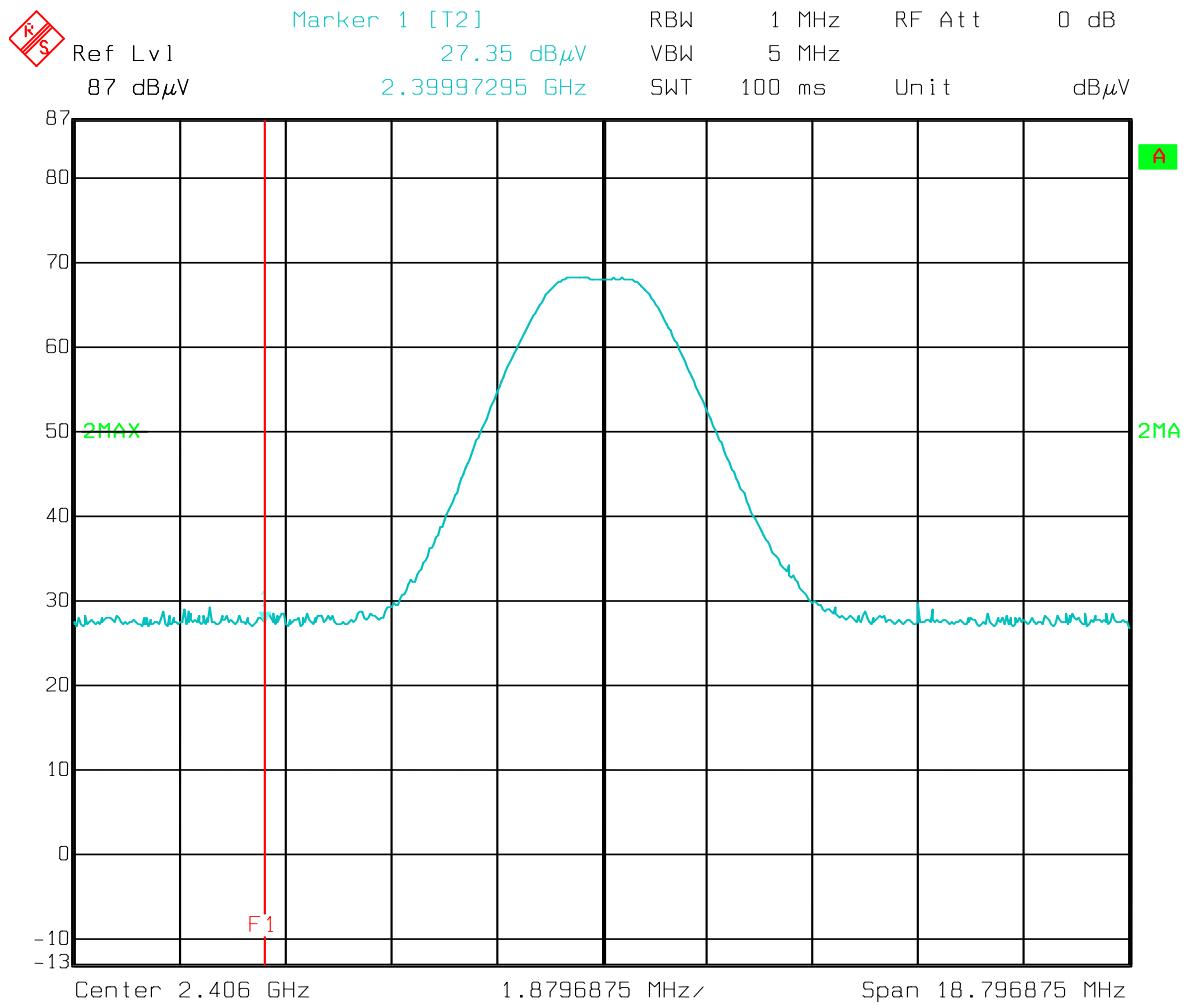

Limit = 20 dBc

Peak 27.35 + antenna factor 28.4 + cable loss 5.9 = 61.6 dB μ V/m

Limit = 110.8 dB μ V/m -20 dBc = 90.8 EUT complies


No radio emissions within 20 dBc of the Output Power outside of the frequency band, measured in a 100 kHz bandwidth.

Average = Peak - 20 dB = 41.6 dB μ V/m

Nemko USA, Inc.

11696 Sorrento Valley Road, Suite F,
San Diego, CA 92121
Phone (858) 755-5525 Fax (858) 452-1810

DATE	DOCUMENT NAME	DOCUMENT #	PAGE
February 22, 2009	Vue Gateway Certification Test Report FCC ID: WD9-VG100T	2008 06108695 FCC	25 of 32

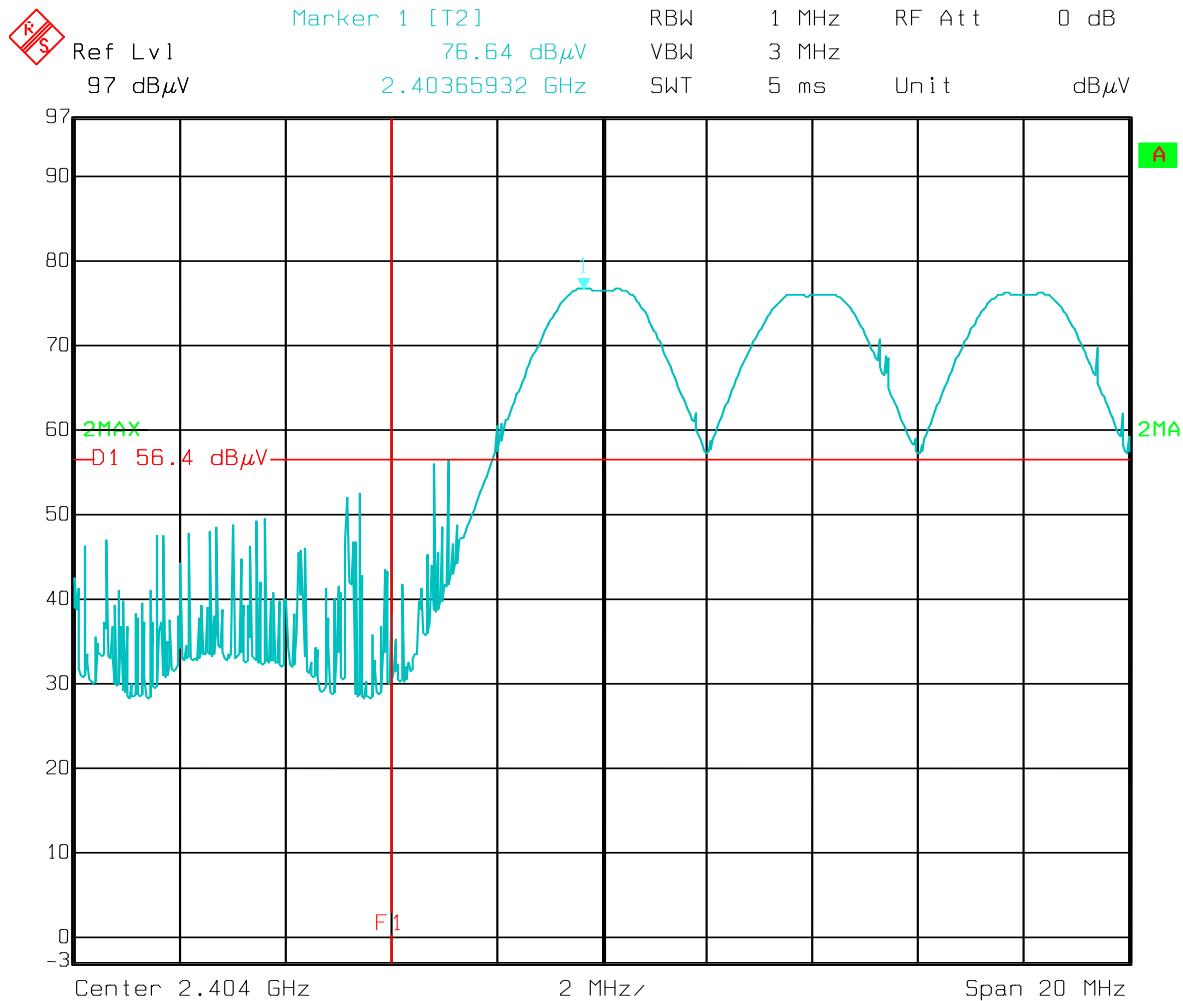

Date: 19.JUN.2008 08:47:26

Limit = 20 dBc


Peak complies.

Average = Peak -20 dB

Average complies

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810			
DATE	DOCUMENT NAME	DOCUMENT #		PAGE	
February 22, 2009	Vue Gateway Certification Test Report FCC ID: WD9-VG100T	2008 06108695 FCC		26 of 32	

Upper Band Edge Non-Hopping

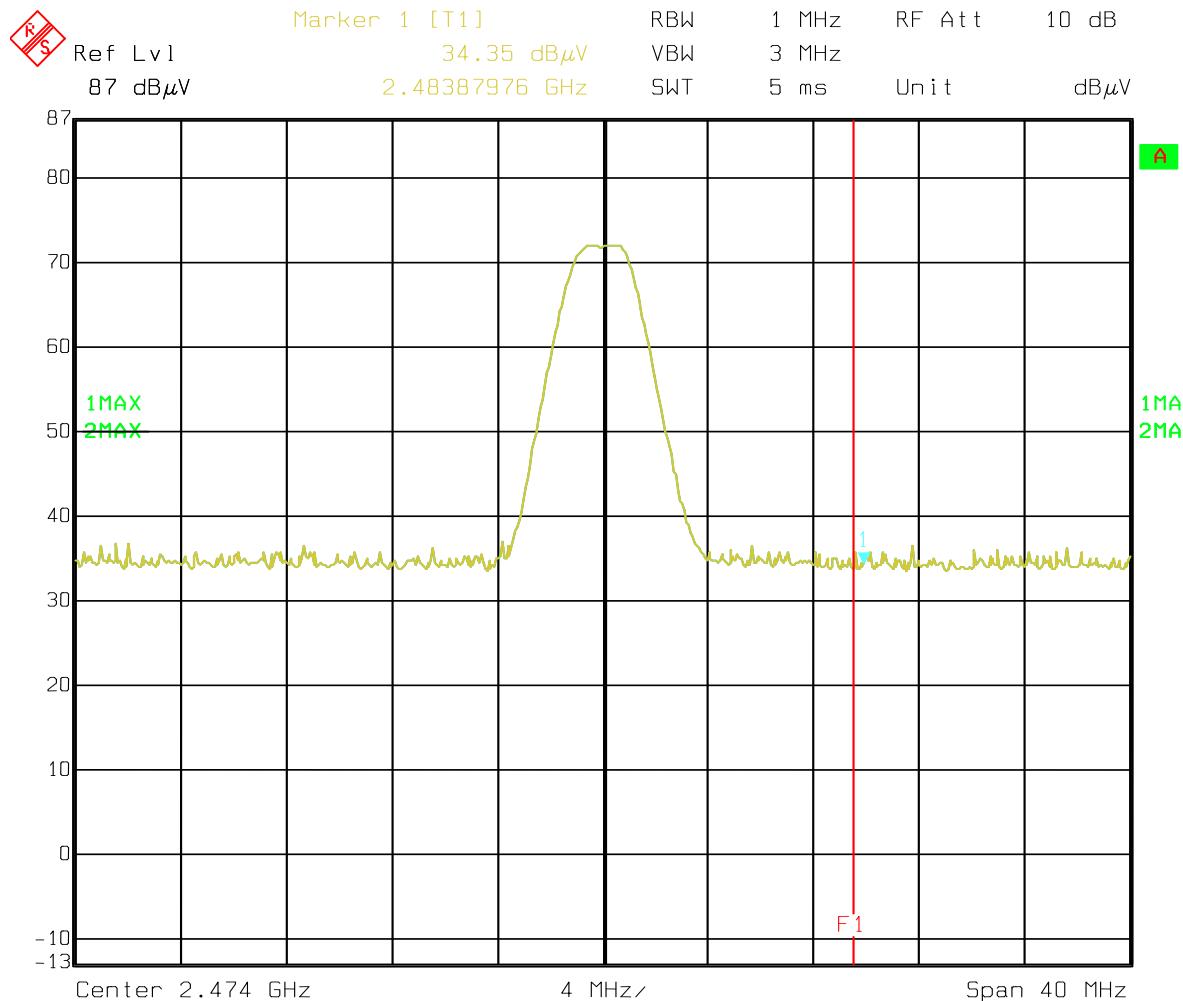

Date: 19.JUN.2008 12:46:57

Sample Computations:

Max Reading = Meter Reading + Antenna Factor + Cable Loss

Peak $34.3 + 28.4 + 5.9 = 68.6$ dB μ V/m

Limit = 74 dB μ V/m EUT complies


Average = Peak – 20 dB = 46.6 dB μ V/m

Limit = 54 dB μ V/m EUT complies

DATE	DOCUMENT NAME	DOCUMENT #	PAGE
February 22, 2009	Vue Gateway Certification Test Report FCC ID: WD9-VG100T	2008 06108695 FCC	27 of 32


Marker Delta Method

Due to digitally spurious signals apparent with a VBW at 1 MHz, the Marker Delta Method was used to prove Bandedge compliance. See next page.

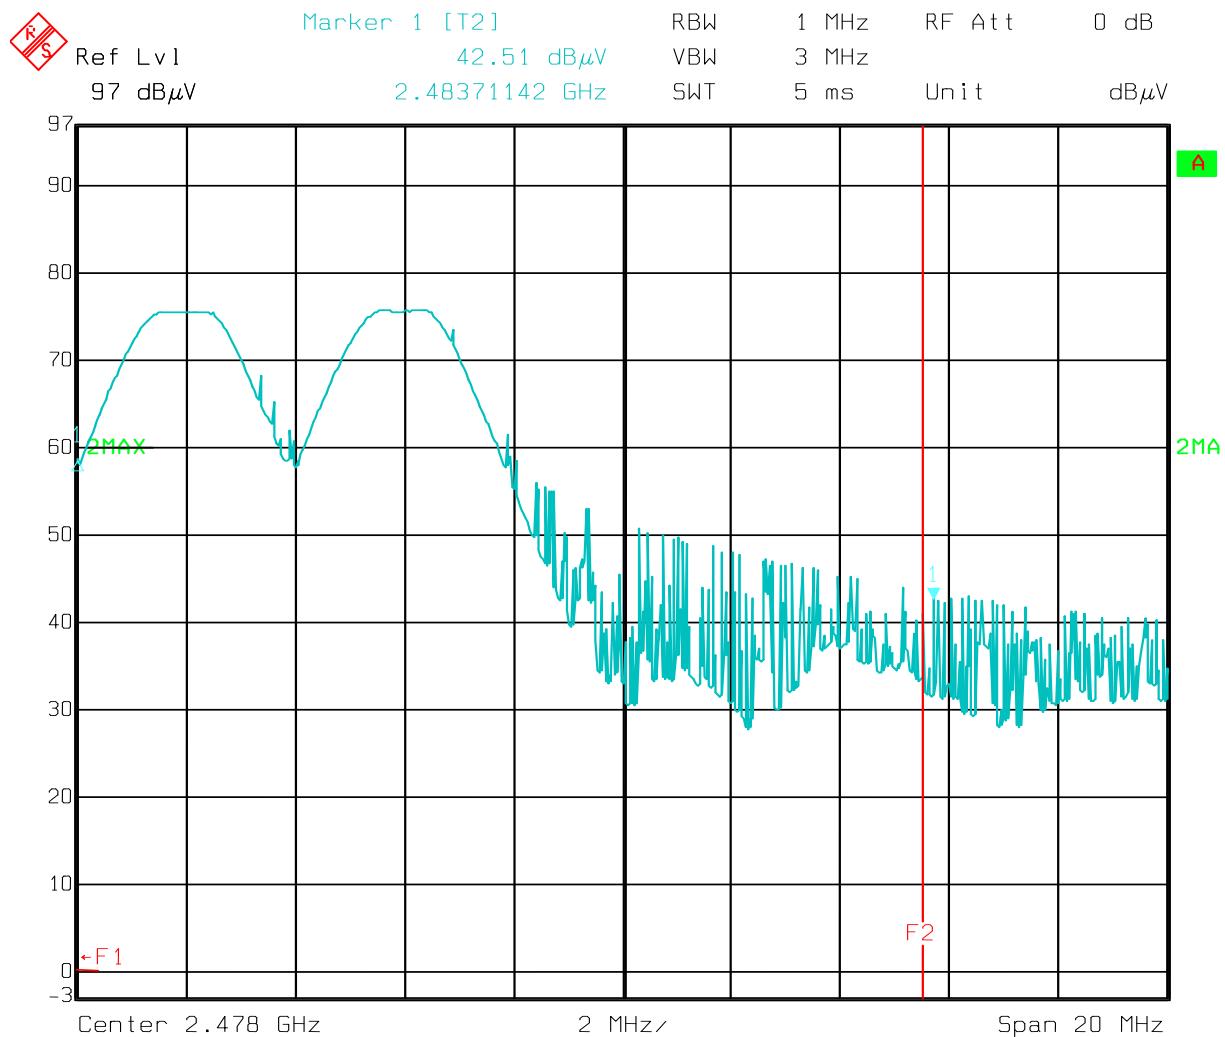

Date: 19.JUN.2008 09:00:48

DATE	DOCUMENT NAME	DOCUMENT #	PAGE
February 22, 2009	Vue Gateway Certification Test Report FCC ID: WD9-VG100T	2008 06108695 FCC	28 of 32

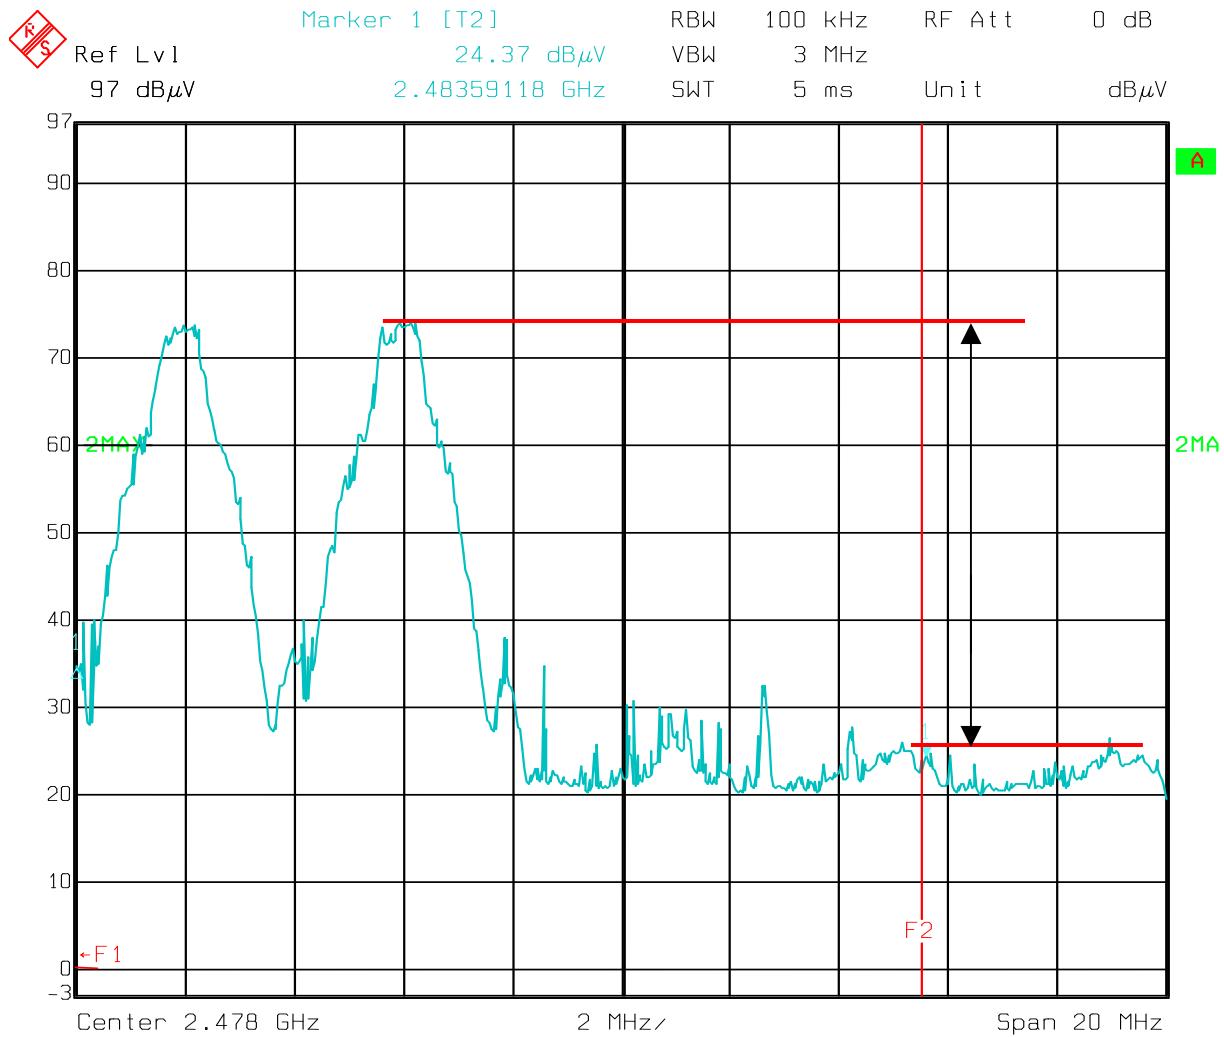

Date: 19.JUN.2008 09:02:48

Marker Delta Method

Due to digitally spurious signals apparent with a VBW at 1 MHz, the Marker Delta Method was used to prove Bandedge compliance.

Delta from 100 kHz VBW Peak to Bandedge = 74.0 - 24.4 = 49.6

1 MHz VBW measured Peak 74.0 + 28.3 Ant. Fac. + 5.9 cable loss = 108.2 dB μ V/m

Bandedge = 108.2 - 49.6 = 58.6 dB μ V/m

Limit = 74 dB μ V/m EUT complies

Average = Peak - 20 dB = 38.6 dB μ V/m

Limit = 54 dB μ V/m EUT complies

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
February 22, 2009	Vue Gateway Certification Test Report FCC ID: WD9-VG100T	2008 06108695 FCC	29 of 32

5.7. Number of Hopping Channels


RSS-210 Annex 8.1(4)

(iii) Frequency hopping systems in the 2400-2483.5 MHz band may utilize hopping channels whose 20dB bandwidth is greater than 1 MHz provided the systems use at least 15 non-overlapping channels. The total span of hopping channels shall be at least 75 MHz.

16 hopping channels

Span = Highest Channel Frequency – Lowest Channel frequency + 20 dB bandwidth > 75 MHz

$$2474 - 2404 + 2.4 = 76.6 \text{ MHz.}$$

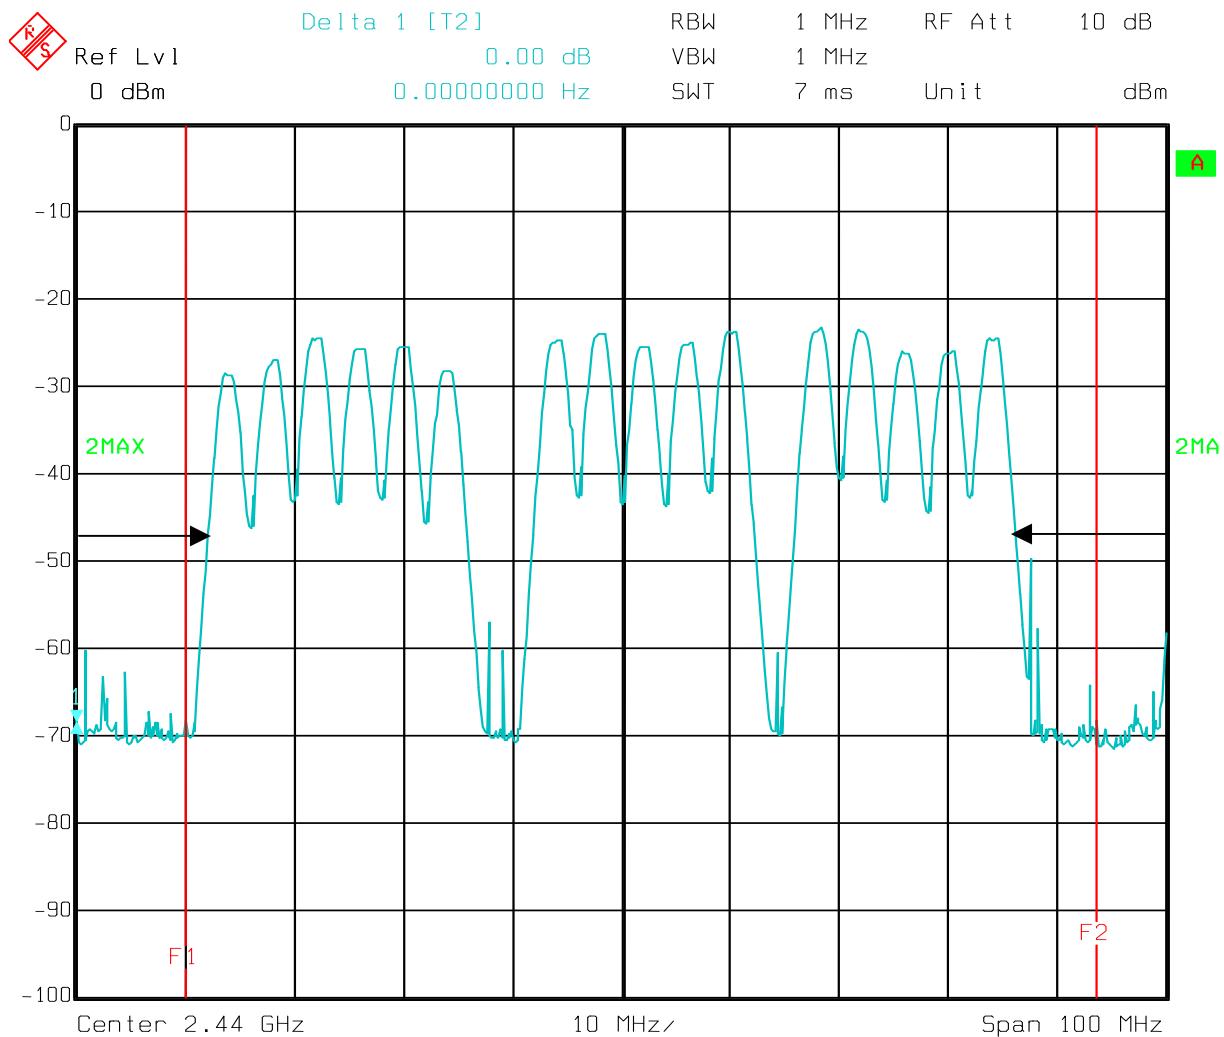


Date: 22.FEB.2009 17:44:34

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
February 22, 2009	Vue Gateway Certification Test Report FCC ID: WD9-VG100T	2008 06108695 FCC	30 of 32

5.8. Channel Separation

15.247(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW.

Frequency Separation: **3.82 MHz**

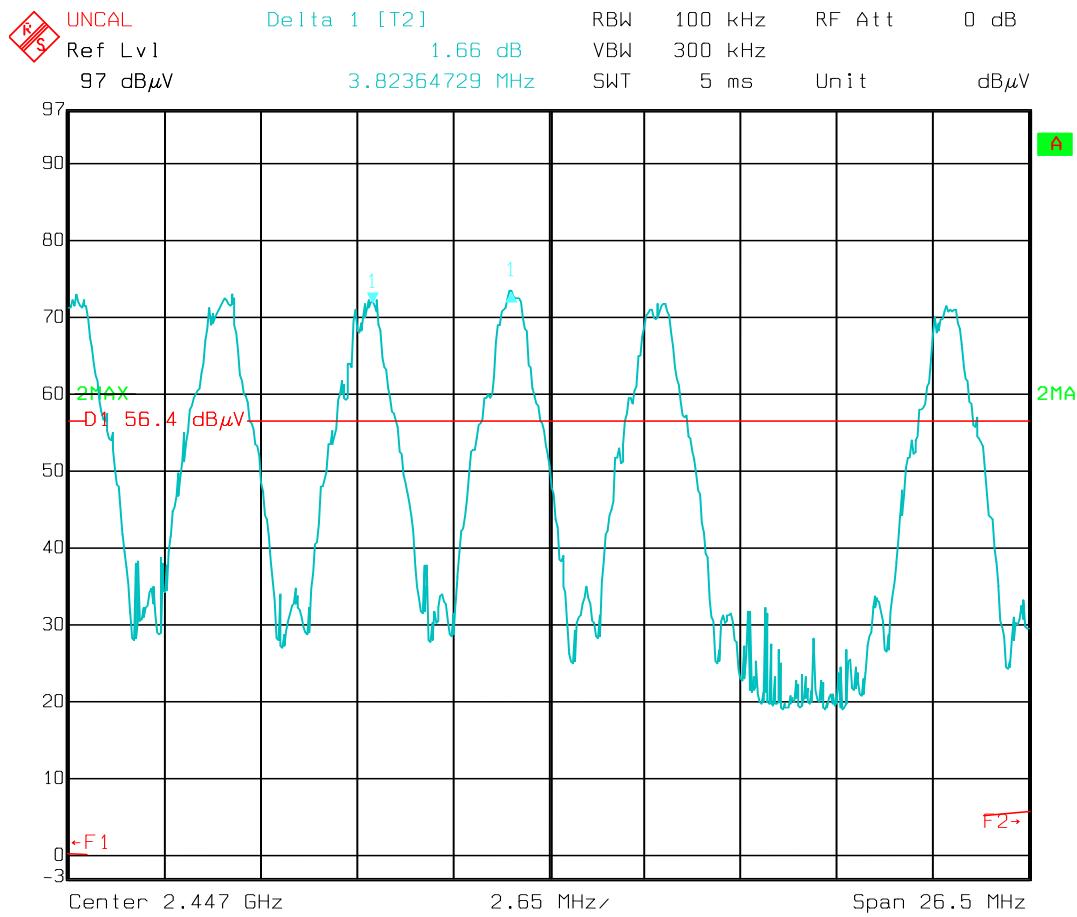

Date: 19.JUN.2008 08:51:07

5.9. Time of Occupancy

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
February 22, 2009	Vue Gateway Certification Test Report FCC ID: WD9-VG100T	2008 06108695 FCC	31 of 32

RSS-210 Annex 8.1(4)

15.247 (a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.


16 channels x 0.4 Seconds = 6.4 seconds.

6.4 ms on time each time emission is on in channel selected at random.

22 count for channel emissions in 6.4 seconds – page 32.

$$22 \times 6.6 \text{ ms} = 145\text{ms}$$

145 ms < 0.4 seconds

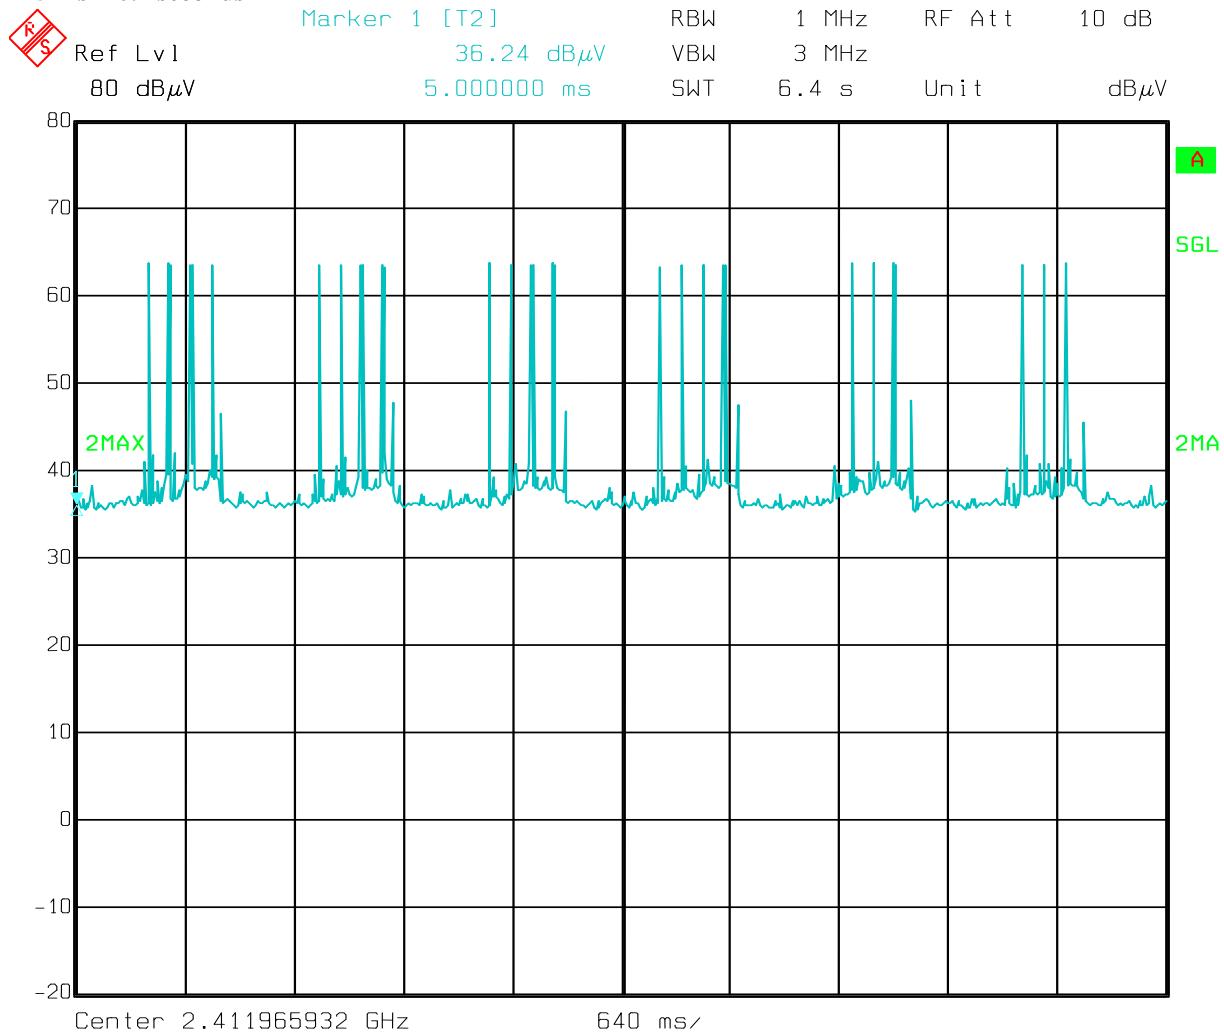

Date: 22.FEB.2009 15:56:39

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810		
DATE	DOCUMENT NAME	DOCUMENT #	PAGE	
February 22, 2009	Vue Gateway Certification Test Report FCC ID: WD9-VG100T		2008 06108695 FCC	32 of 32

5.10. Test Equipment

Nemko ID	Device	Manufacturer	Model	Serial Number	Cal Date	Cal Due Date
115	Antenna, Bicon	EMCO	3104	3020	10-Jan-08	10-Jan-09
110	Antenna, LPA	EMCO	3146	12217	28-Aug-07	28-Aug-08
317	Amplifier	HP	8449A	2749A00167	28-Aug-07	28-Aug-08
438	Spectrum Analyzer Display	HP	85662A	2648A15448	21-Feb-08	21-Feb-09
439	Quasi-Peak Adapter	HP	85650A	2521A00618	21-Mar-08	21-Mar-09
440	Spectrum Analyzer	HP	8568A	2517A01757	27-Jun-07	27-Jun-08
529	Antenna, DRWG	EMCO	3115	25056	27-Aug-07	27-Aug-08
574	High Pass Filter	Solar	7801-5.0	853135	09-Jul-07	09-Jul-08
625	Antenna, Dbl Ridge Horn	EMCO	3116	2325	01-Apr-08	01-Apr-09
684	Transient Limiter	HP	11974A	3107A02636	05-Sep-07	05-Sep-08
835	Spectrum Analyzer	Rohde & Schwarz	RHDFSEK	829058/005	27-Jun-08	27-Jun-09
805	LISN	Solar	9348-50-R-24-BNC	992823	14-Jan-08	14-Jan-09
901	Amplifier	Com Power	PA 103	130607	13-Mar-08	13-Mar-09
911	Spectrum Analyzer	Agilent	E4440A	US41421266	18-Mar-08	18-Mar-09