

**FCC PART 15 SUBPART C SECTION 15.231,
RSS-GEN, & RSS-210
TEST REPORT**

for

**WIRELESS ZONE ADAPTOR
Model: 2GIG-TAKE1e-345**

Prepared for

NORTEK SECURITY & CONTROL LLC
5919 Sea Otter Place
Carlsbad, California 92010

Prepared by: _____

SAM KERCKHOFF

Reviewed by: _____

JOEY MADLANGBAYAN

COMPATIBLE ELECTRONICS INC.
20621 PASCAL WAY
LAKE FOREST, CALIFORNIA 92630
(949) 587-0400

DATE: July 12th, 2019

	REPORT BODY	APPENDICES					TOTAL
		<i>A</i>	<i>B</i>	<i>C</i>	<i>D</i>	<i>E</i>	
PAGES	18	2	2	2	9	8	41

This report shall not be reproduced except in full, without the written approval of
Compatible Electronics.



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Newbury Park
1050 Lawrence Dr.
Newbury Park, CA 91320
(818) 597-0600

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

TABLE OF CONTENTS

Section / Title	PAGE
GENERAL REPORT SUMMARY	4
SUMMARY OF TEST RESULTS	5
1. PURPOSE	6
2. ADMINISTRATIVE DATA	7
2.1 Location of Testing	7
2.2 Traceability Statement	7
2.3 Cognizant Personnel	7
2.4 Date Test Sample was Received	7
2.5 Disposition of the Test Sample	7
2.6 Abbreviations and Acronyms	7
3. APPLICABLE DOCUMENTS	8
4. DESCRIPTION OF TEST CONFIGURATION	9
4.1 Description of Test Configuration	9
5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT	11
5.1 EUT and Accessory List	11
5.2 EMI Test Equipment	12
5.3 Test Software	12
6. TEST SITE DESCRIPTION	13
6.1 Test Facility Description	13
6.2 EUT Mounting, Bonding and Grounding	13
6.3 Facility Environmental Characteristics	13
6.4 Measurement Uncertainty	13
7. CHARACTERISTICS OF THE TRANSMITTER	14
7.1 Channel Number and Frequencies	14
7.2 Antenna	14
7.3 EUT Test Software	14
8. TEST PROCEDURES	15
8.1 RF Emissions	15
9. TEST PROCEDURE DEVIATIONS	18
10. CONCLUSIONS	18



LIST OF APPENDICES

APPENDIX	TITLE
A	Laboratory Accreditations and Recognitions
B	Modifications to the EUT
C	Additional Models Covered Under This Report
D	Diagrams, Charts, and Photos <ul style="list-style-type: none"> • Test Setup Diagrams • Antenna Factors • Radiated Photos
E	Radiated Data Sheets

LIST OF FIGURES

FIGURE	TITLE
1	Plot Map and Layout of Test Site Below 1GHz
2	Plot Map and Layout of Test Site Above 1GHz



GENERAL REPORT SUMMARY

This test report is pursuant to a class 2 permissive change on the subject device. Full re-testing was not performed, only those tests that were impacted by the change have been run in their entirety. See C2PC request exhibit regarding the details of the change.

This electromagnetic emission test report is generated by Compatible Electronics Inc., which is an independent testing and consulting firm. The test report is based on testing performed by Compatible Electronics personnel according to the measurement procedures described in the test specifications given below and in the "Test Procedures" section of this report.

The measurement data and conclusions appearing herein relate only to the sample tested and this report may not be reproduced in any form unless done so in full with the written permission of Compatible Electronics.

This report must not be used to claim product certification, approval or endorsement by NVLAP, NIST, or any agency of the federal government.

Device Tested: Wireless Zone Adaptor
Model: 2GIG-TAKE1e-345
S/N: None

Product Description: The Super Switch is 2GIG's wireless takeover module. This unit was designed to convert 8 hardwired zones into eight wireless zones, make installation simple, and work with existing 12-volt control panels. The module is to be mounted next to the existing Control Panel where the hardwired zones are connected. All of the zones on the Super Switch act as supervised wireless zones.

Modifications: The EUT was not modified at the test lab to comply with specifications.

Manufacturer: Nortek Security & Control LLC
5919 Sea Otter Place
Carlsbad, California 92010

Test Dates: June 14, 20 and 25, 2019



Test Specifications Covered by Accreditation:
EMI requirements

CFR Title 47, Part 15 Subpart C Sections 15.205, 15.207, 15.209 and 15.231
RSS-GEN & RSS-210

Test Procedure: ANSI C63.4 & C63.10



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Newbury Park
1050 Lawrence Dr.
Newbury Park, CA 91320
(818) 597-0600

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

SUMMARY OF TEST RESULTS

TEST	DESCRIPTION	RESULTS
1	Duty Cycle	Recorded
2	Fundamental and harmonics, field strength measurements.	Complies with the limits of CFR Title 47, Part 15 Subpart C Section 15.209, 15.231, & RSS-GEN.
3	-20 dB Occupied Bandwidth of the Emission	Complies with the limits of CFR Title 47, Part 15, Subpart C, section 15.231 & RSS-210.



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Newbury Park
1050 Lawrence Dr.
Newbury Park, CA 91320
(818) 597-0600

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

1. PURPOSE

This document is a qualification test report based on the tests performed on the Wireless Zone Adaptor Model: 2GIG-TAKE1e-345. The measurements were performed according to the measurement procedure described in ANSI C63.10. The tests were performed in order to determine whether the results from the equipment under test, referred to as EUT (equipment under test) hereafter, are within the specification limits defined by the Code of Federal Regulations Title 47, Part 15 Subpart C sections 15.205, 15.209, 15.231, RSS-GEN, & RSS-210.



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Newbury Park
1050 Lawrence Dr.
Newbury Park, CA 91320
(818) 597-0600

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

2. ADMINISTRATIVE DATA

2.1 Location of Testing

The tests described herein were performed at the test facility of Compatible Electronics, 20621 Pascal Way Lake Forest, California 92630.

2.2 Traceability Statement

The calibration certificates of all test equipment used during the test are on file at the location of the test. The calibration is traceable to the National Institute of Standards and Technology (NIST).

2.3 Cognizant Personnel

Nortek Security & Control LLC

Josh Hansen Engineering Manager, Regulatory

Compatible Electronics, Inc.

Sam Kerckhoff Test Engineer

Joey Madlangbayan Product Safety Manager

2.4 Date Test Sample was Received

The test sample was received on March 22, 2019.

2.5 Disposition of the Test Sample

The test sample remains at the location of testing listed above.

2.6 Abbreviations and Acronyms

The following abbreviations and acronyms may be used in this document.

RF	Radio Frequency
EMI	Electromagnetic Interference
EUT	Equipment Under Test
FAR	Fully Anechoic Room
SAC	Semi-Anechoic Chamber
P/N	Part Number
S/N	Serial Number
HP	Hewlett Packard
ITE	Information Technology Equipment
CML	Corrected Meter Limit
LISN	Line Impedance Stabilization Network
NVLAP	National Voluntary Laboratory Accreditation Program
CFR	Code of Federal Regulations
PCB	Printed Circuit Board
TX	Transmit
RX	Receive



3. APPLICABLE DOCUMENTS

The following documents are referenced or used in the preparation of this Test Report.

SPEC	TITLE
CFR Title 47, Part 15	FCC Rules – Radio frequency devices (including digital devices)
ANSI C63.4 2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
ANSI C63.10: 2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
RSS-GEN, Issue 5	General Requirements for Compliance of Radio Apparatus
RSS-210, Issue 9	Licence-Exempt Radio Apparatus: Category I Equipment



4. DESCRIPTION OF TEST CONFIGURATION


4.1 Description of Test Configuration

The Wireless Zone Adaptor Model: 2GIG-TAKE1e-345 (EUT) was setup in a standalone tabletop configuration. The EUT was checked in all 3 axes. The worst case was found to be the Y-axis. The EUT was continuously transmitting during the transmit tests.

The EUT was tested with new batteries.

It was determined that the emissions were at their highest level when the EUT was transmitting in the configuration described above for Radiated Emissions. The final radiated data was taken in the above configuration. Please see Appendix E for the test data.

4.1.1 *Photograph Test Configuration (Y-axis Shown)*

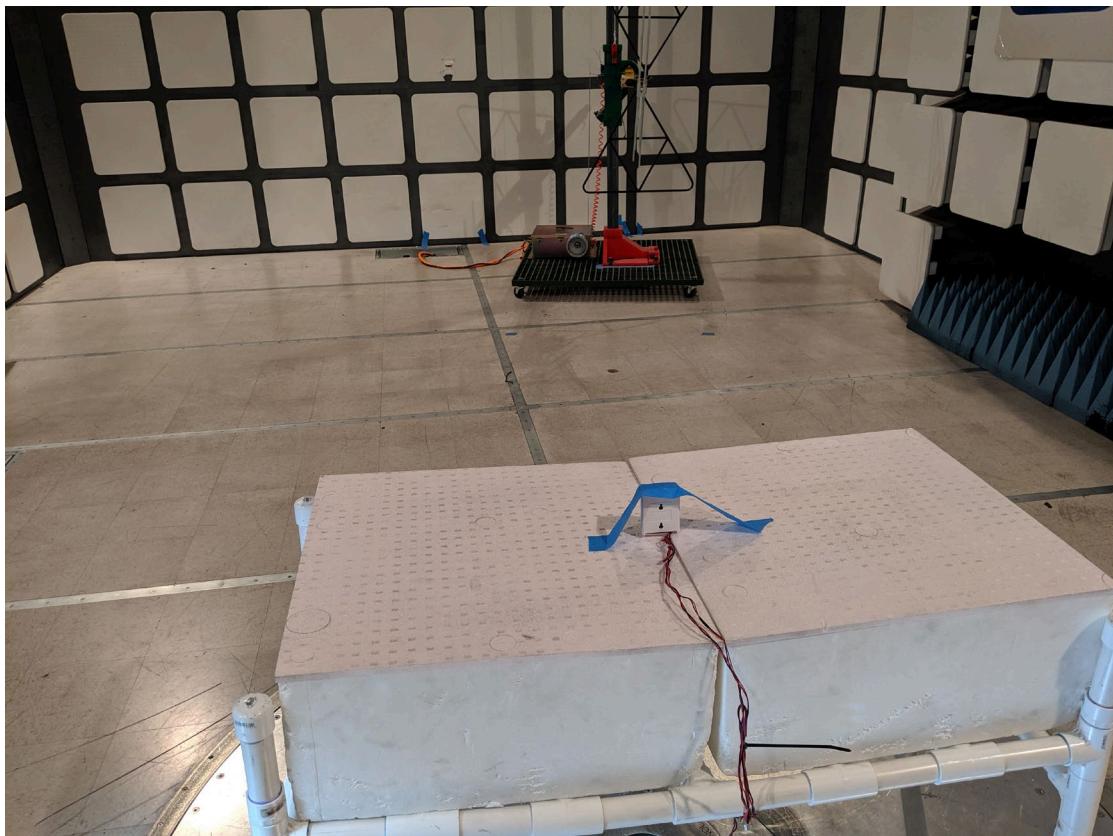

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Newbury Park
1050 Lawrence Dr.
Newbury Park, CA 91320
(818) 597-0600

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

4.1.2 *Cable Construction and Termination*

Cable 1 & 2: These are power supply cables (positive and negative wire). These cables are wires that provide DC supply voltage to the EUT and can be of any length. The cables used for testing were 1.8 meters, for 30 – 1000 MHZ testing they were bundled to a length of 1 meter.

4.1.3 *Axis Orientation*

The EUT is installed and operated in only one axis, the Y axis, see 4.1. A brief check was made to confirm that the emissions are at the highest when oriented in the Y axis



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Newbury Park
1050 Lawrence Dr.
Newbury Park, CA 91320
(818) 597-0600

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT**5.1 EUT and Accessory List**

#	EQUIPMENT TYPE	MANUFACTURER	MODEL	S/N
1	WIRELESS ZONE ADAPTOR (EUT)	Nortek Security & Control LLC	2GIG-TAKE1e-345	None
2	12 V Battery	GTO Access Systems, LLC	LP12-7.0	080618-LA



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Newbury Park
1050 Lawrence Dr.
Newbury Park, CA 91320
(818) 597-0600

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

5.2 EMI Test Equipment

INSTRUMENTS USED	MANUFACTURER	MODEL NUMBER	ASSET#	CALIBRATION DATE	CALIBRATION CYCLE
Thermometer & Hygrometer	Control Company	4088	2741	2/20/2019	1 YEAR
Receiver, 20hz-40ghz	Rohde & Schwarz	ESIB40	5050	09/20/2018	1 YEAR
EMI Receiver	Keysight	N9038A	5551	02/05/2019	1 YEAR
Controller, Mast and Turntable	Sunol Sciences Corporation	SC104V	5032	N.C.R.	
Mast, Antenna Positioner	Sunol Sciences Corporation	TWR95.4	5033	N.C.R.	
Turntable	Sunol Sciences Corporation	FM2011VS	5034	N.C.R.	
Antenna, Active Loop	Com-Power	AL-130	5496	03/21/2019	2 YEARS
Antenna, CombiLog	Com-Power	AC-220	5511	03/12/2018	2 YEARS
Antenna, Horn Double Ridge	Com-Power	AH-118	5561	01/25/2019	2 YEARS
Pre-amp, Hi-Frequency	Com-Power	PAM-118A	5466	01/28/2019	1 YEAR
LISN, 15A 10kHz-30MHz	Com-Power	LI-215	5494	06/26/2018	1 YEAR
LISN, 15A, 10kHz-30MHz	Com-Power	LI-215	5554	06/26/2018	1 YEAR
Attenuator	Aeroflex/Weinschel	2-10	5211	10/03/2018	1 YEAR

5.3 Test Software

LAB(S)	SOFTWARE TITLE	MANUFACTURER	VERSION
P, R	Measurement and Automation Software	TDK TestLab	5.53



6. TEST SITE DESCRIPTION

6.1 Test Facility Description

Please refer to section 2.1 and the figures in Appendix D of this report for test location and facility diagrams.

6.2 EUT Mounting, Bonding and Grounding

For measurements up to 1GHz the EUT was mounted on a non-conductive surface 80 cm above the ground plane.

For above 1GHz the EUT was mounted on a 1.5-meter-high non-conductive tabletop, which was placed on the ground plane.

The EUT was not grounded.

6.3 Facility Environmental Characteristics

When applicable refer to the data sheets in Appendix E for the relative humidity, air temperature, and barometric pressure.

6.4 Measurement Uncertainty

“Compatible Electronics’ U_{lab} value is less than U_{cisp} , thus based on this – compliance is deemed to occur if no measured disturbance exceeds the disturbance limit. For FCC compliance the uncertainty is not considered only reported. U_{lab} is the expanded uncertainty of the lab

$$u_c(y) = \sqrt{\sum_i c_i^2 u^2(x_i)}$$

Measurement		U_{cisp}	$U_{lab} = 2 u_c(y)$
Conducted disturbance (mains port)	(150 kHz – 30 MHz)	3.4 dB	2.88
Radiated disturbance (electric field strength on an open area test site or SAC)	(30 MHz – 1 000 MHz)	6.3 dB	4.04
Radiated disturbance (electric field strength in a FAR)	(1 GHz – 6 GHz)	5.2	3.67
Radiated disturbance (electric field strength in a FAR)	(6 GHz – 18 GHz)	5.5	3.67



7. CHARACTERISTICS OF THE TRANSMITTER

7.1 Channel Number and Frequencies

The EUT has one operating channel and the EUT has OOK modulation. The EUT has a fixed output power.

1 == 345 MHz

7.2 Antenna

The antenna is a trace antenna.

7.3 EUT Test Software

PN: unspecified

Date: 09/07/2016

Location: Nortek Security & Control LLC 5919 Sea Otter Place, Carlsbad, California 92010.



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Newbury Park
1050 Lawrence Dr.
Newbury Park, CA 91320
(818) 597-0600

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

8. TEST PROCEDURES

The following sections describe the test methods and the specifications for the tests. Test results are also included in this section.

8.1 RF Emissions


8.1.1 *Conducted Emissions Test*

Test Results: *The EUT was battery operated; therefore, this test was deemed unnecessary and thus was not performed. If this test had been performed it would have been as below.*

The EMI receiver was used as a measuring meter. A quasi-peak and/or average reading was taken only where indicated in the data sheets. The LISN output was measured using the EMI receiver. The output of the second LISN was terminated by a 50-ohm termination. The effective measurement bandwidth used for this test was 9 kHz.

Please see section 6.2 of this report for mounting, bonding, and grounding of the EUT. The EUT received its power through the LISN, which was bonded to the ground plane. The EUT was set up with the minimum distances from any conductive surfaces as specified in ANSI 63.4. The excess power cord was wrapped in a figure eight pattern to form a bundle not exceeding 0.4 meters in length.

The conducted emissions from the EUT were maximized for operating mode as well as cable placement. The final data was collected under program control by the computer software.

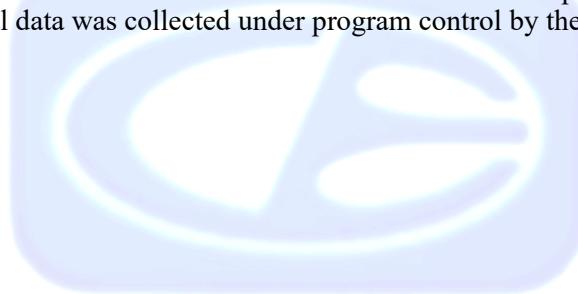

8.1.2

Radiated Emissions (Fundamental and Harmonics) Test

The EMI receiver was used as a measuring meter. The receiver was used in the peak detect mode with the "Max Hold" feature activated. In this mode, the receiver records the highest measured reading over all the sweeps.

For spurious emissions the quasi-peak detector was used for frequencies below 1GHz and the average detector was used for frequencies above 1 GHz.

For the Fundamental & Harmonic emissions a duty cycle average was used.

The measurement bandwidths and transducers used for the radiated emissions test were:

FREQUENCY RANGE (MHz)	TRANSDUCER	EFFECTIVE MEASUREMENT BANDWIDTH
.009 to .150	Active Loop Antenna	200 Hz
.150 to 30	Active Loop Antenna	9 kHz
30 to 1000	Combilog Antenna	100 kHz (120kHz for QP Measurements)
1000 to 3450	Horn Antenna	1 MHz

The TDK FAC-3 shielded test chamber of Compatible Electronics, Inc. was used for radiated emissions testing. This test site is in full compliance with ANSI C63.4 & ANSI C63.10. Please see section 6.2 of this report for mounting, bonding and grounding of the EUT. The turntable supporting the EUT is remote controlled using a motor. The turntable permits EUT rotation of 360 degrees in order to maximize emissions. Also, the antenna mast allows height variation of the antenna from 1 meter to 4 meters. Data was collected in the worst case (highest emission) configuration of the EUT. At each reading, the EUT was rotated 360 degrees and the antenna height was varied from 1 to 4 meters in both vertical and horizontal polarizations (for E field radiated field strength).

Test Results:

No emissions found.



8.1.3 Peak radiated EMI

The EUT was tested at a 3-meter test distance to obtain the final test data. The final qualification data sheets are in Appendix E. This data also shows compliance at the band edges. A duty cycle correction factor was applied to the fundamental and any harmonic above 1 GHz, see Appendix E for plots.

Duty Cycle Correction Factor = -18.13

$$\delta(\text{dB}) = 20 \log \left[\sum (n t_1 + m t_2 + \dots + \xi t_x) / T \right]$$

where

n is the number of pulses of duration t_1

m is the number of pulses of duration t_2

ξ is the number of pulses of duration t_x

T is the period of the pulse train or 100 ms if the pulse train length is greater than 100 ms

Pulse Type 1 = $19 * 0.2669 \text{ mS} = 5.071 \text{ mS}$


Pulse Type 2 = $50 * 0.1467 \text{ mS} = 7.335 \text{ mS}$

$5.071 \text{ mS} + 7.335 \text{ mS} = 12.4 \text{ mS}$

Total on Time = 12.4 mS

$12.4 / 100 \text{ mS} = 0.124$

$20 \log (0.124) = \mathbf{-18.13 \text{ dB correction factor}}$

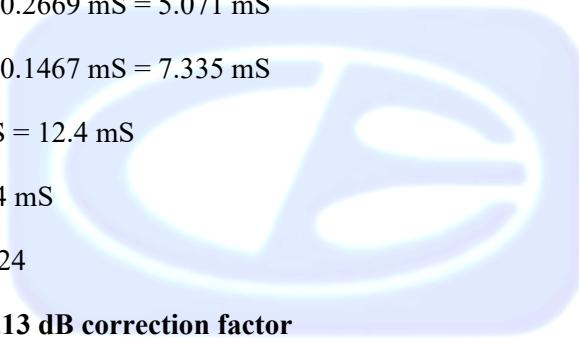

Test Results:

The EUT complies with Part 15, Subpart C, section 15.231 & RSS-210.



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Newbury Park
1050 Lawrence Dr.
Newbury Park, CA 91320
(818) 597-0600

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

8.1.4 *Bandwidth of the Fundamental*

The -20 dB (Occupied) bandwidth was checked using the EMI Receiver in the spectrum analyzer mode to see that the emissions were wholly within 0.25% of the operating frequency centered on the fundamental frequency. The RBW was set to 1-5% of the -20dB bandwidth and the VBW was set to approximately three times the RBW. The span was set to between two and five times the occupied bandwidth. A Plot of the -20 dB bandwidth is located in Appendix E.

Test Results:

The EUT complies with the requirements of CFR Title 47, Part 15, Subpart C, section 15.231 (c) for the -20 dB bandwidth of the fundamental. The EUT has a -20 dB bandwidth that is lies wholly within the 0.25% of the operating frequency centered on the fundamental frequency.

8.1.5 *Occupied Bandwidth*

The 99% occupied bandwidth was checked using the EMI Receiver. The RBW was set to 1-5% of the occupied bandwidth and the VBW was set to approximately three times the RBW. The span was set to between two and five times the occupied bandwidth. A Plot of the Occupied Bandwidth is in Appendix E.

Test Results:

The EUT complies with the requirements of RSS-210 for the 99% bandwidth of the fundamental. The EUT has a 99% bandwidth that is wholly within the 0.25% of the operating frequency centered on the fundamental frequency.

9. TEST PROCEDURE DEVIATIONS

The test procedures were not deviated from the standards throughout all tests.

10. CONCLUSIONS

The Wireless Zone Adaptor Model: 2GIG-TAKE1e-345 meets all of the relevant specification requirements defined in the Code of Federal Regulations Title 47, Part 15 Subpart C sections 15.205, 15.207, 15.209, 15.231, RSS-GEN, & RSS-210.



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Newbury Park
1050 Lawrence Dr.
Newbury Park, CA 91320
(818) 597-0600

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

APPENDIX A***LABORATORY ACCREDITATIONS AND
RECOGNITIONS***

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Newbury Park
1050 Lawrence Dr.
Newbury Park, CA 91320
(818) 597-0600

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

LABORATORY ACCREDITATIONS AND RECOGNITIONS



For US, Canada, Australia/New Zealand, Japan, Taiwan, Korea, and the European Union, Compatible Electronics is currently accredited by NVLAP to ISO/IEC 17025.

For the most up-to-date version of our scopes and certificates please visit

<http://celectronics.com/quality/scope/>

Quote from ISO-ILAC-IAF Communiqué on 17025:

"A laboratory's fulfilment of the requirements of ISO/IEC 17025:2005 means the laboratory meets both the technical competence requirements and management system requirements that are necessary for it to consistently deliver technically valid test results and calibrations. The management system requirements in ISO/IEC 17025:2005 (Section 4) are written in language relevant to laboratory operations and meet the principles of ISO 9001:2008 Quality Management Systems — Requirements."

ISED# 2154C



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Newbury Park
1050 Lawrence Dr.
Newbury Park, CA 91320
(818) 597-0600

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

APPENDIX B***MODIFICATIONS TO THE EUT***

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Newbury Park
1050 Lawrence Dr.
Newbury Park, CA 91320
(818) 597-0600

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

MODIFICATIONS TO THE EUT

There were no modifications were made during testing.



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Newbury Park
1050 Lawrence Dr.
Newbury Park, CA 91320
(818) 597-0600

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

APPENDIX C***ADDITIONAL MODELS COVERED
UNDER THIS REPORT***

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Newbury Park
1050 Lawrence Dr.
Newbury Park, CA 91320
(818) 597-0600

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

ADDITIONAL MODELS COVERED UNDER THIS REPORT

USED FOR THE PRIMARY TEST

WIRELESS ZONE ADAPTOR
MODEL: 2GIG-TAKE1e-345
FCC ID: WDQ-TAK1345

No additional models were tested.



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Newbury Park
1050 Lawrence Dr.
Newbury Park, CA 91320
(818) 597-0600


Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

APPENDIX D***DIAGRAMS, CHARTS, AND PHOTOS***

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Newbury Park
1050 Lawrence Dr.
Newbury Park, CA 91320
(818) 597-0600

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

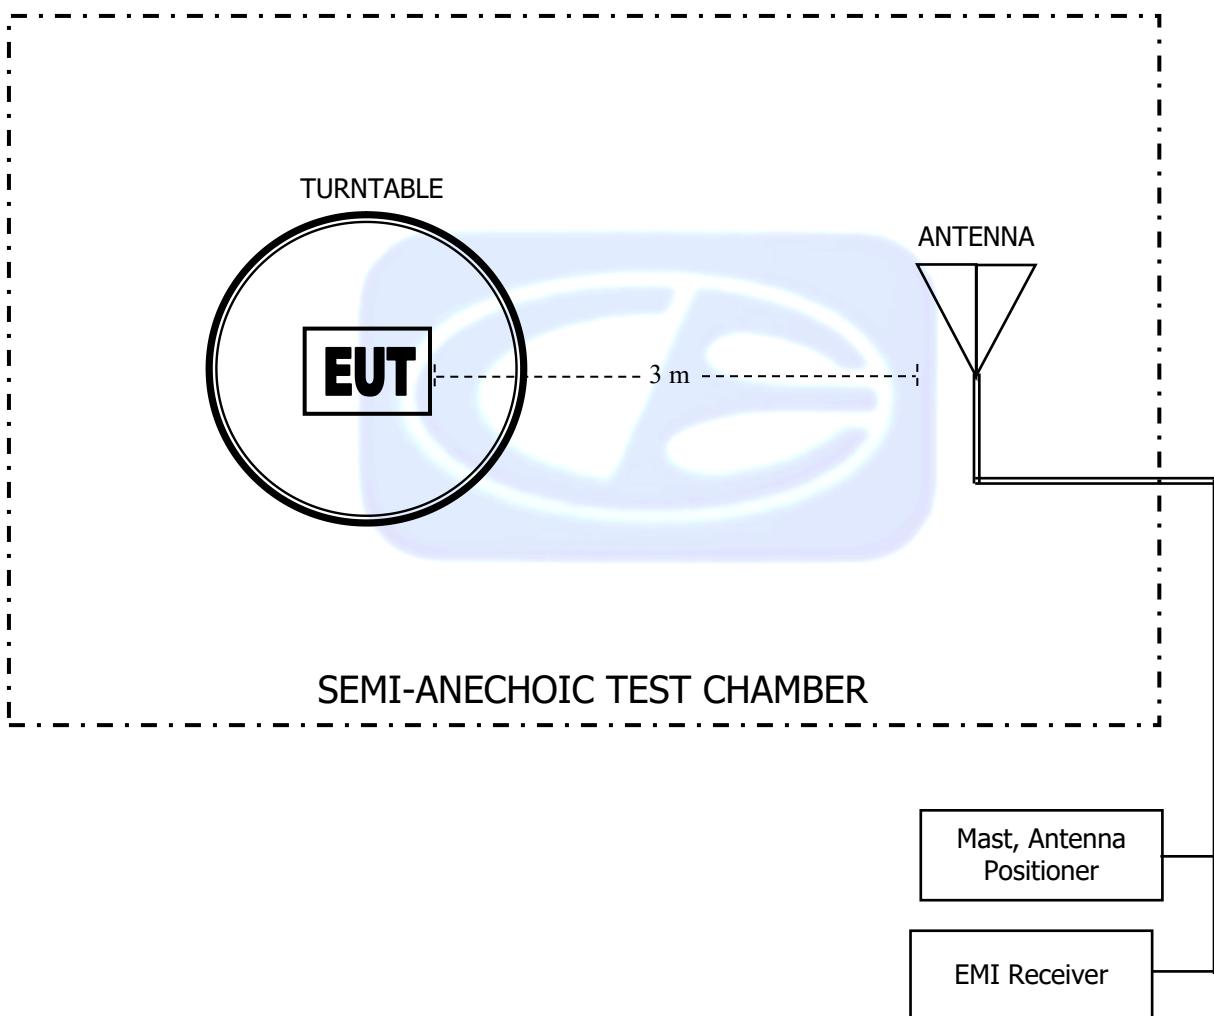
**FIGURE 1: PLOT MAP AND LAYOUT OF TEST SITE
BELOW 1GHZ**

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Newbury Park
1050 Lawrence Dr.
Newbury Park, CA 91320
(818) 597-0600

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

FIGURE 2: PLOT MAP AND LAYOUT OF TEST SITE ABOVE 1GHZ

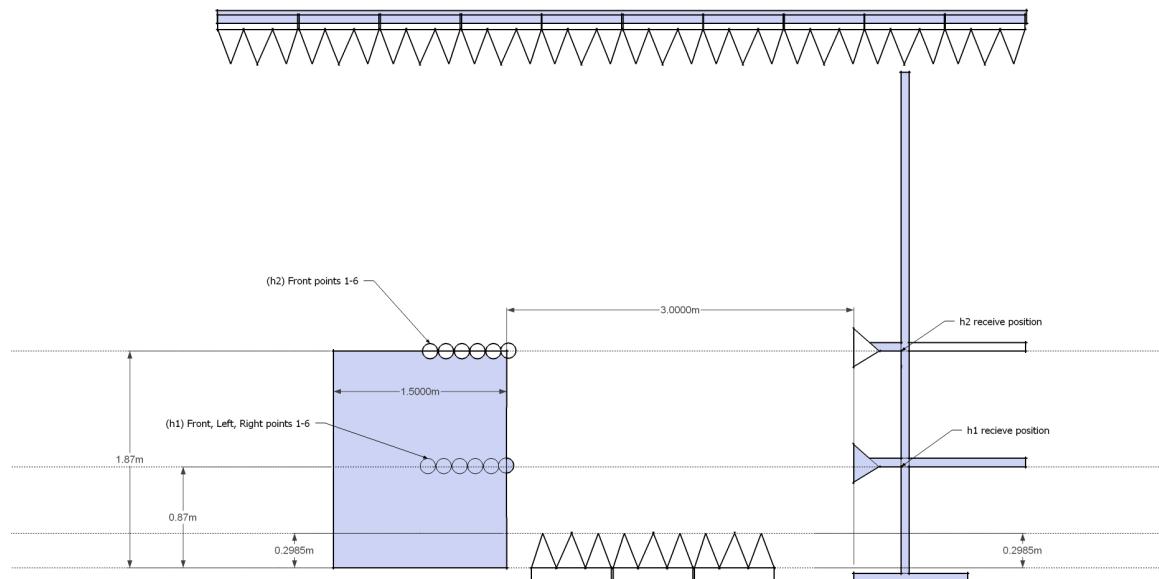

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Newbury Park
1050 Lawrence Dr.
Newbury Park, CA 91320
(818) 597-0600

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

COM-POWER AL-130
ACTIVE LOOP ANTENNA
ASSET# 5496
CALIBRATION DUE: MARCH 21, 2021

FREQUENCY (MHz)	FACTOR E FIELD (dB)	FACTOR H FIELD (dB)	FREQUENCY (MHz)	FACTOR E FIELD (dB)	FACTOR H FIELD (dB)
0.10	14.1	-37.3	11.00	14.9	-36.5
0.20	14.1	-37.3	12.00	14.9	-36.5
0.30	14.0	-37.4	13.00	14.8	-36.7
0.40	14.0	-37.4	14.00	14.7	-36.8
0.50	14.2	-37.2	15.00	14.6	-36.9
0.60	14.2	-37.2	16.00	14.6	-36.9
0.70	14.2	-37.2	17.00	14.6	-36.8
0.80	14.2	-37.2	18.00	14.8	-36.7
0.90	14.3	-37.2	19.00	14.9	-36.5
1.00	14.5	-36.9	20.00	14.9	-36.5
2.00	14.6	-36.9	21.00	14.7	-36.8
3.00	14.6	-36.9	22.00	14.3	-37.2
4.00	14.7	-36.8	23.00	13.8	-37.6
5.00	14.6	-36.8	24.00	13.4	-38.1
6.00	14.6	-36.9	25.00	13.1	-38.4
7.00	14.6	-36.9	26.00	13.0	-38.5
8.00	14.6	-36.8	27.00	13.1	-38.4
9.00	14.6	-36.9	28.00	13.2	-38.3
10.00	14.9	-36.6	30.00	13.0	-38.4


Brea Division
 114 Olinda Drive
 Brea, CA 92823
 (714) 579-0500

Newbury Park
 1050 Lawrence Dr.
 Newbury Park, CA 91320
 (818) 597-0600

Lake Forest Division
 20621 Pascal Way
 Lake Forest, CA 92630
 (949) 587-0400

COM-POWER AC-220

LAB R - COMBILOG ANTENNA

ASSET#: 5511

CALIBRATION DUE: MARCH 12, 2020

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
30	22.5	180	15.0
35	22.5	200	14.6
40	23.0	250	16.5
45	21.5	300	18.1
50	21.3	350	15.6
60	18.2	400	19.4
70	13.2	500	20.6
80	11.6	600	21.6
90	11.9	700	23.7
100	12.6	800	26.0
120	15.1	900	26.6
140	15.2	1000	28.5
160	13.3		



COM-POWER AH-118
HORN ANTENNA
ASSET #: 5561
CALIBRATION DUE JANUARY 25, 2021

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
1000	23.85	9500	38.75
1500	25.34	10000	38.85
2000	28.02	10500	38.84
2500	28.87	11000	39.05
3000	30.01	11500	39.60
3500	30.70	12000	39.87
4000	31.64	12500	40.16
4500	32.85	13000	40.17
5000	34.25	13500	40.59
5500	34.61	14000	40.63
6000	35.02	14500	40.55
6500	35.43	15000	42.53
7000	36.68	15500	40.85
7500	37.52	16000	41.28
8000	37.91	16500	41.35
8500	37.60	17000	41.43
9000	37.91	17500	42.50
		18000	43.51



COM-POWER PAM-118A

1-18GHz - PREAMPLIFIER

Asset# 5466

CALIBRATION DUE: JANUARY 28, 2020


FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
500	39.72	6000	41.30
600	39.79	6500	41.26
700	40.15	7000	41.64
800	40.21	7500	42.12
900	39.96	8000	42.05
1000	40.36	8500	41.23
1250	40.62	9000	41.24
1500	40.79	9500	42.67
1750	41.02	10000	42.51
2000	41.33	10500	41.48
2250	41.51	11000	41.26
2500	41.72	11500	41.37
2750	42.00	12000	41.45
3000	42.29	12500	40.97
3250	42.47	13000	40.60
3500	42.58	13500	40.32
3750	42.65	14000	40.44
4000	42.66	14500	40.79
4250	42.51	15000	40.89
4500	42.31	15500	41.36
4750	42.16	16000	41.39
5000	42.01	16500	41.09
5250	41.84	17000	40.37
5500	41.72	17500	39.70
5750	41.53	18000	39.63



Brea Division
 114 Olinda Drive
 Brea, CA 92823
 (714) 579-0500

Newbury Park
 1050 Lawrence Dr.
 Newbury Park, CA 91320
 (818) 597-0600

Lake Forest Division
 20621 Pascal Way
 Lake Forest, CA 92630
 (949) 587-0400

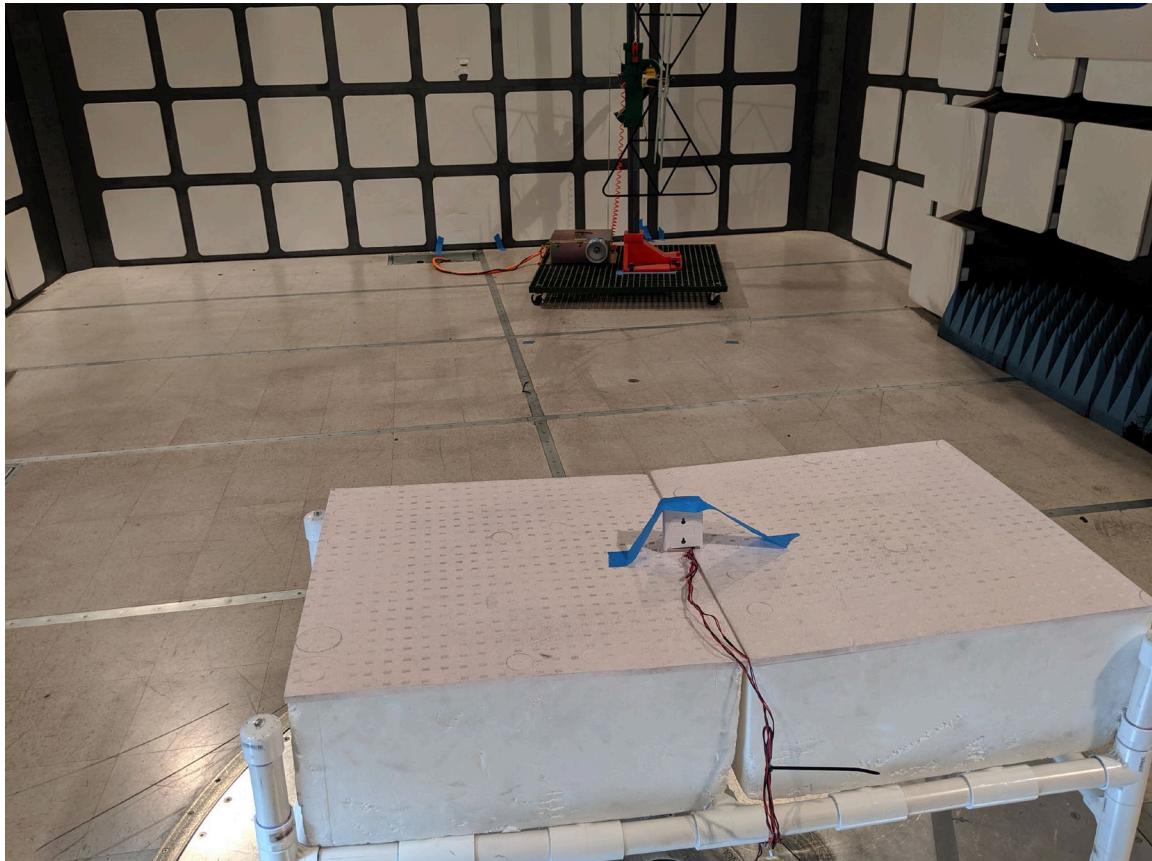

**NORTEK SECURITY & CONTROL LLC
WIRELESS ZONE ADAPTOR
MODEL: 2GIG-TAKE1e-345
FCC SUBPART C - RADIATED EMISSIONS < 1GHZ**

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Newbury Park
1050 Lawrence Dr.
Newbury Park, CA 91320
(818) 597-0600

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400



NORTEK SECURITY & CONTROL LLC
WIRELESS ZONE ADAPTOR
MODEL: 2GIG-TAKE1e-345
FCC SUBPART C - RADIATED EMISSIONS > 1GHZ

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Newbury Park
1050 Lawrence Dr.
Newbury Park, CA 91320
(818) 597-0600

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

APPENDIX E***RADIATED EMISSIONS DATA SHEETS***

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Newbury Park
1050 Lawrence Dr.
Newbury Park, CA 91320
(818) 597-0600

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

FUNDAMENTAL & HARMONICS***DATA SHEETS***

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Newbury Park
1050 Lawrence Dr.
Newbury Park, CA 91320
(818) 597-0600

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

FUNDAMENTAL & HARMONIC FIELD STRENGTH

FCC 15.231														
Date: 6/25/2019														
Wireless Zone Adaptor					DC %	12.41%	Test Engineer: Sam Kerckhoff							
Model: 2GIG-TAKE1e-345					DC Correction	-18.13								
FCC ID: WDQ-TAK1345														
Fundamental / Harmonics - Low Channel														
Transmit Mode					Y-Axis									
Freq. (MHz)	Pk Level (dBuV/m)	Avg. Level (dBuV/m)	Pol (v/h)	Pk Limit	Avg. Limit	Pk Margin	Avg. Margin	Tower Height (cm)	Table Angle (degrees)	Comments				
345.00	88.25	70.12	V	97.26	77.26	-9.01	-7.14	102.00	69.00	Y-axis				
345.00	71.52	53.39	H	97.26	77.26	-25.74	-23.87	110.86	248.00	(dBuV/m original peak)				
690.00			V	77.26	57.26					No Emissions Found				
690.00			H	77.26	57.26					No Emissions Found				
1035.00	50.52	32.39	V	73.97	53.97	-23.45	-21.58	133.97	94.00					
1035.00	45.99	27.86	H	73.97	53.97	-27.98	-26.11	99.28	185.00					
1380.00	48.51	30.38	V	73.97	53.97	-25.46	-23.59	120.00	0.00	Peak less than average limit				
1380.00	39.44	21.31	H	73.97	53.97	-34.53	-32.66	100.00	100.00	Peak less than average limit				
1725.00	52.53	34.40	V	77.26	57.26	-24.73	-22.86	99.70	30.00					
1725.00			H	77.26	57.26					No Emissions Found				
2070.00	59.79	41.66	V	77.26	57.26	-17.47	-15.60	21.25	100.00					
2070.00	53.13	35.00	H	77.26	57.26	-24.13	-22.26	100.00	310.00	Peak less than average limit				
2415.00	55.97	37.84	V	77.26	57.26	-21.29	-19.42	192.00	115.00	Peak less than average limit				
2415.00	51.42	33.29	H	77.26	57.26	-25.84	-23.97	101.00	20.75	Peak less than average limit				
2760.00	48.21	30.08	V	73.97	53.97	-25.76	-23.89	155.00	26.00	Peak less than average limit				
2760.00	46.27	28.14	H	73.97	53.97	-27.70	-25.83	142.00	250.00	Peak less than average limit				
3105.00	53.36	35.23	V	77.26	57.26	-23.90	-22.03	120.00	295.00	Peak less than average limit				
3105.00	49.75	31.62	H	77.26	57.26	-27.51	-25.64	118.00	230.00	Peak less than average limit				
3450.00	45.56	27.43	V	77.26	57.26	-31.70	-29.83	104.00	160.00	Peak less than average limit				
3450.00	44.31	26.18	H	77.26	57.26	-32.95	-31.08	100.00	57.00	Peak less than average limit				
														



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Newbury Park
1050 Lawrence Dr.
Newbury Park, CA 91320
(818) 597-0600

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

DUTY CYCLE

FCC 15.231

Company: Nortek Security & Control Date: 6/20/2019
 EUT: 2GIG-TAKE1e-345 Lab: R
 FCC ID: WDQ-TAK1345 Test
 ENG: Sam Kerckhoff


One Period (ms)	Pulse 1 (ms)	Pulse 1 (count)	Pulse 2 (ms)	Pulse 2 (count)	Duty Cycle	correction
100	0.2669	19	0.1467	50	12.41%	-18.13



Brea Division
 114 Olinda Drive
 Brea, CA 92823
 (714) 579-0500

Newbury Park
 1050 Lawrence Dr.
 Newbury Park, CA 91320
 (818) 597-0600

Lake Forest Division
 20621 Pascal Way
 Lake Forest, CA 92630
 (949) 587-0400

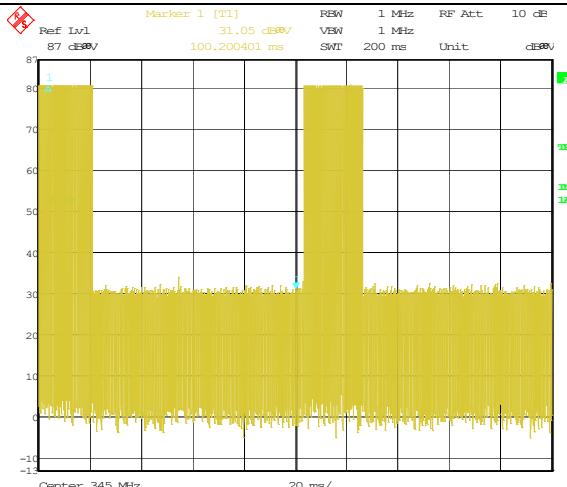

Date: 14.JUN.2019 14:26:02

Figure 1 Pulse Train >100ms

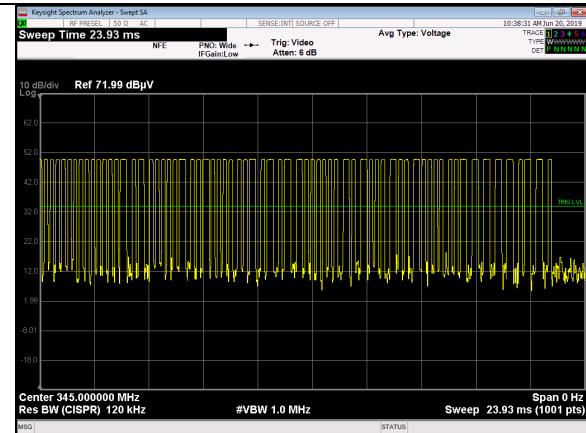


Figure 2 Sum by Pulse Type

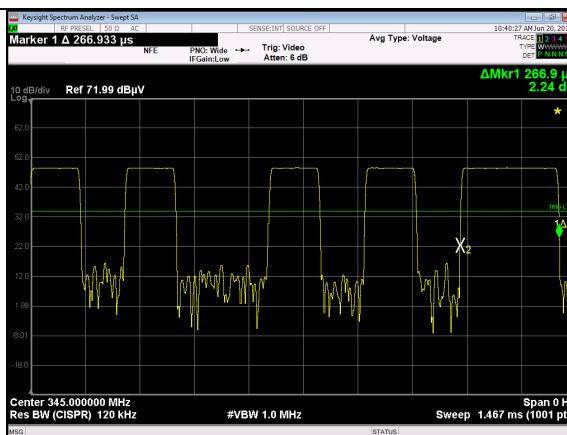


Figure 3 Large Pulse Duration (RED)

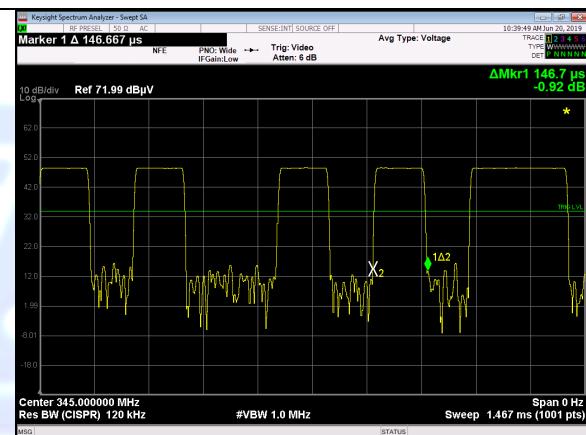


Figure 4 Small Pulse Duration (BLACK)

Brea Division
 114 Olinda Drive
 Brea, CA 92823
 (714) 579-0500

Newbury Park
 1050 Lawrence Dr.
 Newbury Park, CA 91320
 (818) 597-0600

Lake Forest Division
 20621 Pascal Way
 Lake Forest, CA 92630
 (949) 587-0400


***-20 dB & Occupied Bandwidth
DATA***



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Newbury Park
1050 Lawrence Dr.
Newbury Park, CA 91320
(818) 597-0600

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400




-20dB & 99% BANDWIDTHS

FCC 15.231

Company: Nortek
 EUT: Wireless Zone Adaptor
 Model: 2GIG-TAKE1e-345

Date: 6/20/19
 Lab: R
 Tested By: Sam Kerckhoff

Freq. (MHz)	Bandwidth (kHz)	Limit (kHz)		Comments
345.00	34.57	862.50		-20dB
345.00	625.91	862.50		99%

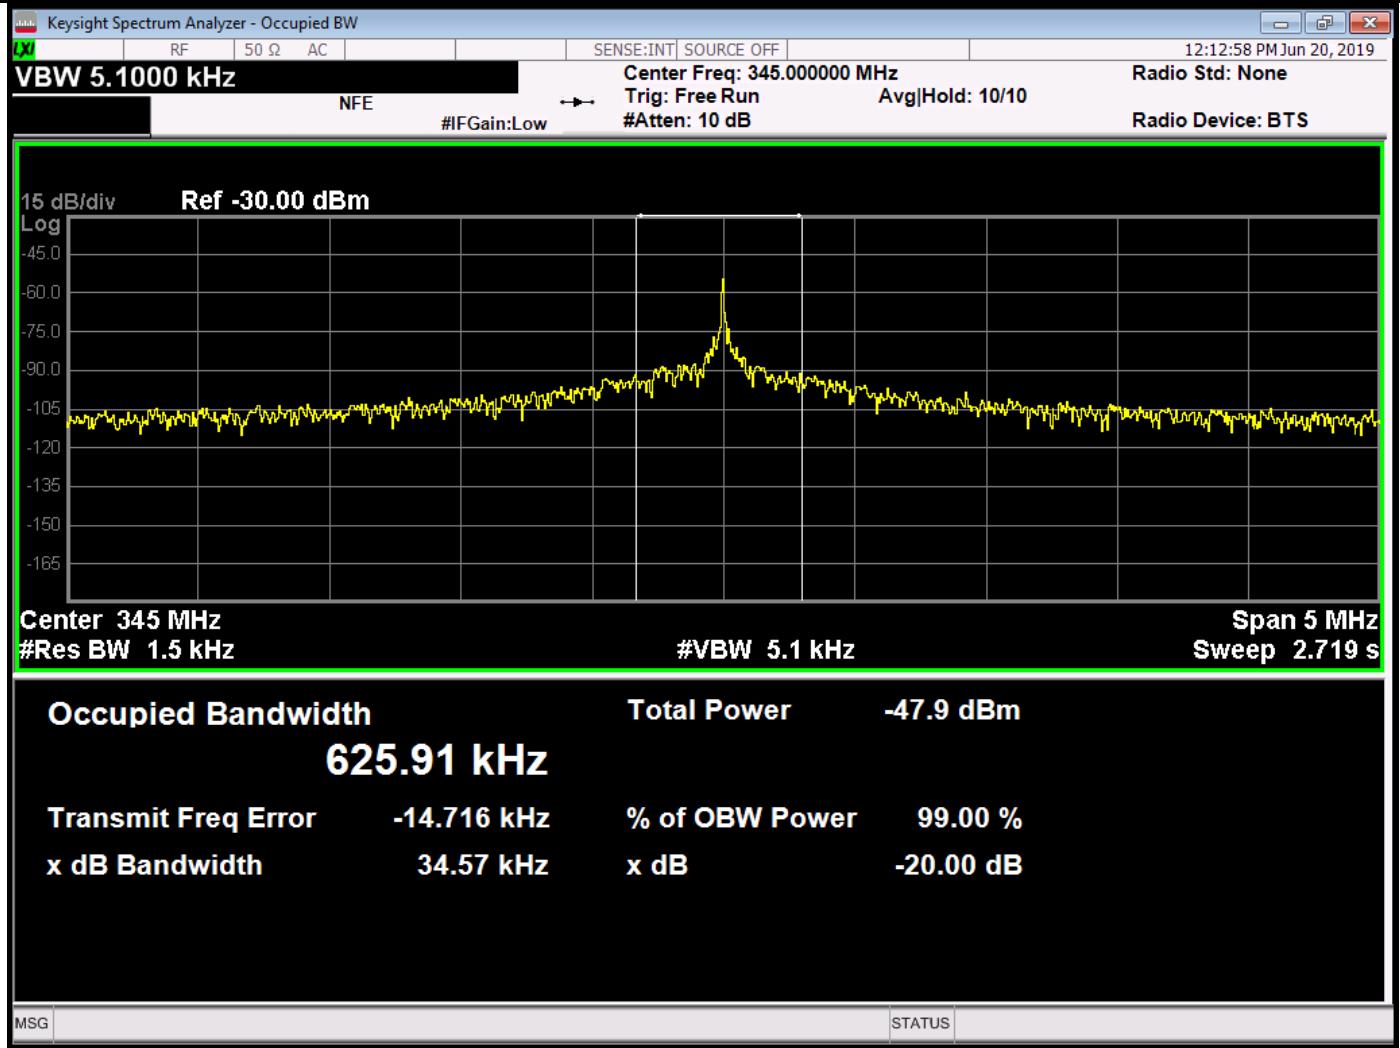

Brea Division
 114 Olinda Drive
 Brea, CA 92823
 (714) 579-0500

Newbury Park
 1050 Lawrence Dr.
 Newbury Park, CA 91320
 (818) 597-0600

Lake Forest Division
 20621 Pascal Way
 Lake Forest, CA 92630
 (949) 587-0400

