

FCC TEST REPORT (FOR WIRELESS LAN)

REPORT NO.: RF970611L05

MODEL NO.: Atrust t100

RECEIVED: Jun. 11, 2008

TESTED: Jun. 19 ~ Jul. 02, 2008

ISSUED: Jul. 03, 2008

APPLICANT: A-TRUST computer company

ADDRESS: 3F., No. 361, Fusing 1st Rd., Gueishan Township,

Taoyuan County 333, Taiwan (R.O.C)

ISSUED BY: Advance Data Technology Corporation

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou Hsiang

244, Taipei Hsien, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd., Wen Hwa Tsuen, Kwei

Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This test report consists of 64 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by TAF, A2LA or any government agencies. The test results in the report only apply to the tested sample.



Report No.: RF970611L05 1 Report Format Version 2.1.1



TABLE OF CONTENTS

1.	CERTIFICATION	4
2.	SUMMARY OF TEST RESULTS	5
2.1	MEASUREMENT UNCERTAINTY	5
3.	GENERAL INFORMATION	6
3.1	GENERAL DESCRIPTION OF EUT	6
3.2	DESCRIPTION OF TEST MODES	8
3.2.1	CONFIGURATION OF SYSTEM UNDER TEST	8
3.2.2	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	9
3.3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	11
3.3.4	DESCRIPTION OF SUPPORT UNITS	11
4.	TEST TYPES AND RESULTS	12
4.1	RADIATED EMISSION MEASUREMENT	12
4.1.1	LIMITS OF RADIATED EMISSION MEASUREMENT	12
4.1.2	TEST INSTRUMENTS	13
4.1.3	TEST PROCEDURES	14
4.1.4	DEVIATION FROM TEST STANDARD	14
4.1.5	TEST SETUP	15
4.1.6	EUT OPERATING CONDITIONS	15
4.1.7	TEST RESULTS	16
4.2	CONDUCTED EMISSION MEASUREMENT	26
4.2.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	26
4.2.2	TEST INSTRUMENTS	26
4.2.3	TEST PROCEDURES	27
4.2.4	DEVIATION FROM TEST STANDARD	27
4.2.5	TEST SETUP	28
4.2.6	EUT OPERATING CONDITIONS	28
4.2.7	TEST RESULTS	29
4.3	6dB BANDWIDTH MEASUREMENT	37
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	37
4.3.2	TEST INSTRUMENTS	37
4.3.3	TEST PROCEDURE	37
4.3.4	DEVIATION FROM TEST STANDARD	37
4.3.5	TEST SETUP	38
4.3.6	EUT OPERATING CONDITIONS	38
4.3.7	TEST RESULTS	39



4.4	MAXIMUM PEAK OUTPUT POWER	43
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	43
4.4.2	TEST INSTRUMENTS	43
4.4.3	TEST PROCEDURES	44
4.4.4	DEVIATION FROM TEST STANDARD	44
4.4.5	TEST SETUP	44
4.4.6	EUT OPERATING CONDITIONS	44
4.4.7	TEST RESULTS	45
4.5	POWER SPECTRAL DENSITY MEASUREMENT	46
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	46
4.5.2	TEST INSTRUMENTS	46
4.5.3	TEST PROCEDURE	46
4.5.4	DEVIATION FROM TEST STANDARD	46
4.5.5	TEST SETUP	47
4.5.6	EUT OPERATING CONDITION	47
4.5.7	TEST RESULTS	48
4.6	BAND EDGES MEASUREMENT	52
4.6.1	LIMITS OF BAND EDGES MEASUREMENT	52
4.6.2	TEST INSTRUMENTS	52
4.6.3	TEST PROCEDURE	52
4.6.4	DEVIATION FROM TEST STANDARD	52
4.6.5	EUT OPERATING CONDITION	52
4.6.6	TEST RESULTS	53
4.7	ANTENNA REQUIREMENT	61
4.7.1	STANDARD APPLICABLE	61
4.7.2	ANTENNA CONNECTED CONSTRUCTION	61
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION	62
6.	INFORMATION ON THE TESTING LABORATORIES	63
7.	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING	
	CHANGES TO THE EUT BY THE LAB	64



1. CERTIFICATION

PRODUCT: Thin Client

BRAND: Atrust

MODEL: Atrust t100

APPLICANT: A-TRUST computer company

TESTED: Jun. 19 ~ Jul. 02, 2008

TEST SAMPLE: ENGINEERING SAMPLE

STANDARDS: FCC Part 15, Subpart C (Section 15.247)

ANSI C63.4-2003

The above equipment (model: Atrust t100) has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Peggy Chen / Specialist

ACCEPTANCE: Long Cheh , DATE: Jul. 03, 2008

Responsible for RF Long Che 1/2 Senior Engineer

APPROVED BY: Jul. 03, 2008

Gary Chang / Assistant Manager



2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

	APPLIED STANDARD: FCC Part 15, Subpart C								
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK						
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is –9.43dB at 0.185MHz.						
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit						
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit						
15.247(d)	Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is –1.08dB at 2483.5MHz.						
15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit						
15.247(d)	Band Edge Measurement Limit: 20dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit						

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY		
Conducted emissions	9kHz ~ 30MHz	2.44 dB		
	30MHz ~ 200MHz	3.19 dB		
Radiated emissions	200MHz ~1000MHz	3.21 dB		
Radiated emissions	1GHz ~ 18GHz	2.26 dB		
	18GHz ~ 40GHz	1.94 dB		

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

EUT	Thin Client
MODEL NO.	Atrust t100
FCC ID	WF6ATRUST-T100
POWER SUPPLY	12.0Vdc from power adapter
- GWEN GOLLET	9.5Vdc from power adapter
MODULATION TYPE	Wireless LAN: CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM Bluetooth: GFSK, π /4-DQPSK, 8DPSK
MODULATION TECHNOLOGY	DSSS, OFDM, FHSS
TRANSFER RATE	Wireless LAN: 802.11b:11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6Mbps Bluetooth: 1/2/3Mbps
FREQUENCY RANGE	2400 ~ 2483.5MHz
NUMBER OF CHANNEL	Wireless LAN: 11 Bluetooth: 79
CHANNEL SPACING	Wireless LAN: 5MHz Bluetooth: 1MHz
OUTPUT POWER	Wireless LAN: 65.013mW Bluetooth: 2.023mW
ANTENNA TYPE	Wireless LAN: PIFA antenna with 1.36dBi gain Bluetooth: Printed antenna with -3.95dBi gain
DATA CABLE	NA
I/O PORTS	Refer to user's manual
ACCESSORY DEVICES	Adapter



NOTE:

1. The EUT is a Thin Client. The functions of EUT listed as below:

	TEST STANDARD	REFERENCE REPORT	
WLAN 802.11b/g	FCC Part 15	RF970611L05	
BLUETOOTH	1 00 1 att 13	RF970611L05-1	

2. The EUT was operated with following power adapters:

Adapter 1	Adapter 1						
BRAND: LI SHIN INTERNATIONAL ENTERPRISE CORP.							
MODEL: 0225A1236							
INPUT: 100-240Vac, 1.5A, 50-60Hz							
OUTPUT: 12Vdc, 3A							
POWER LINE:	AC: 0.7m non-shielded cable without core DC: 1.8m non-shielded cable with one core						

Adapter 2					
BRAND:	PIE				
MODEL:	AD59230				
INPUT:	100-240Vac, 680mA, 50/60Hz				
OUTPUT:	9.5Vdc, 2.315A				
POWER LINE:	3.0m non-shielded cable without core				

3. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.




3.2 DESCRIPTION OF TEST MODES

11 channels are provided to the EUT:

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	3 2422 MHz 9		2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

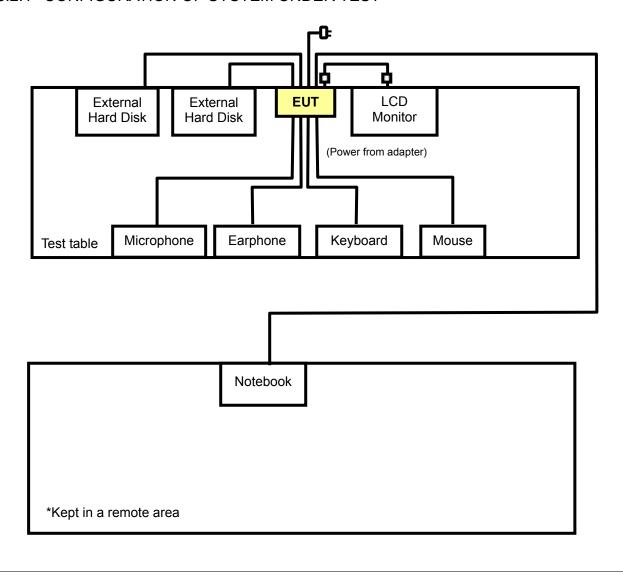



3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE		APPLICA	ABLE TO		DESCR	IPTION
MODE	RE≥1G	RE<1G	PLC	APCM	RAM	Adapter Model
Α	-	V	V	-	50	0225A1236
В	V	V	V	V	5G	AD59230
С	-	V	V	-	200	0225A1236
D	-	√	V	-	8G	AD59230

Where

PLC: Power Line Conducted Emission

RE≥1G: Radiated Emission above 1GHz

RE<1G: Radiated Emission below 1GHz

APCM: Antenna Port Conducted Measurement

NOTE: "-" means no effect.

RADIATED EMISSION TEST (ABOVE 1 GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	_	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	AXIS
В	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0	Х
В	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0	Х

RADIATED EMISSION TEST (BELOW 1 GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	AXIS
Α	802.11b	1 to 11	6	DSSS	DBPSK	1.0	Х
В	802.11b	1 to 11	6	DSSS	DBPSK	1.0	Х
С	802.11b	1 to 11	6	DSSS	DBPSK	1.0	Х
D	802.11b	1 to 11	6	DSSS	DBPSK	1.0	Х



POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
Α	802.11b	1 to 11	6	DSSS	DBPSK	1.0
В	802.11b	1 to 11	6	DSSS	DBPSK	1.0
С	802.11b	1 to 11	6	DSSS	DBPSK	1.0
D	802.11b	1 to 11	6	DSSS	DBPSK	1.0

BANDEDGE MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	_	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	AXIS
В	802.11b	1 to 11	1, 11	DSSS	DBPSK	1.0	Х
В	802.11g	1 to 11	1, 11	OFDM	BPSK	6.0	Х

ANTENNA PORT CONDUCTED MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
В	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
В	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0



3.3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)

ANSI C63.4- 2003

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	LCD Monitor	Samsung	173v	NA	NA
2	Keyboard	BTC	5200U	G09302046467	E5XKB5122U
3	Mouse	DELL	MO56UO	510026062	FCC DoC Approved
4	External Hard Disk	Terasys	F12-UF	A0100222-4A71007	FCC DoC Approved
5	External Hard Disk	Terasys	F12-UF	A0100222-4A60012	FCC DoC Approved
6	Earphone	PHILIPS	SBC HL125	NA	NA
7	Microphone	Labtec	LVA7313	NA	NA
8	Notebook	DELL	PP05L	12130898320	E2K24CLNS

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	1.8m shielded VGA cable with two cores.
2	1.5m foil shielded wire, USB Connector, w/o core.
3	1.8m foil shielded wire, USB Connector, w/o core.
4	1.5m shielded cable, terminated with USB connector, w/o core.
5	1.5m shielded cable, terminated with USB connector, w/o core.
6	1.2m wrapped shielded wire, terminated with 3.5mm phone plug via drain wire, w/o core.
7	1.0m wrapped shielded wire, terminated via drain wire, with 3.5 mm phone plug, w/o core.
8	10m RJ45 cable

NOTE: 1. All power cords of the above support units are non shielded (1.8m).

2. Item 8 act as a communication partner to transfer data.



4. TEST TYPES AND RESULTS

4.1 RADIATED EMISSION MEASUREMENT

4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

- 1. The lower limit shall apply at the transition frequencies.
- 2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
- 3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESI7	838496/016	Dec. 25, 2008
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100039	Dec. 02, 2008
BILOG Antenna SCHWARZBECK	VULB9168	9168-155	Jan. 03, 2009
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-405	Dec. 17, 2008
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170242	Jan. 06, 2009
Preamplifier Agilent	8449B	3008A01910	Sep. 19, 2008
Preamplifier Agilent	8447D	2944A10634	Dec. 12, 2008
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	274397/4	Nov. 07, 2008
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	283401/4	Nov. 07, 2008
Software ADT.	ADT_Radiated_V7.6	NA	NA
Antenna Tower inn-co GmbH	MA 4000	010303	NA
Antenna Tower Controller inn-co GmbH	CO2000	019303	NA
Turn Table ADT.	TT100.	TT93021704	NA
Turn Table Controller ADT.	SC100.	SC93021704	NA

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

- 2. The test was performed in HwaYa Chamber 4.
- 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
- 4. The FC Site Registration No. is 460141.
- 5. The IC Site Registration No. is IC3789B-4.



4.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using the peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE:


- 1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
- 2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
- 3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.
- 4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation



4.1.5 TEST SETUP

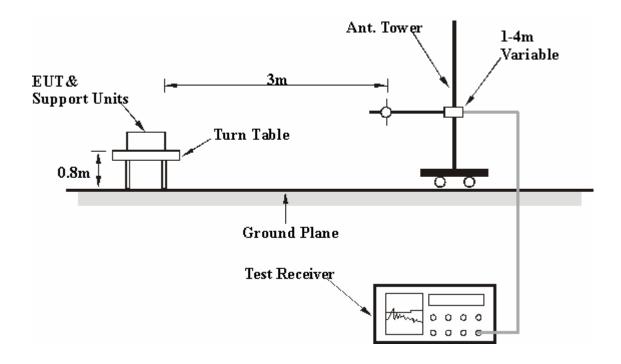

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT OPERATING CONDITIONS

- a. Placed the EUT on testing table.
- b. Prepared the notebook to act as communication partners and placed it outside of testing area.
- c. Connected the EUT to notebook via an RJ45 cable.
- d. The notebook system ran a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.
- e. The necessary accessories enable the system in full functions.



4.1.7 TEST RESULTS

802.11b DSSS MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz	
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)	
ENVIRONMENTAL CONDITIONS	23deg. C, 69%RH 1000hPa	TESTED BY	Lori Chiu	
TEST MODE	В			

	ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M												
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)					
1	2390.00	58.58 PK	74.00	-15.42	1.08 H	203	25.10	33.48					
2	2390.00	47.75 AV	54.00	-6.25	1.08 H	203	14.27	33.48					
3	*2412.00	97.07 PK			1.08 H	203	63.60	33.47					
4	*2412.00	92.67 AV			1.08 H	203	59.20	33.47					
5	4824.00	48.84 PK	74.00	-25.16	1.19 H	288	9.50	39.34					
6	4824.00	37.23 AV	54.00	-16.77	1.19 H	288	-2.11	39.34					
7	#7236.00	56.57 PK	77.07	-20.50	1.18 H	12	10.06	46.51					
8	#7236.00	44.51 AV	72.67	-28.16	1.18 H	12	-2.00	46.51					
		ANTENNA	POLARITY	& TEST DI	ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)					
NO .	FREQ. (MHz) 2390.00	LEVEL		MARGIN (dB) -15.61		ANGLE		FACTOR					
	, ,	LEVEL (dBuV/m)	(dBuV/m)	,	HEIGHT (m)	ANGLE (Degree)	(dBuV)	FACTOR (dB/m)					
1	2390.00	LEVEL (dBuV/m) 58.39 PK	(dBuV/m) 74.00	-15.61	HEIGHT (m) 1.11 V	ANGLE (Degree)	(dBuV) 24.91	FACTOR (dB/m) 33.48					
1 2	2390.00 2390.00	LEVEL (dBuV/m) 58.39 PK 48.00 AV	(dBuV/m) 74.00	-15.61	1.11 V 1.11 V	ANGLE (Degree) 119 119	(dBuV) 24.91 14.52	FACTOR (dB/m) 33.48 33.48					
1 2 3	2390.00 2390.00 *2412.00	LEVEL (dBuV/m) 58.39 PK 48.00 AV 104.32 PK	(dBuV/m) 74.00	-15.61	1.11 V 1.11 V 1.11 V	ANGLE (Degree) 119 119 119	(dBuV) 24.91 14.52 70.85	FACTOR (dB/m) 33.48 33.48 33.47					
1 2 3 4	2390.00 2390.00 *2412.00 *2412.00	LEVEL (dBuV/m) 58.39 PK 48.00 AV 104.32 PK 99.86 AV	(dBuV/m) 74.00 54.00	-15.61 -6.00	1.11 V 1.11 V 1.11 V 1.11 V 1.11 V	ANGLE (Degree) 119 119 119 119	(dBuV) 24.91 14.52 70.85 66.39	FACTOR (dB/m) 33.48 33.48 33.47 33.47					
1 2 3 4 5	2390.00 2390.00 *2412.00 *2412.00 4824.00	LEVEL (dBuV/m) 58.39 PK 48.00 AV 104.32 PK 99.86 AV 49.78 PK	(dBuV/m) 74.00 54.00 74.00	-15.61 -6.00	1.11 V 1.11 V 1.11 V 1.11 V 1.11 V 1.08 V	ANGLE (Degree) 119 119 119 119 119 119	(dBuV) 24.91 14.52 70.85 66.39 10.44	FACTOR (dB/m) 33.48 33.48 33.47 33.47 39.34					
1 2 3 4 5	2390.00 2390.00 *2412.00 *2412.00 4824.00 4824.00	LEVEL (dBuV/m) 58.39 PK 48.00 AV 104.32 PK 99.86 AV 49.78 PK 41.46 AV	(dBuV/m) 74.00 54.00 74.00 54.00	-15.61 -6.00 -24.22 -12.54	1.11 V 1.11 V 1.11 V 1.11 V 1.11 V 1.08 V 1.08 V	ANGLE (Degree) 119 119 119 119 119 13 13	(dBuV) 24.91 14.52 70.85 66.39 10.44 2.12	FACTOR (dB/m) 33.48 33.48 33.47 33.47 39.34 39.34					
1 2 3 4 5 6	2390.00 2390.00 *2412.00 *2412.00 4824.00 4824.00 #7236.00	LEVEL (dBuV/m) 58.39 PK 48.00 AV 104.32 PK 99.86 AV 49.78 PK 41.46 AV 57.22 PK	74.00 54.00 74.00 54.00 54.00 84.32	-15.61 -6.00 -24.22 -12.54 -27.10	1.11 V 1.11 V 1.11 V 1.11 V 1.08 V 1.08 V 1.04 V	ANGLE (Degree) 119 119 119 119 119 13 13 213	(dBuV) 24.91 14.52 70.85 66.39 10.44 2.12 10.71	FACTOR (dB/m) 33.48 33.47 33.47 39.34 39.34 46.51					

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).

2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).

3. The other emission levels were very low against the limit.

4. Margin value = Emission level – Limit value.

5. " * ": Fundamental frequency.

6. " # ": The radiated frequency is out the restricted band.



EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz	
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)	
ENVIRONMENTAL CONDITIONS	23deg. C, 69%RH 1000hPa	TESTED BY	Lori Chiu	
TEST MODE	В			

	ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)	
1	*2437.00	96.66 PK			1.06 H	146	63.19	33.47	
2	*2437.00	91.58 AV			1.06 H	146	58.11	33.47	
3	4874.00	48.61 PK	74.00	-25.39	1.35 H	160	9.16	39.45	
4	4874.00	37.93 AV	54.00	-16.07	1.35 H	160	-1.52	39.45	
5	7311.00	57.12 PK	74.00	-16.88	1.00 H	239	10.48	46.64	
6	7311.00	45.69 AV	54.00	-8.31	1.00 H	239	-0.95	46.64	
	ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)	
NO .	FREQ. (MHz) *2437.00	LEVEL		MARGIN (dB)	ANTENNA	TABLE ANGLE	RAW VALUE	FACTOR	
	, ,	LEVEL (dBuV/m)		MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	FACTOR (dB/m)	
1	*2437.00	LEVEL (dBuV/m) 103.82 PK		MARGIN (dB) -24.37	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	FACTOR (dB/m) 33.47	
1 2	*2437.00 *2437.00	LEVEL (dBuV/m) 103.82 PK 99.37 AV	(dBuV/m)		ANTENNA HEIGHT (m) 1.12 V 1.12 V	TABLE ANGLE (Degree) 144 144	RAW VALUE (dBuV) 70.35 65.90	FACTOR (dB/m) 33.47 33.47	
1 2 3	*2437.00 *2437.00 4874.00	LEVEL (dBuV/m) 103.82 PK 99.37 AV 49.63 PK	(dBuV/m) 74.00	-24.37	ANTENNA HEIGHT (m) 1.12 V 1.12 V 1.10 V	TABLE ANGLE (Degree) 144 144 136	RAW VALUE (dBuV) 70.35 65.90 10.18	FACTOR (dB/m) 33.47 33.47 39.45	
1 2 3 4	*2437.00 *2437.00 4874.00 4874.00	LEVEL (dBuV/m) 103.82 PK 99.37 AV 49.63 PK 40.49 AV	(dBuV/m) 74.00 54.00	-24.37 -13.51	ANTENNA HEIGHT (m) 1.12 V 1.12 V 1.10 V 1.10 V	TABLE ANGLE (Degree) 144 144 136 136	RAW VALUE (dBuV) 70.35 65.90 10.18 1.04	FACTOR (dB/m) 33.47 33.47 39.45 39.45	
1 2 3 4 5	*2437.00 *2437.00 4874.00 4874.00 7311.00	LEVEL (dBuV/m) 103.82 PK 99.37 AV 49.63 PK 40.49 AV 58.03 PK	74.00 54.00 74.00	-24.37 -13.51 -15.97	ANTENNA HEIGHT (m) 1.12 V 1.12 V 1.10 V 1.10 V 1.05 V	TABLE ANGLE (Degree) 144 144 136 136 31	70.35 65.90 10.18 1.04 11.39	FACTOR (dB/m) 33.47 33.47 39.45 39.45 46.64	

- 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
- 3. The other emission levels were very low against the limit.
- 4. Margin value = Emission level Limit value.
- 5. " * ": Fundamental frequency.
- 6. "#": The radiated frequency is out the restricted band.



EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz	
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)	
ENVIRONMENTAL CONDITIONS	23deg. C, 69%RH 1000hPa	TESTED BY	Lori Chiu	
TEST MODE	В			

		ANTENNA	POLARITY	& TEST DIS	ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)					
1	*2462.00	96.87 PK			1.10 H	256	63.40	33.47					
2	*2462.00	91.39 AV			1.10 H	256	57.92	33.47					
3	2483.50	59.62 PK	74.00	-14.38	1.10 H	256	26.15	33.47					
4	2483.50	48.36 AV	54.00	-5.64	1.10 H	256	14.89	33.47					
5	4924.00	48.32 PK	74.00	-25.68	1.00 H	103	8.72	39.60					
6	4924.00	38.69 AV	54.00	-15.31	1.00 H	103	-0.91	39.60					
7	7386.00	57.63 PK	74.00	-16.37	1.02 H	269	10.89	46.74					
8	7386.00	46.53 AV	54.00	-7.47	1.02 H	269	-0.21	46.74					
		ANTENNA	POLARITY	/ & TEST DI	STANCE: V	ERTICAL A	T 3 M						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)					
1	*2462.00	103.69 PK			1.39 V	146	70.22	33.47					
2	*2462.00												
	2402.00	99.03 AV			1.39 V	146	65.56	33.47					
3	2483.50	99.03 AV 61.74 PK	74.00	-12.26	1.39 V 1.40 V	146 140	65.56 28.27	33.47 33.47					
3			74.00 54.00	-12.26 -3.34									
	2483.50	61.74 PK			1.40 V	140	28.27	33.47					
4	2483.50 2483.50	61.74 PK 50.66 AV	54.00	-3.34	1.40 V 1.40 V	140 140	28.27 17.19	33.47 33.47					
4	2483.50 2483.50 4924.00	61.74 PK 50.66 AV 49.01 PK	54.00 74.00	-3.34 -24.99	1.40 V 1.40 V 1.19 V	140 140 49	28.27 17.19 9.41	33.47 33.47 39.60					
4 5 6	2483.50 2483.50 4924.00 4924.00	61.74 PK 50.66 AV 49.01 PK 39.30 AV	54.00 74.00 54.00	-3.34 -24.99 -14.70	1.40 V 1.40 V 1.19 V 1.19 V	140 140 49 49	28.27 17.19 9.41 -0.30	33.47 33.47 39.60 39.60					
4 5 6 7	2483.50 2483.50 4924.00 4924.00 7386.00	61.74 PK 50.66 AV 49.01 PK 39.30 AV 58.19 PK	54.00 74.00 54.00 74.00	-3.34 -24.99 -14.70 -15.81	1.40 V 1.40 V 1.19 V 1.19 V 1.54 V	140 140 49 49 230	28.27 17.19 9.41 -0.30 11.45	33.47 33.47 39.60 39.60 46.74					

- 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
- 3. The other emission levels were very low against the limit.
- 4. Margin value = Emission level Limit value.
- 5. " * ": Fundamental frequency.
- 6. "#": The radiated frequency is out the restricted band.



802.11g OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz	
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)	
ENVIRONMENTAL CONDITIONS	23deg. C, 69%RH 1000hPa	TESTED BY	Lori Chiu	
TEST MODE	В			

		ANTENNA	POLARITY	& TEST DIS	TANCE: HO	RIZONTAL	AT 3 M	
NO.	FREQ. (MHz)	EMISSION	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	59.99 PK	74.00	-14.01	1.05 H	212	26.51	33.48
2	2390.00	48.86 AV	54.00	-5.14	1.05 H	212	15.38	33.48
3	*2412.00	100.11 PK			1.05 H	212	66.64	33.47
4	*2412.00	89.24 AV			1.05 H	212	55.77	33.47
5	4824.00	47.26 PK	74.00	-26.74	1.12 H	316	7.92	39.34
6	4824.00	34.57 AV	54.00	-19.43	1.12 H	316	-4.77	39.34
		ANTENNA	POLARITY	/ & TEST DI	STANCE: V	ERTICAL A	T 3 M	
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	64.86 PK	74.00	-9.14	1.12 V	117	31.38	33.48
2	2390.00	51.05 AV	54.00	-2.95	1.12 V	117	17.57	33.48
3	*2412.00	104.99 PK			1.16 V	147	71.52	33.47
4	*2412.00	94.23 AV			1.16 V	147	60.76	33.47
5	4824.00	48.90 PK	74.00	-25.10	1.02 V	96	9.56	39.34
6	4824.00	35.68 AV	54.00	-18.32	1.02 V	96	-3.66	39.34

- 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
- 3. The other emission levels were very low against the limit.
- 4. Margin value = Emission level Limit value.
- 5. " * ": Fundamental frequency.



EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz	
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)	
ENVIRONMENTAL CONDITIONS	23deg. C, 69%RH 1000hPa	TESTED BY	Lori Chiu	
TEST MODE	В			

		ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)		
1	*2437.00	99.89 PK			1.09 H	24	66.42	33.47		
2	*2437.00	89.14 AV			1.09 H	24	55.67	33.47		
3	4874.00	47.41 PK	74.00	-26.59	1.30 H	206	7.96	39.45		
4	4874.00	34.60 AV	54.00	-19.40	1.30 H	206	-4.85	39.45		
		ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
	NO. FREQ. (MHz) EMISSION LEVEL LIMIT (dBuV/m) MARGIN (dB) ANTENNA HEIGHT (m) TABLE RAW VALUE (dBuV) FACTOR									
NO.	FREQ. (MHz)	EMISSION LEVEL	LIMIT		ANTENNA	TABLE	RAW VALUE	CORRECTION FACTOR (dB/m)		
NO .	FREQ. (MHz) *2437.00	EMISSION LEVEL	LIMIT		ANTENNA	TABLE ANGLE	RAW VALUE	FACTOR		
NO. 1	` ,	EMISSION LEVEL (dBuV/m)	LIMIT		ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	FACTOR (dB/m)		
1	*2437.00	EMISSION LEVEL (dBuV/m) 104.65 PK	LIMIT		ANTENNA HEIGHT (m)	TABLE ANGLE (Degree) 279	RAW VALUE (dBuV)	FACTOR (dB/m) 33.47		

- 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
- 3. The other emission levels were very low against the limit.
- 4. Margin value = Emission level Limit value.
- 5. " * ": Fundamental frequency.



EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz	
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)	
ENVIRONMENTAL CONDITIONS	23deg. C, 69%RH 1000hPa	TESTED BY	Lori Chiu	
TEST MODE	В			

		ANTENNA	POLARITY	& TEST DIS	TANCE: HO	RIZONTAL	AT 3 M	
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	99.26 PK			1.06 H	310	65.79	33.47
2	*2462.00	88.58 AV			1.06 H	310	55.11	33.47
3	2483.50	60.21 PK	74.00	-13.79	1.06 H	310	26.74	33.47
4	2483.50	49.33 AV	54.00	-4.67	1.06 H	310	15.86	33.47
5	4924.00	47.53 PK	74.00	-26.47	1.24 H	189	7.93	39.60
6	4924.00	34.69 AV	54.00	-19.31	1.24 H	189	-4.91	39.60
		ANTENNA	POLARIT	/ & TEST DI	STANCE: V	ERTICAL A	T 3 M	
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	104.37 PK			1.38 V	144	70.90	33.47
2	*2462.00	93.73 AV			1.38 V	144	60.26	33.47
3	2483.50	66.72 PK	74.00	-7.28	1.33 V	131	33.25	33.47
4	2483.50	52.92 AV	54.00	-1.08	1.33 V	131	19.45	33.47
5	4924.00	49.35 PK	74.00	-24.65	1.01 V	130	9.75	39.60
6	4924.00	36.50 AV	54.00	-17.50	1.01 V	130	-3.10	39.60

- 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
- 3. The other emission levels were very low against the limit.
- 4. Margin value = Emission level Limit value.
- 5. " * ": Fundamental frequency.



BELOW 1GHz WORST-CASE DATA: 802.11b DSSS MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL	Channel 6	FREQUENCY RANGE	Below 1000MHz	
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak	
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH 1000hPa	TESTED BY	Mark Liao	
TEST MODE	Α			

	ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M									
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)		
1	30.00	32.30 QP	40.00	-7.70	2.00 H	157	19.73	12.57		
2	59.06	35.46 QP	40.00	-4.54	1.50 H	13	21.68	13.78		
3	173.78	29.84 QP	43.50	-13.66	1.50 H	301	16.31	13.53		
4	397.37	34.78 QP	46.00	-11.22	1.00 H	310	17.54	17.24		
5	475.14	35.39 QP	46.00	-10.61	1.50 H	220	15.64	19.74		
6	875.67	33.24 QP	46.00	-12.76	1.00 H	316	5.53	27.71		
	=	ANTENNA	POLARITY	/ & TEST DI	STANCE: V	ERTICAL A	T 3 M	_		
NO.		EMISSION				TABLE		CORRECTION		
NO.	FREQ. (MHz)	LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	ANGLE (Degree)	RAW VALUE (dBuV)	FACTOR (dB/m)		
1	FREQ. (MHz) 76.56	LEVEL		MARGIN (dB) -6.15	7	ANGLE		FACTOR		
	,	LEVEL (dBuV/m)	(dBuV/m)	Ì	HEIGHT (m)	ANGLE (Degree)	(dBuV)	FACTOR (dB/m)		
1	76.56	LEVEL (dBuV/m) 33.85 QP	(dBuV/m) 40.00	-6.15	HEIGHT (m)	ANGLE (Degree)	(dBuV) 22.52	FACTOR (dB/m) 11.32		
1	76.56 298.21	LEVEL (dBuV/m) 33.85 QP 29.42 QP	(dBuV/m) 40.00 46.00	-6.15 -16.58	1.00 V 1.50 V	ANGLE (Degree) 292 214	(dBuV) 22.52 14.68	FACTOR (dB/m) 11.32 14.74		
1 2 3	76.56 298.21 393.48	LEVEL (dBuV/m) 33.85 QP 29.42 QP 29.38 QP	(dBuV/m) 40.00 46.00 46.00	-6.15 -16.58 -16.62	1.00 V 1.50 V 1.50 V	ANGLE (Degree) 292 214 142	(dBuV) 22.52 14.68 12.24	FACTOR (dB/m) 11.32 14.74 17.14		

- 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
- 3. The other emission levels were very low against the limit.
- 4. Margin value = Emission level Limit value.



EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL	Channel 6	FREQUENCY RANGE	Below 1000MHz	
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak	
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH 1000hPa	TESTED BY	Mark Liao	
TEST MODE	В			

		ANTENNA	POLARITY	ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)				
1	30.00	34.14 QP	40.00	-5.86	2.00 H	172	21.57	12.57				
2	96.01	32.40 QP	43.50	-11.10	2.00 H	349	23.02	9.38				
3	195.16	33.51 QP	43.50	-9.99	1.25 H	157	21.88	11.63				
4	397.37	32.72 QP	46.00	-13.28	1.00 H	316	15.48	17.24				
5	475.14	36.31 QP	46.00	-9.69	1.50 H	235	16.56	19.74				
6	689.01	32.31 QP	46.00	-13.69	1.25 H	331	7.31	25.00				
		ANTENNA	POLARITY	/ & TEST DI	STANCE: V	ERTICAL A	T 3 M					
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)				
1	30.00	37.57 QP	40.00	-2.43	1.00 V	106	25.00	12.57				
2	76.56	32.34 QP	40.00	-7.66	1.00 V	109	21.01	11.32				
3	298.21	29.39 QP	46.00	-16.61	1.50 V	229	14.65	14.74				
4	344.87	28.49 QP	46.00	-17.51	1.25 V	16	12.57	15.92				
5	397.37	28.99 QP	46.00	-17.01	1.25 V	253	11.75	17.24				
								20.01				
6	564.58	29.11 QP	46.00	-16.89	1.00 V	7	6.87	22.24				

- 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
- 3. The other emission levels were very low against the limit.
- 4. Margin value = Emission level Limit value.



EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL	Channel 6	FREQUENCY RANGE	Below 1000MHz	
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak	
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH 1000hPa	TESTED BY	Match Tsui	
TEST MODE	С			

		ANTENNA	POLARITY	& TEST DIS	TANCE: HO	RIZONTAL	AT 3 M	
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	286.55	34.33 QP	46.00	-11.67	1.00 H	103	19.50	14.83
2	397.37	35.73 QP	46.00	-10.27	1.50 H	79	18.15	17.58
3	498.47	35.49 QP	46.00	-10.51	1.50 H	10	15.23	20.26
4	566.52	34.03 QP	46.00	-11.97	2.00 H	328	12.38	21.65
5	836.78	37.60 QP	46.00	-8.40	1.00 H	10	10.92	26.67
6	897.05	34.99 QP	46.00	-11.01	1.50 H	34	7.43	27.56
		ANTENNA	POLARITY	/ & TEST DI	STANCE: V	ERTICAL A	T 3 M	
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	564.58	30.05 QP	46.00	-15.95	1.00 V	148	8.45	21.60
2	601.52	30.11 QP	46.00	-15.89	1.00 V	328	7.62	22.49
3	624.85	32.46 QP	46.00	-13.54	1.00 V	163	9.44	23.02
4	751.23	33.32 QP	46.00	-12.68	1.50 V	139	7.67	25.65
5	875.67	35.69 QP	46.00	-10.31	1.50 V	37	8.40	27.29
						· · · · · · · · · · · · · · · · · · ·		

- 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
- 3. The other emission levels were very low against the limit.
- 4. Margin value = Emission level Limit value.



EUT TEST CONDITION		MEASUREMENT DETAIL			
CHANNEL Channel 6		FREQUENCY RANGE	Below 1000MHz		
INPUT POWER 120Vac, 60 Hz		DETECTOR FUNCTION	Quasi-Peak		
ENVIRONMENTAL CONDITIONS	5 ,		Match Tsui		
TEST MODE	D				

		ANTENNA	POLARITY	& TEST DIS	TANCE: HO	RIZONTAL	AT 3 M	
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	86.28	26.59 QP	40.00	-13.41	2.00 H	235	17.06	9.53
2	288.49	34.84 QP	46.00	-11.16	1.00 H	301	19.97	14.87
3	397.37	35.31 QP	46.00	-10.69	1.50 H	88	17.73	17.58
4	751.23	36.30 QP	46.00	-9.70	1.00 H	229	10.64	25.65
5	834.84	39.35 QP	46.00	-6.65	2.50 H	121	12.72	26.63
6	875.67	34.43 QP	46.00	-11.57	1.50 H	196	7.14	27.29
		ANTENNA	POLARITY	/ & TEST DI	STANCE: V	ERTICAL A	T 3 M	
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	53.23	29.60 QP	40.00	-10.40	1.50 V	340	14.99	14.61
2	88.23	31.95 QP	43.50	-11.55	1.50 V	151	22.74	9.21
3	140.72	30.22 QP	43.50	-13.28	1.00 V	157	16.44	13.78
4	298.21	32.29 QP	46.00	-13.71	2.00 V	331	17.19	15.10
5	393.48	35.86 QP	46.00	-10.14	1.00 V	43	18.38	17.49
6	624.85	32.19 QP	46.00	-13.81	1.50 V	142	9.17	23.02
7	875.67	33.59 QP	46.00	-12.41	1.00 V	172	6.30	27.29

- 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
- 3. The other emission levels were very low against the limit.
- 4. Margin value = Emission level Limit value.



4.2 CONDUCTED EMISSION MEASUREMENT

4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED	LIMIT (dBµV)
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

NOTE: 1. The lower limit shall apply at the transition frequencies.

- The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
- 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS30	100288	Sep. 21, 2008
RF signal cable Woken	5D-FB	Cable-HYCO3-01	Jan. 06, 2009
LISN ROHDE & SCHWARZ	ESH2-Z5	100100	Jan. 09, 2009
LISN SCHWARZBECK	ESH3-Z5	100311	Jan. 21, 2009
Software ADT	ADT_Cond_V3	NA	NA

- **NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 - 2. The test was performed in HwaYa Shielded Room 2.
 - 3. The VCCI Site Registration No. is C-2047.



4.2.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit 20dB) was not recorded.

121	DE\/IATION	FROM TEST	STANDARD
4/4			SIANUARU

No deviation



4.2.5 TEST SETUP

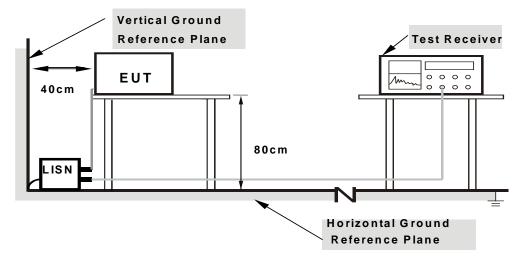

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6.




4.2.7 TEST RESULTS

CONDUCTED WORST CASE DATA_802.11b DSSS MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL			
CHANNEL Channel 6		PHASE	Line 1		
MODULATION TYPE	DBPSK	6dB BANDWIDTH	9 kHz		
TRANSFER RATE	1Mbps	INPUT POWER	120Vac, 60 Hz		
ENVIRONMENTAL CONDITIONS	, , , , , , ,		Match Tsui		
TEST MODE	Α				

No	Freq.	Freq. Corr. Factor		Reading Value		Emission Level		Limit		Margin	
NO		i actor	[dB	(uV)]	[dB ((uV)]	[dB	(uV)]	(dl	3)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	
1	0.193	0.13	53.11	-	53.24	-	63.91	53.91	-10.67	-	
2	0.252	0.13	41.95	-	42.08	-	61.71	51.71	-19.62	-	
3	0.451	0.14	31.58	-	31.72	-	56.86	46.86	-25.14	-	
4	0.576	0.15	29.04	-	29.19	-	56.00	46.00	-26.81	-	
5	4.418	0.45	31.66	-	32.11	-	56.00	46.00	-23.89	-	
6	16.355	0.99	24.51	-	25.50	-	60.00	50.00	-34.50	-	

- 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
- 3. The emission levels of other frequencies were very low against the limit.
- 4. Margin value = Emission level Limit value
- 5. Correction factor = Insertion loss + Cable loss
- 6. Emission Level = Correction Factor + Reading Value.

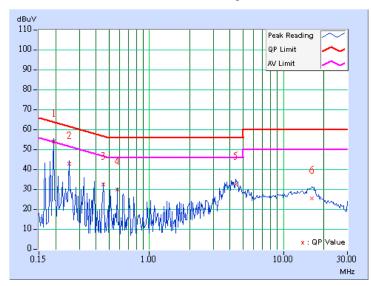




EUT TEST CONDITION		MEASUREMENT DETAIL			
CHANNEL	Channel 6	PHASE	Line 2		
MODULATION TYPE	DBPSK	6dB BANDWIDTH	9 kHz		
TRANSFER RATE	1Mbps	INPUT POWER	120Vac, 60 Hz		
ENVIRONMENTAL 20deg. C, 60%RH, 988hPa		TESTED BY	Match Tsui		
TEST MODE	A				

No	Freq.	Freq. Corr. Factor		Reading Value		Emission Level		Limit		Margin	
NO		1 actor	[dB ((uV)]	[dB (uV)]		[dB (uV)]		(dB)		
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	
1	0.193	0.14	53.09	-	53.23	-	63.91	53.91	-10.68	-	
2	0.255	0.14	46.37	-	46.51	-	61.58	51.58	-15.06	-	
3	0.318	0.15	38.24	-	38.39	-	59.76	49.76	-21.37	-	
4	0.576	0.16	34.11	-	34.27	-	56.00	46.00	-21.73	-	
5	3.637	0.40	22.13	-	22.53	-	56.00	46.00	-33.47	-	
6	16.457	0.79	26.80	-	27.59	-	60.00	50.00	-32.41	-	

- 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
- 3. The emission levels of other frequencies were very low against the limit.
- 4. Margin value = Emission level Limit value
- 5. Correction factor = Insertion loss + Cable loss
- 6. Emission Level = Correction Factor + Reading Value.

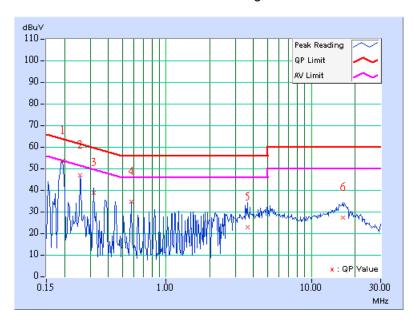




EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL Channel 6		PHASE	Line 1	
MODULATION TYPE	DBPSK	6dB BANDWIDTH	9 kHz	
TRANSFER RATE	1Mbps	INPUT POWER	120Vac, 60 Hz	
ENVIRONMENTAL CONDITIONS			Match Tsui	
TEST MODE	В			

No	Freq.	Freq. Corr. Factor		Reading Value		Emission Level		Limit		Margin	
NO		1 actor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)		
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	
1	0.189	0.13	42.51	-	42.64	-	64.08	54.08	-21.44	-	
2	0.287	0.13	40.69	-	40.82	-	60.62	50.62	-19.79	-	
3	0.408	0.14	37.73	-	37.87	-	57.69	47.69	-19.82	-	
4	1.578	0.22	30.72	-	30.94	-	56.00	46.00	-25.06	-	
5	2.781	0.33	28.77	-	29.10	-	56.00	46.00	-26.90	-	
6	4.473	0.45	25.38	-	25.83	-	56.00	46.00	-30.17	-	

- 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
- 3. The emission levels of other frequencies were very low against the limit.
- 4. Margin value = Emission level Limit value
- 5. Correction factor = Insertion loss + Cable loss
- 6. Emission Level = Correction Factor + Reading Value.

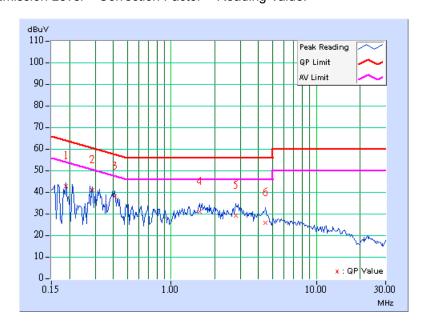




EUT TEST CONDITION		MEASUREMENT DETAIL			
CHANNEL	Channel 6	PHASE	Line 2		
MODULATION TYPE	DBPSK	6dB BANDWIDTH	9 kHz		
TRANSFER RATE	1Mbps	INPUT POWER	120Vac, 60 Hz		
ENVIRONMENTAL 20deg. C, 60%RH, 988hPa		TESTED BY	Match Tsui		
TEST MODE	В				

No	Freq. Corr. Factor				Emission Level		Limit		Margin	
NO		i actor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.177	0.14	36.79	-	36.93	-	64.61	54.61	-27.68	-
2	0.287	0.14	36.73	-	36.87	-	60.62	50.62	-23.74	-
3	0.423	0.15	29.04	-	29.19	-	57.38	47.38	-28.19	-
4	1.746	0.24	29.31	-	29.55	-	56.00	46.00	-26.45	-
5	2.941	0.34	26.10	-	26.44	-	56.00	46.00	-29.56	-
6	4.246	0.44	23.45	-	23.89	-	56.00	46.00	-32.11	-

- 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
- 3. The emission levels of other frequencies were very low against the limit.
- 4. Margin value = Emission level Limit value
- 5. Correction factor = Insertion loss + Cable loss
- 6. Emission Level = Correction Factor + Reading Value.

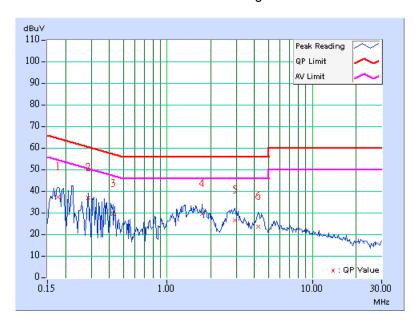




EUT TEST CONDITION		MEASUREMENT DETAIL			
CHANNEL	Channel 6	PHASE	Line 1		
MODULATION TYPE	DBPSK	6dB BANDWIDTH	9 kHz		
TRANSFER RATE	1Mbps	INPUT POWER	120Vac, 60 Hz		
ENVIRONMENTAL 28deg. C, 66%RH, 988hPa		TESTED BY	Dean Wang		
TEST MODE	С				

No	Freq. Corr.		Freq. Corr. Reading Value			Emission Level		Limit		Margin	
NO		1 actor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)		
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	
1	0.185	0.13	53.78	-	53.91	-	64.25	54.25	-10.34	-	
2	0.248	0.13	47.53	-	47.66	-	61.84	51.84	-14.17	-	
3	0.310	0.14	41.11	-	41.25	-	59.97	49.97	-18.72	-	
4	0.560	0.15	30.71	-	30.86	-	56.00	46.00	-25.14	-	
5	3.848	0.43	24.08	-	24.51	-	56.00	46.00	-31.49	-	
6	17.125	1.06	23.40	-	24.46	-	60.00	50.00	-35.54	-	

- 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
- 3. The emission levels of other frequencies were very low against the limit.
- 4. Margin value = Emission level Limit value
- 5. Correction factor = Insertion loss + Cable loss
- 6. Emission Level = Correction Factor + Reading Value.

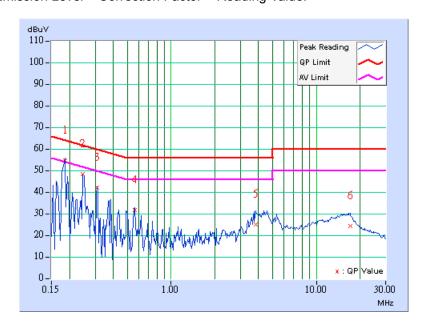




EUT TEST CONDITION		MEASUREMENT DETAIL				
CHANNEL	Channel 6	PHASE	Line 2			
MODULATION TYPE	DBPSK	6dB BANDWIDTH	9 kHz			
TRANSFER RATE	1Mbps	INPUT POWER	120Vac, 60 Hz			
ENVIRONMENTAL 28deg. C, 66%RH, 988hPa		TESTED BY	Dean Wang			
TEST MODE	С					

No	Freq. Corr.		Freq. Corr. Reading Value		g Value	Emission Level		Limit		Margin	
NO		i actor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)		
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	
1	0.185	0.14	54.68	43.19	54.82	43.33	64.25	54.25	-9.43	-10.92	
2	0.249	0.14	48.04	-	48.18	-	61.79	51.79	-13.61	-	
3	0.309	0.15	42.10	-	42.25	-	60.00	50.00	-17.76	-	
4	0.561	0.16	27.52	-	27.68	-	56.00	46.00	-28.32	-	
5	3.980	0.43	22.50	-	22.93	-	56.00	46.00	-33.07	-	
6	16.750	0.80	27.40	-	28.20	-	60.00	50.00	-31.80	-	

- 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
- 3. The emission levels of other frequencies were very low against the limit.
- 4. Margin value = Emission level Limit value
- 5. Correction factor = Insertion loss + Cable loss
- 6. Emission Level = Correction Factor + Reading Value.

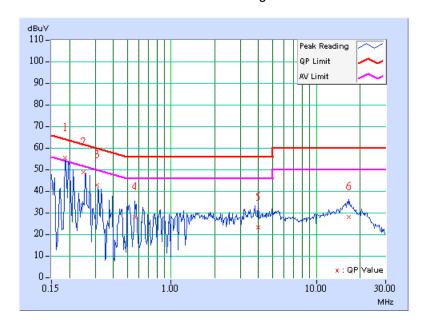




EUT TEST CONDITION		MEASUREMENT DETAIL				
CHANNEL	Channel 6	PHASE	Line 1			
MODULATION TYPE	DBPSK	6dB BANDWIDTH	9 kHz			
TRANSFER RATE	1Mbps	INPUT POWER	120Vac, 60 Hz			
ENVIRONMENTAL CONDITIONS	28deg. C, 66%RH, 988hPa	TESTED BY	Dean Wang			
TEST MODE	D					

No	Freq. Corr.		Freq. Corr. Factor			Emission Level		Limit		gin
No		i actor	[dB ((uV)]	[dB ((uV)]	[dB	(uV)]	(dl	3)
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.154	0.13	44.35	-	44.48	-	65.76	55.76	-21.28	-
2	0.293	0.13	33.74	-	33.87	-	60.43	50.43	-26.56	-
3	0.447	0.14	35.04	-	35.18	-	56.93	46.93	-21.75	-
4	1.652	0.23	25.35	-	25.58	-	56.00	46.00	-30.42	-
5	2.828	0.33	25.41	-	25.74	-	56.00	46.00	-30.26	-
6	5.453	0.48	15.22	-	15.70	-	60.00	50.00	-44.30	-

- 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
- 3. The emission levels of other frequencies were very low against the limit.
- 4. Margin value = Emission level Limit value
- 5. Correction factor = Insertion loss + Cable loss
- 6. Emission Level = Correction Factor + Reading Value.

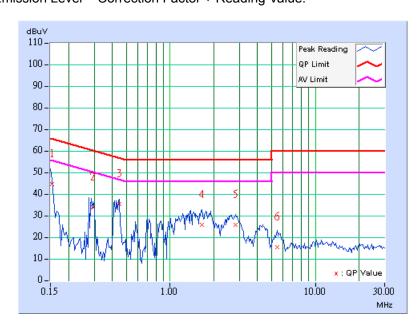




EUT TEST CONDITION	I	MEASUREMENT DETAIL			
CHANNEL	Channel 6	PHASE	Line 2		
MODULATION TYPE	DBPSK	6dB BANDWIDTH	9 kHz		
TRANSFER RATE	1Mbps	INPUT POWER	120Vac, 60 Hz		
ENVIRONMENTAL CONDITIONS	28deg. C, 66%RH, 988hPa	TESTED BY Dean Wang			
TEST MODE	D				

No	Freq. Corr. Factor		Readin	g Value	Emis Le	ssion vel	Lir	nit	Mar	gin	
NO		i actor	[dB ([dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	
1	0.152	0.14	53.96	-	54.10	-	65.90	55.90	-11.80	-	
2	0.291	0.14	34.30	-	34.44	-	60.51	50.51	-26.06	-	
3	0.439	0.15	40.03	-	40.18	-	57.09	47.09	-16.90	-	
4	0.858	0.17	30.09	-	30.26	-	56.00	46.00	-25.74	-	
5	2.578	0.31	27.56	-	27.87	-	56.00	46.00	-28.13	-	
6	5.211	0.46	16.01	-	16.47	-	60.00	50.00	-43.53	_	

- 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
- 3. The emission levels of other frequencies were very low against the limit.
- 4. Margin value = Emission level Limit value
- 5. Correction factor = Insertion loss + Cable loss
- 6. Emission Level = Correction Factor + Reading Value.

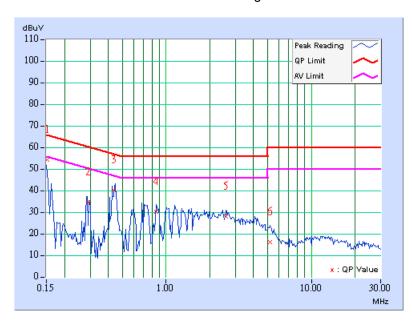



4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
SPECTRUM ANALYZER	FSP40	100040	Jun. 28, 2008

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURE


The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 300kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation



4.3.5 TEST SETUP



4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.




4.3.7 TEST RESULTS

802.11b DSSS MODULATION


MODULATION TYPE	DBPSK	TRANSFER RATE	1Mbps
INPUT POWER	120\/ac 60 Hz		27deg. C, 66%RH, 985hPa
TESTED BY	Dean Wang		


CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	10.17	0.5	PASS
6	2437	10.16	0.5	PASS
11	2462	11.08	0.5	PASS

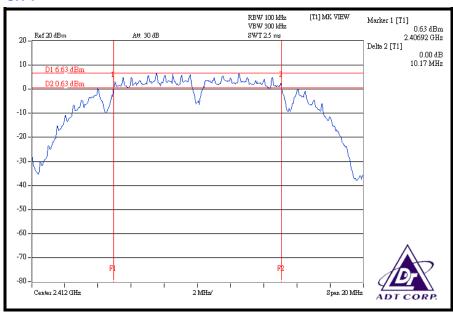



CH 6

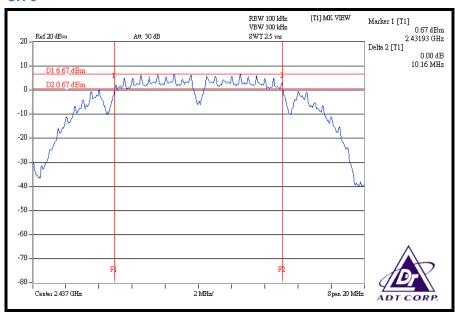

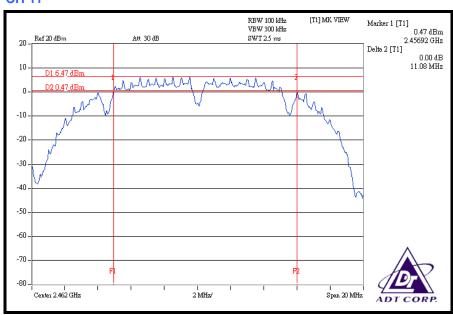




802.11g OFDM MODULATION


MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER	120\/ac 60 Hz		27deg. C, 66%RH, 985hPa
TESTED BY	Dean Wang		


CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	16.38	0.5	PASS
6	2437	16.41	0.5	PASS
11	2462	16.42	0.5	PASS

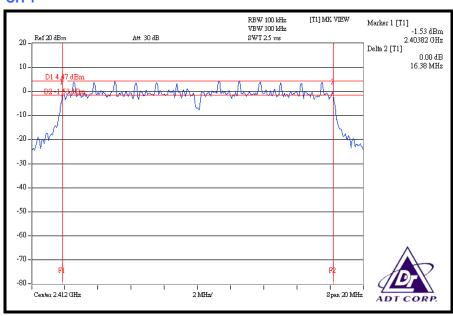



CH 6

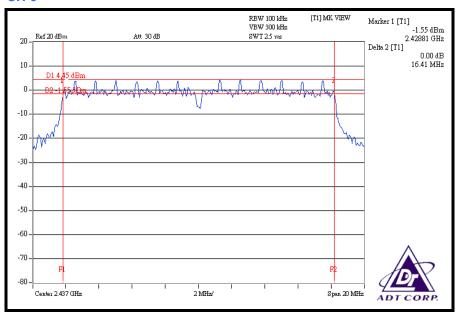

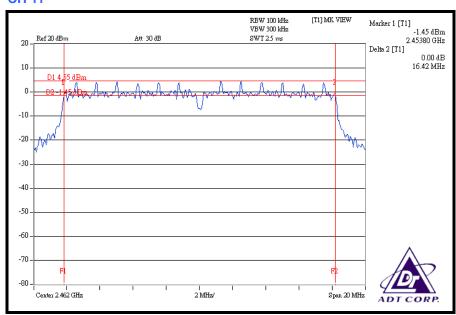



4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100040	Jun. 28, 2008
AGILENT SIGNAL GENERATOR	E8257C	MY43320668	Dec. 25, 2008
TEKTRONIX OSCILLOSCOPE	TDS1012	C037299	Nov. 21, 2008
NARDA DETECTOR	4503A	FSCM99899	NA

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.



4.4.3 TEST PROCEDURES

- a. A detector was used on the output port of the EUT. An oscilloscope was used to read the response of the detector.
- b. Replaced the EUT by the signal generator. The center frequency of the S.G was adjusted to the center frequency of the measured channel.
- c. Adjusted the power to have the same reading on oscilloscope. Record the power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP



4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6



4.4.7 TEST RESULTS

802.11b DSSS MODULATION

MODULATION TYPE	DBPSK	TRANSFER RATE	1Mbps
INPUT POWER	120\/ac 60 Hz		27deg. C, 66%RH, 985hPa
TESTED BY	Dean Wang		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	64.269	18.08	30	PASS
6	2437	65.013	18.13	30	PASS
11	2462	64.121	18.07	30	PASS

802.11g OFDM MODULATION

MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER	120\/ac 60 Hz		27deg. C, 66%RH, 985hPa
TESTED BY	Dean Wang		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	63.387	18.02	30	PASS
6	2437	64.121	18.07	30	PASS
11	2462	64.417	18.09	30	PASS



4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100040	Jun. 28, 2008

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time = span1.5MHz. The power spectral density was measured and recorded.


The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation



4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6




4.5.7 TEST RESULTS

802.11b DSSS MODULATION

MODULATION TYPE	DBPSK	TRANSFER RATE	1Mbps
INPUT POWER	120\/ac 60 Hz		27deg. C, 66%RH, 985hPa
TESTED BY	Dean Wang		


CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-10.93	8	PASS
6	2437	-10.99	8	PASS
11	2462	-10.94	8	PASS


CH₁

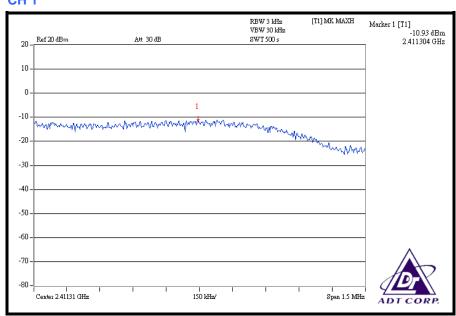



CH 6

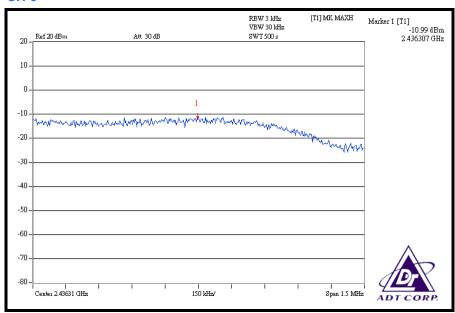

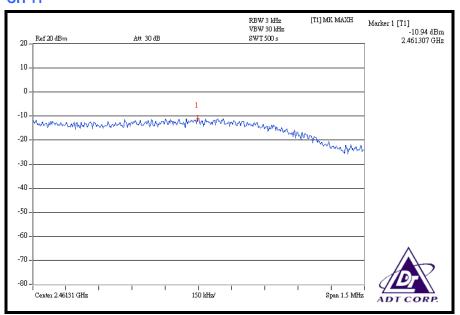




802.11g OFDM MODULATION


MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER	120\/ac 60 Hz		27deg. C, 66%RH, 985hPa
TESTED BY	Dean Wang		


CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-9.15	8	PASS
6	2437	-9.12	8	PASS
11	2462	-9.14	8	PASS

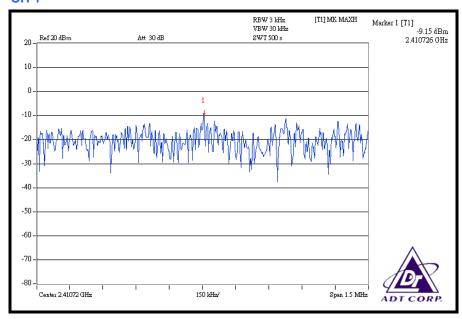



CH 6

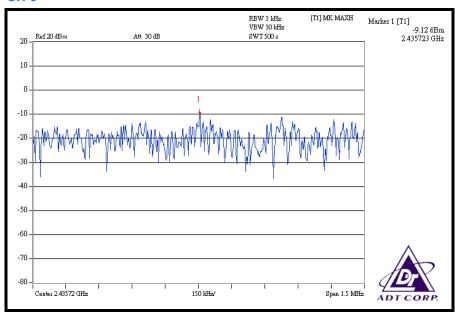

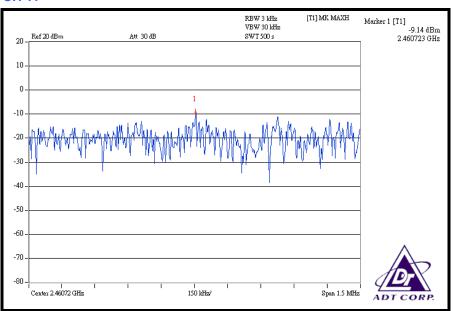



4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

DESCRIPTION &	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100040	Jun. 28, 2008

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz and 300 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots (Peak RBW=100kHz, VBW=300kHz; Average RBW=1MHz, VBW=10Hz) are attached on the following pages.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6



4.6.6 TEST RESULTS

The spectrum plots are attached on the following 12 images. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).

802.11b DSSS MODULATION


NOTE 1: The band edge emission plot on the next page shows 53.84dBc between carrier maximum power and local maximum emission in restrict band (2.37260GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 104.32dBuV/m (Peak), so the maximum field strength in restrict band is 104.32 - 53.84 = 50.48dBuV/m which is under 74dBuV/m limit.


The band edge emission plot on the next page shows 56.95 dBc between carrier maximum power and local maximum emission in restrict band (2.39000 GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 99.86 dBuV/m (Average), so the maximum field strength in restrict band is 99.86 - 56.95 = 42.91 dBuV/m which is under 54 dBuV/m limit.

NOTE 2: The band edge emission plot on the next second page shows 49.54dBc between carrier maximum power and local maximum emission in restrict band (2.48800GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 103.69dBuV/m (Peak), so the maximum field strength in restrict band is 103.69 – 49.54 = 54.15dBuV/m which is under 74dBuV/m limit.


The band edge emission plot on the next third page shows 50.03dBc between carrier maximum power and local maximum emission in restrict band (2.48350GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 99.03dBuV/m (Average), so the maximum field strength in restrict band is 99.03 - 50.03 = 49.00dBuV/m which is under 54dBuV/m limit.




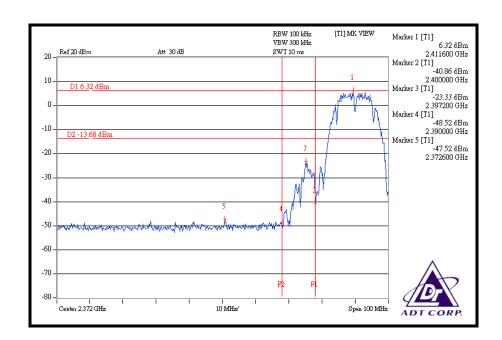

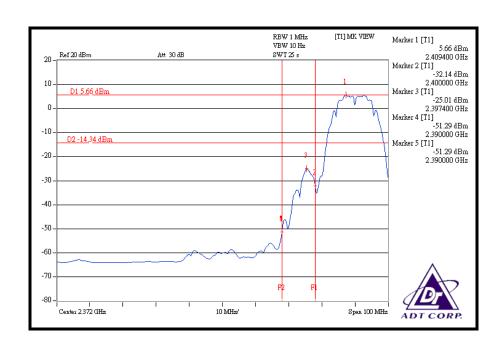





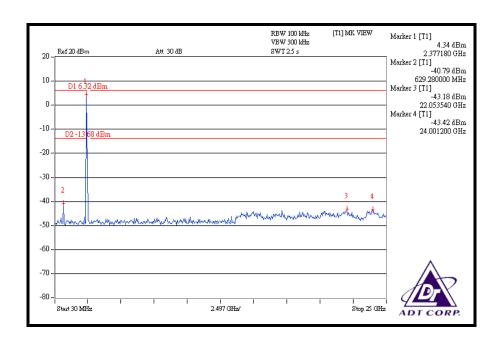

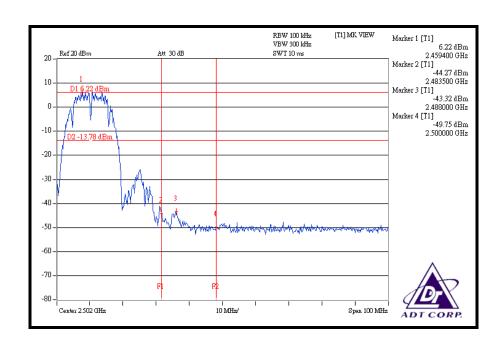



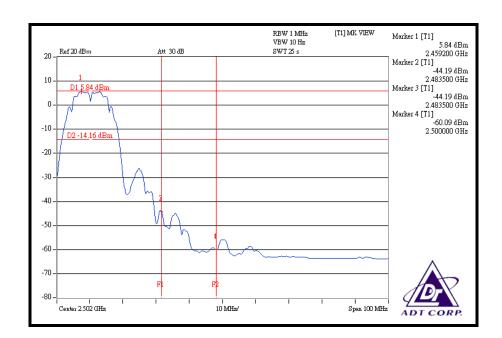

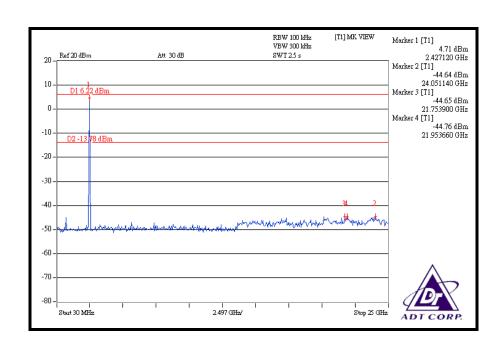



802.11g OFDM MODULATION


NOTE 1: The band edge emission plot on the next page shows 41.55dBc between carrier maximum power and local maximum emission in restrict band (2.39000GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 104.99dBuV/m (Peak), so the maximum field strength in restrict band is 104.99 - 41.55 = 63.44dBuV/m which is under 74dBuV/m limit.


The band edge emission plot on the next page shows 44.26dBc between carrier maximum power and local maximum emission in restrict band (2.39000GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 94.23dBuV/m (Average), so the maximum field strength in restrict band is 94.23 - 44.26 = 49.97dBuV/m which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on the next second page shows 43.27dBc between carrier maximum power and local maximum emission in restrict band (2.48350GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 104.37dBuV/m (Peak), so the maximum field strength in restrict band is 104.37 – 43.27 = 61.10dBuV/m which is under 74dBuV/m limit.


The band edge emission plot on the next third page shows $41.40 \, \text{dBc}$ between carrier maximum power and local maximum emission in restrict band ($2.48350 \, \text{GHz}$). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is $93.73 \, \text{dBuV/m}$ (Average), so the maximum field strength in restrict band is $93.73 - 41.40 = 52.33 \, \text{dBuV/m}$ which is under $54 \, \text{dBuV/m}$ limit.




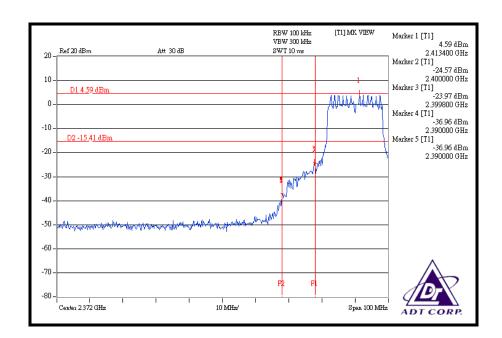

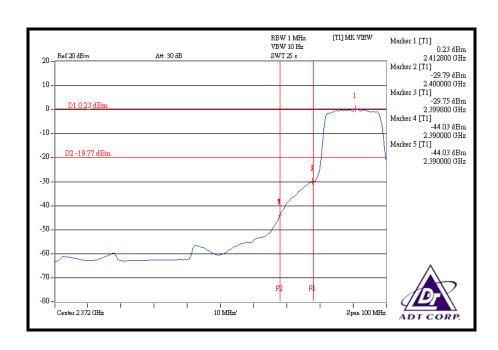





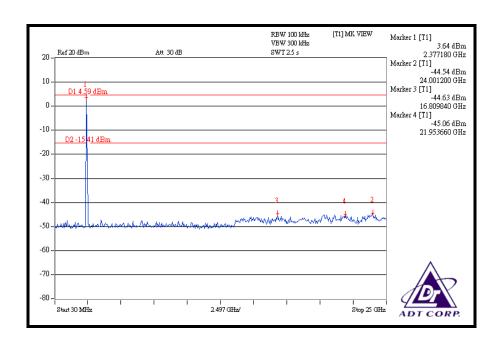

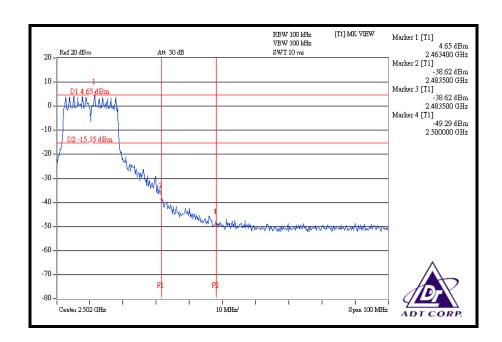



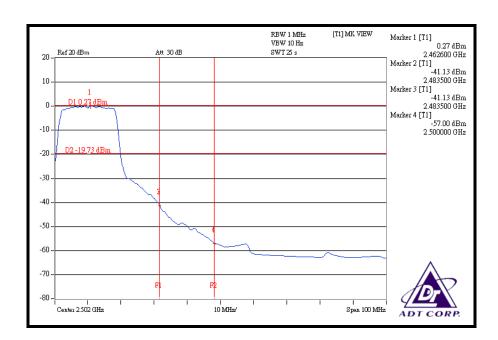

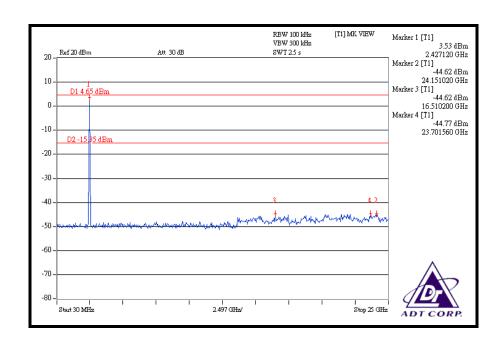



4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is PIFA antenna without connector. The maximum Gain of the antenna is 1.36dBi.



	ADT CORP.
5. PHOTOGRAPHS OF THE TEST CONFIGURATION	
Please refer to the attached file (Test Setup Photo).	

Report No.: RF970611L05 62 Report Format Version 2.1.1



6. INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

USA FCC, UL, A2LA GERMANY TUV Rheinland

JAPAN VCCI NORWAY NEMKO

CANADA INDUSTRY CANADA, CSA

R.O.C. TAF, BSMI, NCC

NETHERLANDS Telefication

SINGAPORE GOST-ASIA (MOU)
RUSSIA CERTIS (MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:Hsin Chu EMC/RF Lab:Tel: 886-2-26052180Tel: 886-3-5935343Fax: 886-2-26051924Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab:

Tel: 886-3-3183232 Fax: 886-3-3185050

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

