

TEST REPORT

Applicant: MeLE Technologies (Shenzhen) Co., LTD.

Address of Applicant: 3FW Mele Building, No.28 Cuijing Rd., Pingshan District, Shenzhen, Guangdong Province, (518118), P.R.China

Manufacturer/Factory: MeLE Technologies (Shenzhen) Co., LTD.

Address of Manufacturer/Factory: 3FW Mele Building, No.28 Cuijing Rd., Pingshan District, Shenzhen, Guangdong Province, (518118), P.R.China

Equipment Under Test (EUT)

Product Name: Fanless Mini PC

Model No.: PCG02 GLE, PCG02 GLK

Trade Mark: MeLE

FCC ID: WF7PCG02202002

Applicable standards: FCC CFR Title 47 Part 15 Subpart E Section 15.407

Date of sample receipt: Dec. 01, 2020

Date of Test: Dec. 01 - Dec. 10, 2020

Date of report issued: Dec. 10, 2020

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

Robinson Luo

Laboratory Manager

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

2 Version

Version No.	Date	Description
00	Dec. 10, 2020	Original

Prepared By:


Project Engineer

Date:

Dec. 10, 2020

Check By:


Reviewer

Date:

Dec. 10, 2020

3 Contents

	Page
1 COVER PAGE	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
4.1 MEASUREMENT UNCERTAINTY	4
5 GENERAL INFORMATION	5
5.1 GENERAL DESCRIPTION OF EUT	5
5.2 TEST MODE	7
5.3 DESCRIPTION OF SUPPORT UNITS	7
5.4 DEVIATION FROM STANDARDS	7
5.5 ABNORMALITIES FROM STANDARD CONDITIONS	7
5.6 TEST FACILITY	8
5.7 TEST LOCATION	8
6 TEST INSTRUMENTS LIST	9
7 TEST RESULTS AND MEASUREMENT DATA	11
7.1 ANTENNA REQUIREMENT	11
7.2 CONDUCTED EMISSIONS	12
7.3 CONDUCTED PEAK OUTPUT POWER	15
7.4 CHANNEL BANDWIDTH	17
7.5 POWER SPECTRAL DENSITY	28
7.6 BAND EDGE	40
7.6.1 Radiated Emission Method	40
7.7 SPURIOUS EMISSION	48
7.7.1 Radiated Emission Method	48
7.8 FREQUENCY STABILITY	55
8 TEST SETUP PHOTO	57
9 EUT CONSTRUCTIONAL DETAILS	57

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.407(a)(3)	Pass
Channel Bandwidth	15.407(e)	Pass
Power Spectral Density	15.407(a)(3)	Pass
Band Edge	15.407(b)(4)	Pass
Spurious Emission	15.205/15.209/15.407(b)(4)	Pass
Frequency Stability	15.407(g)	Pass

Remarks:

1. Pass: The EUT complies with the essential requirements in the standard.
2. Test according to ANSI C63.10:2013.

4.1 Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	30MHz-200MHz	3.8039dB	(1)
Radiated Emission	200MHz-1GHz	3.9679dB	(1)
Radiated Emission	1GHz-18GHz	4.29dB	(1)
Radiated Emission	18GHz-40GHz	3.30dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	3.44dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

5 General Information

5.1 General Description of EUT

Product Name:	Fanless Mini PC
Model No.:	PCG02 GLE, PCG02 GLK
Test Model No.:	PCG02 GLE
Remark: All above models are identical in the same PCB layout, interior structure and electrical circuits. The only difference should be the Appearance, RAM, storage and/or operating system.	
Serial No.:	N/A
Hardware Version:	N/A
Software Version:	N/A
Test sample(s) ID:	GTSL202012000015-1
Sample(s) Status:	Engineer sample
Operation Frequency:	802.11a/802.11n(HT20)/802.11ac(HT20): 5745MHz ~ 5825MHz 802.11n(HT40)/ 802.11ac(HT40): 5755MHz ~ 5795MHz 802.11ac(HT80): 5775MHz
Channel numbers:	802.11a/802.11n(HT20)/802.11ac(HT20): 5 802.11n(HT40)/ 802.11ac(HT40): 2 802.11ac(HT80): 1
Channel bandwidth:	802.11a/802.11n(HT20)/802.11ac(HT20) : 20MHz 802.11n(HT40)/802.11ac(HT40) : 40MHz 802.11ac(HT80): 80MHz
Modulation technology:	802.11a/802.11n(H20)/802.11n(H40)/802.11ac(HT20)/802.11ac(HT40) /802.11ac(HT80): Orthogonal Frequency Division Multiplexing (OFDM) MIMO: 802.11n/ac SISO: 802.11a
Antenna Type:	Antenna 1: Integral Antenna Antenna 2: FPC Antenna
Antenna gain:	Antenna 1: 2.0dBi Antenna 2: 2.0dBi
Power supply:	Switching Adaptor Model: FJ-SW0503000N Input: AC 100-240V, 50/60Hz, 0.6A Max Output: DC 5.0V, 3.0A

Directional gain of MIMO = $G_{ANT} + 10 \log(N_{ANT})$ dBi=5.00dBi

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
149	5745MHz	151	5755MHz	153	5765MHz	155	5775MHz
157	5785MHz	159	5795MHz	161	5805MHz	163	5815MHz
165	5825MHz						

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency (MHz)		
	802.11 a/n/ac(HT20)	802.11 n/ac(HT40)	802.11ac(HT80)
Lowest channel	5745	5755	
Middle channel	5785		5775
Highest channel	5825	5795	

5.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode
<i>Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.</i>	

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.

Mode	Data rate
802.11a	6Mbps
802.11n(HT20)	6.5Mbps
802.11n(HT40)	13Mbps
802.11ac(HT20)	6.5Mbps
802.11ac(HT40)	13.5Mbps
802.11ac(HT80)	29.3Mbps

5.3 Description of Support Units

None.

5.4 Deviation from Standards

None.

5.5 Abnormalities from Standard Conditions

None.

5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC —Registration No.: 381383**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 381383.

- **IC —Registration No.: 9079A**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A

- **NVLAP (LAB CODE:600179-0)**

Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP). LAB CODE:600179-0

5.7 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

No. 123-128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone,

Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102

Tel: 0755-27798480

Fax: 0755-27798960

6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July. 02 2020	July. 01 2025
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June. 25 2020	June. 24 2021
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June. 25 2020	June. 24 2021
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	June. 25 2020	June. 24 2021
6	Horn Antenna	ETS-LINDGREN	3160	GTS217	June. 25 2020	June. 24 2021
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
8	Coaxial Cable	GTS	N/A	GTS213	June. 25 2020	June. 24 2021
9	Coaxial Cable	GTS	N/A	GTS211	June. 25 2020	June. 24 2021
10	Coaxial cable	GTS	N/A	GTS210	June. 25 2020	June. 24 2021
11	Coaxial Cable	GTS	N/A	GTS212	June. 25 2020	June. 24 2021
12	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June. 25 2020	June. 24 2021
13	Amplifier(2GHz-20GHz)	HP	84722A	GTS206	June. 25 2020	June. 24 2021
14	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June. 25 2020	June. 24 2021
15	Band filter	Amindeon	82346	GTS219	June. 25 2020	June. 24 2021
16	Power Meter	Anritsu	ML2495A	GTS540	June. 25 2020	June. 24 2021
17	Power Sensor	Anritsu	MA2411B	GTS541	June. 25 2020	June. 24 2021
18	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	June. 25 2020	June. 24 2021
19	Splitter	Agilent	11636B	GTS237	June. 25 2020	June. 24 2021
20	Loop Antenna	ZHINAN	ZN30900A	GTS534	June. 25 2020	June. 24 2021
21	Breitband hornantenne	SCHWARZBECK	BBHA 9170	GTS579	Oct. 18 2020	Oct. 17 2021
22	Amplifier	TDK	PA-02-02	GTS574	Oct. 18 2020	Oct. 17 2021
23	Amplifier	TDK	PA-02-03	GTS576	Oct. 18 2020	Oct. 17 2021
24	PSA Series Spectrum Analyzer	Rohde & Schwarz	FSP	GTS578	June. 25 2020	June. 24 2021

Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	May.15 2019	May.14 2022
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 25 2020	June. 24 2021
3	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	June. 25 2020	June. 24 2021
4	ENV216 2-L-V-NETZNACHB.DE	ROHDE&SCHWARZ	ENV216	GTS226	June. 25 2020	June. 24 2021
5	Coaxial Cable	GTS	N/A	GTS227	N/A	N/A
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
7	Thermo meter	KTJ	TA328	GTS233	June. 25 2020	June. 24 2021
8	Absorbing clamp	Elektronik-Feinmechanik	MDS21	GTS229	June. 25 2020	June. 24 2021
9	ISN	SCHWARZBECK	NTFM 8158	GTD565	June. 25 2020	June. 24 2021

RF Conducted Test:						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	MXA Signal Analyzer	Agilent	N9020A	GTS566	June. 25 2020	June. 24 2021
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 25 2020	June. 24 2021
3	Spectrum Analyzer	Agilent	E4440A	GTS533	June. 25 2020	June. 24 2021
4	MXG vector Signal Generator	Agilent	N5182A	GTS567	June. 25 2020	June. 24 2021
5	ESG Analog Signal Generator	Agilent	E4428C	GTS568	June. 25 2020	June. 24 2021
6	USB RF Power Sensor	DARE	RPR3006W	GTS569	June. 25 2020	June. 24 2021
7	RF Switch Box	Shongyi	RFSW3003328	GTS571	June. 25 2020	June. 24 2021
8	Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40-880	GTS572	June. 25 2020	June. 24 2021

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Humidity/ Temperature Indicator	KTJ	TA328	GTS243	June. 25 2020	June. 24 2021
2	Barometer	ChangChun	DYM3	GTS255	June. 25 2020	June. 24 2021

7 Test results and Measurement Data

7.1 Antenna requirement

Standard requirement:	FCC Part15 C Section 15.203
<i>15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</i>	
E.U.T Antenna:	
<i>The antennas are integral antenna and FPC antenna, the best case gain of the antennas are 2.0dBi, reference to the appendix II for details</i>	


7.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207					
Test Method:	ANSI C63.10:2013					
Test Frequency Range:	150KHz to 30MHz					
Class / Severity:	Class B					
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto					
Limit:	Frequency range (MHz)		Limit (dBuV)			
			Quasi-peak		Average	
	0.15-0.5		66 to 56*		56 to 46*	
	0.5-5		56		46	
	5-30		60		50	
* Decreases with the logarithm of the frequency.						
Test setup:	Reference Plane <i>Remark:</i> E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m					
Test procedure:	1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.					
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar
Test voltage:	AC 120V, 60Hz					
Test results:	Pass					

Remark: Both high and low voltages have been tested to show only the worst low voltage test data.


Measurement data

Line:

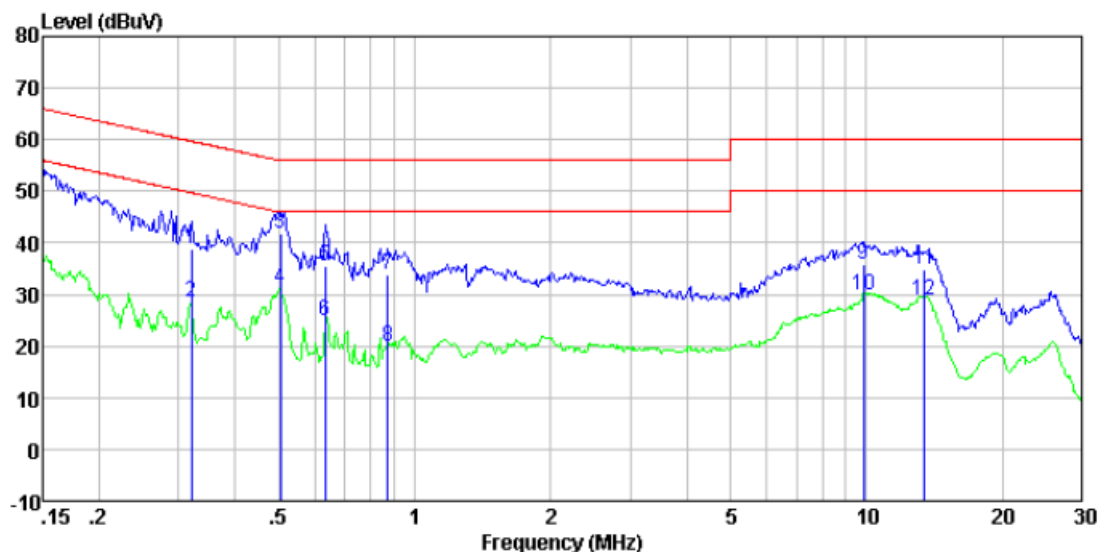

Freq MHz	Reading level dBuV	LISN/ISN factor dB/m	Cable loss dB	Level dBuV	Limit level dBuV	Over limit dB	Remark
0.32	18.56	20.39	0.01	38.96	59.71	-20.75	QP
0.32	7.98	20.39	0.01	28.38	49.71	-21.33	Average
0.50	21.41	20.31	0.01	41.73	56.00	-14.27	QP
0.50	10.82	20.31	0.01	31.14	46.00	-14.86	Average
0.63	15.34	20.28	0.02	35.64	56.00	-20.36	QP
0.63	4.45	20.28	0.02	24.75	46.00	-21.25	Average
0.87	13.43	20.22	0.03	33.68	56.00	-22.32	QP
0.87	-0.44	20.22	0.03	19.81	46.00	-26.19	Average
9.86	15.44	20.20	0.11	35.75	60.00	-24.25	QP
9.86	9.46	20.20	0.11	29.77	50.00	-20.23	Average
13.48	14.33	20.20	0.15	34.68	60.00	-25.32	QP
13.48	8.39	20.20	0.15	28.74	50.00	-21.26	Average

Neutral:

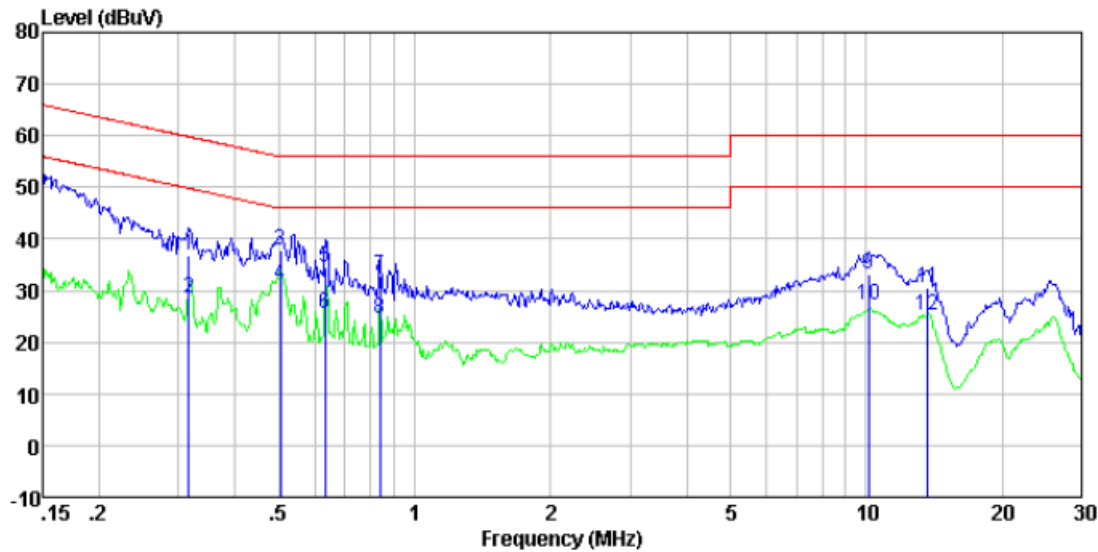


Freq MHz	Reading level dBuV	LISN/ISN factor dB/m	Cable loss dB	Level dBuV	Limit level dBuV	Over limit dB	Remark
0.32	16.28	20.39	0.01	36.68	59.80	-23.12	QP
0.32	8.19	20.39	0.01	28.59	49.80	-21.21	Average
0.50	17.44	20.31	0.01	37.76	56.00	-18.24	QP
0.50	10.79	20.31	0.01	31.11	46.00	-14.89	Average
0.63	14.04	20.28	0.02	34.34	56.00	-21.66	QP
0.63	5.11	20.28	0.02	25.41	46.00	-20.59	Average
0.84	12.51	20.23	0.03	32.77	56.00	-23.23	QP
0.84	4.26	20.23	0.03	24.52	46.00	-21.48	Average
10.13	12.77	20.20	0.11	33.08	60.00	-26.92	QP
10.13	6.77	20.20	0.11	27.08	50.00	-22.92	Average
13.70	10.17	20.20	0.15	30.52	60.00	-29.48	QP
13.70	4.83	20.20	0.15	25.18	50.00	-24.82	Average

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss
4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both *limits and measurement with the average detector receiver is unnecessary*.

7.3 Conducted Peak Output Power

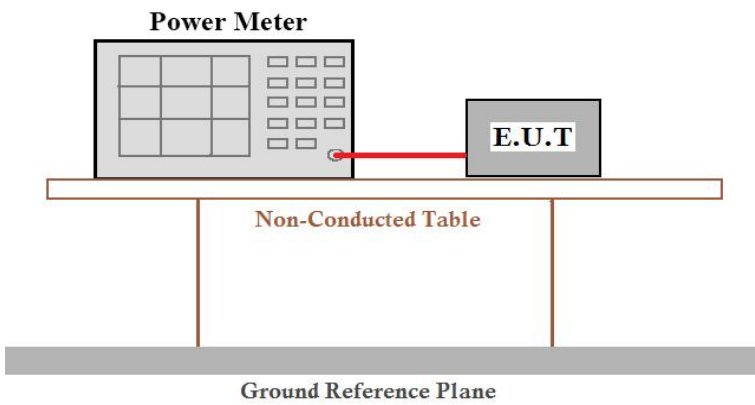Test Requirement:	FCC Part15 E Section 15.407(a)(3)
Test Method:	ANSI C63.10:2013 KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 KDB 662911 D01 Multiple Transmitter Output v02r01
Limit:	30dBm
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data

Antenna 1:

Test CH	Peak Output Power (dBm)						Limit (dBm)	Result
	802.11a	802.11n (HT20)	802.11ac (HT20)	802.11n (HT40)	802.11ac (HT40)	802.11ac (HT80)		
Lowest	17.94	17.38	17.53	16.90	16.94	---	30.00	Pass
Middle	17.55	17.26	17.35	---	---	16.79		
Highest	17.60	17.28	17.40	16.52	16.65	---		

Antenna 2:


Test CH	Peak Output Power (dBm)						Limit (dBm)	Result
	802.11a	802.11n (HT20)	802.11ac (HT20)	802.11n (HT40)	802.11ac (HT40)	802.11ac (HT80)		
Lowest	16.92	16.39	16.57	16.52	16.50	---	30.00	Pass
Middle	16.97	16.34	16.45	---	---	16.58		
Highest	17.04	16.71	16.19	16.20	16.35	---		

Remark: “---“is not applicable

MIMO:

802.11n(HT20) mode					
Test Channel	Measured Power (dBm)		Total (dBm)	Limit (dBm)	Result
	Antenna 1	Antenna 2			
Lowest	17.38	16.39	19.92	30.00	Pass
Middle	17.26	16.34	19.83	30.00	Pass
Highest	17.28	16.71	20.01	30.00	Pass
802.11ac(HT20) mode					
Test Channel	Measured Power (dBm)		Total (dBm)	Limit (dBm)	Result
	Antenna 1	Antenna 2			
Lowest	17.53	16.57	20.09	30.00	Pass
Middle	17.35	16.45	19.93	30.00	Pass
Highest	17.40	16.19	19.85	30.00	Pass
802.11n(HT40) mode					
Test Channel	Measured Power (dBm)		Total (dBm)	Limit (dBm)	Result
	Antenna 1	Antenna 2			
Lowest	16.90	16.52	19.72	30.00	Pass
Highest	16.52	16.20	19.37	30.00	Pass
802.11 ac(HT40) mode					
Test Channel	Measured Power (dBm)		Total (dBm)	Limit (dBm)	Result
	Antenna 1	Antenna 2			
Lowest	16.94	16.50	19.74	30.00	Pass
Highest	16.65	16.35	19.51	30.00	Pass
802.11 ac(HT80)					
Test Channel	Measured Power (dBm)		Total (dBm)	Limit (dBm)	Result
	Antenna 1	Antenna 2			
Middle	16.79	16.58	19.70	30.00	Pass

7.4 Channel Bandwidth

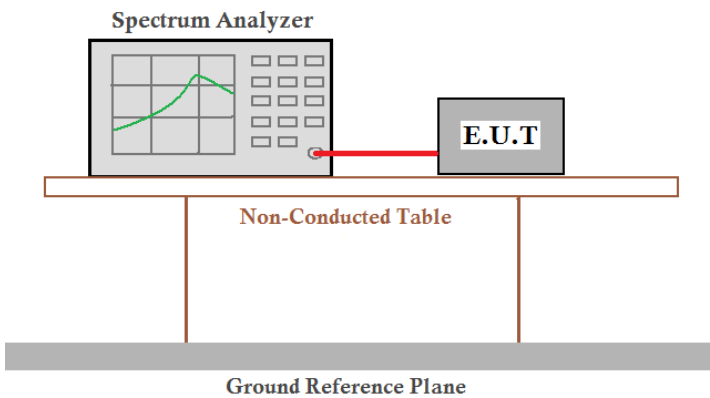Test Requirement:	FCC Part15 E Section 15.407(e)
Test Method:	ANSI C63.10:2013 KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 KDB 662911 D01 Multiple Transmitter Output v02r01
Limit:	>500KHz
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data

Antenna 1:

Test CH	Channel Bandwidth (MHz)						Limit (KHz)	Result
	802.11a	802.11n (HT20)	802.11ac (HT20)	802.11n (HT40)	802.11ac (HT40)	802.11ac (HT80)		
Lowest	16.36	17.57	17.56	36.40	36.34	---	>500	Pass
Middle	16.34	17.57	17.62	---	---	75.78		
Highest	16.32	17.62	17.61	36.37	36.40	---		

Antenna 2:

Test CH	Channel Bandwidth (MHz)						Limit (KHz)	Result
	802.11a	802.11n (HT20)	802.11ac (HT20)	802.11n (HT40)	802.11ac (HT40)	802.11ac (HT80)		
Lowest	16.34	17.58	17.59	36.35	36.32	---	>500	Pass
Middle	16.34	17.57	17.64	---	---	76.01		
Highest	16.34	17.58	17.62	36.38	36.40	---		

Remark: “---“is not applicable


Test plot as follows:

Antenna 1:

Test mode: 802.11a



Lowest channel

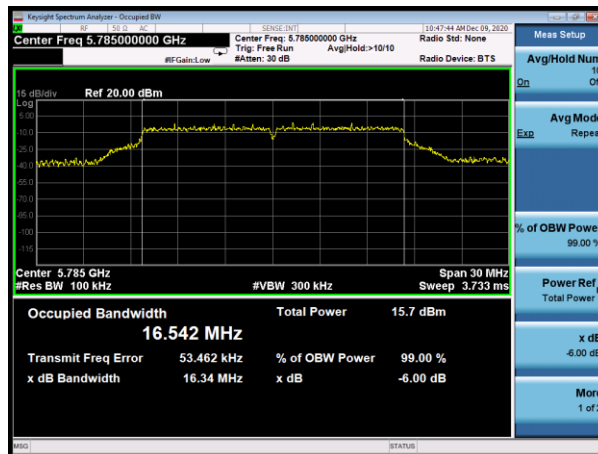


Middle channel




Highest channel


Test mode: 802.11n(HT20)

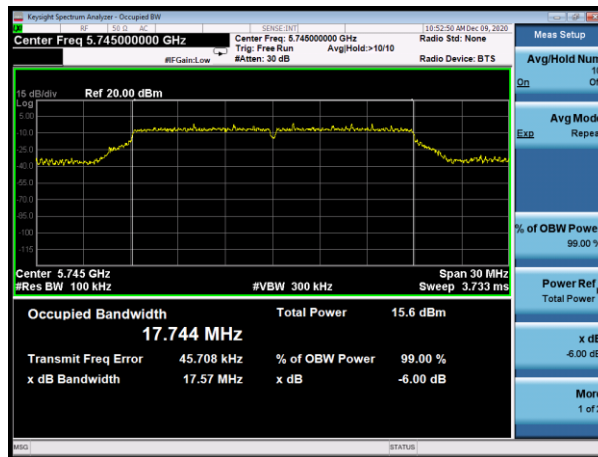

Lowest channel

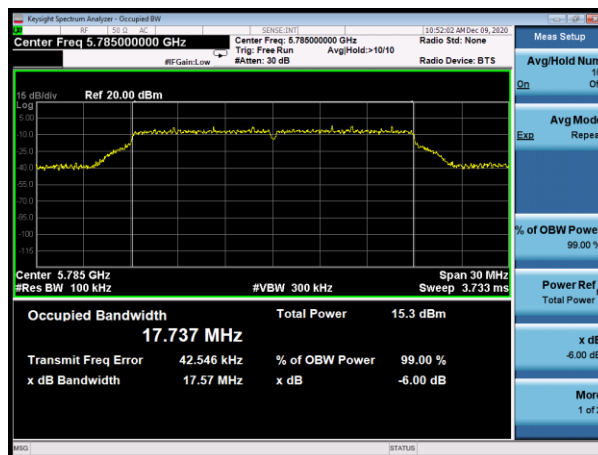


Middle channel

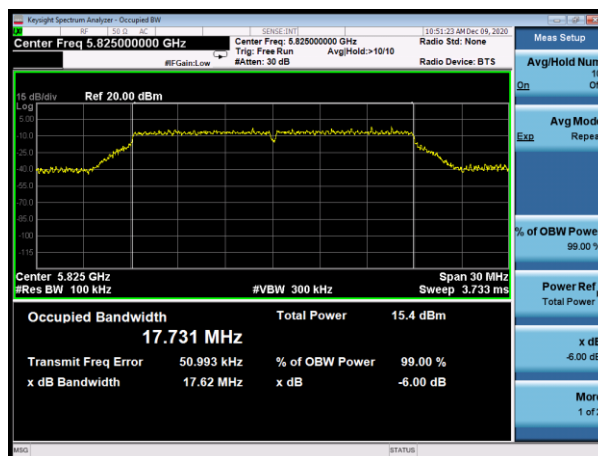


Highest channel


Test mode: 802.11ac(HT20)

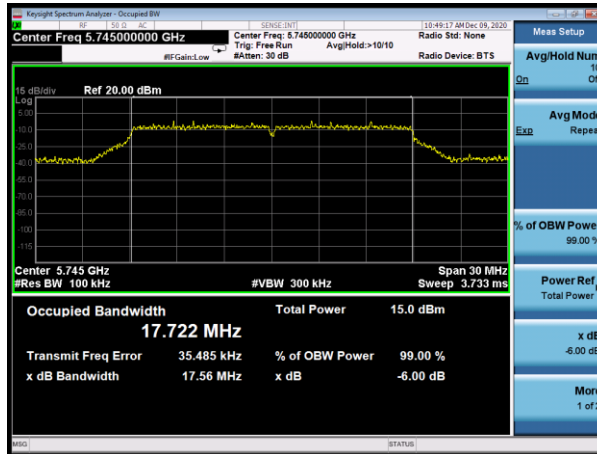

Lowest channel

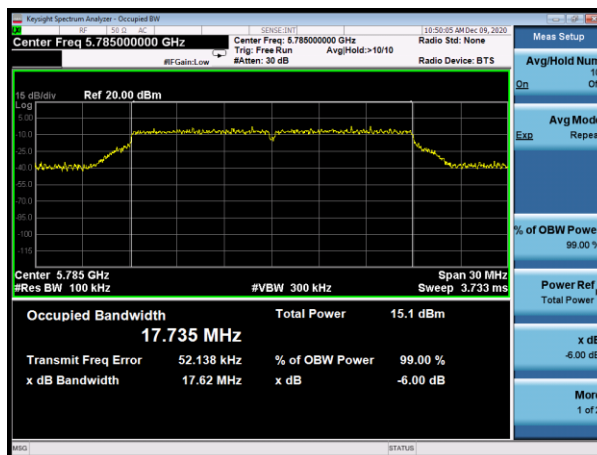


Middle channel

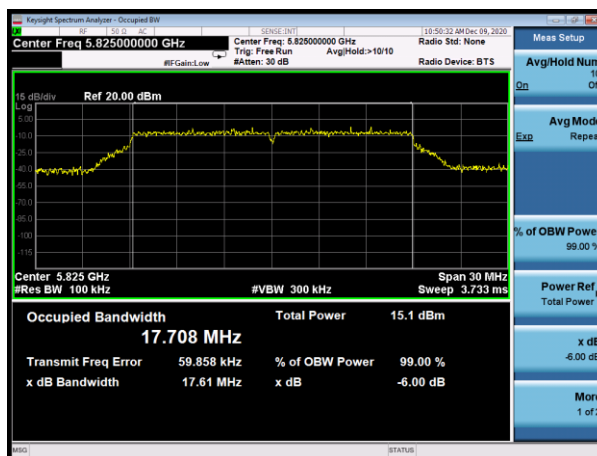


Highest channel

Test mode: 802.11n(HT40)

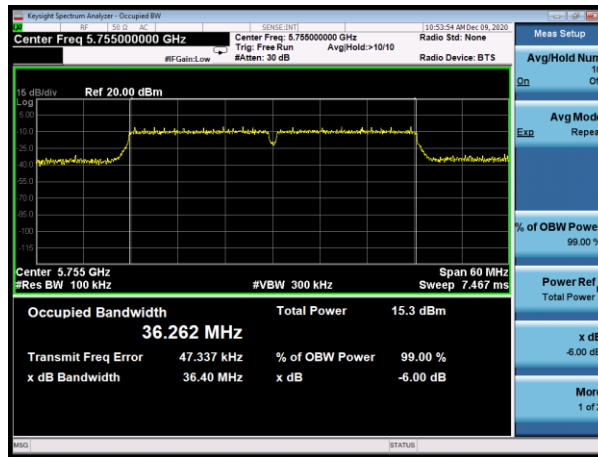


Lowest channel

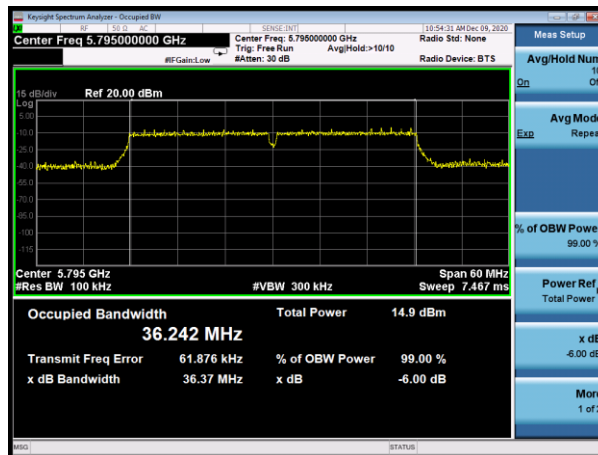


Highest channel

Test mode: 802.11ac(HT40)

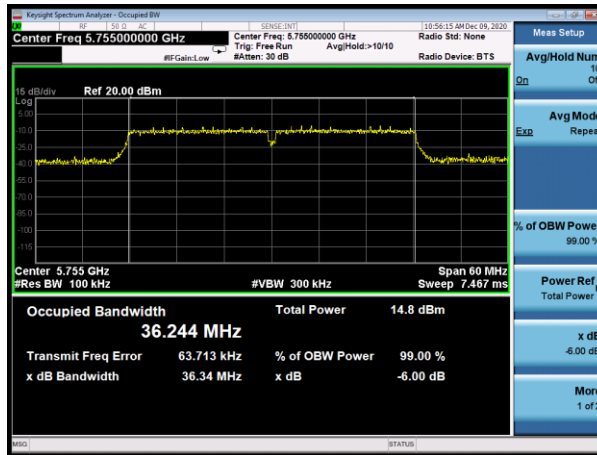


Lowest channel

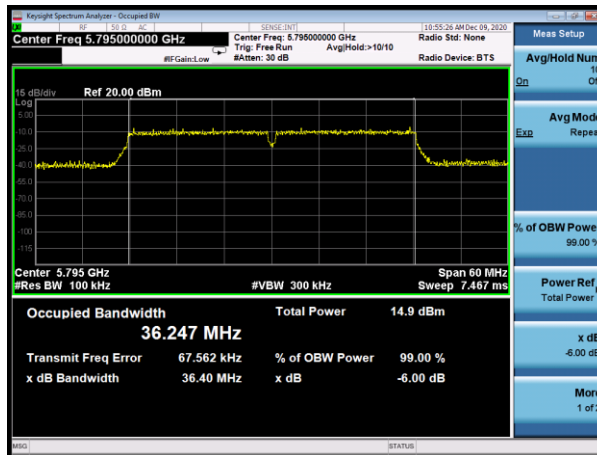


Highest channel

Test mode: 802.11ac(HT80)

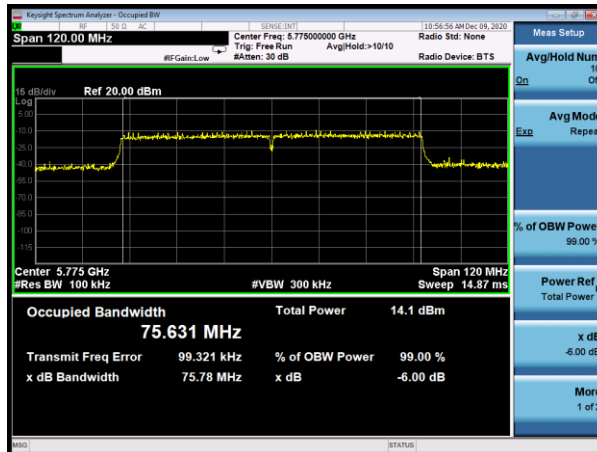


Antenna 2:


Test mode: 802.11a

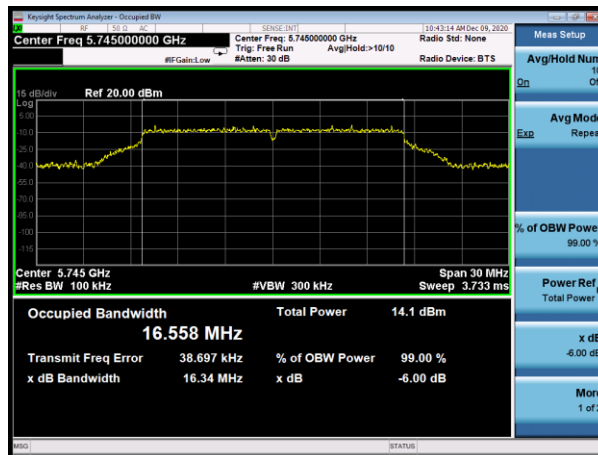

Lowest channel

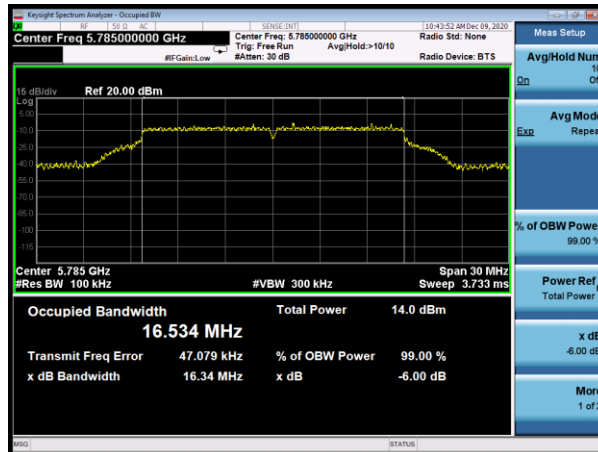


Middle channel

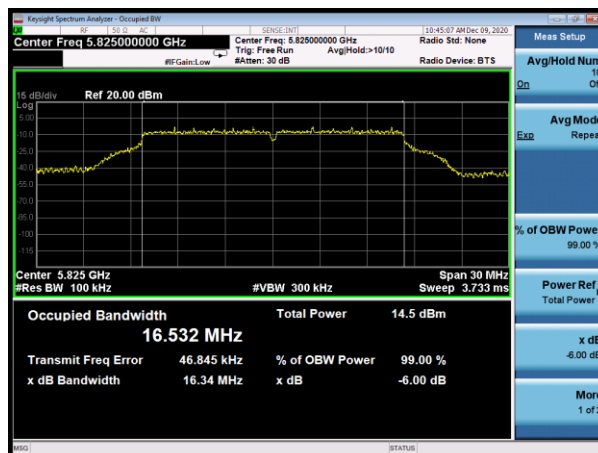


Highest channel


Test mode: 802.11n(HT20)

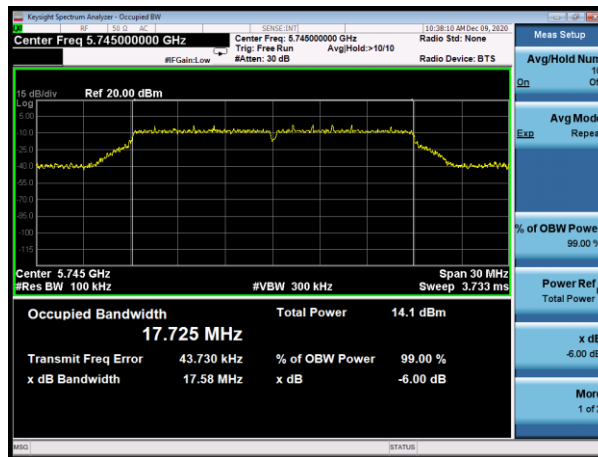

Lowest channel

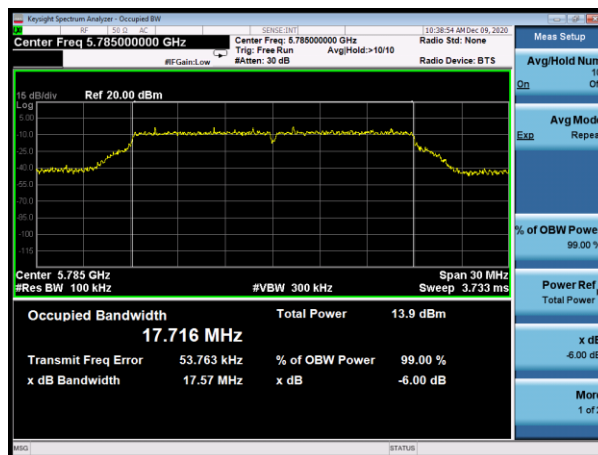


Middle channel

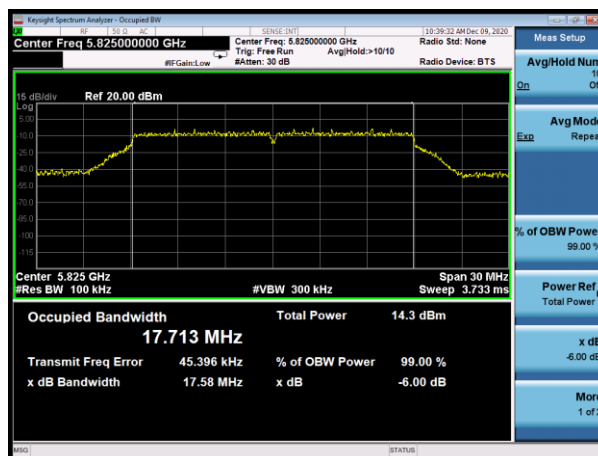


Highest channel


Test mode: 802.11ac(HT20)

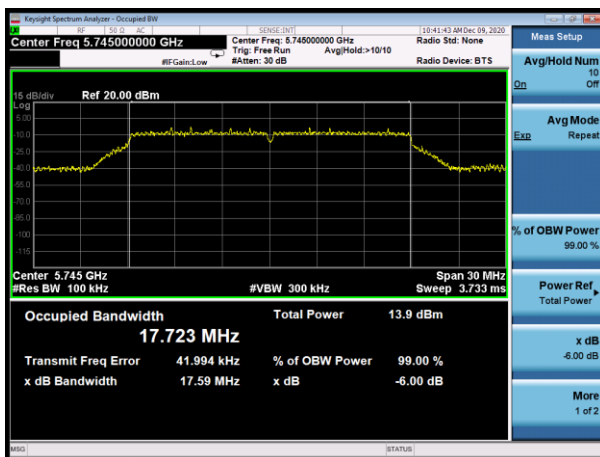

Lowest channel

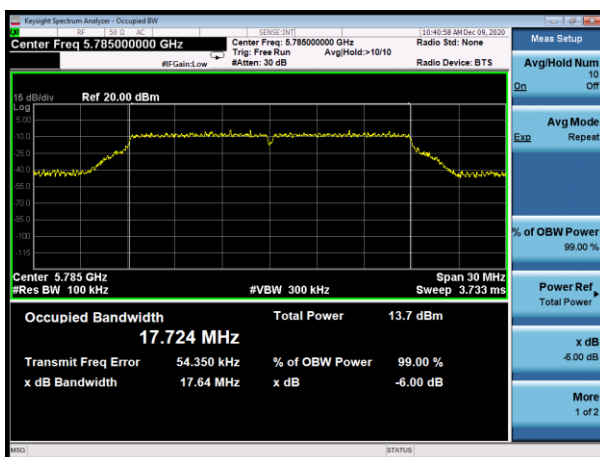


Middle channel

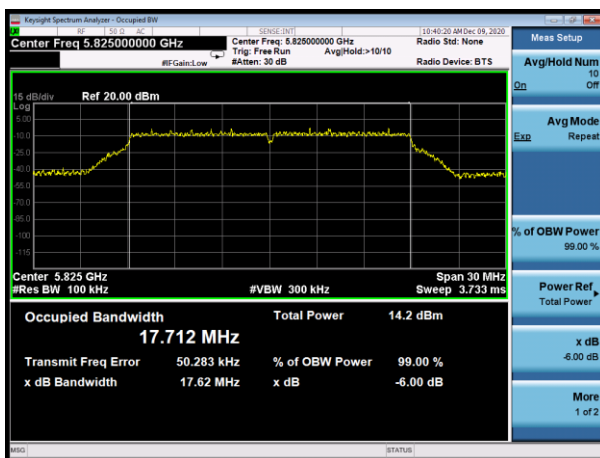


Highest channel

Test mode: 802.11n(HT40)

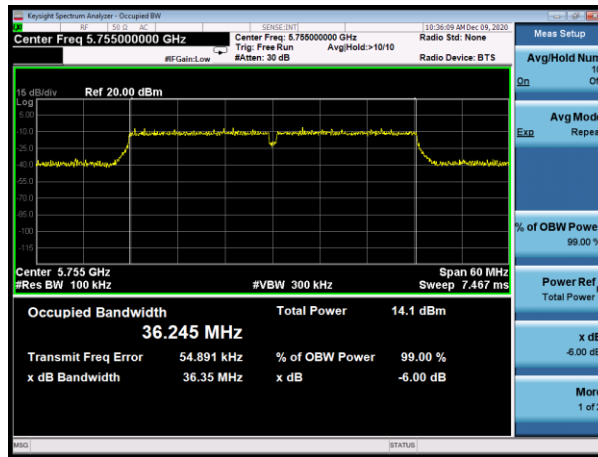


Lowest channel

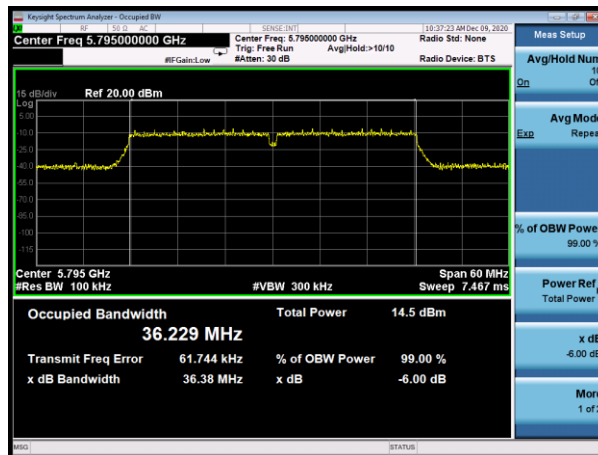


Highest channel

Test mode: 802.11ac(HT40)

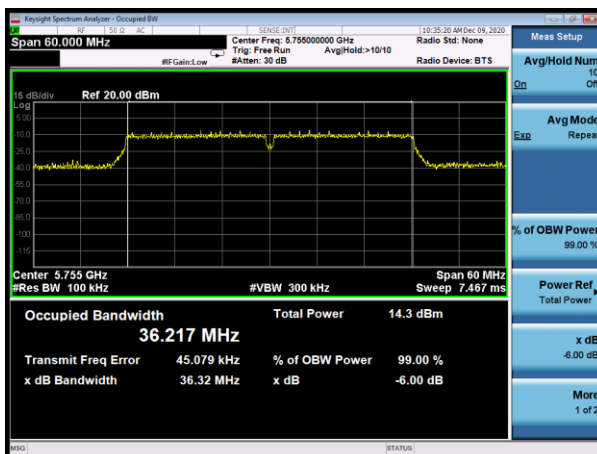


Lowest channel

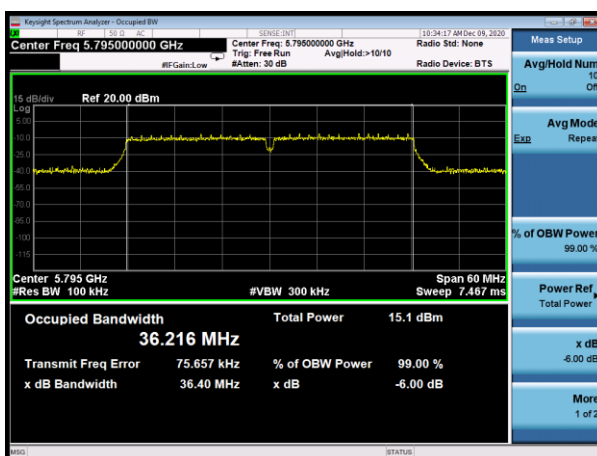


Highest channel

Test mode: 802.11ac(HT80)

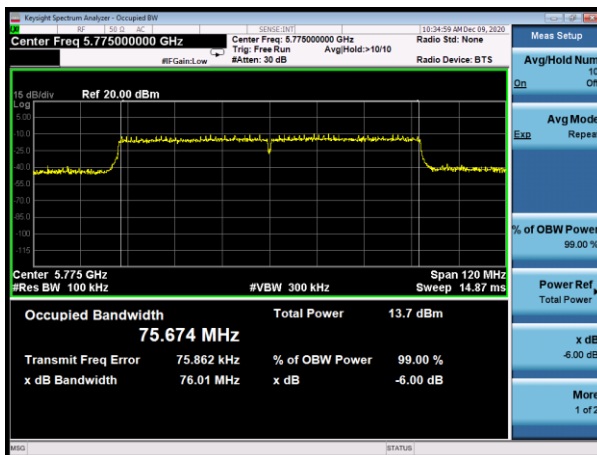

7.5 Power Spectral Density

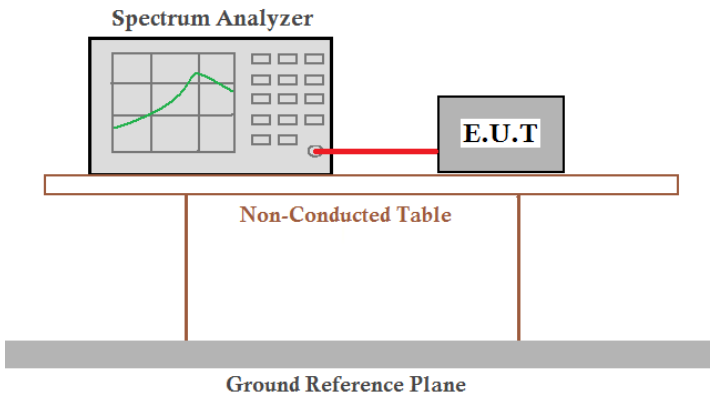Test Requirement:	FCC Part15 E Section 15.407(a)(3)
Test Method:	ANSI C63.10:2013 KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 KDB 662911 D01 Multiple Transmitter Output v02r01
Limit:	30dBm/500kHz
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data

Antenna 1:

Test CH	Power Spectral Density (dBm/500kHz)						Limit (dBm/500k Hz)	Result
	802.11a	802.11n (HT20)	802.11ac (HT20)	802.11n (HT40)	802.11ac (HT40)	802.11ac (HT80)		
Lowest	3.920	3.642	3.453	1.283	1.421	---	30.00	Pass
Middle	3.923	3.327	4.034	---	---	-1.607		
Highest	3.727	4.172	3.802	1.092	1.210	---		

Antenna 2:

Test CH	Power Spectral Density (dBm/500kHz)						Limit (dBm/500k Hz)	Result
	802.11a	802.11n (HT20)	802.11ac (HT20)	802.11n (HT40)	802.11ac (HT40)	802.11ac (HT80)		
Lowest	1.958	2.305	3.058	-0.110	0.741	---	30.00	Pass
Middle	2.341	2.161	2.238	---	---	-3.098		
Highest	2.491	2.704	2.891	0.321	0.042	---		

Remark: “---”is not applicable


MIMO:

802.11n(HT20) mode					
Test Channel	Measured Power (dBm/500kHz)		Total (dBm/500kHz)	(dBm/500kHz)	Result
	Antenna 1	Antenna 2			
Lowest	3.642	2.305	6.035	30.00	Pass
Middle	3.327	2.161	5.793	30.00	Pass
Highest	4.172	2.704	6.510	30.00	Pass
802.11ac(HT20) mode					
Test Channel	Measured Power (dBm/500kHz)		Total (dBm/500kHz)	(dBm/500kHz)	Result
	Antenna 1	Antenna 2			
Lowest	3.453	3.058	6.270	30.00	Pass
Middle	4.034	2.238	6.238	30.00	Pass
Highest	3.802	2.891	6.381	30.00	Pass
802.11n(HT40) mode					
Test Channel	Measured Power (dBm/500kHz)		Total (dBm/500kHz)	(dBm/500kHz)	Result
	Antenna 1	Antenna 2			
Lowest	1.283	-0.110	3.652	30.00	Pass
Highest	1.092	0.321	3.734	30.00	Pass
802.11 ac(HT40) mode					
Test Channel	Measured Power (dBm/500kHz)		Total (dBm/500kHz)	(dBm/500kHz)	Result
	Antenna 1	Antenna 2			
Lowest	1.421	0.741	4.105	30.00	Pass
Highest	1.210	0.042	3.675	30.00	Pass
802.11 ac(HT80)					
Test Channel	Measured Power (dBm/500kHz)		Total (dBm/500kHz)	(dBm/500kHz)	Result
	Antenna 1	Antenna 2			
Middle	-1.607	-3.098	0.721	30.00	Pass


Test plot as follows:

Antenna 1:


Test mode: 802.11a

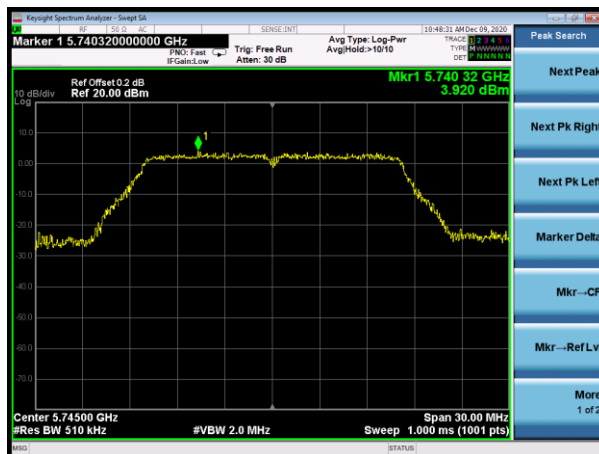

Lowest channel

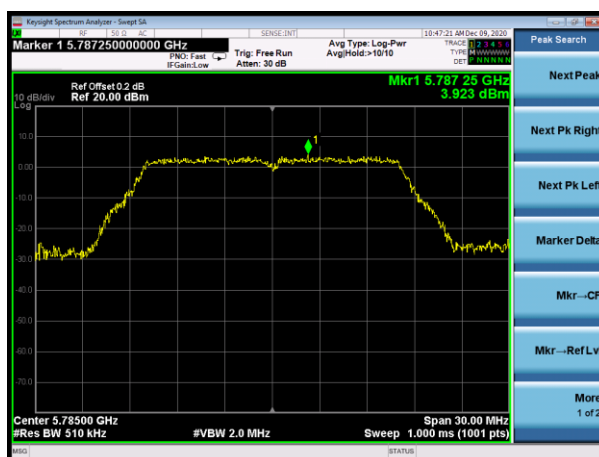

Middle channel

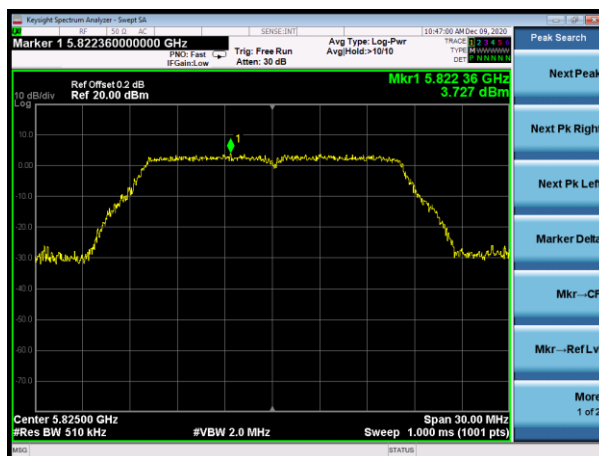


Highest channel


Test mode: 802.11n(HT20)



Lowest channel

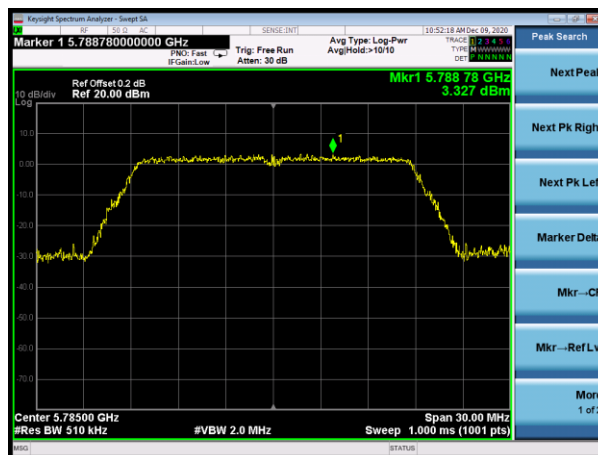


Middle channel

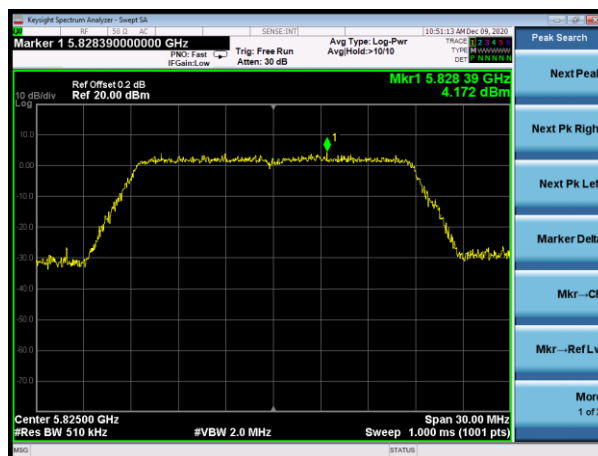

Highest channel


Test mode: 802.11ac(HT20)

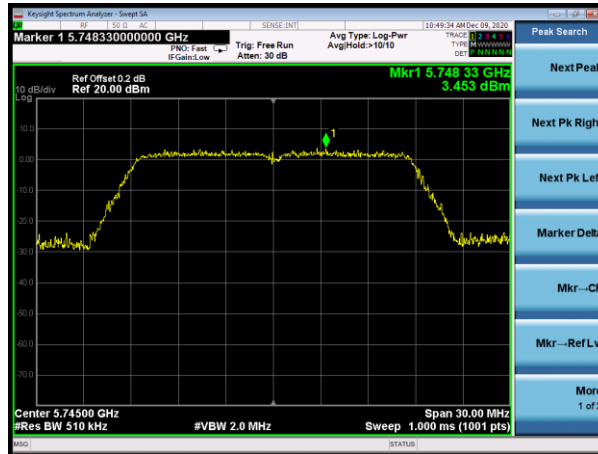

Lowest channel




Middle channel

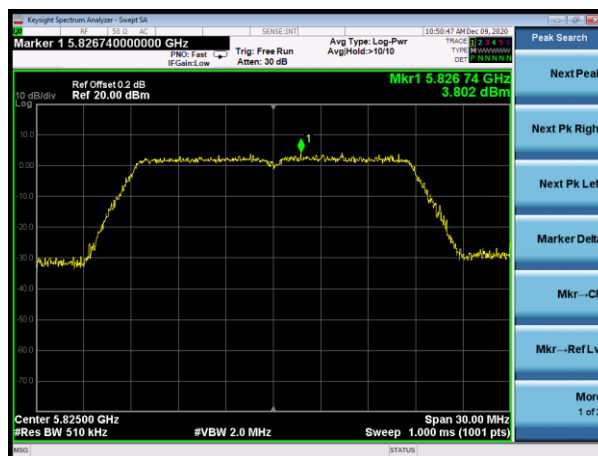

Highest channel

Test mode: 802.11n(HT40)

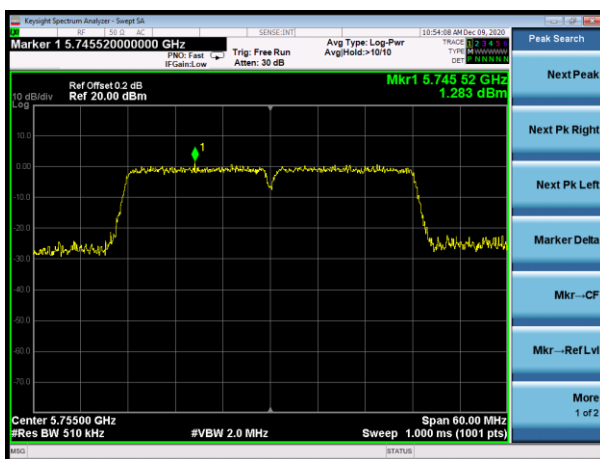

Lowest channel




Highest channel

Test mode: 802.11ac(HT40)



Lowest channel

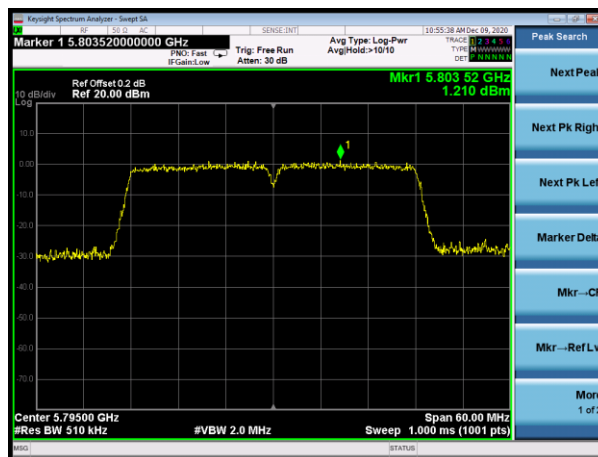

Highest channel

Test mode: 802.11ac(HT80)




Middle channel

Antenna 2:


Test mode: 802.11a



Lowest channel

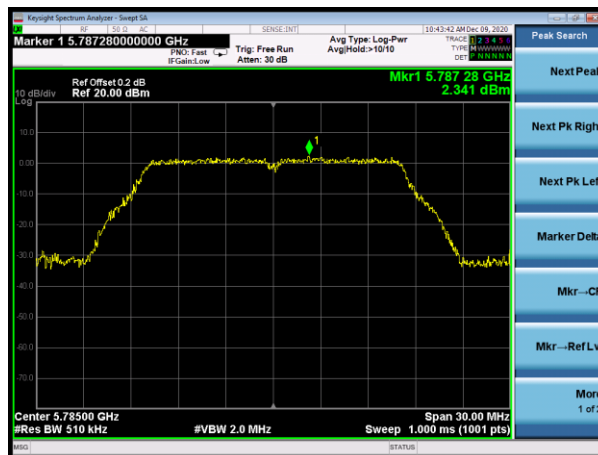


Middle channel

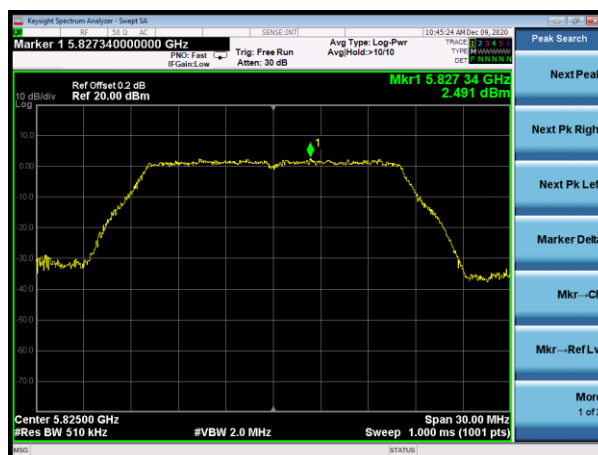


Highest channel


Test mode: 802.11n(HT20)

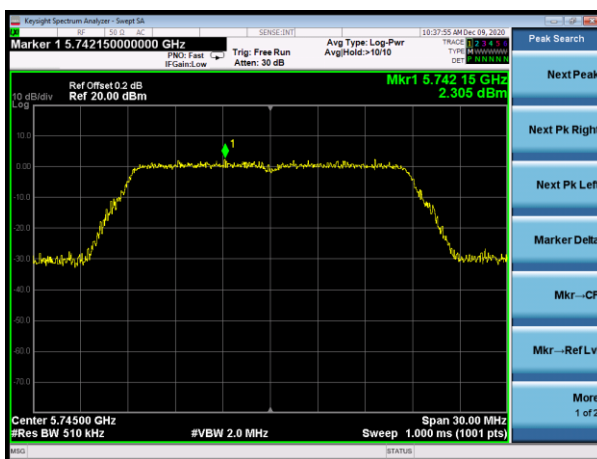

Lowest channel

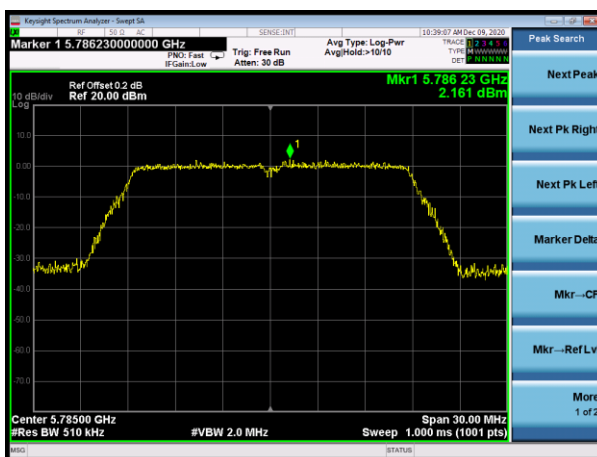

Middle channel

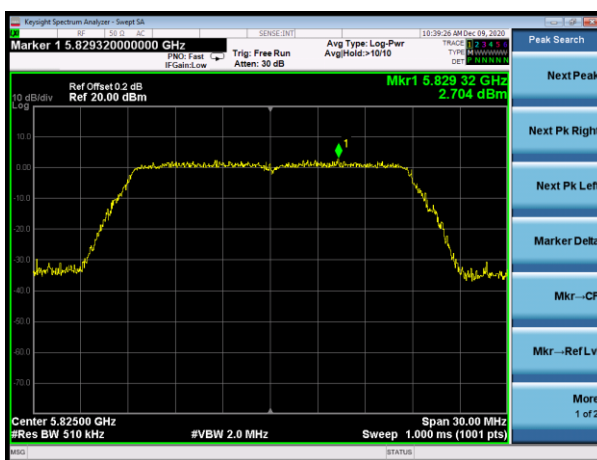


Highest channel


Test mode: 802.11ac(HT20)



Lowest channel

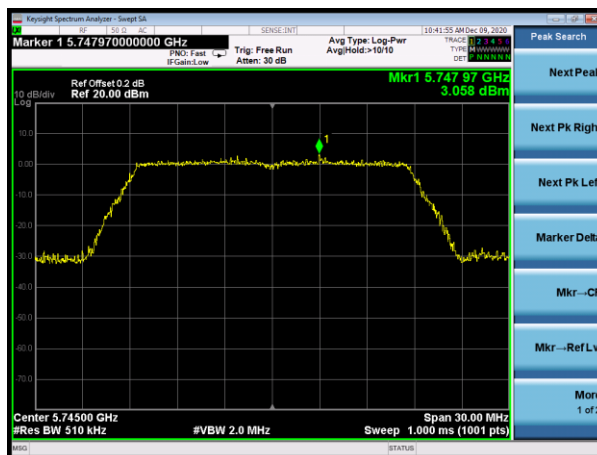

Middle channel

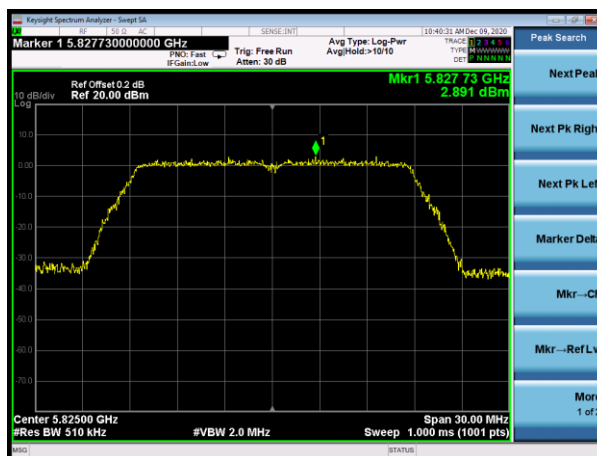

Highest channel

Test mode: 802.11n(HT40)



Lowest channel




Highest channel

Test mode: 802.11ac(HT40)




Lowest channel

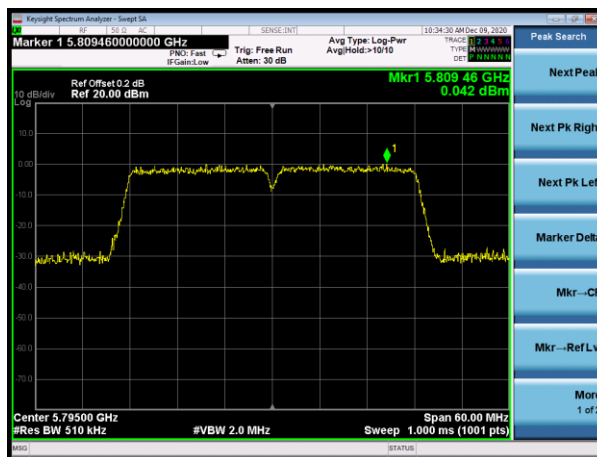

Highest channel


Test mode: 802.11ac(HT80)

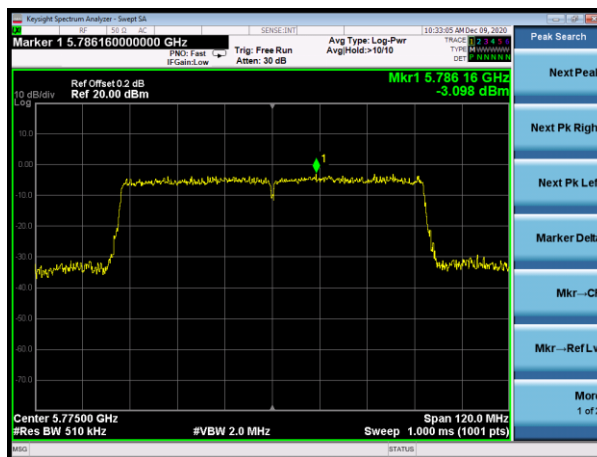

Middle channel

7.6 Band edge

7.6.1 Radiated Emission Method

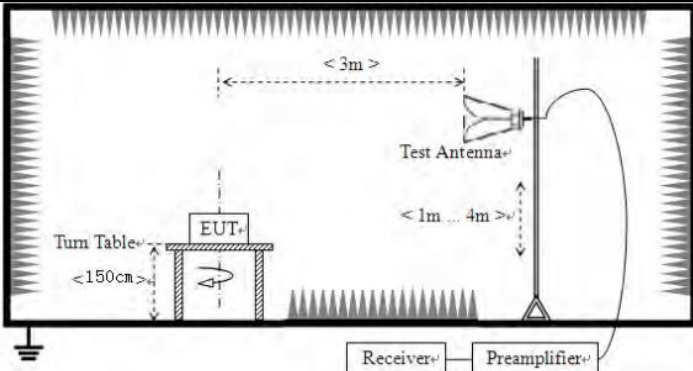Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10: 2013				
Test Frequency Range:	9kHz to 40GHz, only worse case is reported				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above 1GHz	Peak	1MHz	3MHz	Peak
		RMS	1MHz	3MHz	RMS
Limit:	All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.				
Test setup:					
Test Procedure:	1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 7. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test				

	worst case mode is recorded in the report.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Remarks:

1. Only the worst case Main Antenna test data..
2. Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
3. The emission levels of other frequencies are very lower than the limit and not show in test report.
4. The pre-test were performed on lowest, middle and highest frequencies, only the worst case's (lowest and highest frequencies) data was showed.
5. According to KDB 789033 D02v02r01 section G) 1) d), for measurements above 1000 MHz @3m distance, the limit of field strength is computed as follows:
 $E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2;$
 $E[\text{dBuV/m}] = -27 + 95.2 = 68.2\text{dBuV/m}.$
 $E[\text{dBuV/m}] = 10 + 95.2 = 105.2\text{dBuV/m}.$
 $E[\text{dBuV/m}] = 15.6 + 95.2 = 110.8\text{dBuV/m}.$
 $E[\text{dBuV/m}] = 27 + 95.2 = 122.2\text{dBuV/m}$

Measurement data:

All antennas and mode have test, only the worst case report.

Antenna 1:

IEEE 802.11a								
Peak value:								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5650.00	37.27	32.36	9.72	23.83	55.52	68.20	-12.68	Horizontal
5700.00	37.77	32.50	9.79	23.84	56.22	105.20	-48.98	Horizontal
5720.00	37.86	32.53	9.81	23.85	56.35	110.80	-54.45	Horizontal
5725.00	45.28	32.53	9.83	23.86	63.78	122.20	-58.42	Horizontal
5850.00	41.72	32.70	9.99	23.87	60.54	122.20	-61.66	Horizontal
5855.00	35.55	32.72	9.99	23.88	54.38	110.80	-56.42	Horizontal
5875.00	37.46	32.74	10.04	23.89	56.35	105.20	-48.85	Horizontal
5925.00	37.14	32.80	10.11	23.90	56.15	68.20	-12.05	Horizontal
5650.00	37.05	32.36	9.72	23.83	55.30	68.20	-12.90	Vertical
5700.00	35.87	32.50	9.79	23.84	54.32	105.20	-50.88	Vertical
5720.00	36.90	32.53	9.81	23.85	55.39	110.80	-55.41	Vertical
5725.00	44.12	32.53	9.83	23.86	62.62	122.20	-59.58	Vertical
5850.00	41.77	32.70	9.99	23.87	60.59	122.20	-61.61	Vertical
5855.00	35.74	32.72	9.99	23.88	54.57	110.80	-56.23	Vertical
5875.00	36.45	32.74	10.04	23.89	55.34	105.20	-49.86	Vertical
5925.00	37.20	32.80	10.11	23.90	56.21	68.20	-11.99	Vertical

MIMO:

IEEE 802.11n HT20								
Peak value:								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5650.00	36.78	32.36	9.72	23.83	55.03	68.20	-13.17	Horizontal
5700.00	37.66	32.50	9.79	23.84	56.11	105.20	-49.09	Horizontal
5720.00	37.74	32.53	9.81	23.85	56.23	110.80	-54.57	Horizontal
5725.00	45.25	32.53	9.83	23.86	63.75	122.20	-58.45	Horizontal
5850.00	41.69	32.70	9.99	23.87	60.51	122.20	-61.69	Horizontal
5855.00	37.15	32.72	9.99	23.88	55.98	110.80	-54.82	Horizontal
5875.00	36.58	32.74	10.04	23.89	55.47	105.20	-49.73	Horizontal
5925.00	36.45	32.80	10.11	23.90	55.46	68.20	-12.74	Horizontal
5650.00	37.31	32.36	9.72	23.83	55.56	68.20	-12.64	Vertical
5700.00	37.23	32.50	9.79	23.84	55.68	105.20	-49.52	Vertical
5720.00	36.16	32.53	9.81	23.85	54.65	110.80	-56.15	Vertical
5725.00	44.33	32.53	9.83	23.86	62.83	122.20	-59.37	Vertical
5850.00	41.59	32.70	9.99	23.87	60.41	122.20	-61.79	Vertical
5855.00	36.57	32.72	9.99	23.88	55.40	110.80	-55.40	Vertical
5875.00	36.81	32.74	10.04	23.89	55.70	105.20	-49.50	Vertical
5925.00	36.53	32.80	10.11	23.90	55.54	68.20	-12.66	Vertical

IEEE 802.11ac HT20								
Peak value:								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5650.00	37.17	32.36	9.72	23.83	55.42	68.20	-12.78	Horizontal
5700.00	37.65	32.50	9.79	23.84	56.10	105.20	-49.10	Horizontal
5720.00	37.75	32.53	9.81	23.85	56.24	110.80	-54.56	Horizontal
5725.00	45.17	32.53	9.83	23.86	63.67	122.20	-58.53	Horizontal
5850.00	41.69	32.70	9.99	23.87	60.51	122.20	-61.69	Horizontal
5855.00	35.49	32.72	9.99	23.88	54.32	110.80	-56.48	Horizontal
5875.00	37.41	32.74	10.04	23.89	56.30	105.20	-48.90	Horizontal
5925.00	37.09	32.80	10.11	23.90	56.10	68.20	-12.10	Horizontal
5650.00	36.98	32.36	9.72	23.83	55.23	68.20	-12.97	Vertical
5700.00	35.82	32.50	9.79	23.84	54.27	105.20	-50.93	Vertical
5720.00	36.84	32.53	9.81	23.85	55.33	110.80	-55.47	Vertical
5725.00	44.08	32.53	9.83	23.86	62.58	122.20	-59.62	Vertical
5850.00	41.71	32.70	9.99	23.87	60.53	122.20	-61.67	Vertical
5855.00	35.68	32.72	9.99	23.88	54.51	110.80	-56.29	Vertical
5875.00	36.41	32.74	10.04	23.89	55.30	105.20	-49.90	Vertical
5925.00	37.12	32.80	10.11	23.90	56.13	68.20	-12.07	Vertical


IEEE 802.11n HT40								
Peak value:								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5650.00	36.68	32.36	9.72	23.83	54.93	68.20	-13.27	Horizontal
5700.00	37.54	32.50	9.79	23.84	55.99	105.20	-49.21	Horizontal
5720.00	37.63	32.53	9.81	23.85	56.12	110.80	-54.68	Horizontal
5725.00	45.14	32.53	9.83	23.86	63.64	122.20	-58.56	Horizontal
5850.00	41.66	32.70	9.99	23.87	60.48	122.20	-61.72	Horizontal
5855.00	37.09	32.72	9.99	23.88	55.92	110.80	-54.88	Horizontal
5875.00	36.53	32.74	10.04	23.89	55.42	105.20	-49.78	Horizontal
5925.00	36.40	32.80	10.11	23.90	55.41	68.20	-12.79	Horizontal
5650.00	37.24	32.36	9.72	23.83	55.49	68.20	-12.71	Vertical
5700.00	37.18	32.50	9.79	23.84	55.63	105.20	-49.57	Vertical
5720.00	36.10	32.53	9.81	23.85	54.59	110.80	-56.21	Vertical
5725.00	44.29	32.53	9.83	23.86	62.79	122.20	-59.41	Vertical
5850.00	41.53	32.70	9.99	23.87	60.35	122.20	-61.85	Vertical
5855.00	36.51	32.72	9.99	23.88	55.34	110.80	-55.46	Vertical
5875.00	36.77	32.74	10.04	23.89	55.66	105.20	-49.54	Vertical
5925.00	36.45	32.80	10.11	23.90	55.46	68.20	-12.74	Vertical


IEEE 802.11ac HT40								
Peak value:								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5650.00	37.09	32.36	9.72	23.83	55.34	68.20	-12.86	Horizontal
5700.00	37.56	32.50	9.79	23.84	56.01	105.20	-49.20	Horizontal
5720.00	37.67	32.53	9.81	23.85	56.16	110.80	-54.64	Horizontal
5725.00	45.08	32.53	9.83	23.86	63.58	122.20	-58.62	Horizontal
5850.00	41.66	32.70	9.99	23.87	60.48	122.20	-61.72	Horizontal
5855.00	35.43	32.72	9.99	23.88	54.26	110.80	-56.54	Horizontal
5875.00	37.36	32.74	10.04	23.89	56.25	105.20	-48.95	Horizontal
5925.00	37.04	32.80	10.11	23.90	56.05	68.20	-12.15	Horizontal
5650.00	36.91	32.36	9.72	23.83	55.16	68.20	-13.04	Vertical
5700.00	35.77	32.50	9.79	23.84	54.22	105.20	-50.98	Vertical
5720.00	36.78	32.53	9.81	23.85	55.27	110.80	-55.53	Vertical
5725.00	44.04	32.53	9.83	23.86	62.54	122.20	-59.66	Vertical
5850.00	41.65	32.70	9.99	23.87	60.47	122.20	-61.73	Vertical
5855.00	35.62	32.72	9.99	23.88	54.45	110.80	-56.35	Vertical
5875.00	36.37	32.74	10.04	23.89	55.26	105.20	-49.94	Vertical
5925.00	37.05	32.80	10.11	23.90	56.06	68.20	-12.14	Vertical

IEEE 802.11ac HT80								
Peak value:								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5650.00	36.60	32.36	9.72	23.83	54.85	68.20	-13.35	Horizontal
5700.00	37.45	32.50	9.79	23.84	55.90	105.20	-49.31	Horizontal
5720.00	37.55	32.53	9.81	23.85	56.04	110.80	-54.76	Horizontal
5725.00	45.05	32.53	9.83	23.86	63.55	122.20	-58.65	Horizontal
5850.00	41.63	32.70	9.99	23.87	60.45	122.20	-61.75	Horizontal
5855.00	37.03	32.72	9.99	23.88	55.86	110.80	-54.94	Horizontal
5875.00	36.48	32.74	10.04	23.89	55.37	105.20	-49.83	Horizontal
5925.00	36.35	32.80	10.11	23.90	55.36	68.20	-12.84	Horizontal
5650.00	37.17	32.36	9.72	23.83	55.42	68.20	-12.78	Vertical
5700.00	37.13	32.50	9.79	23.84	55.58	105.20	-49.62	Vertical
5720.00	36.04	32.53	9.81	23.85	54.53	110.80	-56.27	Vertical
5725.00	44.25	32.53	9.83	23.86	62.75	122.20	-59.45	Vertical
5850.00	41.47	32.70	9.99	23.87	60.29	122.20	-61.91	Vertical
5855.00	36.45	32.72	9.99	23.88	55.28	110.80	-55.52	Vertical
5875.00	36.73	32.74	10.04	23.89	55.62	105.20	-49.58	Vertical
5925.00	36.38	32.80	10.11	23.90	55.39	68.20	-12.81	Vertical


7.7 Spurious Emission

7.7.1 Radiated Emission Method

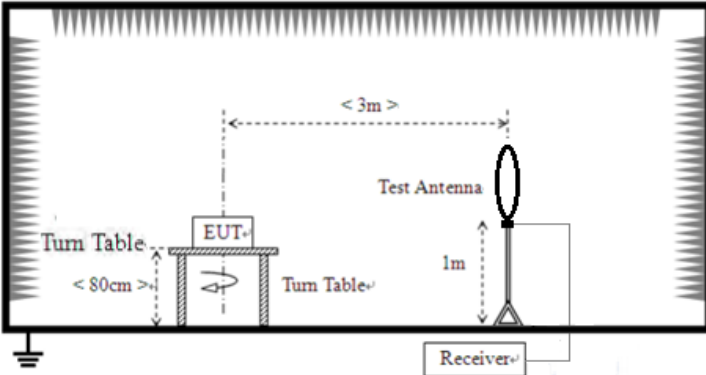Test Requirement:	FCC Part15 C Section 15.209, Part 15E Section 15.407(b)(4)				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 40GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9kHz-150KHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value
	150kHz-30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		AV	1MHz	3MHz	Average Value
Limit:	Frequency	Limit (uV/m)	Value	Measurement Distance	
	0.009MHz-0.490MHz	2400/F(KHz)	QP	300m	
	0.490MHz-1.705MHz	24000/F(KHz)	QP	300m	
	1.705MHz-30MHz	30	QP	30m	
	30MHz-88MHz	100	QP	3m	
	88MHz-216MHz	150	QP		
	216MHz-960MHz	200	QP		
	960MHz-1GHz	500	QP		
	Frequency	Limit (dBm/MHz)	Remark		
	Above 1GHz	-27.0	Peak Value		
Test setup:	For radiated emissions from 9kHz to 30MHz  For radiated emissions from 30MHz to 1GHz				

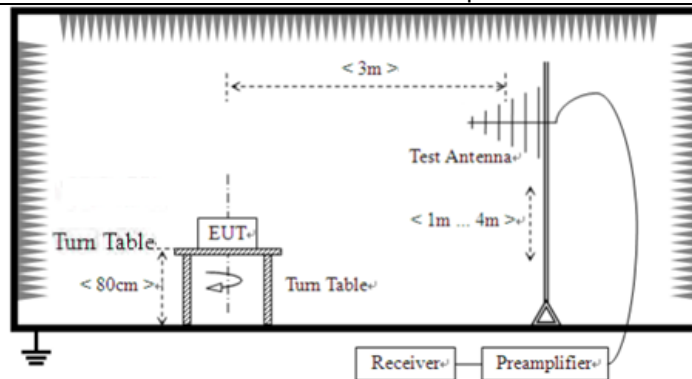

For radiated emissions above 1GHz

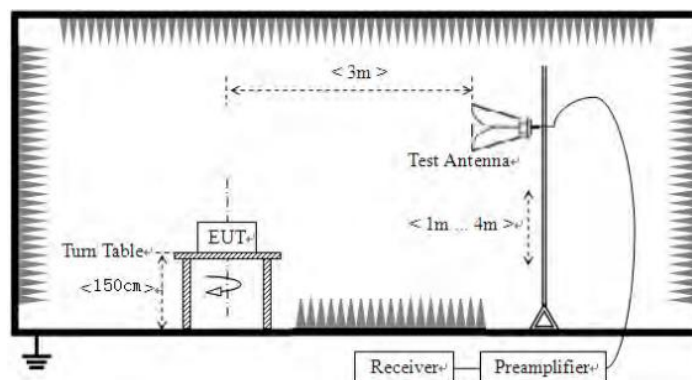

Test Procedure:

1. The EUT was placed on the top of a rotating table (0.8m for below 1GHz and 1.5 meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
7. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test

	worst case mode is recorded in the report.					
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar
Test voltage:	AC 120V, 60Hz					
Test results:	Pass					

Remarks:

1. Only the worst case Main Antenna test data.
2. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.

Measurement Data:


9 kHz ~ 30 MHz

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

Below 1GHz


Pre-scan all test modes, found worst case at antenna 1 5745MHz of 802.11a mode, and so only show the test result of antenna 1 5745MHz of 802.11a mode

Horizontal:

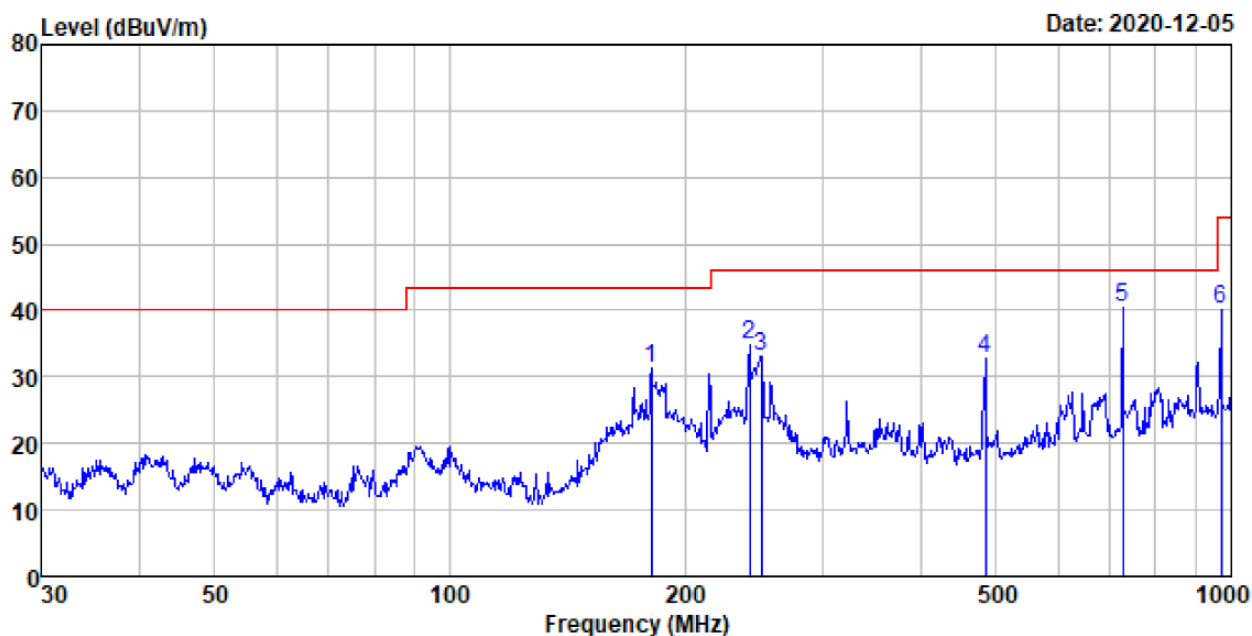

	Read	Antenna	Preamp	Cable		Limit	Over	
Freq	Level	Factor	Factor	Loss	Level	Line	Limit	Remark
-----	-----	-----	-----	-----	-----	-----	-----	-----
MHz	dBm	dB/m	dB	dB	dBm/m	dBm/m	dB	
1	181.283	56.72	9.97	37.24	1.75	31.20	43.50	-12.30 QP
2	241.676	57.62	12.48	37.37	2.08	34.81	46.00	-11.19 QP
3	250.301	55.67	12.71	37.38	2.12	33.12	46.00	-12.88 QP
4	483.910	49.81	17.11	37.51	3.23	32.64	46.00	-13.36 QP
5	726.805	53.68	20.27	37.63	4.19	40.51	46.00	-5.49 QP
6	968.934	49.77	22.71	37.54	5.11	40.05	54.00	-13.95 QP

Vertical:

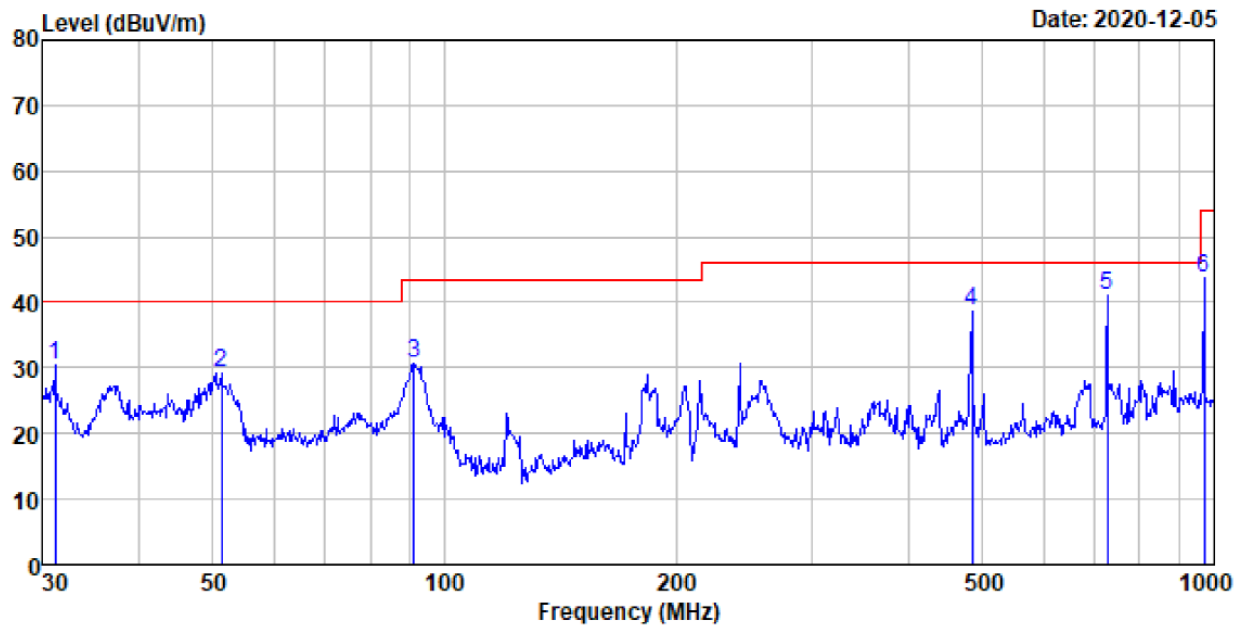

	Freq	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBm	dB/m	dB	dB	dBm/m	dBm/m	dB	
1	31.180	55.01	9.92	35.09	0.56	30.40	40.00	-9.60	QP
2	51.301	51.67	13.00	36.20	0.78	29.25	40.00	-10.75	QP
3	91.175	55.23	10.94	36.65	1.12	30.64	43.50	-12.86	QP
4	483.910	55.78	17.11	37.51	3.23	38.61	46.00	-7.39	QP
5	726.805	54.32	20.27	37.63	4.19	41.15	46.00	-4.85	QP
6	968.934	53.39	22.71	37.54	5.11	43.67	54.00	-10.33	QP

Above 1GHz:

All of antenna 1, antenna 2 and MIMO of 802.11a,11n(HT20),11ac(HT20),11n(HT40),11ac(HT40), 11ac(HT80) all have been tested. Only the data of worst case of each channel plan (nominal bandwidth = 20MHz, 40MHz, 80MHz) is reported.

Antenna 1:

Test mode:		802.11a		Test channel:		lowest	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dBuV/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
V	11490	22.93	21.64	44.57	74.00	-29.43	PK
V	17235	20.57	21.80	42.37	74.00	-31.63	PK
H	11490	20.83	21.83	42.66	74.00	-31.34	PK
H	17235	19.56	21.67	41.23	74.00	-32.77	PK

Test mode:		802.11a		Test channel:		Middle	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dBuV/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
V	11570	20.76	21.64	42.40	74.00	-31.60	PK
V	17355	19.36	21.80	41.16	74.00	-32.84	PK
H	11570	17.21	21.83	39.04	74.00	-34.96	PK
H	17355	17.80	21.67	39.47	74.00	-34.53	PK

Test mode:		802.11a		Test channel:		Highest	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dBuV/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
V	11650	20.93	21.64	42.57	74.00	-31.43	PK
V	17475	18.45	21.80	40.25	74.00	-33.75	PK
H	11650	18.87	21.83	40.70	74.00	-33.30	PK
H	17475	16.86	21.67	38.53	74.00	-35.47	PK

MIMO:

Test mode:		802.11ac(HT40)		Test channel:		Lowest	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dBuV/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
V	11510	22.60	21.67	44.27	74.00	-29.73	PK
V	17265	22.35	21.83	44.18	74.00	-29.82	PK
H	11510	23.19	21.67	44.86	74.00	-29.14	PK
H	17265	22.98	21.83	44.81	74.00	-29.19	PK


Test mode:		802.11ac(HT40)		Test channel:		Highest	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dBuV/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
V	11590	20.83	21.67	42.50	74.00	-31.50	PK
V	17385	19.42	21.83	41.25	74.00	-32.75	PK
H	11590	17.29	21.67	38.96	74.00	-35.04	PK
H	17385	17.88	21.83	39.71	74.00	-34.29	PK

Test mode:		802.11ac(HT80)		Test channel:		Middle	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dBuV/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
V	11510	21.67	21.65	43.32	74.00	-30.68	PK
V	17265	21.42	21.81	43.23	74.00	-30.77	PK
H	11510	21.97	21.65	43.62	74.00	-30.38	PK
H	17265	23.22	21.81	45.03	74.00	-28.97	PK

Notes:

1. Measure Level = Reading Level + Factor.
2. The test trace is same as the ambient noise (the test frequency range: 18GHz~40GHz), therefore no data appear in the report.
3. This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.

7.8 Frequency stability

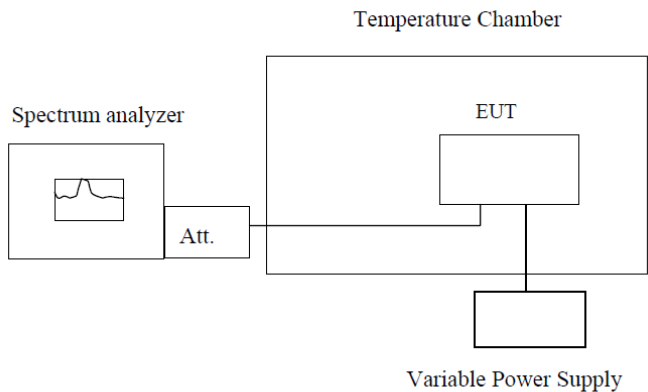Test Requirement:	FCC Part15 C Section 15.407(g)
Test Method:	ANSI C63.10:2013, FCC Part 2.1055
Limit:	Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified
Test Procedure:	The EUT was setup to ANSI C63.4, 2003; tested to 2.1055 for compliance to FCC Part 15.407(g) requirements.
Test setup:	 Note : Measurement setup for testing on Antenna connector
Test Instruments:	Refer to section 5.10 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement data:

Band: VI			Test Frequency: 5745.00MHz	
Temperature (°C)	Voltage (V)	Frequency Deviation (Hz)	Frequency Deviation (ppm)	Result
25	AC 120V	35000.00	6.09225	PASS
25	AC 108V	31000.00	5.39600	PASS
25	AC 132V	34000.00	5.91819	PASS

Band: VI			Test Frequency: 5745.00MHz	
Voltage (V)	Temperature (°C)	Frequency Deviation (Hz)	Frequency Deviation (ppm)	Result
AC 120V	-20	33000.00	5.74413	PASS
AC 120V	-10	30000.00	5.22193	PASS
AC 120V	0	27000.00	4.69974	PASS
AC 120V	10	25000.00	4.35161	PASS
AC 120V	20	25000.00	4.35161	PASS
AC 120V	30	27000.00	4.69974	PASS
AC 120V	40	31000.00	5.39600	PASS
AC 120V	50	30000.00	5.22193	PASS

8 Test Setup Photo

Reference to the **appendix I** for details.

9 EUT Constructional Details

Reference to the **appendix II** for details.

-----END-----