

Test Report 19-1-0142201T08a



Deutsche
Akkreditierungsstelle
D-PL-12047-01-01
D-PL-12047-01-03
D-PL-12047-01-04

Number of pages:	28	Date of Report:	2020-Feb-14
Testing company:	CETECOM GmbH Im Teelbruch 116 45219 Essen Germany Tel. + 49 (0) 20 54 / 95 19-0 Fax: + 49 (0) 20 54 / 95 19-150	Applicant:	GROHE AG Industriepark Edelburg 58675, Hemer Germany
Test Object / Tested Device(s):	Remote Control, Rainshower 310 SmartConnect (26646)		
Listing FCC ID:	WFK-RCBT001	ISED:	7787A-RCBT001
Testing has been carried out in accordance with:	Title 47 CFR, Chapter I FCC Regulations, Subchapter A Subpart C: §15.247 (DTS) , RSS-247, Issue 2 (DTS) RSS-Gen., Issue 5 Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Tested Technology:	BT LE		
Test Results:	☒ The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document		
Signatures:	Dipl.-Ing. C. Lorenz Authorization of test report B.Sc. M. Ahmed Test manager		

Table of Contents

1	General information	4
1.1	Disclaimer and Notes	4
1.1.1	Summary of Test Results	5
1.2	Summary of Test Methods	5
2	Administrative Data	6
2.1	Identification of the Testing Laboratory	6
2.2	General limits for environmental conditions	6
2.3	Test Laboratories sub-contracted	6
2.4	Organizational Items	6
2.5	Applicant's details	6
2.6	Manufacturer's details	6
2.7	EUT: Type, S/N etc. and short descriptions used in this test report	7
2.8	Auxiliary Equipment (AE): Type, S/N etc. and short descriptions	7
2.9	Connected cables	7
2.10	EUT set-ups	7
2.11	EUT operation modes	7
3	Equipment under test (EUT)	8
3.1	General Data of Main EUT as Declared by Applicant	8
3.2	Detailed Technical data of Main EUT as Declared by Applicant	8
3.3	Modifications on Test sample	8
3.4	Software Used	8
4	Measurements	9
4.1	Duty-Cycle	9
4.2	Peak output power (Sweep)	10
4.3	Power spectral density	11
4.4	Minimum Emission Bandwidth 6 dB	12
4.5	Occupied Channel Bandwidth 99%	13
4.6	Emissions in non-restricted frequency bands	14
4.7	Radiated field strength emissions below 30MHz	16
4.8	Radiated field strength emissions 30MHz – 1GHz	19
4.9	Radiated field strength emissions above 1GHz	22
4.10	Radiated Band-Edge emissions	24
4.11	Results from external laboratory	26
4.12	Opinions and interpretations	26
5	Equipment lists	26
6	Measurement Uncertainty valid for conducted/radiated measurements	27
7	Versions of test reports (change history)	28

8	Annex 1, Test result diagrams	28
9	Annex 2, External Pictures	28
10	Annex 3, Test set-up photographs.....	28

Table of Annex			
Annex No.	Contents	Reference Description	Total Pages
Annex 1	Test result diagrams	CETECOM_TR19_1_0142201T08a_A1	40
Annex 2	External photographs of EUT	CETECOM_TR19_1_0142201T08a_A2	4
Annex 3	Test set-up photographs	CETECOM_TR19_1_0142201T08a_A3	6
The listed attachments are separate documents. For Internal photographs of EUT please refer to applicant's documentation.			

1 General information

1.1 Disclaimer and Notes

The test results of this test report relate exclusively to the test item specified in this test report as specified in chapter 2.7. CETECOM does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM.

The testing service provided by CETECOM has been rendered under the current "General Terms and Conditions for CETECOM". CETECOM will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CETECOM test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CETECOM test report include or imply any product or service warranties from CETECOM, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CETECOM. All rights and remedies regarding vendor's products and services for which CETECOM has prepared this test report shall be provided by the party offering such products or services and not by CETECOM. In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 10 years at CETECOM.

Also we refer on special conditions which the applicant should fulfill according §2.927 to §2.948, special focus regarding modification of the equipment and availability of sample equipment for market surveillance tests.

1.1. Summary of Test Results

The EUT integrates a BTLE transmitter. Other implemented wireless technologies were not considered within this test report.

Test case	Reference Clause FCC ☒	Reference Clause ISSED ☒	Page	Remark	Result
Duty-Cycle	§15.35(c)	RSS-Gen Issue 5, §8.2	9	--	Pass
Minimum Emission Bandwidth 6 dB	§15.247 5.2(a)	RSS-247, § 5.2(a) RSS-Gen Issue 5, § 6.7	12	--	Pass
Occupied Channel Bandwidth 99%	2.1049(h)	RSS-Gen Issue 5, § 6.7	13	--	Pass
Peak output power (Sweep)	§15.247(b)(3)	RSS-247, § 5.4(d)	10	--	Pass
Transmitter Peak output power radiated	§15.247(b)(4)(c)(i)	RSS-247, § 5.4(d)	--	--	Pass
Emissions in non-restricted frequency bands	§15.247(d)	RSS-247, § 5.5	14	--	Pass
Radiated Band-Edge emissions	§15.205(b) §15.247(d)	RSS-Gen: Issue 5 §8.9, §8.10 RSS-247, § 5.5	24	--	Pass
Power spectral density	§15.247(e)	RSS-247, § 5.2(b)	11	--	Pass
Radiated field strength emissions below 30MHz	§15.205(a) §15.209(a)	RSS-Gen: Issue 5 §8.9 Table 6	16	--	Pass
Radiated field strength emissions 30MHz – 1GHz	§15.209 §15.247(d)	RSS-Gen: Issue 5 §8.9 Table 5 RSS-247, § 5.5	19	--	Pass
Radiated field strength emissions above 1GHz	§15.209(a) §15.247(d)	RSS-Gen: Issue 5: §8.9 Table 5+7 RSS-247, § 5.5	22	--	Pass
AC-Power Lines Conducted Emissions	§15.207	RSS-Gen Issue 5: § 8.8, Table 4	--	--	Not applicable

PASSED

FAILED

NP

The EUT complies with the essential requirements in the standard.

The EUT does not comply with the essential requirements in the standard.

The test was not performed by the CETECOM Laboratory.

1.2. Summary of Test Methods

Test case	Test method
Duty-Cycle	ANSI 63.10:2013, §11.6(b)
Minimum Emission Bandwidth 6 dB	ANSI C63.10:2013, §6.9.2, §11.8
Occupied Channel Bandwidth 99%	ANSI C63.10:2013, §6.9.3
Peak output power (Sweep)	ANSI C63.10:2013, §11.9
Power spectral density	ANSI C63.10:2013, §11.10
Emissions in non-restricted frequency bands	ANSI C63.10:2013, §11.11, §6.10.5
Radiated Band-Edge emissions	ANSI C63.10:2013; "Marker-Delta method", §6.10.5, §11.13
Transmitter Peak output power radiated	Result calculated with measured conducted RF-power value and stated/measured antenna gain for band of interest
Radiated field strength emissions below 30MHz	ANSI C63.10:2013 §6.3, §6.4
Radiated field strength emissions 30MHz- 1GHz	ANSI C63.4-2014 §8.2.3, ANSI C63.10:2013 §6.3, § 6.5
Radiated field strength emissions above 1GHz	ANSI C63.4-2014 §8.3, ANSI C63.10:2013 §6.3, § 6.6
AC-Power Lines Conducted Emissions	ANSI C63.4-2014 §7, ANSI C63.10:2013 § 6.2

And reference also to Test methods in latest KDB558074

2 Administrative Data

2.1 Identification of the Testing Laboratory

Company name:	CETECOM GmbH
Address:	Im Teelbruch 116 45219 Essen - Kettwig Germany
Responsible for testing laboratory:	Mr. Volker Wittmann
Accreditation scope:	DAkkS Webpage
Test location:	CETECOM GmbH; Im Teelbruch 116 ;45219 Essen - Kettwig

2.2 General limits for environmental conditions

Temperature:	22±2° C
Relative. humidity:	45±15% rH

2.3 Test Laboratories sub-contracted

Company name:

2.4 Organizational Items

Order No.:	19-1-01422
Responsible for test report	P. Marzotko
Project leader:	M. Ahmed
Receipt of EUT:	21.01.2020
Date(s) of test:	2020-Jan-13 – 2020-Feb-04
Date of report:	2020-Feb-14
Version of template:	13.02

2.5 Applicant's details

Applicant's name:	Grohe AG
Address:	Industriepark Edelburg 58675 Hemer Nordrhein-Westfalen Deutschland
Contact Person:	Mr. Ralf Oberste-Lehn

2.6 Manufacturer's details

Manufacturer's name:	see Applicant's details
Address:	see Applicant's details

2.7 EUT: Type, S/N etc. and short descriptions used in this test report

Short description*)	PMT Sample No.	EUT	Type	S/N	HW status	FW status
EUT A	Sample 30	Rainshower 310 SmartConnect (26646)	Remote Control	--	GH_RC-1V3	19072.3.1.0
EUT B	Sample 29	Rainshower 310 SmartConnect (26646)	Remote Control	--	GH_RC-1V3	19072.3.1.0

*) EUT short description is used to simplify the identification of the EUT in this test report.

2.8 Auxiliary Equipment (AE): Type, S/N etc. and short descriptions

AE short description *)	Auxiliary Equipment	Type	S/N serial number	HW hardware status	SW software status
AE1	USB-TTL cable	--	--	--	--
AE2	Debug Board	--	1091957	--	--
AE3	DELL Laptop	Latitude E6420	DPN:VVF52 A01	Intel core i5	Windows 7

*) AE short description is used to simplify the identification of the auxiliary equipment in this test report.

2.9 Connected cables

Cable short description *)	Cable type	Connectors	Length
CAB 1	--	--	--
CAB 2	--	--	--

*) AE short description is used to simplify the identification of the auxiliary equipment in this test report.

2.10 EUT set-ups

set-up no. *)	Combination of EUT and AE	Description
1	EUT A + AE1 + AE2 + AE3	Used for Radiated measurements. AE3 was used to establish the required operating mode and to power the EUT via USB cable
2	EUT B + AE1 + AE2 + AE3	Used for Conducted measurements. AE3 was used to establish the required operating mode and to power the EUT via USB cable

*) EUT set-up no. is used to simplify the identification of the EUT set-up in this test report.

2.11 EUT operation modes

EUT operating mode no. *)	Operating modes	Additional information
op. 1	BTLE_TX-Mode	With help of special test firmware a continuous traffic mode could be established on certain channels. The test software used is (nRFgo Studio v 1.21.2). We refer to applicant's information /papers for details about necessary commands. Tests on advertising channels have been performed.
op. 2	BTLE_RX-Mode	With help of special test firmware RX-mode was set-up. The test software used is (nRFgo Studio v 1.21.2). We refer to applicants information/papers for details about necessary commands.

*) EUT operating mode no. is used to simplify the test report.

3 Equipment under test (EUT)

3.1 General Data of Main EUT as Declared by Applicant

Product name	Rainshower 310 SmartConnect (26646)		
Kind of product	Remote Control		
Firmware	☐ for normal use	☒ Special version for test execution	
	☐ AC Mains	-	
	☒ DC Mains	via Laptop through development board	
	☐ Battery	Lithium Ion battery	
Operational conditions	T _{nom} = 22 °C	T _{min} = 5 °C	T _{max} = 70 °C
EUT sample type	Pre-Production		
Weight	-		
Size	-		
Interfaces/Ports	-		
For further details refer Applicants Declaration & following technical documents			
For further details regarding radio parameters, please refer to Bluetooth Core Specification			

3.2 Detailed Technical data of Main EUT as Declared by Applicant

Frequency Band	2.4 GHz ISM Band (2400 MHz - 2483.5 MHz)		
Number of Channels (USA/Canada -bands)	40 (37 Hopping + 3 Advertising)		
Nominal Channel Bandwidth	2 MHz		
Type of Modulation Data Rate	☒ GFSK 1 Mbit / s	☐ GFSK 2 Mbit / s	
	☐ GFSK 500 kbit / s	☐ GFSK 125 kbit / s	
Other wireless options	☐ a/n/ac mode ☐ b/g/n mode ☐ Bluetooth EDR (not tested within this report) ☐ Cellular transceiver (2G/3G/4G/5G/GPS, not tested in this report)		
Max. Conducted Output Power (Measured RMS Power)	-0.9 dBm		
EIRP Power (Calculated EIRP)	-0.4 dBm		
Antenna Type(s)	PCB		
Antenna Gain(s)	0.5 dBi		
FCC label attached	☐		
Test firmware / software and storage location	nRFgo Studio, Version 1.21.2		
For further details refer Applicants Declaration & following technical documents			
Description of Reference Document (supplied by applicant)	Version	Total Pages	
Engineering Fact Sheet – Rainshower 310 2-Jet Digital	19.09.2018	17	

3.3 Modifications on Test sample

Additions/deviations or exclusions	
------------------------------------	--

3.4 Software Used

Software	Type	Version	Storage	Date
nRFgo Studio	Configuring and evaluation software	1.21.2 - Win32	AE3	2015

4 Measurements

4.1 Duty-Cycle

Testing method:

The measurement is made according to relevant reference clauses:
(See Tables *Summary of Test Results* and *Summary of Test Methods* on page 5)

The necessary duty-cycle correction factor is determined on nominal conditions on middle channel only. It is assumed that no noticeable changes occur when tested on other channels or climatic conditions.

EUT settings

The EUT was instructed to send with maximum power (if adjustable) according applicants instructions.
Different modulation characteristics have been checked, e.g. data rates which EUT can operate.

A special firmware program is used for test purposes. In opposite to normal operating mode a higher duty-cycle is set in order to facilitate the measurements. This is maximized at the extent possible.

The necessary duty-cycle correction factor is determined on nominal conditions on one channel in each operable frequency-band. It is assumed that no noticeable changes occur when tested on other channels or climatic conditions. The Duty-Cycle was constant, means without variations.

Formula to calculate Duty-Cycle:

Duty cycle calculations: $x = \frac{TX_{ON}}{(TX_{ON} + TX_{OFF})}$	Duty cycle factor: DC=	Regarding power: $10 * \log(1/x)$ dB
		Regarding field strength: $20 * \log(1/x)$ dB

☐ The results were corrected in order to evaluate for worst-case result each time when average values are necessary for example average radiated emissions or similar

☒ No correction necessary: Duty-Cycle > 98%

4.1.1 Result


Duty-Cycle Correction [dB]	Result
--	PASS

4.2 Peak output power (Sweep)

4.2.1 Description of the general test setup and methodology, see below example:

The EUT's RF-signal is coupled out by a suitable antenna coupling connector (1). The signal is first attenuated (2) then connected to power meter (3) or spectrum-analyzer (4) for RF-conducted measurements. The specific attenuation loss is determined prior to the measurement within a set-up attenuation measurement. These are then taken into account by correcting the measurement readings.

4.2.2 Schematic:

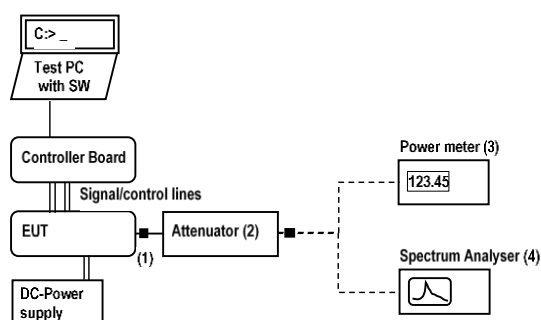

4.2.3 Testing method:

The measurement is made according to relevant reference clauses:

(See Tables *Summary of Test Results* and *Summary of Test Methods* on page 5)

Measurement is made using Rohde & Schwarz TS8997 test system.

Test method	Maximum peak conducted output power(RBW = DTS-bandwidth of the signal)
Remarks	In Compliance

The measurement was performed in non-hopping transmission mode with the carrier set to lowest/middle and highest channel.

EUT settings

The EUT was instructed to send with maximum power (if adjustable) according applicants instructions.

Different modulation characteristics have been checked, e.g. data rates which EUT can operate

4.2.4 Limit

Frequency Range [MHz]	Limit [W]	Limit [dBm]	Detector	RBW / VBW [MHz]
2400 - 2483.5	1	30	MaxPeak	2 / 10

4.2.5 Result

Mode	Channel	Frequency [MHz]	Max Peak Power [MaxPeak]	Result
GFSK-1Mbps	01	2402	-1.1	PASS
	20	2442	-0.9	PASS
	39	2480	-1.2	PASS


Remark: for more information and graphical plot see document CETECOM_TR19_1_0142201T08a_A1

4.3 Power spectral density

4.3.1 Description of the general test setup and methodology, see below example:

The EUT's RF-signal is coupled out by a suitable antenna coupling connector (1). The signal is first attenuated (2) then connected to spectrum-analyzer (4) for RF-conducted measurements. The specific attenuation loss is determined prior to the measurement within a set-up attenuation measurement. These are then taken into account by correcting the measurement readings of the spectrum-analyzer.

4.3.2 Schematic:

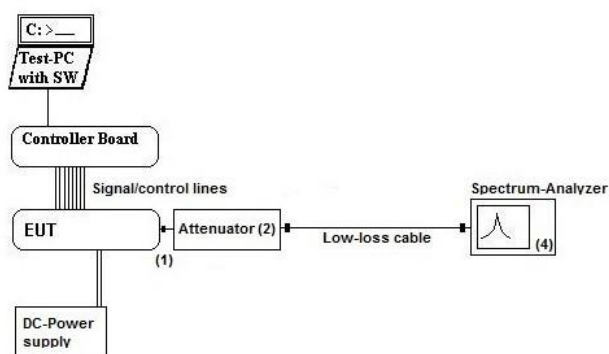

4.3.3 Testing method:

The measurement is made according to relevant reference clauses:

(See Tables *Summary of Test Results* and *Summary of Test Methods* on page 5)

Measurement is made using Rohde & Schwarz TS8997 test system.

Test method	PKPSD-Method
Remarks	In Compliance

EUT settings

The EUT was instructed to send with maximum power (if adjustable) according applicants instructions.

4.3.4 Limit

Limit [dBm] @ 3 kHz	Detector [MaxHold]	RBW / VBW [kHz]
≤ 8	Peak	3 / 10

4.3.5 Result

Mode	Channel	Frequency [MHz]	PSD [dBm]	Result
GFSK-1Mbps	01	2402	-11.437	PASS
	20	2442	-11.643	PASS
	39	2480	-11.482	PASS


Remark: for more information and graphical plot see document CETECOM_TR19_1_0142201T08a_A1

4.4 Minimum Emission Bandwidth 6 dB

4.4.1 Description of the general test setup and methodology, see below example:

The EUT's RF-signal is coupled out by a suitable antenna coupling connector (1). The signal is first attenuated (2) then connected to spectrum-analyzer (4) for RF-conducted measurements. The specific attenuation loss is determined prior to the measurement within a set-up attenuation measurement. These are then taken into account by correcting the measurement readings of the spectrum-analyzer.

4.4.2 Schematic:

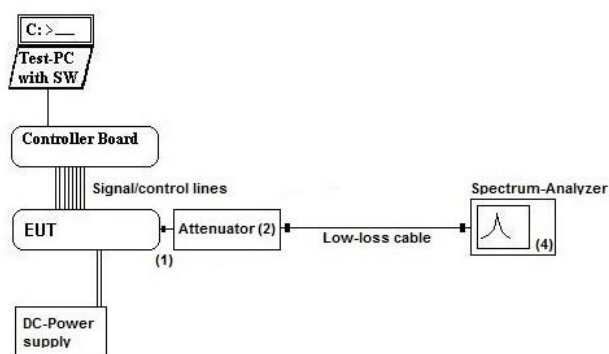

4.4.3 Testing method:

The measurement is made according to relevant reference clauses:
(See Tables *Summary of Test Results* and *Summary of Test Methods* on page 5)

Measurement is made using Rohde & Schwarz TS8997 test system.

4.4.4 Limit

Limit [kHz]	Detector [MaxHold]	RBW / VBW [kHz]
>= 500	MaxPeak	100 / 300

4.4.5 Result

Mode	Channel	Frequency [MHz]	Bandwidth [MHz]	Result
GFSK-1Mbps	01	2402	0.752476	PASS
	20	2442	0.752476	PASS
	39	2480	0.752476	PASS


Remark: for more information and graphical plot see document **CETECOM_TR19_1_0142201T08a_A1**

4.5 Occupied Channel Bandwidth 99%

4.5.1 Description of the general test setup and methodology, see below example:

The EUT's RF-signal is coupled out by a suitable antenna coupling connector (1). The signal is first attenuated (2) then connected to spectrum-analyzer (4) for RF-conducted measurements. The specific attenuation loss is determined prior to the measurement within a set-up attenuation measurement. These are then taken into account by correcting the measurement readings of the spectrum-analyzer.

4.5.2 Schematic:

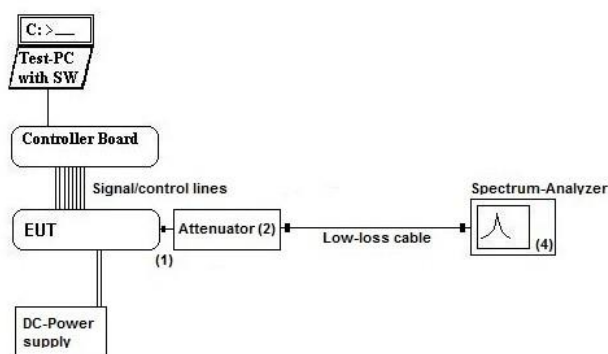

4.5.3 Testing method:

The measurement is made according to relevant reference clauses:
(See Tables *Summary of Test Results* and *Summary of Test Methods* on page 5)

Measurement is made using Rohde & Schwarz TS8997 test system.

4.5.4 Limit

When the occupied bandwidth limit is not stated in the applicable reference measurement method, the transmitted signal bandwidth shall be reported as the 99% emission bandwidth, as calculated or measured.

4.5.5 Result

Mode	Channel	Frequency [MHz]	Bandwidth [MHz]	Result
GFSK-1Mbps	01	2402	1.040000	PASS
	20	2442	1.050000	PASS
	39	2480	1.050000	PASS


Remark: for more information and graphical plot see document **CETECOM_TR19_1_0142201T08a_A1**

4.6 Emissions in non-restricted frequency bands

4.6.1 Description of the general conducted test setup and methodology, see below example:

The EUT's RF-signal is coupled out by a suitable antenna coupling connector (1). The signal is first attenuated (2) then connected to spectrum-analyzer (4) for RF-conducted measurements. The specific attenuation loss is determined prior to the measurement within a set-up attenuation measurement. These are then taken into account by correcting the measurement readings of the spectrum-analyzer.

4.6.2 Schematic:

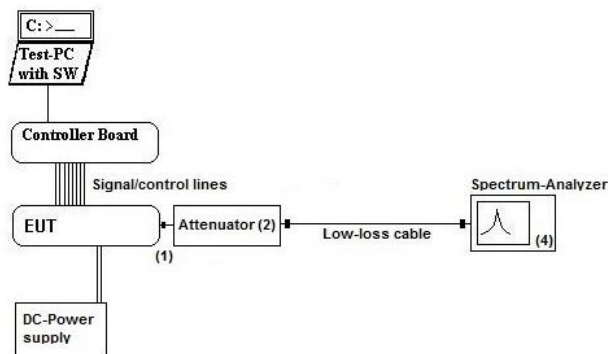

4.6.3 Testing method:

The measurement is made according to relevant reference clauses:
(See Tables *Summary of Test Results* and *Summary of Test Methods* on page 5)

Measurement is made using Rohde & Schwarz TS8997 test system.

The measurements were performed with the RBW set to 100 kHz & maximum carrier level was indicated with MAX-Hold positive peak detector using markers. Then a frequency line was set 20 or 30 dB below this measured maximum carrier level.

Then using RBW 100 kHz & spectrum analyzer span from 150 kHz to 25 GHz in three steps spurious emissions were measured with MAX-Hold positive peak detector.

The sweep time set as long as necessary to capture the full signal burst per hopping channel. The burst on-period is captured by setting appropriate markers in the rising and falling edges.

EUT settings

The EUT was instructed to send with maximum power (if adjustable) according applicants instructions.
Different modulation characteristics have been checked e.g. data rates which EUT can operate.

4.6.4 Limit

Frequency Range [MHz]	Limit [dBc]
0.15 – 25000	-20 / -30

4.6.5 Result

Maximum Level Peak [dBc]

Mode	Channel	Frequency [MHz]	Result
GFSK-1Mbps	01	2402	PASS
	20	2442	PASS
	39	2480	PASS

Remark1: every RF-Port tested separately in case of MIMO device

Remark2: for more information and graphical plot see document **CETECOM_TR19_1_0142201T08a_A1**


4.7 Radiated field strength emissions below 30MHz

4.7.1 Description of the general test setup and methodology, see below example:

Evaluating the radiated field emissions are done first by an exploratory emission measurement and a final measurement for most critical frequencies determined.

The loop antenna was placed at 1 m height above ground plane and 3 m measurement distance from set-up for investigations. Because of reduced measurement distance, correction data were applied, as stated in chapter "General Limit - Radiated field strength emissions below 30 MHz". The tests are performed in the semi anechoic room recognized by the regulatory commission.

Schematic:

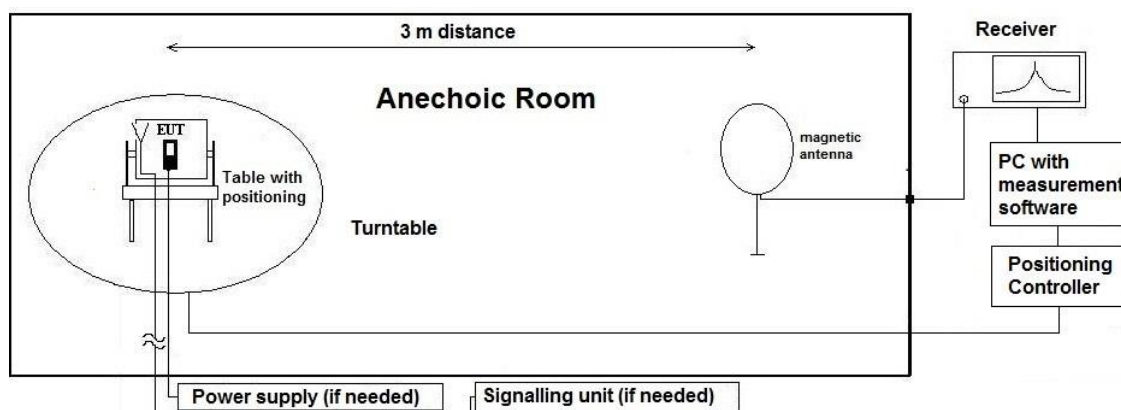

Testing method:

The measurement is made according to relevant reference clauses:
(See Tables *Summary of Test Results* and *Summary of Test Methods* on page 5)

Exploratory, preliminary measurements

The EUT and its associated accessories are placed on a non-conductive position manipulator (tipping device) of 0.8 m height which is placed on the turntable. By rotating the turntable (step 90°, range 0° to 360°) and the EUT itself either on 3-orthogonal axis (portable equipment) or 2-orthogonal axis (defined operational position of EUT), the emission spectrum was recorded.

The loop antenna was moved at least to 2-perpendicular axes (antenna vector in direction of EUT and parallel to EUT) in order to maximize the emissions. The results are documented in a diagram. Critical frequencies (low margin to limit) are saved within a data reduction table for further investigations. If various operating modes are supported, further investigations are made to find the worst-case. Also the interconnection cables and equipment position were varied in order to maximize the emissions.

Final measurement on critical frequencies

Based on the exploratory measurements, the most critical frequencies are re-measured by maintaining the EUT's worst-case operation mode, cable position, etc.

First a frequency zoom around the critical frequency is done to locate the frequency more precisely. After this step, for all identified critical frequencies, the maximum peak was determined.

Following parameters were varied: the turntable angle continuously in the range 0 to 360 degree, the EUT itself either over 3-orthogonal axis (not defined usage position) or 2-orthogonal axis (defined usage position).

On the determined worst-case position, a final measurement with necessary bandwidth and detector according standard has been carried out.

Formula:

$$E_C = E_R + AF + C_L + D_F - G_A$$

$$M = L_T - E_C$$

AF = Antenna factor

C_L = Cable lossD_F = Distance correction factor (if used)E_C = Electrical field – corrected valueE_R = Receiver readingG_A = Gain of pre-amplifier (if used)L_T = Limit

M = Margin

All units are dB-units, positive margin means value is below limit.

Distance correction:

Reference for applied correction (extrapolating) factors due to reduced measurement distance:

ANSI C63.10:2013, §6.4.4.2 - Equations (2) + (3) + (4)

4.7.2 Limit

Radiated emissions limits, (3 meters)					
Frequency Range [MHz]	Limit [μV/m]	Limit [dBμV/m] *	Distance [m]	Detector	RBW [kHz]
0.009 – 0.09	2400 / f [kHz]	67.6 – 20Log(f) (kHz)	300	Pk & Avg	0.2
0.09 – 0.11	2400 / f [kHz]	67.6 – 20Log(f) (kHz)	300	Quasi peak	0.2
0.11 – 0.15	2400 / f [kHz]	67.6 – 20Log(f) (kHz)	300	Pk & Avg	0.2
0.15 – 0.49	2400 / f [kHz]	67.6 – 20Log(f) (kHz)	300	Pk & Avg	9
0.49 – 1.705	24000 / f [kHz]	87.6 – 20Log(f) (kHz)	30	Quasi peak	9
1.705 - 30	30	29.5	30	Quasi peak	9

*Remark: In Canada same limits apply, just unit reference is different

4.7.3 Result

Diagram	Channel	Mode	Maximum Level [dBμV/m] Frequency Range 0.009 – 30MHz	Result
2.01a	01	GFSK-1Mbps	22.737 @ 25.242 MHz	PASS
2.01b	01	GFSK-1Mbps	20.960 @ 22.684 MHz	PASS
2.02a	19	GFSK-1Mbps	21.773 @ 22.630 MHz	PASS
2.02b	19	GFSK-1Mbps	20.492 @ 22.101 MHz	PASS
2.03a	39	GFSK-1Mbps	21.084 @ 26.493 MHz	PASS
2.03b	39	GFSK-1Mbps	21.691 @ 26.372 MHz	PASS

Remark:

- 1.) Laying and standing position of EUT tested
- 2.) for more information and graphical plot see document CETECOM_TR19_1_0142201T08a_A1

4.7.4 Correction factors due to reduced meas. distance (f< 30 MHz)

The used correction factors when the measurement distance is reduced compared to regulatory measurement distance, are calculated according Extrapolation formulas valid for EUT's with maximum dimension of 0.625xLambda. Formula 2+3+4 as presented in ANSI C63.10, Chapter 6.4.4 are used for the calculations of proper extrapolation factors.


Frequency -Range	f [kHz/MHz]	Lambda [m]	Far-Field Point [m]	Distance Limit accord. 15.209 [m]	1st Condition (dmeas< D _{near-field})	2'te Condition (Limit distance bigger d _{near-field})	Distance Correction accord. Formula
kHz	9,00E+03	33333,33	5305,17	300	fulfilled	not fulfilled	-80,00
	1,00E+04	30000,00	4774,65		fulfilled	not fulfilled	-80,00
	2,00E+04	15000,00	2387,33		fulfilled	not fulfilled	-80,00
	3,00E+04	10000,00	1591,55		fulfilled	not fulfilled	-80,00
	4,00E+04	7500,00	1193,66		fulfilled	not fulfilled	-80,00
	5,00E+04	6000,00	954,93		fulfilled	not fulfilled	-80,00
	6,00E+04	5000,00	795,78		fulfilled	not fulfilled	-80,00
	7,00E+04	4285,71	682,09		fulfilled	not fulfilled	-80,00
	8,00E+04	3750,00	596,83		fulfilled	not fulfilled	-80,00
	9,00E+04	3333,33	530,52		fulfilled	not fulfilled	-80,00
	1,00E+05	3000,00	477,47		fulfilled	not fulfilled	-80,00
	1,25E+05	2400,00	381,97		fulfilled	not fulfilled	-80,00
	2,00E+05	1500,00	238,73		fulfilled	fulfilled	-78,02
	3,00E+05	1000,00	159,16		fulfilled	fulfilled	-74,49
	4,00E+05	750,00	119,37		fulfilled	fulfilled	-72,00
	4,90E+05	612,24	97,44		fulfilled	fulfilled	-70,23
	5,00E+05	600,00	95,49		fulfilled	not fulfilled	-40,00
	6,00E+05	500,00	79,58		fulfilled	not fulfilled	-40,00
MHz	7,00E+05	428,57	68,21	30	fulfilled	not fulfilled	-40,00
	8,00E+05	375,00	59,68		fulfilled	not fulfilled	-40,00
	9,00E+05	333,33	53,05		fulfilled	not fulfilled	-40,00
	1,00	300,00	47,75		fulfilled	not fulfilled	-40,00
	1,59	188,50	30,00		fulfilled	not fulfilled	-40,00
	2,00	150,00	23,87		fulfilled	fulfilled	-38,02
	3,00	100,00	15,92		fulfilled	fulfilled	-34,49
	4,00	75,00	11,94		fulfilled	fulfilled	-32,00
	5,00	60,00	9,55		fulfilled	fulfilled	-30,06
	6,00	50,00	7,96		fulfilled	fulfilled	-28,47
	7,00	42,86	6,82		fulfilled	fulfilled	-27,13
	8,00	37,50	5,97		fulfilled	fulfilled	-25,97
	9,00	33,33	5,31		fulfilled	fulfilled	-24,95
	10,00	30,00	4,77		fulfilled	fulfilled	-24,04
	10,60	28,30	4,50		fulfilled	fulfilled	-23,53
	11,00	27,27	4,34		fulfilled	fulfilled	-23,21
	12,00	25,00	3,98		fulfilled	fulfilled	-22,45
	13,56	22,12	3,52		fulfilled	fulfilled	-21,39
	15,00	20,00	3,18		fulfilled	fulfilled	-20,51
	15,92	18,85	3,00		fulfilled	fulfilled	-20,00
	17,00	17,65	2,81		not fulfilled	fulfilled	-20,00
	18,00	16,67	2,65		not fulfilled	fulfilled	-20,00
	20,00	15,00	2,39		not fulfilled	fulfilled	-20,00
	21,00	14,29	2,27		not fulfilled	fulfilled	-20,00
	23,00	13,04	2,08		not fulfilled	fulfilled	-20,00
	25,00	12,00	1,91		not fulfilled	fulfilled	-20,00
	27,00	11,11	1,77		not fulfilled	fulfilled	-20,00
	29,00	10,34	1,65		not fulfilled	fulfilled	-20,00
	30,00	10,00	1,59		not fulfilled	fulfilled	-20,00

4.8 Radiated field strength emissions 30MHz – 1GHz

4.8.1 Description of the general test setup and methodology, see below example:

Evaluating the emissions have to be done first by an exploratory emissions measurement and a final measurement for most critical frequencies. The tests are performed in a CISPR 16-1-4:2010 compliant fully anechoic room (FAR) recognized by the regulatory commission. The measurement distance was set to 3 meter for frequencies up to 18 GHz and 2 meter above 18 GHz. A logarithmic periodic antenna is used for the frequency range 30 MHz to 1 GHz. Horn antennas are used for frequency range 1 GHz to 40 GHz. The EUT is aligned within 3 dB beam width of the measurement antenna with three orthogonal axis measurements on the EUT.

4.8.2 Schematic:

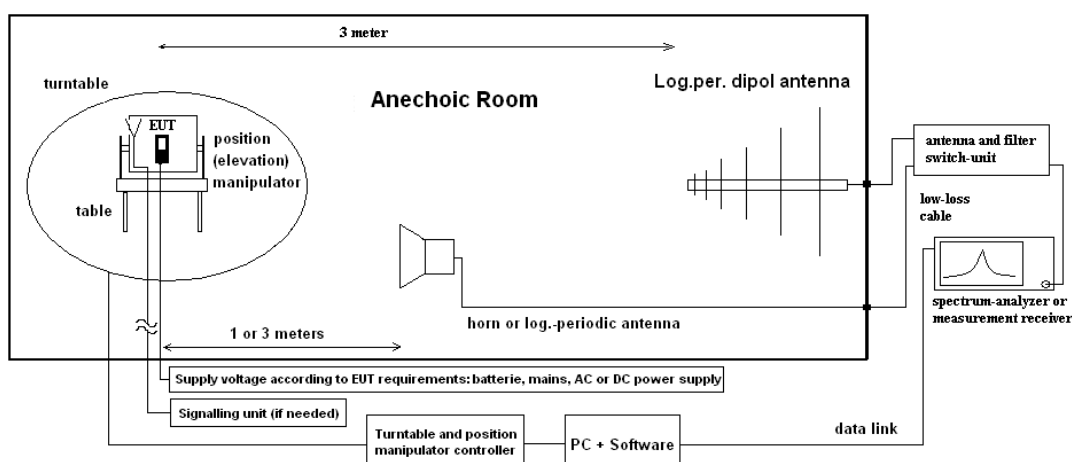

4.8.3 Testing method:

The measurement is made according to relevant reference clauses:

(See Tables *Summary of Test Results* and *Summary of Test Methods* on page 5)

Exploratory, preliminary measurements

The EUT and its associated accessories are placed on a non-conductive position manipulator (tipping device) of 0.8 m height which is placed on the turntable. By rotating the turntable (range 0° to 360°, step 90°) and the EUT itself either on 3-orthogonal axis (portable equipment) or 2-orthogonal axis (defined operational position of EUT) the emission spectrum and it's characteristics was recorded with an EMI-receiver, broadband antenna and software.

Measurement antenna: horizontal and vertical, heights: 1,0 m and 1,82 m as worst-case determined by an exploratory emission measurements. The results are documented in a diagram. Critical frequencies (low margin to limit) are saved within a table for further investigations. If various operating modes are supported, further investigations are made to find the worst-case of them. Also the interconnection cables and equipment position were varied in order to maximize the emissions.

Final measurement on critical frequencies

Based on the exploratory measurements, the most critical frequencies are re-measured by main-taining the EUT's worst-case operation mode, cable position, etc. either on 10m OATS or 3m semi-anechoic room.

First a frequency zoom around the critical frequency is done to locate the frequency more precisely. After this step, for all identified critical frequencies, the maximum peak was determined.

Following parameters were varied: the turntable angle continuously in the range 0 to 360 degree, the EUT itself either over 3-orthogonal axis (not defined usage position) or 2-orthogonal axis (defined usage position). The measurement antenna height between 1 m and 4 m.

On the determined worst-case position, a final measurement with necessary bandwidth and detector according standard has been carried out

Formula:

$$E_C = E_R + A_F + C_L + D_F - G_A \quad (1)$$

$$M = L_T - E_C \quad (2)$$

A_F = Antenna factor

C_L = Cable loss

D_F = Distance correction factor (if used)

E_C = Electrical field – corrected value

E_R = Receiver reading

G_A = Gain of pre-amplifier (if used)

L_T = Limit

M = Margin

All units are dB-units, positive margin means value is below limit.

4.8.4 Limit

Radiated emissions limits, (3 meters)				
Frequency Range [MHz]	Limit [$\mu\text{V/m}$]	Limit [$\text{dB}\mu\text{V/m}$]	Detector	RBW / VBW [kHz]
30 - 88	100	40.0	Quasi peak	100 / 300
88 - 216	150	43.5	Quasi peak	100 / 300
216 - 960	200	46.0	Quasi peak	100 / 300
960 - 1000	500	54.0	Quasi peak	100 / 300

4.8.5 Restricted bands of operation (FCC §15.205/ RSS-Gen, Issue 5, Chapter 8.10, Table 7)

MHz	MHz	GHz
0.090-0.110	156.7-156.9	9.0-9.2
0.495-0.505	162.0125-167.17	9.3-9.5
2.1735-2.1905	167.72-173.2	10.6-12.7
3.020-3.026 (Canada only)	240-285	13.25-13.4
4.125-4.128	322-335.4	14.47-14.5
4.17725 - 4.17775	399.9-410	15.35-16.2
4.20725-4.20775	608-614	17.7-21.4
5.677 - 5.683 (Canada only)	960-1240	22.01-23.12
6.215-6.218	1300-1427	23.6-24.0
6.26775-6.26825	960-1427 (only Canada)	31.2-31.8
6.31175-6.31225	1435-1626.5	36.43-36.5
8.291-8.294	1645.5-1646.5	Above 38.6
8.362-8.366	1660-1710	--
8.37625-8.38675	1718.8-1722.2	--
8.41425-8.41475	2200-2300	--
12.29-12.293	2310-2390	--
12.51975-12.52025	2483.5-2500	--
12.57675-12.57725	2690-2900	--
13.36-13.41	2655-2900 (only Canada)	--
16.42-16.423	3260-3267	--
16.69475-16.69525	3332-3339	--
16.80425-16.80475	3345.8-3358	--
25.5-25.67	3500-4400 (only Canada)	--

MHz	MHz	GHz
37.5-38.25	3600-4400	--

73-74.6	4500-5150	--
74.8-75.2	5350-5460	--
108-121.94	7250-7750	--
123-138	8025-8500	--
108-138 (only Canada)	--	--
149.9-150.05	--	--
156.52475-156.52525	--	--
Remark: only spurious emissions are allowed within these frequency bands not exceeding the limits per §15.209/RSS-Gen.		

4.8.6 Result

Diagram	Channel	Mode	Maximum Level [dBμV/m] Frequency Range 30 – 1000MHz	Result
3.01a	01	GFSK-1Mbps	34.64@144.00MHz	PASS
3.01b	01	GFSK-1Mbps	34.79@99.64MHz	PASS
3.02a	20	GFSK-1Mbps	34.904@144.00MHz	PASS
3.02b	20	GFSK-1Mbps	33.776@143.96MHz	PASS
3.03a	39	GFSK-1Mbps	35.44@96MHz	PASS
3.03b	39	GFSK-1Mbps	35.01@99.648MHz	PASS

Remark:


1. Laying and standing position of EUT tested
2. for more information and graphical plot see document **CETECOM_TR19_1_0142201T08a_A1**

4.9 Radiated field strength emissions above 1GHz

4.9.1 Description of the general test setup and methodology, see below example:

Evaluating the emissions have to be done first by an exploratory emissions measurement and a final measurement for most critical frequencies. The tests are performed in a CISPR 18-1-4:2010 compliant fully anechoic room (FAR) recognized by the regulatory commission. The measurement distance was set to 3 meter for frequencies up to 18 GHz and 2 meter above 18 GHz. A logarithmic periodic antenna is used for the frequency range 30 MHz to 1 GHz. Horn antennas are used for frequency range 1 GHz to 40 GHz. The EUT is aligned within 3 dB beam width of the measurement antenna with three orthogonal axis measurements on the EUT.

4.9.2 Schematic:

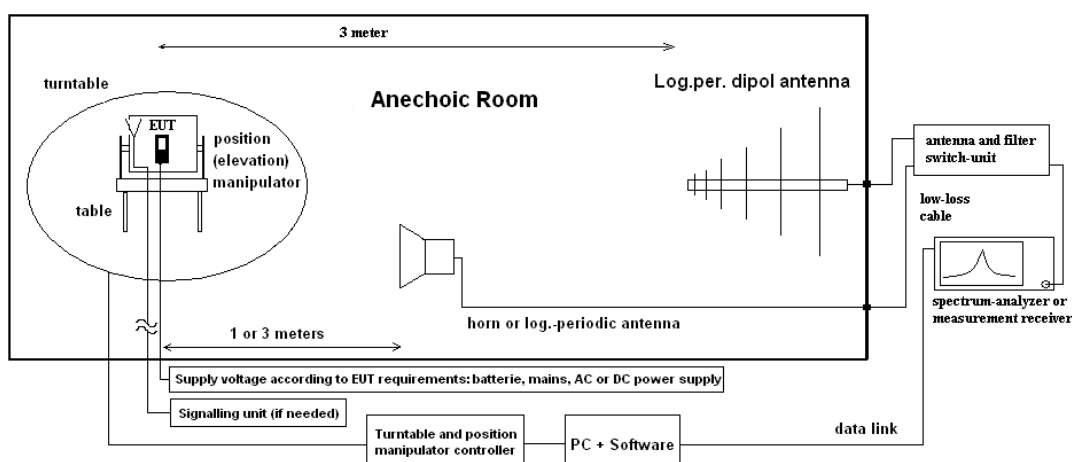

4.9.3 Testing method:

The measurement is made according to relevant reference clauses:

(See Tables *Summary of Test Results* and *Summary of Test Methods* on page 5)

Exploratory, preliminary measurements

The EUT and its associated accessories are placed on a non-conductive position manipulator (tipping device) of 1.55 m height which is placed on the turntable. By rotating the turntable (range 0° to 360°, step 15°) and the EUT itself either on 3-orthogonal axis (portable equipment) or 2-orthogonal axis (defined operational position of EUT) the emission spectrum and its characteristics was recorded with an EMI-receiver, broadband antenna and software.

The measurements are performed in horizontal and vertical polarization of the measurement antennas. The results are documented in a diagram. Critical frequencies (low margin to limit) are saved within a table for further investigations. If various operating modes are supported, further investigations are made to find the worst-case of them. Also the interconnection cables and equipment position were varied in order to maximize the emissions.

Final measurement on critical frequencies

Based on the exploratory measurements, the most critical frequencies are re-measured by maintaining the EUT's worst-case operation mode, cable position, etc.

First a frequency zoom around the critical frequency is done to locate the frequency more precisely. After this step, for all identified critical frequencies, the maximum peak was determined.

Following parameters were varied: the turntable angle continuously in the range 0 to 360 degree, the EUT itself over 3-orthogonal axis and the height for EUT with large dimensions or three axis scan for portable/small equipment.

On the determined worst-case position, a final measurement with necessary bandwidth and detector according standard has been carried out.

Formula:

$$E_C = E_R + A_F + C_L + D_F - G_A \quad (1)$$

$$M = L_T - E_C \quad (2)$$

E_C = Electrical field – corrected value

E_R = Receiver reading

M = Margin

L_T = Limit

A_F = Antenna factor

C_L = Cable loss

D_F = Distance correction factor (if used)

G_A = Gain of pre-amplifier (if used)

All units are dB-units, positive margin means value is below limit.

4.9.4 Limit

Radiated emissions limits, (3 meters)				
Frequency Range [MHz]	Limit [μ V/m]	Limit [dB μ V/m]	Detector	RBW / VBW [kHz]
Above 1000	500	54	Average	1000 / 3000
Above 1000	5000	74	Peak	1000 / 3000

4.9.5 Result

Diagram	Channel	Mode	Maximum Level [dB μ V/m] Frequency Range 1 – 18GHz	Result
4.01a	01	GFSK-1Mbps	57.83 (PK) / 46.58 (AV)	PASS
4.02a	20	GFSK-1Mbps	58.42 (PK) / 43.98 (AV) 57.62 (PK) / 46.91 (AV)	PASS
4.03a	39	GFSK-1Mbps	59.88 (PK) / 45.29 (AV)	PASS

Remark: for more information and graphical plot see document **CETECOM_TR19_1_0142201T08a_A1**


Diagram	Channel	Mode	Maximum Level [dB μ V/m] Frequency Range 18 – 26.5GHz	Result
4.01b	01	GFSK-1Mbps	57.47 (PK) / 49.42 (AV)	PASS
4.02b	20	GFSK-1Mbps	57.26 (PK) / 49.28 (AV)	PASS
4.03b	39	GFSK-1Mbps	57.64 (PK) / 48.97 (AV)	PASS

Remark: for more information and graphical plot see document **CETECOM_TR19_1_0142201T08a_A1**

4.10 Radiated Band-Edge emissions

4.10.1 Description of the general test setup and methodology, see below example:

4.10.2 Schematic:

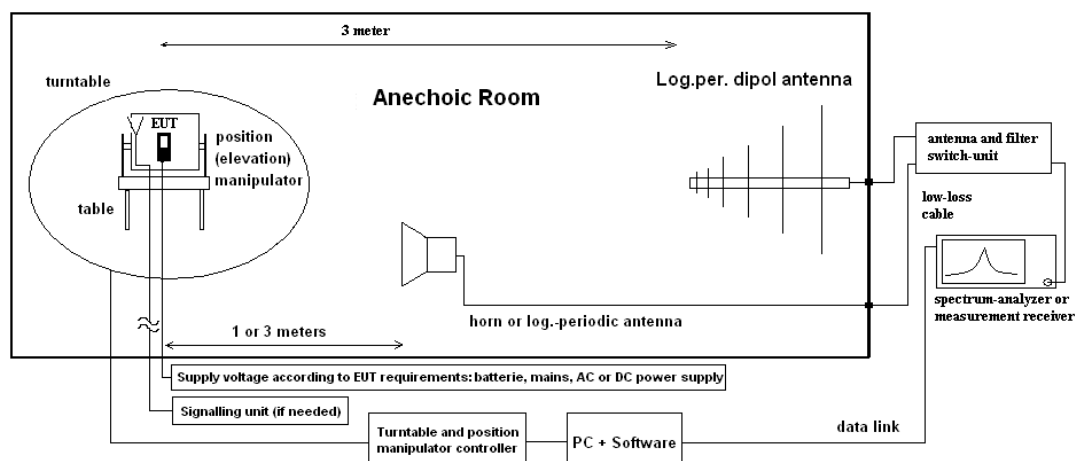

4.10.3 Testing method:

The measurement is made according to relevant reference clauses:

(See Tables *Summary of Test Results* and *Summary of Test Methods* on page 5)

For uncritical results where a measurement resolution bandwidth of 1MHz can clearly show the compliance without influencing the results, a field strength measurement was performed to show compliance.

For critical results a Marker-Delta marker method was used for showing compliance to restricted bands.

The method consists of three independent steps:

1. Step: Prior to the measurement the fundamental radiated In-Band field strength was performed. The determined value is used as reference value.
2. Step: Second step consist of finding the relative attenuation between the fundamental emission and the maximum local out-of-band emission (within 2 MHz range around the band edge either on the band-edge directly or some modulation product if the level is greater than that on the band-edge) when measured with lower resolution bandwidth.
3. Step: The delta value recorded in step 2 will be subtracted from value recorded in step 1, thus giving the required field strength at the band-edge. This value must fulfil the requirements for radiated spurious emissions in restricted bands in FCC §15.205 with the general limits of FCC §15.209

The EUT was instructed to send with maximum power (if adjustable) according to applicants instructions.

4.10.4 Limit

Frequency Range [MHz]	Pk Limit [dBc]	Avg Limit [dBc]	Avg Limit [dBμV/m]	Pk Limit [dBμV/m]	Detector	RBW / VBW [kHz]
Below 2390	-	-	54	74	Average / Peak	100 / 300
Above 2483.5	-	-	54	74	Average / Peak	1000 / 3000
2390 - 2400	-20	-	-	-	Peak	100 / 300
2390 - 2400	-	-30	-	-	Average	100 / 300

4.10.5 Result

Non-restricted bands near-by

Diagram	Channel	Mode	Peak at BE [dBc]	Average at BE [dBc]	Result
9.01	01	GFSK-1Mbps	45.62	48.09	PASS

Remark: for more information and graphical plot see document **CETECOM_TR19_1_0142201T08a_A1**

Restricted bands near-by

Diagram	Channel	Mode	Peak at BE [dBμV/m]	Average at BE [dBμV/m]	Result
9.02	39	GFSK-1Mbps	61.09	46.66	PASS

Remark: for more information and graphical plot see document **CETECOM_TR19_1_0142201T08a_A1**

4.11 Results from external laboratory

None	-
------	---

4.12 Opinions and interpretations

None	-
------	---

5 Equipment lists

ID	Description	Manufacturer	SerNo	Cal Date
	120904 - FAC1 - Radiated Emissions			
20720	EMC32 [FAC]	Rohde & Schwarz Messgerätebau GmbH	v9.xx	
20020	Horn Antenna 3115 (Subst 1)	EMCO Elektronik GmbH	9107-3699	19.07.2021
20549	Log.Per-Antenna HL025	Rohde & Schwarz Messgerätebau GmbH	1000060	31.07.2021
20700	PC ctc662012 [FAC]	Dell Inc.		
20262	Power Meter NRV-S	Rohde & Schwarz Messgerätebau GmbH	825770/0010	15.05.2020
20357	power sensor NRV-Z1	Rohde & Schwarz Messgerätebau GmbH	861761/002	21.05.2021
20338	Pre-Amplifier 100MHz - 26GHz JS4-00102600-38-5P	Miteq Inc.	838697	
20484	Pre-Amplifier 2,5GHz - 18GHz AMF-5D-02501800-25-10P	Miteq Inc.	1244554	
20287	Pre-Amplifier 25MHz - 4GHz AMF-2D-100M4G-35-10P	Miteq Inc.	379418	
20690	Spectrum Analyzer FSU	Rohde & Schwarz Messgerätebau GmbH	100302/026	23.05.2021
	120901 - SAC - Radiated Emission <1GHz			
25038	Loop Antenna (H-Field) HFH2-Z2	Rohde & Schwarz	879824/13	31.03.2020
20574	Biconilog Hybrid Antenna BTA-L	Frankonia	980026L	03.05.2022
20620	ESU 26	Rohde & Schwarz	100362	30.05.2020

ID	Description	Manufacturer	SerNo	Cal Date
	120910 - Radio Laboratory 1 (TS 8997)			
20866	FSV3030 Signal Analyzer 30GHz	Rohde & Schwarz Messgerätebau GmbH	101247	02.10.2020
20805	Open Switch and control Platform OSP B157WX 40GHz 8Port Switch	Rohde & Schwarz Messgerätebau GmbH	101264	03.05.2020

Tools used in 'P1M1'

6 Measurement Uncertainty valid for conducted/radiated measurements

The reported uncertainties are calculated based on the standard uncertainty multiplied with the appropriate coverage factor **k**, such that a confidence level of approximately 95% is achieved. For uncertainty determination, each component used in the concrete measurement set-up was taken in account and its contribution to the overall uncertainty according its statistical distribution calculated.

RF-Measurement	Reference	Frequency range	Calculated uncertainty based on a confidence level of 95%							Remarks
Conducted emissions (U _{CISPR})	CISPR 16-2-1	9 kHz - 150 kHz 150 kHz - 30 MHz	4.0 dB 3.6 dB							-
Radiated emissions Enclosure	CISPR 16-2-3	30 MHz - 1 GHz 1 GHz - 18 GHz	4.2 dB 5.1 dB							E-Field
Disturbance power	CISPR 16-2-2	30 MHz - 300 MHz	-							-
Power Output radiated	-	30 MHz - 4 GHz	3.17 dB							Substitution method
Power Output conducted	-	Set-up No.	Cel-C1	Cel-C2	BT1	W1	W2	--		
		9 kHz - 12.75 GHz	N/A	0.60	0.7	0.25	N/A	--		-
		12.75 - 26.5GHz	N/A	0.82	--	N/A	N/A	--		
Conducted emissions on RF-port	-	9 kHz - 2.8 GHz	0.70	N/A	0.70	N/A	0.69	--		N/A - not applicable
		2.8 GHz - 12.75GHz	1.48	N/A	1.51	N/A	1.43	--		
		12.75 GHz - 18GHz	1.81	N/A	1.83	N/A	1.77	--		
		18 GHz - 26.5GHz	1.83	N/A	1.85	N/A	1.79	--		
Occupied bandwidth	-	9 kHz - 4 GHz	0.1272 ppm (Delta Marker)							Frequency error
			1.0 dB							Power
Emission bandwidth	-	9 kHz - 4 GHz	0.1272 ppm (Delta Marker)							Frequency error
			See above: 0.70 dB							Power
Frequency stability	-	9 kHz - 20 GHz	0.0636 ppm							-
Radiated emissions Enclosure	-	150 kHz - 30 MHz	5.0 dB							Magnetic field E-field measurement
		30 MHz - 200 MHz	5.83 dB							
		200 MHz - 1 GHz	5.75 dB							
		1 GHz - 18 GHz	4.91 dB							
		18 - 26.5 GHz	5.05 dB							

7 Versions of test reports (change history)

Version	Applied changes	Date of release
--	Initial release	2020-02-14
--	--	--
--	--	--

8 Annex 1, Test result diagrams

See separate Annex document CETECOM_TR19_1_0142201T08a_A1

9 Annex 2, External Pictures

See separate Annex document CETECOM_TR19-1-0142201T08a_A2

10 Annex 3, Test set-up photographs

See separate Annex document CETECOM_TR19_1_0142201T08a_A3

End Of Test Report