

# FCC PART 15D MEASUREMENT AND TEST REPORT

For

# Clearsounds Communications, Inc.

1743 Quincy Avenue. #155 Naperville, IL, 60540, United States

**FCC ID: WG8A500** 

Report Type: Product Type:

Original Report Amplified Cordless Phone (Base unit)

Test Engineer: Brown Lu

**Report Number:** RSZ121129003-00

**Report Date:** 2013-02-20

Sula Huang

**Reviewed By:** RF Engineer

**Prepared By:** Bay Area Compliance Laboratories Corp. (Shenzhen)

6/F, the 3rd Phase of WanLi Industrial Building

Sola Huard

ShiHua Road, FuTian Free Trade Zone

Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008

www.baclcorp.com.cn

**Note**: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

# Report No.: RSZ121129003-00

# **TABLE OF CONTENTS**

GENERAL INFORMATION	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	
OBJECTIVE	
RELATED SUBMITTAL(S)/GRANT(S)	
TEST METHODOLOGY	
TEST FACILITY	
SYSTEM TEST CONFIGURATION	6
DESCRIPTION OF TEST CONFIGURATION	
EQUIPMENT MODIFICATIONS	
REMOTE SUPPORT EQUIPMENT LIST AND DETAILS	
EXTERNAL I/O CABLEBLOCK DIAGRAM OF TEST SETUP	
SUMMARY OF TEST RESULTS	
FCC§ 15.319 (I) &2.1091 - RF RADIATION EXPOSURE	
MPE CALCULATION	
FCC§15.317&§15.203 - ANTENNA REQUIREMENT	
APPLICABLE STANDARD	
FCC§15.315 & §15.207 - CONDUCTED EMISSIONS	
APPLICABLE STANDARD	
MEASUREMENT UNCERTAINTY	
EUT SETUPEMI TEST RECEIVER SETUP	
TEST EQUIPMENT LIST AND DETAILS	11 11
TEST PROCEDURE	
TEST RESULTS SUMMARY	
Test Data	
FCC§15.323 (A) - EMISSION BANDWIDTH	14
APPLICABLE STANDARD	
TEST PROCEDURE	14
TEST EQUIPMENT LIST AND DETAILS	
TEST DATA	
FCC§15.319 (C) - PEAK TRANSMIT POWER	17
APPLICABLE STANDARD	17
TEST PROCEDURE	17
TEST EQUIPMENT LIST AND DETAILS	
TEST DATA	18
FCC§15.319 (D) - POWER SPECTRAL DENSITY	
APPLICABLE STANDARD	
TEST PROCEDURE	
TEST EQUIPMENT LIST AND DETAILS	
TEST DATA	
FCC§15.323 (D) - EMISSION INSIDE AND OUTSIDE THE SUB-BAND	25

APPLICABLE STANDARD	25
TEST PROCEDURE	25
TEST EQUIPMENT LIST AND DETAILS.	
Test Data	
FCC§15.319 (G) - RADIATED EMISSIONS	34
APPLICABLE STANDARD	34
MEASUREMENT UNCERTAINTY	
EUT SETUP	34
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	35
TEST EQUIPMENT LIST AND DETAILS.	35
TEST PROCEDURE	35
CORRECTED AMPLITUDE & MARGIN CALCULATION	36
TEST RESULTS SUMMARY	36
Test Data	36
FCC§15.323 (F) - FREQUENCY STABILITY	41
APPLICABLE STANDARD	41
TEST PROCEDURE	
TEST EQUIPMENT LIST AND DETAILS.	
TEST DATA	
FCC§15.323 (C) (E) & §15.319(F) – SPECIFIC REQUIREMENTS FOR UPCS DEVICE	43
PRODUCT SIMILARITY DECLARATION LETTER	40

#### **GENERAL INFORMATION**

#### **Product Description for Equipment under Test (EUT)**

The *Clearsounds Communications, Inc.'s* product, model number: *A500 (FCC ID: WG8A500)* (or the "EUT") in this report was a *base unit of Amplified Cordless Phone*, which was measured approximately: 14.0 cm (L) x 9.5 cm (W) x 5.6 cm (H), rated with input voltage: DC 7 V from AC adapter.

Report No.: RSZ121129003-00

Adapter Information: AC ADAPTER

Model: 5E-AD070080-U

Input: 100-240V~50/60Hz 0.15A

Output: 7VDC 0.8A

Note: The product Amplified Cordless Phone, model A500 and A500Bundle are different in model number due to different combinations. The base unit in these models is the same, which was explained in the attached declaration letter that stated and guaranteed by the applicant.

\* All measurement and test data in this report was gathered from production sample serial number: 1212090 (Assigned by BACL, Shenzhen). The EUT supplied by applicant was received on 2012-11-29.

#### **Objective**

This test report was based on the Electromagnetic Interference (EMI) tests performed on the EUT. The EMI measurements were performed according to the measurement procedure described in ANSI C63.17 – 2006 and ANSI C63.4-2009

The tests were performed in order to determine the compliance of the EUT with FCC Part 15-Subpart D, section 15.203, 15.207, 15.315, 15.317, 15.319 and 15.323 rules.

#### Related Submittal(s)/Grant(s)

Submitted with FCC Part 15D submission of handset portion with FCC ID: WG8A500

#### **Test Methodology**

All measurements contained in this report were conducted with ANSI C63.17 - 2006 American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

FCC Part 15D Page 4 of 49

## **Test Facility**

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Report No.: RSZ121129003-00

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

FCC Part 15D Page 5 of 49

## **SYSTEM TEST CONFIGURATION**

## **Description of Test Configuration**

The EUT was configured for TBR6 mode, which is provided by the manufacturer.

## **Equipment Modifications**

No modification was made to the EUT tested.

## **Remote Support Equipment List and Details**


Manufacturer	Description	Model	Serial Number
R&S	Digital Radio-Communication Tester	CMD60	829902/026

Report No.: RSZ121129003-00

#### **External I/O Cable**

Cable Description	Length (m)	From/Port	То
Un-shielding DC Power Cable	1.85	EUT	Adapter

## **Block Diagram of Test Setup**

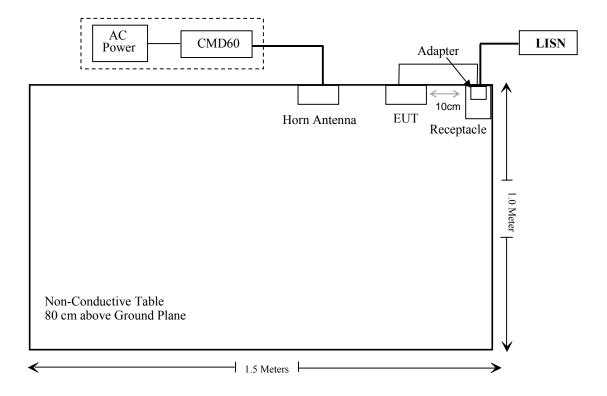

FCC Part 15D Page 6 of 49

## **SUMMARY OF TEST RESULTS**

FCC Rules	Description of Test	Result
§ 15.319 (i)&2.1091	RF Radiation Exposure	Compliance
§ 15.317 § 15.203	Antenna Requirement	Compliance
§ 15.315 § 15.207	Conducted Emission	Compliance
§ 15.323 (a)	Emission Bandwidth	Compliance
§ 15.319 (c)	Peak Transmit Power	Compliance
§ 15.319 (d)	Power Spectral Density	Compliance
§ 15.323 (d)	Emission Inside and Outside the sub-band	Compliance
§ 15.319 (g)	Radiated Emission	Compliance
§ 15.323 (f)	Frequency Stability	Compliance
§ 15.323 (c)(e) § 15.319 (f)	Specific Requirements for UPCS	Compliance

Report No.: RSZ121129003-00

FCC Part 15D Page 7 of 49

## FCC§ 15.319 (i) &2.1091 - RF RADIATION EXPOSURE

#### **Applicable Standard**

According to FCC §15.319(i) and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Report No.: RSZ121129003-00

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm²)	Averaging Time (minute)	
Limits for General Population/Uncontrolled Exposure					
0.3-1.34	614	1.63	*(100)	30	
1.34-30	842/f	2.19/f	*(180/f\2\)	30	
30-300	27.5	0.073	0.2	30	
300-1500	/	/	f/1500	30	
1500-100,000	/	/	1.0	30	

f = frequency in MHz

#### **MPE Calculation**

Predication of MPE limit at a given distance

 $S = PG/4\pi R^2$ 

Where: S = power density (in appropriate units, e.g. mW/cm<sup>2</sup>);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Frequency	Antenna Gain		<b>Conducted Power</b>		Evaluation Power MPE Limi		MPE Limit
(MHz)	(dBi)	(numeric)	(dBm)	(mW)	Distance (cm)	Density (mW/cm <sup>2</sup> )	(mW/cm <sup>2</sup> )
1921.536	0	1	17.98	62.81	20	0.01250	1.0
1924.992	0	1	18.06	63.97	20	0.01273	1.0
1928.448	0	1	17.13	51.64	20	0.01027	1.0

**Result:** The device meets MPE limit at 20 cm distance.

FCC Part 15D Page 8 of 49

<sup>\* =</sup> Plane-wave equivalent power density

## FCC§15.317&§15.203 - ANTENNA REQUIREMENT

#### **Applicable Standard**

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

Report No.: RSZ121129003-00

#### **Antenna Connector Construction**

This product has two integrated monopole antenna with gain 0 dBi arrangement which was soldered on PCB, fulfill the requirement of this section, and please refer to the internal photos.

**Test Result:** Pass

FCC Part 15D Page 9 of 49

## FCC§15.315 & §15.207 - CONDUCTED EMISSIONS

#### **Applicable Standard**

FCC§15.315, an unlicensed PCS device that is designed to be connected to the public utility (AC) power line must meet the limits specified in §15.207.


Report No.: RSZ121129003-00

#### **Measurement Uncertainty**

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on CISPR 16-4-4, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at Bay Area Compliance Laboratories Corp. (Shenzhen) is  $2.4 \, dB$  (k=2, 95% level of confidence), and the uncertainty will not be taken into consideration for the test data recorded in the report.

#### **EUT Setup**

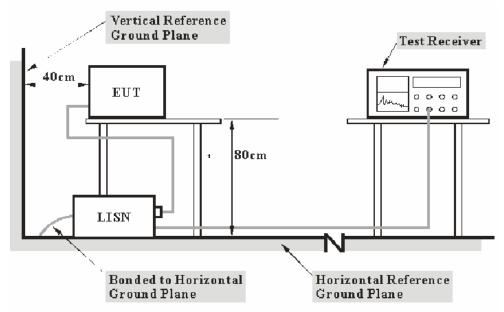

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2009 measurement procedure. The specification used was with the FCC 15.315 and FCC 15.207 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The adapter was connected to a 120 VAC/60 Hz power source.

FCC Part 15D Page 10 of 49

## **EMI Test Receiver Setup**

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Report No.: RSZ121129003-00

## **Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS30	100176	2012-11-24	2013-11-23
Rohde & Schwarz	L.I.S.N.	ESH2-Z5	892107/021	2012-08-22	2013-08-21
Rohde & Schwarz	Attenuator	ESH3Z2	DE25985	2012-07-08	2013-07-07
BACL	CE Test software	BACL-CE	V1.0	-	-

<sup>\*</sup> Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

#### **Test Procedure**

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

#### **Test Results Summary**

According to the recorded data in following table, the EUT complied with the FCC Part 15 .207, with the worst margin reading of:

9.84 dB at 0.345 MHz in the Line conducted mode

#### **Test Data**

#### **Environmental Conditions**


Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa

The testing was performed by Brown Lu on 2012-12-18.

FCC Part 15D Page 11 of 49

EUT operation mode: Transmitting

## AC 120V/60 Hz, Line

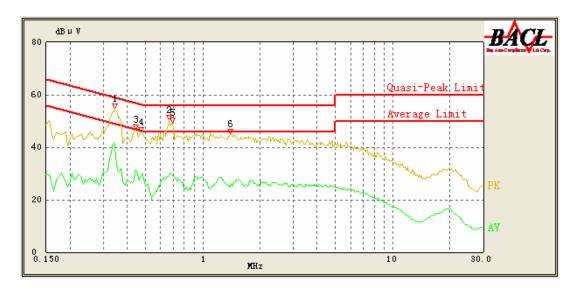


Report No.: RSZ121129003-00

Frequency (MHz)	Corrected Amplitude (dBµV)	Correction Factor (dB)	Limit (dBµV)	Margin (dB)	Detector (PK/Ave./QP)
0.345	40.59	10.26	50.43	9.84	Ave.
0.345	49.63	10.26	60.43	10.80	QP
0.665	41.68	10.22	56.00	14.32	QP
0.690	40.90	10.22	56.00	15.10	QP
0.475	41.51	10.26	56.71	15.20	QP
0.445	42.10	10.26	57.57	15.47	QP
0.445	31.60	10.26	47.57	15.97	Ave.
0.670	29.79	10.22	46.00	16.21	Ave.
0.480	29.70	10.26	46.57	16.87	Ave.
0.690	29.06	10.22	46.00	16.94	Ave.
1.400	37.04	10.18	56.00	18.96	QP
1.400	24.83	10.18	46.00	21.17	Ave.

FCC Part 15D Page 12 of 49

## **AC 120V/60 Hz, Neutral:**

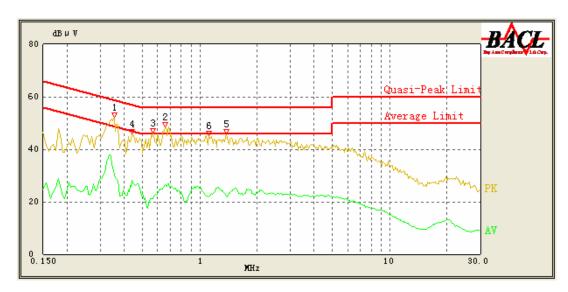

Report No.: RSZ121129003-00

Frequency (MHz)	Corrected Amplitude (dBµV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.355	43.53	10.25	60.14	16.61	QP
0.655	39.29	10.22	56.00	16.71	QP
0.440	28.25	10.25	47.71	19.46	Ave.
0.440	38.14	10.25	57.71	19.57	QP
0.660	26.34	10.22	46.00	19.66	Ave.
0.355	30.22	10.25	50.14	19.92	Ave.
0.570	36.00	10.23	56.00	20.00	QP
1.120	35.30	10.17	56.00	20.70	QP
1.375	34.43	10.18	56.00	21.57	QP
1.375	22.14	10.18	46.00	23.86	Ave.
1.120	22.12	10.17	46.00	23.88	Ave.
0.565	21.20	10.23	46.00	24.80	Ave.

- 1) Corrected Amplitude = Reading + Correction Factor
- 2) Correction Factor =LISN/ISN VDF (Voltage Division Factor) + Cable Loss + Pulse Limiter Attenuation
   The corrected factor has been input into the transducer of the test software.
   3) Margin = Limit Corrected Amplitude


FCC Part 15D Page 13 of 49

## FCC§15.323 (a) - EMISSION BANDWIDTH

#### **Applicable Standard**

Operation shall be contained within the 1920–1930 MHz band. The emission bandwidth shall be less then 2.5 MHz and greater than 50 kHz.

The emission bandwidth is measured in accordance with ANSI C63.17 sub-clause 6.1.3 using the setup below:



The width, in Hz, of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that is 26 dB down relative to the maximum level of the modulated carrier. It is based on the use of measurement instrumentation employing a peak detector function with an instrument resolution bandwidth approximately equal to 1% of the emission band-width of the device under measurement. [Extraction from 47 VFR 15, subpart D, 15.303 (C)].

#### **Test Procedure**

Using the manufacturer's information on occupied bandwidth set the spectrum analyzer as follows:

Resolution bandwidth Video bandwidth Number of sweeps Detection mode 1.0% of the emission bandwidth (as close as possible) >3 times the resolution bandwidth sufficient to stability the trace peak detection with maximum hold

Report No.: RSZ121129003-00

#### **Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2012-08-08	2013-08-07

<sup>\*</sup> Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

#### **Test Data**

#### **Environmental Conditions**

Temperature:	25 °C	
Relative Humidity:	56 %	
ATM Pressure:	100.0 kPa	

The testing was performed by Brown Lu on 2012-12-18.

FCC Part 15D Page 14 of 49

EUT operation mode: Transmitting


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	Limit
4	1921.536	1.356	50 kHz < OBW <2.5 MHz
2	1924.992	1.356	50 kHz < OBW <2.5 MHz
0	1928.448	1.356	50 kHz < OBW <2.5 MHz

Report No.: RSZ121129003-00

#### Test Result: Pass

Refer to the attached plots.

#### **Channel 4**

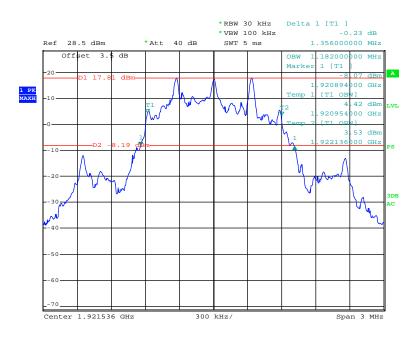


Date: 18.DEC.2012 21:52:43

FCC Part 15D Page 15 of 49


## Channel 0

Report No.: RSZ121129003-00

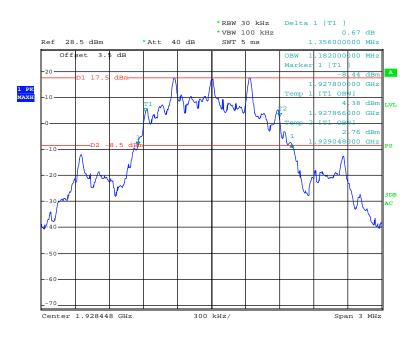

Date: 18.DEC.2012 22:05:12

#### **Channel 2**

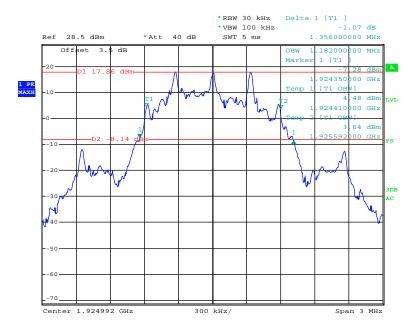

Date: 18.DEC.2012 21:56:08

FCC Part 15D Page 16 of 49

## FCC§15.319 (c) - PEAK TRANSMIT POWER

#### **Applicable Standard**

The peak transmit power is according to ANSI C63.17-2006 §6.1.2

Per FCC Part15.319 (a), Peak transmit power shall not exceed 100 microwatts multiplied by the square root of the emission bandwidth in hertz.

Report No.: RSZ121129003-00

Per FCC Part15.319 (e), the peak transmit power shall be reduced by the amount in decibels that the maximum directional gain of the antenna exceeds 3 dBi.

Calculation of Peak Transmit Power Limit: Peak Transmit Power Limit =  $100\mu W \times (EBW)^{1/2}$  EBW is the transmit emission bandwidth in Hz determined in the other test item:

#### **Test Procedure**

Using the manufacturer's information on occupied bandwidth set the spectrum analyzer as follows:

RBW	≥ Emission bandwidth
Video bandwidth	≥ RBW
Span	Zero
Center frequency	Nominal center frequency of channels
Amplitude scale	Log (linear may be used if analyzer has sufficient linear dynamic range and accuracy)
Detection	Peak detection
Trigger	Video
Sweep rate	Sufficiently rapid to permit the transmit pulse to be resolved accurately

## **Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2012-08-08	2013-08-07

<sup>\*</sup> Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC Part 15D Page 17 of 49

## **Test Data**

#### **Environmental Conditions**

Temperature:	24-25 °C	
Relative Humidity:	55-56 %	
ATM Pressure:	100.0-100.1 kPa	

The testing was performed by Brown Lu from 2012-12-18 to 2012-12-21.


## **Test Result:** Pass

Please refer to the attached plots.

Channel	Frequency (MHz)	Peak Transmit Power (dBm)	Limit (dBm)		
4	1921.536	17.98	20.66		
2	1924.992	18.06	20.66		
0	1928.448	17.13	20.66		
EBW = 1356000 Hz, Peak Transmit Power Limit = $100\mu W \times (EBW)^{1/2} = 20.66$					

Report No.: RSZ121129003-00

#### **Channel 4**

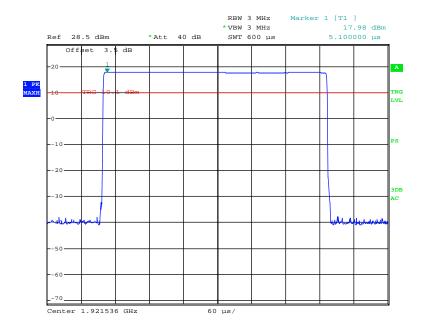


Date: 18.DEC.2012 21:50:24

FCC Part 15D Page 18 of 49


## Channel 0

Report No.: RSZ121129003-00

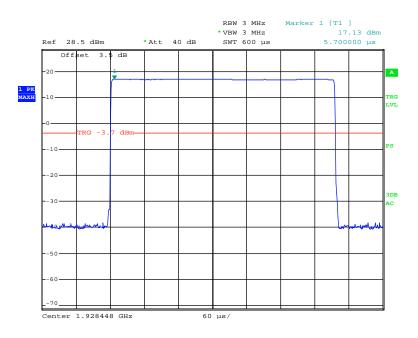

Date: 21.DEC.2012 23:41:15

#### **Channel 2**

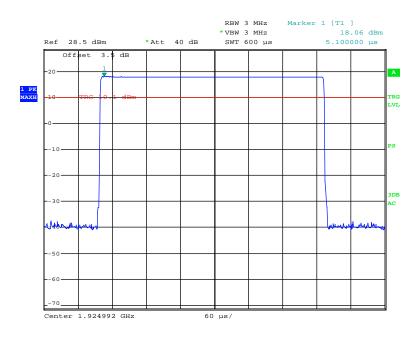

Date: 18.DEC.2012 21:49:47

FCC Part 15D Page 19 of 49

## FCC§15.319 (d) - POWER SPECTRAL DENSITY

#### **Applicable Standard**

The power spectral density is according to ANSI C63.17-2006 §6.1.5

The average pulse energy in a 3 kHz bandwidth is divided by the pulse duration.

The power spectral density shall not exceed 3mW in any 3 kHz bandwidth as measured with a spectrum analyzer having a resolution bandwidth of 3 kHz.

Report No.: RSZ121129003-00

#### **Test Procedure**

Using the manufacturer's information on occupied bandwidth set the spectrum analyzer as follows:

RBW	3 kHz
Video bandwidth	$\geq$ 3 × RBW
Span	Zero span at frequency with the maximum level (frequency determined in 6.1.3 if the same type of signal (continuous versus burst) was used in 6.1.3)
Center frequency	Spectral peak as determined in 6.1.3
Sweep time	For burst signals, sufficient to include essentially all of the maximum length burst at the output of a 3 kHz filter (e.g., maximum input burst duration plus 600 µs). For continuous signals, 20 ms.
Amplitude scale	Log power
Detection	Sample detection and averaged for a minimum of 100 sweeps
Trigger	External or internal

#### **Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2012-08-08	2013-08-07

<sup>\*</sup> Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

#### **Test Data**

#### **Environmental Conditions**

Temperature:	24-25 °C
Relative Humidity:	55-56 %
ATM Pressure:	100.0-100.1 kPa

The testing was performed by Brown Lu from 2012-12-18 to 2012-12-22.

FCC Part 15D Page 20 of 49


EUT operation mode: Transmitting

**Test Result:** Compliance. Please refer to following tables and plots.

Channel	Frequency	Power Spec	tral Density	Limit	Result	
Channel	(MHz)	(dBm/3kHz)	(mW/3kHz)	(mW/3kHz)	Result	
4	1921.536	-4.78	0.333	3	Pass	
2	1924.992	-4.52	0.353	3	Pass	
0	1928.448	-4.58	0.348	3	Pass	


Report No.: RSZ121129003-00

## **Channel 4**

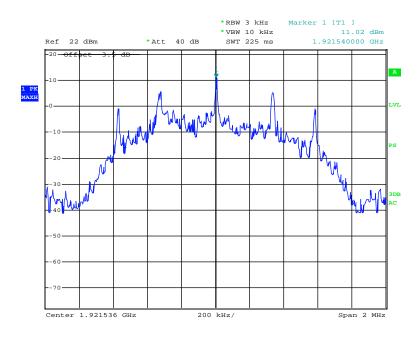


Date: 18.DEC.2012 22:27:44

FCC Part 15D Page 21 of 49

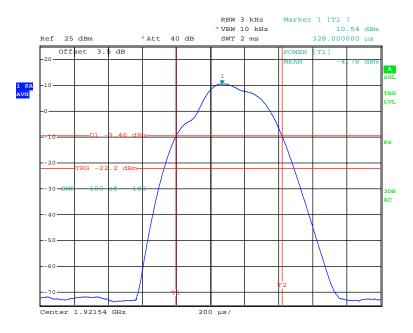

Date: 22.DEC.2012 00:15:20


#### **Channel 2**

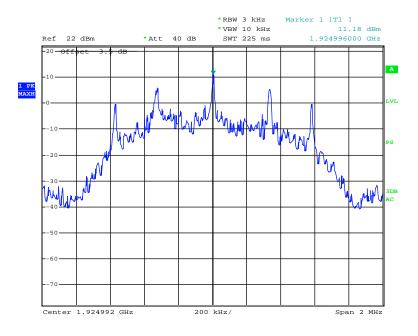

Date: 18.DEC.2012 22:19:54


FCC Part 15D Page 22 of 49



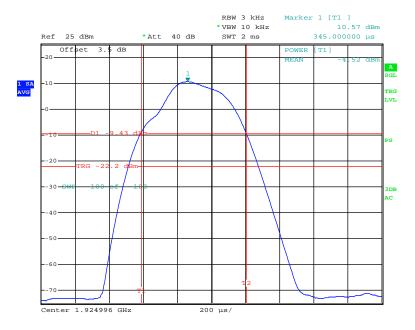


Date: 22.DEC.2012 00:12:56

#### Channel 0

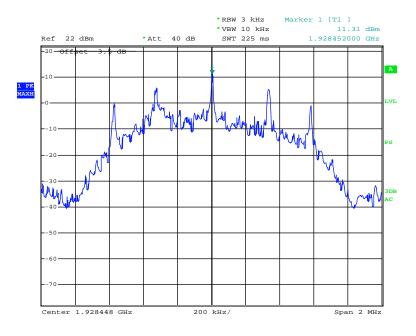

Date: 18.DEC.2012 22:24:13

FCC Part 15D Page 23 of 49

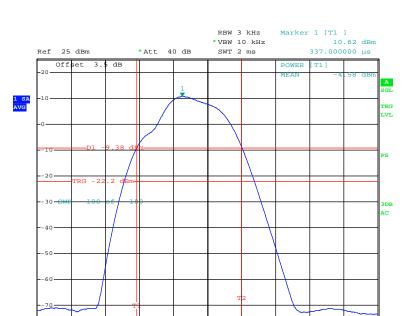

Report No.: RSZ121129003-00

Date: 22.DEC.2012 00:11:13

FCC Part 15D Page 24 of 49

## FCC§15.323 (d) - EMISSION INSIDE AND OUTSIDE THE SUB-BAND

#### **Applicable Standard**

Emissions inside the sub-band must comply with the following emission mask:

- 1. In the bands between 1B and 2B measured from the center of the emission bandwidth the total power emitted by the device shall be at least 30 dB below the transmit power permitted for that device;
- 2. in the bands between 2B and 3B measured from the center of the emission bandwidth the total power emitted by an intentional radiator shall be at least 50 dB below the transmit power permitted for that radiator:

Report No.: RSZ121129003-00

3. in the bands between 3B and the sub-band edge the total power emitted by an intentional radiator in the measurement bandwidth shall be at least 60 dB below the transmit power permitted for that radiator.

Where B = emission bandwidth

Emission Outside the sub-band shall be attenuated below a reference power of 112 mW (20.5 dBm) as follows:

- 1. 30 dB between the sub-band and 1.25 MHz above or below the sub-band;
- 2. 50 dB between 1.25 and 2.5 MHz above or below the sub-band:
- 3. 60 dB at 2.5 MHz or greater above or below the sub-band.

#### **Test Procedure**

According to ANSI C63.17.2006 Clause 6.1.6.

#### **Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2012-11-24	2013-11-23
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2012-08-08	2013-08-07

<sup>\*</sup> Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

#### **Test Data**

## **Environmental Conditions**

Temperature:	24-25 °C
Relative Humidity:	55-56 %
ATM Pressure:	100.0-100.1 kPa


The testing was performed by Brown Lu from 2012-12-18 to 2012-12-19.

EUT operation mode: Transmitting

FCC Part 15D Page 25 of 49


## **Channel 4 (Unwanted Emission inside the Sub-band)**

Report No.: RSZ121129003-00

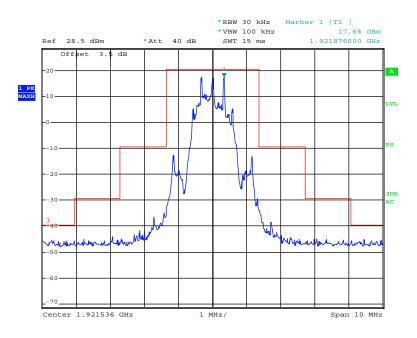

Date: 18.DEC.2012 23:29:31

## **Channel 2 (Unwanted Emission inside the Sub-band)**

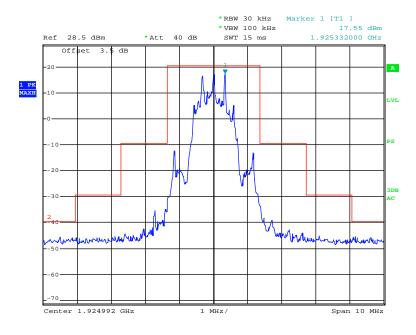


Date: 18.DEC.2012 23:25:26

FCC Part 15D Page 26 of 49


## Channel 0 (Unwanted Emission inside the Sub-band)

Report No.: RSZ121129003-00

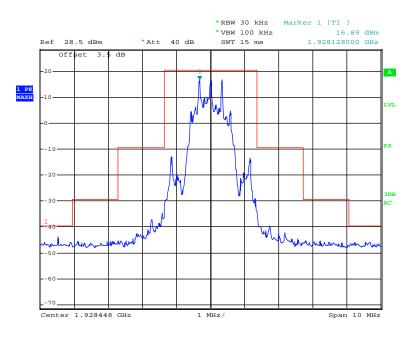


Date: 21.DEC.2012 23:49:55

## **Channel 4(Unwanted Emission outside the Sub-band)**

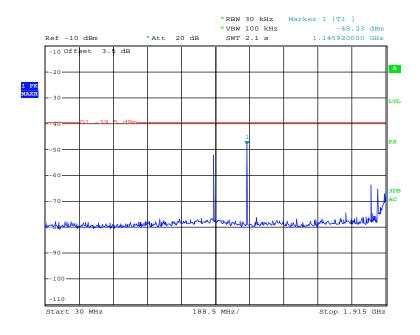


Date: 18.DEC.2012 22:45:44

FCC Part 15D Page 27 of 49

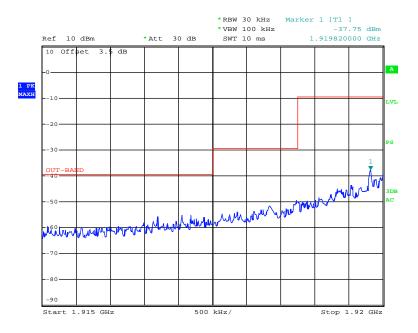


Date: 18.DEC.2012 22:48:20

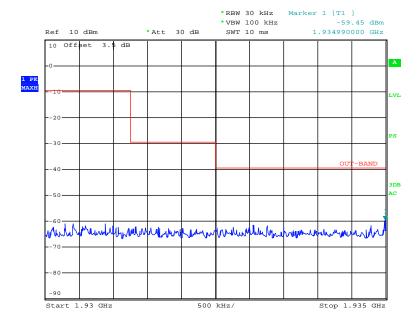


Date: 18.DEC.2012 22:50:45

FCC Part 15D Page 28 of 49

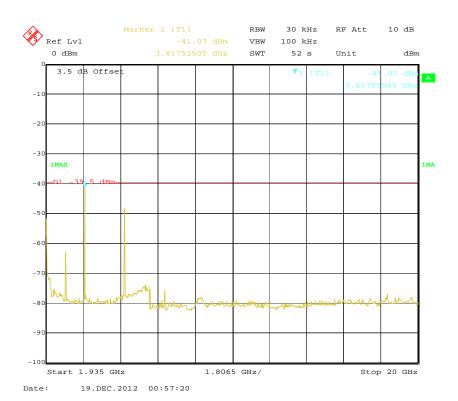


Report No.: RSZ121129003-00

## **Channel 2(Unwanted Emission outside the Sub-band)**

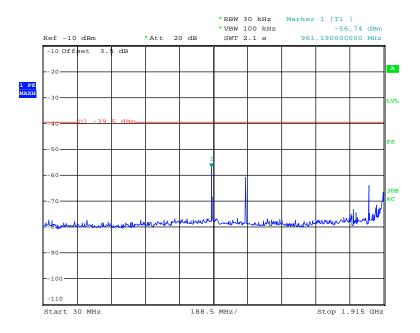


Date: 18.DEC.2012 22:45:00

FCC Part 15D Page 29 of 49

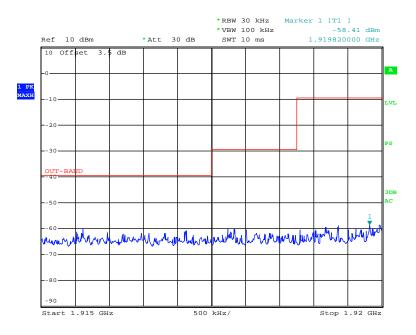


Date: 18.DEC.2012 22:48:49

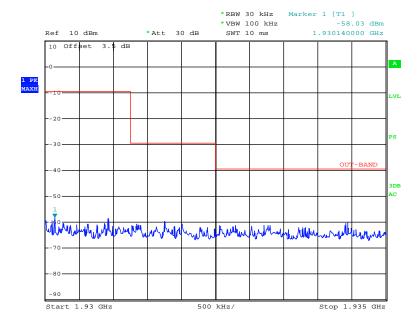


Date: 18.DEC.2012 22:50:24

FCC Part 15D Page 30 of 49

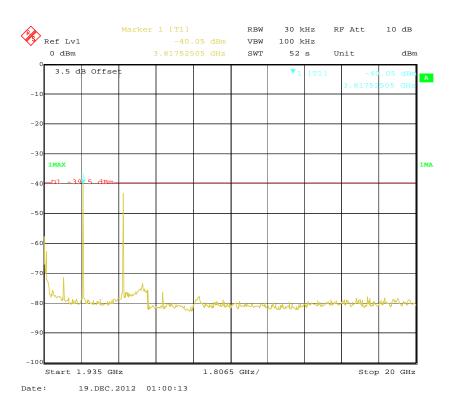


Report No.: RSZ121129003-00

## Channel 0(Unwanted Emission outside the Sub-band)

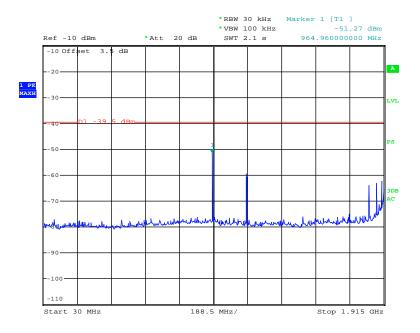


Date: 18.DEC.2012 22:43:09

FCC Part 15D Page 31 of 49

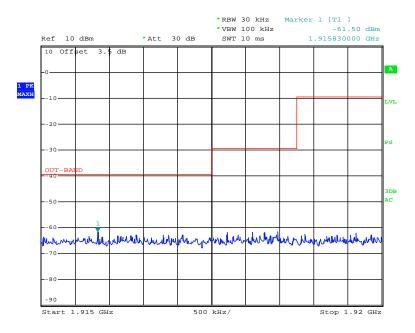


Date: 18.DEC.2012 22:49:07

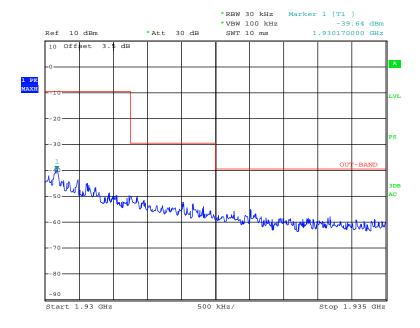

Date: 18.DEC.2012 22:49:52

FCC Part 15D Page 32 of 49

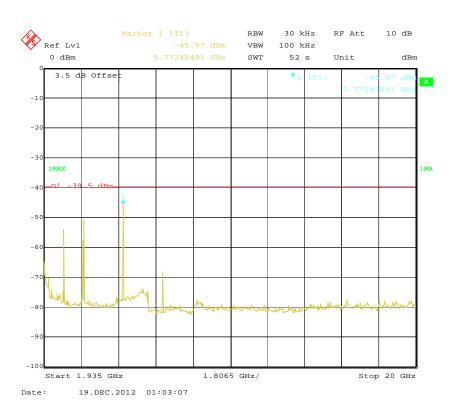

Report No.: RSZ121129003-00

FCC Part 15D Page 33 of 49

## FCC§15.319 (g) - RADIATED EMISSIONS

#### **Applicable Standard**

According to FCC§15.319(g), notwithstanding other technical requirements specified in this subpart, attenuation of emissions below the general emission limits in §15.209 is not required.


Report No.: RSZ121129003-00

#### **Measurement Uncertainty**

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR 16-4-4, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Bay Area Compliance Laboratories Corp. (Shenzhen) is 4.0 dB (k=2, 95% level of confidence), and the uncertainty will not be taken into consideration for the test data recorded in the report.

#### **EUT Setup**

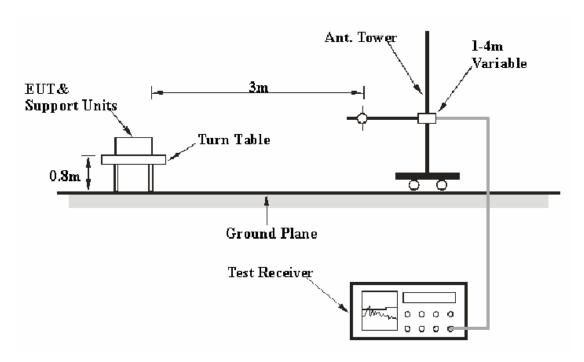

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.17 - 2006. The specification used was the FCC 15\( \) 15.319(g).

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

FCC Part 15D Page 34 of 49

## **EMI Test Receiver & Spectrum Analyzer Setup**

The system was investigated from 30 MHz to 20 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30MHz – 1000 MHz	100 kHz	300 kHz	120kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Ave.

Report No.: RSZ121129003-00

#### **Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	8447E	1937A01046	2012-11-24	2013-11-23
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2012-08-08	2013-08-07
Sunol Sciences	Broadband Antenna	JB1	A040904-2	2011-11-28	2014-11-27
Mini-Circuits	Amplifier	ZVA-213+	N/A	2012-11-24	2013-11-23
Sunol Sciences	Horn Antenna	DRH-118	A052304	2011-12-01	2014-11-30
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2012-11-24	2013-11-23
the electro- Mechanics Co.	Horn Antenna	3116	9510-2270	2010-10-14	2013-10-13
R&S	Auto test Software	EMC32	V6.30	-	-

<sup>\*</sup> Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

#### **Test Procedure**

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz and peak and Average detection modes for frequencies above 1 GHz.

FCC Part 15D Page 35 of 49

#### **Corrected Amplitude & Margin Calculation**

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

Report No.: RSZ121129003-00

Corrected Amplitude = Meter Reading + Antenna Factor + Cable Loss- Amplifier Gain

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

Margin = Limit - Corrected Amplitude

#### **Test Results Summary**

According to the data in the following table, the EUT complied with the FCC Part 15.319 (g), with the worst margin reading of:

2.35 dB at 3849.8 MHz in the Vertical polarization

#### **Test Data**

#### **Environmental Conditions**

Temperature:	25 ℃
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa

The testing was performed by Brown Lu on 2012-12-18.

FCC Part 15D Page 36 of 49

EUT operation mode: Transmitting

# 30 MHz ~ 20 GHz:

Frequency	Ro	eceiver	Turntable	Rx An	itenna		Corrected		C Part g)/209/205
(MHz)	Reading (dBµV)	Detector (PK/QP/Ave.)	Degree	Height (m)	Polar (H/V)	Factor (dB)	Amplitude (dBμV/m)	Limit (dBµV/m)	Margin (dB)
				Channe	el 4				
1921.536	109.34	PK	35	1.1	Н	2.63	111.97	/	/
1921.536	108.38	PK	112	1.2	V	2.63	111.01	/	/
32.22	43.5	QP	352	1.1	V	-8.6	34.9	40	5.1
51.02	51.9	QP	142	1.1	V	-20.5	31.4	40	8.6
3843.1	60.12	PK	36	1.5	Н	10.23	70.35	74	3.65
3843.1	60.39	PK	87	1.6	V	10.23	70.62	74	3.38
5764.6	38.97	PK	63	1.1	Н	13.87	52.84	74	21.16
5764.6	40.12	PK	87	1.2	V	13.87	53.99	74	20.01
7686.3	33.80	PK	135	1.1	Н	16.47	50.27	74	23.73
7686.3	35.95	PK	85	1.3	V	16.47	52.42	74	21.58
Channel 2									
1924.992	109.02	PK	38	1.2	Н	3.07	112.09	/	/
1924.992	110.9	PK	115	1.1	V	3.07	113.97	/	/
32.22	43.3	QP	352	1.1	V	-8.6	34.7	40	5.3
51.02	52.1	QP	141	1.1	V	-20.5	31.6	40	8.4
3849.8	60.41	PK	175	1.2	Н	10.23	70.64	74	3.36
3849.8	61.42	PK	17	1.1	V	10.23	71.65	74	2.35
5774.9	39.67	PK	85	1.0	Н	13.87	53.54	74	20.46
5774.9	40.39	PK	96	1.2	V	13.87	54.26	74	19.74
7699.6	34.35	PK	36	1.2	Н	16.47	50.82	74	23.18
7699.6	36.08	PK	125	1.3	V	16.47	52.55	74	21.45
				Channe	10				
1928.448	109.26	PK	23	1.2	Н	3.07	112.33	/	/
1928.448	110.56	PK	115	1.1	V	3.07	113.63	/	/
32.22	43	QP	353	1.1	V	-8.6	34.4	40	5.6
51.02	52	QP	140	1.1	V	-20.5	31.5	40	8.5
3856.8	60.27	PK	35	1.2	Н	10.23	70.50	74	3.50
3856.8	60.91	PK	22	1.1	V	10.23	71.14	74	2.86
5785.2	41.97	PK	117	1.2	Н	13.87	55.84	74	18.16
5785.2	40.71	PK	233	1.0	V	13.87	54.58	74	19.42
7713.6	33.70	PK	85	1.1	Н	16.47	50.17	74	23.83
7713.6	35.74	PK	199	1.1	V	16.47	52.21	74	21.79

Report No.: RSZ121129003-00

FCC Part 15D Page 37 of 49

Field Strength of Radiated Emission Average							
-	Peak Corrected		Duty Cycle	Corrected	FCC 1:	FCC 15.319	
Freq. (MHz)	Amplitude. @3m (dBµV/m)	Polar (H/V)	Factor Amplitud	Amplitude. (dBμV/m)	Limit (dBµV/m)	Margin	Comment
			Chai	nnel 4			
3843.1	70.35	Н	-27.78	42.57	54	11.43	Harmonic
3843.1	70.62	V	-27.78	42.84	54	11.16	Harmonic
5764.6	52.84	Н	-27.78	25.06	54	28.94	Harmonic
5764.6	53.99	V	-27.78	26.21	54	27.79	Harmonic
7686.3	50.27	Н	-27.78	22.49	54	31.51	Harmonic
7686.3	52.42	V	-27.78	24.64	54	29.36	Harmonic
			Chai	nnel 2			
3849.8	70.64	Н	-27.78	42.86	54	11.14	Harmonic
3849.8	71.65	V	-27.78	43.87	54	10.13	Harmonic
5774.9	53.54	Н	-27.78	25.76	54	28.24	Harmonic
5774.9	54.26	V	-27.78	26.48	54	27.52	Harmonic
7699.6	50.82	Н	-27.78	23.04	54	30.96	Harmonic
7699.6	52.55	V	-27.78	24.77	54	29.23	Harmonic
			Chai	nnel 0			
3856.8	70.50	Н	-27.78	42.72	54	11.28	Harmonic
3856.8	71.14	V	-27.78	43.36	54	10.64	Harmonic
5785.2	55.84	Н	-27.78	28.06	54	25.94	Harmonic
5785.2	54.58	V	-27.78	26.8	54	27.20	Harmonic
7713.6	50.17	Н	-27.78	22.39	54	31.61	Harmonic
7713.6	52.21	V	-27.78	24.43	54	29.57	Harmonic


Report No.: RSZ121129003-00

#### Note:

$$\label{eq:corrected_solution} \begin{split} & \text{Corrected Amplitude} = \text{Corrected Factor} + \text{Reading} \\ & \text{Corrected Factor=Antenna factor} \; (RX) + \text{cable loss} - \text{amplifier factor} \\ & \text{Margin} = \text{Limit} - \text{Corrected Amplitude} \\ & \text{Duty Cycle=} \; T_{on}/T_p * 100\% \\ & T_{on} = 0.410 \; \text{ms}, \; T_p = 10.04 \; \text{ms} \\ & \text{Duty cycle factor} = 20 \text{lg} \; (\text{Duty Cycle}) = -27.78 \\ & \text{Ave.=PK+20*} \; \text{lg}(\text{Duty Cycle}) \end{split}$$


FCC Part 15D Page 38 of 49

T<sub>on</sub>:

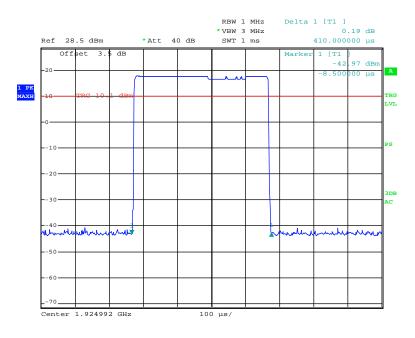


Date: 18.DEC.2012 22:11:18

 $T_p$ :

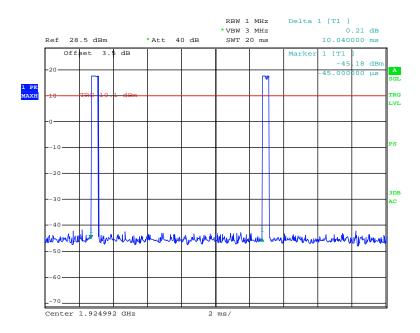

Date: 18.DEC.2012 22:15:03

FCC Part 15D Page 39 of 49

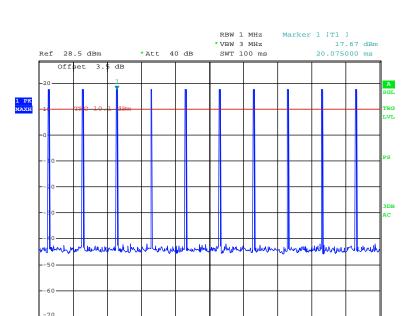

Report No.: RSZ121129003-00

Date: 18.DEC.2012 22:14:06

FCC Part 15D Page 40 of 49

# FCC§15.323 (f) - FREQUENCY STABILITY

#### **Applicable Standard**

Per §15.323(f), the frequency stability of the carrier frequency of the intentional radiator shall be maintained within  $\pm 10$  ppm over 1 hour or the interval between channel access monitoring, whichever is shorter. The frequency stability shall be maintained over a temperature variation of  $-20\,^{\circ}\text{C}$  to  $+50\,^{\circ}\text{C}$  at normal supply voltage, and over a variation in the primary supply voltage of 85 percent to 115 percent of the rated supply voltage at a temperature of 20  $^{\circ}\text{C}$ . For equipment that is capable only of operating from a battery, the frequency stability tests shall be performed using a new battery without any further requirement to vary supply voltage.

Report No.: RSZ121129003-00

#### **Test Procedure**

This procedure should be carried out for each of the following test cases:

Temperature	Supply Voltage
20°C	85-115% of declared nominal voltage
-20°C	Normal
+50°C	Normal

<sup>&</sup>lt;sup>a</sup> Use the lowest temperature at which the EUT is specified to operate if it is above -20 °C.

During test, the equipment shall be placed in the boxes and set the temperature to the specified requirement until the thermal balance has been reached.

Using the mean carrier frequency at  $20^{\circ}$ C and at nominal supply voltage as the reference, the mean carrier frequency shall be maintained within  $\pm 10$  ppm at the two extreme temperatures (or as declared by the manufacturer) and at normal temperature (typically  $20^{\circ}$ C) at the two extreme supply voltages.

# **Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
ESPEC	Temperature & Humidity Chamber	EL-10KA	09107726	2012-11-02	2013-11-01
R & S	Digital Radio- Communication Tester	CMD60	829902/026	2012-03-16	2013-03-15

<sup>\*</sup> Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC Part 15D Page 41 of 49

# **Test Data**

# **Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa

The testing was performed by Brown Lu on 2012-12-18.

Test Result: Compliance.

EUT operation mode: Transmitting

Temperature (°C)	Voltage (V <sub>AC</sub> )	Channel Frequency (MHz)	Measured Frequency Offset (kHz)	Measured Frequency Offset (ppm)	Limit (ppm)
-20	120	1924.992	7.2	3.7403	±10
	102	1924.992	6.7	3.4805	±10
20	120	1924.992	7.0	3.6364	±10
	138	1924.992	7.2	3.7402	±10
50	120	1924.992	6.9	3.5844	±10

Report No.: RSZ121129003-00

FCC Part 15D Page 42 of 49

# FCC§15.323 (c) (e) & §15.319(f) – SPECIFIC REQUIREMENTS FOR UPCS DEVICE

Report No.: RSZ121129003-00

#### Automatic Discontinuation of Transmission, FCC Part 15.319(f)

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. The provisions in this section are not intended to preclude transmission of control and signaling information or use of repetitive codes used by certain digital technologies to complete frame or burst intervals.

#### **Test Procedure:**

According to ANSI C63.17 Annex A

#### **Test result:**

Meet the requirement; please refer to the declaration provided by manufacturer.

#### Monitoring Time FCC 15.323 (c) (1)

Immediately prior to initiating transmission, devices must monitor the combined time and spectrum window in which they intend to transmit. For a period of at least 10 milliseconds for systems designed to use a 10 milliseconds or shorter frame period or at least 20 milliseconds for systems designed to use a 20 milliseconds frame period

## **Test procedure:**

Measurement method according to ANSI C63.17 2006 clause 7.3.4

#### **Test result:**

EUT monitors the combined time and spectrum window prior to initiation of transmission. Test result is following

Interference (Refer to ANSI C63.17 clause 7.3.4)	Reaction of EUT	Results
1) Apply the interference on $f_1$ at level $T_U + U_M$ , and no interference on $f_2$ . Initiate transmission and verify the transmission on $f_2$ .	EUT transmits on f <sub>2</sub>	Pass
2) Apply the interference on $f_2$ at level $T_U + U_M$ , at the same time, no interference on $f_1$ . After about 20ms, initiate transmission and verify the transmission on $f_1$ .	EUT transmits on f <sub>1</sub>	Pass

# Lower Monitoring Threshold Part15.323 (c) (2)

The monitoring threshold must not be more than 30 dB above the thermal noise power for a bandwidth equivalent to the emission bandwidth used by the device.

#### **Test procedure:**

Measurement method according to ANSI C63.17 2006 clause 7.3.1

#### **Test result:** Not Applicable

Note: For the EUT which support LIC there is no need to measure lower threshold because it is automatically met by LIC procedure.

FCC Part 15D Page 43 of 49

#### Maximum Transmit Period FCC Part15.323 (c) (3)

If no signal above the threshold level is detected, transmission may commence and continue with the same emission bandwidth in the monitored time and spectrum windows without further monitoring. However, occupation of the same combined time and spectrum windows by a device or group of cooperating devices continuously over a period of time longer than 8 hours is not permitted without repeating the access criteria.

Report No.: RSZ121129003-00

#### **Test procedure:**

Measurement method according to ANSI C63.17 2006 clause 8.2.2

#### **Test result:**

Repetition of Access Criteria	Measured Maximum Transmission Time (Second)	Limit (Second)	Results
First	19800	28,800	Pass
Second	18000	28,800	Pass

## System Acknowledgement, FCC Part15.323 (c) (4)

Once access to specific combined time and spectrum windows is obtained an acknowledgment from a system participant must be received by the initiating transmitter within one second or transmission must cease. Periodic acknowledgments must be received at least every 30 seconds or transmission must cease. Channels used exclusively for control and signaling information may transmit continuously for 30 seconds without receiving an acknowledgment, at which time the access criteria must be repeated.

# **Test procedure:**

Measurement method according to ANSI C63.17 2006 clause 8.1.1, 8.2.1

#### **Test result:**

Test	Time taken (second)	Limit (second)	Result
Connection acknowledgement	0.1	1	Pass
Change of access criteria for control information	N/A	30	Pass
Transmission cease time	1.2	30	Pass
Pulse length	0.000412	0.01	Pass

Note: N/A=Not Applicable

FCC Part 15D Page 44 of 49

# Least Interfered Channel (LIC) Selection, FCC Part15.323 (c) (5)

If access to spectrum is not available as determined by the above, and a minimum of 40 duplex system access channels are defined for the system, the time and spectrum windows with the lowest power level below a monitoring threshold of 50 dB above the thermal noise power determined for the emission bandwidth may be accessed.

Report No.: RSZ121129003-00

Calculation of monitoring threshold limits for isochroous devices:

 $\begin{array}{l} Lower~threshold:~T_L = \text{-}174 + 10 Log_{10}B + M_u + P_{MAX} - P_{EUT}~(dBm)\\ Upper~threshold:~T_U = \text{-}174 + 10 Log_{10}B + M_u + P_{MAX} - P_{EUT}~(dBm) \end{array}$ 

Where: B=Emission bandwidth (Hz)

 $M_u = dB$  the threshold may exceed thermal noise (30 for  $T_L & 50$  for  $T_U$ )

 $P_{MAX} = 5Log_{10}B-10(dBm)$ 

 $P_{EIIT}$  =Transmitted power (dBm)

#### Calculated thresholds:

Monitor Threshold	B(MHz)	M <sub>U</sub> (dB)	P <sub>MAX</sub> (dBm)	P <sub>EUT</sub> (dBm)	Threshold (dBm)
$T_{ m L}$	1.356	30	20.66	18.06	-80.08
$T_{\mathrm{U}}$	1.356	50	20.66	18.06	-60.08

#### Limit:

Limit (dBm)
$T_{LR} < T_L + U_M = -80.08 + 6 = -72.08$
$T_{UR} < T_{U} + U_{M} = -60.08 + 6 = -52.08$

Note: According to 47CFR 15.323(c) (5), the power measurement resolution for this comparison must be accurate to within 6 dB, the limit should be "Threshold+6(dB)"

#### **Test procedure:**

Measurement method according to ANSI C63.17 clause 7.3.2, 7.3.3, 7.3.4

## **Test result:**

Monitor threshold	<b>Measured Threshold Level</b>	Limit (dBm)
Lower Threshold(dBm)	N/A	-72.08
Upper Threshold(dBm)	-60.42	-52.08

Note: The upper threshold is applicable as the EUT utilizes more than 40 duplex system channels.

# Random waiting FCC 15.323(c) (6)

If the selected combined time and spectrum windows are unavailable, the device may either monitor and select different windows or seek to use the same window after waiting an amount of time, randomly chosen from a uniform random distribution between 10 and 150 milliseconds, commencing when the channel becomes available.

#### **Test procedure:**

Measurement method according to ANSI C63.17 2006 clause 8.1.3

FCC Part 15D Page 45 of 49

#### Test result:

The manufacturer declares that this provision is not utilized by the EUT.

# Monitoring Bandwidth, FCC Part 15.323 (c) (7)

The monitoring system bandwidth must be equal to or greater than the emission bandwidth of the intended transmission and have a maximum reaction time less than 50xSQRT (1.25/emission bandwidth in MHz) microseconds for signals at the applicable threshold level but shall not be required to be less than 50 microseconds

Report No.: RSZ121129003-00

#### **Test procedure:**

Measurement method according to ANSI C63.17 2006 clause 7.5

#### Test result:

Test Equation (μs)	B(bandwidth)(MHz)	Pulse width(μs)	Limit(μs)	Result
50 (1.25/B) <sup>1/2</sup>	1.356	48.01	50	Pass
35 (1.25/B) <sup>1/2</sup>	1.356	33.60	35	Pass

#### Monitoring Antenna, FCC Part15.323 (c) (8)

The monitoring system shall use the same antenna used for transmission, or an antenna that yields equivalent reception at that location.

## **Test procedure:**

Measurement method according to ANSI C63.17 2006 paragraph 4

#### Test result:

The antenna of the EUT used for transmission is the same interior antenna that used for monitoring.

# Monitoring threshold relation FCC 15.323(c) (9)

Devices that have a power output lower than the maximum permitted under the rules can increase their monitoring detection threshold by one decibel for each one decibel that the transmitter power is below the maximum permitted.

# **Test procedure:**

Measurement method according to ANSI C63.17 2006 paragraph 4

#### Test result:

Not apply based on 15.323 (c) (5)

FCC Part 15D Page 46 of 49

# **Duplex Connections, FCC Part15.323 (c) (10)**

An initiating device may attempt to establish a duplex connection by monitors both its intended transmit and receive time and spectrum windows. If both the intended transmit and receive time and spectrum windows meet the access criteria, then the initiating device can initiate a transmission in the intended transmit time and spectrum window. If the power detected by the responding device can be decoded as a duplex connection signal from the initiating device, then the responding device may immediately begin transmitting on the receive time and spectrum window monitored by the initiating device.

Report No.: RSZ121129003-00

#### **Test procedure:**

Measurement method according to ANSI C63.17 clause 8.3

#### Test result:

The manufacturer declares that this provision is not utilized by the EUT.

#### Alternative monitoring interval for co-located devices, FCC Part 15.323 (c) (11)

An initiating device that is prevented from monitoring during its intended transmit window due to monitoring system blocking from the transmissions of a co-located (within one meter) transmitter of the same system, may monitor the portions of the time and spectrum windows in which they intend to receive over a period of at least 10 milliseconds. The monitored time and spectrum window must total at least 50 percent of the 10 millisecond frame interval and the monitored spectrum must be within 1.25 MHz of the center frequency of channel(s) already occupied by that device or co-located co-operating devices. If the access criteria is met for the intended receive time and spectrum window under the above conditions, then transmission in the intended transmit window by the initiating device may commence.

#### **Test procedure:**

Measurement method according to ANSI C63.17 2006 clause 8.4

#### **Test result:**

The manufacturer declares that this provision is not utilized by the EUT.

#### Fair Access, FCC Part 15.323 (c) (12)

The provisions of FCC Part15.323(c)(10) or (c)(11) shall not be used to extend the range of spectrum occupied over space or time for the purpose of denying fair access to spectrum to other devices.

#### **Test result:**

The manufacturer declares that this device does not use any mechanisms as provided by Part15.323 (c) (10) or (c) (11) to extend the range of spectrum occupied over space or time for the purpose of denying fail access to spectrum to other device.

#### Frame Repetition Stability, Part15 .323 (e)

The frame period (a set of consecutive time slots in which the position of each time slot can be identified by reference to a synchronizing source) of an intentional radiator operating in these sub-bands shall be 20 milliseconds or 10 milliseconds/X where X is a positive whole number.

# **Test procedure:**

Measurement method according to ANSI C63.17 2006 clause 6.2.2, 6.2.3

#### **Test result:**

FCC Part 15D Page 47 of 49

# Frame Repetition Stability:

Frame Repetition Stability (ppm)	Limit (ppm)	Result (Pass/Fail)	
3.74	10	Pass	

Report No.: RSZ121129003-00

# Frame Period and Jitter:

Max. pos. Jitter	Max. neg. Jitter	Frame period	Limit	
(us)	(us)	(ms)	Frame Period (ms)	Jitter (μs)
0.01	-0.04	10.00000	20 or10/X	25

Note: X is a positive whole number.

FCC Part 15D Page 48 of 49

# PRODUCT SIMILARITY DECLARATION LETTER



Clearsounds Communications Inc 1743 Quincy Ave. Unit #155 Naperville, IL, USA Tel: 630.654.9200 Fax: 630.654.9219

Report No.: RSZ121129003-00

2013-2-20

# **Product Similarity Declaration Letter**

To Whom It May Concern,

We, Clearsounds Communications Inc, hereby declare that our product Amplified Cordless Phone, the models A500 and A500Bundle are different in model number due to different combinations, which have the same base and handset, details as below:

A500: 1 base+1 Handset

A500Bundle: 1 base+2 Handset+1 Charger

Please contact me if you have any question.

President and CEO

ignature:

\*\*\*\*\* END OF REPORT \*\*\*\*\*

FCC Part 15D Page 49 of 49