

APPLICATION CERTIFICATION  
On Behalf of  
Zhongshan City Senyi Electronics Co., Ltd.

Wireless remote control  
Model No.: SYB-B

FCC ID: WGFSYBB315

Prepared for : Zhongshan City Senyi Electronics Co., Ltd.  
Address : No. 52, Xinggang South Rd., Gangkou Town, Zhongshan  
City, Guangdong Province, China

Prepared by : ACCURATE TECHNOLOGY CO. LTD  
Address : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.  
Science & Industry Park, Nanshan, Shenzhen, Guangdong  
P.R. China

Tel: (0755) 26503290  
Fax: (0755) 26503396

Report Number : ATE20081161  
Date of Test : June 23, 2008  
Date of Report : June 26, 2008

## TABLE OF CONTENTS

Description	Page
<b>Test Report Certification</b>	
<b>1. GENERAL INFORMATION .....</b>	<b>4</b>
1.1. Description of Device (EUT).....	4
1.2. Description of Test Facility .....	4
1.3. Measurement Uncertainty.....	5
<b>2. MEASURING DEVICE AND TEST EQUIPMENT .....</b>	<b>6</b>
<b>3. SUMMARY OF TEST RESULTS.....</b>	<b>7</b>
<b>4. THE FIELD STRENGTH OF RADIATION EMISSION .....</b>	<b>8</b>
4.1. Block Diagram of Test Setup.....	8
4.2. The Field Strength of Radiation Emission Measurement Limits.....	9
4.3. Configuration of EUT on Measurement .....	9
4.4. Operating Condition of EUT .....	9
4.5. Test Procedure .....	10
4.6. The Field Strength of Radiation Emission Measurement Results .....	11
<b>5. 20DB OCCUPIED BANDWIDTH .....</b>	<b>13</b>
5.1. Block Diagram of Test Setup.....	13
5.2. The Bandwidth of Emission Limit According To FCC Part 15 Section 15.231(c) .....	13
5.3. EUT Configuration on Measurement .....	14
5.4. Operating Condition of EUT .....	14
5.5. Test Procedure .....	14
5.6. Measurement Result .....	15
<b>6. RELEASE TIME MEASUREMENT.....</b>	<b>16</b>
6.1. Block Diagram of Test Setup.....	16
6.2. Release Time Measurement According To FCC Part 15 Section 15.231(a) .....	16
6.3. EUT Configuration on Measurement .....	17
6.4. Operating Condition of EUT .....	17
6.5. Test Procedure .....	17
6.6. Measurement Result .....	18
<b>7. AVERAGE FACTOR MEASUREMENT .....</b>	<b>19</b>
7.1. Block Diagram of Test Setup.....	19
7.2. Average factor Measurement according to ANSI 63.4: 2003.....	19
7.3. EUT Configuration on Measurement .....	20
7.4. Operating Condition of EUT .....	20
7.5. Test Procedure .....	20
7.6. Measurement Result .....	21

APPENDIX I ( TEST CURVES) (9 pages)

## Test Report Certification

Applicant : Zhongshan City Senyi Electronics Co., Ltd.  
 Manufacturer : Zhongshan City Senyi Electronics Co., Ltd.  
 EUT Description : Wireless remote control  
     (A) MODEL NO.: SYB-B  
     (B) SERIAL NO.: N/A  
     (C) POWER SUPPLY: 9V DC (“6F22” battery 1×)

Measurement Procedure Used:

FCC Rules and Regulations Part 15 Subpart C Section 15.231: 2007 & ANSI 63.4: 2003


The device described above is tested by ACCURATE TECHNOLOGY CO. LTD to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C Section 15.231. The measurement results are contained in this test report and ACCURATE TECHNOLOGY CO. LTD is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of ACCURATE TECHNOLOGY CO. LTD.

Date of Test :


June 23, 2008

Prepared by :



(Engineer)

Approved & Authorized Signer :



(Manager)

## 1. GENERAL INFORMATION

### 1.1. Description of Device (EUT)

EUT : Wireless remote control  
 Model Number : SYB-B  
 Power Supply : 9V DC ("6F22" battery 1×)  
 Operation Frequency : 315MHz  
 Applicant : Zhongshan City Senyi Electronics Co., Ltd.  
 Address : No. 52, Xinggang South Rd., Gangkou Town, Zhongshan City, Guangdong Province, China  
 Manufacturer : Zhongshan City Senyi Electronics Co., Ltd.  
 Address : No. 52, Xinggang South Rd., Gangkou Town, Zhongshan City, Guangdong Province, China  
 Date of sample received : June 20, 2008  
 Date of Test : June 23, 2008

### 1.2. Description of Test Facility

EMC Lab : Accredited by TUV Rheinland Shenzhen  
 Listed by FCC  
 The Registration Number is 752051  
 Listed by Industry Canada  
 The Registration Number is 5077A-2  
 Accredited by China National Accreditation Committee for Laboratories  
 The Certificate Registration Number is L3193  
 Name of Firm : ACCURATE TECHNOLOGY CO. LTD  
 Site Location : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd. Science & Industry Park, Nanshan, Shenzhen, Guangdong P.R. China

### 1.3.Measurement Uncertainty

Conducted emission expanded uncertainty = 2.23dB, k=2

Radiated emission expanded uncertainty = 4.12dB, k=2

## 2. MEASURING DEVICE AND TEST EQUIPMENT

**Table 1: List of Test and Measurement Equipment**

Kind of equipment	Manufacturer	Type	S/N	Calibrated until
EMI Test Receiver	Rohde&Schwarz	ESCS30	100307	03.29.2009
EMI Test Receiver	Rohde&Schwarz	ESPI3	101526/003	03.29.2009
Spectrum Analyzer	Agilent	E7405A	MY45115511	03.29.2009
Pre-Amplifier	Rohde&Schwarz	CBLU118354 0-01	3791	03.31.2009
Loop Antenna	Schwarzbeck	FMZB1516	1516131	03.28.2009
Bilog Antenna	Schwarzbeck	VULB9163	9163-323	03.29.2009
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-655	12.20.2008
Horn Antenna	Schwarzbeck	BBHA9170	9170-359	10.10.2008
LISN	Rohde&Schwarz	ESH3-Z5	100305	03.29.2009
LISN	Schwarzbeck	NLSK8126	8126431	03.29.2009

### 3. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
Section 15.207	Conducted Emission	N/A
Section 15.231(b)	Radiated Emission	Compliant
Section 15.231(c)	20dB Bandwidth	Compliant
Section 15.231(a)(1)	Release Time Measurement	Compliant

The product is a manually operated remote control transmitter.

Section 15.231 (a) (2), (3), (4) and (5) are not applicable.

## 4. THE FIELD STRENGTH OF RADIATION EMISSION


### 4.1. Block Diagram of Test Setup

#### 4.1.1. Block diagram of connection between the EUT and simulators



(EUT: Wireless remote control)

#### 4.1.2. Anechoic Chamber Test Setup Diagram

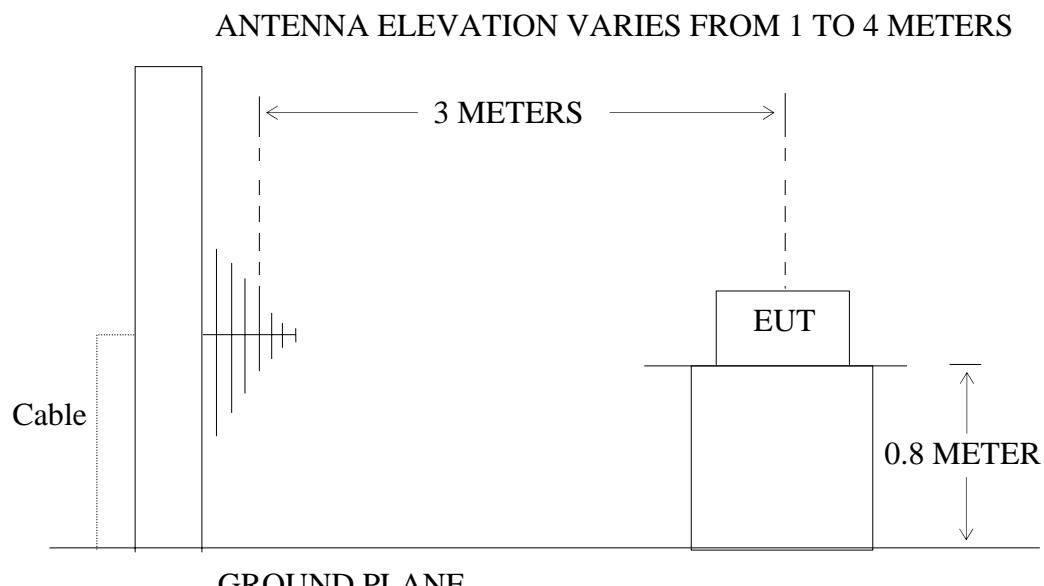

(EUT: Wireless remote control)

## 4.2.The Field Strength of Radiation Emission Measurement Limits

### 4.2.1.Radiation Emission Measurement Limits According to FCC Part 15 Section 15.231(b)

Frequency Range of Fundamental [MHz]	Field Strength of Fundamental Emission [Average] [ $\mu$ V/m]	Field Strength of Spurious Emission [Average] [ $\mu$ V/m]
40.66-40.70	2250	225
70-130	1250	125
130-174	1250-3750	125-375
174-260	3750	375
260-470	3750-12500	375-1250
Above 470	12500	1250

Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follows: for the band 130-174 MHz,  $\mu$ V/m at 3 meters =  $56.81818(F) - 6136.3636$ ; for the band 260-470 MHz,  $\mu$ V/m at 3 meters =  $41.6667(F) - 7083.3333$ . The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.

### 4.2.2.Restricted Band Radiation Emission Measurement Limits According to FCC part 15 Section 15.205 and Section15.209.

## 4.3.Configuration of EUT on Measurement

The following equipment is installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

### 4.3.1. Wireless remote control (EUT)

Model Number : SYB-B  
 Serial Number : N/A  
 Manufacturer : Zhongshan City Senyi Electronics Co., Ltd.

## 4.4.Operating Condition of EUT

### 4.4.1.Setup the EUT and simulator as shown as Section 4.1.

### 4.4.2.Turn on the power of all equipment.

### 4.4.3.Let the EUT work in measuring modes (TX) measure it.

#### 4.5. Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bi-log antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the EUT location must be manipulated according to ANSI 63.4 on radiated emission measurement.

The bandwidth of test receiver is set at 120KHz in 30-1000MHz, and 1MHz in 1000-4000MHz.

The frequency range from 30MHz to 4000MHz is checked.

## 4.6. The Field Strength of Radiation Emission Measurement Results

**PASS.**

The frequency range 30MHz to 4000MHz is investigated.

Date of Test:	June 23, 2008	Temperature:	25°C
EUT:	Wireless remote control	Humidity:	52%
Model No.:	SYB-B	Power Supply:	9V DC ("6F22" battery 1×)
Test Mode:	TX	Test Engineer:	Feng

Frequency (MHz)	Reading (dB $\mu$ V/m)	Factor Corr.	Average Factor	Result(dB $\mu$ V/m)		Limit(dB $\mu$ V/m)		Margin(dB $\mu$ V/m)		Polarization
	PEAK	(dB)	(dB)	AV	PEAK	AV	PEAK	AV	PEAK	
<b>315.1361</b>	<b>52.86</b>	<b>17.69</b>	<b>-9.7</b>	<b>60.85</b>	<b>70.55</b>	<b>75.6</b>	<b>95.6</b>	<b>-14.75</b>	<b>-25.05</b>	Horizontal
630.2214	34.82	24.56	-9.7	49.68	59.38	55.6	75.6	-5.92	-16.22	
945.2026	27.63	27.96	-9.7	45.89	55.59	55.6	75.6	-9.71	-20.01	
1260.495	58.63	-12.28	-9.7	36.65	46.35	55.6	75.6	-18.95	-29.25	
*1575.330	60.66	-11.03	-9.7	39.93	49.63	54.0	74.0	-14.07	-24.37	
1890.720	58.10	-9.69	-9.7	38.71	48.41	55.6	75.6	-16.89	-27.19	
*2205.695	61.24	-8.18	-9.7	43.36	53.06	54.0	74.0	-10.64	-20.94	
2520.806	63.43	-7.22	-9.7	46.51	56.21	55.6	75.6	-9.09	-19.39	
*2835.654	52.72	-5.96	-9.7	37.06	46.76	54.0	74.0	-16.94	-27.24	
3150.497	50.48	-4.35	-9.7	36.43	46.13	55.6	75.6	-19.17	-29.47	
3465.891	49.91	-3.33	-9.7	36.88	46.58	55.6	75.6	-18.72	-29.02	
*3780.676	48.02	-2.24	-9.7	36.08	45.78	54.0	74.0	-17.92	-28.22	
<b>315.1361</b>	<b>57.99</b>	<b>17.69</b>	<b>-9.7</b>	<b>65.98</b>	<b>75.68</b>	<b>75.6</b>	<b>95.6</b>	<b>-9.62</b>	<b>-19.92</b>	Vertical
630.2718	35.59	24.56	-9.7	50.45	60.15	55.6	75.6	-5.15	-15.45	
945.2987	26.73	27.97	-9.7	45.00	54.70	55.6	75.6	-10.60	-20.90	
1260.495	56.34	-12.28	-9.7	34.36	44.06	55.6	75.6	-21.24	-31.54	
*1575.330	52.19	-11.03	-9.7	31.46	41.16	54.0	74.0	-22.54	-32.84	
1890.720	50.81	-9.69	-9.7	31.42	41.12	55.6	75.6	-24.18	-34.48	
*2205.895	58.42	-8.17	-9.7	40.55	50.25	54.0	74.0	-13.45	-23.75	
2520.706	61.04	-7.22	-9.7	44.12	53.82	55.6	75.6	-11.48	-21.78	
*2835.654	56.18	-5.96	-9.7	40.52	50.22	54.0	74.0	-13.48	-23.78	
3150.497	52.42	-4.35	-9.7	38.37	48.07	55.6	75.6	-17.23	-27.53	
3465.891	54.36	-3.33	-9.7	41.33	51.03	55.6	75.6	-14.27	-24.57	
*3780.676	47.86	-2.24	-9.7	35.92	45.62	54.0	74.0	-18.08	-28.38	

Note:

1. \*: Denotes restricted band of operation.

Measurements were made using a peak detector and average detector. Any emission falling within the restricted bands of FCC Part 15 Section 15.205 were compliance with the emission limit of FCC Part 15 Section 15.209.

2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor

Where Corrected Factor = Antenna Factor + Cable Loss + High Pass Filter Loss – Amplifier Gain

3. FCC Limit for Average Measurement =  $41.6667(315) - 7083.3333 = 6041.6772 \mu\text{V}/\text{m} = 75.6 \text{dB}\mu\text{V}/\text{m}$

4. The spectral diagrams in appendix I display the measurement of peak values.

## 5. 20DB OCCUPIED BANDWIDTH


### 5.1. Block Diagram of Test Setup

#### 5.1.1. Block diagram of connection between the EUT and simulators



(EUT: Wireless remote control)

#### 5.1.2. Anechoic Chamber Test Setup Diagram

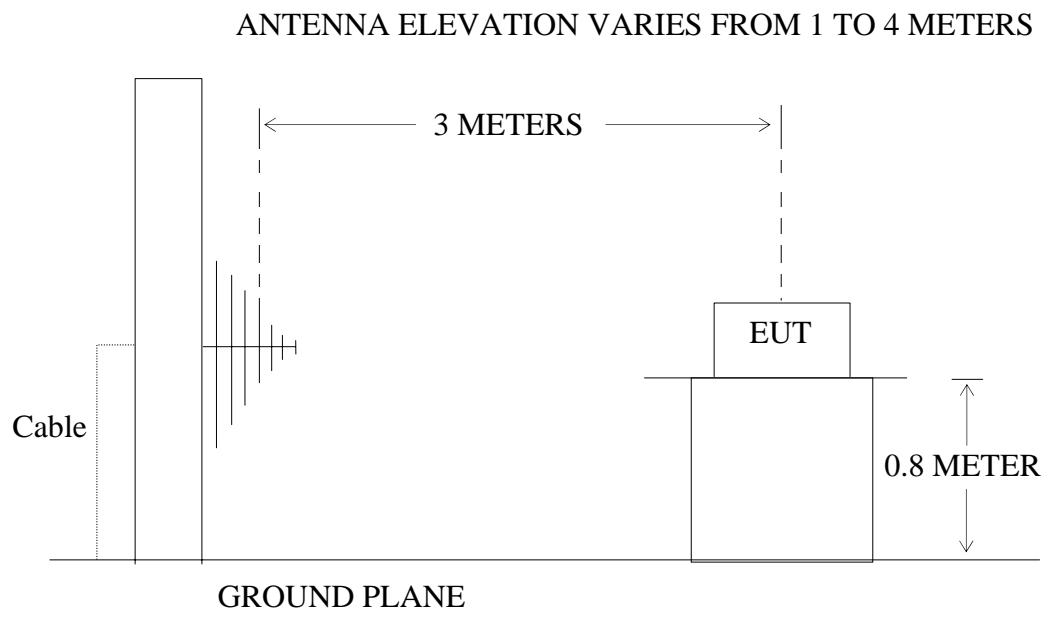

(EUT: Wireless remote control)

### 5.2. The Bandwidth of Emission Limit According To FCC Part 15 Section

#### 15.231(c)

The bandwidth of emission shall be no wider than 0.25% of the center frequency. Therefore, the bandwidth of the emission limit is  $315\text{MHz} \times 0.25\% = 787.5\text{kHz}$ . Bandwidth is determined at the two points 20 dB down from the top of modulated carrier.

### 5.3.EUT Configuration on Measurement

The following equipment are installed on the bandwidth of emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

#### 5.3.1.Wireless remote control (EUT)

Model Number : SYB-B  
Serial Number : N/A  
Manufacturer : Zhongshan City Senyi Electronics Co., Ltd.

### 5.4.Operating Condition of EUT

5.4.1.Setup the EUT and simulator as shown as Section 5.1.

5.4.2.Turn on the power of all equipment.

5.4.3.Let the EUT work in measuring mode (TX) measure it.

### 5.5.Test Procedure

5.5.1.Set SPA Center Frequency = Fundamental frequency, RBW = 10kHz, VBW = 30kHz, Span = 1000kHz.

5.5.2.Set SPA Max hold. Mark peak, -20dB

## 5.6.Measurement Result

**The EUT does meet the FCC requirement.**

-20dB bandwidth = 61.0kHz < 787.5kHz.

The spectral diagrams in appendix I.

## 6. RELEASE TIME MEASUREMENT


### 6.1. Block Diagram of Test Setup

#### 6.1.1. Block diagram of connection between the EUT and simulators



(EUT: Wireless remote control)

#### 6.1.2. Anechoic Chamber Test Setup Diagram

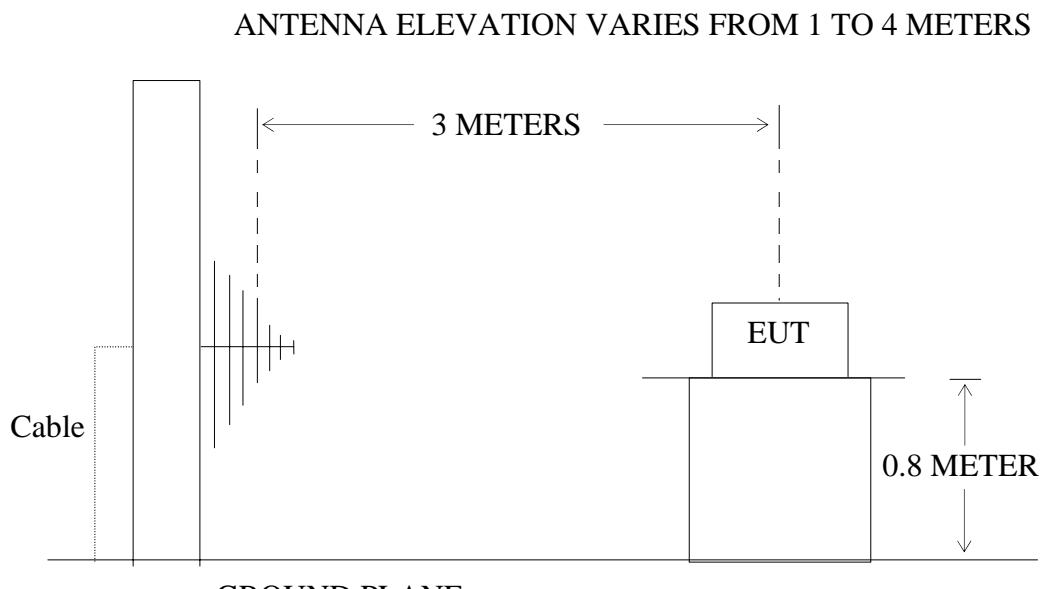

(EUT: Wireless remote control)

### 6.2. Release Time Measurement According To FCC Part 15 Section 15.231(a)

Section 15.231(a) (1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

### 6.3.EUT Configuration on Measurement

The following equipment are installed on Release Time Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

#### 6.3.1. Wireless remote control (EUT)

Model Number : SYB-B  
Serial Number : N/A  
Manufacturer : Zhongshan City Senyi Electronics Co., Ltd.

### 6.4.Operating Condition of EUT

6.4.1. Setup the EUT and simulator as shown as Section 6.1.

6.4.2. Turn on the power of all equipment.

6.4.3. Let the EUT work in measuring mode (TX) measure it.

### 6.5.Test Procedure

6.5.1. Set SPA Center Frequency = Fundamental frequency, RBW = 100kHz, VBW = 300kHz, Span = 0Hz. Sweep time = 5seconds.

6.5.2. Set EUT as normal operation and press Transmitter button.

6.5.3. Set SPA View. Delta Mark time.

## 6.6. Measurement Result

**The release time less than 5 seconds.**

Release Time= 240.4ms

The spectral diagrams in appendix I.


## 7. AVERAGE FACTOR MEASUREMENT

### 7.1. Block Diagram of Test Setup

#### 7.1.1. Block diagram of connection between the EUT and simulators



#### 7.1.2. Anechoic Chamber Test Setup Diagram

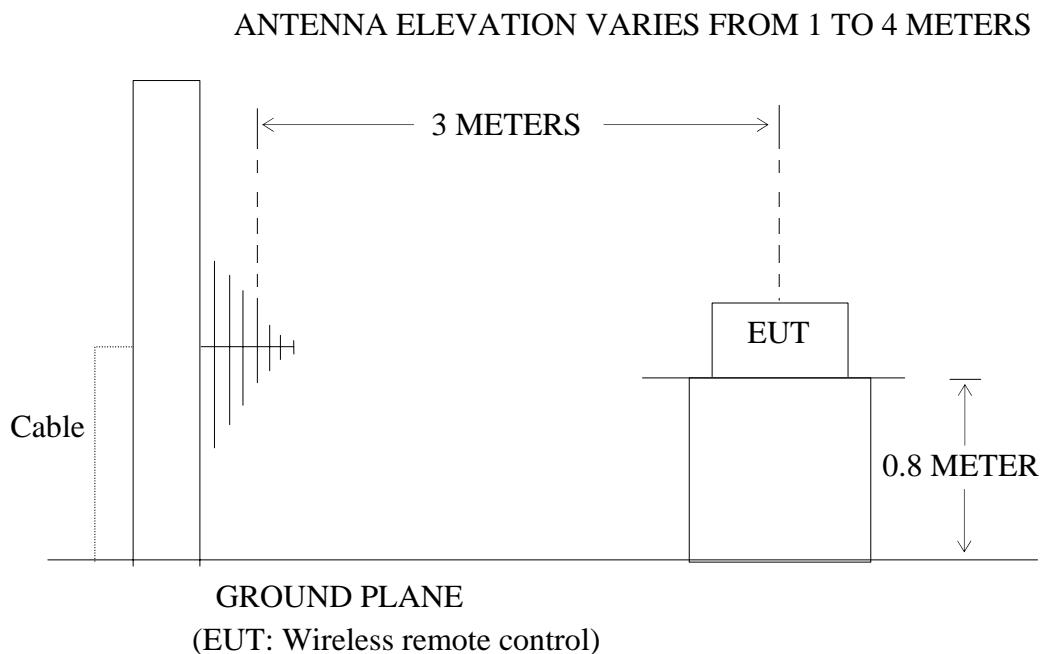

### 7.2. Average factor Measurement according to ANSI 63.4: 2003

**ANSI 63.4: 2003 Section 13.1.4.2** Devices transmitting pulsed emissions and subject to a limit requiring an average detector function for radiated emissions shall initially be measured with an instrument that uses a peak detector. A radiated emission measured with a peak detector may then be corrected to a true average using the appropriate factor for emission duty cycle. This correction factor relates the measured peak level to the average limit and is derived by averaging absolute field strength over one complete pulse train that is 0.1 s, or less, in length. If the pulse train is longer than 0.1 s, the average shall be determined from the average absolute field strength during the 0.1 s interval in which the field strength is at a maximum. Instructions on calculating the duty cycle of a transmitter with pulsed emissions are provided in ANSI 63.4 H.4, step j.

**Average factor in dB = 20 log (duty cycle)**

### 7.3.EUT Configuration on Measurement

The following equipment are installed on average factor Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

#### 7.3.1. Wireless remote control (EUT)

Model Number : SYB-B  
 Serial Number : N/A  
 Manufacturer : Zhongshan City Senyi Electronics Co., Ltd.

### 7.4.Operating Condition of EUT

7.4.1. Setup the EUT and simulator as shown as Section 7.1.

7.4.2. Turn on the power of all equipment.

7.4.3. Let the EUT work in measuring mode (TX) measure it. We select cause maximum duty cycle mode to operation.

### 7.5.Test Procedure

7.5.1. The time period over which the duty cycle is measured is 100 milliseconds, or the repetition cycle, whichever is a shorter time frame. The worst case (highest percentage on) duty cycle is used for the calculation.

7.5.2. Set SPA Center Frequency = Fundamental frequency, RBW = 100kHz, VBW = 300kHz, Span = 0Hz.

7.5.3. Set EUT as normal operation.

7.5.4. Set SPA View. Delta Mark time.

## 7.6. Measurement Result

**The duty cycle is simply the on time divided by the period:**

The duration of one cycle = 40.4ms

Effective period of the cycle =  $(5 \times 1.03) + (20 \times 0.40)$  ms = 13.15ms

$$DC = 13.15\text{ms}/40.4\text{ms} = 0.3255$$

**Therefore, the average factor is found by  $20\log 0.325 = -9.7\text{dB}$**

The spectral diagrams in appendix I.


## APPENDIX I (Test Curves)



**ACCURATE TECHNOLOGY CO., LTD.**  
F1,Bldg.A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Tel:+86-0755-26503290  
Fax:+86-0755-26503396  
<http://www.atc-lab.com>

Job No.:	RTTE #137	Polarization:	Horizontal
Standard:	FCC Class B 3M Radiated	Power Source:	DC 9V
Test item:	Radiation Test	Date:	08/06/23/
Temp. (°C)/Hum. (%RH):	25(°C)/52%RH	Time:	15/41/56
EUT:	Wireless remote control	Test By:	feng
Model:	SYB-B	Distance:	3m
Manufacturer:	Senyi		
Note:	Sample No.:082358	Report No.:	ATE20081161

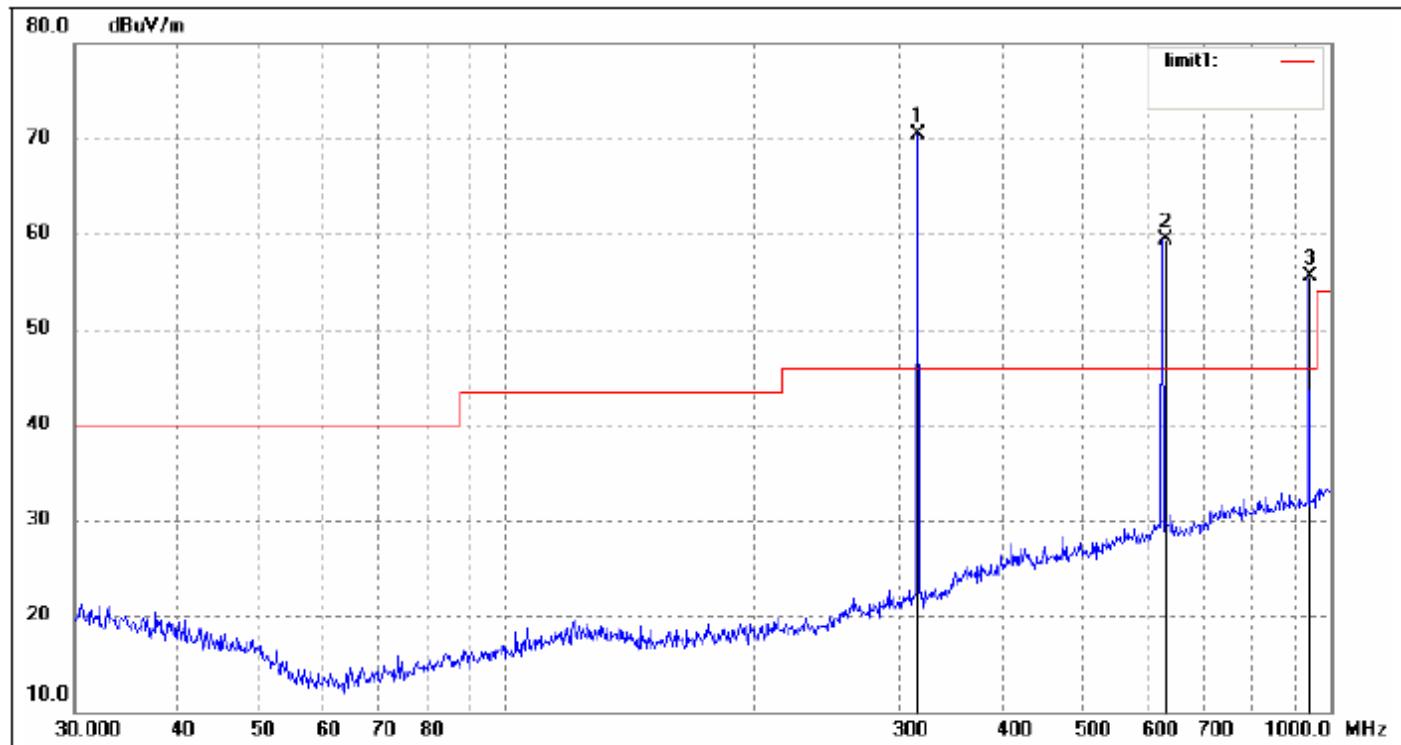

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree	Remark
1	315.1361	52.86	17.69	70.55	95.6	-25.05	peak	Fundamental
2	630.2214	34.82	24.56	59.38	75.6	-16.22	peak	Harmonics
3	945.2026	27.63	27.96	55.59	75.6	-20.01	peak	Harmonics




## ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Tel:+86-0755-26503290  
Fax:+86-0755-26503396  
http://www.atc-lab.com

Job No.:	RTTE #136	Polarization:	Vertical
Standard:	FCC Class B 3M Radiated	Power Source:	DC 9V
Test item:	Radiation Test	Date:	08/06/23/
Temp. (°C)/Hum. (%RH):	25(°C)/52%RH	Time:	15/40/18
EUT:	Wireless remote control	Test By:	feng
Model:	SYB-B	Distance:	3m
Manufacturer:	Senyi		
Note:	Sample No.:082358	Report No.:	ATE20081161

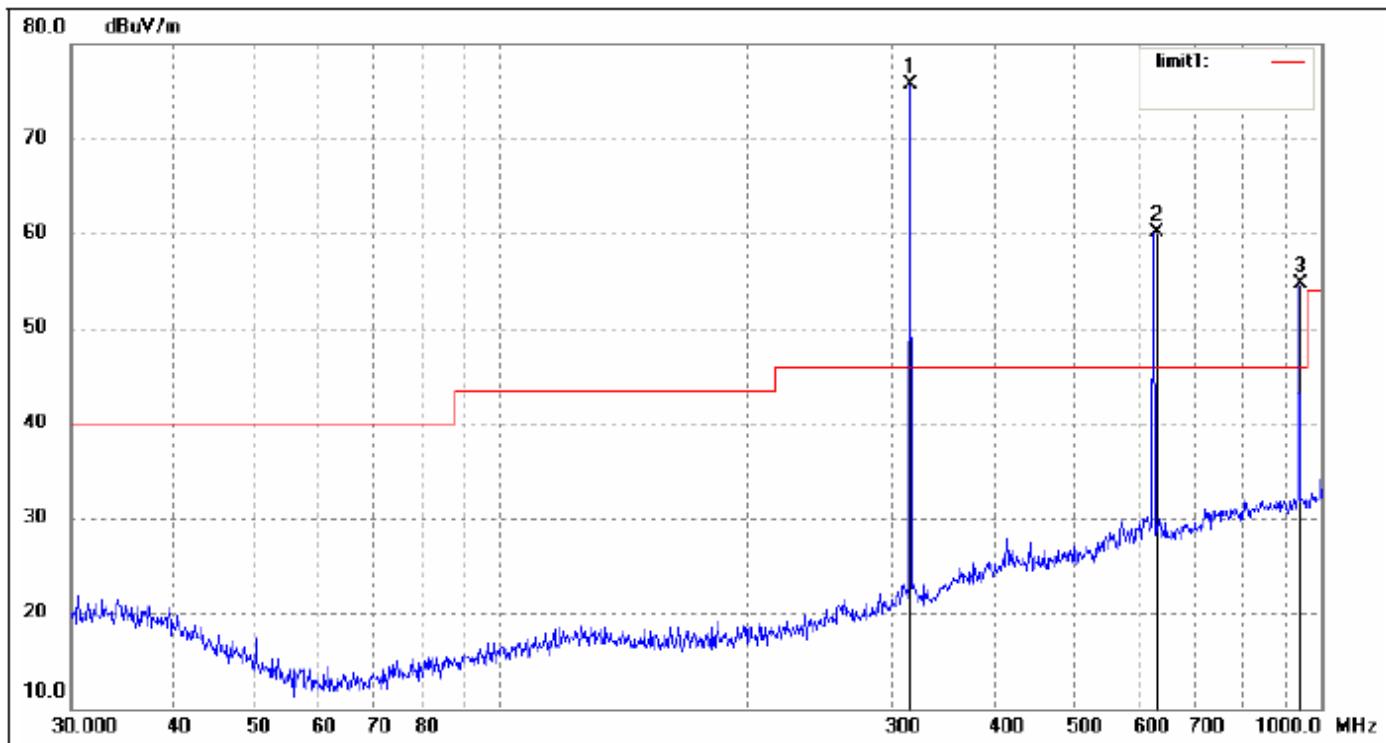


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree	Remark
1	315.1361	57.99	17.69	75.68	95.6	-19.92	peak	Fundamental
2	630.2718	35.59	24.56	60.15	75.6	-15.45	peak	Harmonics
3	945.2987	26.73	27.97	54.70	75.6	-20.90	peak	Harmonics



ACCURATE TECHNOLOGY CO., LTD.  
F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Tel:+86-0755-26503290  
Fax:+86-0755-26503396  
http://www.atc-lab.com

Job No.:	RTTE #140	Polarization:	Horizontal
Standard:	FCC Class B 3M Radiated	Power Source:	DC 9V
Test item:	Radiation Test	Date:	08/06/23/
Temp. (°C)/Hum. (%RH):	25(°C)/52%RH	Time:	16/16/02
EUT:	Wireless remote control	Test By:	feng
Model:	SYB-B	Distance:	3m
Manufacturer:	Senyi		
Note:	Sample No.:082358	Report No.:ATE20081161	

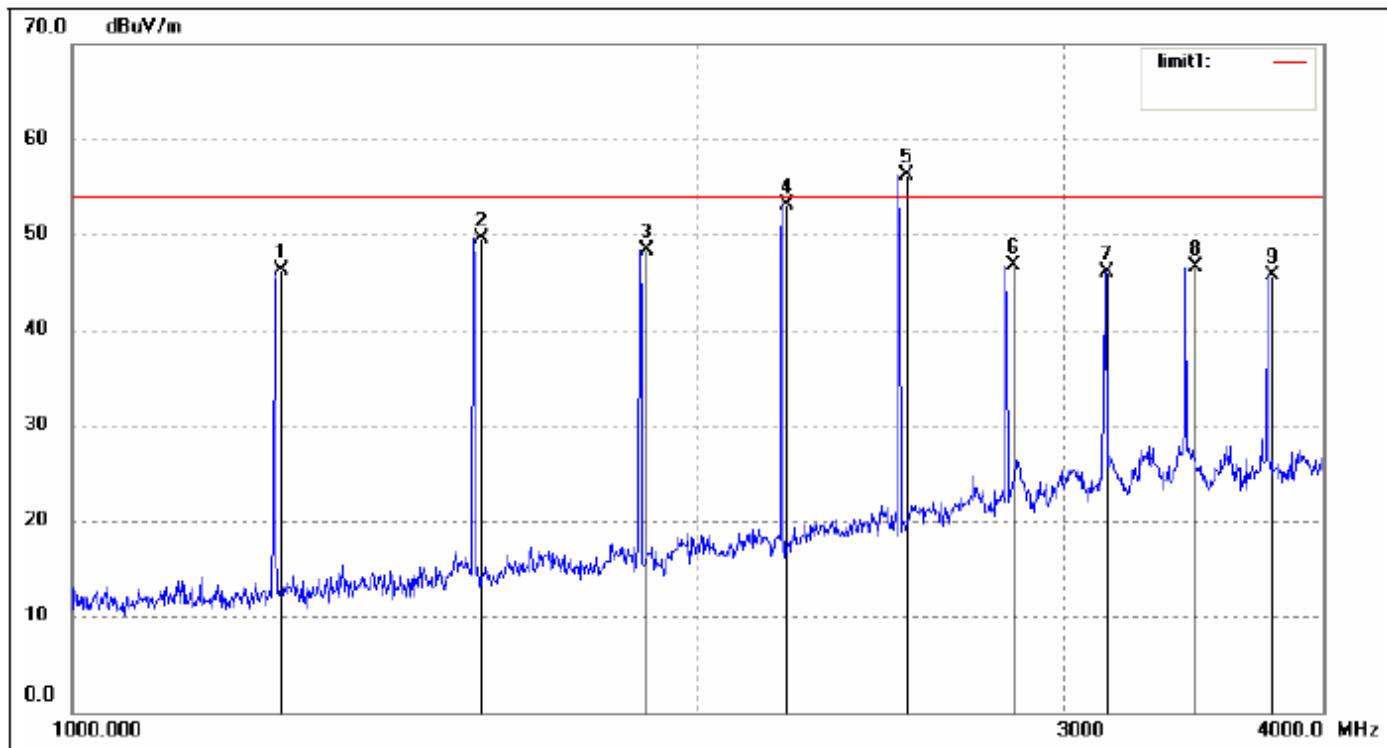

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	1260.495	58.63	-12.28	46.35	75.6	-29.25	peak	Harmonics
2	1575.330	60.66	-11.03	49.63	74.0	-24.37	peak	Restricted
3	1890.720	58.10	-9.69	48.41	75.6	-27.19	peak	Harmonics
4	2205.695	61.24	-8.18	53.06	74.0	-20.94	peak	Restricted
5	2520.806	63.43	-7.22	56.21	75.6	-19.39	peak	Harmonics
6	2835.654	52.72	-5.96	46.76	74.0	-27.24	peak	Restricted
7	3150.497	50.48	-4.35	46.13	75.6	-29.47	peak	Harmonics
8	3465.891	49.91	-3.33	46.58	75.6	-29.02	peak	Harmonics
9	3780.676	48.02	-2.24	45.78	74.0	-28.22	peak	Restricted




## ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Tel:+86-0755-26503290  
Fax:+86-0755-26503396  
http://www.atc-lab.com


Job No.:	RTTE #139	Polarization:	Vertical
Standard:	FCC Class B 3M Radiated	Power Source:	DC 9V
Test item:	Radiation Test	Date:	08/06/23/
Temp.( °C)/Hum.(%RH):	25(°C)/52%RH	Time:	16/13/38
EUT:	Wireless remote control	Test By:	feng
Model:	SYB-B	Distance:	3m
Manufacturer:	Senyi		
Note:	Sample No.:082358	Report No.:	ATE20081161

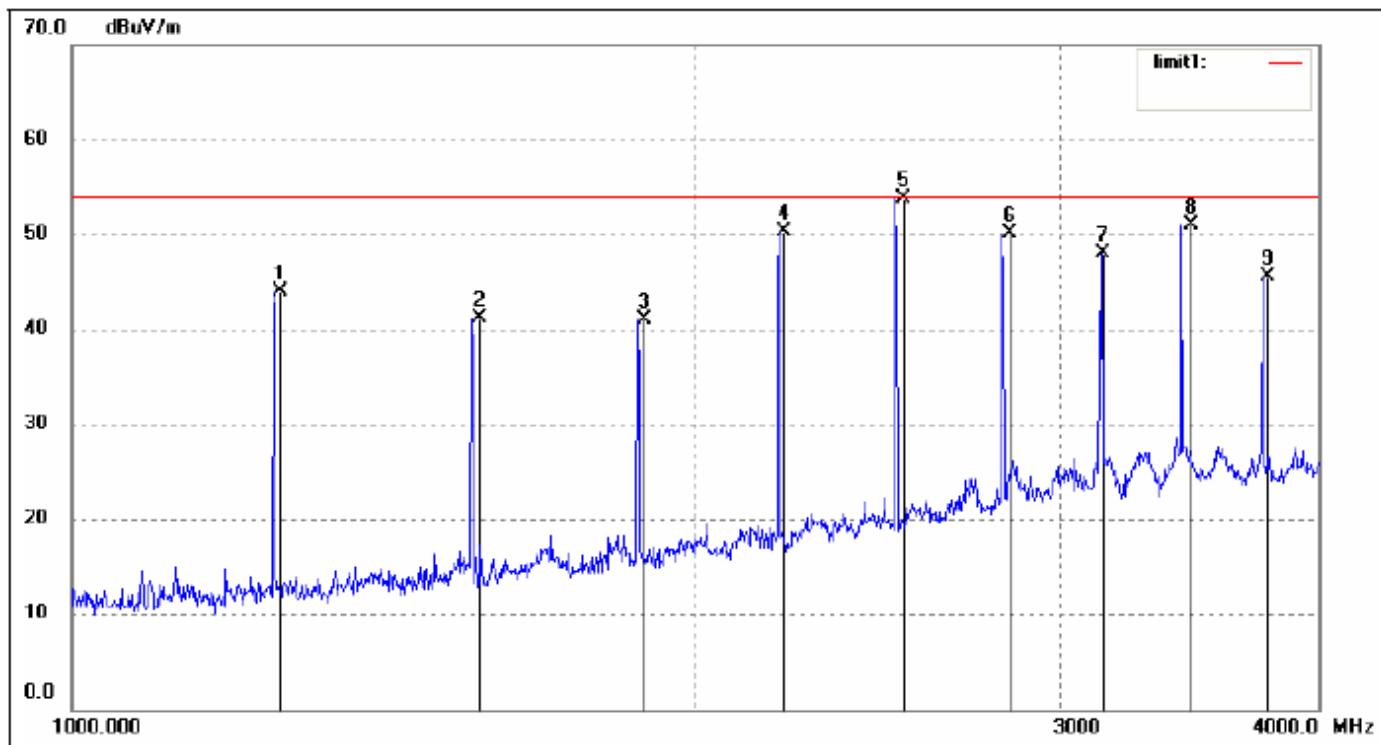


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	1260.495	56.34	-12.28	44.06	75.6	-31.54	peak	Harmonics
2	1575.330	52.19	-11.03	41.16	74.0	-32.84	peak	Restricted
3	1890.720	50.81	-9.69	41.12	75.6	-34.48	peak	Harmonics
4	2205.895	58.42	-8.17	50.25	74.0	-23.75	peak	Restricted
5	2520.706	61.04	-7.22	53.82	75.6	-21.78	peak	Harmonics
6	2835.654	56.18	-5.96	50.22	74.0	-23.78	peak	Restricted
7	3150.497	52.42	-4.35	48.07	75.6	-27.53	peak	Harmonics
8	3465.891	54.36	-3.33	51.03	75.6	-24.57	peak	Harmonics
9	3780.676	47.86	-2.24	45.62	74.0	-28.38	peak	Restricted

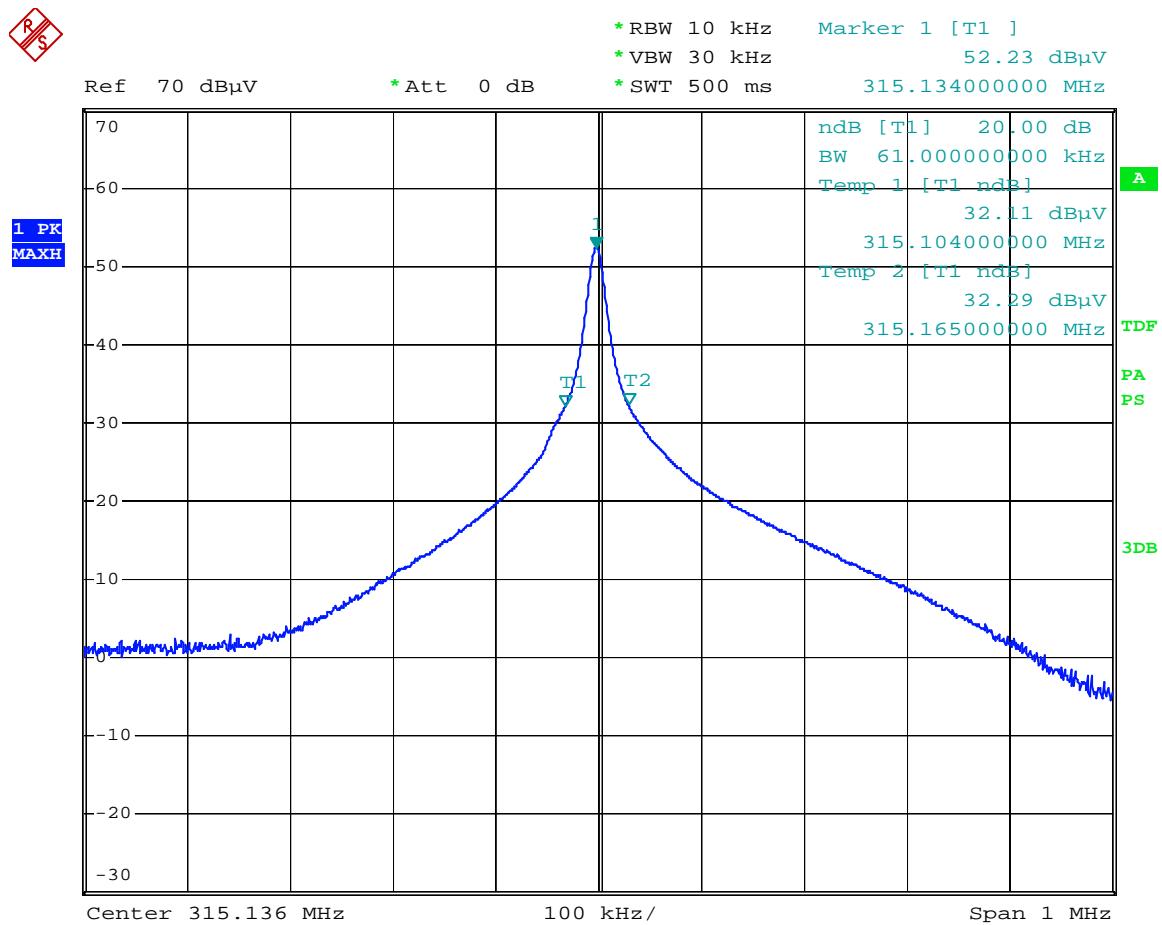

Date: 23.JUN.2008 15:16:49

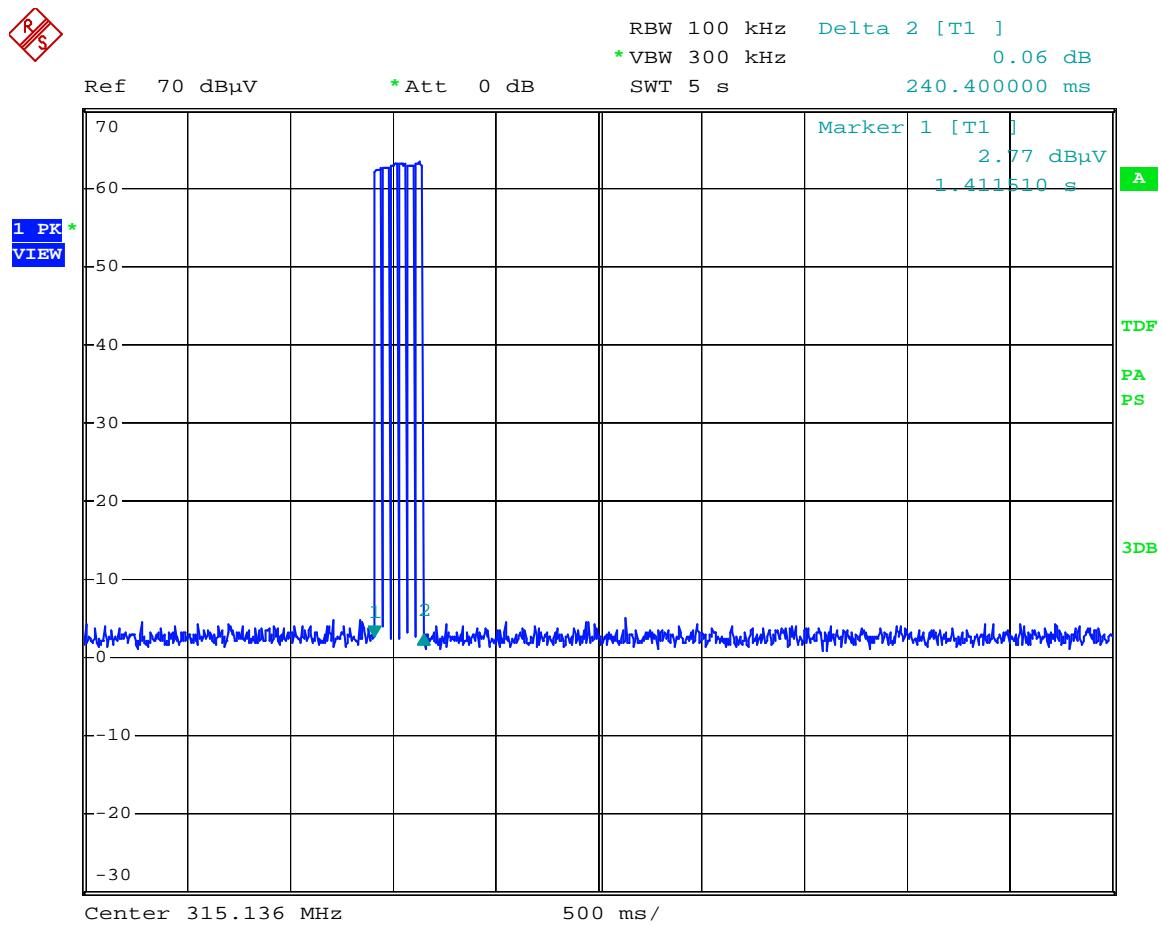


Date: 23.JUN.2008 15:31:54

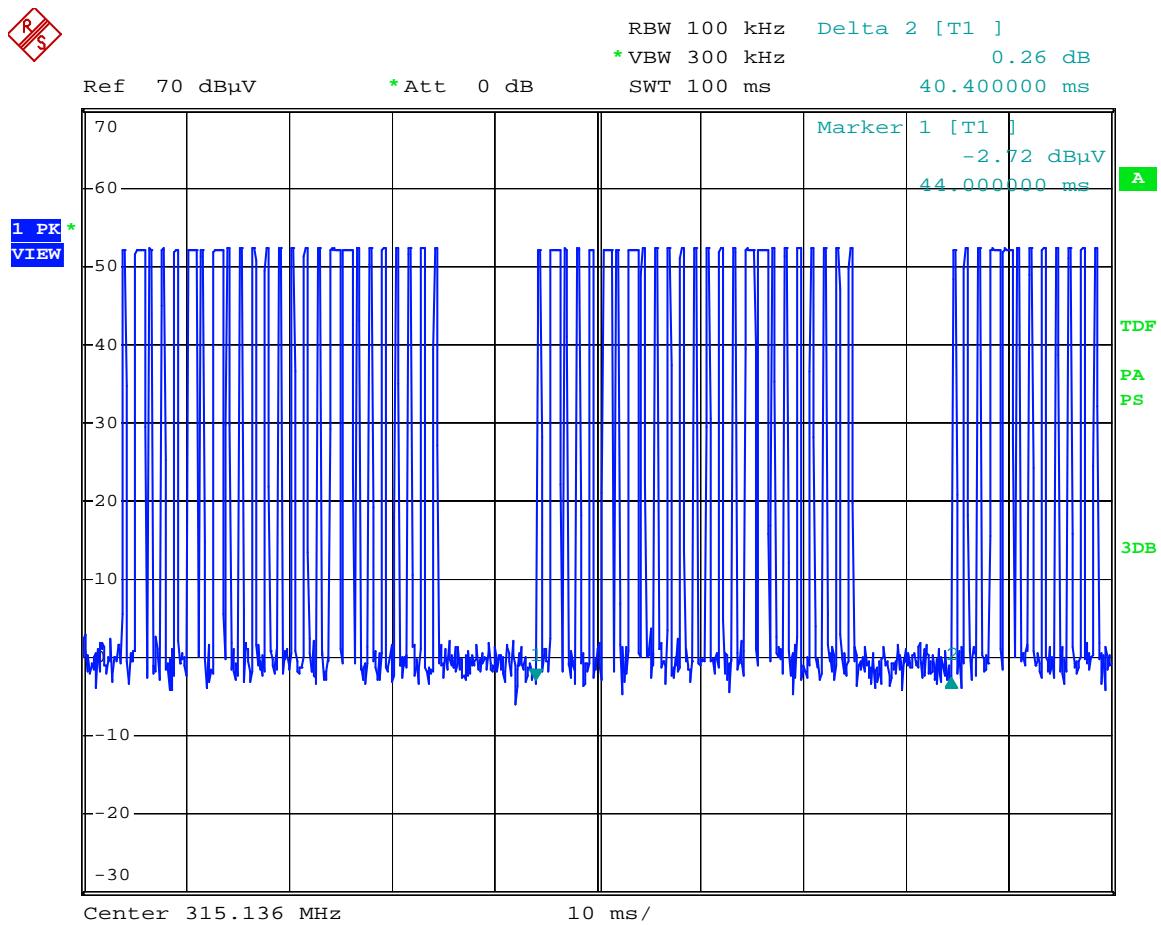


Date: 23.JUN.2008 15:21:45

The graph shows the pattern of coding during the signal transmission.  
It sums of 5 long 'on' signals and 20 short 'on' signals.

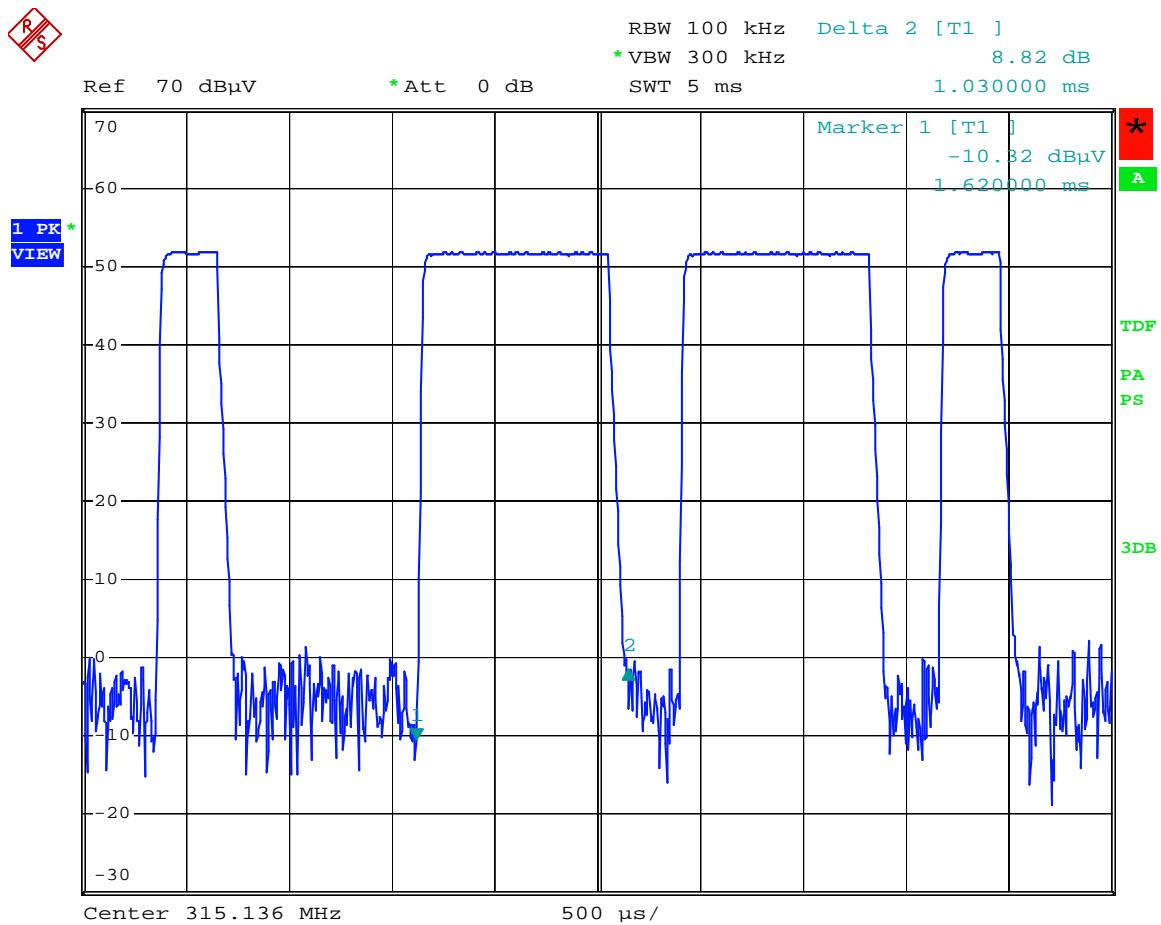

Date: 23.JUN.2008 15:25:51

The graph shows the duration of long 'on' signal. From marker 1 to marker 2, duration is 1.03ms.

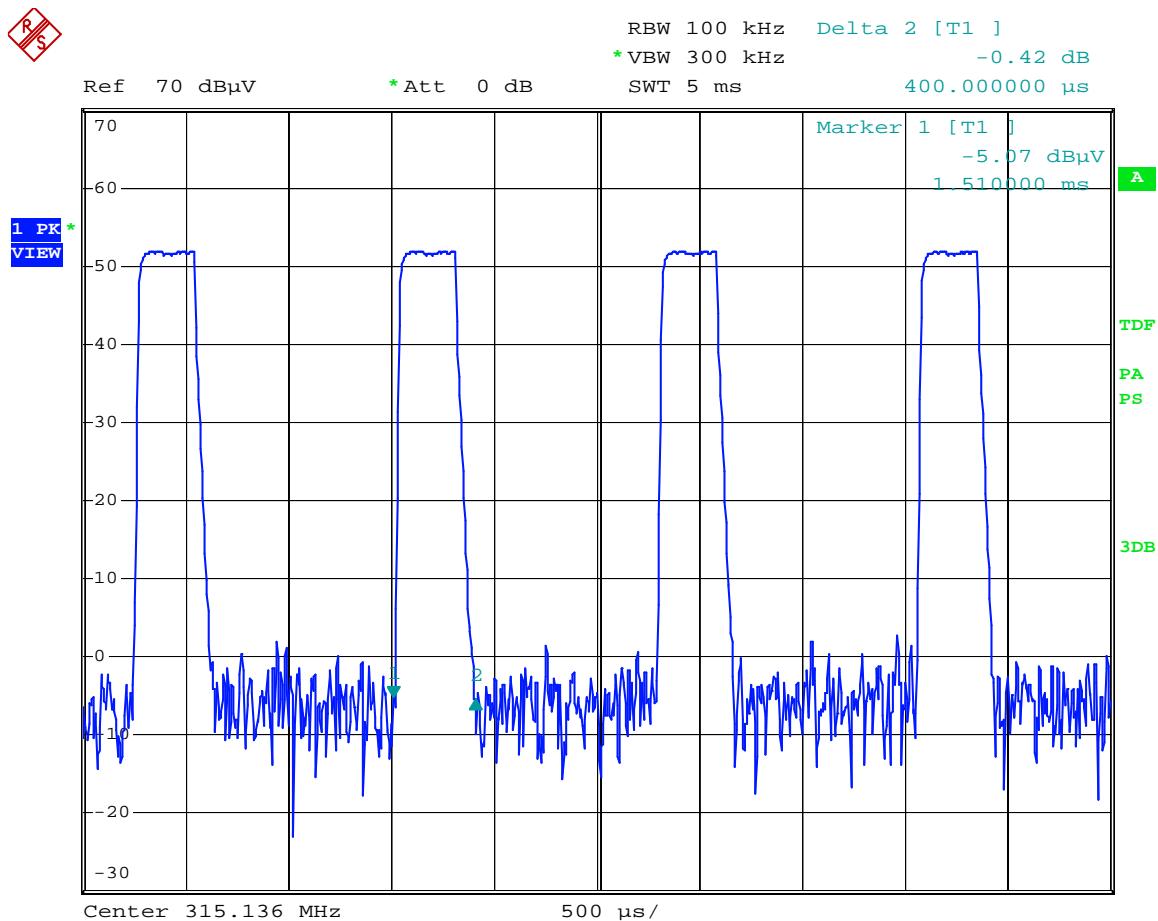

Date: 23.JUN.2008 15:27:05

The graph shows the duration of short 'on' signal. From marker 1 to marker 2, duration is 0.40ms.