

Electromagnetic Emission

FCC MEASUREMENT REPORT

CERTIFICATION OF COMPLIANCE

FCC Part 15 Certification Measurement

PRODUCT : Multi-Web PAD
MODEL/Serial No. : E&M-100 / Proto type
Multi model : NONE
FCC ID : WGT-EM-100
APPLICANT : e-detail,Inc
601-A Research & University-Industry Liaison Busan National University
San 30 Jang-Jun dong, Gum-Jung gu, Busan, Korea
Attn. : Geun Bae, Kim / COO
MANUFACTURER : MAXURACY.CO., LTD
2F., 197-24, Guro-Dong, Guro-Gu, Seoul, Korea
TYPE OF MODULATION : DSSS(CCK), OFDM(QAM)
FREQUENCY CHANNEL : 2 412 MHz to 2 472 MHz and Channel Spacing 5 MHz (13 Channels)
AIR DATE RATE : 11 Mbps(802.11b mode), 54 Mbps(802.11g mode)
ANTENNA TYPE : Integral antenna
ANTENNA GAIN : 2 dBi max
RULE PART(S) : FCC Part 15 Subpart B and Subpart C
FCC PROCEDURE : ANSI C63.4-2003
TEST REPORT No. : ETLE080603.462
DATES OF TEST : June 20 - 26, 2008
REPORT ISSUE DATE : July 15, 2008
TEST LABORATORY : ETL Inc. (FCC Designation Number : KR0022)

The Multi-Web PAD, Model E&M-100 has been tested in accordance with the measurement procedures specified in ANSI C63.4-2003 at the ETL Test Laboratory and has been shown to be complied with the electromagnetic radiated emission limits specified in FCC Rule Part15 Subpart C section 15.247

I attest to the accuracy of data. All measurement herein was performed by me or was made under my supervision and is correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

The results of testing in this report apply to the product/system which was tested only. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.



Hyung Seok, Lee / Chief Engineer

ETL Inc.
#371-51, Gasan-dong, Geumcheon-gu, Seoul, 153-803, Korea
Tel: 82-2-858-0786 Fax: 82-2-858-0788

Table of Contents

FCC Measurement Report

- 1. Introduction**
- 2. Product Information**
- 3. Description of Tests**
- 4. Test Condition**
- 5. Test Results**
 - 5.1 Summary of Test Results**
 - 5.2 Maximum Peak Output Power**
 - 5.3 Band Edges Measurement**
 - 5.4 Peak Power Spectral density**
 - 5.5 Spurious Emissions**
 - 5.6 Conducted Emissions Test**
 - 5.7 Radio Frequency Exposure**
- 6. Sample Calculation**
- 7. List of test Equipment used for Measurement**

Appendix A. FCC ID Label and Location

Appendix B. Test Setup Photographs

Appendix C. External Photographs

Appendix D. Internal Photographs

Appendix E. Block Diagram

Appendix F. Circuit Diagram

Appendix G. User Manual

Appendix H. Operational Description

Appendix I. Part list

Appendix J. Antenna Requirement

FCC MEASUREMENT REPORT

Scope – *Measurement and determination of electromagnetic emission(EME) of radio frequency devices including intentional radiators and/or unintentional radiators for compliance with the technical rules and regulations of the U.S Federal Communications Commission(FCC)*

General Information

Applicant Name	: e-detail, Inc
Address	: 601-A Research & University-Industry Liaison Busan National University San 30 Jang-Jun dong, Gum-Jung gu, Busan, Korea
Attention	: Geun Bae,Kim / COO

- **EUT Type** : Multi-Web PAD
- **Model Number** : E&M-100
- **S/N** : Proto type
- **Freq. Range** : 2 412 MHz – 2 472 MHz
- **Number of Channels** : 13
- **Modulation Technique** : DSSS(CCK), OFDM(QAM)
- **Frequency Channel** : 2 412 MHz to 2 472 MHz and Channel Spacing 5 MHz (13 Channels)
- **Air Data Rate** : 11 Mbps(802.11b mode), 54 Mbps(802.11g mode)
- **Antenna Type** : Integral antenna
- **ANTENNA GAIN** : 2 dBi max
- **FCC Rule Part(s)** : FCC Part 15 Subpart B and C
- **Test Procedure** : ANSI C63.4-2003
- **FCC Classification** : DTS: Part 15 Digital Transmission System
- : JBP: Part 15 Class B Computing Device Peripheral
- **Place of Tests** : ETL Inc. Testing Lab.
Radiated Emission test;
#584, Sangwhal-ri, Ganam-myeon, Yoju-gun,
Gyeonggi-do, 469-885, Korea

Conducted Emission test;
ETL Inc. Testing Lab.
371-51, Gasan-dong, Geumcheon-gu, Seoul, 153-803, Korea

Report no. ETLE080603.462, Page 3 of 47

1. INTRODUCTION

The measurement test for radiated and conducted emission test was conducted at the ETL Inc. The site is constructed in conformance with the requirements of the ANSI C63.4-2003 and CISPR Publication 16. The ETL has site descriptions on file with the FCC for 3 m and 10 m site configurations. Detailed description of test facility was found to be in compliance with FCC Rules according to the ANSI C63.4-2003 and registered to the Federal Communications Commission (FCC Designation Number : KR0022).

The measurement procedure described in American National Standard for Method of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (ANSI C63.4-2003) was used in determining radiated and conducted emissions from the e-detail, Inc. Model: E&M-100

2. PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is Multi-Web PAD.

2.2 General Specification

Product Name	
CPU	AMD Geode LX800
OS	Microsoft Windows XP Home Edition SP2
Chipset	AMD Geode CS5536
Memory	512M SO-DIMM PC2700 DDR333 / 1G SO-DIMM PC2700 DDR333
HDD	30G / 60G / 80G
Graphic System	SM722
	128-Bit 2D/3D Graphics Engine
	High Integration with 8MB of Internal Memory
	Hardware Acceleration MPEG2/DVD Playback
Display	Main LCD: 14.1 Wide TFT Glare LCD (standard 1280x800, LED Back light)
	Sub LCD: 7" Wide TFT Glare LCD (standard 1024x600, LED Back light)
Sound System	AC'97 2.3 compatible stereo audio CODEC
LAN	1000 BASE-TX/100BASE-TX/10BASE-T
Wireless LAN	IEEE802.11b/g
Pointing device	Touch screen
Camera	1.3M/USB2.0
Speaker	Stereo speaker(0.5W + 0.5W)
Interface	Right: USB2.0 x 3, PT S/W, Power
	Left: RJ-45 Jack, volume control S/W, WLAN S/W
	Ear Phone Jack, Power Jack D-Sub 15Pin
	LCD front: Touch Pad: Camera S/W, Beam S/W, Dv S/W
	Touch screen
Battery	Lithium ion battery (8.4V, 5600mAH), 2hour(on wireless)
AC adapter	Input 100-240V, 50/60Hz

3. DESCRIPTION OF TESTS

3.1 Radiated Emission Measurement

Radiated emission measurements were made in accordance with § 13 in ANSI C63.4-2003 "Measurement of Intentional radiators". The measurements were performed over the frequency range of 30 MHz to 40 GHz using antenna as the input transducer to a Spectrum analyzer or a Field Intensity Meter. The measurements were made with the detector set for "Peak, Quasi-peak, Average" within a bandwidth of 120 kHz and above 1GHz is 1 MHz.

Preliminary measurements were made at 3 m using broadband antennas, and spectrum analyzer to determine the frequency producing the maximum emission in shielded room. Appropriate precaution was taken to ensure that all emission from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth and height with respect to the antenna were noted for each frequency found. The spectrum was scanned from 30 MHz to 1 GHz using Log-Bicon antenna. Above 1 GHz, linearly polarized double ridge horn antennas were used. Final measurements were made open site at 3 m. The test equipment was placed on a wooden turn-table. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was re-examined by manual. The detector function was set to CISPR Quasi-peak mode and the bandwidth of the receiver was set to 120 kHz or 1 MHz depending on the frequency or type of signal. The EUT, support equipment and interconnecting cables were re-configured to the set-up producing the maximum emission for the frequency and were placed on top of a 0.8 m high nonmetallic 1m x 1.5 m table. The EUT, support equipment, and interconnecting cables were re-arranged and manipulated to maximize each emission. The turntable containing the system was rotated; the antenna height was varied 1 m to 4 m and stopped at the azimuth or height producing the maximum emission.

Varying the mode of operating frequencies of the EUT maximized each emission. The system was tested in all the three orthogonal planes and changing the polarity of the antenna. The worst-case emissions are recorded in the data tables. If necessary, the radiated emission measurement could be performed at a closer distance to ensure higher accuracy and the results were extrapolated to the specified distance using an inverse linear distance extrapolation factor (20 dB/decade) as per section 15.31(f).

Photographs of the worst-case emission can be seen in Photographs of the worst-case emission test setup can be seen in Appendix B.

3.2 Conducted Emission Measurement

Conducted emissions measurements were made in accordance with section § 13 in ANSI C63.4-2003 "measurement of intentional radiators" The measurements were performed over the frequency range of 0.15 MHz to 30 MHz using a 50Ω / 50 μ H LISN as the input transducer to a Spectrum Analyzer or a Test Receiver. The measurements were made with the detector set for "Peak" amplitude within a bandwidth of 9 kHz or for "quasi-peak" within a bandwidth of 9 kHz.

The line-conducted emission test is conducted inside a shielded anechoic chamber room with 1 m x 1.5 m x 0.8 m wooden table which is placed 0,4 m away from the vertical wall and 1,5 m away from the side wall of the chamber room. Two LISN are bonded to the shielded room. The EUT is powered from the LISN and the support equipment is powered from the other LISN. Power to the LISNs are filtered by a noise cut power line filters. All electrical cables are shielded by braided tinned steel tubing with inner ϕ 1.2 cm. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and these supply lines will be connected to the LISN. Non-inductive bundling to a 1 m length shortened all interconnecting cables more than 1 m. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the EMI Test Receiver to determine the frequency producing the maximum emission from the EUT. The frequency producing the maximum level was reexamined using to set Quasi-Peak mode by manual, after scanned by automatic Peak mode from 0.15 MHz to 30 MHz. The bandwidth of the spectrum analyzer was set to 9 kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission.

Photographs of the worst-case emission can be seen in Photographs of the worst-case emission test setup can be seen in Appendix B.

3.3 FCC Part 15.205 Restricted Bands of Operations

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1 000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

4. TEST CONDITION

4.1 Test Configuration

The device was configured for testing in a typical fashion (as a customer would normally use it). During the tests, the following conditions and configurations were used.


4.2 Description of Test modes

Multipad that has the control software.

The EUT operated under Tx, Rx and standby mode during all the tests.

With individual verifying, the maximum output power were found at 11 Mbps data rate for 802.11b mode and 54 Mbps data rate for 802.11g mode. The final tests were executed under these conditions recorded in this report individually.

4.3 The setup drawing(s)

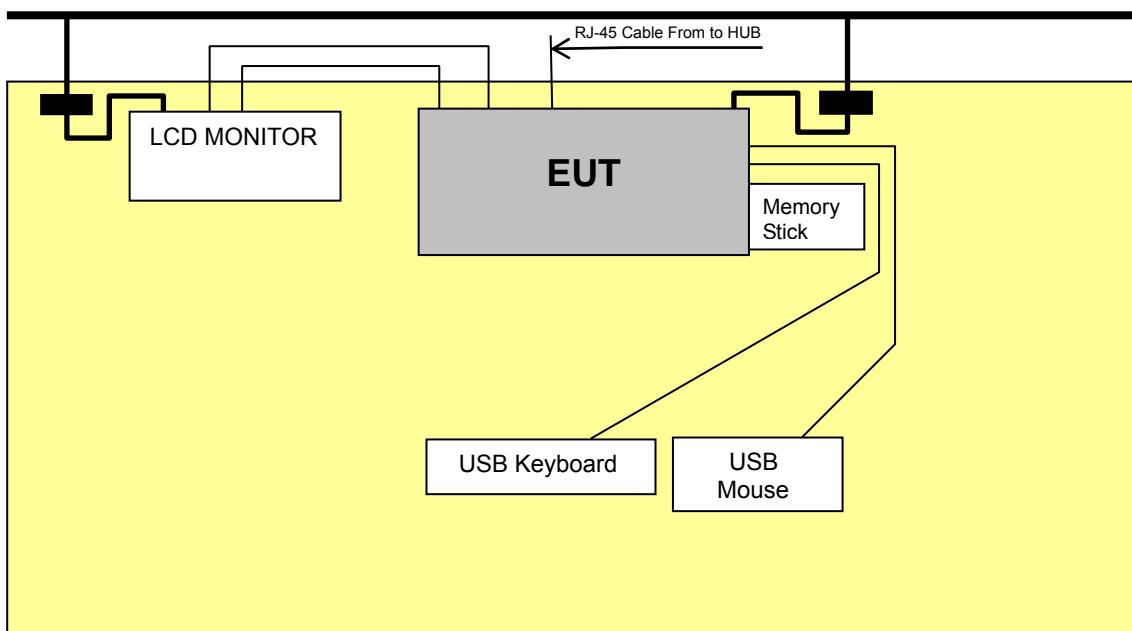

_____ : Data Line

_____ : Power Line



: Adapter

5. TEST RESULTS


5.1 Summary of Test Results

The measurement results were obtained with the EUT tested in the conditions described in this report. Detailed measurement data and plots showing the maximum emission of the EUT are reported.

Applied Standard : 47 CFR Part 15, Subpart B and C			
FCC Rule	Measurement Required	Limit	Result
15.247(a)(2)	6 dB Bandwidth	> 500 kHz	Pass
15.247(b)(3)	Maximum Peak Output Power	< 1 W	Pass
15.247(d)	Bandwidth of Frequency Band Edges	More than 20 dBc	Pass
15.247(e)	Power Spectral Density	8 dBm	Pass
15.109, 209(a)	Spurious Emissions	Various	Pass
15.107, 207	Conducted Emissions	Various	Pass
15.247(i) 1.1307(b)(1)	RF Exposure	< 20 cm	Pass

The data collected shows that the **e-detail, Inc / Multi-Web PAD / E&M-100** complied with technical requirements of above rules part 15.107, 109, 209 and 15.247 Limits.

The equipment is modified, mechanical or circuits to improve EMI status during a measurement.

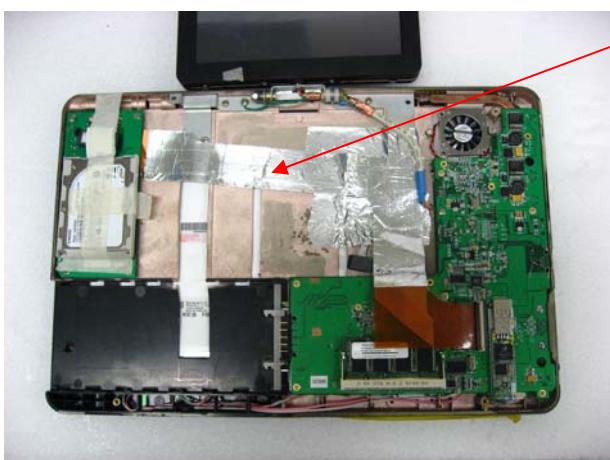

HDD Connector Cable is Shielding

5.2 6 dB Bandwidth

EUT	Multi-Web PAD / E&M-100
Limit apply to	FCC Part 15.247(a)(2)
Test Date	June 20, 2008
Operating Condition	RF transmitting continuously during the tested.
Result	Pass

Limit

The maximum 6 dB bandwidth shall be at least 500 kHz

Test Data

Mode	Frequency(MHz)	6 dB Bandwidth (MHz)	Limit
802.11b	2 412	12.00	> 500 kHz
	2 442	12.00	
	2 472	12.00	
802.11g	2 412	16.45	> 500 kHz
	2 442	16.20	
	2 472	16.50	

NOTES:

1. Measure frequency separation of relevant channel using spectrum analyzer.
2. RBW 100 kHz, VBW 100 kHz, span 50 MHz, Sweep time Auto.
3. Please see the measured plot in next page.




Test Engineer : Kug Kyoung, Yoon


Plots of 6 dB Bandwidth

802.11b Mode


[2 412MHz]

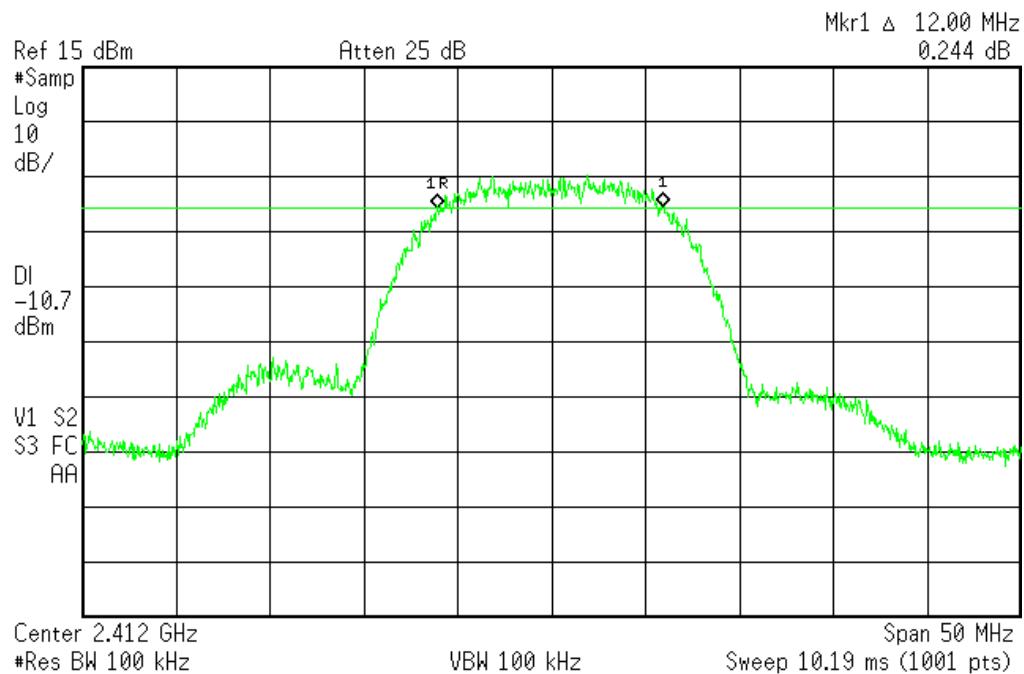

[2 442 MHz]

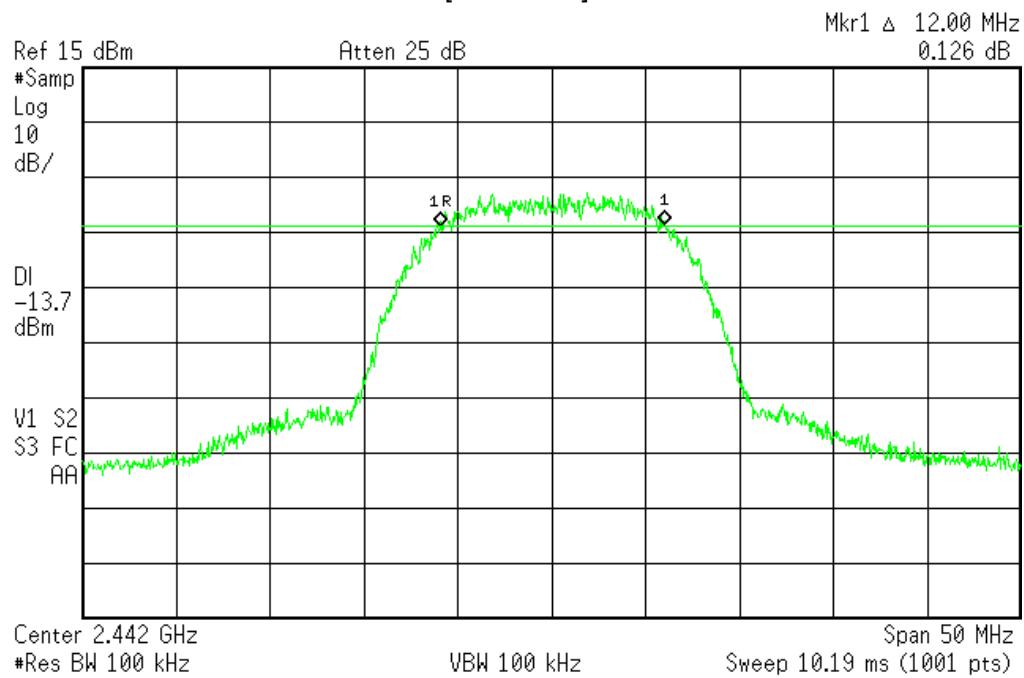




[2 472 MHz]

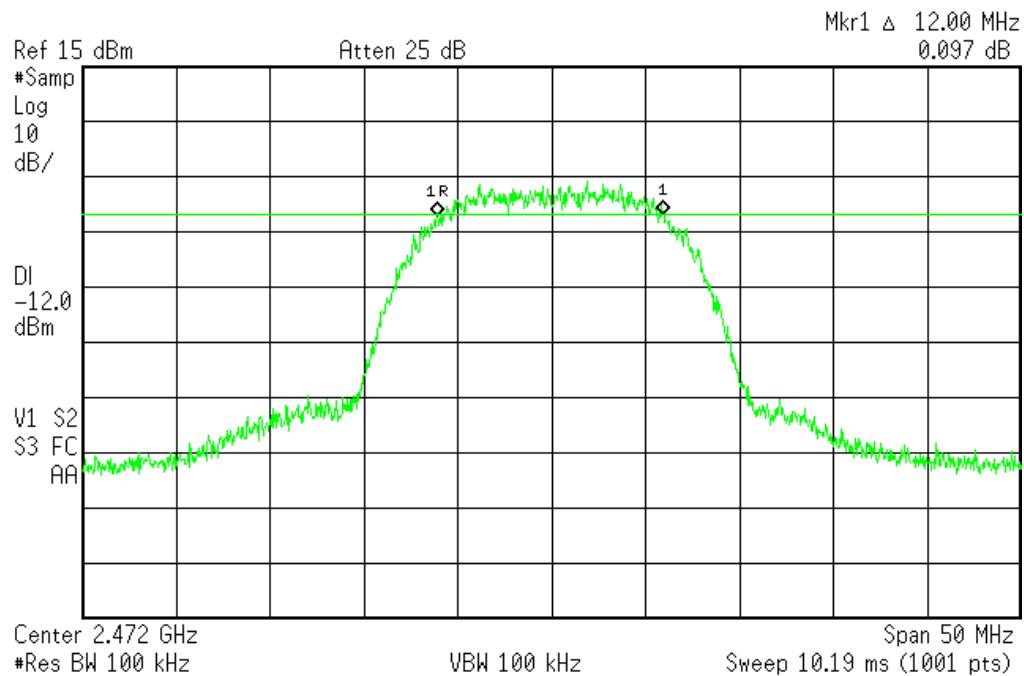

802.11g Mode

[2 412 MHz]

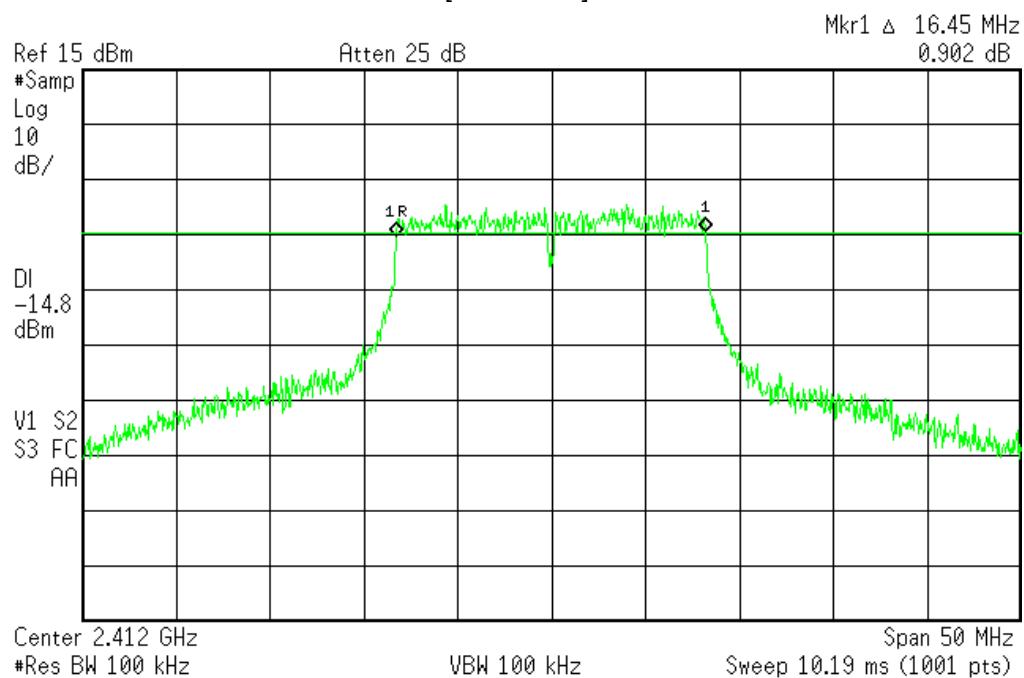

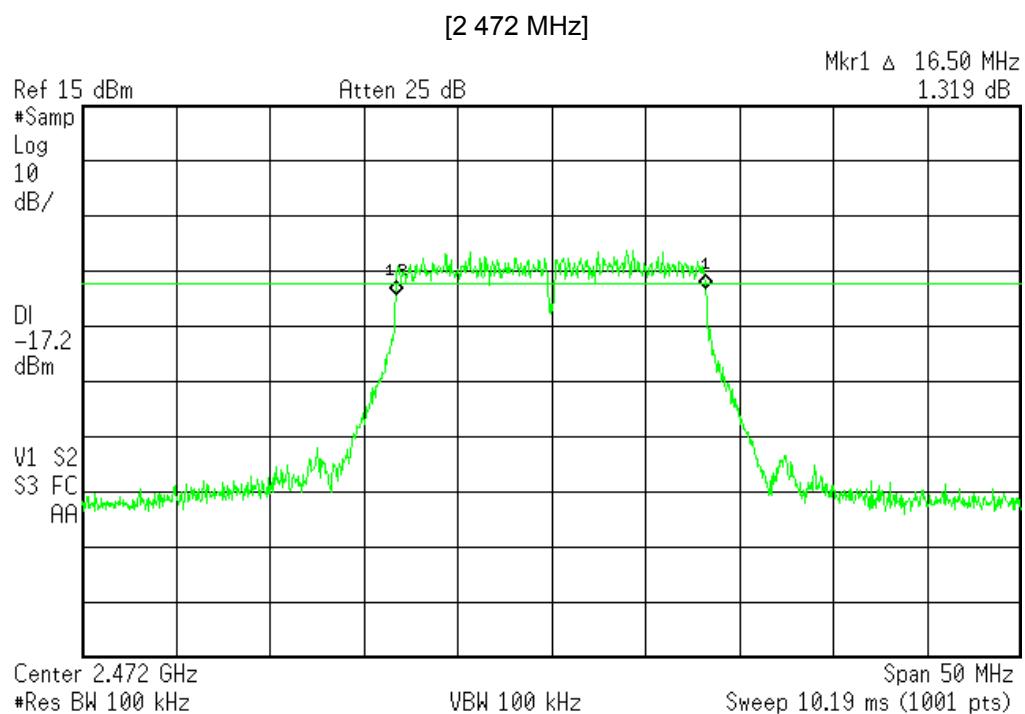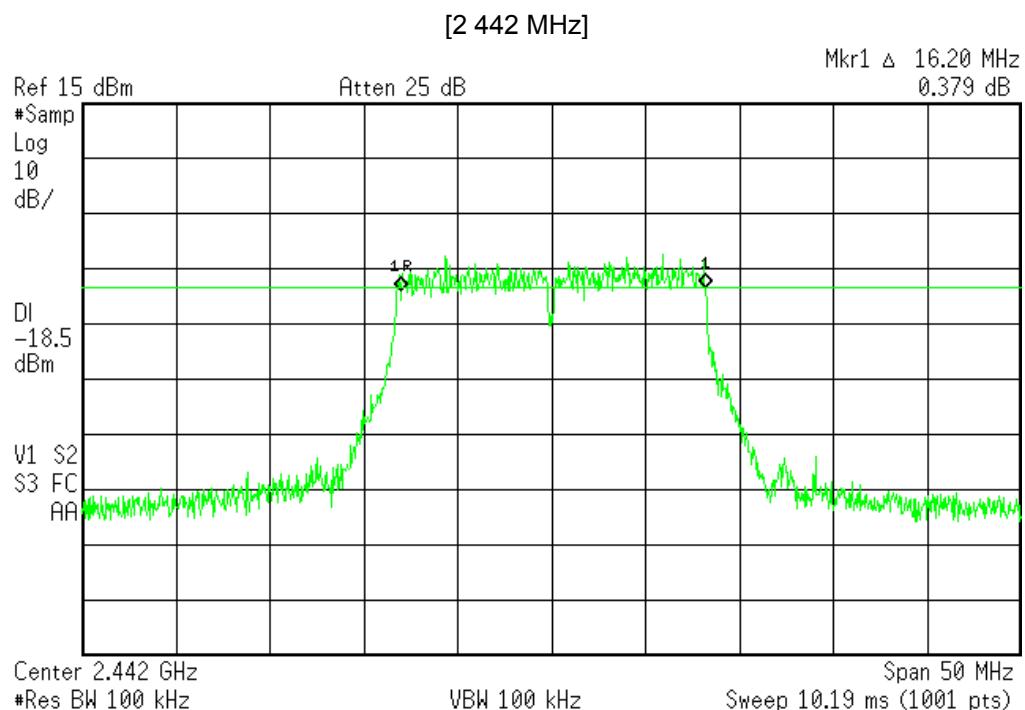

5.3 Maximum peak conducted output power

EUT	Multi-Web PAD / E&M-100
Limit apply to	FCC Part 15.247(b)(3)
Test Date	June 20, 2008
Operating Condition	RF transmitting continuously during the tested.
Result	Pass

Limit

The maximum peak conducted output power of the intentional radiator shall not exceed the following:

- For systems using digital modulation operating in the 2 400 MHz - 2 483.5 MHz band

Test Data

Mode	Frequency(MHz)	Output Power (dBm)	Limit
802.11b	2 412	9.51	> 30 dBm(1W)
	2 442	10.26	
	2 472	10.23	
802.11g	2 412	7.50	> 30 dBm(1W)
	2 442	7.68	
	2 472	8.12	

NOTES:



1. Measure conducted Maximum Peak Output of relevant channel using Spectrum analyzer
2. RBW 1 MHz, VBW 1 MHz, Channel Power




Test Engineer : Kug Kyoung, Yoon

Plots of Maximum Peak Output Power


802.11b mode

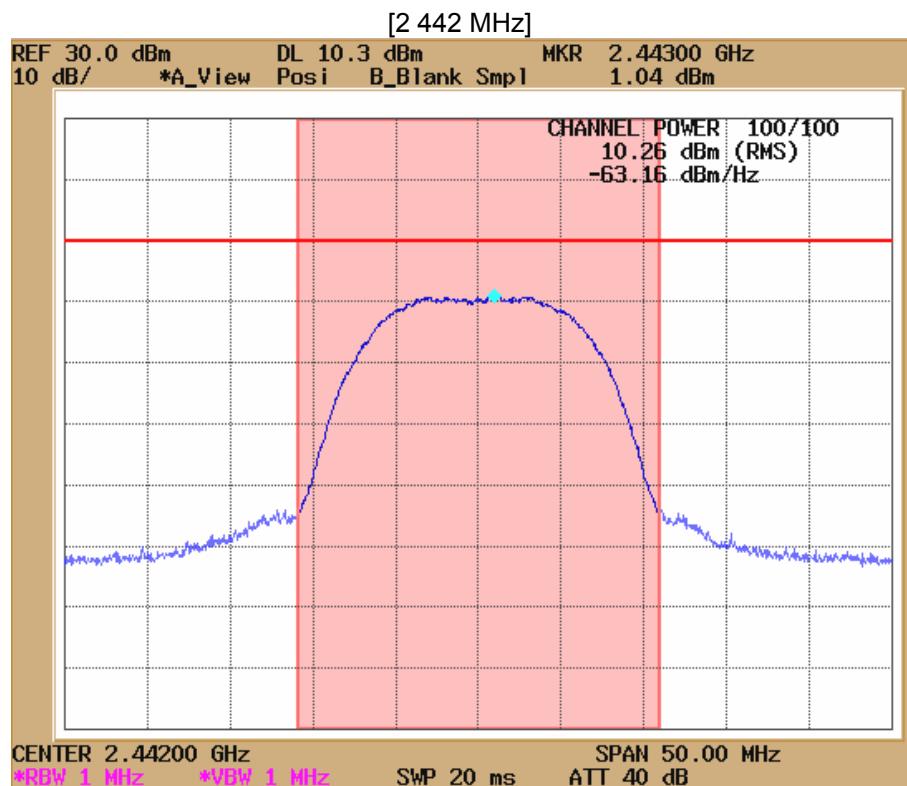
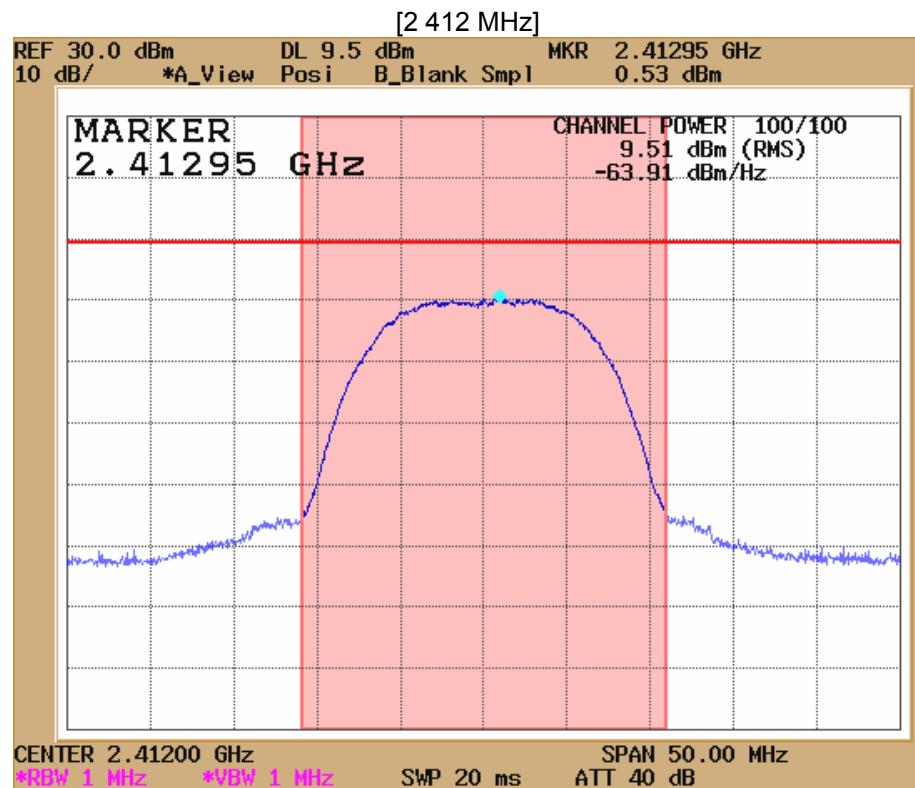


Report no. ETLE080603.462, Page 16 of 47

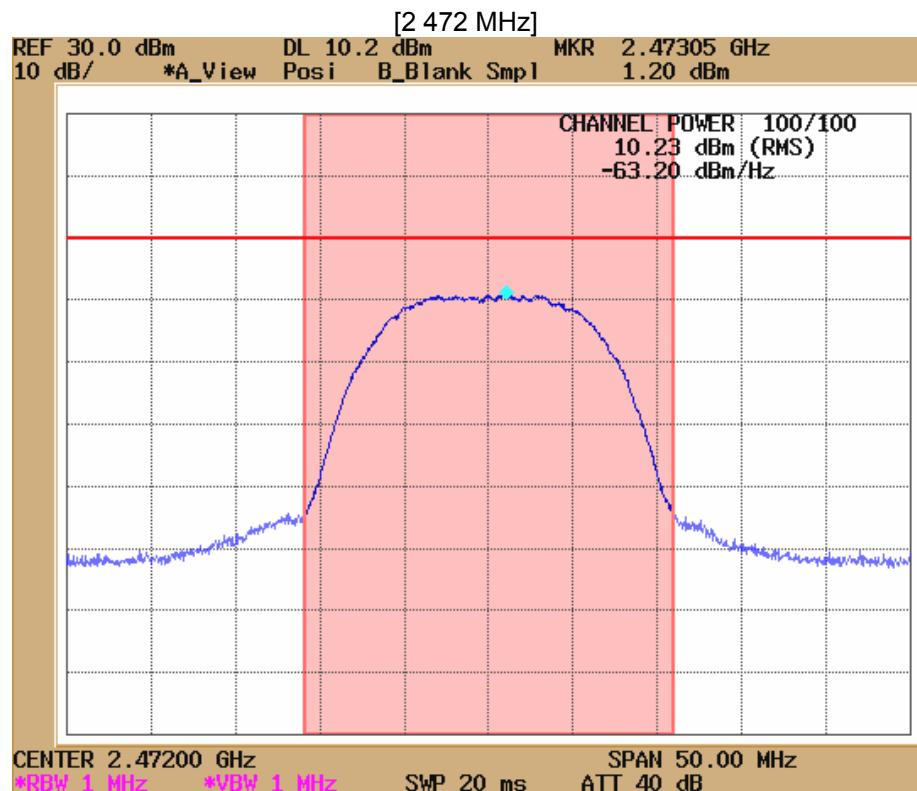

802.11g mode

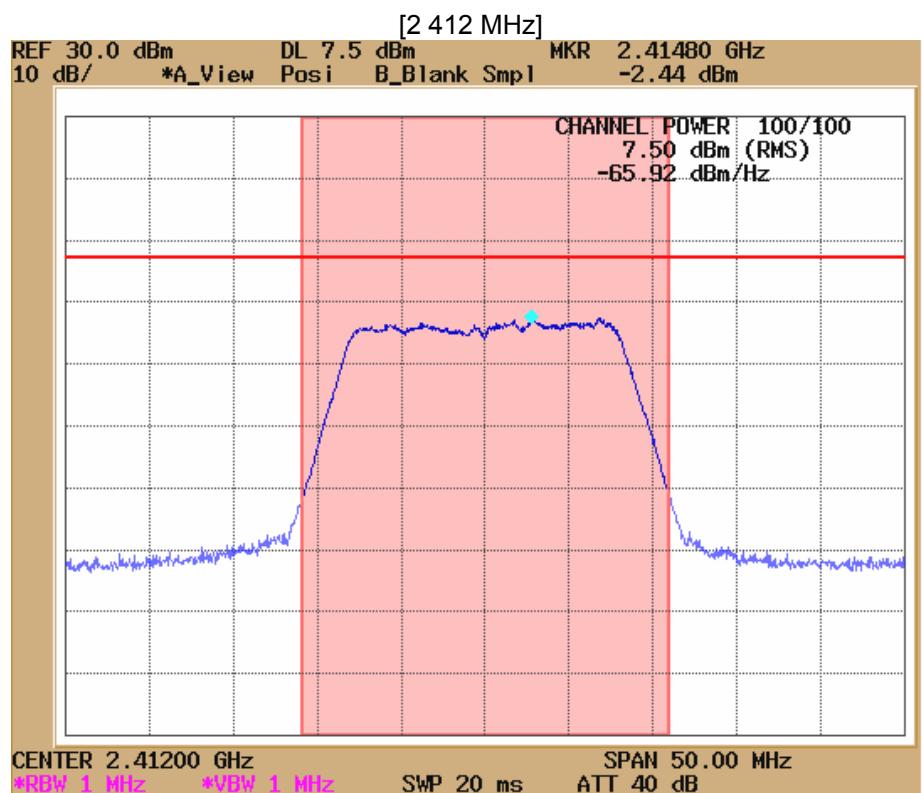

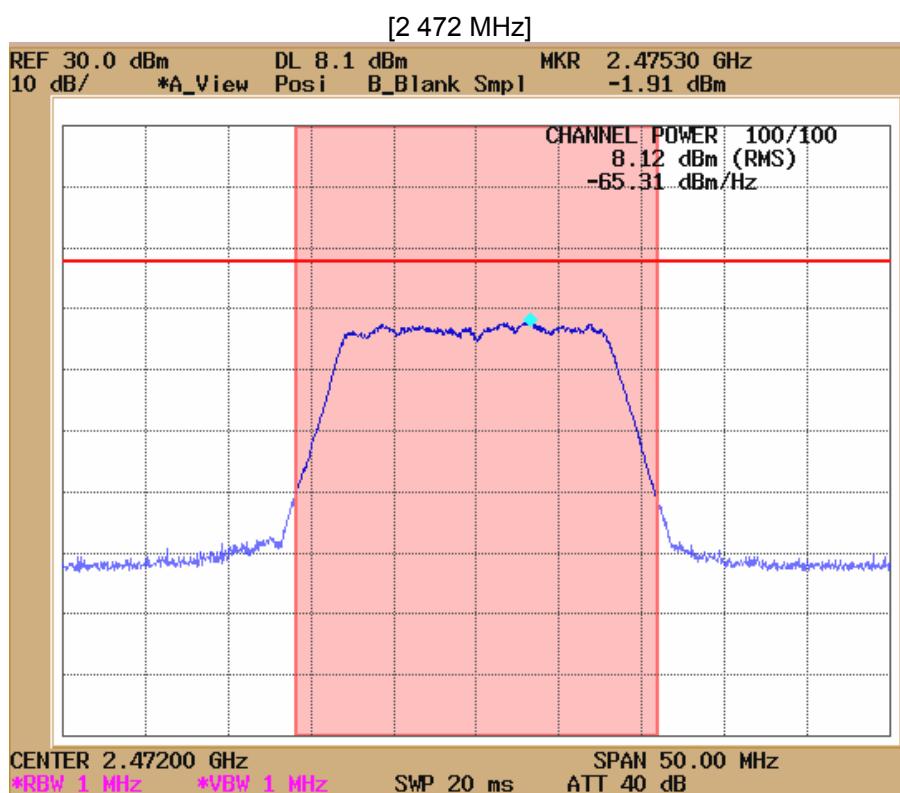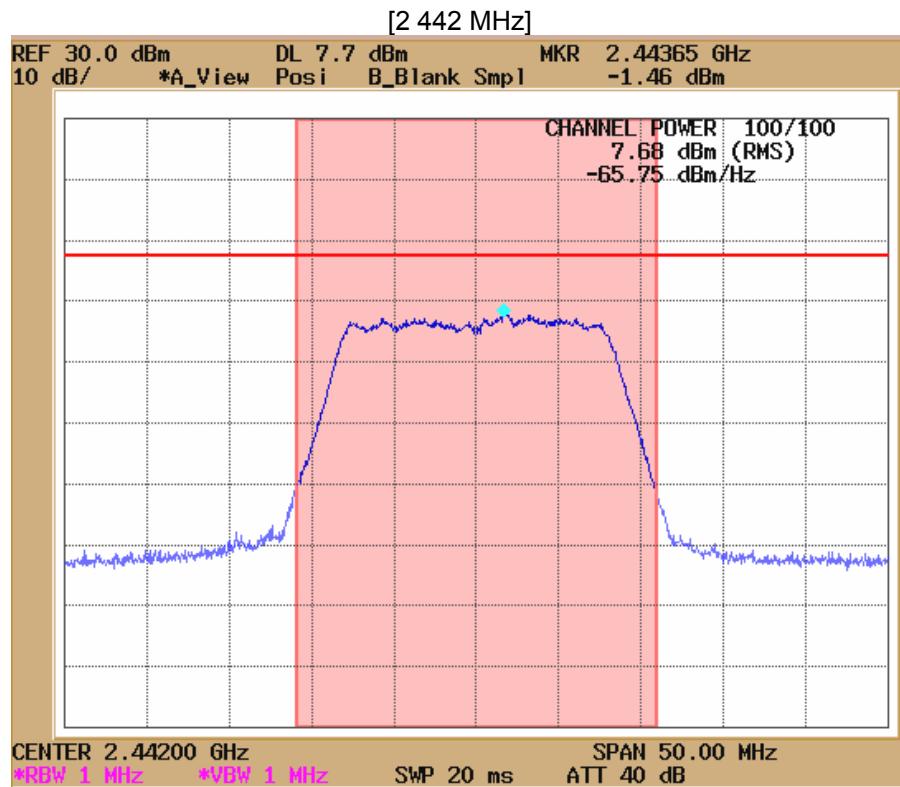

5.4 Bandwidth of Frequency Band Edges

EUT	Multi-Web PAD/ E&M-100
Limit apply to	FCC Part 15.247(d)
Test Date	June 23, 2008
Operating Condition	RF transmitting continuously during the tested.
Result	Pass

Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Test Results

- Refer to see the measured plot in next page.

NOTES:



1. The test was performed to make a direct field strength measurement at the band edge frequencies.







Test Engineer : Kug Kyoung, Yoon

5.4.1 Bandwidth of Frequency Band Edges (Conducted)



802.11b mode

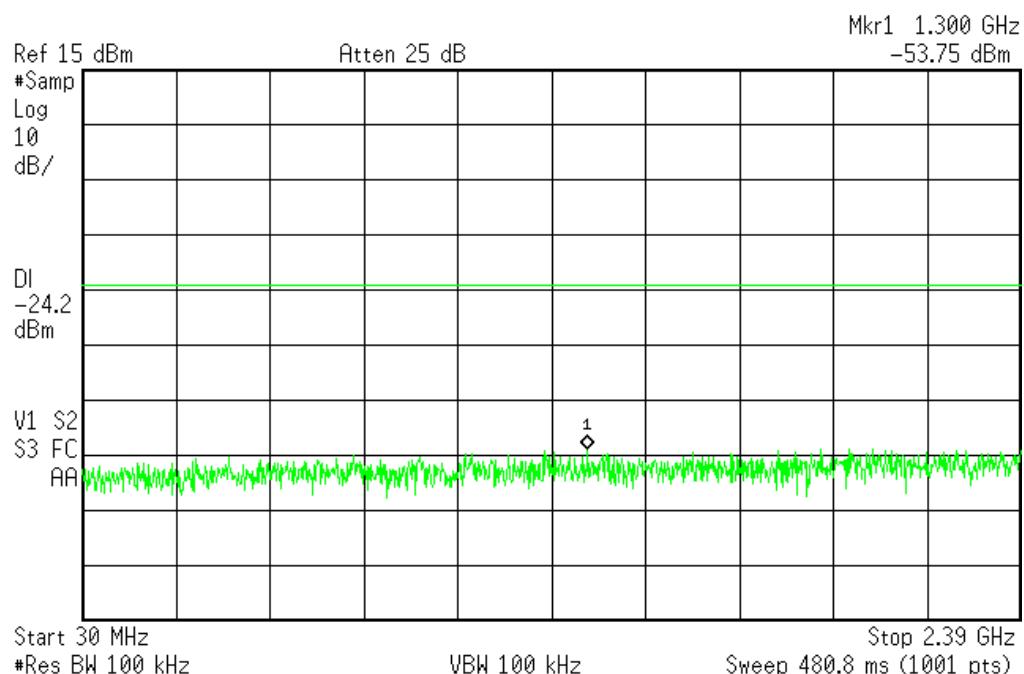
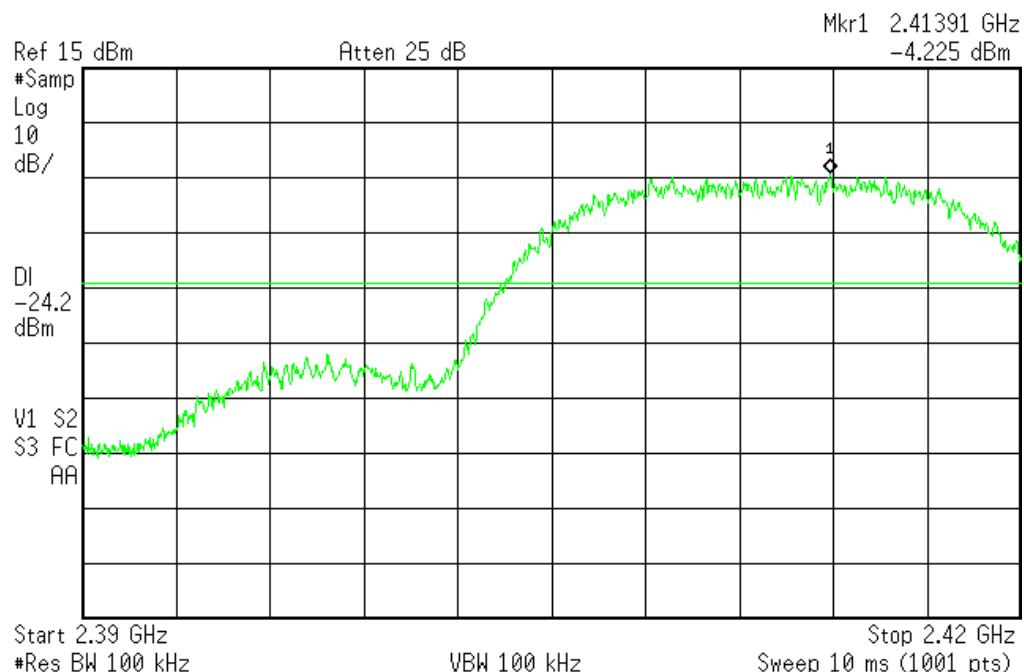


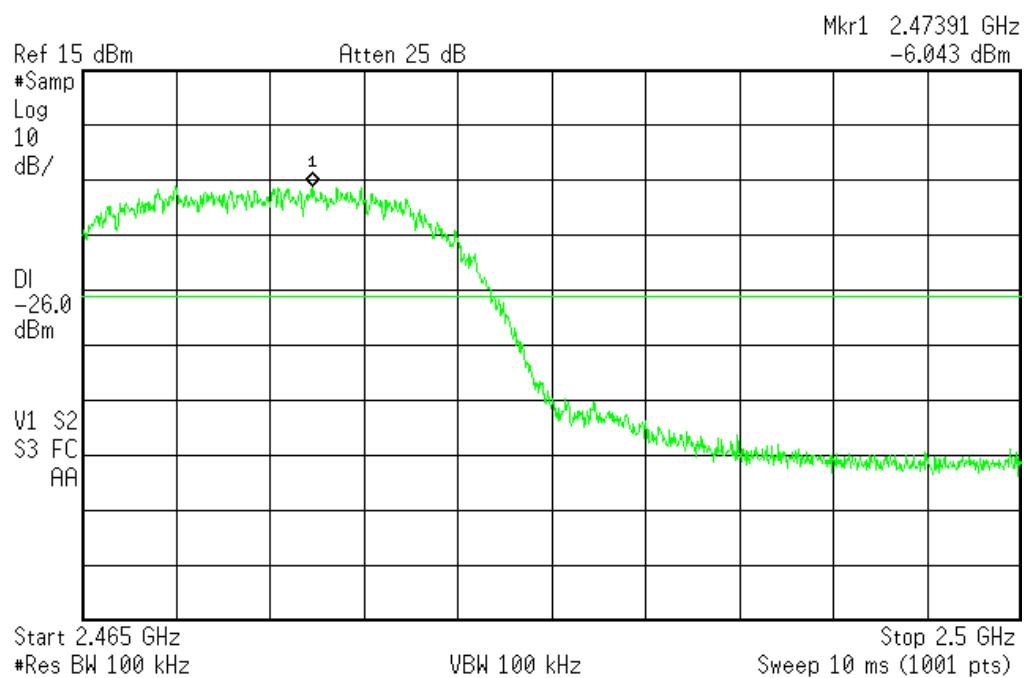
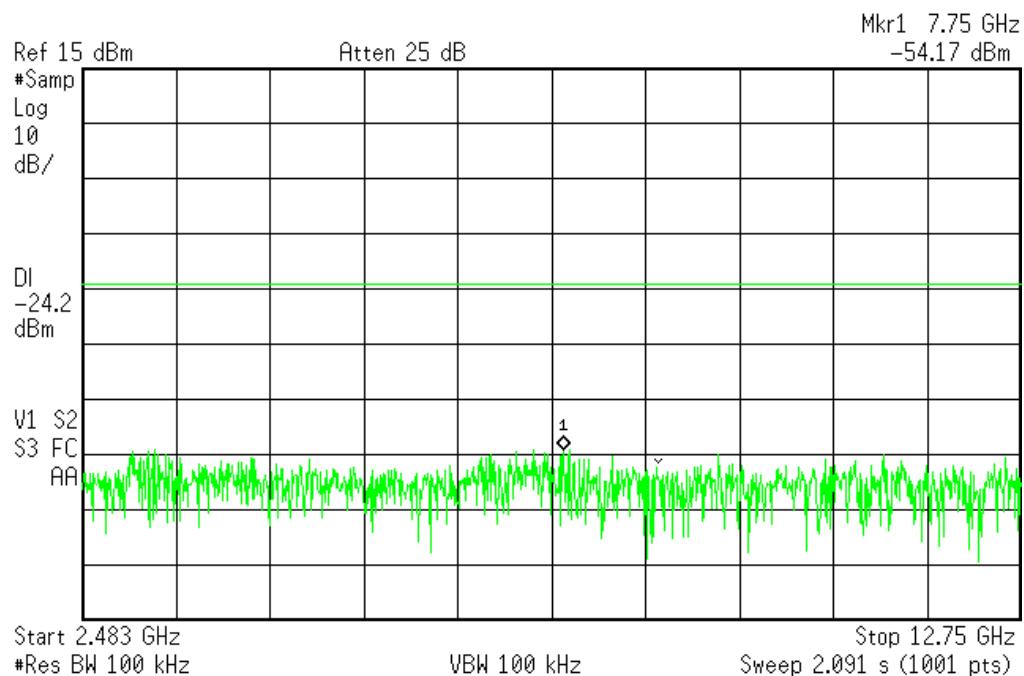


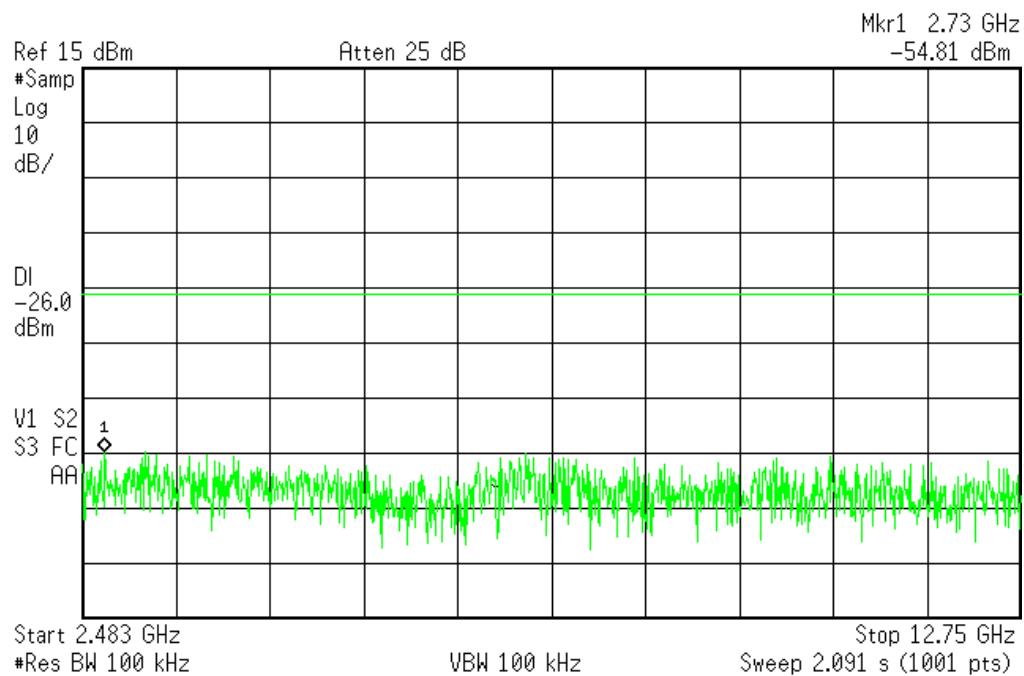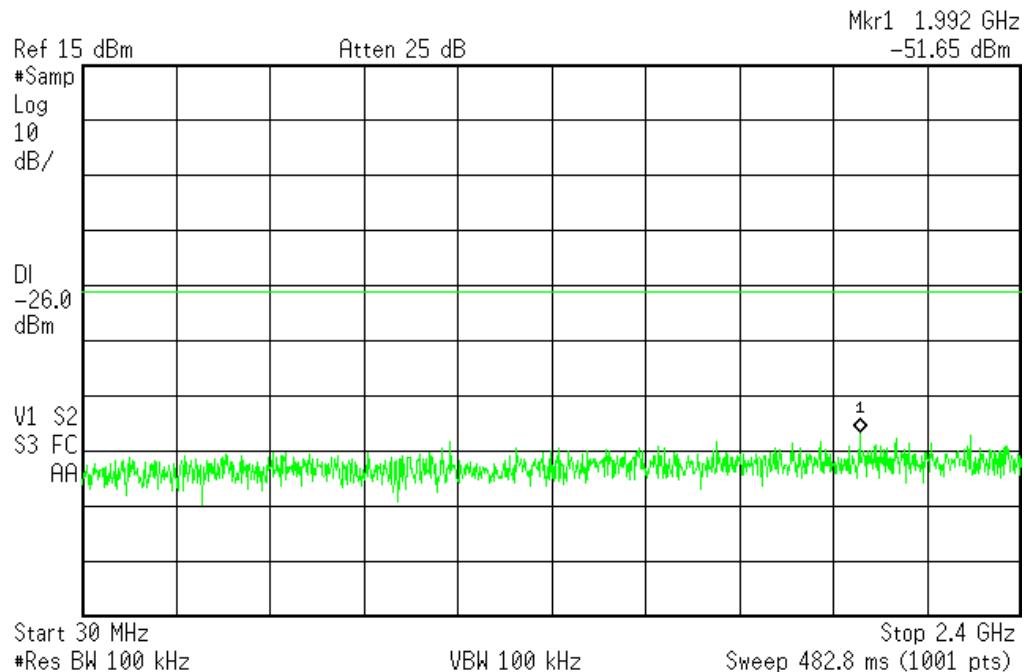

802.11g mode

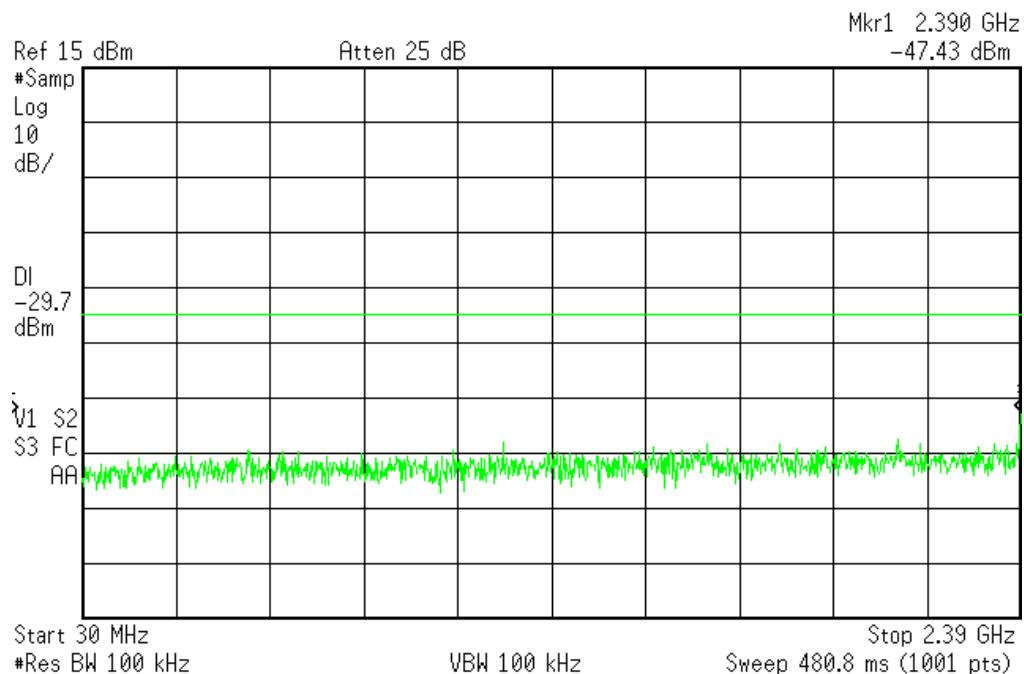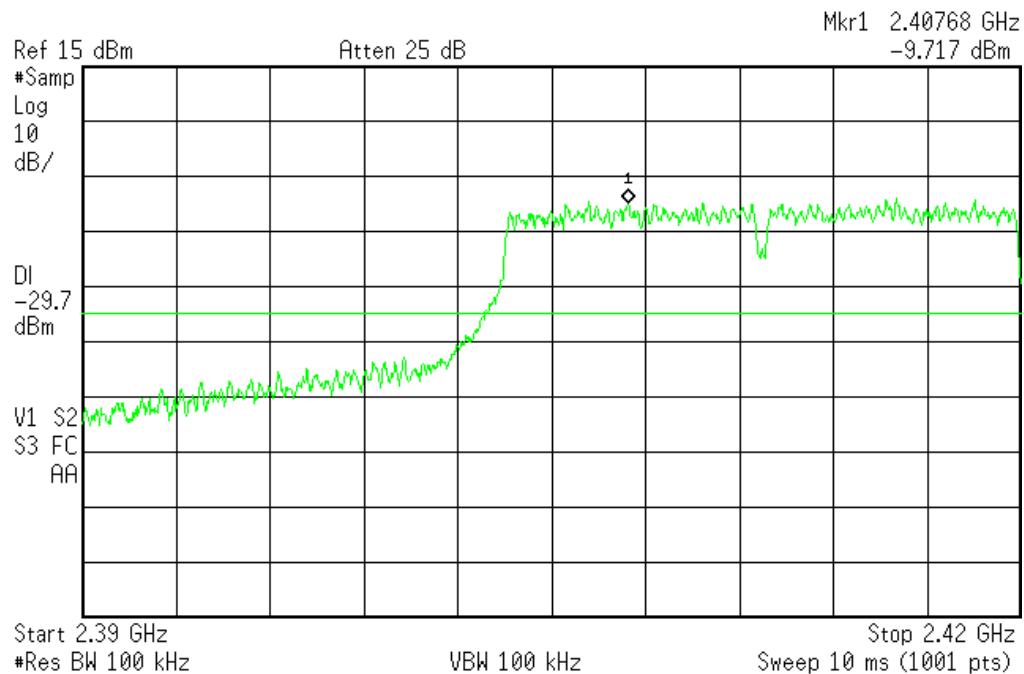


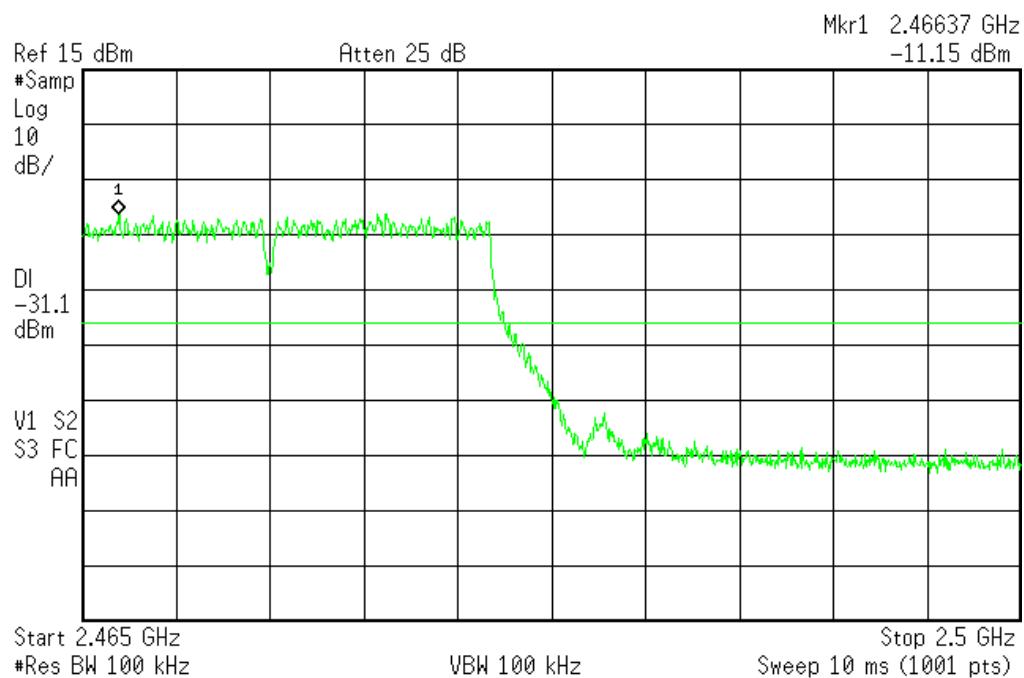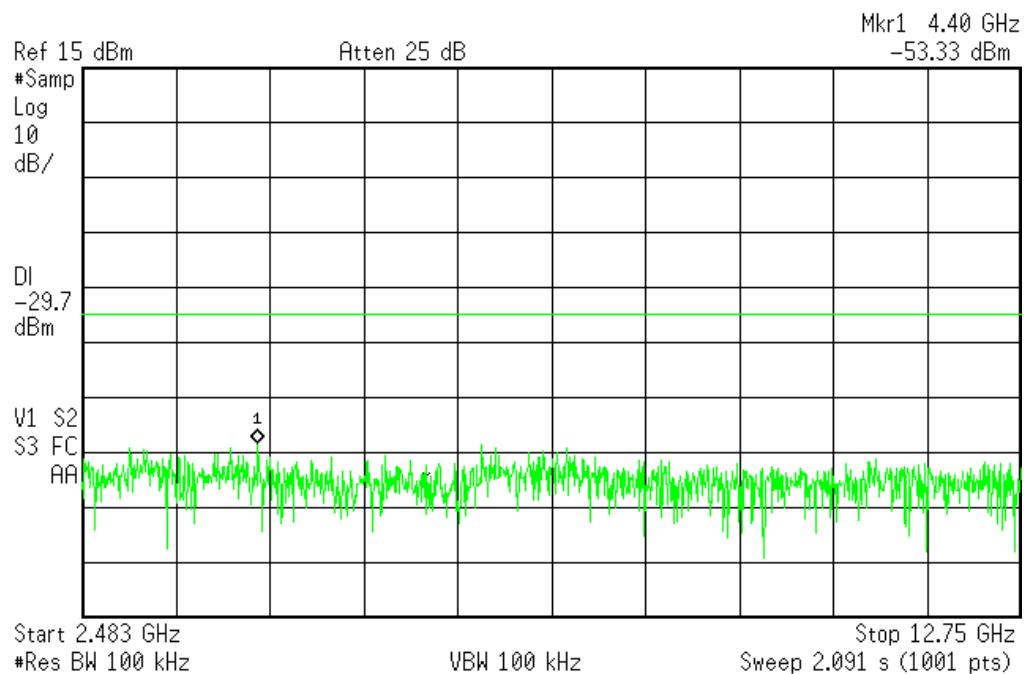

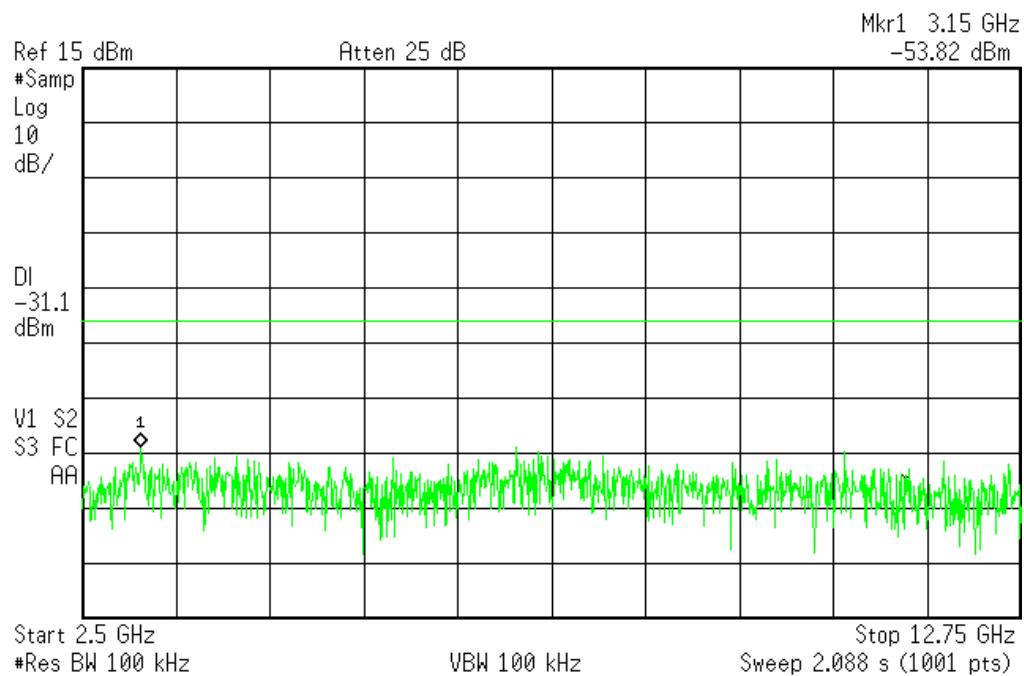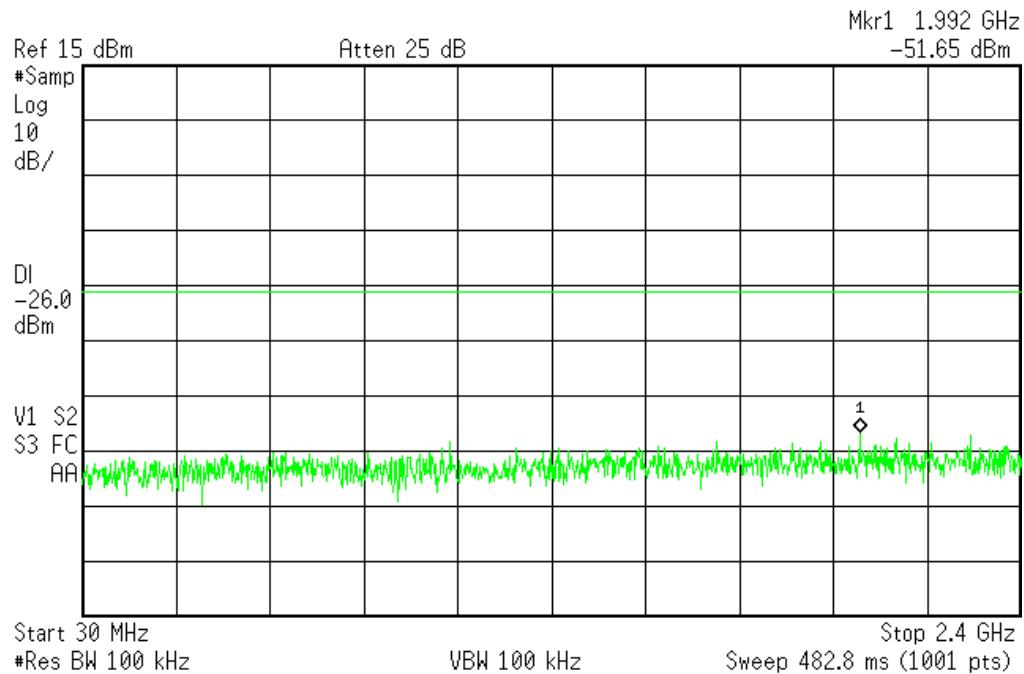


5.4.2 Bandwidth of Frequency Band Edges (Radiated)


802.11b mode (1CH) - Horizontal-Peak Mode.

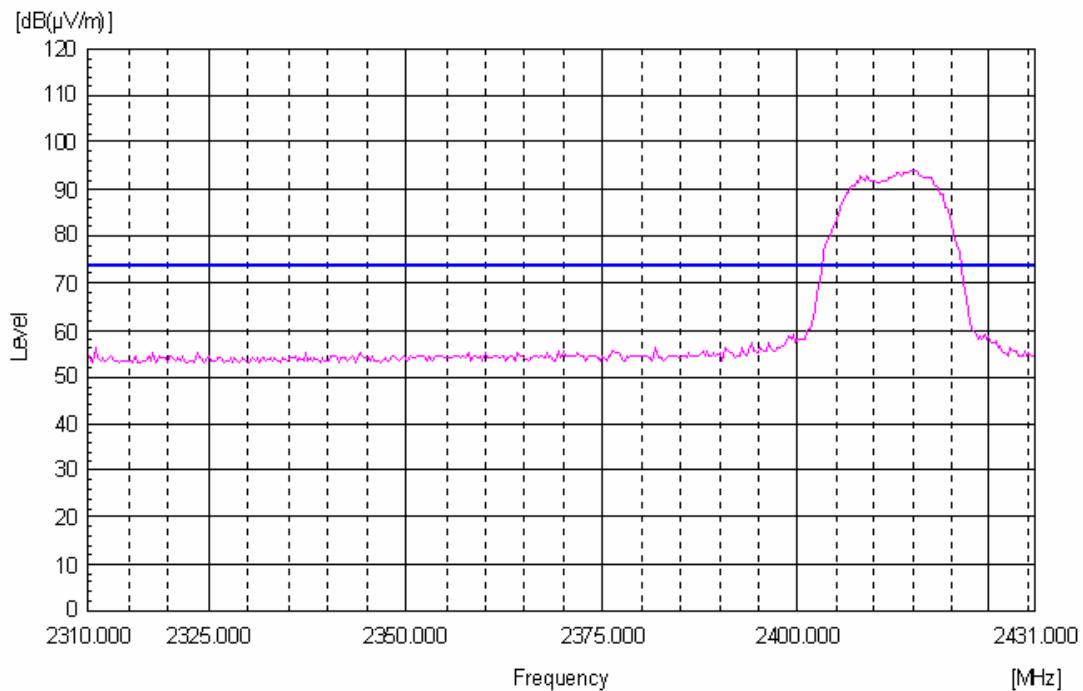


802.11b mode (1CH) - Horizontal-Average Mode.

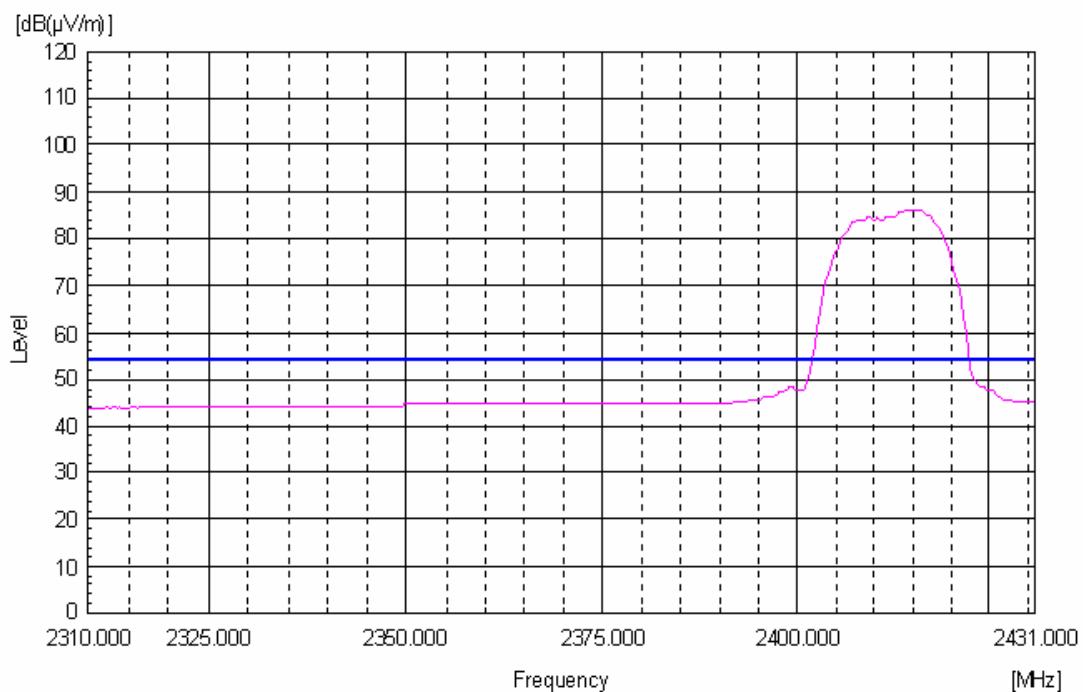


802.11b mode (1CH) - Vertical-Peak Mode.

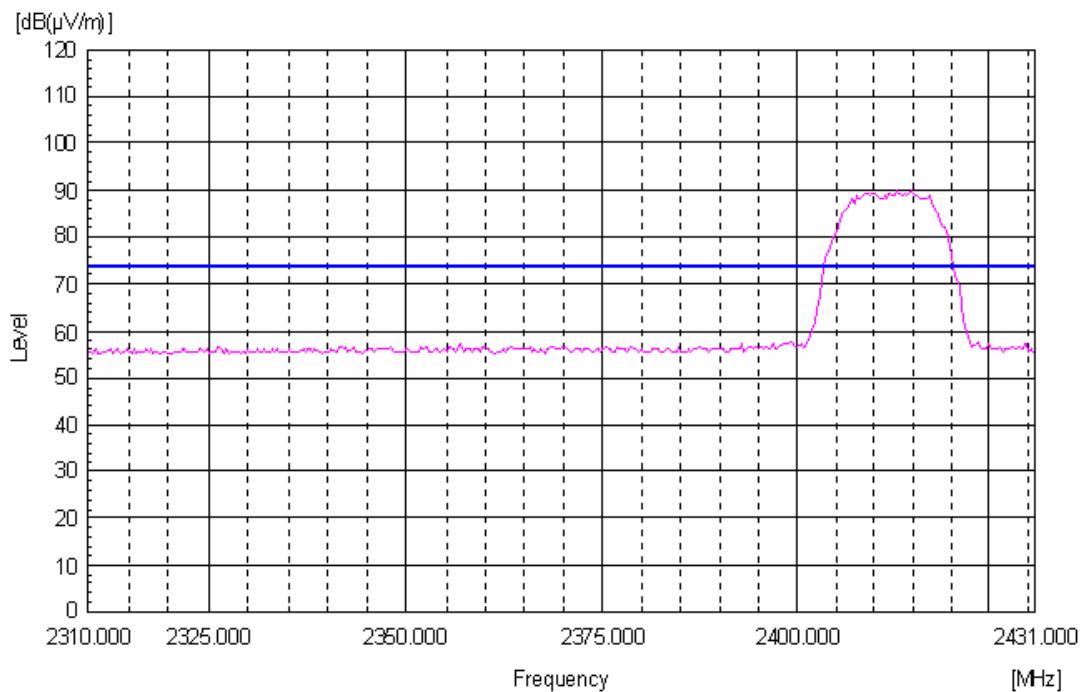


802.11b mode (1CH) - Vertical-Average Mode.

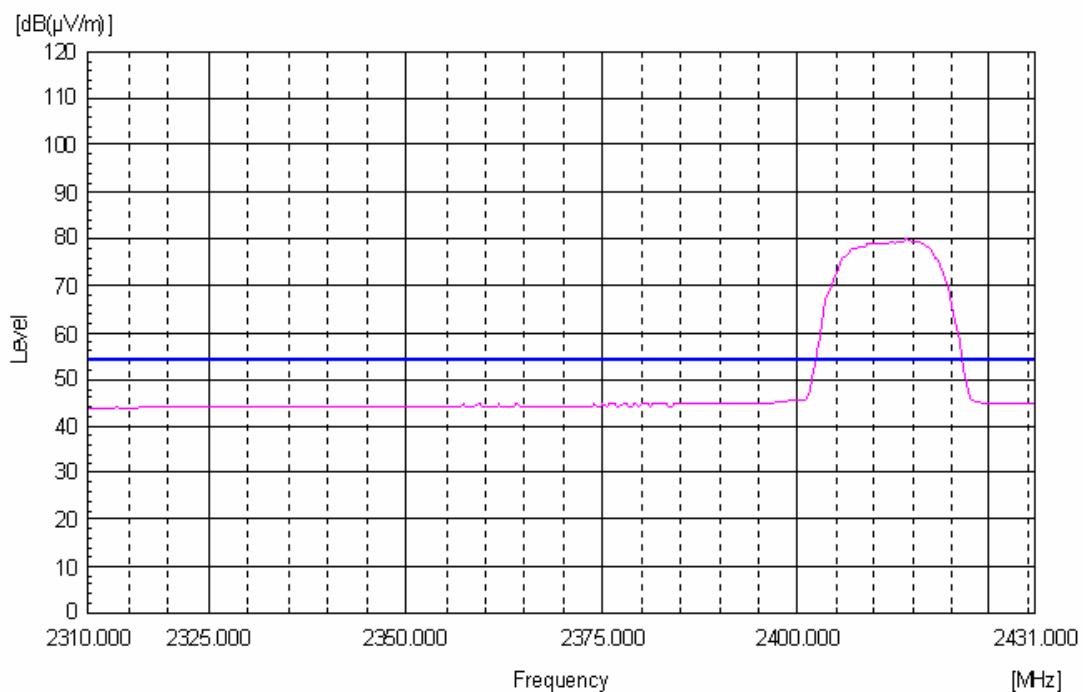


802.11b mode (13CH) - Horizontal-Peak Mode.

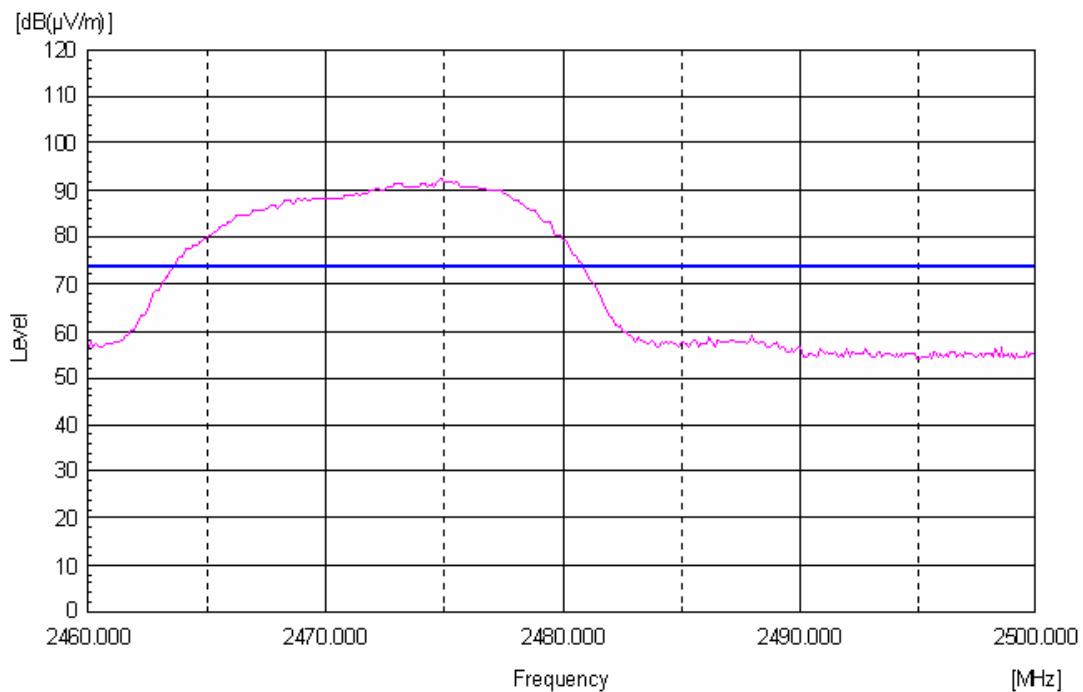


802.11b mode (13CH) - Horizontal-Average Mode.

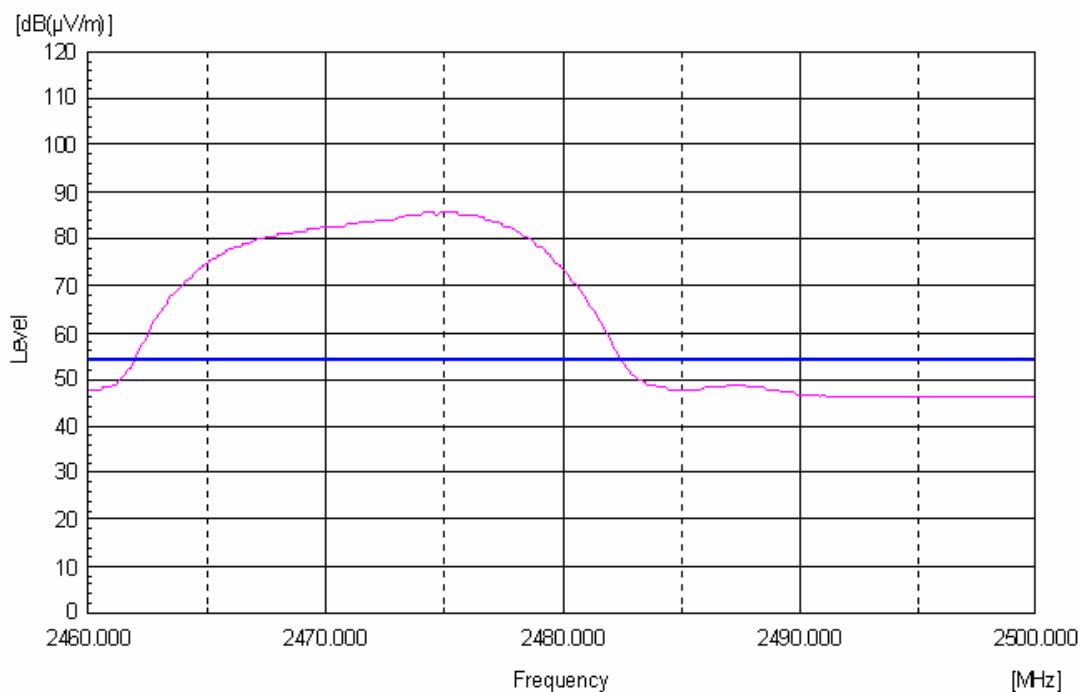


802.11b mode (13CH) - Vertical-Peak Mode.

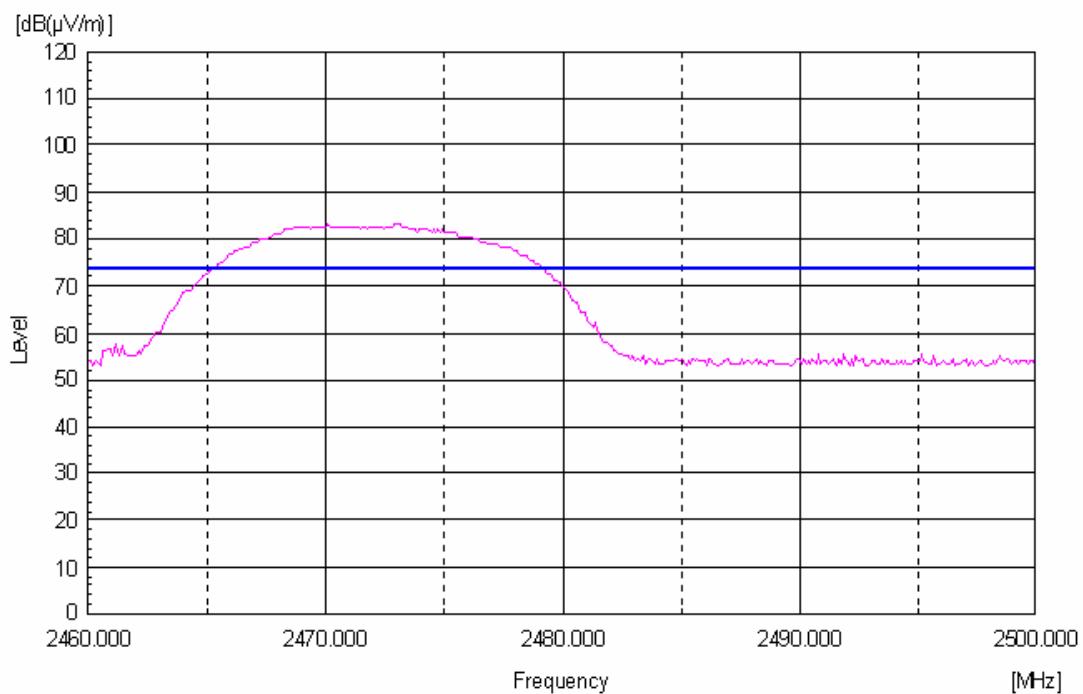


802.11b mode (13CH) - Vertical-Average Mode.

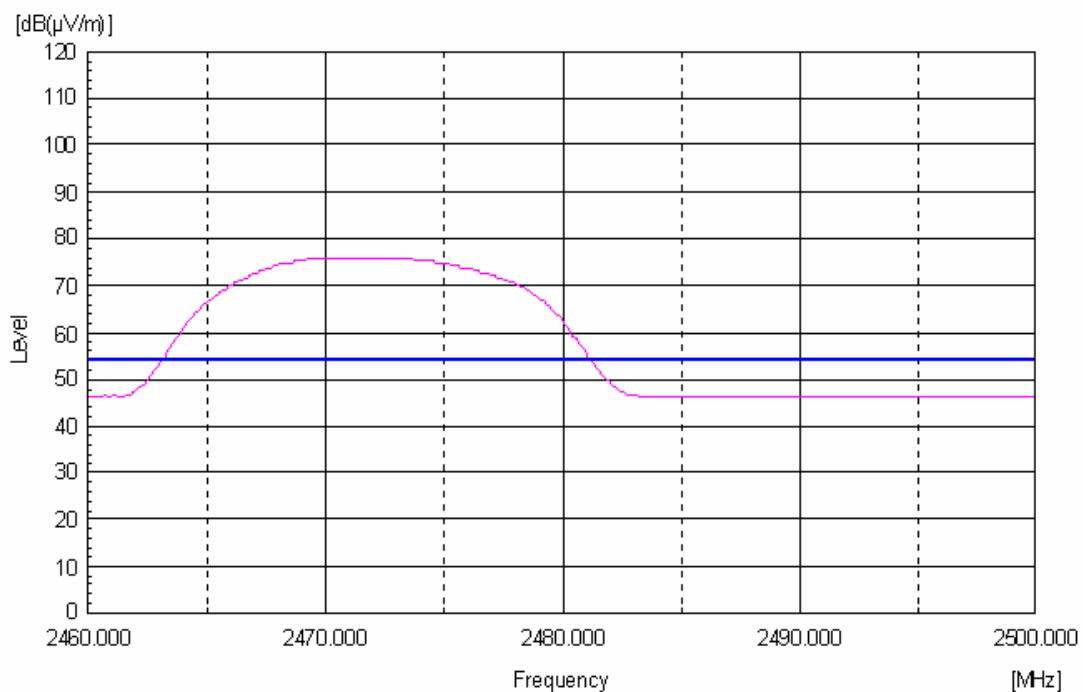


802.11g mode (1CH) - Horizontal-Peak Mode.

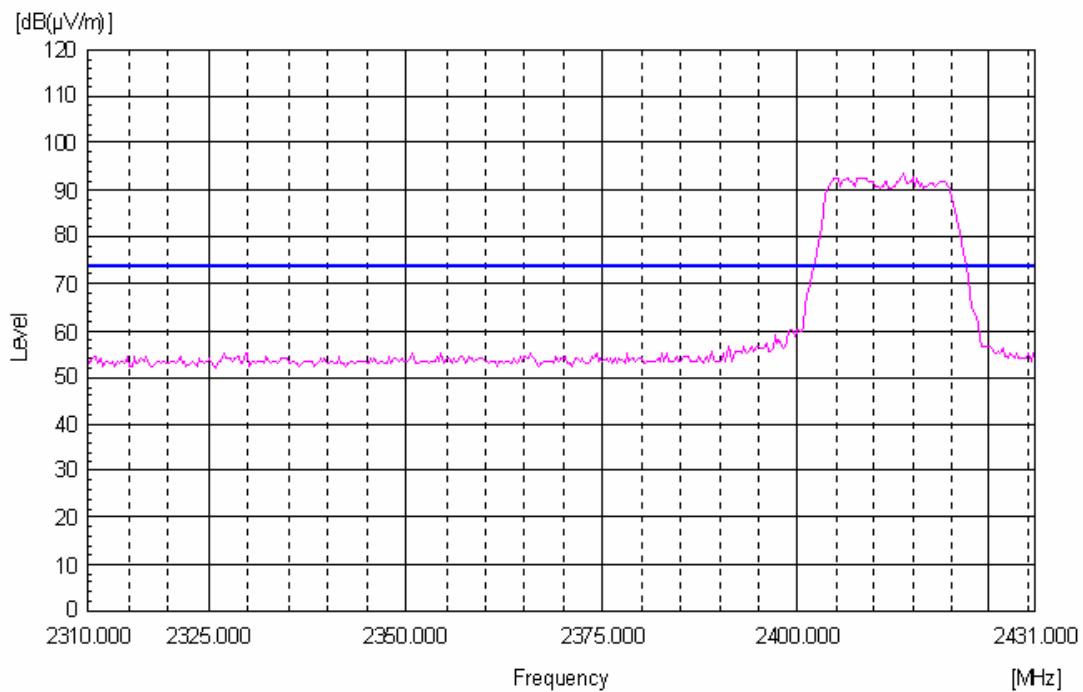


802.11g mode (1CH) - Horizontal-Average Mode.

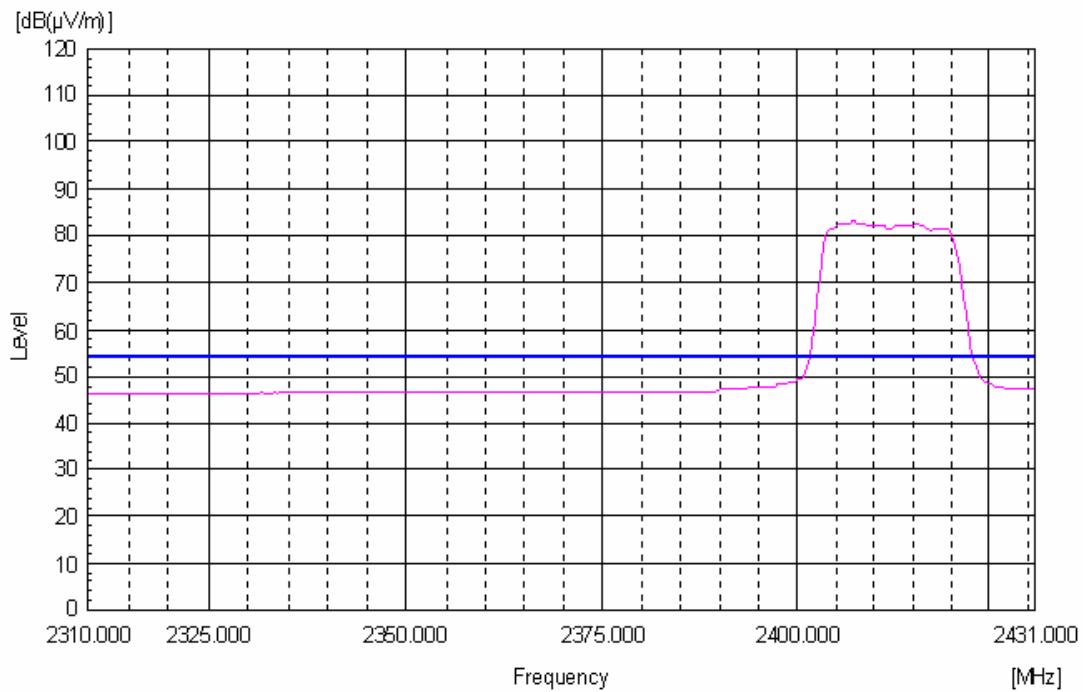


802.11g mode (1CH) - Vertical-Peak Mode.

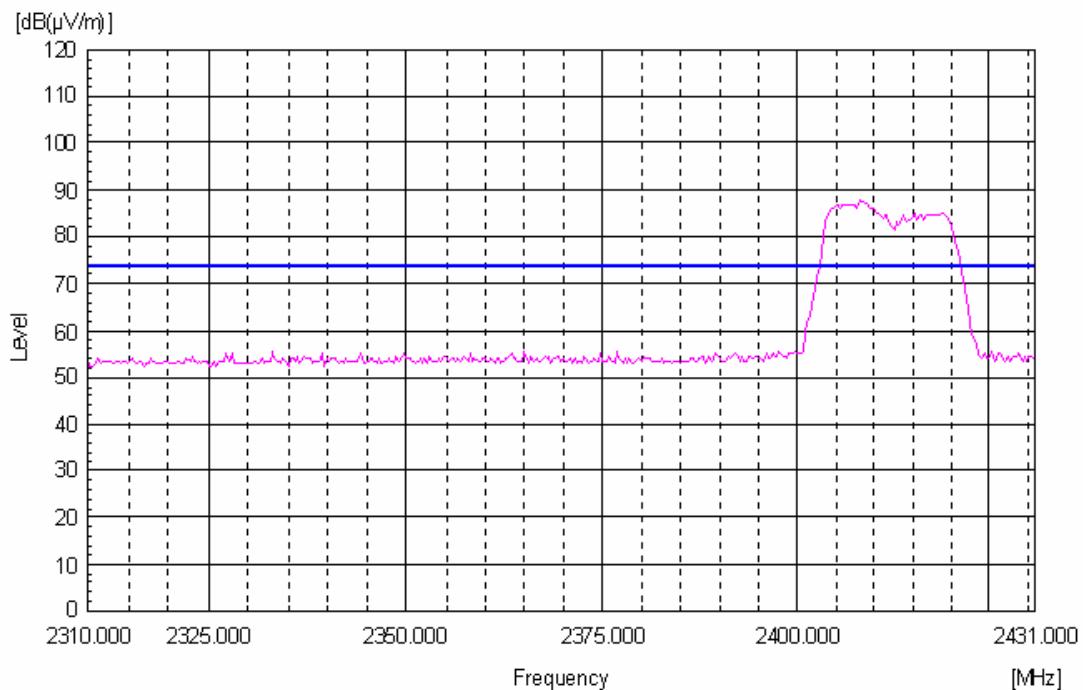


802.11g mode (1CH) - Vertical-Average Mode.

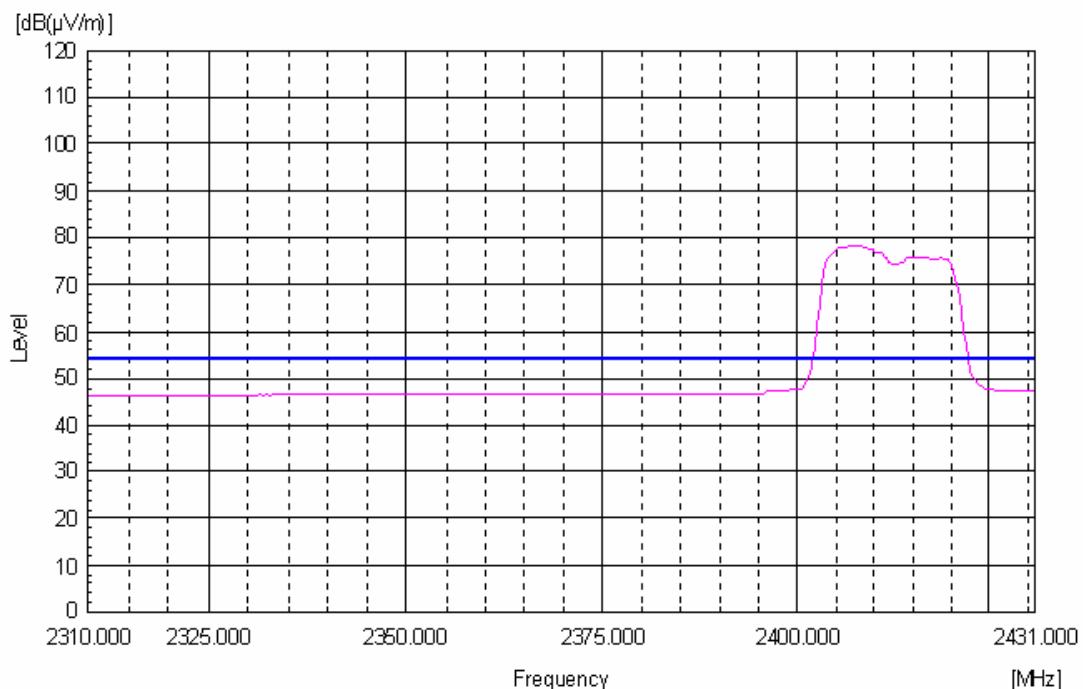


802.11g mode (13CH) - Horizontal-Peak Mode.

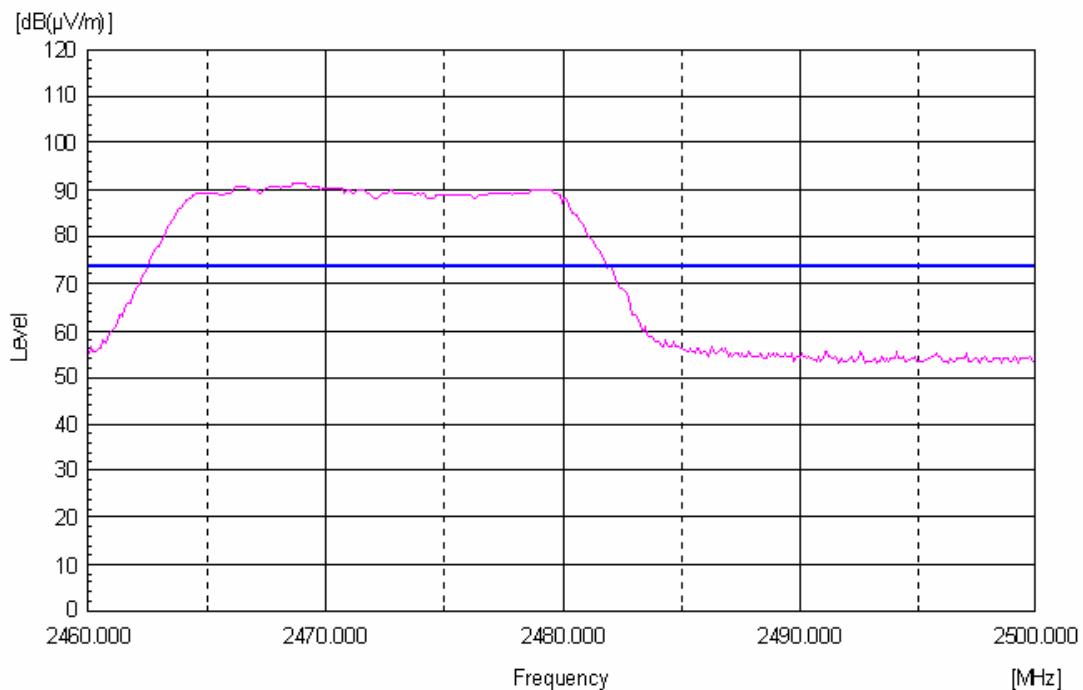


802.11g mode (13CH) - Horizontal-Average Mode.

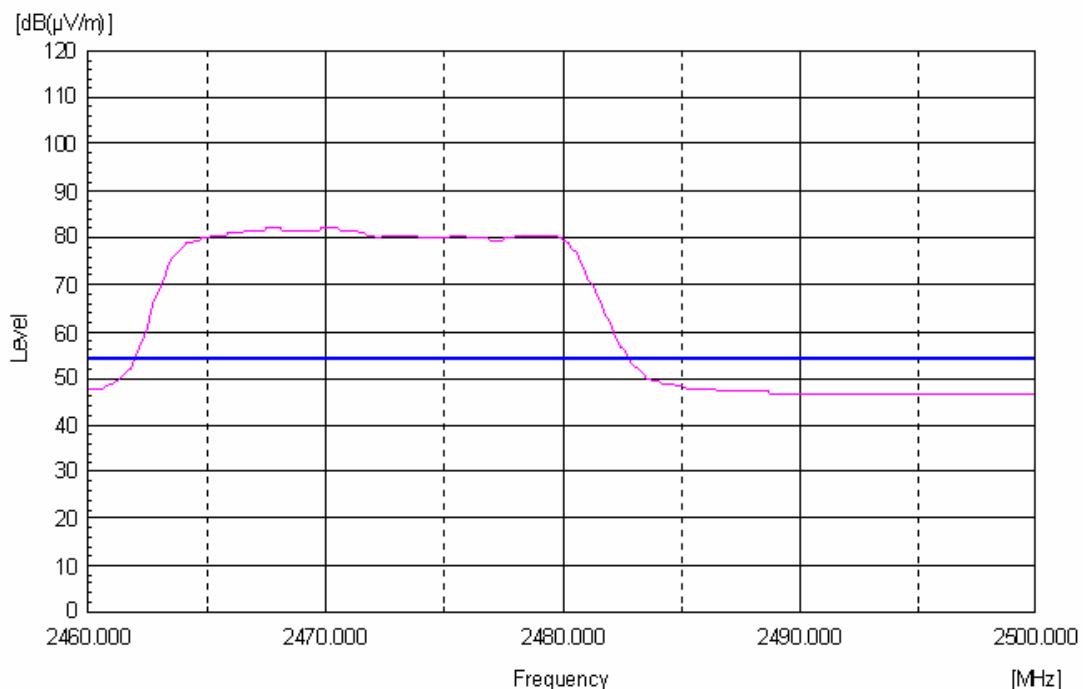

802.11g mode (13CH) - Vertical-Peak Mode.

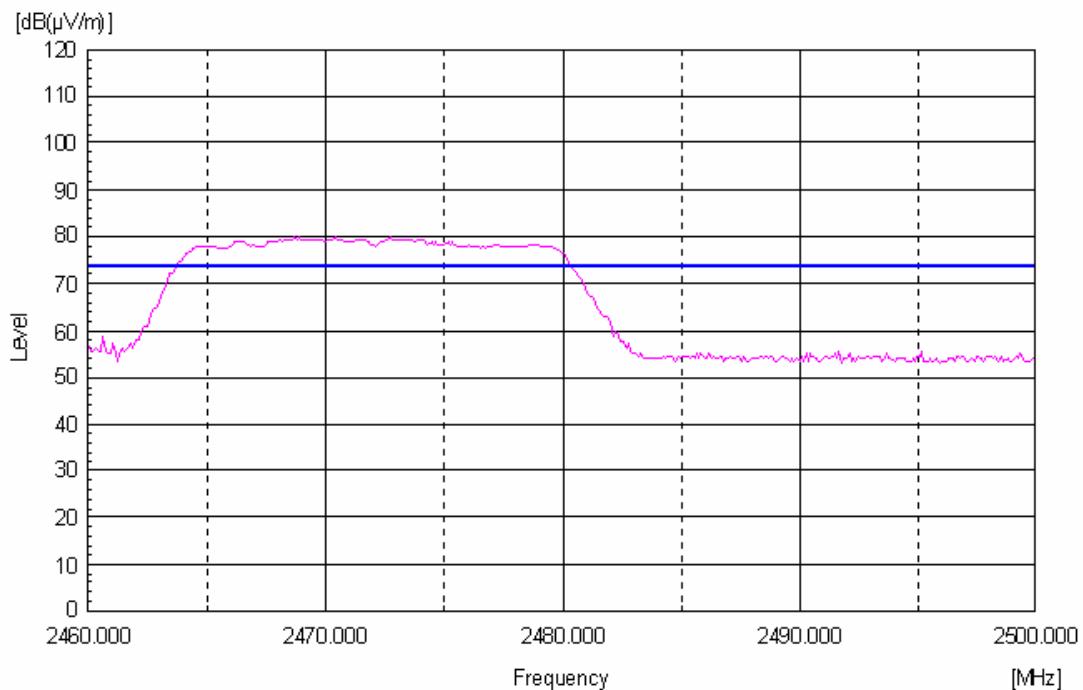

802.11g mode (13CH) - Vertical-Average Mode.

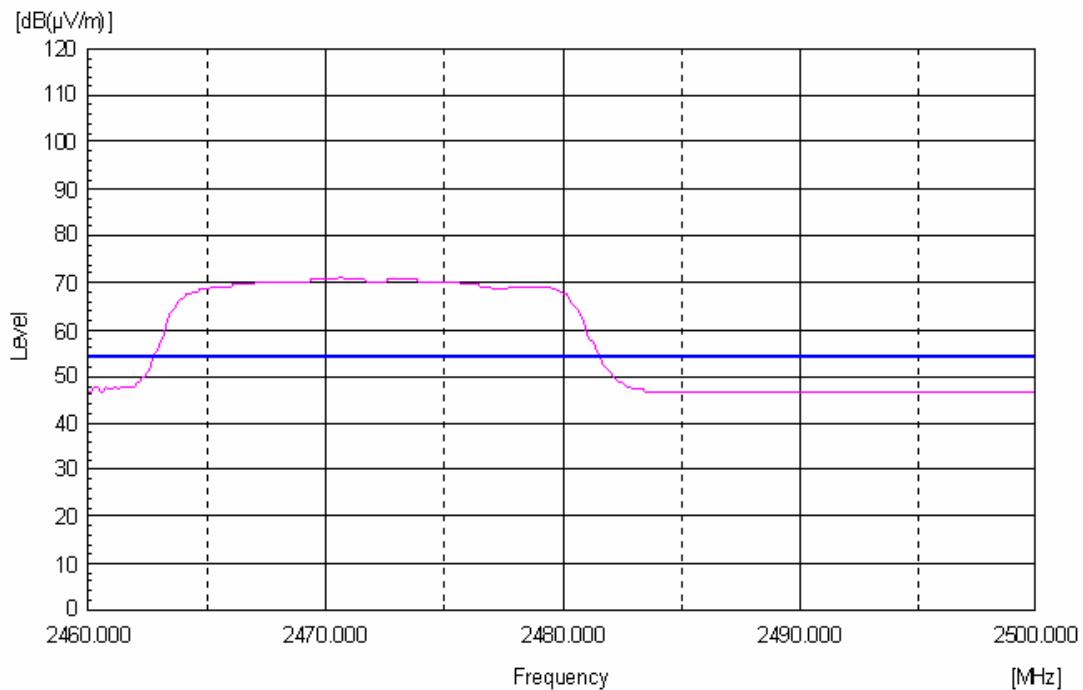

5.5 Power Spectral Density

EUT	Multi-Web PAD/ E&M-100
Limit apply to	FCC Part 15.247(e)
Test Date	June 23, 2008
Operating Condition	RF transmitting continuously during the tested.
Result	Pass

Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Data

802.11b mode

Channel	Frequency (MHz)	PSD (dBm)	Limit
Low	2 412	-18.74	8 dBm
Mid	2 442	-21.37	
High	2 472	-19.47	

802.11g mode

Channel	Frequency (MHz)	PSD (dBm)	Limit
Low	2 412	-24.15	8 dBm
Mid	2 442	-27.45	
High	2 472	-25.16	

NOTES:



1. Measure power spectral density of relevant channel using spectrum analyzer.
2. RBW 3 kHz, VBW 3 kHz, span 1 MHz, Sweep time Auto.
3. Please see the measured plot in next page.




Test Engineer : Kug Kyoung, Yoon

Power Spectral Density


802.11b mode

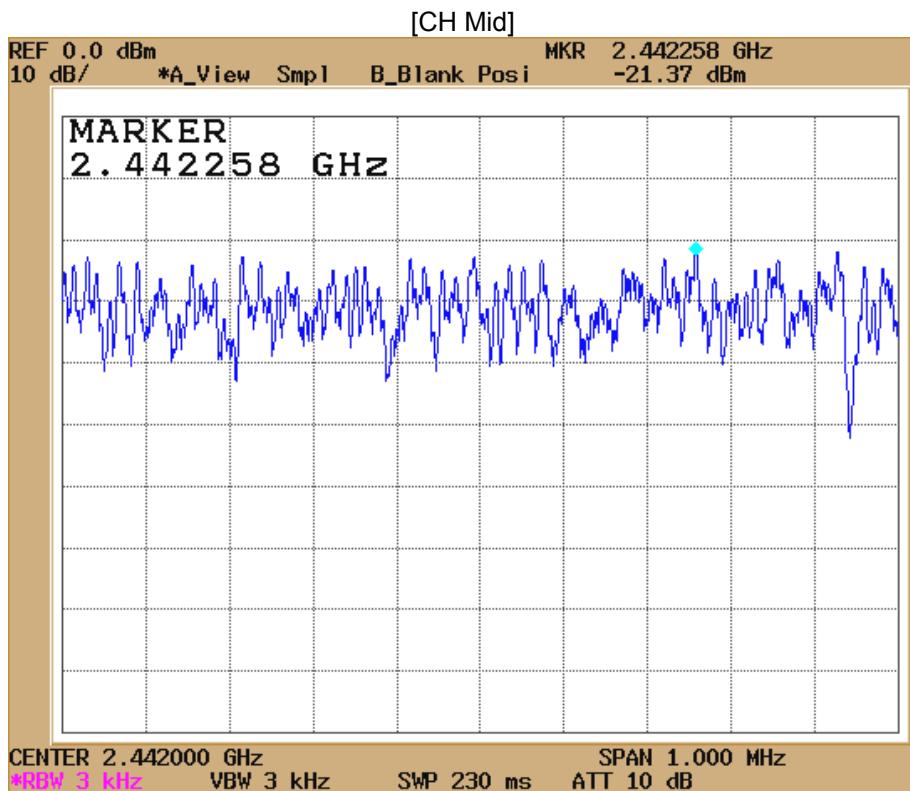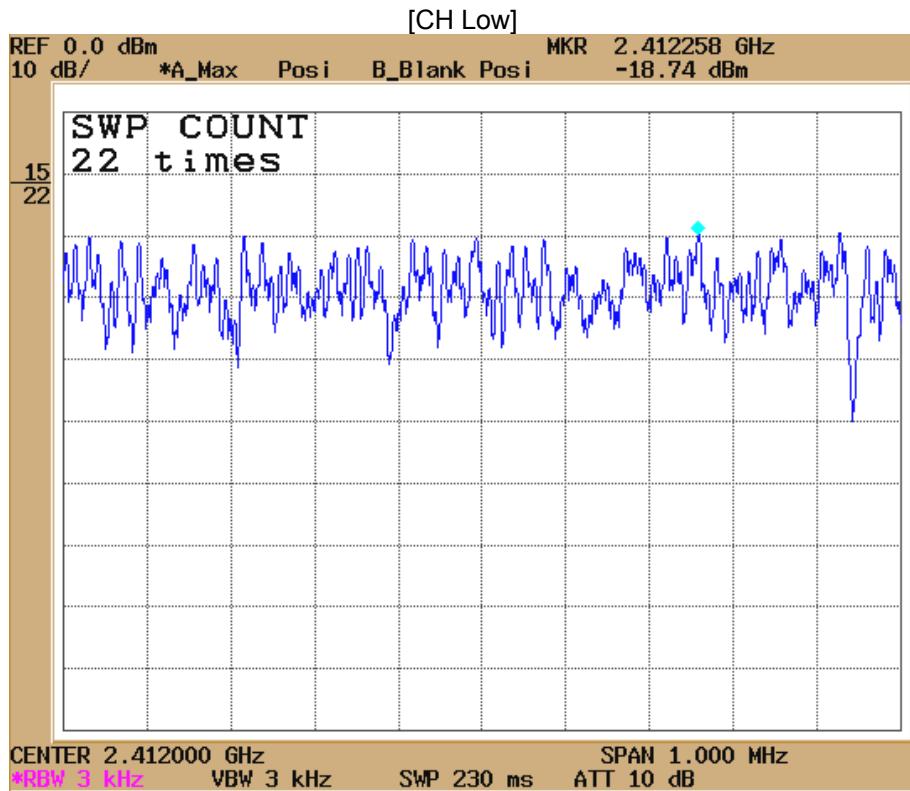



Report no. ETL080603.462, Page 35 of 47

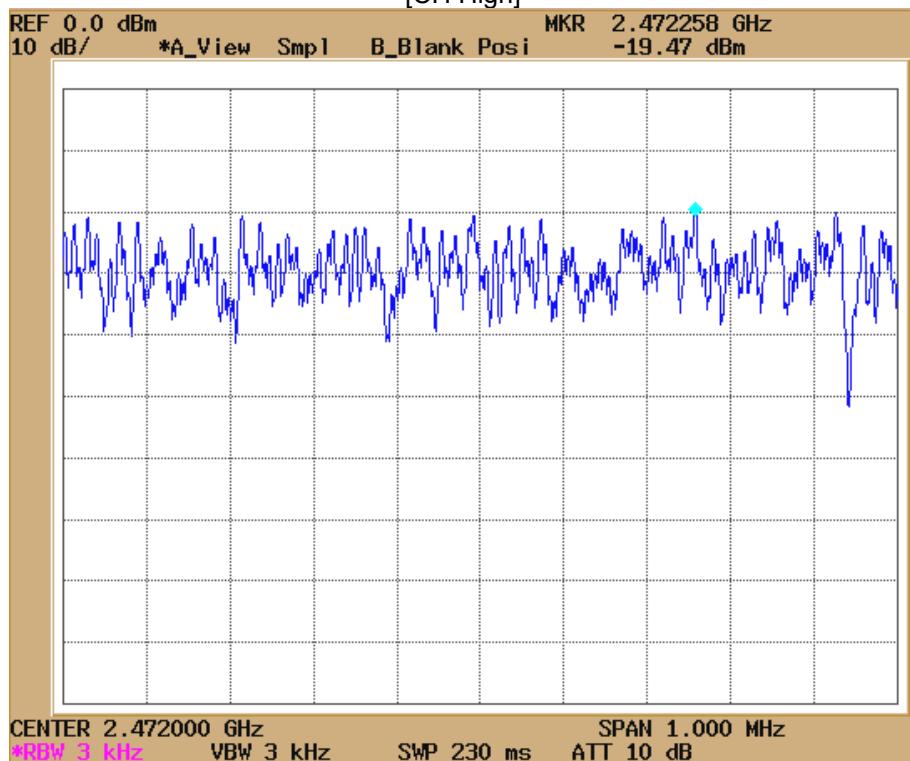[CH High]

802.11g mode

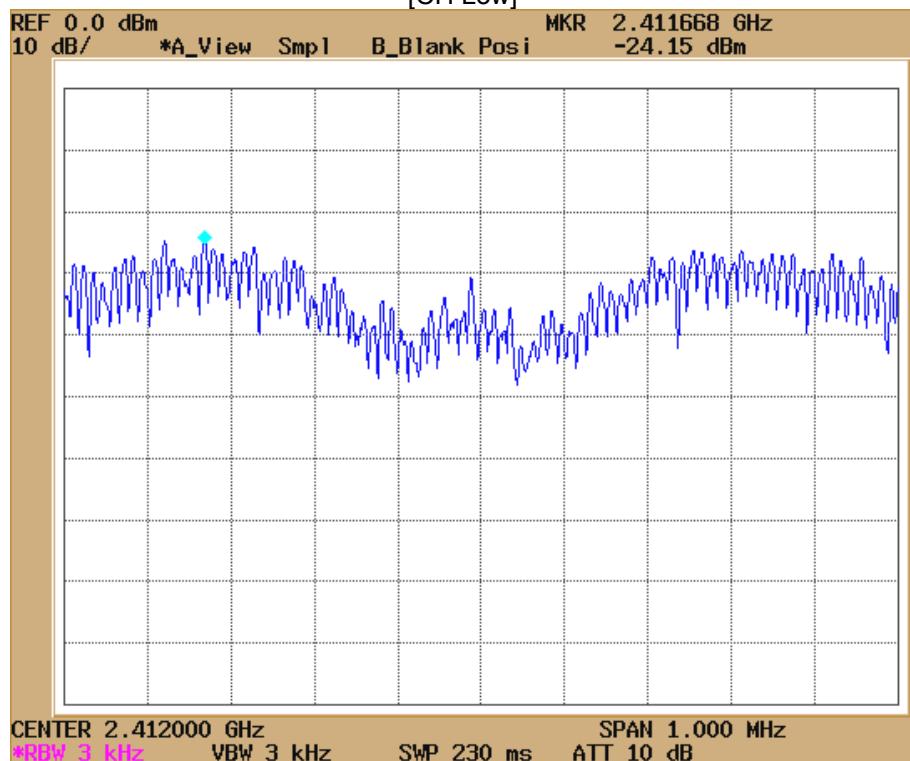[CH Low]

Report no. ETL080603.462, Page 36 of 47

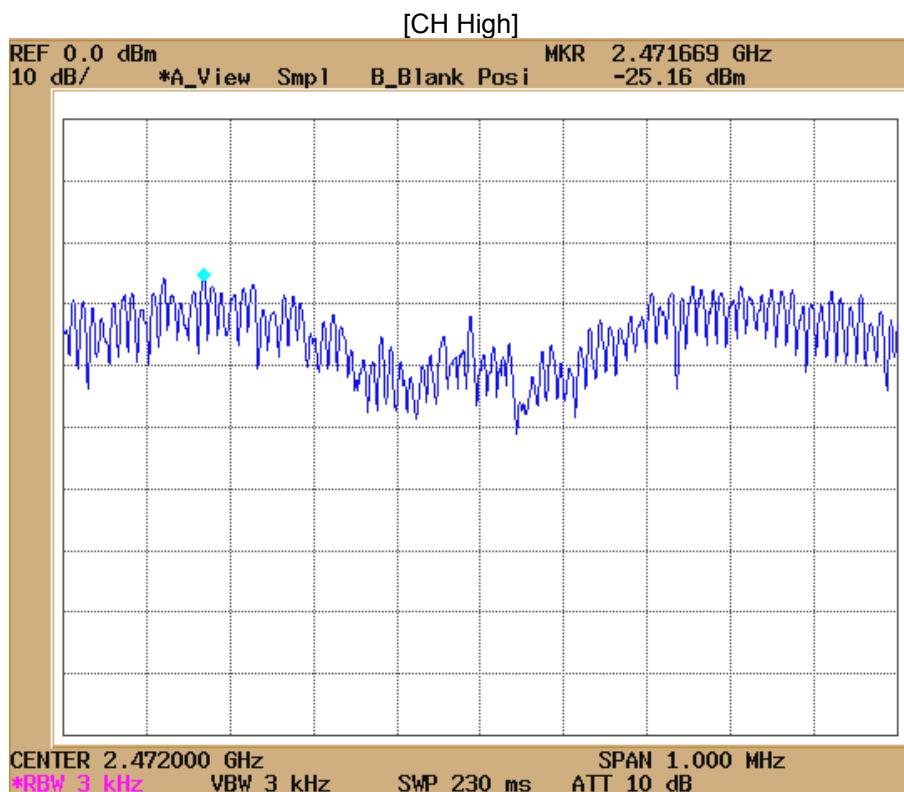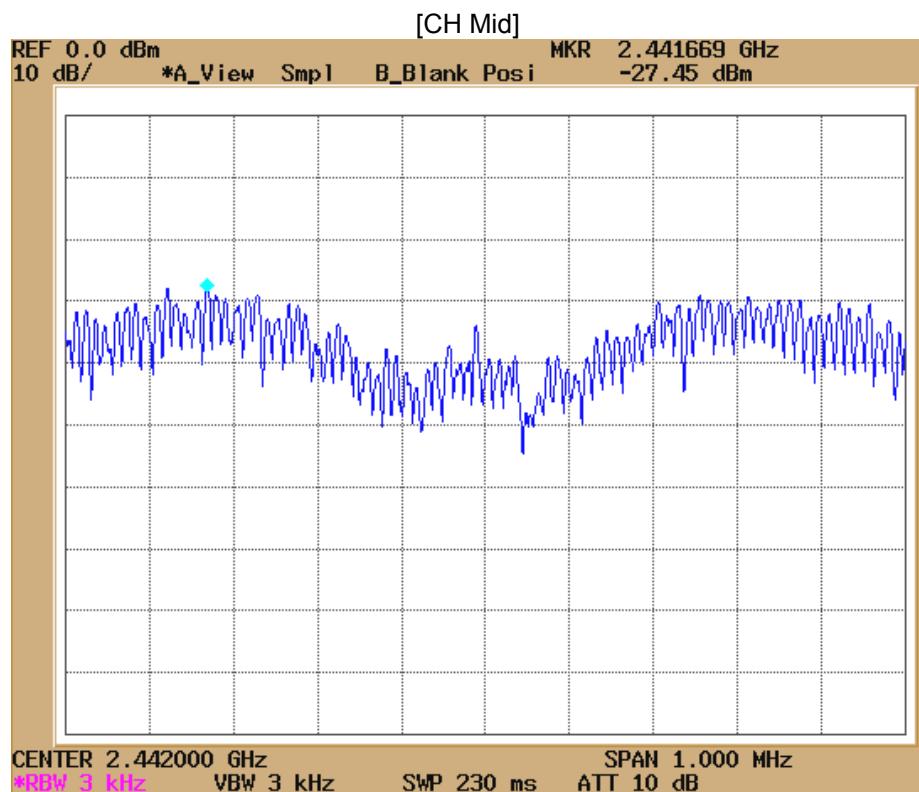

5.6 Spurious Emissions

5.6.1 Radiated Emissions

EUT	Multi-Web PAD/ E&M-100
Limit apply to	FCC Part 15.109, 209
Test Date	June 25, 2008
Operating Condition	Low CH, Middle CH, High CH Transmission
Result	Pass

Limit

Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequencies (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measurement Distance (m)
30 – 88	100*	40	3
88 – 216	150*	43.5	3
216 – 960	200*	46	3
Above 960	500	54	3

* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

Test Results

- Refer to see the measured plot in next page.



Test Engineer : Kug Kyoung, Yoon

Radiated Emissions Test data

Below 1 GHz

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical. Detector mode: CISPR Quasi – Peak mode (6 dB Bandwidth: 120 kHz)

802.11b test mode

Frequency [MHz]	Reading [dB μ V]	Polarization (*H/**V)	Ant. Factor [dB/m]	Cable Loss [dB]	Result [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
34.09	22.45	V	8.87	1.48	32.80	40.0	7.20
132.26	25.30	V	11.01	3.28	39.60	43.5	3.90
216.12	26.92	H	10.29	4.40	41.62	46.0	4.38
269.30	23.88	H	11.83	5.14	40.85	46.0	5.15
314.14	21.71	H	12.94	5.67	40.32	46.0	5.68
360.09	21.75	H	13.71	6.20	41.66	46.0	4.34
404.28	19.18	H	14.48	6.65	40.31	46.0	5.69
494.43	16.60	H	16.83	7.56	40.98	46.0	5.02

802.11g test mode

Frequency [MHz]	Reading [dB μ V]	Polarization (*H/**V)	Ant. Factor [dB/m]	Cable Loss [dB]	Result [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
133.00	24.26	V	11.05	3.30	38.60	43.5	4.90
216.12	25.65	V	10.29	4.40	40.35	46.0	5.65
270.36	23.82	V	11.86	5.16	40.83	46.0	5.17
360.09	20.75	V	13.71	6.20	40.66	46.0	5.34
495.30	17.48	H	16.85	7.56	41.89	46.0	4.11

NOTES:

1. * H : Horizontal polarization , ** V : Vertical polarization
2. Result = Reading + Antenna factor + Cable loss
3. Margin value = Limit - Result
4. The measurement was performed for the frequency range above 30 MHz according to FCC Part 15.209.

Above 1 GHz

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical.

802.11b

1. Low CH

Detector mode: Peak mode

Frequency [MHz]	Reading [dB μ N]	Polarization (*H/**V)	Ant. Factor [dB/m]	Cable Loss [dB μ N]	Result [dB μ N/m]	Limit [dB μ N/m]	Margin [dB]
1 257.6	18.20	V	25.02	13.06	56.28	74.00	17.72
-	-	-	-	-	-	-	-

Detector mode: Average mode

Frequency [MHz]	Reading [dB μ N]	Polarization (*H/**V)	Ant. Factor [dB/m]	Cable Loss [dB μ N]	Result [dB μ N/m]	Limit [dB μ N/m]	Margin [dB]
1 257.6	14.15	V	25.02	13.06	52.23	54.00	1.77
-	-	-	-	-	-	-	-

2. Middle CH

Detector mode: Peak mode

Frequency [MHz]	Reading [dB μ N]	Polarization (*H/**V)	Ant. Factor [dB/m]	Cable Loss [dB μ N]	Result [dB μ N/m]	Limit [dB μ N/m]	Margin [dB]
1 257.6	18.25	V	25.02	13.06	56.33	74.00	17.67
-	-	-	-	-	-	-	-

Detector mode: Average mode

Frequency [MHz]	Reading [dB μ N]	Polarization (*H/**V)	Ant. Factor [dB/m]	Cable Loss [dB μ N]	Result [dB μ N/m]	Limit [dB μ N/m]	Margin [dB]
1 257.6	14.12	V	25.02	13.06	52.20	54.00	1.80
-	-	-	-	-	-	-	-

3. High CH

Detector mode: Peak mode

Frequency [MHz]	Reading [dB μ N]	Polarization (*H/**V)	Ant. Factor [dB/m]	Cable Loss [dB μ N]	Result [dB μ N/m]	Limit [dB μ N/m]	Margin [dB]
1 257.6	18.23	V	25.02	13.06	56.31	74.00	17.69
-	-	-	-	-	-	-	-

Detector mode: Average mode

Frequency [MHz]	Reading [dB μ N]	Polarization (*H/**V)	Ant. Factor [dB/m]	Cable Loss [dB μ N]	Result [dB μ N/m]	Limit [dB μ N/m]	Margin [dB]
1 257.6	14.11	V	25.02	13.06	52.19	54.00	1.81
-	-	-	-	-	-	-	-

802.11q

1. Low CH

Detector mode: Peak mode

Frequency [MHz]	Reading [dB μ N]	Polarization (*H/**V)	Ant. Factor [dB/m]	Cable Loss [dB μ N]	Result [dB μ N/m]	Limit [dB μ N/m]	Margin [dB]
1 257.6	18.26	V	25.02	13.06	56.34	74.00	17.66
-	-	-	-	-	-	-	-

Detector mode: Average mode

Frequency [MHz]	Reading [dB μ N]	Polarization (*H/**V)	Ant. Factor [dB/m]	Cable Loss [dB μ N]	Result [dB μ N/m]	Limit [dB μ N/m]	Margin [dB]
1 257.6	14.16	V	25.02	13.06	52.24	54.00	1.76
-	-	-	-	-	-	-	-

2. Middle CH

Detector mode: Peak mode

Frequency [MHz]	Reading [dB μ N]	Polarization (*H/**V)	Ant. Factor [dB/m]	Cable Loss [dB μ N]	Result [dB μ N/m]	Limit [dB μ N/m]	Margin [dB]
1 257.6	18.22	V	25.02	13.06	56.30	74.00	17.70
-	-	-	-	-	-	-	-

Detector mode: Average mode

Frequency [MHz]	Reading [dB μ N]	Polarization (*H/**V)	Ant. Factor [dB/m]	Cable Loss [dB μ N]	Result [dB μ N/m]	Limit [dB μ N/m]	Margin [dB]
1 257.6	14.13	V	25.02	13.06	52.21	54.00	1.79
-	-	-	-	-	-	-	-

3. High CH

Detector mode: Peak mode

Frequency [MHz]	Reading [dB μ N]	Polarization (*H/**V)	Ant. Factor [dB/m]	Cable Loss [dB μ N]	Result [dB μ N/m]	Limit [dB μ N/m]	Margin [dB]
1 257.6	18.27	V	25.02	13.06	56.35	74.00	17.65
-	-	-	-	-	-	-	-

Detector mode: Average mode

Frequency [MHz]	Reading [dB μ N]	Polarization (*H/**V)	Ant. Factor [dB/m]	Cable Loss [dB μ N]	Result [dB μ N/m]	Limit [dB μ N/m]	Margin [dB]
1 257.6	14.14	V	25.02	13.06	52.22	54.00	1.78
-	-	-	-	-	-	-	-

Result: Pass

NOTES :

1. * H : Horizontal polarization , ** V : Vertical polarization
2. Result = Reading + Antenna factor + Cable loss
3. Margin value = Limit - Result
4. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded(ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Spectrum setting:
 - a. Peak Setting 1 GHz to 10th harmonics of fundamental, RBW = 1 MHz, VBW = 1 MHz, Sweep = Auto
 - b. AV Setting 1 GHz to 10th harmonics of fundamental, RBW = 1 MHz, VBW = 10 Hz, Sweep = Auto

Report no. ETLE080603.462, Page 42 of 47

5.7 Conducted Emissions Measurement

EUT	Multi-Web PAD/ E&M-100
Limit apply to	FCC Part 15.107, 207
Test Date	June 26, 2008
Operating Condition	RF transmitting continuously during the tested.
Result	Passed

5.7.1 Conducted Emission Test Data

The following table shows the highest levels of conducted emissions on both polarizations of hot and neutral line.

Detector mode: CISPR Quasi-Peak mode (6 dB Bandwidth: 9 kHz)



Frequency [MHz]	Result [dB μ V]		Phase (*L/**N)	Limit [dB μ V]		Margin [dB]	
	Quasi-peak	Average		Quasi-peak	Average	Quasi-peak	Average
0.177	44.20	-	N	64.60	-	20.40	-
0.884	33.50	-	N	56.00	-	22.50	-
2.792	32.70	-	N	56.00	-	23.30	-
3.655	32.20	-	N	56.00	-	23.80	-
6.050	39.20	-	N	60.00	-	20.80	-
15.191	43.70	-	N	60.00	-	16.30	-

NOTES:

1. * H : HOT Line , **N : Neutral Line
2. Margin value = Limit – Result
3. Measurement were performed at the AC Power Inlet in the frequency band of 150 kHz ~ 30 MHz according to the FCC Part 15 Class B.



Test Engineer: Kug Kyoung, Yoon

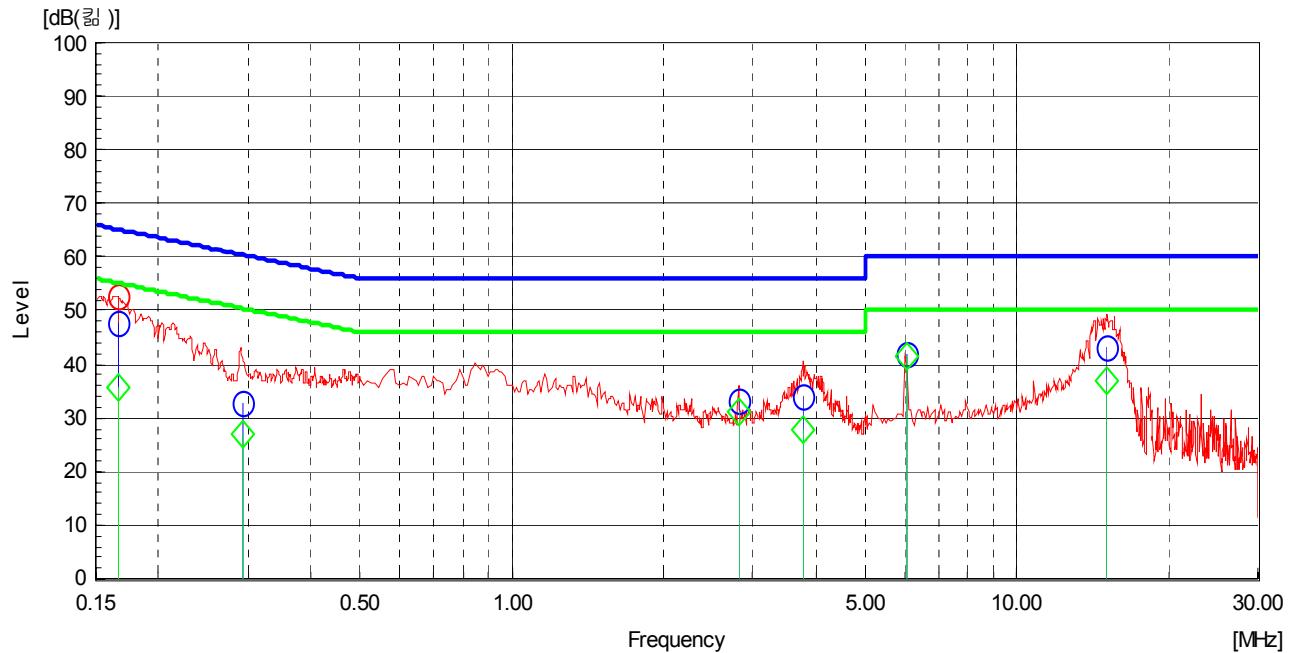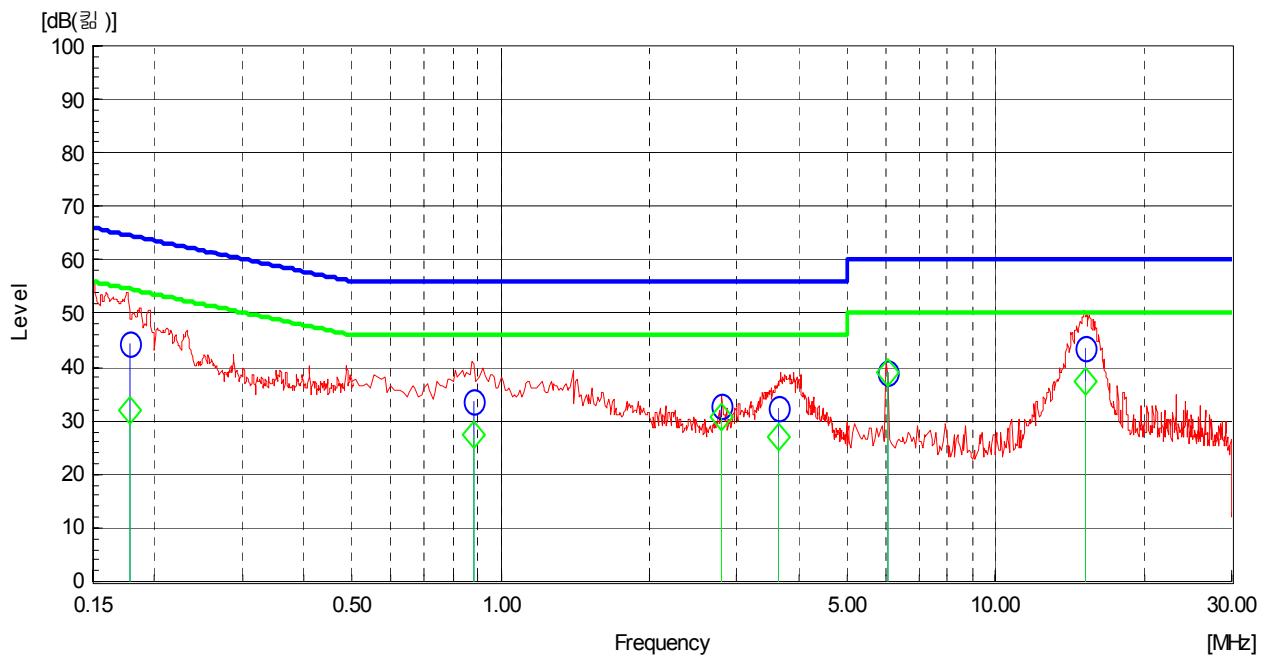Line: HOT LineLimit : — Quasi-Peak
— Average**Line: Neutral Line**

5.8 Radio Frequency Exposure

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See § 1.1307(b)(1) of this Chapter.

Limit

Limits for general population/Uncontrolled exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)	30
1.34-30	824/f	2.19/f	(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	--	--	f/1500	30
1500-100 000	--	--	1.0	30

f = frequency in MHz

*Plane-wave equivalent power density

MPE Prediction

Predication of MPE limit at a given distance.

Equation from page 18 of OET Bulletin 65, Edition 97-01

$$S = PG/4\pi R^2$$

Where: S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (in appropriate units, e.g., mW)

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

Maximum peak output power at antenna input : 10.26 dBm (10.62 mW)

Prediction distance : 20 cm

Predication frequency : 2 442 MHz

Antenna gain(Max) : 2.0 dBi (1.58 numeric)

Power density at predication frequency at 20 cm : 0.00001484 mW/cm²

MPE Limit for : 1.0 mW/cm²

Test Result

The EUT is a portable device. The power density level at 20 cm is 0.00001484 mW/cm²

6. SAMPLE CALCULATION

Sample Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor.
The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF$$

Where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

$$dB(\mu V) = 20 \log_{10} (uV) : \text{Equation}$$

Example : @ 132.26 MHz

Class B Limit	= 43.50 dBuV/m
Reading	= 25.30dBuV
Antenna Factor + Cable Loss	= $11.02 + 3.28 = 14.30$ dBuV/m
Total	= 39.60 dBuV/m
Margin	= $43.50 - 39.60 = 3.90$ dB
	= 3.90 dB below Limit

7. List of test equipments used for measurements

Test Equipment		Model	Mfg.	Serial No.	Cal. Due Date
<input checked="" type="checkbox"/>	EMI TEST Receiver	ESVS10	R & S	835165/001	09.04.04
<input checked="" type="checkbox"/>	EMI TEST Receiver	ESPI3	R & S	100478	08.10.04
<input checked="" type="checkbox"/>	Spectrum Analyzer	E7405A	H.P	US41160290	08.10.04
<input checked="" type="checkbox"/>	LogBicon Antenna	VULB9165	Schwarz Beck	2023	09.08.28
<input checked="" type="checkbox"/>	Broad band Horn antenna	BBHA 9120D	Schwarz Beck	227	09.03.15
<input checked="" type="checkbox"/>	Broad band Horn antenna	BBHA 9120D	Schwarz Beck	285	09.03.15
<input checked="" type="checkbox"/>	Preamplifier	8447D	H.P	3307A02865	08.10.05
<input checked="" type="checkbox"/>	Turn-Table	DETT-03	Daeil EMC	-	N/A
<input checked="" type="checkbox"/>	Antenna Master	DEAM-03	Daeil EMC	-	N/A

End of test report