



849 NW STATE ROAD 45
NEWBERRY, FL 32669 USA
PH: 888.472.2424 OR 352.472.5500
FAX: 352.472.2030
EMAIL: INFO@TIMCOENGR.COM
[HTTP://WWW.TIMCOENGR.COM](http://WWW.TIMCOENGR.COM)

FCC PART 15.231(a) TEST REPORT

LOW POWER UNLICENSED TRANSMITTER

Applicant	SHENZHEN CONSTANT ELECTRONICS CO., LTD.
Address	F5, NO. 2 BLDG., EAST BRIGHT INDUSTRY REGION NO. 83 DABAO ROAD BAO'AN 33 DISTRICT SHENZHEN, GUANGDONG China
FCC ID	WH2-2610D
Product Description	REMOTE
Date Sample Received	2/25/2015
Date Tested	3/9/2015
Tested By	Cory Leverett
Approved By	Sid Sanders
Test Results	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Report Number	Version Number	Description	Issue Date
1987YUT15TestReport.docx	Rev.1	Initial Issue	3/9/2015

**THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL
WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.**



TABLE OF CONTENTS

GENERAL REMARKS	3
REPORT SUMMARY	4
TEST ENVIRONMENT	4
TEST SETUP	4
EUT SPECIFICATION	5
MANUFACTURE DECLARATION OF COMPLIANCE WITH PART 15.231(a)	6
TEST PROCEDURES	7
TRANSMITTER DEACTIVATION TIME	8
RADIATION INTERFERENCE	9
CALCULATION OF EUTY CYCLE	11
OCCUPIED BANDWIDTH	12
TEST EQUIPMENT LIST	13

APPLICANT: SHENZHEN CONSTANT ELECTRONICS CO., LTD.

FCC ID: WH2-2610D

REPORT: S\SZ CONSTANT_WH2\1987YUT15\1987YUT15TestReport.docx

GENERAL REMARKS

The attached report shall not be reproduced except in full without the written permission of Timco Engineering Inc.

Summary

The device under test does:

fulfill the general approval requirements as identified in this test report
 not fulfill the general approval requirements as identified in this test report

Attestations

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025 requirements.

I attest that the necessary measurements were made, under my supervision, at:

Timco Engineering Inc.
849 NW State Road 45
Newberry, FL 32669

Authorized Signatory Name:

Cory Leverett
Project Manager

Date: **3/9/2015**



Table of Contents

APPLICANT: SHENZHEN CONSTANT ELECTRONICS CO., LTD.

FCC ID: WH2-2610D

REPORT: S\SZ CONSTANT_WH2\1987YUT15\1987YUT15TestReport.docx



REPORT SUMMARY

Disclaimer	The test results only relate to the item tested.
Applicable Rule(s)	FCC Pt 15.231(e), Pt 15.209, Pt 15.207, ANSI C63.4: 2009
Related Report(s) or Approval(s)	NA

TEST ENVIRONMENT

Test Facility	The test sites are located at 849 NW State Road 45 Newberry, FL 32669 USA.
Test Condition:	Temperature: 24-26°C Relative humidity: 50-65%

TEST SETUP

Test Exercise (e.g. software description, test signal, etc.):	The EUT was operated in a normal mode to determine the duty cycle and then placed in continuous transmit mode of operation for the radiated emissions.
Deviation from the standard(s)	No deviation from the standard(s)
Modification to the EUT:	No modification was made to the EUT.
Supporting Peripheral Equipment	Not applicable. The device is a stand-alone remote control radio.

[Table of Contents](#)

APPLICANT: SHENZHEN CONSTANT ELECTRONICS CO., LTD.

FCC ID: WH2-2610D

REPORT: S\SZ CONSTANT_WH2\1987YUT15\1987YUT15TestReport.docx



EUT SPECIFICATION

Applicant	SHENZHEN CONSTANT ELECTRONICS CO., LTD.		
Description	REMOTE		
FCC ID	WH2-2610D		
Model Number	MMC-2610D		
Frequency Range	433.5 – 433.5 MHz		
EUT Power Source	<input type="checkbox"/> 110–120Vac/50– 60Hz		
	<input type="checkbox"/> DC Power		
	<input checked="" type="checkbox"/> Battery Operated Exclusively		
Test Item	<input type="checkbox"/> Prototype	<input checked="" type="checkbox"/> Pre-Production	<input type="checkbox"/> Production
Type of Equipment	<input type="checkbox"/> Fixed	<input type="checkbox"/> Mobile	<input checked="" type="checkbox"/> Portable

[Table of Contents](#)

APPLICANT: SHENZHEN CONSTANT ELECTRONICS CO., LTD.

FCC ID: WH2-2610D

REPORT: S\SZ CONSTANT_WH2\1987YUT15\1987YUT15TestReport.docx



MANUFACTURE DECLARATION OF COMPLIANCE WITH PART 15.231(a)

Item	Description	Yes	No
1	Does this device transmit a signal that is only used to control another device?	X	
2	Does this device send data with this control signal?	X	
3	Does this device send data? Data is, things like: temperature, wind direction, fluid amount, rate of flow, etc.	X	
4	Does this device transmit continuously or automatically?		X
5	If manually operated does this device stop transmitting within 5 seconds of releasing the button?	X	
6	If automatically operated does it deactivate 5 seconds after activation?	NA	
7	Does it transmit at regular predetermined intervals?		X
8	Does it poll or send supervisory information?		X
	If yes does it do a system integrity check? How often?	NA	
9	Is this a fire, security or safety of life device?		X
	If YES does the device stop transmitting after the alarm condition is satisfied?	NA	
10	Duty cycle: Maximum on-time?	NA	
	If YES, on-time in 100 ms? If Other, please specify here	NA	
	On time in	NA	
11	Modulation technique: Please specify the modulation of the test sample, FM, or AFSK, or FSK, or on-off keying, or others?	FSK	

Table of Contents

APPLICANT: SHENZHEN CONSTANT ELECTRONICS CO., LTD.

FCC ID: WH2-2610D

REPORT: S\SZ CONSTANT_WH2\1987YUT15\1987YUT15TestReport.docx



TEST PROCEDURES

Power line conducted Emissions: The test procedure used was ANSI C63.4-2009.

Spurious Emissions: The test procedure used was ANSI C63.4-2009 using a spectrum analyzer with a preselector. The bandwidth of the spectrum analyzer was 100 kHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The resolution bandwidth was 100 kHz and the video bandwidth was always greater than the RBW.

Occupied Bandwidth: A small sample of the transmitter output was fed into the spectrum analyzer and a was generated. The vertical scale is set to 10 dB per division.

Formula Of Conversion Factors: The field strength at 3m was established by adding the meter reading of the spectrum analyzer to the antenna correction factor supplied by the antenna manufacturer plus the coax loss. The antenna correction factors are stated in terms of dB/m. The gain of the preselector was accounted for in the spectrum analyzer reading.

Example:

Freq MHz	Meter Reading dB μ V	ACF dB/m	Cable Loss dB	Field Strength dB μ V/m @ 3 m
33	20	+10.36	+1.2	= 31.56

ANSI C63.4-2003 Measurement: The EUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The EUT was placed in the center of the table. The table used for radiated measurements is capable of continuous rotation. The spectrum was scanned from 30 MHz to the 10th harmonic of the fundamental.

Peak readings were taken in three (3) orthogonal planes when necessary and the highest readings were converted to average readings based on the duty cycle.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

[Table of Contents](#)

APPLICANT: SHENZHEN CONSTANT ELECTRONICS CO., LTD.

FCC ID: WH2-2610D


REPORT: S\SZ CONSTANT_WH2\1987YUT15\1987YUT15TestReport.docx

TRANSMITTER DEACTIVATION TIME

Rule Part No.: 15.231(a)(1)

Requirements: A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released

Test Data:

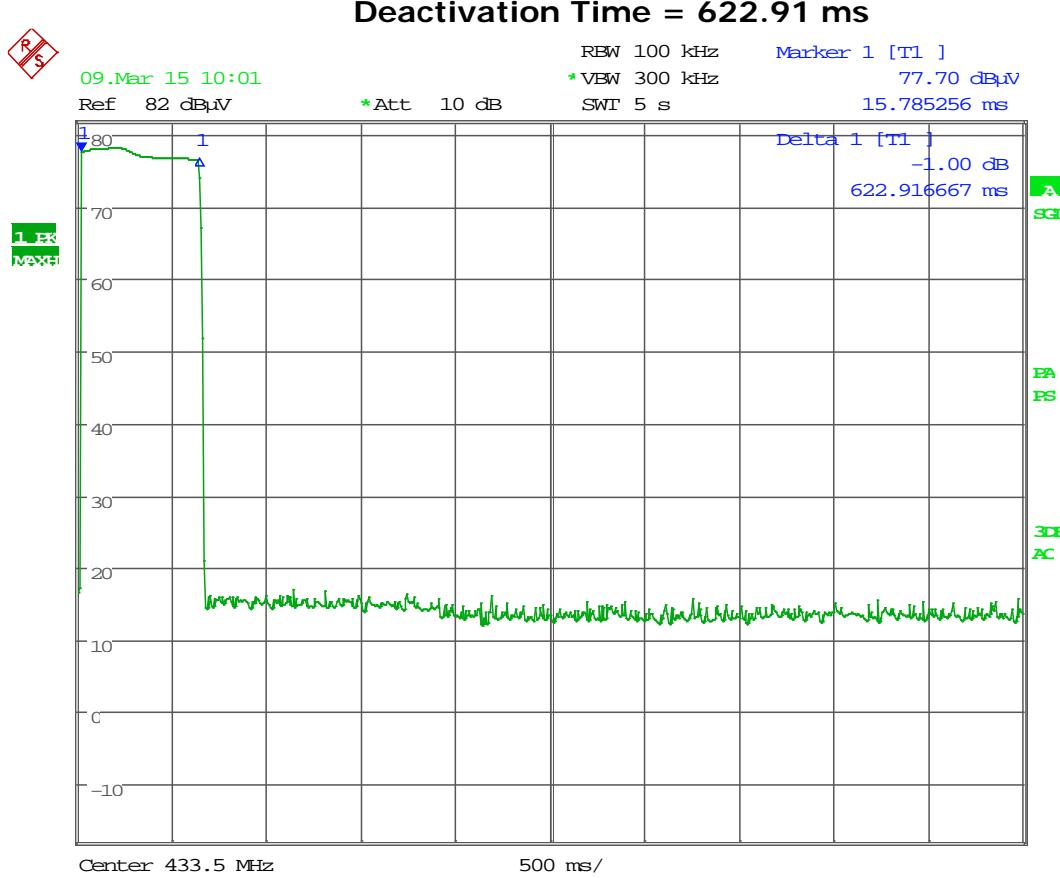

Date: 9.MAR.2015 10:01:20

RESULTS MEET REQUIREMENTS

[Table of Contents](#)

APPLICANT: SHENZHEN CONSTANT ELECTRONICS CO., LTD.

FCC ID: WH2-2610D

REPORT: S\SZ CONSTANT_WH2\1987YUT15\1987YUT15TestReport.docx

RADIATION INTERFERENCE

Rules Part No.: 15.231(b)

Requirements:

Fundamental Frequency (MHz)	Field Strength of Fundamental (dB μ V/m)	Field Strength of Harmonics and Spurious Emissions (dB μ V/m @ 3m)
40.66 to 40.70	67.04	47.04
70 to 130	61.94	41.94
130 to 174	61.94 to 71.48	41.94 to 51.48
174 to 260	71.48	51.48
260 to 470	71.48 to 81.94	51.48 to 61.94
470 and above	81.94(12500)	61.94

Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follows:

- 1) for the band 130-174 MHz, uV/m at 3 meters = $56.81818(F) - 6136.3636$;
- 2) for the band 260-470 MHz, uV/m at 3 meters = $41.6667(F) - 7083.3333$.

The maximum permitted unwanted emission level is 20dB below the maximum permitted fundamental level at that frequency.

Sample calculation of limit @ 315 MHz:

$$41.6667 (315) - 7083.3333 = 6041.68 \text{ uV/m}$$

$$20\log(6041.68) = 75.62 \text{ dBuV/m limit @ 315 MHz}$$

Sample calculation of limit @ 433.92 MHz:

$$41.6667 (433.9) - 7083.3333 = 10,995.85 \text{ uV/m}$$

$$20\log(10,995.85) = 80.82 \text{ dBuV/m limit @ 433.9 MHz}$$

FOR THIS EUT:

The limit for average field strength in dBuV/m for the fundamental frequency is 80.81 dB μ V/m.

The limit for average field strength in dBuV/m for the harmonics and other spurious frequencies is 60.81 dB μ V/m unless it is in a restricted band.

[Table of Contents](#)

APPLICANT: SHENZHEN CONSTANT ELECTRONICS CO., LTD.

FCC ID: WH2-2610D

REPORT: S\SZ CONSTANT_WH2\1987YUT15\1987YUT15TestReport.docx



RADIATION INTERFERENCE

Test Data: Field Strength Table

* -Denotes restricted bands

Note: Emissions that are 20 dB below the limit are not required to be reported.

RESULTS MEET REQUIREMENTS

Table of Contents

APPLICANT: SHENZHEN CONSTANT ELECTRONICS CO. LTD

APPLICANT: SHENZHEN ()
ECC ID: WH2-2610D

FCC ID: WH2-2610D
REPORT: S\S7 CONSTANT WH2\1987YUT15\1987YUT15TestReport.docx



CALCULATION OF EUTY CYCLE

The period of the pulse train is determined by observing it on an oscilloscope or a spectrum analyzer with zero (0) frequency span. A plot is then made of the pulse train with a sweep time of 100 milliseconds. This sweep determines the duration of the pulse train. This sweep allows the determination of the number of and type of pulses, i.e. long & short. Plots are then made showing the duration of each type of pulse and its duration. From the 100-millisecond plot, the number of a given type of pulse is then multiplied by the duration of that type pulse. This allows the calculation of the amount of time the EUT is on within 100 ms.

Long Pulse	Na
Short Pulse	Na
On Time	Na
Length of Pulse Train	Na
Total	na

$$dB = 20 * \log(ON\ TIME) / PERIOD$$

$$dB = 20 * \log(0/100)$$

$$dB = 20 * \log(0)$$

$$dB = -0$$

The EUT uses a 100% duty cycle, no duty cycle corrections are applicable to this EUT.

[Table of Contents](#)

APPLICANT: SHENZHEN CONSTANT ELECTRONICS CO., LTD.

FCC ID: WH2-2610D

REPORT: S\SZ CONSTANT_WH2\1987YUT15\1987YUT15TestReport.docx


OCCUPIED BANDWIDTH

Rules Part No.: 15.231(C)

Requirements: The bandwidth of the emission shall be no wider than .25% of the center frequency for devices operating between 70 and 900 MHz. Bandwidth is determined at the points 20 dB down from the modulated carrier.

Test Data: Please refer to the following plots.

20 dB Occupied Bandwidth = 10.41 KHz

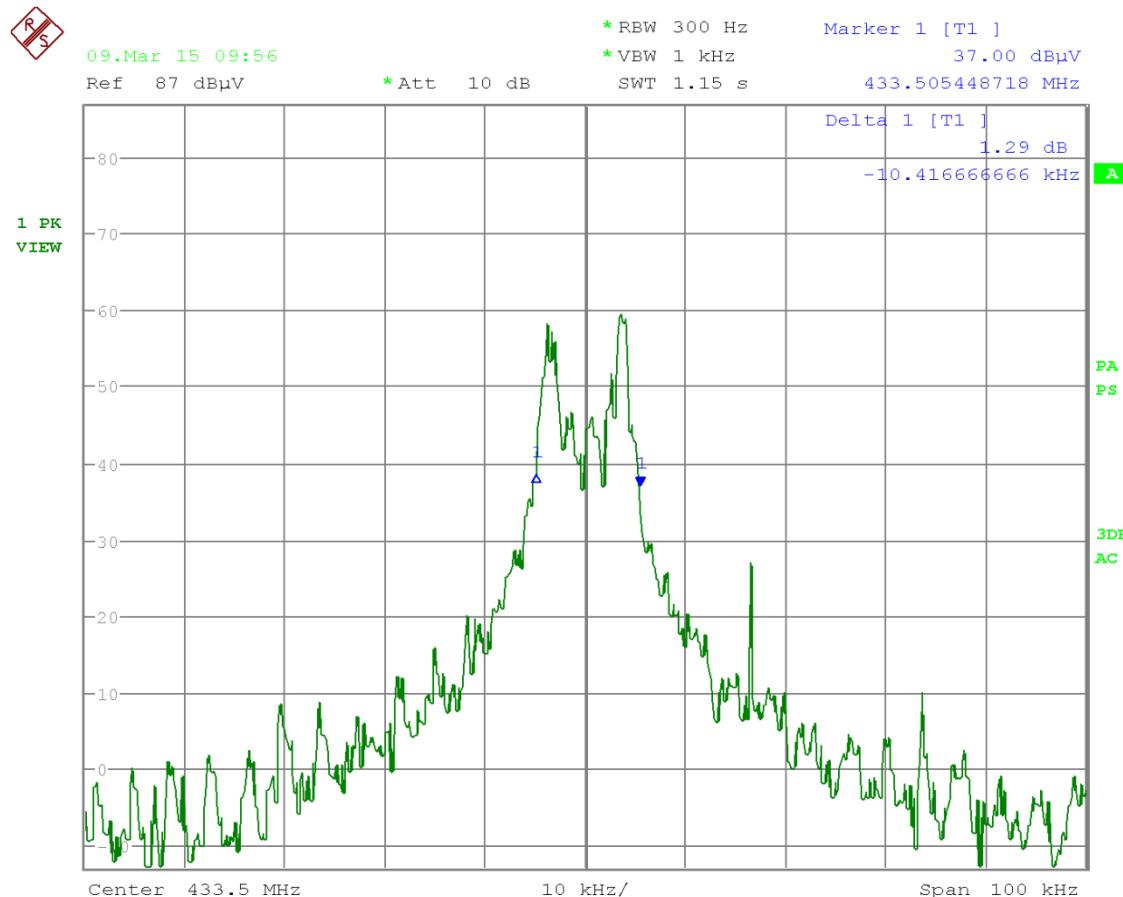

Date: 9.MAR.2015 09:56:22

RESULTS MEET REQUIREMENTS

[Table of Contents](#)

APPLICANT: SHENZHEN CONSTANT ELECTRONICS CO., LTD.

FCC ID: WH2-2610D

REPORT: S\SZ CONSTANT_WH2\1987YUT15\1987YUT15TestReport.docx



TEST EQUIPMENT LIST

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
Antenna: Biconnical Chamber	Eaton Chamber	94455-1	1057	06/14/13	06/14/15
Antenna: Log-Periodic Chamber	Eaton	96005	1243	05/31/13	05/31/15
3-Meter Semi-Anechoic Chamber	Panashield	N/A	N/A	12/31/13	12/31/15
Ant: Double-Ridged Horn/ETS Horn 1 Ch	ETS-Lindgren Chamber	3117	00035923	06/13/14	06/13/16
Software: EMI Test Receiver	Rohde & Schwarz	EMC 32	Version 4.30.0	12/12/99	12/12/99
EMI Test Receiver R & S ESU 40 Chamber	Rohde & Schwarz	ESU 40	100320	03/11/14	03/11/16

*EMI RECEIVER SOFTWARE VERSION

The receiver firmware used was version 4.43 Service Pack 3

[Table of Contents](#)

APPLICANT: SHENZHEN CONSTANT ELECTRONICS CO., LTD.

FCC ID: WH2-2610D

REPORT: S\SZ CONSTANT_WH2\1987YUT15\1987YUT15TestReport.docx