


Project No: TM-2404000025P
Report No.: TMWK2404001048KR

Page: 84 / 95
Rev.: 00

Project No :TM-2404000025P
Operation Band :802.11n20
Frequency :2412 MHz
Operation Mode :TX
EUT Pol :E2
Setting :17

Test Date :2024-09-13
Temp./Humi. :24.6/57
Antenna Pol. :Vertical
Engineer :Tony Chao
Test Chamber : 966A

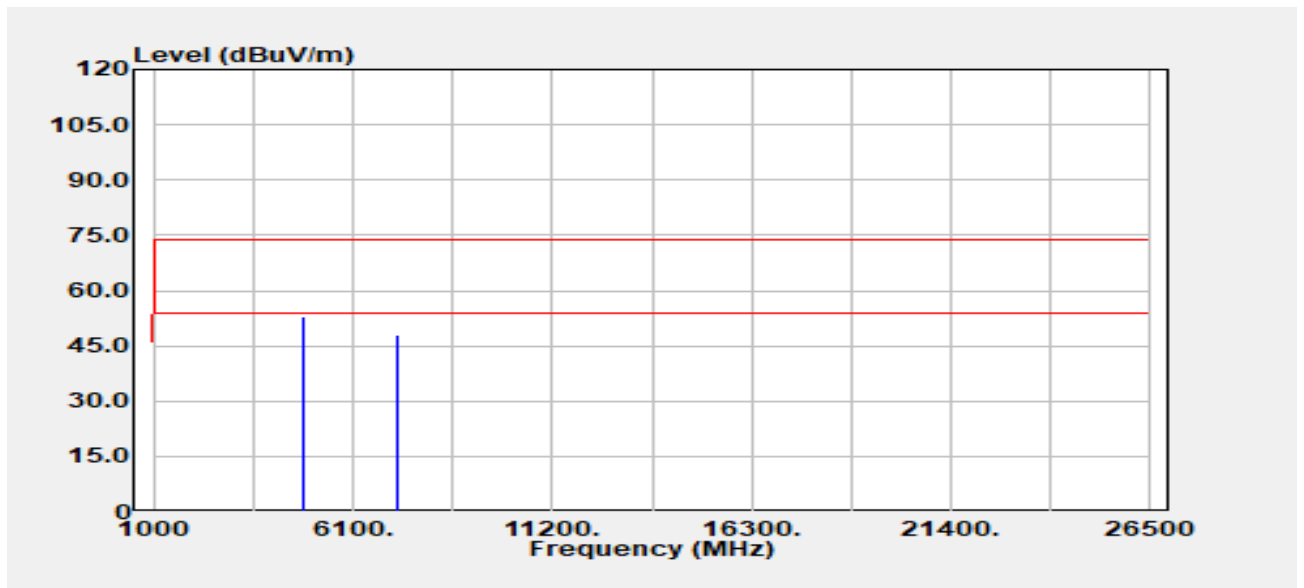


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
4824.00	Peak	50.68	2.25	52.93	74.00	-21.07
4824.00	Average	42.99	2.25	45.24	54.00	-8.76
7236.00	Peak	38.87	9.17	48.03	74.00	-25.97
7236.00	Average	32.27	9.17	41.44	54.00	-12.56

Project No: TM-2404000025P
Report No.: TMWK2404001048KR

Page: 85 / 95
Rev.: 00

Project No :TM-2404000025P
Operation Band :802.11n20
Frequency :2412 MHz
Operation Mode :TX
EUT Pol :E2
Setting :17

Test Date :2024-09-13
Temp./Humi. :24.6/57
Antenna Pol. :Horizontal
Engineer :Tony Chao
Test Chamber : 966A

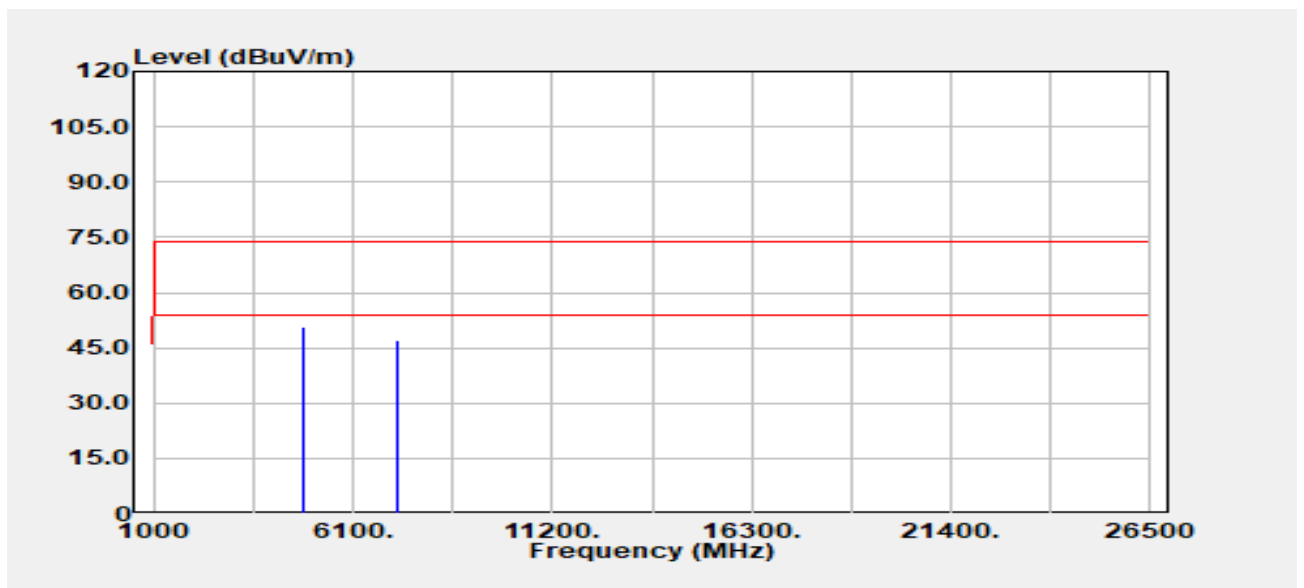


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
4824.00	Peak	48.63	2.25	50.88	74.00	-23.12
4824.00	Average	40.37	2.25	42.63	54.00	-11.37
7236.00	Peak	37.85	9.17	47.02	74.00	-26.98
7236.00	Average	31.80	9.17	40.97	54.00	-13.03

Project No: TM-2404000025P
Report No.: TMWK2404001048KR

Page: 86 / 95
Rev.: 00

Project No :TM-2404000025P
Operation Band :802.11n20
Frequency :2437 MHz
Operation Mode :TX
EUT Pol :E2
Setting :17

Test Date :2024-09-13
Temp./Humi. :24.6/57
Antenna Pol. :Vertical
Engineer :Tony Chao
Test Chamber : 966A

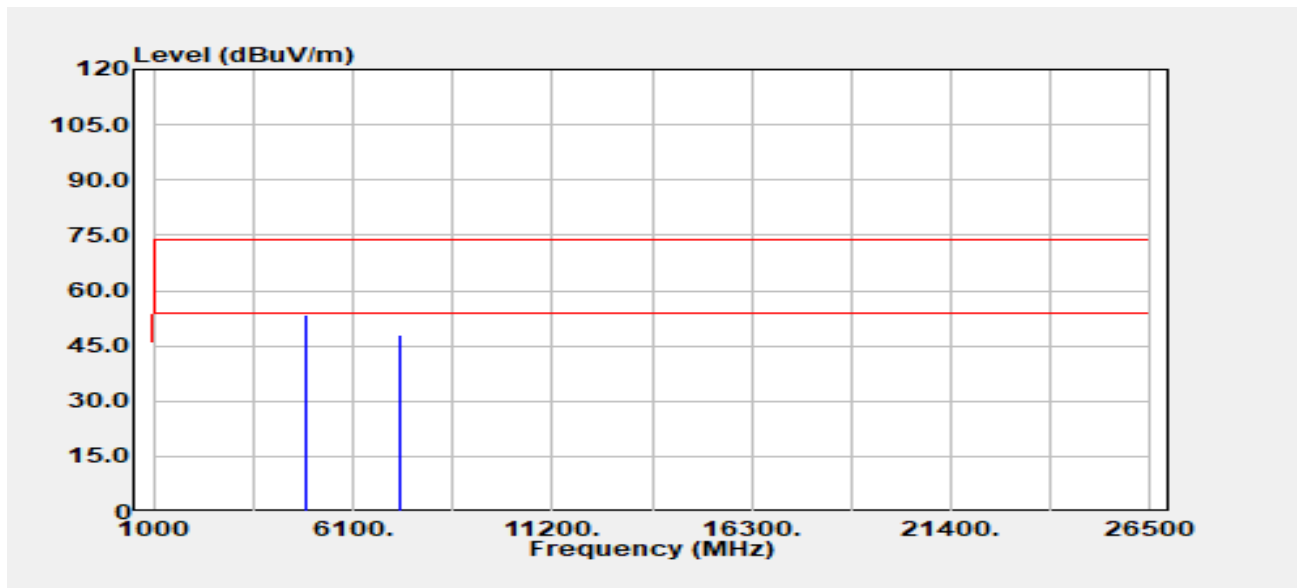


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
4874.00	Peak	50.73	2.49	53.22	74.00	-20.78
4874.00	Average	40.06	2.49	42.56	54.00	-11.44
7311.00	Peak	38.86	8.96	47.83	74.00	-26.17
7311.00	Average	32.86	8.96	41.82	54.00	-12.18

Project No: TM-2404000025P
Report No.: TMWK2404001048KR

Page: 87 / 95
Rev.: 00

Project No :TM-2404000025P
Operation Band :802.11n20
Frequency :2437 MHz
Operation Mode :TX
EUT Pol :E2
Setting :17

Test Date :2024-09-13
Temp./Humi. :24.6/57
Antenna Pol. :Horizontal
Engineer :Tony Chao
Test Chamber : 966A

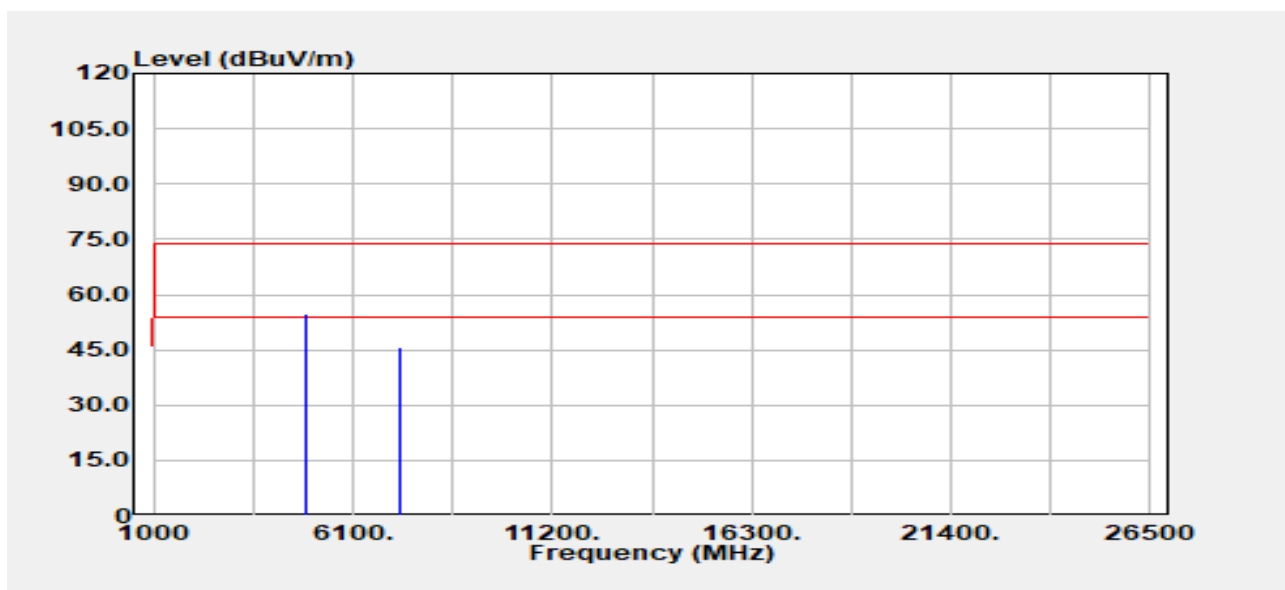


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
4874.00	Peak	52.10	2.49	54.59	74.00	-19.41
4874.00	Average	38.55	2.49	41.05	54.00	-12.95
7311.00	Peak	36.76	8.96	45.72	74.00	-28.28
7311.00	Average	31.60	8.96	40.57	54.00	-13.43

Project No: TM-2404000025P
Report No.: TMWK2404001048KR

Page: 88 / 95
Rev.: 00

Project No :TM-2404000025P
Operation Band :802.11n20
Frequency :2462 MHz
Operation Mode :TX
EUT Pol :E2
Setting :15

Test Date :2024-09-13
Temp./Humi. :24.6/57
Antenna Pol. :Vertical
Engineer :Tony Chao
Test Chamber : 966A

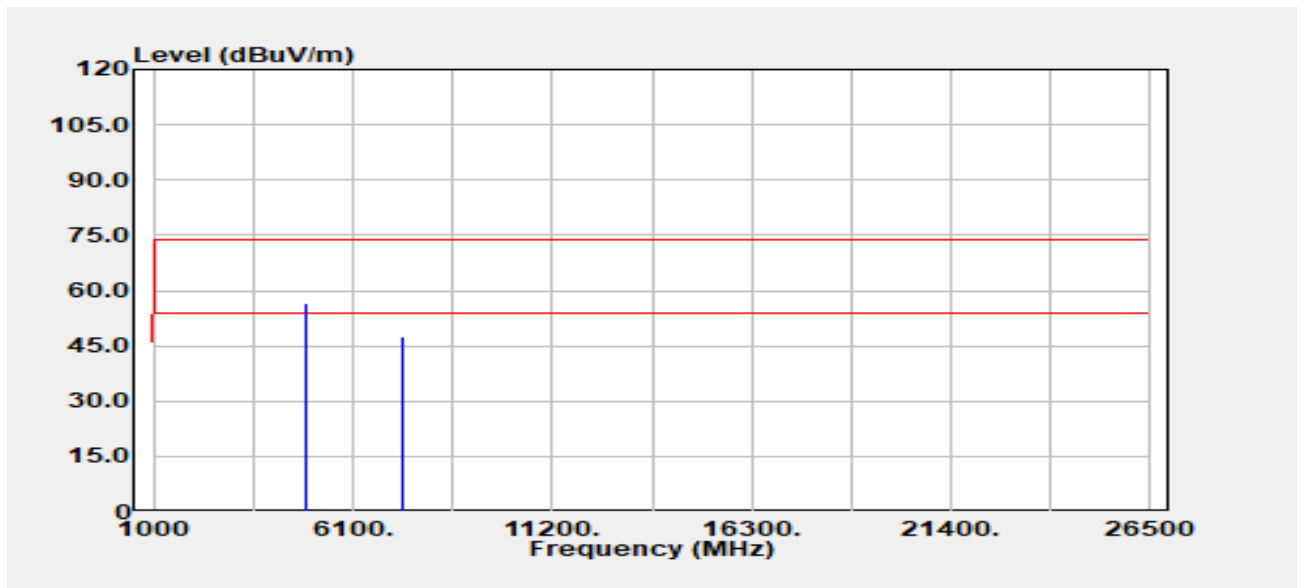


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
4924.00	Peak	53.49	2.93	56.42	74.00	-17.58
4924.00	Average	43.74	2.93	46.67	54.00	-7.33
7386.00	Peak	38.63	9.01	47.64	74.00	-26.36
7386.00	Average	32.02	9.01	41.04	54.00	-12.96

Project No: TM-2404000025P
Report No.: TMWK2404001048KR

Page: 89 / 95
Rev.: 00

Project No :TM-2404000025P
Operation Band :802.11n20
Frequency :2462 MHz
Operation Mode :TX
EUT Pol :E2
Setting :15

Test Date :2024-09-13
Temp./Humi. :24.6/57
Antenna Pol. :Horizontal
Engineer :Tony Chao
Test Chamber : 966A

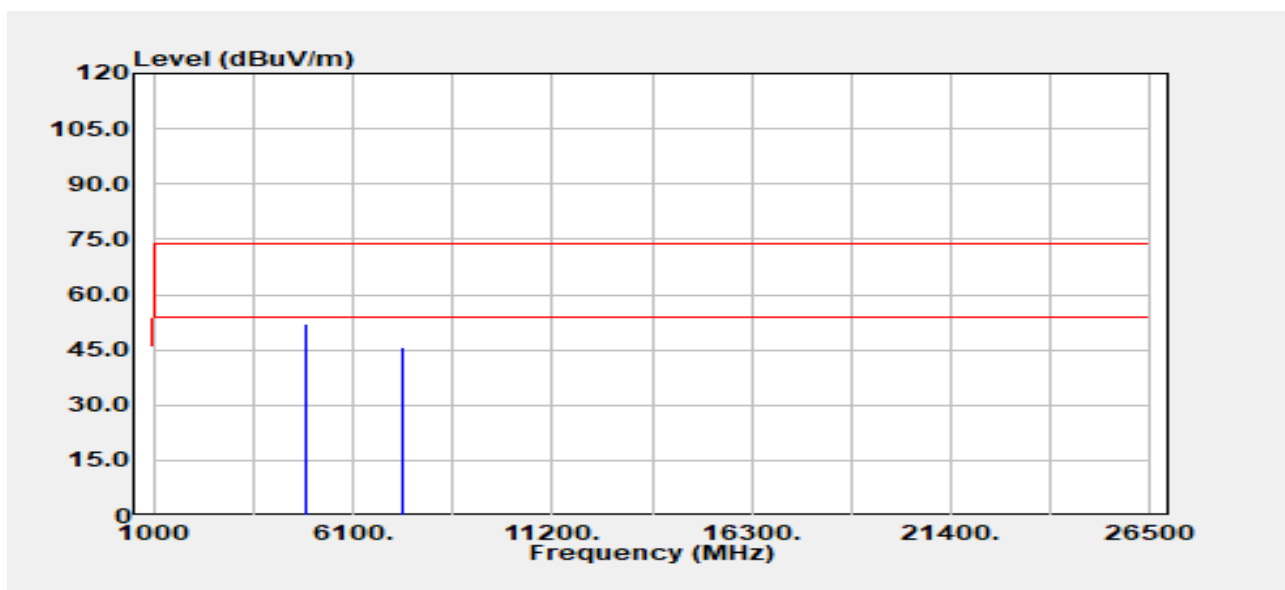


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
4924.00	Peak	49.30	2.93	52.23	74.00	-21.77
4924.00	Average	40.86	2.93	43.79	54.00	-10.21
7386.00	Peak	36.91	9.01	45.92	74.00	-28.08
7386.00	Average	30.33	9.01	39.34	54.00	-14.66

Project No: TM-2404000025P
Report No.: TMWK2404001048KR

Page: 90 / 95
Rev.: 00

Project No :TM-2404000025P
Operation Band :802.11n40
Frequency :2422 MHz
Operation Mode :TX
EUT Pol :E2
Setting :13

Test Date :2024-09-13
Temp./Humi. :24.6/57
Antenna Pol. :Vertical
Engineer :Tony Chao
Test Chamber : 966A

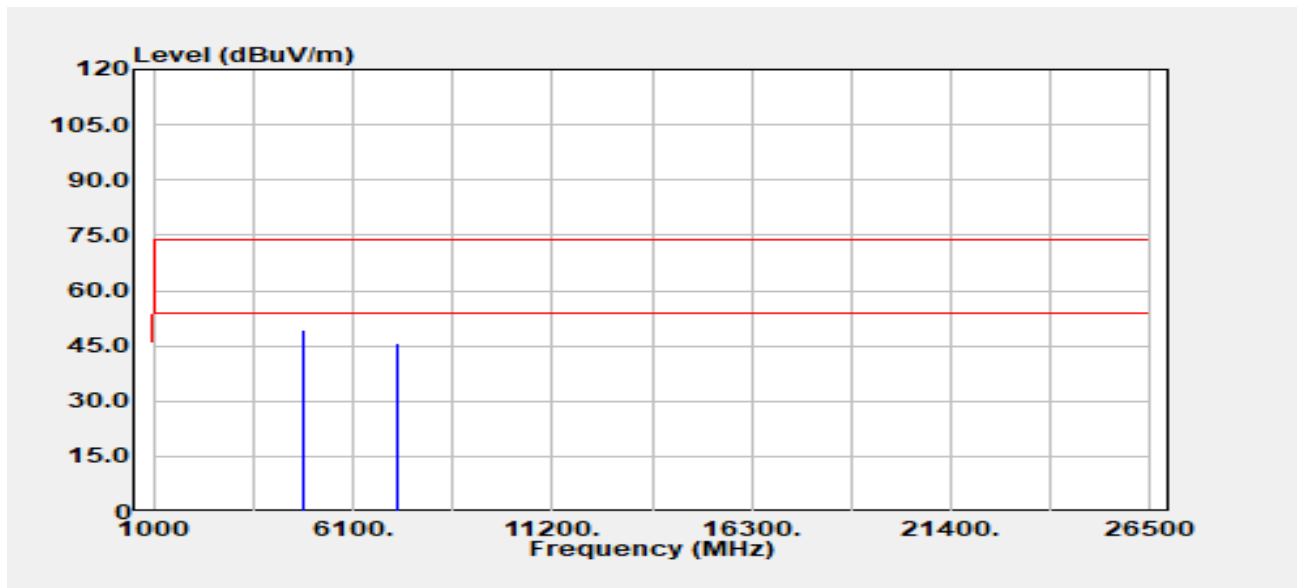


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
4844.00	Peak	47.24	2.28	49.51	74.00	-24.49
4844.00	Average	41.32	2.28	43.59	54.00	-10.41
7266.00	Peak	36.41	9.15	45.57	74.00	-28.43
7266.00	Average	31.33	9.15	40.49	54.00	-13.51

Project No: TM-2404000025P
Report No.: TMWK2404001048KR

Page: 91 / 95
Rev.: 00

Project No :TM-2404000025P
Operation Band :802.11n40
Frequency :2422 MHz
Operation Mode :TX
EUT Pol :E2
Setting :13

Test Date :2024-09-13
Temp./Humi. :24.6/57
Antenna Pol. :Horizontal
Engineer :Tony Chao
Test Chamber : 966A

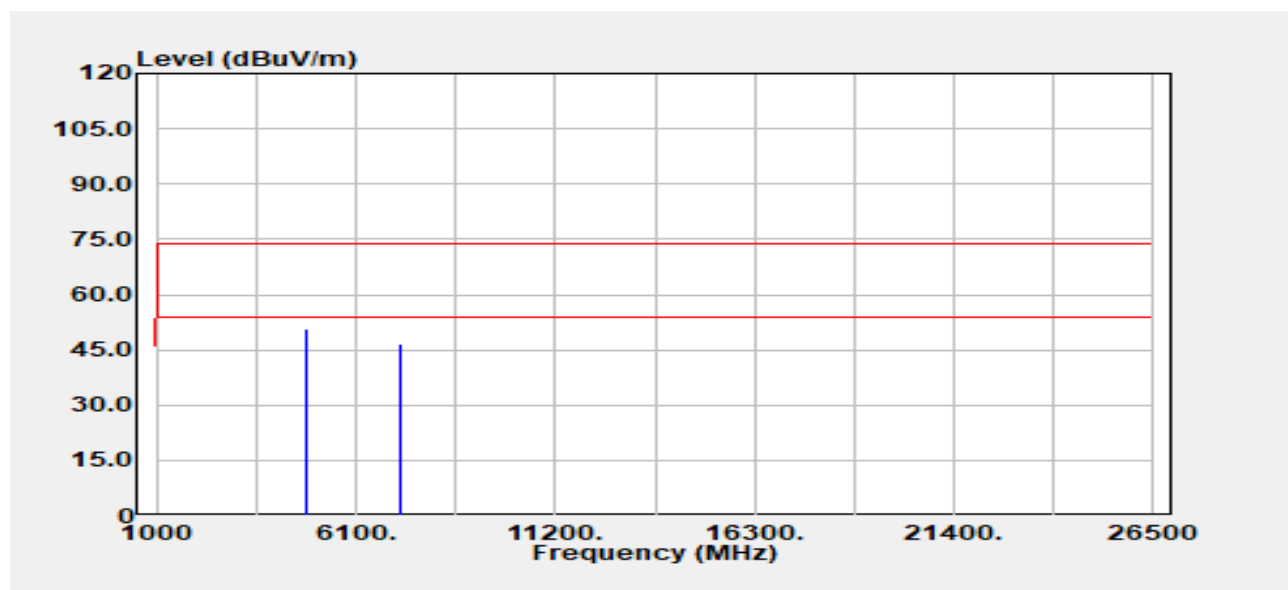


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
4844.00	Peak	48.43	2.28	50.71	74.00	-23.29
4844.00	Average	40.97	2.28	43.25	54.00	-10.75
7266.00	Peak	37.63	9.15	46.79	74.00	-27.21
7266.00	Average	30.61	9.15	39.76	54.00	-14.24

Project No: TM-2404000025P
Report No.: TMWK2404001048KR

Page: 92 / 95
Rev.: 00

Project No :TM-2404000025P
Operation Band :802.11n40
Frequency :2437 MHz
Operation Mode :TX
EUT Pol :E2
Setting :14

Test Date :2024-09-13
Temp./Humi. :24.6/57
Antenna Pol. :Vertical
Engineer :Tony Chao
Test Chamber : 966A

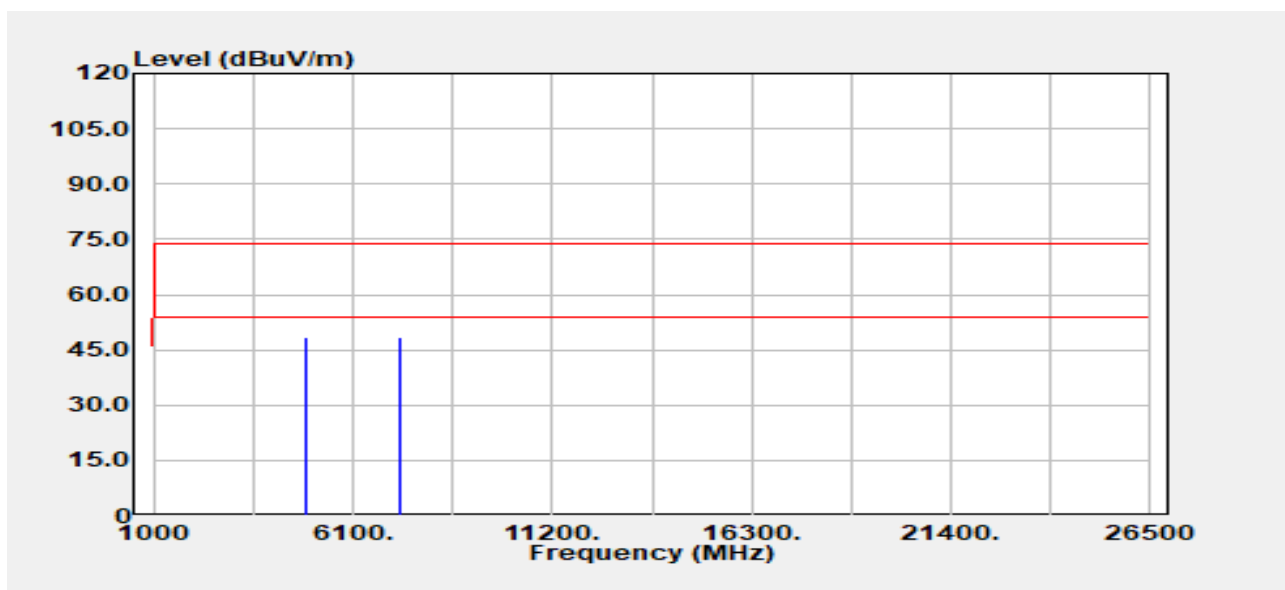


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
4874.00	Peak	46.17	2.49	48.66	74.00	-25.34
4874.00	Average	37.99	2.49	40.48	54.00	-13.52
7311.00	Peak	39.42	8.96	48.38	74.00	-25.62
7311.00	Average	31.66	8.96	40.63	54.00	-13.37

Project No: TM-2404000025P
Report No.: TMWK2404001048KR

Page: 93 / 95
Rev.: 00

Project No :TM-2404000025P
Operation Band :802.11n40
Frequency :2437 MHz
Operation Mode :TX
EUT Pol :E2
Setting :14

Test Date :2024-09-13
Temp./Humi. :24.6/57
Antenna Pol. :Horizontal
Engineer :Tony Chao
Test Chamber : 966A

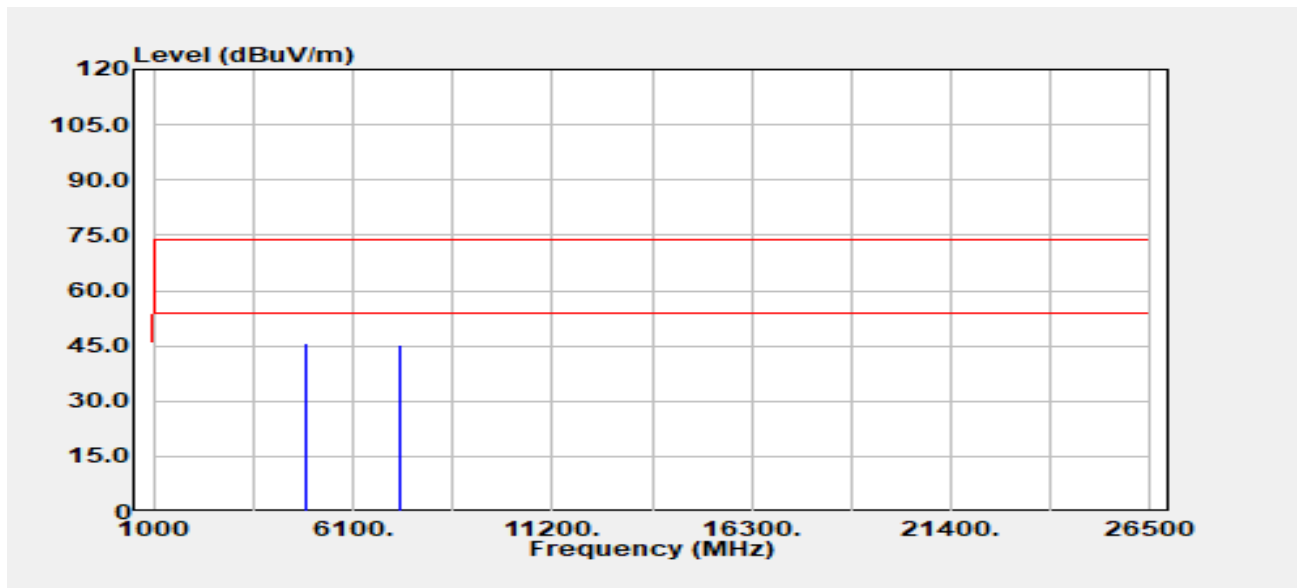


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
4874.00	Peak	43.15	2.49	45.65	74.00	-28.35
4874.00	Average	35.24	2.49	37.74	54.00	-16.26
7311.00	Peak	36.26	8.96	45.23	74.00	-28.77
7311.00	Average	30.30	8.96	39.27	54.00	-14.73

Project No: TM-2404000025P
Report No.: TMWK2404001048KR

Page: 94 / 95
Rev.: 00

Project No :TM-2404000025P
Operation Band :802.11n40
Frequency :2452 MHz
Operation Mode :TX
EUT Pol :E2
Setting :14

Test Date :2024-09-13
Temp./Humi. :24.6/57
Antenna Pol. :Vertical
Engineer :Tony Chao
Test Chamber : 966A

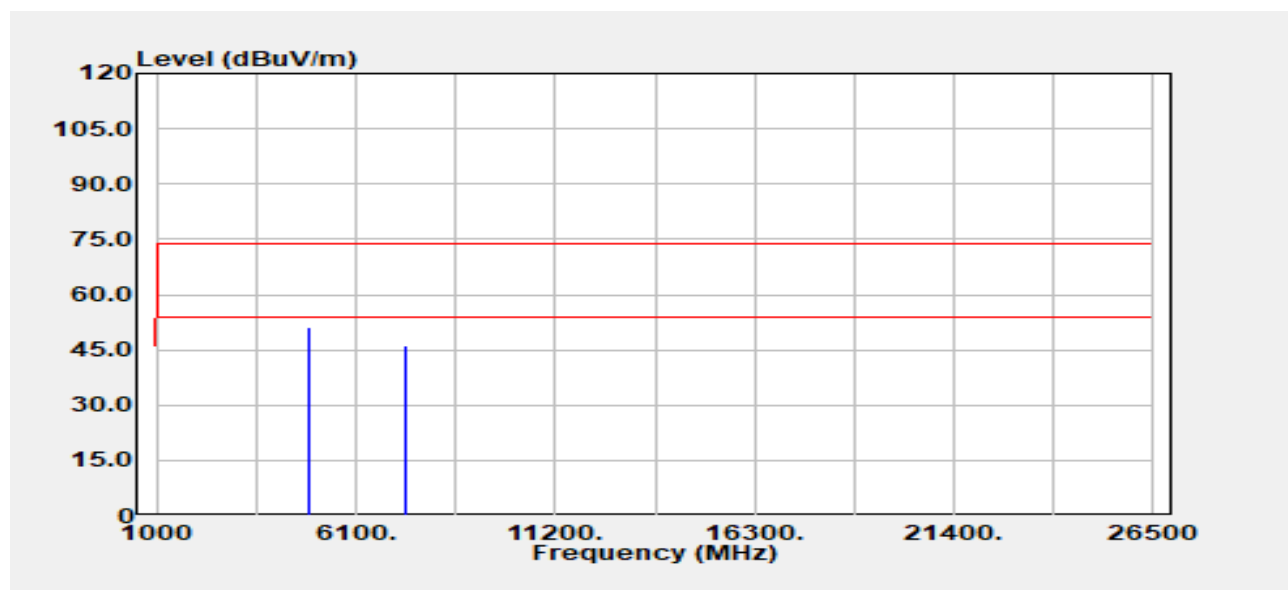


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
4904.00	Peak	48.31	2.75	51.07	74.00	-22.93
4904.00	Average	40.21	2.75	42.97	54.00	-11.03
7356.00	Peak	37.11	8.95	46.06	74.00	-27.94
7356.00	Average	31.02	8.95	39.98	54.00	-14.02

Project No: TM-2404000025P
Report No.: TMWK2404001048KR

Page: 95 / 95
Rev.: 00

Project No :TM-2404000025P
Operation Band :802.11n40
Frequency :2452 MHz
Operation Mode :TX
EUT Pol :E2
Setting :14

Test Date :2024-09-13
Temp./Humi. :24.6/57
Antenna Pol. :Horizontal
Engineer :Tony Chao
Test Chamber : 966A

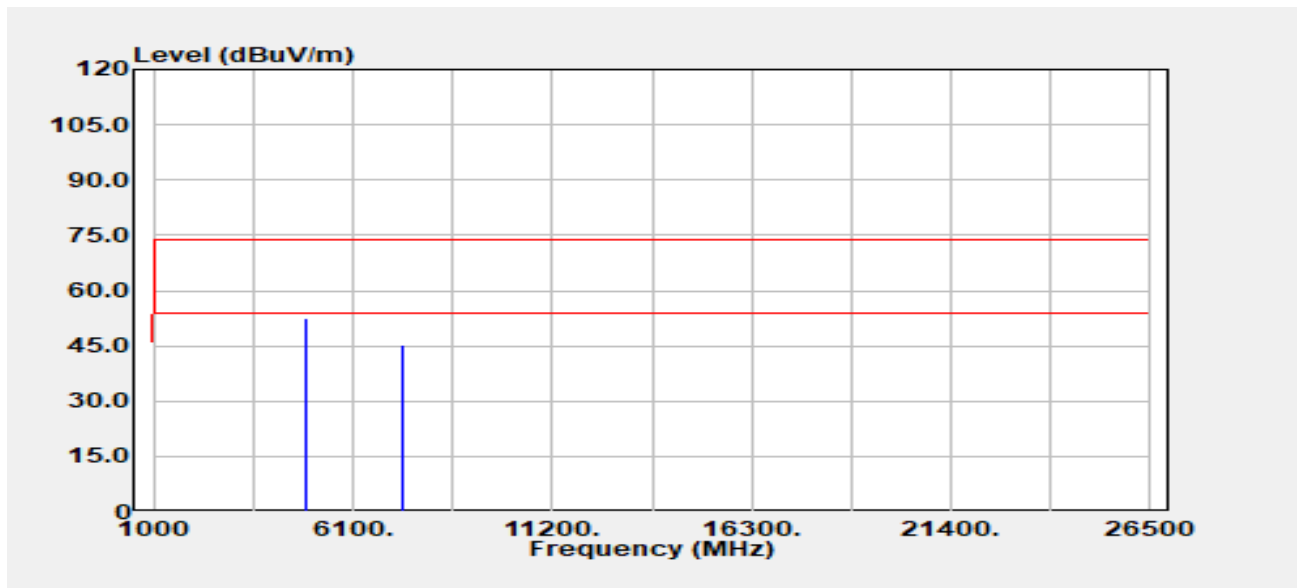

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
4904.00	Peak	49.61	2.75	52.36	74.00	-21.64
4904.00	Average	40.25	2.75	43.01	54.00	-10.99
7356.00	Peak	36.37	8.95	45.33	74.00	-28.67
7356.00	Average	30.07	8.95	39.02	54.00	-14.98

- End of Test Report -