

# EMC TEST REPORT



Report No.: 14021236-FCC-E

Supersede Report No.: N/A

Applicant	Shandong Bittel Electronics Co.,Ltd.	
Product Name	Wireless Access Point	
Main Model	Lim-AP	
Test Standard	FCC Part 15 Subpart B Class B:2014, ANSI C63.4: 2009	
Test Date	January 17 to January 18, 2015	
Issue Date	January 29, 2015	
Test Result	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
Equipment complied with the specification		<input checked="" type="checkbox"/>
Equipment did not comply with the specification		<input type="checkbox"/>
Herith Shi	Alex Liu	
Herith Shi Test Engineer	Alex Liu Checked By	
<p>This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only</p>		

Issued by:

SIEMIC (Nanjing-China) Laboratories

2-1 Longcang Avenue Yuhua Economic and  
Technology Development Park, Nanjing, China

Tel:+86(25)86730128/86730129 Fax:+86(25)86730127 Email: China@siemic.com.cn

## Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

### Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

Test Report No.	14021236-FCC-E
Page	3 of 26

---

This page has been left blank intentionally.

## CONTENTS

1. REPORT REVISION HISTORY.....	5
2. CUSTOMER INFORMATION .....	5
3. TEST SITE INFORMATION.....	5
4. EQUIPMENT UNDER TEST (EUT) INFORMATION .....	6
5. TEST SUMMARY .....	7
6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS .....	8
6.1 AC POWER LINE CONDUCTED EMISSIONS.....	8
6.2 RADIATED EMISSIONS.....	11
ANNEX A. TEST INSTRUMENT .....	13
ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS .....	14
ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT.....	22
ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST.....	25
ANNEX E. DECLARATION OF SIMILARITY .....	26

## 1. Report Revision History

Report No.	Report Version	Description	Issue Date
14021236-FCC-E	NONE	Original	January 29, 2015

## 2. Customer information

Applicant Name	Shandong Bittel Electronics Co.,Ltd.
Applicant Add	No.1 N. Rizhao Rd., Rizhao, Shandong, China
Manufacturer	Shandong Bittel Electronics Co.,Ltd.
Manufacturer Add	No.1 N. Rizhao Rd., Rizhao, Shandong, China

## 3. Test site information

Lab performing tests	SIEMIC (Nanjing-China) Laboratories
Lab Address	2-1 Longcang Avenue Yuhua Economic and Technology Development Park, Nanjing, China
FCC Test Site No.	986914
IC Test Site No.	4842B-1
Test Software	Labview of SIEMIC version 1.0

#### 4. Equipment under Test (EUT) Information

Description of EUT: Wireless Access Point

Main Model: Lim-AP

Serial Model: N/A

Date EUT received: December 31, 2014

Test Date(s): January 17 to January 18, 2015

Antenna Gain: WIFI ANT1#: 3 dBi  
WIFI ANT2#: 3 dBi

Type of Modulation: 802.11b/g/n: DSSS/OFDM

RF Operating Frequency (ies): 802.11b/g/n(20M): 2412-2462 MHz(TX/RX)  
802.11n(40M): 2422-2452 MHz (TX/RX)

Number of Channels: 802.11b/g/n(20M): 11CH  
802.11n(40M): 7CH

Port: RJ45 Port \*2

Input Power: Power Supply By 48V 500mA POE

Trade Name : Limark

FCC ID: WI6LIM-AP

## 5. Test Summary

The product was tested in accordance with the following specifications.  
All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§15.107; ANSI C63.4: 2009	AC Power Line Conducted Emissions	Compliance
§15.109; ANSI C63.4: 2009	Radiated Emissions	Compliance

### Measurement Uncertainty


Test Item	Description	Uncertainty
Radiated Emissions	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	3.952dB

## 6. Measurements, Examination And Derived Results

### 6.1 AC Power Line Conducted Emissions


Temperature	20°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar
Test date :	January 18, 2015
Tested By :	Herith Shi

#### Requirement(s):

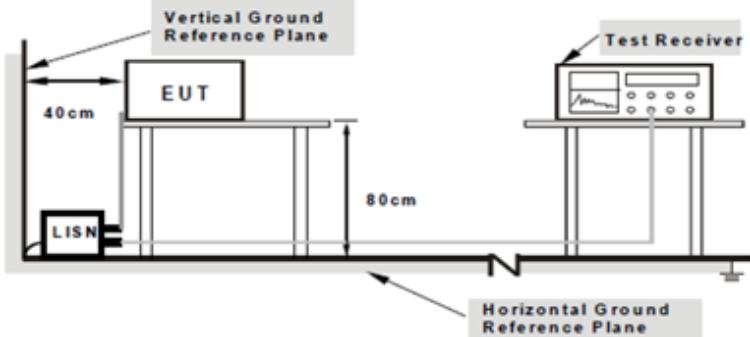Spec	Item	Requirement	Applicable														
47CFR§15.107	a)	<p>1. For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 [mu]H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequencies ranges.</p> <table border="1"> <thead> <tr> <th rowspan="2">Frequency ranges (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>QP</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15 ~ 0.5</td> <td>66 ~ 56</td> <td>56 ~ 46</td> </tr> <tr> <td>0.5 ~ 5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5 ~ 30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>	Frequency ranges (MHz)	Limit (dBuV)		QP	Average	0.15 ~ 0.5	66 ~ 56	56 ~ 46	0.5 ~ 5	56	46	5 ~ 30	60	50	<input checked="" type="checkbox"/>
Frequency ranges (MHz)	Limit (dBuV)																
	QP	Average															
0.15 ~ 0.5	66 ~ 56	56 ~ 46															
0.5 ~ 5	56	46															
5 ~ 30	60	50															
Test Setup		 <p><b>Note:</b> 1. Support units were connected to second LISN. 2. Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.</p>															
Procedure		<p>2. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table.</p> <p>3. The power supply for the EUT was fed through a 50W/50mH EUT LISN, connected to filtered mains.</p> <p>4. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable.</p> <p>5. All other supporting equipment were powered separately from another main supply.</p> <p>6. The EUT was switched on and allowed to warm up to its normal operating condition.</p> <p>7. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver.</p> <p>8. High peaks, relative to the limit line, were then selected. The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10kHz.</p> <p>9. Steps 6-7 were repeated for the LIVE line (for AC mains) or DC line (for DC power).</p>															

Remark		
Result	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
Test Data	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> N/A
Test Plot	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> N/A

Test Mode:	Transmitting Mode
------------	-------------------

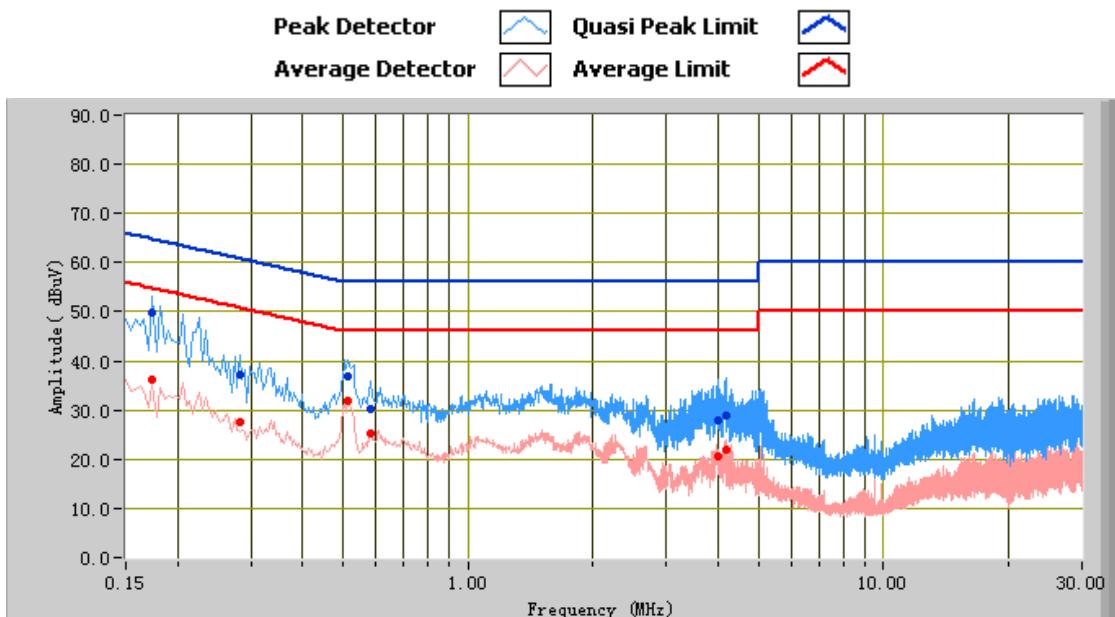


### Test Data

Phase Line Plot at 120Vac, 60Hz

Frequency (MHz)	Quasi Peak (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Average (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Factors (dB)
0.17	49.66	64.77	-15.11	36.06	54.77	-18.70	11.87
0.51	36.91	56.00	-19.09	31.88	46.00	-14.12	11.08
4.17	28.85	56.00	-27.15	21.94	46.00	-24.06	10.89
3.98	27.97	56.00	-28.03	20.64	46.00	-25.36	10.89
0.28	37.14	60.76	-23.62	27.49	50.76	-23.27	11.41
0.58	30.27	56.00	-25.73	25.38	46.00	-20.62	11.02

**Test Mode:**
**Transmitting Mode**

<b>Peak Detector</b>		<b>Quasi Peak Limit</b>	
<b>Average Detector</b>		<b>Average Limit</b>	

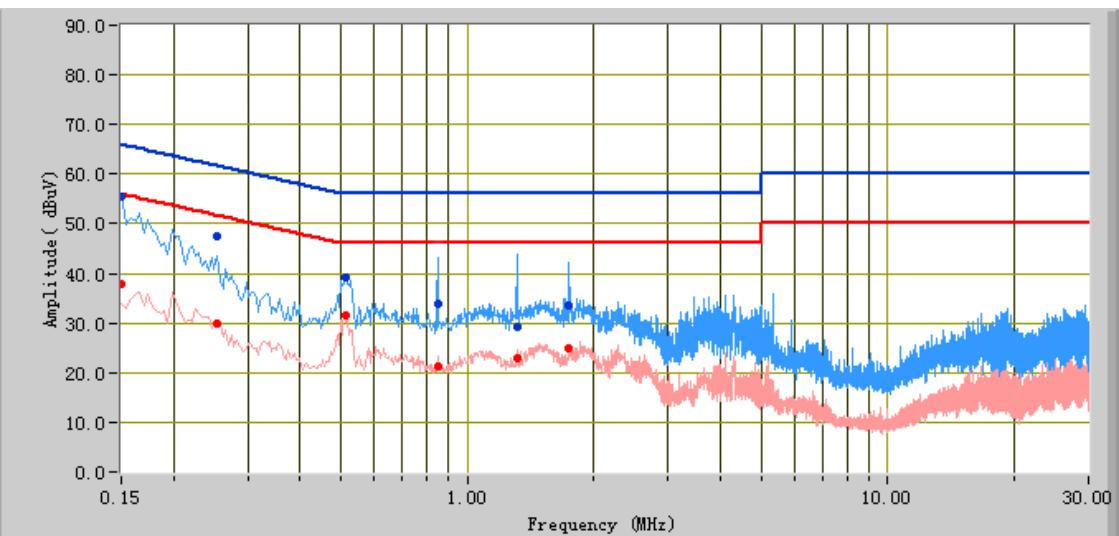

**Test Data**
**Phase Neutral Plot at 120Vac, 60Hz**

Frequency (MHz)	Quasi Peak (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Average (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Factors (dB)
0.85	33.78	56.00	-22.22	21.41	46.00	-24.59	10.81
0.15	55.49	66.00	-10.51	38.01	56.00	-17.99	12.21
1.31	29.31	56.00	-26.69	22.79	46.00	-23.21	10.77
1.75	33.50	56.00	-22.50	24.85	46.00	-21.15	10.86
0.51	39.27	56.00	-16.73	31.56	46.00	-14.44	11.05
0.25	47.53	61.62	-14.09	29.98	51.62	-21.65	11.45

## 6.2 Radiated Emissions

Temperature	20°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar
Test date :	January 17, 2015
Tested By :	Herith Shi

### Requirement(s):

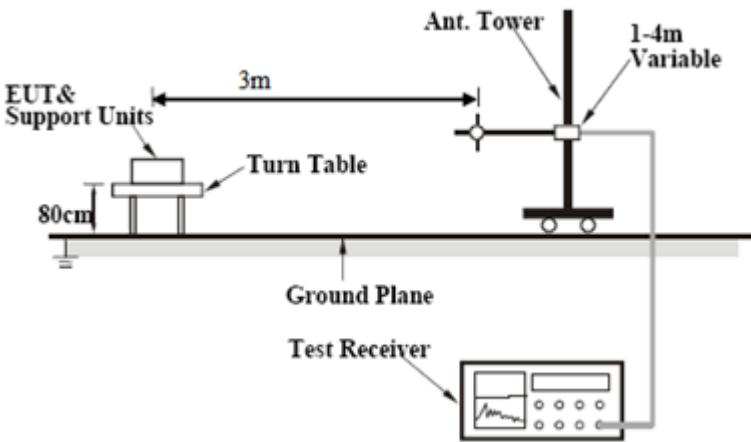Spec	Item	Requirement	Applicable										
47CFR§15.10 7(d)	a)	<p>Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges</p> <table border="1"> <thead> <tr> <th>Frequency range (MHz)</th> <th>Field Strength (<math>\mu</math>V/m)</th> </tr> </thead> <tbody> <tr> <td>30 – 88</td> <td>100</td> </tr> <tr> <td>88 – 216</td> <td>150</td> </tr> <tr> <td>216 – 960</td> <td>200</td> </tr> <tr> <td>Above 960</td> <td>500</td> </tr> </tbody> </table>	Frequency range (MHz)	Field Strength ( $\mu$ V/m)	30 – 88	100	88 – 216	150	216 – 960	200	Above 960	500	<input checked="" type="checkbox"/>
Frequency range (MHz)	Field Strength ( $\mu$ V/m)												
30 – 88	100												
88 – 216	150												
216 – 960	200												
Above 960	500												
Test Setup													
Procedure	<ol style="list-style-type: none"> <li>The EUT was switched on and allowed to warm up to its normal operating condition.</li> <li>The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:           <ol style="list-style-type: none"> <li>Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen.</li> <li>The EUT was then rotated to the direction that gave the maximum emission.</li> <li>Finally, the antenna height was adjusted to the height that gave the maximum emission.</li> </ol> </li> <li>For emission frequencies measured below and above 1GHz, set the spectrum analyzer on a 100kHz and 1MHz resolution bandwidth respectively for each frequency measured.</li> <li>Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.</li> </ol>												
Remark													
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail												


 Test Data  Yes  N/A

 Test Plot  Yes (See below)  N/A

Test Mode:	Transmitting Mode
------------	-------------------

(Below 1GHz)

Peak Detector   
 Quasi Peak Limit 

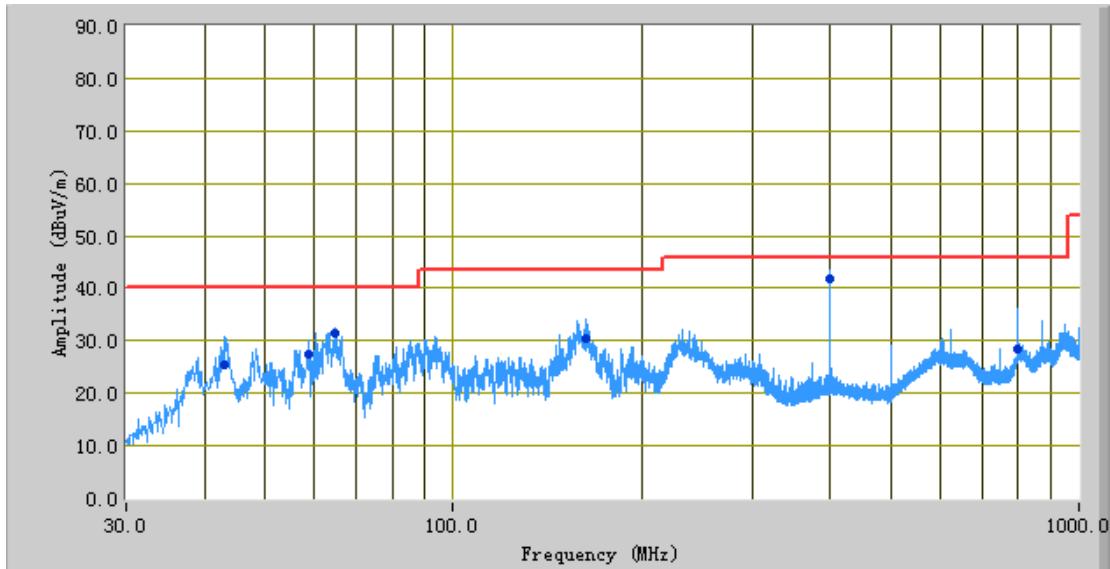

### Test Data

#### Horizontal & Vertical Polarity Plot @3m

Frequency (MHz)	Quasi Peak (dBµV/m)	Azimuth	Polarity (H/V)	Height (cm)	Factors (dB)	Limit (dBµV/m)	Margin (dB)
400.00	41.38	229.00	H	104.00	-27.84	46.00	-4.62
64.78	31.38	162.00	V	117.00	-37.83	40.00	-8.62
43.05	25.49	350.00	H	248.00	-35.24	40.00	-14.51
162.96	30.60	336.00	V	104.00	-31.48	43.50	-12.90
58.70	27.34	175.00	V	131.00	-37.77	40.00	-12.66
799.98	28.49	136.00	H	196.00	-19.27	46.00	-17.51

Note: The data above 1 GHz which below 20 dB to the limit was not recorded.

## Annex A. TEST INSTRUMENT


Instrument	Model	Serial #	Cal Date	Cal Due	In use
<b>AC Line Conducted Emissions</b>					
R&S Receiver	ESPI3	101216	11/04/2014	11/03/2015	<input checked="" type="checkbox"/>
Transient Limiter	LIT-153	531021	09/27/2014	09/26/2015	<input checked="" type="checkbox"/>
R&S LISN(9k-30MHz)	ESH3-Z5	838979/005	11/04/2014	11/03/2015	<input checked="" type="checkbox"/>
SIEMIC Labview Conducted Emissions software	V1.0	N/A	N/A	N/A	<input checked="" type="checkbox"/>
<b>Radiated Emissions</b>					
Hp Spectrum Analyzer	8563E	3821A09023	10/09/2014	10/08/2015	<input checked="" type="checkbox"/>
R&S EMI Receiver	ESPI3	101216	10/09/2014	10/08/2015	<input checked="" type="checkbox"/>
Antenna (30MHz~6GHz)	JB6	A121411	04/15/2014	04/14/2015	<input checked="" type="checkbox"/>
EMCO Horn Antenna (1 ~18GHz)	3115	N/A	11/15/2014	11/14/2015	<input checked="" type="checkbox"/>
INFOMW Antenna (1 ~18GHz)	JXTXLB-10180	J2031081120092	10/09/2014	10/08/2015	<input checked="" type="checkbox"/>
Horn Antenna (18~40GHz)	AH-840	101013	04/22/2014	04/22/2015	<input checked="" type="checkbox"/>
Microwave Pre-Amp (18~40GHz)	PA-840	181250	05/29/2014	05/28/2015	<input checked="" type="checkbox"/>
Hp Agilent Pre-Amplifier	8447F	1937A01160	10/27/2014	10/26/2015	<input checked="" type="checkbox"/>
MITEQ Pre-Amplifier (0.1 ~ 18GHz)	LPA-6-30	1451709	06/25/2014	06/24/2015	<input checked="" type="checkbox"/>
SIEMIC Labview Radiated Emissions software	V1.0	N/A	N/A	N/A	<input checked="" type="checkbox"/>

## Annex B. EUT And Test Setup Photographs

### Annex B.i. Photograph: EUT External Photo




EUT – Front View

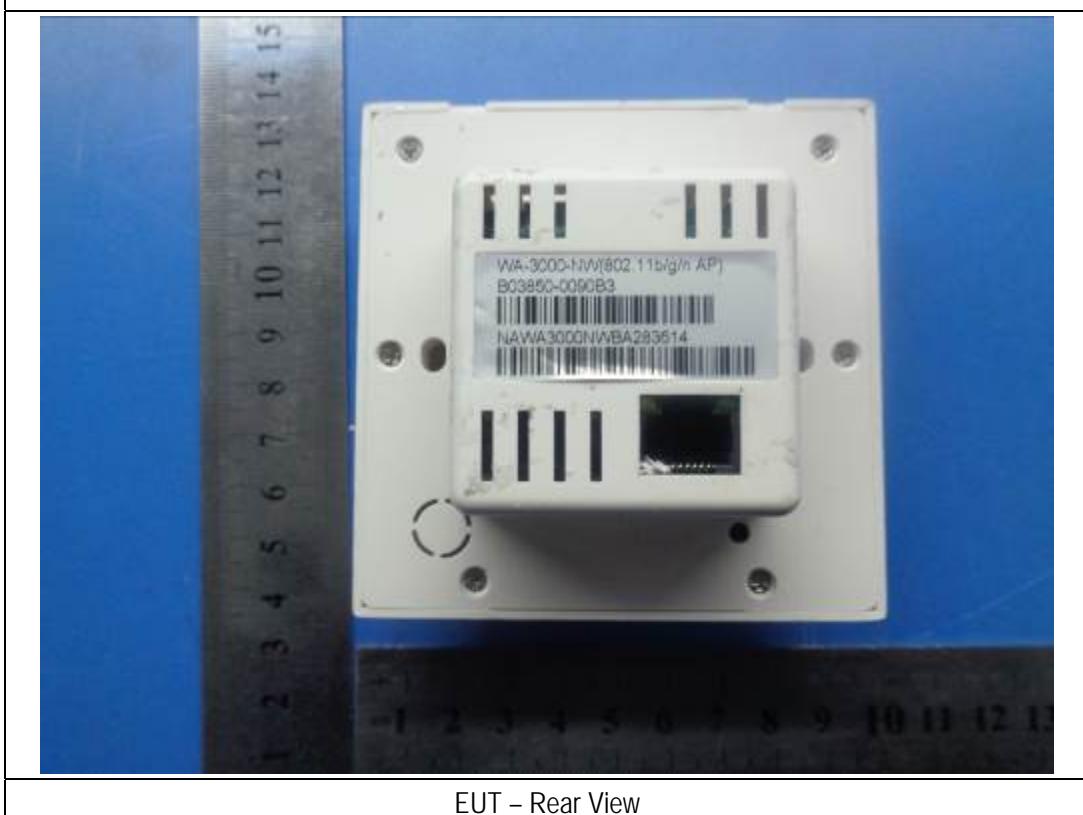


EUT – Rear View




EUT - Top View

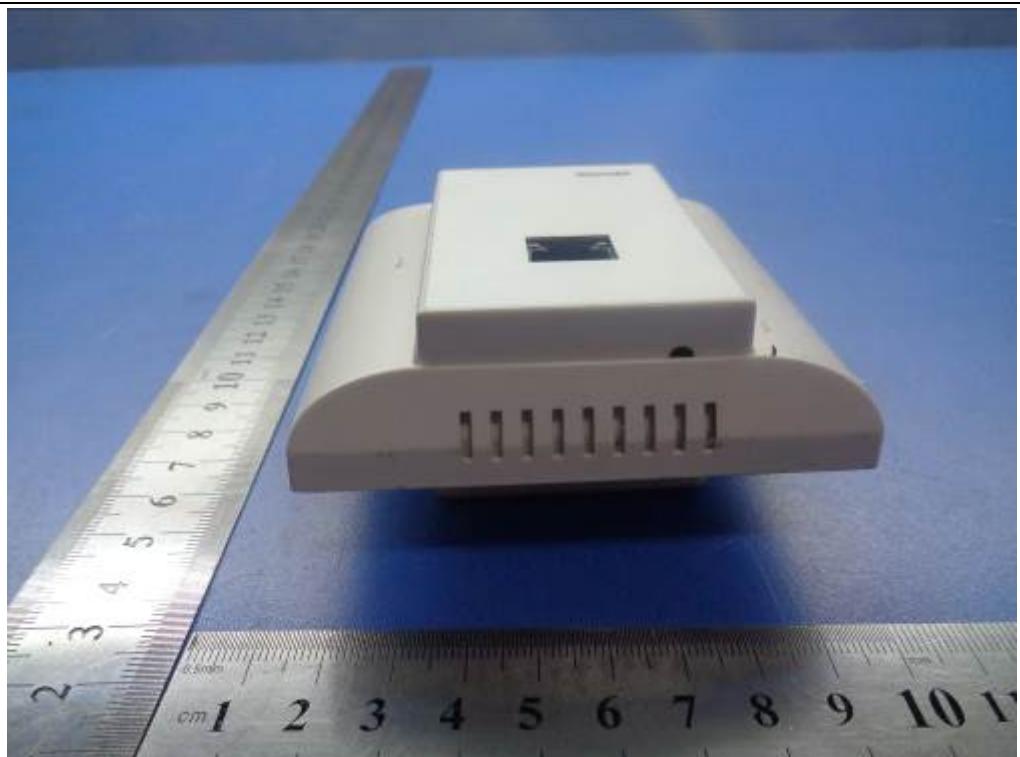

EUT - Bottom View

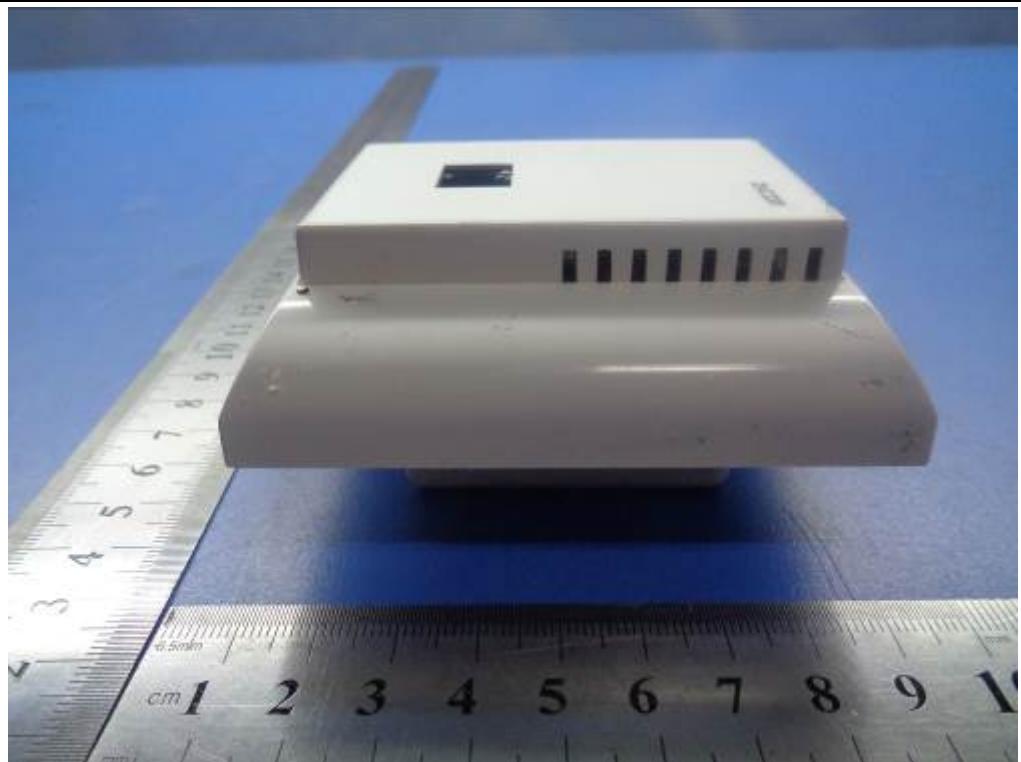



EUT – Left View

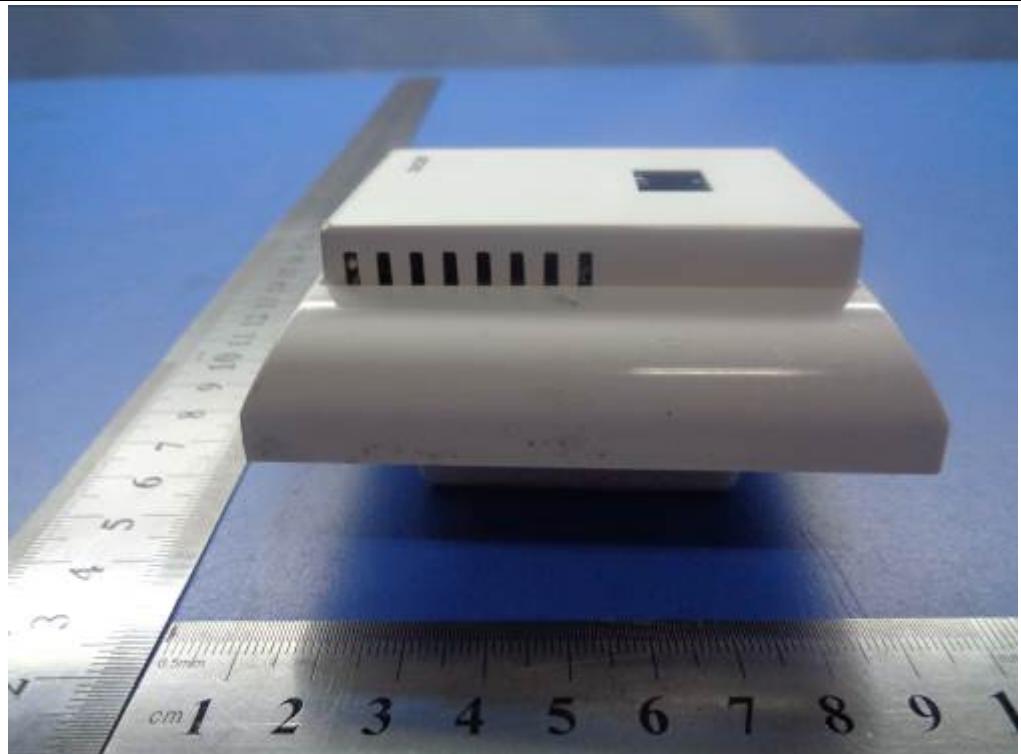


EUT – Right View

Annex B.ii. Photograph: EUT Internal Photo

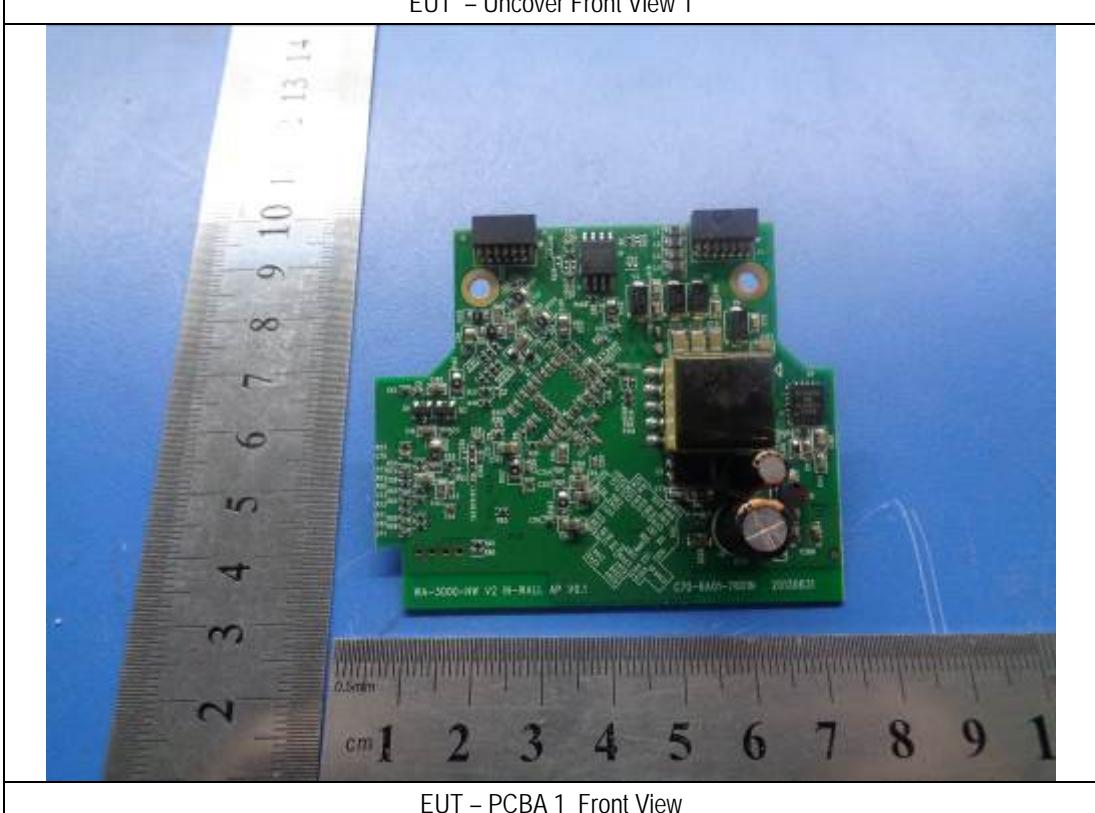


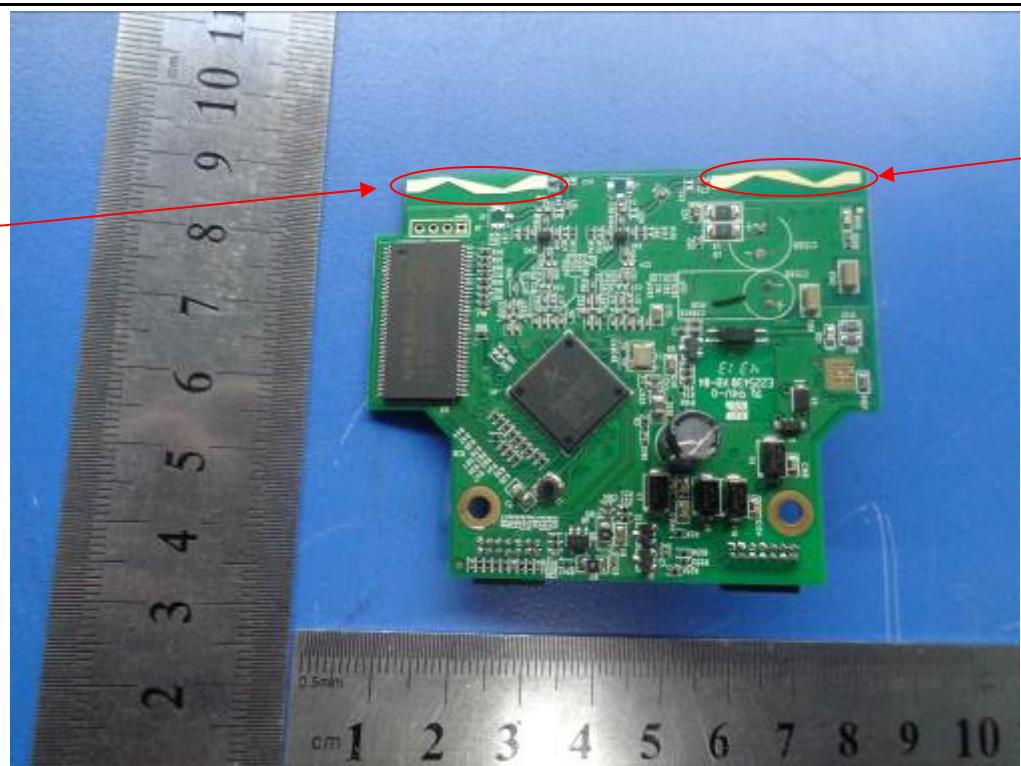

EUT - PCBA 1 Rear View

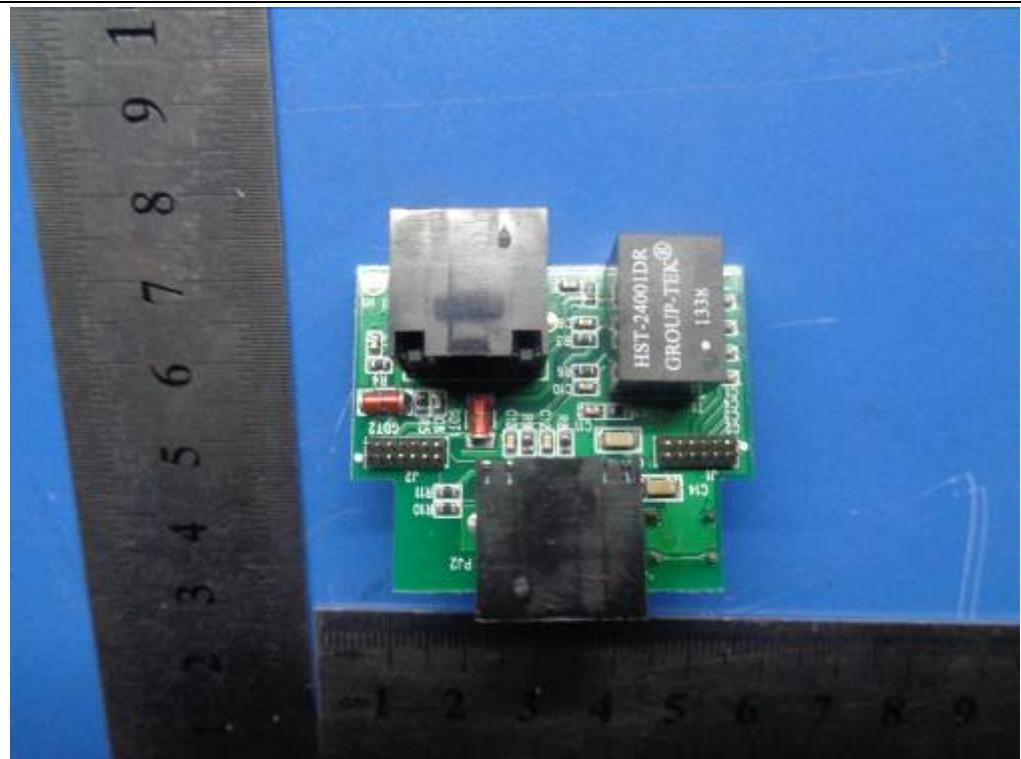

EUT - PCBA 2 Front View

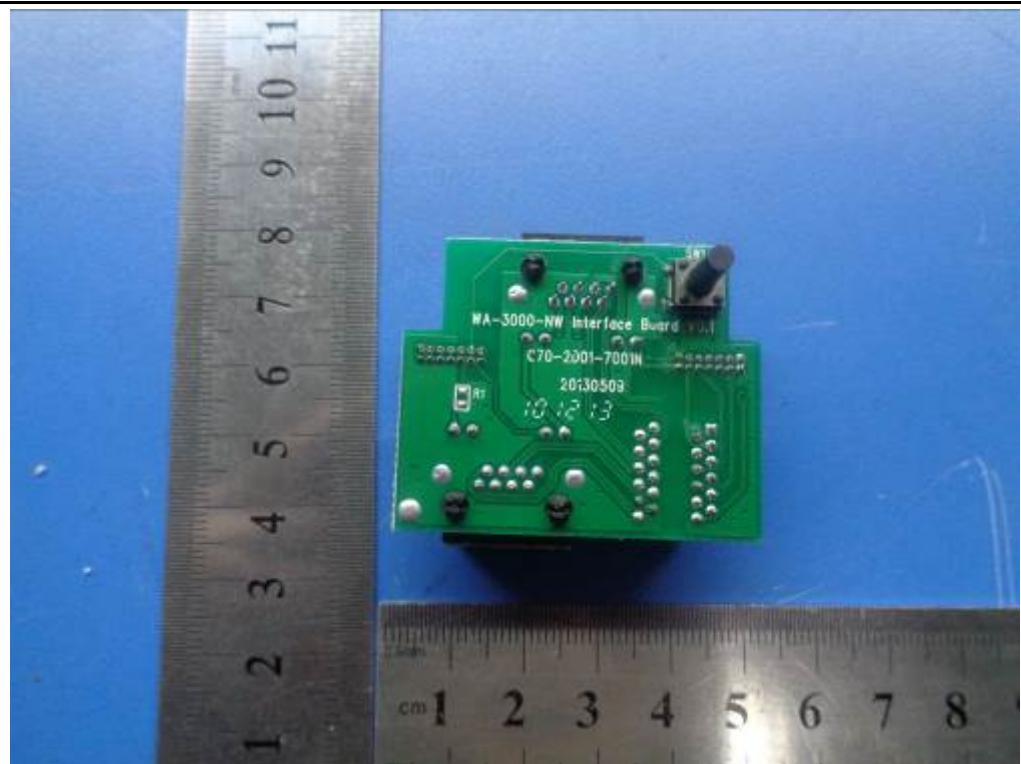


EUT – PCBA 2 Rear View

Annex B.iii. Photograph: Test Setup Photo




Conducted Emissions Setup Front View

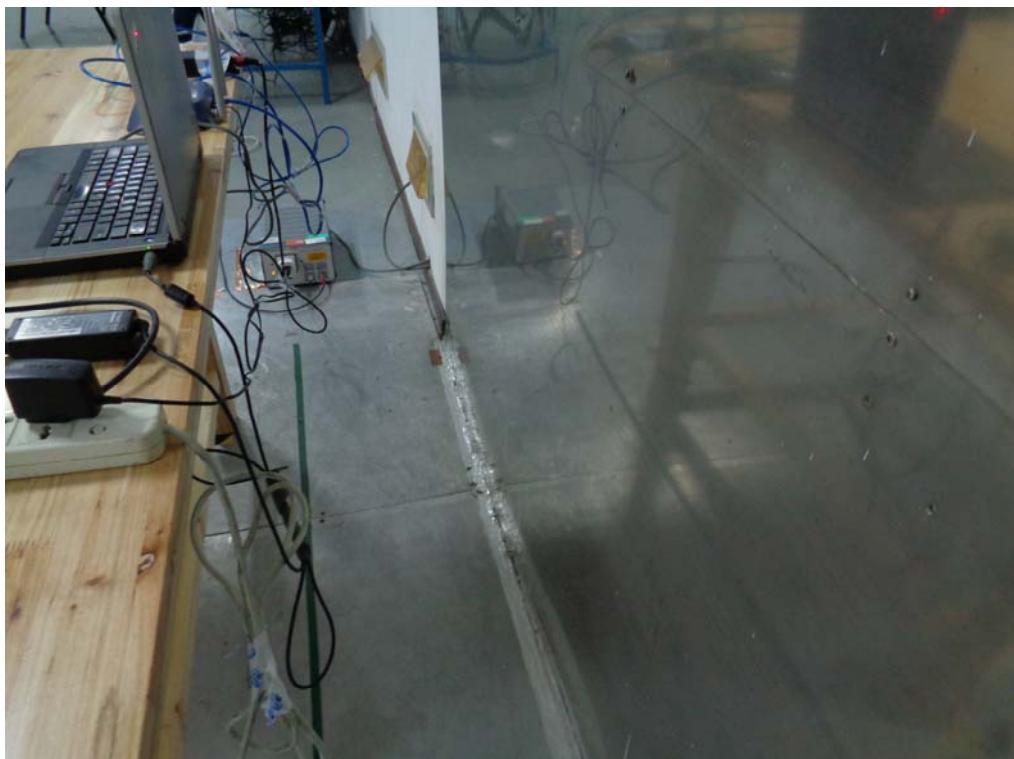


Conducted Emissions Setup Side View

Test Report No.	14021236-FCC-E
Page	21 of 26

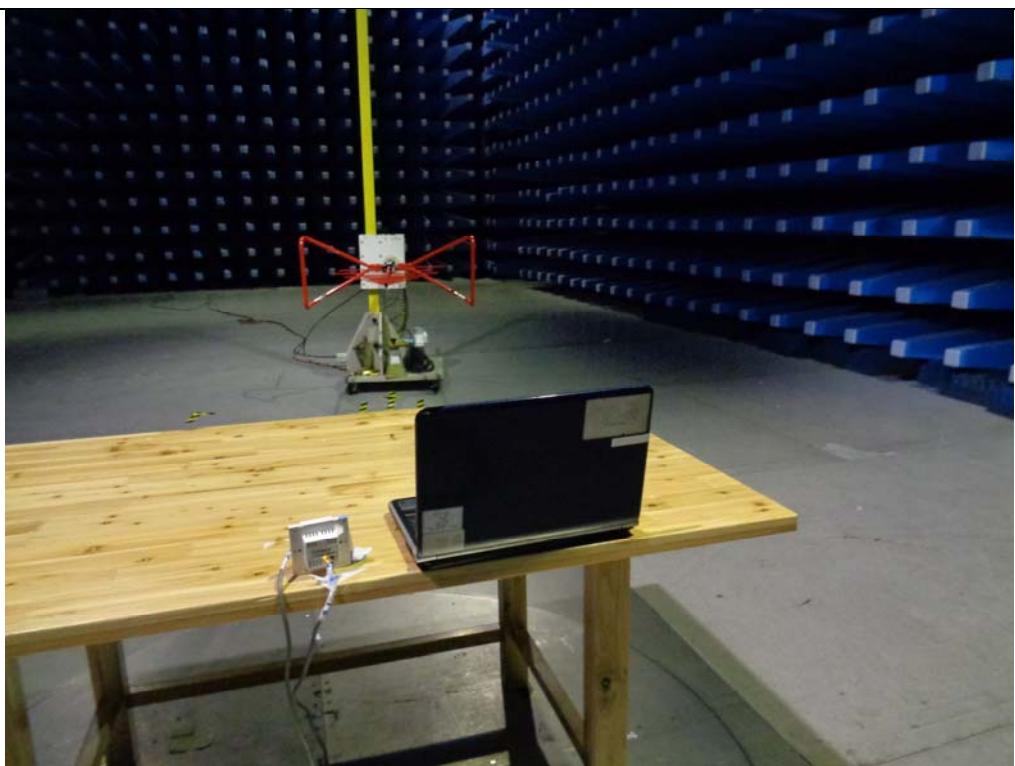

Radiated Emissions Setup Below 1GHz Front View

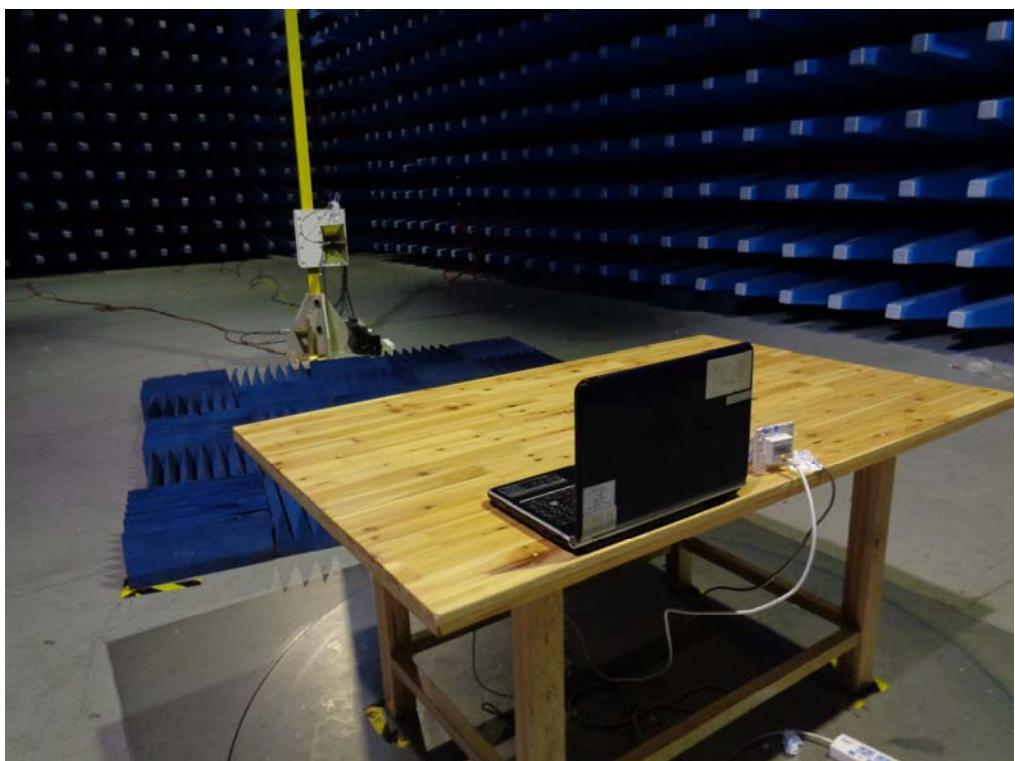


Radiated Emissions Setup Above 1GHz Front View


## Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

### Annex C.i. TEST SET UP BLOCK

Block Configuration Diagram for Conducted Emissions

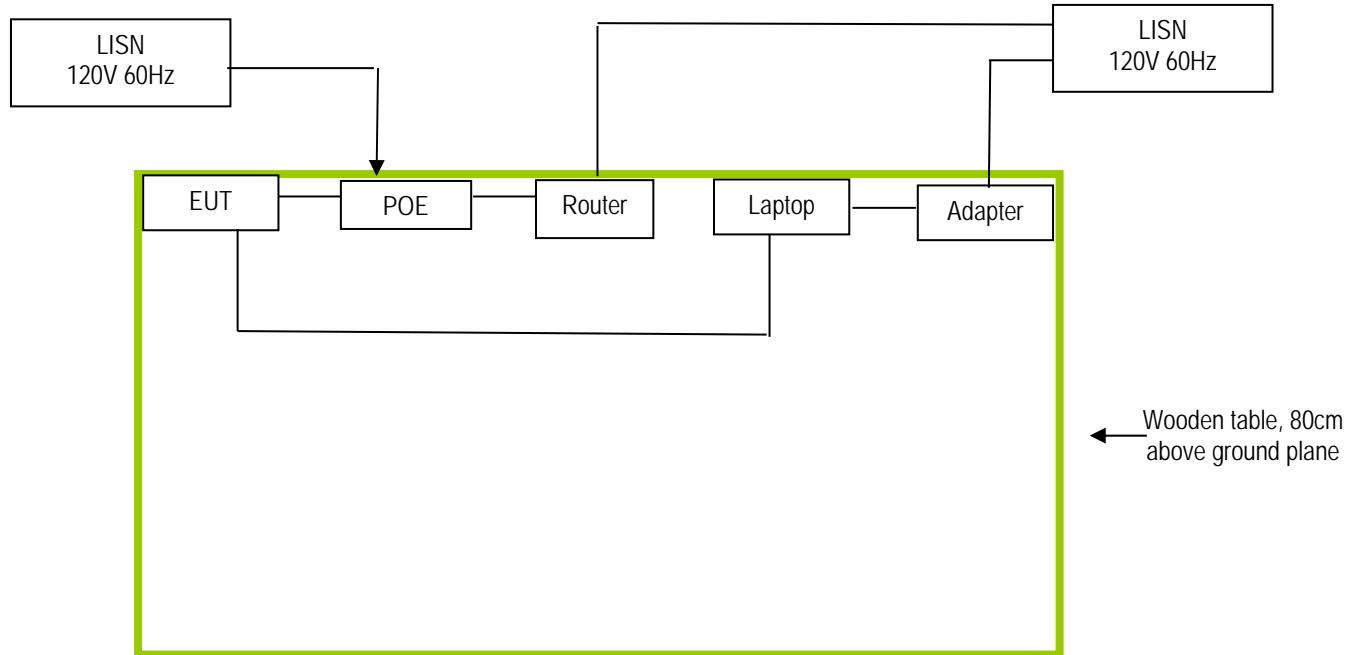

### Block Configuration Diagram for Radiated Emissions

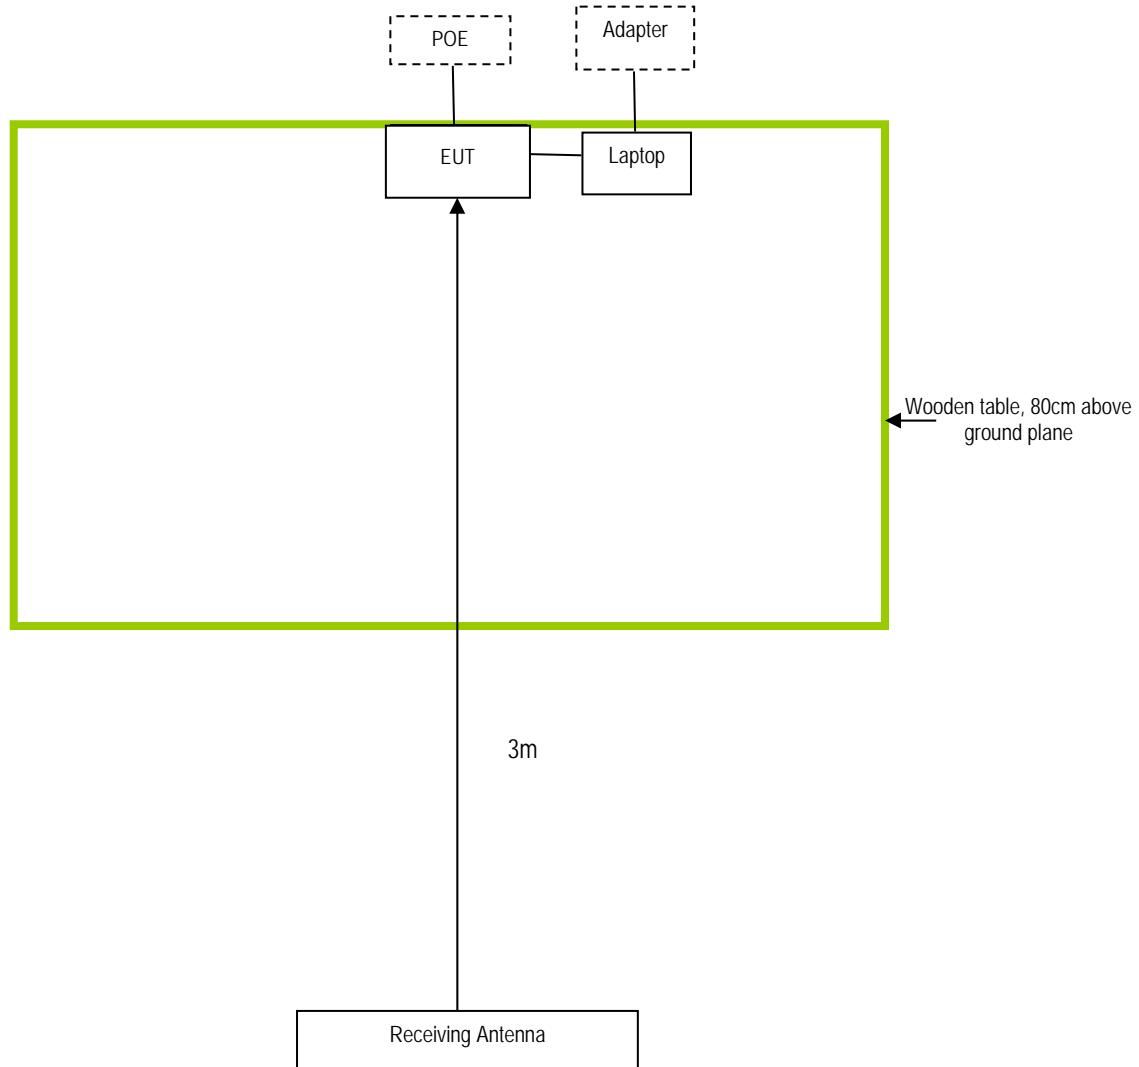

---

**Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION**

The following is a description of supporting equipment and details of cables used with the EUT.

Equipment Description	Model	Calibration Date
Gateway Laptop	MS2288 & LXWHF02013951C3CA92200	N/A
Router	N/A	N/A

Test Report No.	14021236-FCC-E
Page	25 of 26

## Annex D. User Manual / Block Diagram / Schematics / Partlist

Please see Attachment

Test Report No.	14021236-FCC-E
Page	26 of 26

## Annex E. DECLARATION OF SIMILARITY

N/A