



STC Test Report

Date : 2008-08-30

Page 1 of 20

No. : MH182467

Applicant (STD003):

ShenZhen Zhongherong Electric Technology Co., Ltd.
Floor1-3 No. 28 Building Northern Yongfa Tech Area Heyi
Village, Jinxiu Road Shajing District Baoan Shenzhen, China

Manufacturer:

ShenZhen Zhongherong Electric Technology Co., Ltd.
Floor1-3 No. 28 Building Northern Yongfa Tech Area Heyi
Village, Jinxiu Road Shajing District Baoan Shenzhen, China

Description of Samples:

Product: 2.4G Transmitter
Brand Name: ESKY
Model Number: EK2-0406G
FCC ID: WIC-SZESKY003

Date Samples Received: 2008-08-06

Date Tested: 2008-08-07

Investigation Requested:

Perform ElectroMagnetic Interference measurement in
accordance with FCC 47CFR [Codes of Federal Regulations]
Part 15: 2007 and ANSI C63.4:2003 for FCC Certification.

Conclusions:

The submitted product COMPLIED with the requirements of
Federal Communications Commission [FCC] Rules and
Regulations Part 15. The tests were performed in accordance
with the standards described above and on Section 2.2 in this
Test Report.

Remarks:

Dr. LEE Kam Chuen,
ElectroMagnetic Compatibility Department
For and on behalf of
The Hong Kong Standards and Testing Centre Ltd.

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



STC Test Report

Date : 2008-08-30

Page 2 of 20

No. : MH182467

CONTENT:

Cover	Page 1 of 20
Content	Page 2-3 of 20
1.0 <u>General Details</u>	
1.1 Test Laboratory	Page 4 of 20
1.2 Applicant Details	Page 4 of 20
Applicant	
Manufacturer	
1.3 Equipment Under Test [EUT]	Page 5 of 20
Description of EUT operation	
1.4 Date of Order	Page 5 of 20
1.5 Submitted Sample	Page 5 of 20
1.6 Test Duration	Page 5 of 20
1.7 Country of Origin	Page 5 of 20
2.0 <u>Technical Details</u>	
2.1 Investigations Requested	Page 6 of 20
2.2 Test Standards and Results Summary	Page 6 of 20
3.0 <u>Test Results</u>	
3.1 Radiated Emission	Page 7-14 of 20



STC Test Report

Date : 2008-08-30

Page 3 of 20

No. : MH182467

Appendix A

List of Measurement Equipment

Page 15 of 20

Appendix B

Duty Cycle Correction During 100 msec

Page 16-17 of 20

Appendix C

Photographs

Page 18-20 of 20

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date : 2008-08-30

Page 4 of 20

No. : MH182467

1.0 General Details

1.1 Test Laboratory

The Hong Kong Standards and Testing Centre Ltd.
EMC Laboratory
10 Dai Wang Street, Taipo Industrial Estate
New Territories, Hong Kong

1.2 Applicant Details

Applicant

ShenZhen Zhongherong Electric Technology Co., Ltd.
Floor1-3 No. 28 Building Northern Yongfa Tech Area Heyi Village, Jinxiu Road Shajing
District Baoan Shenzhen, China

Manufacturer

ShenZhen Zhongherong Electric Technology Co., Ltd.
Floor1-3 No. 28 Building Northern Yongfa Tech Area Heyi Village, Jinxiu Road Shajing
District Baoan Shenzhen, China

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



STC Test Report

Date : 2008-08-30

Page 5 of 20

No. : MH182467

1.3 Equipment Under Test [EUT]

Description of Sample

Product: 2.4G Transmitter
Manufacturer: ShenZhen Zhongherong Electric Technology Co., Ltd.
Brand Name: ESKY
Model Number: EK2-0406G
Input Voltage: 12Vd.c. ("AA" size battery x 8)

1.3.1 Description of EUT Operation

The Equipment Under Test (EUT) is a ShenZhen Zhongherong Electric Technology Co., Ltd., 2.4G Transmitter, the transmission signal is Fixed, point-to-point operation with channel frequency range 2.410-2.473 GHz.

1.4 Date of Order

2008-08-06

1.5 Submitted Sample(s):

1 Sample

1.6 Test Duration

2008-08-07

1.7 Country of Origin

China

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



STC Test Report

Date : 2008-08-30

Page 6 of 20

No. : MH182467

2.0 Technical Details

2.1 Investigations Requested

Perform Electromagnetic Interference measurements in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2007 Regulations and ANSI C63.4:2003 for FCC Certification.

2.2 Test Standards and Results Summary Tables

EMISSION Results Summary						
Test Condition	Test Requirement	Test Method	Class / Severity	Test Result		
				Pass	Fail	N/A
Field Strength of Fundamental & Harmonics Emissions	FCC 47CFR 15.249	ANSI C63.4:2003	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Radiated Emissions	FCC 47CFR 15.209	ANSI C63.4:2003	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Note: N/A - Not Applicable

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



STC Test Report

Date : 2008-08-30

Page 7 of 20

No. : MH182467

3.0 Test Results

3.1 Emission

3.1.1 Radiated Emissions


Test Requirement: FCC 47CFR 15.249
Test Method: ANSI C63.4:2003
Test Date: 2008-08-07
Mode of Operation: Communication mode (Tx unit)

Test Method:

The sample was placed 0.8m above the ground plane of semi-anechoic Chamber*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

* Semi-anechoic chamber located on the G/F of The Hong Kong Standards and Testing Centre Ltd. with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 607756.

Test Setup:

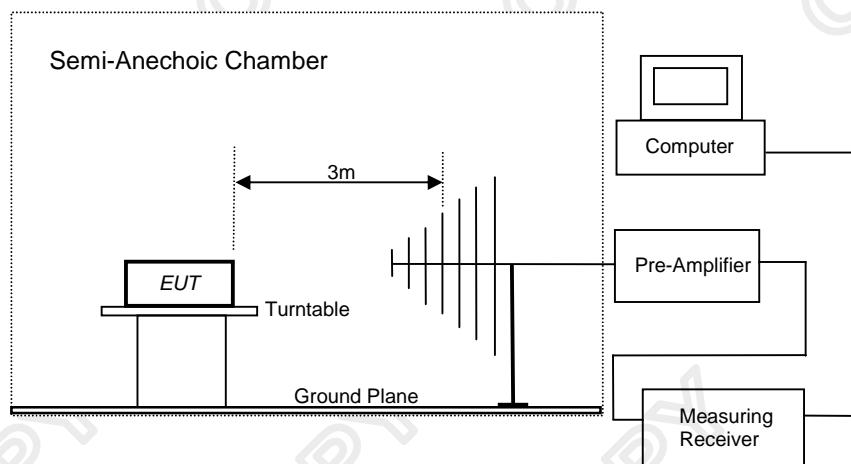

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



STC Test Report

Date : 2008-08-30

Page 8 of 20

No. : MH182467

Limits for Field Strength of Fundamental & Harmonics Emissions [FCC 47CFR 15.249]:

Frequency Range of Fundamental	Field Strength of Fundamental Emission [millivolts/meter]	Field Strength of Harmonics Emission [microvolts/meter]
902-928 MHz	50	500
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24-24.25 GHz	250	2500

Results of Communication mode (Tx, Lowest Channel Frequency): Pass

Field Strength of Fundamental Emissions						
Peak Value						
Frequency MHz	Measured Level @3m dB μ V/m	Correction Factor dB μ V/m	Field Strength dB μ V/m	Field Strength μ V/m	Limit @3m μ V/m	E-Field Polarity
2410.8	59.9	34.9	94.8	54,954.1	500,000	Horizontal
* 4817.6	29.1	42.1	71.2	3,630.8	5,000	Horizontal
7232.4					50,000	Vertical
9643.2					50,000	Vertical
* 12054.0					5,000	Vertical
14464.8					50,000	Vertical
16875.6					50,000	Vertical
* 19286.4					5,000	Vertical
21697.2					50,000	Vertical
24108.0					50,000	Vertical

**Emissions detected are more than
20 dB below the FCC Limits**

Field Strength of Fundamental Emissions						
Average Value						
Frequency MHz	Measured Level @3m dB μ V/m	Correction Factor dB μ V/m	Field Strength dB μ V/m	Field Strength μ V/m	Limit @3m μ V/m	E-Field Polarity
2410.8	39.9	34.9	74.8	5,495.4	50,000	Horizontal
* 4817.6	9.1	42.1	51.2	363.1	500	Horizontal

Remarks:

*: Denotes restricted band of operation.

Measurements were made using a peak detector. Any emission less than 1000 MHz and falling within the restricted bands of FCC Rules Part 15 Section 15.205 and the limits of FCC Rules Part 15 Section 15.209 were applied.

No further spurious emissions found between lowest internal frequency and 30MHz.

Calculated measurement uncertainty : 30MHz to 1GHz 5.2dB
1GHz to 18GHz 5.1dB

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



STC Test Report

Date : 2008-08-30

Page 9 of 20

No. : MH182467

Limits for Field Strength of Fundamental & Harmonics Emissions [FCC 47CFR 15.249]:

Frequency Range of Fundamental	Field Strength of Fundamental Emission [millivolts/meter]	Field Strength of Harmonics Emission [microvolts/meter]
902-928 MHz	50	500
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24-24.25 GHz	250	2500

Results of Communication mode (Tx, Middle Channel Frequency): Pass

Field Strength of Fundamental Emissions						
Peak Value						
Frequency MHz	Measured Level @3m dB μ V/m	Correction Factor dB μ V/m	Field Strength dB μ V/m	Field Strength μ V/m	Limit @3m μ V/m	E-Field Polarity
2440.8	59.9	34.9	94.8	54,954.1	500,000	Horizontal
* 4817.8	27.3	42.1	69.4	2,951.2	5,000	Horizontal
7322.4					50,000	Vertical
9763.2					50,000	Vertical
* 12204.0					5,000	Vertical
14644.8					50,000	Vertical
17085.6					50,000	Vertical
* 19526.4					5,000	Vertical
21967.2					50,000	Vertical
24408.0					50,000	Vertical

**Emissions detected are more than
20 dB below the FCC Limits**

Field Strength of Fundamental Emissions						
Average Value						
Frequency MHz	Measured Level @3m dB μ V/m	Correction Factor dB μ V/m	Field Strength dB μ V/m	Field Strength μ V/m	Limit @3m μ V/m	E-Field Polarity
2440.8	39.7	34.9	74.6	5,370.3	50,000	Horizontal
* 4817.8	7.3	42.1	49.4	295.1	500	Horizontal

Remarks:

*: Denotes restricted band of operation.

Measurements were made using a peak detector. Any emission less than 1000 MHz and falling within the restricted bands of FCC Rules Part 15 Section 15.205 and the limits of FCC Rules Part 15 Section 15.209 were applied.

No further spurious emissions found between lowest internal frequency and 30MHz.

Calculated measurement uncertainty : 30MHz to 1GHz 5.2dB
1GHz to 18GHz 5.1dB

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



STC Test Report

Date : 2008-08-30

Page 10 of 20

No. : MH182467

Limits for Field Strength of Fundamental & Harmonics Emissions [FCC 47CFR 15.249]:

Frequency Range of Fundamental	Field Strength of Fundamental Emission [millivolts/meter]	Field Strength of Harmonics Emission [microvolts/meter]
902-928 MHz	50	500
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24-24.25 GHz	250	2500

Results of Communication mode (Tx, Highest Channel Frequency): Pass

Field Strength of Fundamental Emissions						
Peak Value						
Frequency MHz	Measured Level @3m dB μ V/m	Correction Factor dB μ V/m	Field Strength dB μ V/m	Field Strength μ V/m	Limit @3m μ V/m	E-Field Polarity
2473.1	59.6	35.0	94.6	53,703.2	500,000	Horizontal
* 4937.8	26.4	42.3	68.7	2,722.7	5,000	Horizontal
7419.2					50,000	Vertical
9892.3					50,000	Vertical
* 12365.4					5,000	Vertical
14838.5					50,000	Vertical
17311.6					50,000	Vertical
* 19784.6					5,000	Vertical
22257.7					50,000	Vertical
24730.8					50,000	Vertical

**Emissions detected are more than
20 dB below the FCC Limits**

Field Strength of Fundamental Emissions						
Average Value						
Frequency MHz	Measured Level @3m dB μ V/m	Correction Factor dB μ V/m	Field Strength dB μ V/m	Field Strength μ V/m	Limit @3m μ V/m	E-Field Polarity
2473.1	39.9	35.0	74.9	5,559.0	50,000	Horizontal
* 4937.8	6.4	42.3	48.7	272.3	500	Horizontal

Remarks:

*: Denotes restricted band of operation.

Measurements were made using a peak detector. Any emission less than 1000 MHz and falling within the restricted bands of FCC Rules Part 15 Section 15.205 and the limits of FCC Rules Part 15 Section 15.209 were applied.

No further spurious emissions found between lowest internal frequency and 30MHz.

Calculated measurement uncertainty : 30MHz to 1GHz 5.2dB
1GHz to 18GHz 5.1dB

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



STC Test Report



Date : 2008-08-30

Page 11 of 20

No. : MH182467

Lowest Channel Frequency: 2.410187GHz

BW=1.170MHz

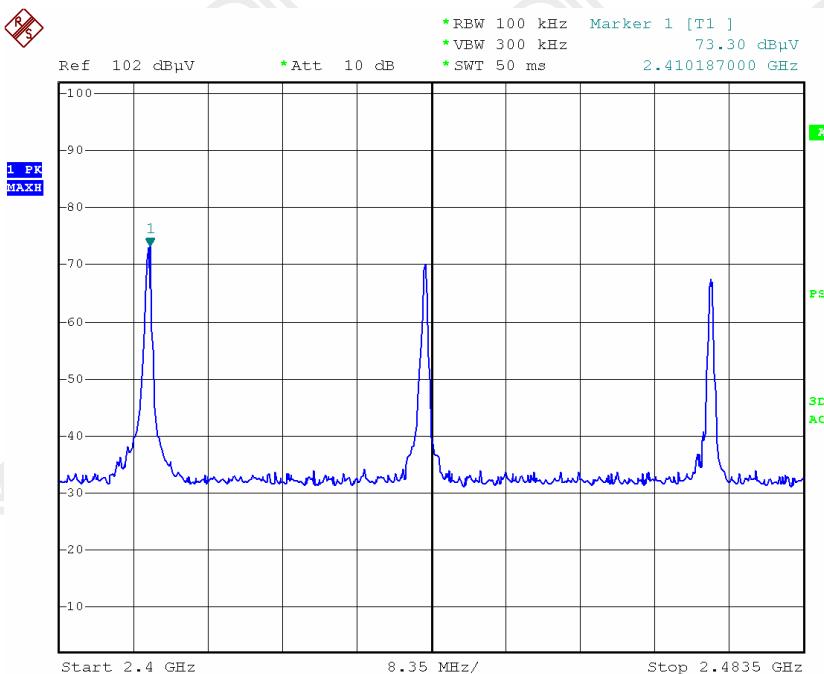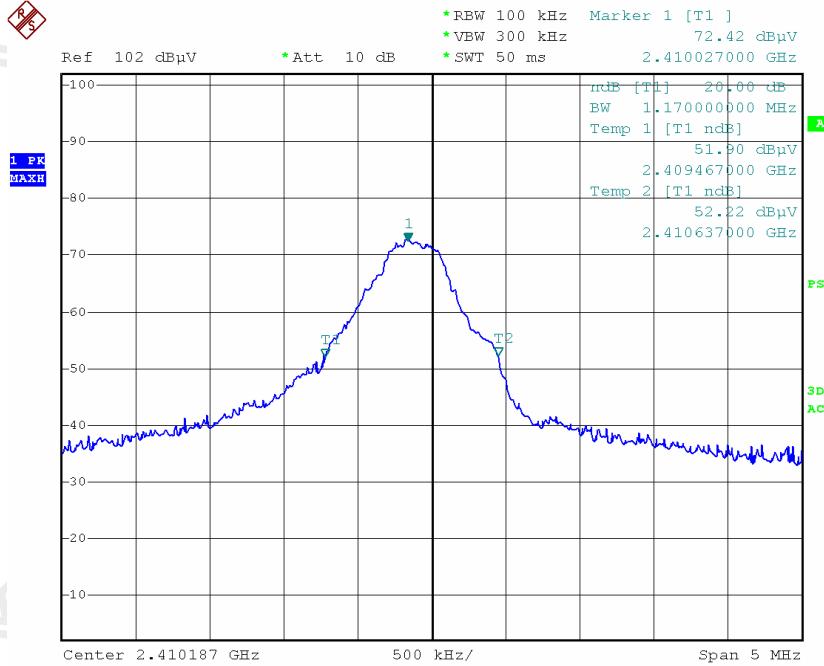

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report



Date : 2008-08-30

Page 12 of 20

No. : MH182467

Middle Channel Frequency: 2.441082GHz

BW=1.200MHz

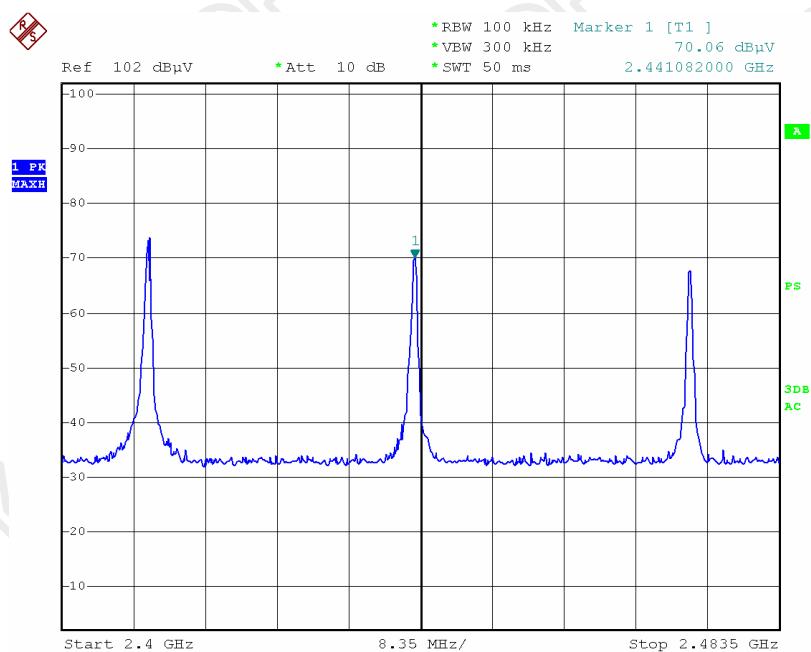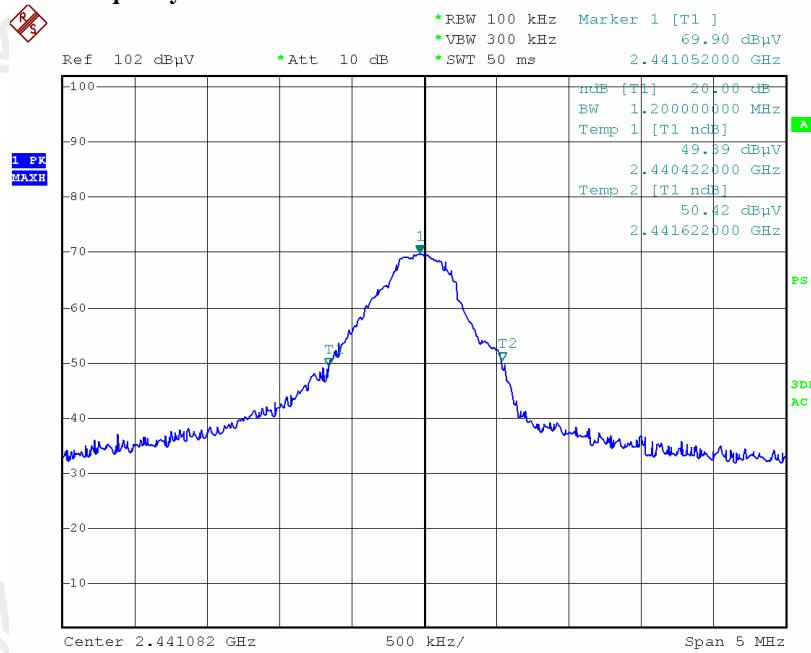

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report



Date : 2008-08-30

Page 13 of 20

No. : MH182467

Highest Channel Frequency: 2.473086GHz

BW=1.120MHz

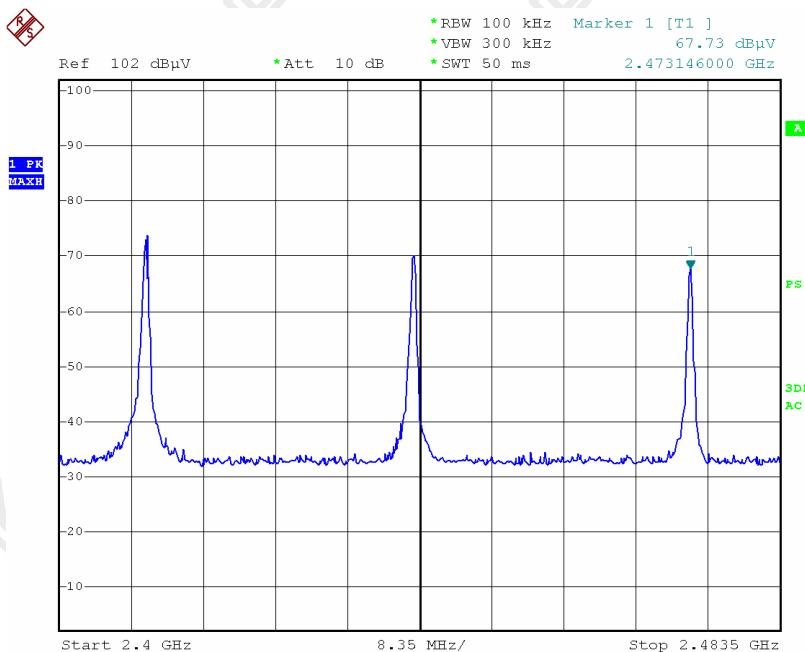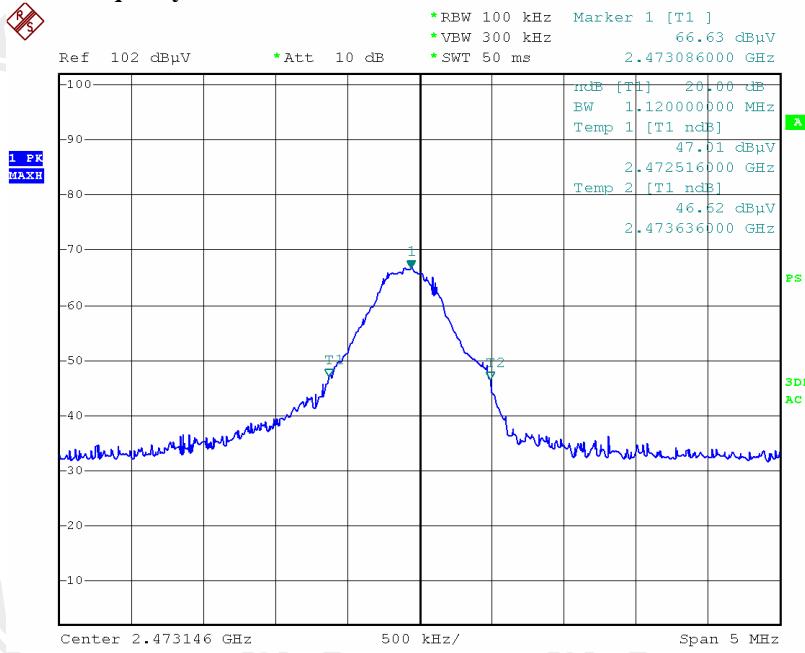

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date : 2008-08-30

Page 14 of 20

No. : MH182467

Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:

Frequency [MHz]	Field Strength [microvolts/meter]	Measurement Distance [meter]
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

Radiated Emissions Peak					
Emission Frequency MHz	E-Field Polarity	Level @3m dB μ V/m	Limit @3m dB μ V/m	Level @3m μ V/m	Limit @3m μ V/m
Emissions detected are more than 20 dB below the FCC Limits					

Remarks:

No further spurious emissions found between lowest internal frequency and 30MHz.

Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty : 30MHz to 1GHz 5.2dB
1GHz to 18GHz 5.1dB

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



STC Test Report

Date : 2008-08-30

Page 15 of 20

No. : MH182467

Appendix A

List of Measurement Equipment

Radiated Emission

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL	DUE CAL
EM020	HORN ANTENNA	EMCO	3115	4032	2006/07/11	2009/07/11
EM215	MULTIDEVICE CONTROLER	EMCO	2090	00024676	N/A	N/A
EM216	MINI MAST SYSTEM	EMCO	2075	00026842	N/A	N/A
EM217	ELECTRIC POWERED TURNTABLE	EMCO	2088	00029144	N/A	N/A
EM218	ANECHOIC CHAMBER	ETS-Linggren	FACT-3	--	2006/05/02	2009/05/02
EM174	BICONILOG ANTENNA	EMCO	3142C	00029071	2008/01/24	2009/01/24
EM181	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESIB7	100072	2008/06/16	2009/06/16
EM022	LOOP ANTENNA	EMCO	6502	1189-2424	2006/07/26	2009/07/26

Remarks:-

CM Corrective Maintenance
N/A Not Applicable or Not Available
TBD To Be Determined

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



STC Test Report

Date : 2008-08-30

Page 16 of 20

No. : MH182467

Appendix B

Duty Cycle Correction During 100msec


Each function key sends a different series of characters, but each packet period (18.6msec) never exceeds a series of 4 long (0.24msec) or 4 short (0.2msec) pulses. Assuming any combination of short and long pulses may be obtained due to encoding the worst case transmit duty cycle would be considered
4x0.24msec per 18.6msec=0.052% duty cycle. Figure A through C show the characteristics of the pulses train for one of these functions.

Remarks:

Duty Cycle Correction = $20\log(0.052) = -25.7\text{dB}$
(-20dB used as field strength of fundamental emissions calculation)

The following figures [Figure A to Figure C] showed the characteristics of the pulse train for one of these functions.

Figure A [Pulse Train]

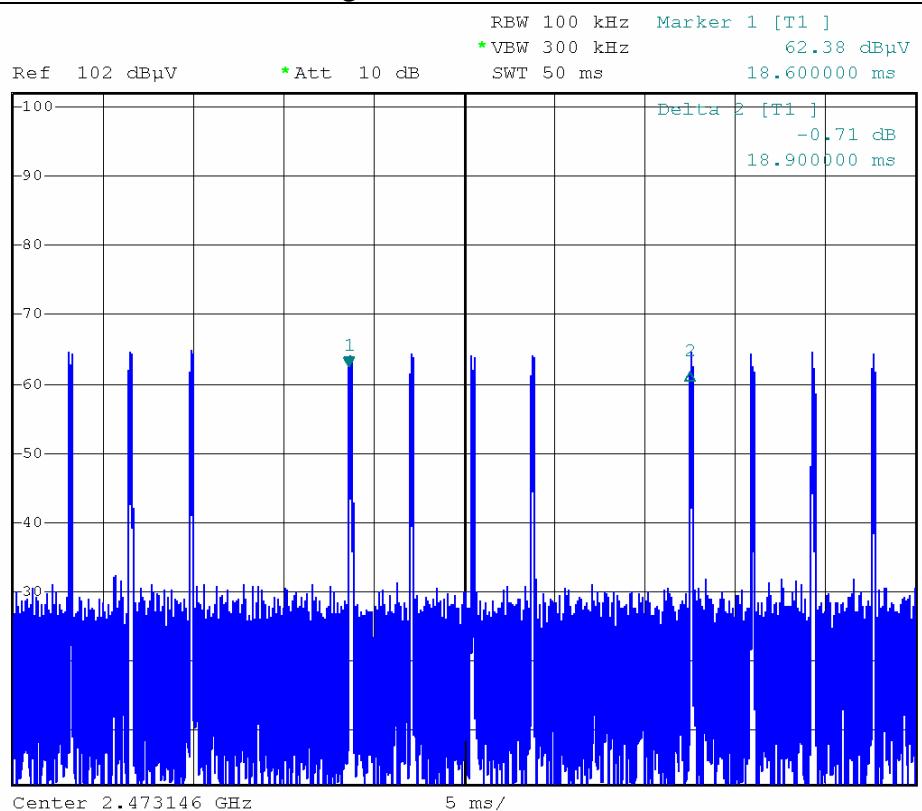




STC Test Report

Date : 2008-08-30

Page 17 of 20

No. : MH182467

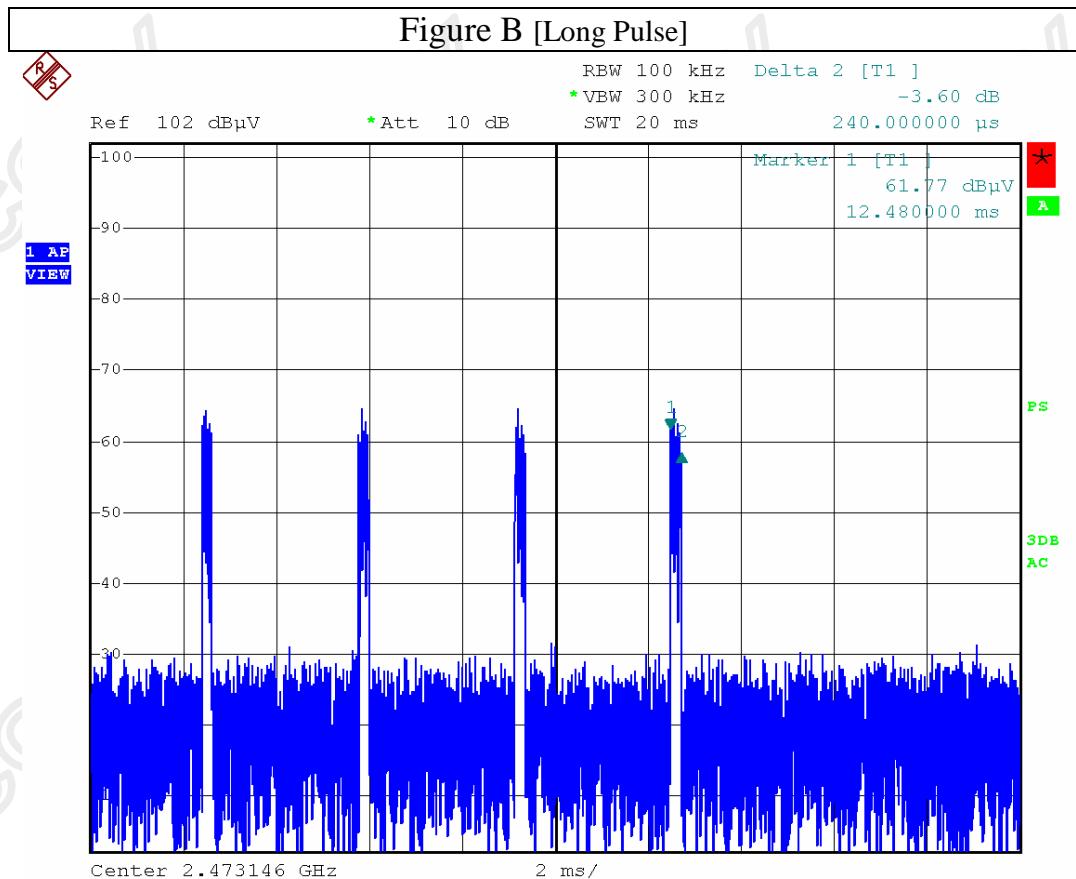




STC Test Report

Date : 2008-08-30

Page 18 of 20

No. : MH182467

Figure C [Short Pulse]

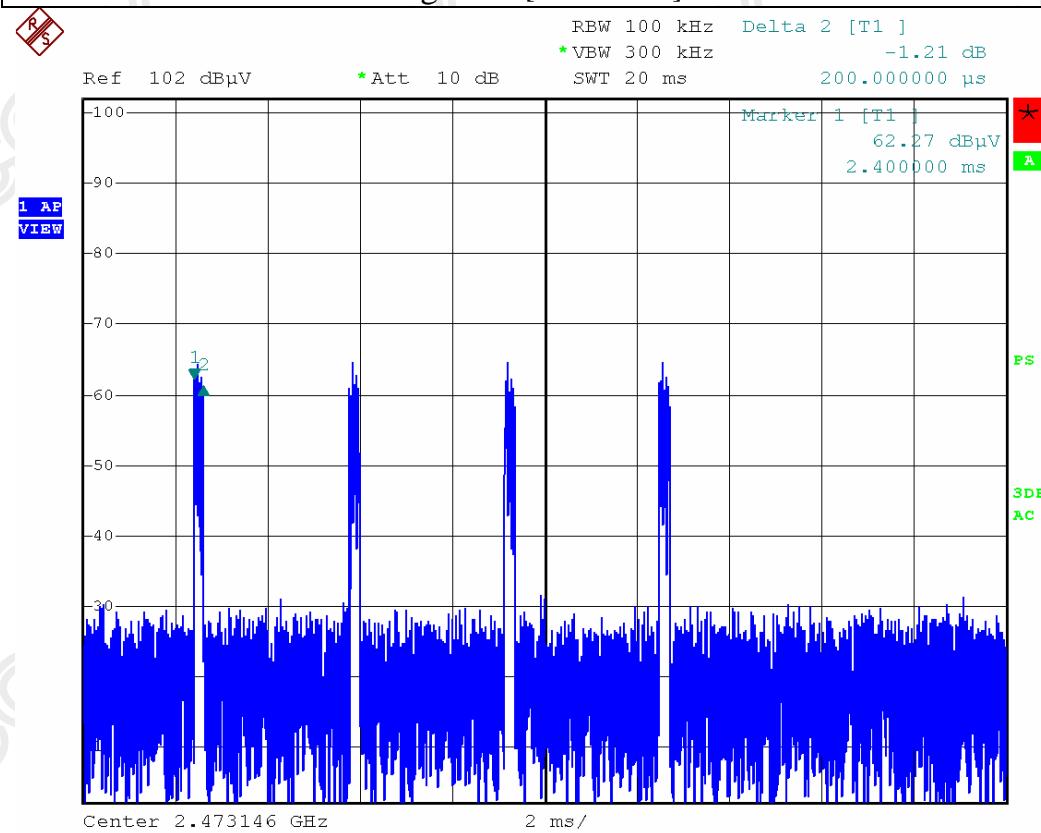

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date : 2008-08-30

Page 19 of 20

No. : MH182467

Appendix C

Photographs of EUT

Front View of the product



Rear View of the product



Inner Circuit Top View



Inner Circuit Bottom View



The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date : 2008-08-30

Page 20 of 20

No. : MH182467

Photographs of EUT

Measurement of Radiated Emission Test Set Up



***** End of Test Report *****

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage