



FCC PART 15.407 TEST REPORT

For

JUPITER TECHNOLOGY (WUXI) CO., LTD.

No.13 Minjiang Road, Wuxi StateHigh & New Technology Industry Development Zone,
Wuxi, Jiangsu, China

FCC ID: WIOWS3001

Report Type: Product Type:

Original Report WHDI 5.8 GHz WIRELESS TV

Test Engineer: Felix Li

Report Number: RSZ110727001-00B

Report Date: 2011-09-08

Merry Zhao

Reviewed By: EMC Engineer

Bay Area Compliance Laboratories Corp. (Shenzhen)

meny. Than

6/F, the 3rd Phase of WanLi Industrial Building,

Test Laboratory: ShiHua Road, FuTian Free Trade Zone

Shenzhen, Guangdong, China

Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP*, or any agency of the Federal Government.

* This report contains data that are not covered by the NVLAP accreditation and are marked with an asterisk "★" (Rev.2)

TABLE OF CONTENTS

GENERAL INFORMATION	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
Objective	
RELATED SUBMITTAL(S)/GRANT(S)	
TEST METHODOLOGY	
TEST FACILITY	5
SYSTEM TEST CONFIGURATION	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT Exercise Software	
EQUIPMENT MODIFICATIONS	6
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS	
EXTERNAL I/O CABLE	
BLOCK DIAGRAM OF TEST SETUP	
SUMMARY OF TEST RESULTS	7
FCC §15.407 (f) & §2.1093 – RF EXPOSURE EVALUATION	8
APPLICABLE STANDARD	8
FCC §15.203 – ANTENNA REQUIREMENT	9
APPLICABLE STANDARD	9
Antenna Connector Construction	9
FCC §15.407(b)(6) & §15.207(a) – AC LINE CONDUCTED EMISSIONS	10
APPLICABLE STANDARD	10
MEASUREMENT UNCERTAINTY	10
EUT Setup	10
EMI TEST RECEIVER SETUP	
TEST EQUIPMENT LIST AND DETAILS	
TEST PROCEDURE	
Test Results Summary	
TEST DATA	11
FCC §15.209, §15.205 & §15.407(b) (1) (6) (7) – UNDESIRABLE EMISSION & RESTRICTED BANDS	
APPLICABLE STANDARD	
MEASUREMENT UNCERTAINTY	
EUT SETUP	
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	
TEST PROCEDURE	
CORRECTED AMPLITUDE & MARGIN CALCULATION	
TEST RESULTS SUMMARY	
TEST DATA	
CONDUCTED SPURIOUS EMISSION AT ANTENNA PORT.	
TEST DATA	
FCC §15.407(a) (1) – 26 dB OCCUPIED BANDWIDTH	
APPLICABLE STANDARD	
TEST EQUIPMENT LIST AND DETAILS.	
TEST PROCEDURE	

TEST DATA	23
FCC §15.407(a) (1) – CONDUCTED TRANSMITTER OUTPUT POWER	26
APPLICABLE STANDARD	26
TEST EQUIPMENT LIST AND DETAILS.	
TEST PROCEDURE	
TEST DATA	
FCC §15.407(a) (1) (5) - POWER SPECTRAL DENSITY	30
APPLICABLE STANDARD	30
TEST PROCEDURE	
TEST EQUIPMENT LIST AND DETAILS.	30
TEST DATA	
FCC §15.407(a) (6) – PEAK EXCURSION RATIO	34
APPLICABLE STANDARD	34
TEST PROCEDURE	
TEST EQUIPMENT LIST AND DETAILS.	
TEST DATA	
FCC §407(g) - FREQUENCY STABILITY	37
APPLICABLE STANDARDS.	37
TEST PROCEDURE	
TEST EQUIPMENT LIST AND DETAILS.	
TEST DATA	38

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The JUPITER TECHNOLOGY (WUXI) CO., LTD's product, model number: WS3001 (FCC ID: WIOWS3001) ("EUT") in this report is a transmitter of WHDI 5.8 GHz WIRELESS TV Tranceiver, which was measured approximately: 8.0 cm (L) x 3.0 cm (W) x 1.6 cm (H), rated input voltage: DC 5V from USB port.

Report No.: RSZ110727001-00B

* All measurement and test data in this report was gathered from production sample serial number: 1107114 (Assigned by Shenzhen BACL). The EUT was received on 2011-07-27.

Objective

This Type approval report is prepared on behalf of *JUPITER TECHNOLOGY (WUXI) CO., LTD* in accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart E, and section 15.203, 15.205, 15.207, 15.209 and 15.407 rules.

Related Submittal(s)/Grant(s)

FCC Part 15.247 submission with FCC ID: WIOWS3001 Receiver part submission with FCC ID: WIOUS3779

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

FCC Part 15.407 Page 4 of 38

Test Facility


The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Report No.: RSZ110727001-00B

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Shenzhen) is an ISO/IEC 17025 accredited laboratory, and is accredited by National Voluntary Laboratory Accredited Program (Lab Code 200707-0).



The current scope of accreditations can be found at http://ts.nist.gov/Standards/scopes/2007070.htm

FCC Part 15.407 Page 5 of 38

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode, which is provided by manufacture.

Report No.: RSZ110727001-00B

The operating frequency band is 5150-5250 MHz; the test frequency is 5190 MHz and 5230 MHz.

EUT Exercise Software

Test software: APPcom&Debug View

Equipment Modifications

No modification was made to the unit tested.


Local Support Equipment List and Details

Manufacturer	Manufacturer Description		Serial Number
IBM	Laptop	T40	N/A

External I/O Cable

Cable Description	Length (m)	From Port	То
Unshielded Undetachable USB Cable	0.5	Laptop	EUT

Block Diagram of Test Setup

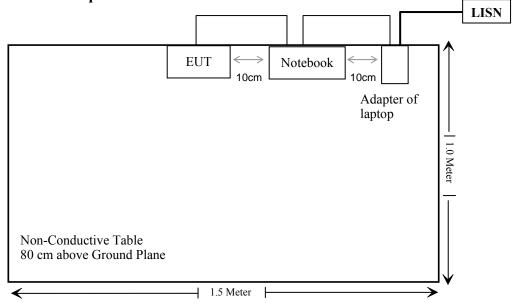

FCC Part 15.407 Page 6 of 38

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.407 (f), §2.1093, §1.1307(b)(1)	RF Exposure Evaluation	Compliance
§15.203	Antenna Requirement	Compliance
§15.407(b)(6) & §15.207(a)	Conducted Emissions	Compliance
§15.205, §15.209 & §15.407(b) (1),(6),(7)	Undesirable Emission& Restricted Bands	Compliance
§15.407(a) (1)	26 dB Bandwidth	Compliance
§15.407(a)(1),	Conducted Transmitter Output Power	Compliance
§15.407 (a)(1),(5)	Power Spectral Density	Compliance
§15.407(a)(6)	Peak Excursion Ratio	Compliance
§15.407(g)	Frequency Stability	Compliance

Report No.: RSZ110727001-00B

FCC Part 15.407 Page 7 of 38

FCC §15.407 (f) & §2.1093 – RF EXPOSURE EVALUATION

Applicable Standard

According to FCC §15.407(f) and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

Report No.: RSZ110727001-00B

According to KDB 447498, 1) c), unless excluded by specific FCC test procedures, portable device with output power $> 60/f_{\text{(GHz)}}$ mW shall include SAR data for equipment approval.

Result:

Max Peak output power, Antenna Gain: 2.0 dBi

EIRP = 7.76 dBm + 2dBi = 9.76 dBm = 9.46 mW

 $60/f_{\text{GHz}} = 60/5.190 = 11.56 \text{ mW}$

Peak EIRP $< 60/f_{\rm (GHz)}$

SAR evaluation can be exempted.

FCC Part 15.407 Page 8 of 38

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

Report No.: RSZ110727001-00B

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.407 (a), if the transmitting antennas of directional gain greater than 6dBi are used, the transmit power and power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has two ceramic patch antennas on the PCB, which in accordance to section 15.203, the maximum gain is 2 dBi; please refer to the internal photos.

Result: Compliance.

FCC Part 15.407 Page 9 of 38

FCC §15.407(b)(6) & §15.207(a) – AC LINE CONDUCTED EMISSIONS

Report No.: RSZ110727001-00B

Applicable Standard


FCC §15.207, §15.407(b) (6)

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at Bay Area Compliance Laboratory Corp. (Shenzhen) is ± 2.4 dB.

EUT Setup

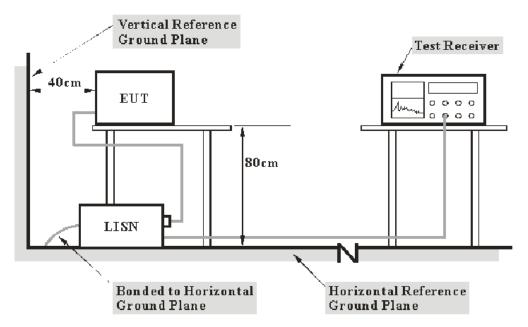

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMIN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2009 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter of laptop was connected to a 120 VAC/60 Hz power source.

FCC Part 15.407 Page 10 of 38

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Report No.: RSZ110727001-00B

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS30	830245	2011-03-03	2012-03-02
Rohde & Schwarz	L.I.S.N.	ESH2-Z5	892107/021	2011-03-09	2012-03-08

^{*}Statement of Traceability: Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

During the conducted emission test, the adapter of laptop was connected to the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

14.61 dB at 1.380 MHz in the Line conducted mode

Test Data

Environmental Conditions


Temperature:	25 ° C	
Relative Humidity:	56 %	
ATM Pressure:	100.0 kPa	

The testing was performed by Felix Li on 2011-08-25.

Test Mode: Transmitting

FCC Part 15.407 Page 11 of 38


120 V, 60 Hz, Line:

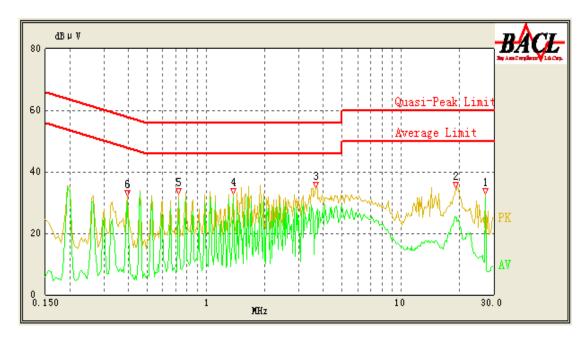

Frequency (MHz)	Corrected Amplitude (dBµV)	Correction Factor (dB)	Limit (dBµV)	Margin (dB)	Detector (PK/QP/Ave.)
1.380	31.39	10.10	46.00	14.61	Ave.
0.720	30.58	10.10	46.00	15.42	Ave.
0.395	30.47	10.10	49.00	18.53	Ave.
27.120	31.45	10.10	50.00	18.55	Ave.
3.675	25.55	10.10	46.00	20.45	Ave.
0.720	31.38	10.10	56.00	24.62	QP
19.070	25.16	10.10	50.00	24.84	Ave.
1.380	30.38	10.10	56.00	25.62	QP
0.395	30.25	10.10	59.00	28.75	QP
19.070	29.43	10.10	60.00	30.57	QP
27.120	27.85	10.10	60.00	32.15	QP
3.680	23.13	10.10	56.00	32.87	QP

FCC Part 15.407 Page 12 of 38

120V, 60 Hz, Neutral:

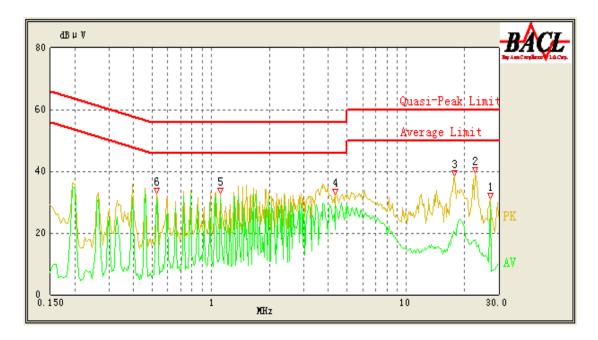

Frequency (MHz)	Corrected Amplitude (dBµV)	Correction Factor (dB)	Limit (dBµV)	Margin (dB)	Detector (PK/QP/Ave.)
0.525	31.13	10.10	46.00	14.87	Ave.
1.120	31.04	10.10	46.00	14.96	Ave.
4.340	28.85	10.10	46.00	17.15	Ave.
27.120	29.46	10.10	50.00	20.54	Ave.
0.525	31.33	10.10	56.00	24.67	QP
1.120	29.02	10.10	56.00	26.98	QP
17.805	20.25	10.10	50.00	29.75	Ave.
4.340	26.15	10.10	56.00	29.85	QP
27.120	30.02	10.10	60.00	29.98	QP
22.745	17.70	10.10	50.00	32.30	Ave.
17.720	20.61	10.10	60.00	39.39	QP
22.755	15.53	10.10	60.00	44.47	QP

FCC Part 15.407 Page 13 of 38

FCC §15.209, §15.205 & §15.407(b) (1) (6) (7) – UNDESIRABLE EMISSION & RESTRICTED BANDS

Report No.: RSZ110727001-00B

Applicable Standard

FCC §15.407 (b) (1), (6), (7); §15.209; §15.205;

For transmitters operating in the 5.15–5.25 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of –27 dBm/MHz.

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209.


Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.


Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Bay Area Compliance Laboratories Corp. (Shenzhen) is +4.0 dB.

EUT Setup

Below 1GHz:

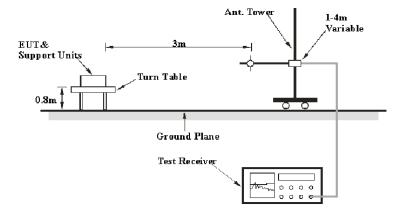

Above 1GHz:

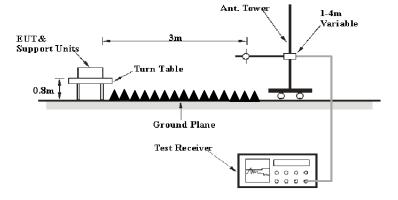

FCC Part 15.407 Page 14 of 38

Report No.: RSZ110727001-00B

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC 15.209, and FCC 15.407 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The adapter of laptop was connected to a 120 VAC/60 Hz power source,

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	Detector
30 MHz – 1000 MHz	100 kHz	300 kHz	QP
1000 MHz – 40 GHz	1 MHz	3 MHz	PK
1000 MHz – 40 GHz	1 MHz	10 Hz	Ave.

Test Procedure

During the radiated emission test, the adapter of laptop was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1GHz, peak and Average detection modes for frequencies above 1GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

Corrected Amplitude = Meter Reading + Antenna Factor + Cable Loss - Amplifier Gain

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

Margin = Limit – Corrected Amplitude

FCC Part 15.407 Page 15 of 38

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
НР	Amplifier	HP8447D	2944A09795	2011-08-02	2012-08-01
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-11	2011-11-10
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2011-07-05	2012-07-04
Mini-Circuits	Amplifier	ZVA-213+	T-E27H	2011-03-08	2012-03-07
Sunol Sciences	Horn Antenna	DRH-118	A052604	2011-05-05	2012-05-04
HP	Spectrum Analyzer	8593A	51475684	2011-07-08	2012-07-07
Rohde & Schwarz	Spectrum Analyzer	FSEM30	849720/019	2011-07-08	2012-07-07

Report No.: RSZ110727001-00B

Test Results Summary

According to the recorded data in following table, the EUT complied with the <u>FCC Title 47, Part 15, Subpart C, Section 15.205, 15.209 and 15.407</u>, with the worst margin reading of:

2.1 dB at 72.006000 MHz in the Horizontal polarization

Test Data

Environmental Conditions

Temperature:	25 ° C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa

The testing was performed by Felix Li on 2011-08-11.


FCC Part 15.407 Page 16 of 38

^{*} **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Mode: Transmitting

1) Below 1 GHz:

Auto Test (FCC 15.209)

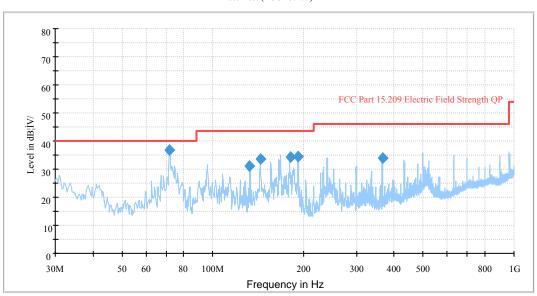

Frequency (MHz)	Corrected Amplitude (dBµV/m)	Ant. Height (cm)	Ant. Polarity (H/V)	Turntable Position (degree)	Correction Factor (dB)	Limit (dBμV/m)	Margin (dB)
72.004500	36.5	400.0	Н	254.0	-18.2	40.0	3.5*
118.003054	31.6	325.0	Н	25.0	-13.7	40.0	8.4
192.008500	34.5	132.0	Н	5.0	-14.7	43.5	9.0
173.003543	34.1	154.0	Н	356.0	-14.8	43.5	9.4
144.008500	33.5	204.0	Н	3.0	-13.5	43.5	10.0
365.620000	34.2	143.0	Н	11.0	-10.7	46.0	11.8

^{*}Within measurement uncertainty!

FCC Part 15.407 Page 17 of 38

Above 1 GHz:

Indic	ated		Table	Test An	itenna	Corr	ection F	actor	FCC	Part 15.40	7/15.205/	15.209
Frequency (MHz)	Receiver Reading (dBµV)	Detector (PK/AV)	Angle Degree	Height (m)	Polar (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre- Amp. (dB)	Cord. Amp. (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Comment
	Low Channel (5190 MHz)											
20760	14.02	Ave.	168	1.1	Н	45.9	10.35	24.7	45.57	54	8.43	harmonic
20760	14.10	Ave.	168	1.1	V	45.6	10.35	24.7	45.35	54	8.65	harmonic
10380	23.50	Ave.	347	1.1	V	40.4	6.69	26.2	44.39	54	9.61	harmonic
15570	17.26	Ave.	253	1.2	V	43.5	8.22	25.90	43.08	54	10.92	harmonic
15570	16.89	Ave.	254	1.2	Н	43.7	8.22	25.90	42.91	54	11.09	harmonic
10380	19.35	Ave.	13	1.1	Н	41.4	6.69	26.2	41.24	54	12.76	harmonic
20760	29.33	PK	168	1.1	V	45.6	10.35	24.7	60.58	74	13.42	harmonic
10380	39.63	PK	308	1.2	V	40.4	6.69	26.2	60.52	74	13.48	harmonic
20760	28.63	PK	168	1.1	Н	45.9	10.35	24.7	60.18	74	13.82	harmonic
10380	36.82	PK	13	1.1	Н	41.4	6.69	26.2	58.71	74	15.29	harmonic
15570	32.18	PK	253	1.2	V	43.5	8.22	25.90	58	74	16	harmonic
15570	31.85	PK	254	1.2	Н	43.7	8.22	25.90	57.87	74	16.13	harmonic
5149.39	42.11	PK	14	1.2	V	35.4	4.40	26.75	55.16	74	18.84	Spurious
5149.39	40.83	PK	116	1.1	Н	36.6	4.43	26.75	55.11	74	18.89	Spurious
5149.39	20.52	Ave.	116	1.1	Н	36.6	4.43	26.75	34.80	54	19.20	Spurious
5149.39	21.53	Ave.	14	1.2	V	35.4	4.40	26.75	34.58	54	19.42	Spurious
		•		Hi	gh Cha	nnel (52	30 MHz	<u>:)</u>		•		•
15690	23.52	Ave.	165	1.1	V	43.5	8.22	25.90	49.34	54	4.66	harmonic
15690	22.68	Ave.	157	1.1	Н	43.7	8.22	25.90	48.7	54	5.3	harmonic
20920	14.10	Ave.	54	1.0	Н	45.9	10.35	24.7	45.65	54	8.35	harmonic
20920	14.35	Ave.	223	1.0	V	45.6	10.35	24.7	45.6	54	8.4	harmonic
15690	39.50	PK	165	1.1	V	43.5	8.22	25.90	65.32	74	8.68	harmonic
15690	38.62	PK	157	1.1	Н	43.7	8.22	25.90	64.64	74	9.36	harmonic
10460	22.36	Ave.	135	1.1	Н	41.4	6.71	26.2	44.27	54	9.73	harmonic
10460	22.63	Ave.	173	1.1	V	40.4	6.71	26.2	43.54	54	10.46	harmonic
20920	29.66	PK	223	1.0	V	45.6	10.35	24.7	60.91	74	13.09	harmonic
20920	29.05	PK	54	1.0	Н	45.9	10.35	24.7	60.6	74	13.4	harmonic
10460	38.17	PK	135	1.1	Н	41.4	6.71	26.2	60.08	74	13.92	harmonic
10460	38.67	PK	173	1.1	V	40.4	6.71	26.2	59.58	74	14.42	harmonic
5372.9	22.45	Ave.	145	1.2	V	35.5	4.51	26.70	35.76	54	18.24	Spurious
5357.5	20.87	Ave.	303	1.1	Н	36.7	4.49	26.70	35.36	54	18.64	Spurious
5357.5	37.17	PK	303	1.1	Н	36.7	4.49	26.70	51.66	74	22.34	Spurious
5372.9	38.17	PK	145	1.2	V	35.5	4.51	26.70	51.48	74	22.52	Spurious

Report No.: RSZ110727001-00B

FCC Part 15.407 Page 18 of 38

Conducted Spurious Emission at Antenna Port

Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Use a combiner combine all the transmit chains (antenna outputs)into a single test point, then connect to the spectrum analyzer. The Resolution bandwidth is set to 1MHz, The Video bandwidth is set to 1MHz, report the peak value out of the oprating band.

Report No.: RSZ110727001-00B

3. Repeat above procedures until all frequencies measured were complete.

Offset value =attenuation+combiner loss +cable loss




Test data

Channel Frequency (MHz)	Frequency (MHz)	Antenna Port	Corrected Reading (dBm)	Limited (dBm)
5190	39640	Chain 0	-29.50	-27
3190	37000	Chain 1	-29.33	-27
5230	39640	Chain 0	-29.33	-27
3230	36800	Chain 1	-29.50	-27


FCC Part 15.407 Page 19 of 38

Please refer to the following plots.

5190 MHz-Chain 0

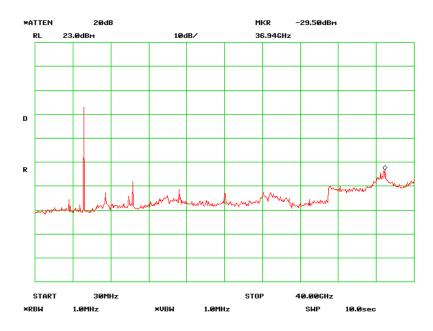


5190 MHz-Chain 1

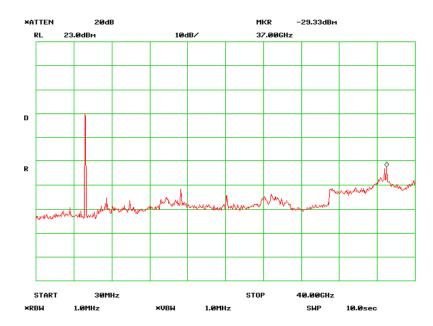


FCC Part 15.407 Page 20 of 38

5230 MHz-Chain 0

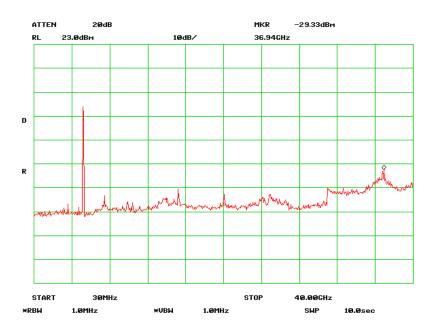

5230 MHz-Chain 1

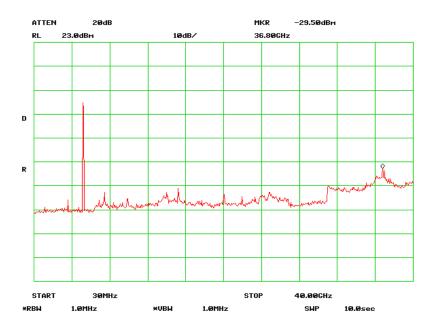

FCC Part 15.407 Page 21 of 38

FCC §15.407(a) (1) – 26 dB OCCUPIED BANDWIDTH

Applicable Standard

Applicable Standard

For the band 5.15–5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or 4 dBm + 10 log B, where B is the 26–dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 4 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Report No.: RSZ110727001-00B


Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Aglient	Spectrum Analyzer	8564E	3943A01781	2011-04-12	2012-04-11

^{*} **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- 3. Use a RBW = approximately 1% of the emission bandwidth. Set the VBW > RBW. Use a peak detector. Do not use the Max Hold function. Rather, use the viewbutton to capture the emission. Measure maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat, measurement as needed until the RBW/EBW ratio is approximately 1%.
- 4. Repeat above procedures until all frequencies measured were complete.



FCC Part 15.407 Page 22 of 38

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56%
ATM Pressure:	100.0kPa

The testing was performed by Felix Li on 2011-08-07.


Test Result: Pass.

Please refer to the following tables and plots.

Frequency (MHz)	Antenna Port	26 dB Bandwidth (MHz)
5190	Chain 0	39.47
3190	Chain 1	39.20
5220	Chain 0	39.47
5230	Chain 1	39.33


Report No.: RSZ110727001-00B

26 dB Bandwidth-5190 MHz, Chain 0

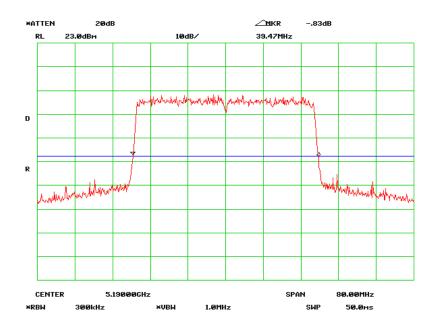


FCC Part 15.407 Page 23 of 38

26 dB Bandwidth-5190 MHz, Chain 1

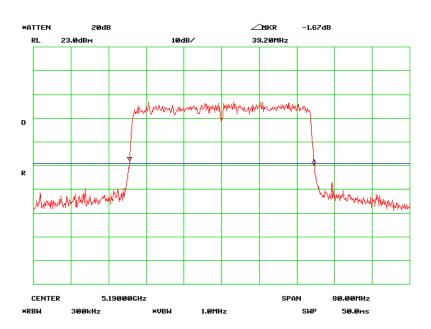


26 dB Bandwidth-5230 MHz, Chain 0

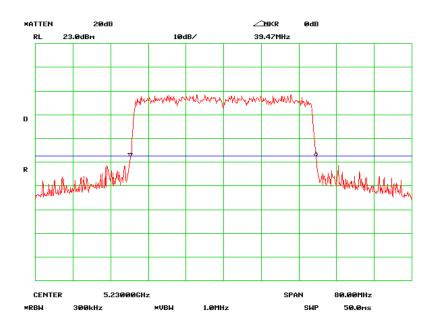

FCC Part 15.407 Page 24 of 38

26 dB Bandwidth-5230 MHz, Chain 1

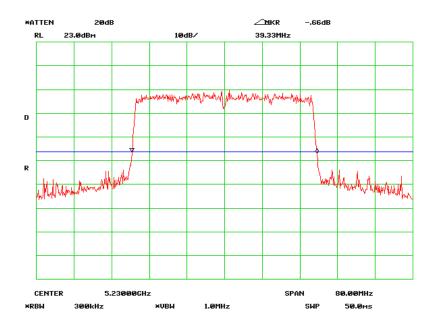

FCC Part 15.407 Page 25 of 38

FCC §15.407(a) (1) – CONDUCTED TRANSMITTER OUTPUT POWER

Report No.: RSZ110727001-00B

Applicable Standard

For the band 5.15–5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or 4 dBm + 10 log B, where B is the 26–dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 4 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Aglient	Spectrum Analyzer	8564E	3943A01781	2011-04-12	2012-04-11

^{*} **Statement of Traceability:** Bay Area Compliance Lab Corp. (ShenZhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- 3. Set span = 80MHz (to encompass the entire emission bandwidth (EBW) of the signal). Set RBW = 1 MHz. Set VBW ≥ 3 MHz. Use sample detector mode Use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at full control power for entire sweep of every sweep. If the device transmits continuously, with no off intervals or reduced power intervals, the trigger may be set to "free run". Trace average 100 traces in power averaging mode. Compute power by integrating the spectrum across the 26 dB EBW of the signal. The integration can be performed using the spectrum analyzer's band power measurement function with band limits set equal to the EBW band edges or by summing power levels in each 1 MHz band in linear power terms. The 1 MHz band power levels to be summed can be obtained by averaging, in linear power terms, power levels in each frequency bin across the 1 MHz.
- 4. Repeat above procedures until all frequencies measured were complete.

FCC Part 15.407 Page 26 of 38

Test Data

Environmental Conditions

Temperature:	25 °C	
Relative Humidity:	56%	
ATM Pressure:	100.0kPa	

The testing was performed by Felix Li on 2011-08-07.

Test Mode: Transmitting


Test Result: Pass

Please refer to the following tables and plots.

Frequency (MHz)	Antenna Port	Output Power (dBm)	Total Power (dBm)	Limit (dBm)	
5190	Chain 0	4.8	7.76	17	
3190	Chain 1 4.7		7.70	1 /	
5230	Chain 0	4.5	7.46	17	
3230	Chain 1	4.4	7.40	1 /	


Report No.: RSZ110727001-00B

Output Power-5190 MHz, Chain 0

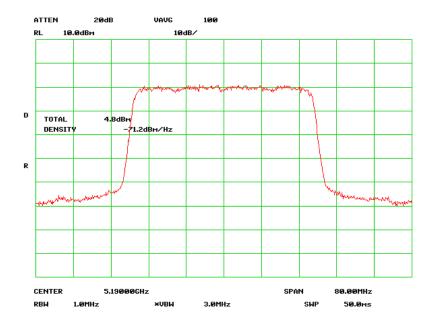


FCC Part 15.407 Page 27 of 38

Output Power-5190 MHz, Chain 1

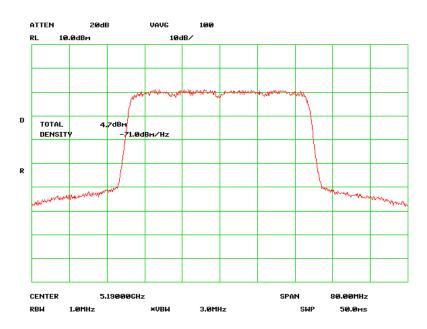


Output Power -5230 MHz, Chain 0

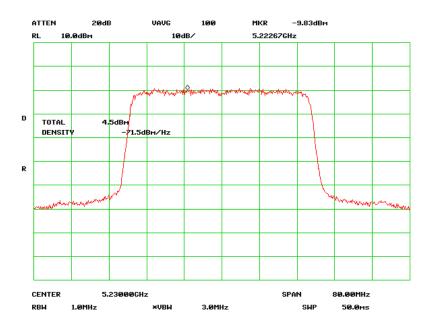

FCC Part 15.407 Page 28 of 38

Output Power -5230 MHz, Chain 1

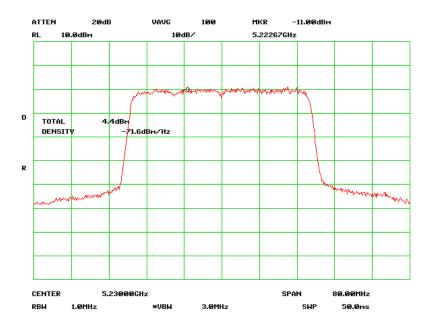

FCC Part 15.407 Page 29 of 38

FCC §15.407(a) (1) (5) - POWER SPECTRAL DENSITY

Applicable Standard

For the band 5.15–5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or 4 dBm + 10 log B, where B is the 26–dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 4 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Report No.: RSZ110727001-00B

The peak power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A resolution bandwidth less than the measurement bandwidth can be used, provided that the measured power is integrated to show total power over the measurement bandwidth. If the resolution bandwidth is approximately equal to the measurement bandwidth, and much less than the emission bandwidth of the equipment under test, the measured results shall be corrected to account for any difference between the resolution bandwidth of the test instrument and its actual noise bandwidth.

Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- 3. Use sample detector and power averaging (not video averaging) mode. Set RBW= 1 MHz*, VBW > 1 MHz. The PPSD is the highest level found across the emission in any 1-MHz band after 100 sweeps of averaging. This method is permitted only if the transmission pulse or sequence of pulses remains at maximum transmits power throughout each of the 100 sweeps of averaging and that the interval between pulses is not included in any of the sweeps.
- 4. Repeat above procedures until all frequencies measured were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Aglient	Spectrum Analyzer	8564E	3943A01781	2011-04-12	2012-04-11

^{*} Statement of Traceability: Bay Area Compliance Lab Corp. (ShenZhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

FCC Part 15.407 Page 30 of 38

Test Data

Environmental Conditions

Temperature:	25 ° C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa

The testing was performed by Felix Li on 2011-08-08.

Test Mode: Transmitting


Test Result: Pass

Frequency (MHz)	Antenna Port	Power Spectral Density (dBm/MHz)	Total Power Spectral Density (dBm/MHz)	Limit (dBm/MHz)	
5190	Chain 0	-10.50	-7.39	4.0	
3190	Chain 1	-10.33	-1.39		
5230	Chain 0	-10.83	-7.29	4.0	
3230	Chain 1	-9.83	-7.29	4.0	


Report No.: RSZ110727001-00B

FCC Part 15.407 Page 31 of 38

5190 MHz, Chain 0

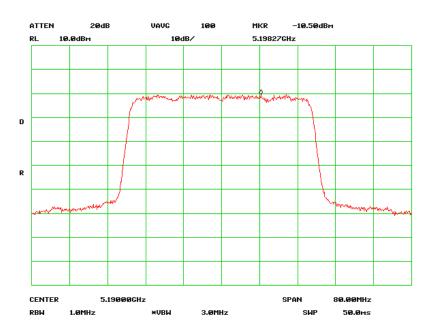


5190 MHz, Chain 1

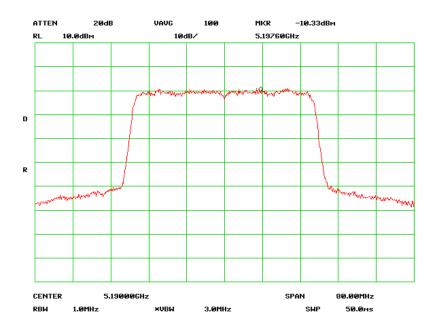


FCC Part 15.407 Page 32 of 38

5230 MHz, Chain 0

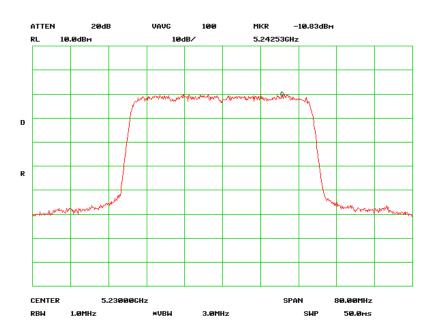

5230 MHz, Chain 1

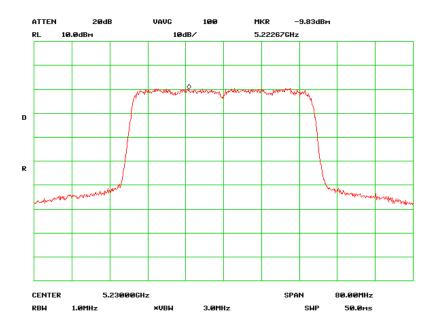

FCC Part 15.407 Page 33 of 38

FCC §15.407(a) (6) – PEAK EXCURSION RATIO

Applicable Standard

According to §15.407(a) (6), the ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the maximum conducted output power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less.

Report No.: RSZ110727001-00B

Test Procedure

Set the spectrum analyzer span to view the entire emission bandwidth.

The largest difference between the following two traces must be \leq 13 dB for all frequencies across the emission bandwidth. Submit a plot.

1st Trace:

- Set RBW = 1 MHz, VBW ≥ 3 MHz with peak detector and maxhold settings. 2nd Trace:
- create the 2nd trace using the settings described in the setion "FCC §15.407(a)(1)(2) CONDUCTED TRANSMITTER OUTPUT POWER".

EUT Spectrum Analyzer

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Aglient	Spectrum Analyzer	8564E	3943A01781	2011-04-12	2012-04-11

^{*} **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Data

Environmental Conditions

Temperature:	25 ° C	
Relative Humidity:	56 %	
ATM Pressure:	100.0 kPa	


The testing was performed by Felix Li on 2011-08-08.


Test Mode: Transmitting

FCC Part 15.407 Page 34 of 38


Frequency (MHz)	Antenna Port	Peak Excursion Ratio (dB)	Limit (dB)	
5190	Chain 0	12.50	13	
	Chain 1	12.00	13	
5230	Chain 0	12.67	13	
	Chain 1	12.50	13	


5190 MHz, Chain 0






5190 MHz, Chain 1







FCC Part 15.407 Page 35 of 38


5230 MHz, Chain 0





5230 MHz, Chain 1





FCC Part 15.407 Page 36 of 38

FCC §407(g) - FREQUENCY STABILITY

Applicable Standards

FCC§407(g), manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.


Report No.: RSZ110727001-00B

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external AC power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The AC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the communication test set.

Frequency Stability vs. Voltage: An external variable AC power supply was connected to the adaptor terminals of the equipment under test. The voltage was set to 80% and 115% of the nominal value and was then decreased until the transmitter light no longer illuminated. The output frequency was recorded for each voltage.

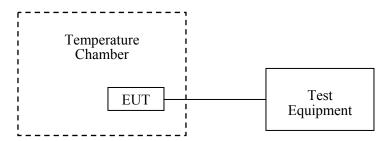

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
WUHUAN	Temperature & Humidity Chamber	HTP205	20021115	2011-06-04	2012-06-03
Rohde & Schwarz	Spectrum Analyzer	FSEM30	849720/019	2011-07-08	2012-07-07

^{*} **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

FCC Part 15.407 Page 37 of 38

Test Data

Environmental Conditions

Temperature:	25 ° C	
Relative Humidity:	56 %	
ATM Pressure:	100.0 kPa	

The testing was performed by Felix Li on 2011-08-08.

Test Mode: Transmitting

Frequency Band (MHz)	Channel Frequency (MHz)	Power Supply (Vdc)	Temperature (°C)	Measurd Frequency (MHz)
5150-5250	5190	5	40	5190.0523
			25	5190.0238
			0	5190.0305
	5230	5	40	5230.0456
			25	5230.0812
			0	5230.0316

Report No.: RSZ110727001-00B

***** END OF REPORT *****

FCC Part 15.407 Page 38 of 38