



FCC PART 15.407



TEST REPORT

For

JUPITER TECHNOLOGY (WUXI) CO., LTD.

No.13 Minjiang Road, Wuxi StateHigh & New Technology Industry Development Zone,
Wuxi, Jiangsu, China

FCC ID: WIOWS3003

Report Type: Original Report	Product Type: WHDI 5.8GHz WIRELESS PROJECTOR
Test Engineer: <u>Felix Li</u> <i>Felix Li</i>	
Report Number: <u>RSZ110728001-00B</u>	
Report Date: <u>2011-09-16</u>	
Merry Zhao <i>merry.zhao</i>	
Reviewed By: <u>EMC Engineer</u>	
Test Laboratory: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP*, or any agency of the Federal Government.

* This report contains data that are not covered by the NVLAP accreditation and are marked with an asterisk “★” (Rev.2)

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE.....	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY.....	4
TEST FACILITY.....	4
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
EQUIPMENT MODIFICATIONS	6
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL I/O CABLE.....	6
BLOCK DIAGRAM OF TEST SETUP	6
SUMMARY OF TEST RESULTS	7
FCC §15.407 (f) & §2.1093 – RF EXPOSURE EVALUATION	8
APPLICABLE STANDARD	8
FCC §15.203 – ANTENNA REQUIREMENT	9
APPLICABLE STANDARD	9
ANTENNA CONNECTOR CONSTRUCTION	9
FCC §15.407 (b) (6) & §15.207 (a) – AC LINE CONDUCTED EMISSIONS.....	10
APPLICABLE STANDARD	10
MEASUREMENT UNCERTAINTY	10
EUT SETUP	10
EMI TEST RECEIVER SETUP.....	11
TEST EQUIPMENT LIST AND DETAILS.....	11
TEST PROCEDURE	11
TEST RESULTS SUMMARY	11
TEST DATA	11
FCC §15.209, §15.205 & §15.407(b) (1) (6) (7) – UNDESIRABLE EMISSION & RESTRICTED BANDS	14
APPLICABLE STANDARD	14
MEASUREMENT UNCERTAINTY	14
EUT SETUP	14
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	15
TEST PROCEDURE	15
CORRECTED AMPLITUDE & MARGIN CALCULATION	15
TEST EQUIPMENT LIST AND DETAILS.....	16
TEST RESULTS SUMMARY	16
TEST DATA	16
CONDUCTED SPURIOUS EMISSION AT ANTENNA PORT	19
TEST DATA	19
FCC §15.407(a) (1) – 26 dB OCCUPIED BANDWIDTH	22
APPLICABLE STANDARD	22
TEST EQUIPMENT LIST AND DETAILS.....	22

TEST PROCEDURE	22
TEST DATA	23
FCC §15.407(a) (1) – CONDUCTED TRANSMITTER OUTPUT POWER	26
APPLICABLE STANDARD	26
TEST EQUIPMENT LIST AND DETAILS.....	26
TEST PROCEDURE	26
TEST DATA	27
FCC §15.407(a) (1) (5) - POWER SPECTRAL DENSITY	30
APPLICABLE STANDARD	30
TEST PROCEDURE	30
TEST EQUIPMENT LIST AND DETAILS.....	30
TEST DATA	31
FCC §15.407(a) (6) – PEAK EXCURSION RATIO	34
APPLICABLE STANDARD	34
TEST PROCEDURE	34
TEST EQUIPMENT LIST AND DETAILS.....	34
TEST DATA	34
FCC §407(g) - FREQUENCY STABILITY	40
APPLICABLE STANDARDS.....	40
TEST PROCEDURE	40
TEST EQUIPMENT LIST AND DETAILS.....	40
TEST DATA	41

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *JUPITER TECHNOLOGY (WUXI) CO., LTD*'s product, model number: *WS3003 (FCC ID: WIOWS3003)* ("EUT") in this report is a transmitter of *WHDI 5.8GHz WIRELESS PROJECTOR*, which was measured approximately: 8.0 cm (L) x 3.0 cm (W) x 1.6 cm (H), rated input voltage: DC 5V from USB port.

** All measurement and test data in this report was gathered from production sample serial number: WV1212 (Assigned by the applicant). The EUT was received on 2011-07-28.*

Objective

This Type approval report is prepared on behalf of *JUPITER TECHNOLOGY (WUXI) CO., LTD* in accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart E, and section 15.203, 15.205, 15.207, 15.209 and 15.407 rules.

Related Submittal(s)/Grant(s)

FCC Part 15.247 DTS submission with FCC ID: WIOWS3003
Receiver part submission with FCC ID: WIOWS3002

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Shenzhen) is an ISO/IEC 17025 accredited laboratory, and is accredited by National Voluntary Laboratory Accredited Program (Lab Code 200707-0).



The current scope of accreditations can be found at <http://ts.nist.gov/Standards/scopes/2007070.htm>

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode, which is provided by manufacturer.

The operating frequency band is 5150-5250 MHz; the test frequency is 5190 MHz and 5230 MHz.

EUT Exercise Software

Test software: APPcom&Debug View

Equipment Modifications

No modification was made to the unit tested.


Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
IBM	Laptop	T40	N/A

External I/O Cable

Cable Description	Length (m)	From Port	To
Unshielded Undetachable USB Cable	0.5	Laptop	EUT

Block Diagram of Test Setup

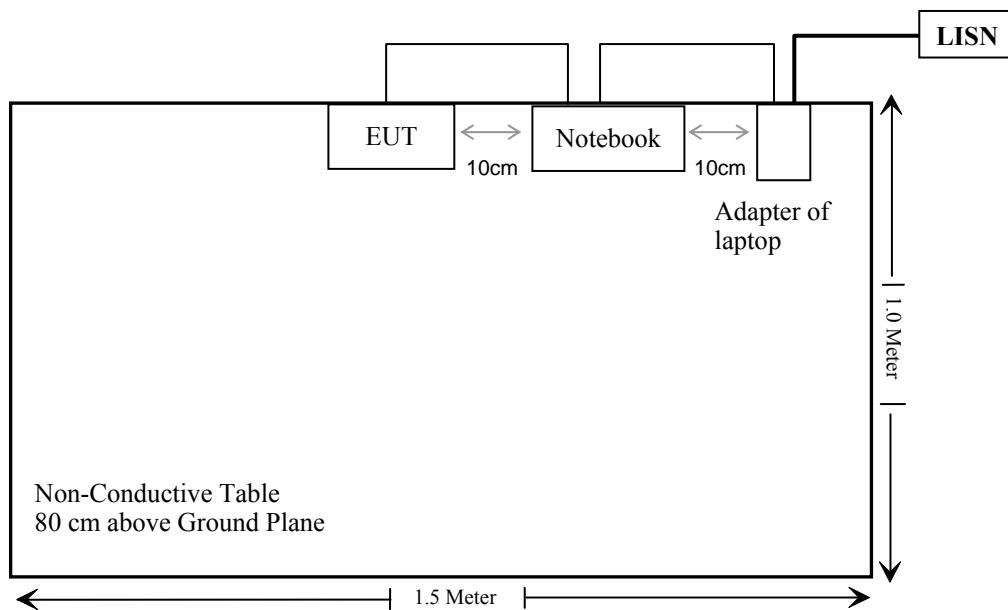

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.407 (f) & §2.1093	RF Exposure Evaluation	Compliance
§15.203	Antenna Requirement	Compliance
§15.407(b)(6) & §15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209 & §15.407(b) (1),(6),(7)	Undesirable Emission& Restricted Bands	Compliance
§15.407(a) (1)	26 dB Bandwidth	Compliance
§15.407(a)(1),	Conducted Transmitter Output Power	Compliance
§15.407 (a)(1),(5)	Power Spectral Density	Compliance
§15.407(a)(6)	Peak Excursion Ratio	Compliance
§15.407(g)	Frequency Stability	Compliance

FCC §15.407 (f) & §2.1093 – RF EXPOSURE EVALUATION**Applicable Standard**

According to FCC §15.407(f) and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498, 1) c), unless excluded by specific FCC test procedures, portable device with output power $> 60/f_{\text{GHz}}$ mW shall include SAR data for equipment approval.

Result:

Max Peak output power, Antenna Gain: 2.0 dBi

$$\text{EIRP} = 7.76 \text{ dBm} + 2\text{dBi} = 9.76 \text{ dBm} = 9.46 \text{ mW}$$

$$60/f_{\text{GHz}} = 60/5.190 = 11.56 \text{ mW}$$

$$\text{Peak EIRP} < 60/f_{\text{GHz}}$$

SAR evaluation can be exempted.

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.407 (a), if the transmitting antennas of directional gain greater than 6dBi are used, the transmit power and power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has two ceramic patch antennas on the PCB, which in accordance to section 15.203, the maximum gain is 2 dBi; please refer to the internal photos.

Result: Compliance.

FCC §15.407 (b) (6) & §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard


FCC §15.207, §15.407(b) (6)

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at Bay Area Compliance Laboratory Corp. (Shenzhen) is ± 2.4 dB.

EUT Setup

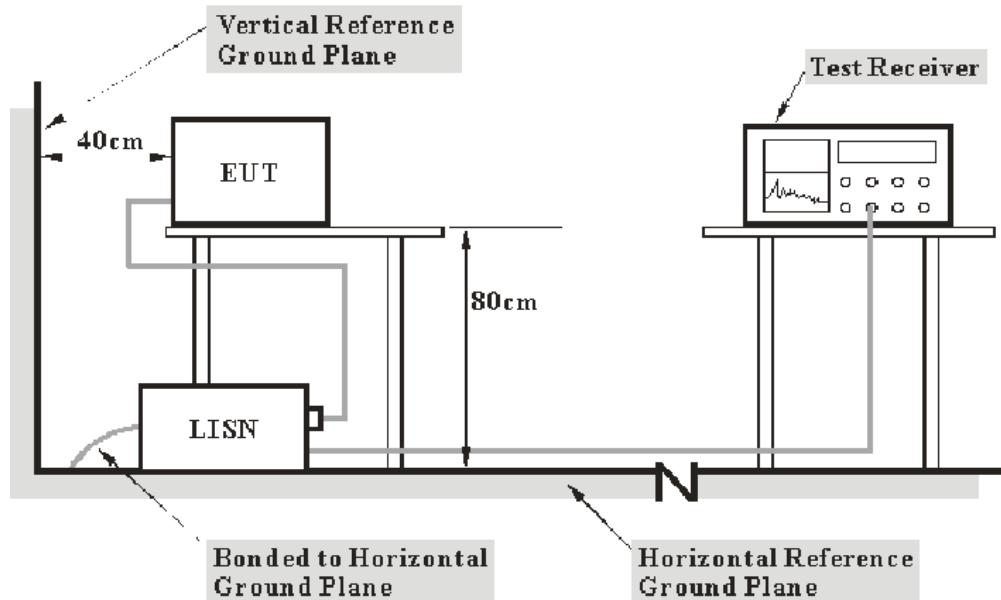

Note:

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2009 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter of laptop was connected to a 120 VAC/60 Hz power source,

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS30	830245	2011-03-03	2012-03-02
Rohde & Schwarz	L.I.S.N.	ESH2-Z5	892107/021	2011-03-09	2012-03-08

***Statement of Traceability:** Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

During the conducted emission test, the adapter of laptop was connected to the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Test Results Summary

According to the recorded data in following table, the EUT complied with the [FCC Part 15.207](#), with the worst margin reading of:

14.55 dB at 1.127 MHz in the Neutral conducted mode

Test Data


Environmental Conditions

Temperature:	25 ° C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa

The testing was performed by Felix Li on 2011-08-25.


Test Mode: Transmitting

120 V, 60 Hz, Line:

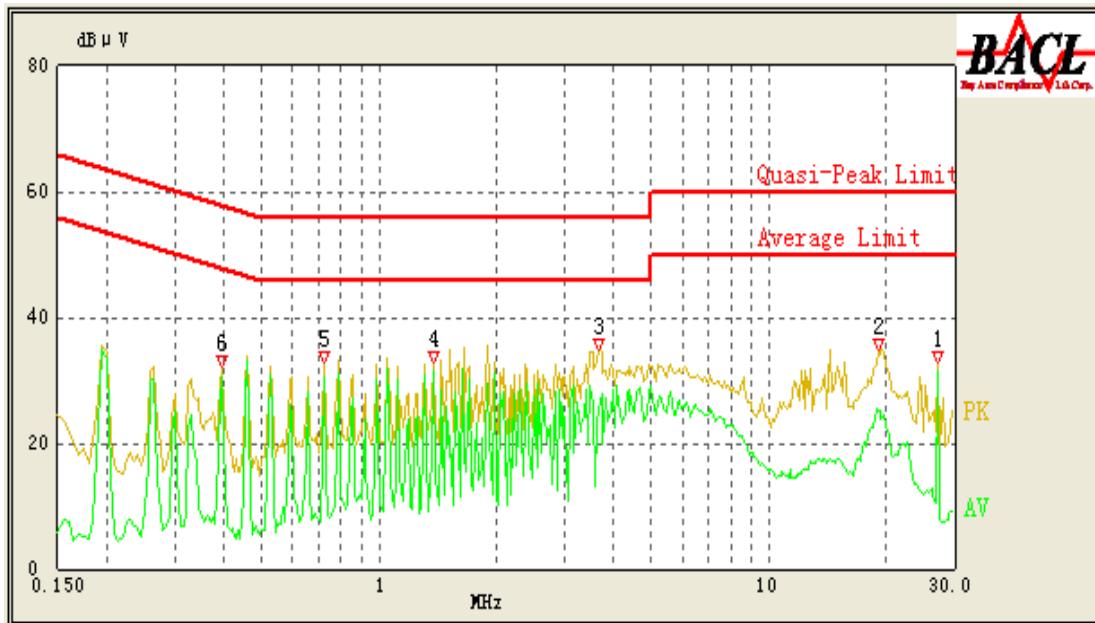

Frequency (MHz)	Corrected Amplitude (dB μ V)	Correction Factor (dB)	Limit (dB μ V)	Margin (dB)	Detector (PK /QP/Ave.)
1.382	31.32	10.10	46.00	14.68	Ave.
0.726	30.37	10.10	46.00	15.63	Ave.
27.125	31.44	10.10	50.00	18.56	Ave.
0.397	30.05	10.10	49.00	18.95	Ave.
3.682	25.24	10.10	46.00	20.76	Ave.
0.726	31.34	10.10	56.00	24.66	QP
19.068	25.17	10.10	50.00	24.83	Ave.
1.382	30.31	10.10	56.00	25.69	QP
0.397	30.53	10.10	59.00	28.47	QP
19.068	29.45	10.10	60.00	30.55	QP
27.125	27.86	10.10	60.00	32.14	QP
3.682	23.15	10.10	56.00	32.85	QP

120V, 60 Hz, Neutral:

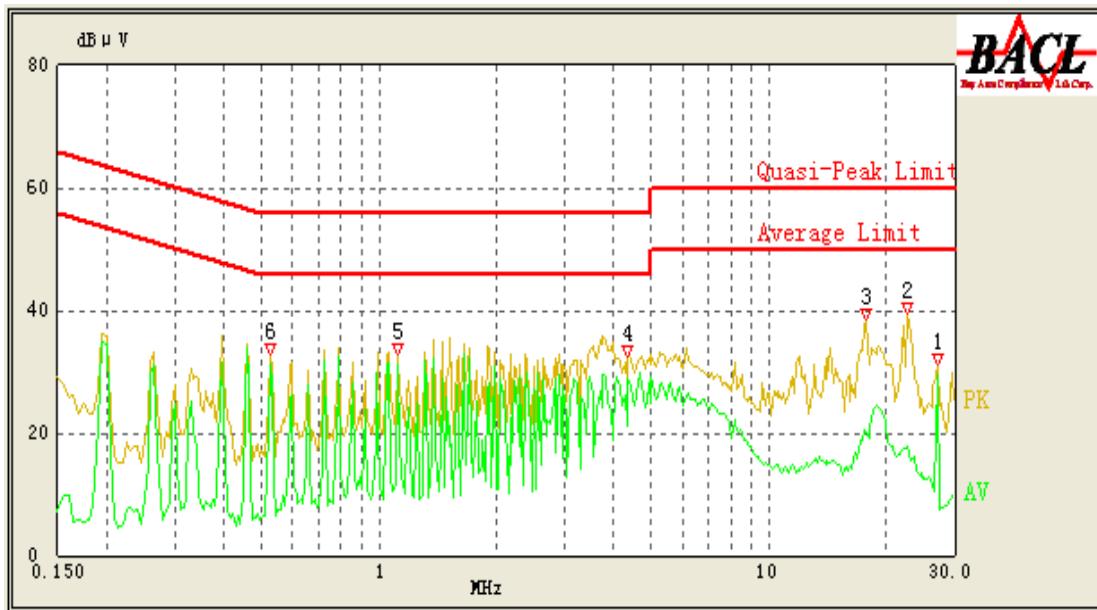

Frequency (MHz)	Corrected Amplitude (dB μ V)	Correction Factor (dB)	Limit (dB μ V)	Margin (dB)	Detector (PK /QP/Ave.)
1.127	31.45	10.10	46.00	14.55	Ave.
0.533	31.29	10.10	46.00	14.71	Ave.
4.345	28.34	10.10	46.00	17.66	Ave.
27.124	29.48	10.10	50.00	20.52	Ave.
0.533	31.21	10.10	56.00	24.79	QP
1.127	29.21	10.10	56.00	26.79	QP
17.862	20.37	10.10	50.00	29.63	Ave.
4.345	26.28	10.10	56.00	29.72	QP
27.124	30.25	10.10	60.00	29.75	QP
22.748	17.32	10.10	50.00	32.68	Ave.
17.862	20.27	10.10	60.00	39.73	QP
22.748	15.04	10.10	60.00	44.96	QP

FCC §15.209, §15.205 & §15.407(b) (1) (6) (7) – UNDESIRABLE EMISSION & RESTRICTED BANDS

Applicable Standard

FCC §15.407 (b) (1), (6), (7); §15.209; §15.205;

For transmitters operating in the 5.15–5.25 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of –27 dBm/MHz.

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209.


Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.


Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Bay Area Compliance Laboratories Corp. (Shenzhen) is ± 4.0 dB.

EUT Setup

Below 1GHz:

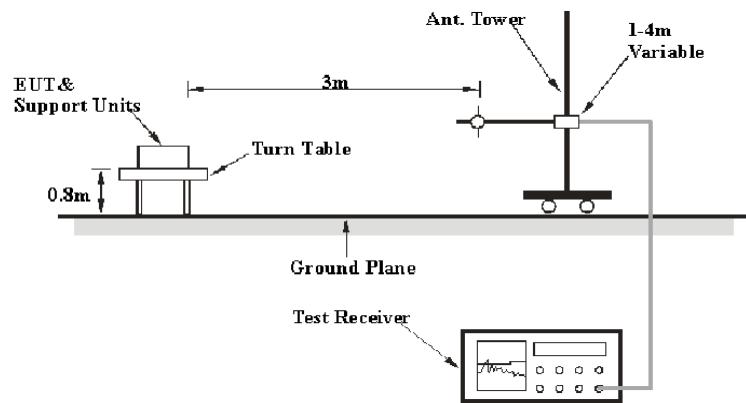

Above 1GHz:

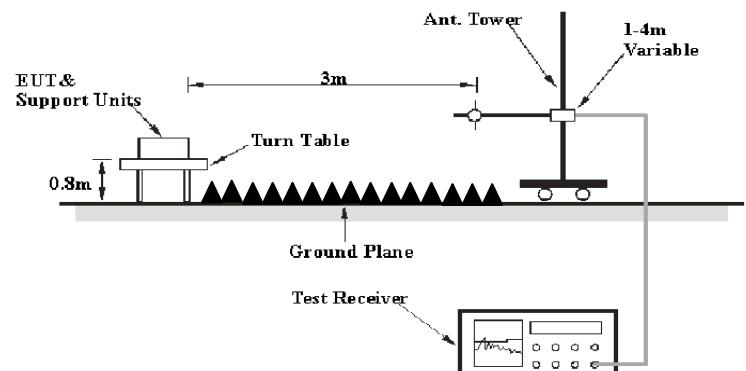

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC 15.209, and FCC 15.407 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The adapter of laptop was connected to a 120 VAC/60 Hz power source,

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	Detector
30 MHz – 1000 MHz	100 kHz	300 kHz	QP
1000 MHz – 40 GHz	1 MHz	3 MHz	PK
1000 MHz – 40 GHz	1 MHz	10 Hz	Ave.

Test Procedure

During the radiated emission test, the adapter of laptop was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1GHz, peak and Average detection modes for frequencies above 1GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	HP8447D	2944A09795	2011-08-02	2012-08-01
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-11	2011-11-10
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2011-07-05	2012-07-04
Mini-Circuits	Amplifier	ZVA-213+	T-E27H	2011-03-08	2012-03-07
Sunol Sciences	Horn Antenna	DRH-118	A052604	2011-05-05	2012-05-04
HP	Spectrum Analyzer	8593A	51475684	2011-07-08	2012-07-07
Rohde & Schwarz	Spectrum Analyzer	FSEM30	849720/019	2011-07-08	2012-07-07

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, Section 15.205, 15.209 and 15.407, with the worst margin reading of:

3.9 dB at 72.008690 MHz in the Horizontal polarization

Test Data


Environmental Conditions

Temperature:	25 ° C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa

The testing was performed by Felix Li on 2011-08-11.

Test Mode: Transmitting

1) Below 1 GHz:

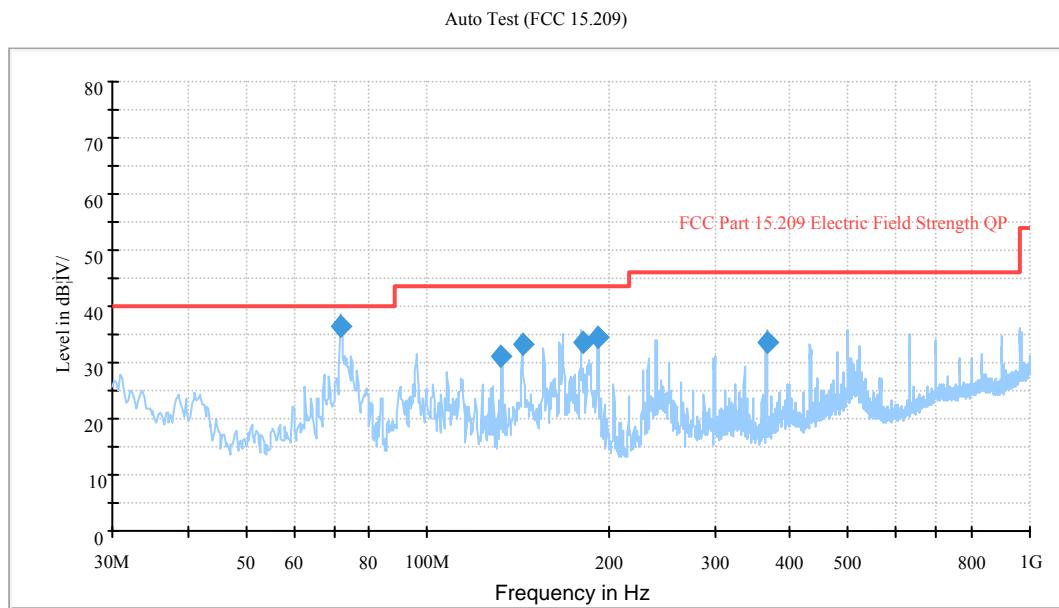

Frequency (MHz)	Corrected Amplitude (dB μ V/m)	Ant. Height (cm)	Ant. Polarity (H/V)	Turntable Position (degree)	Correction Factor (dB)	Limit (dB μ V/m)	Margin (dB)
72.008690	36.1	399.8	H	256.0	-18.2	40.0	3.9*
192.036480	34.6	134.0	H	12.0	-14.7	43.5	8.9
118.123480	30.9	325.0	H	30.0	-13.7	40.0	9.1
173.054210	33.9	156.3	H	350.0	-14.8	43.5	9.6
144.003540	33.8	223.0	H	5.0	-13.5	43.5	9.7
365.548230	34.6	144.2	H	21.0	-10.7	46.0	11.4

*Within measurement uncertainty!

Above 1 GHz:


Indicated		Detector (PK/Ave.)	Table Angle Degree	Test Antenna		Correction Factor			FCC Part 15.407/15.205/15.209		
Frequency (MHz)	Receiver Reading (dB μ V)			Height (m)	Polar (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre- Amp. (dB)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
Low Channel (5190 MHz)											
20760	14.32	Ave.	105	1.1	H	45.9	10.35	24.7	45.87	54	8.13
20760	14.54	Ave.	105	1.1	V	45.6	10.35	24.7	45.79	54	8.21
10380	23.38	Ave.	302	1.1	V	40.4	6.69	26.2	44.27	54	9.73
15570	17.32	Ave.	23	1.2	V	43.5	8.22	25.90	43.14	54	10.86
15570	16.34	Ave.	335	1.2	H	43.7	8.22	25.90	42.36	54	11.64
10380	19.64	Ave.	63	1.1	H	41.4	6.69	26.2	41.53	54	12.47
20760	29.37	PK	105	1.1	V	45.6	10.35	24.7	60.62	74	13.38
10380	39.24	PK	302	1.1	V	40.4	6.69	26.2	60.13	74	13.87
20760	28.21	PK	105	1.1	H	45.9	10.35	24.7	59.76	74	14.24
10380	36.52	PK	63	1.1	H	41.4	6.69	26.2	58.41	74	15.59
15570	32.12	PK	23	1.2	V	43.5	8.22	25.90	57.94	74	16.06
15570	31.84	PK	335	1.2	H	43.7	8.22	25.90	57.86	74	16.14
5149.34	42.15	PK	128	1.0	V	35.4	4.40	26.75	55.2	74	18.8
5149.34	20.55	Ave.	65	1.1	H	36.6	4.43	26.75	34.83	54	19.17
5149.34	40.34	PK	65	1.1	H	36.6	4.43	26.75	54.62	74	19.38
5149.35	21.42	Ave.	128	1.0	V	35.4	4.40	26.75	34.47	54	19.53
High Channel (5230 MHz)											
15690	23.12	Ave.	326	1.1	V	43.5	8.22	25.90	48.94	54	5.06
15690	22.31	Ave.	148	1.1	H	43.7	8.22	25.90	48.33	54	5.67
20920	14.34	Ave.	55	1.1	H	45.9	10.35	24.7	45.89	54	8.11
20920	14.27	Ave.	32	1.1	V	45.6	10.35	24.7	45.52	54	8.48
15690	39.31	PK	326	1.1	V	43.5	8.22	25.90	65.13	74	8.87
15690	38.45	PK	148	1.1	H	43.7	8.22	25.90	64.47	74	9.53
10460	22.05	Ave.	162	1.1	H	41.4	6.71	26.2	43.96	54	10.04
10460	22.54	Ave.	173	1.1	V	40.4	6.71	26.2	43.45	54	10.55
20920	29.71	PK	55	1.1	H	45.9	10.35	24.7	61.26	74	12.74
20920	29.34	PK	32	1.1	V	45.6	10.35	24.7	60.59	74	13.41
10460	38.15	PK	162	1.1	H	41.4	6.71	26.2	60.06	74	13.94
10460	38.66	PK	173	1.1	V	40.4	6.71	26.2	59.57	74	14.43
5379.35	22.24	Ave.	187	1.2	V	35.5	4.51	26.70	35.55	54	18.45
5357.62	20.34	Ave.	228	1.1	H	36.7	4.49	26.70	34.83	54	19.17
5357.62	37.45	PK	228	1.1	H	36.7	4.49	26.70	51.94	74	22.06
5379.35	38.31	PK	187	1.2	V	35.5	4.51	26.70	51.62	74	22.38

Conducted Spurious Emission at Antenna Port

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Use a combiner combine all the transmit chains (antenna outputs) into a single test point, then connect to the spectrum analyzer. The Resolution bandwidth is set to 1MHz, The Video bandwidth is set to 1MHz, report the peak value out of the operating band.
3. Repeat above procedures until all frequencies measured were complete.

Offset value = attenuation + combiner loss + cable loss

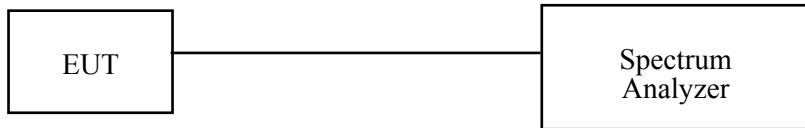


Test data


Frequency (MHz)	Frequency (MHz)	Antenna Port	Corrected Reading (dB m)	Limited (dB m)
5190	39640	Chain 0	-29.50	-27
	37000	Chain 1	-29.33	-27
5230	39640	Chain 0	-29.33	-27
	36800	Chain 1	-29.50	-27



Please refer to the following plots.

5190 MHz-Chain 0

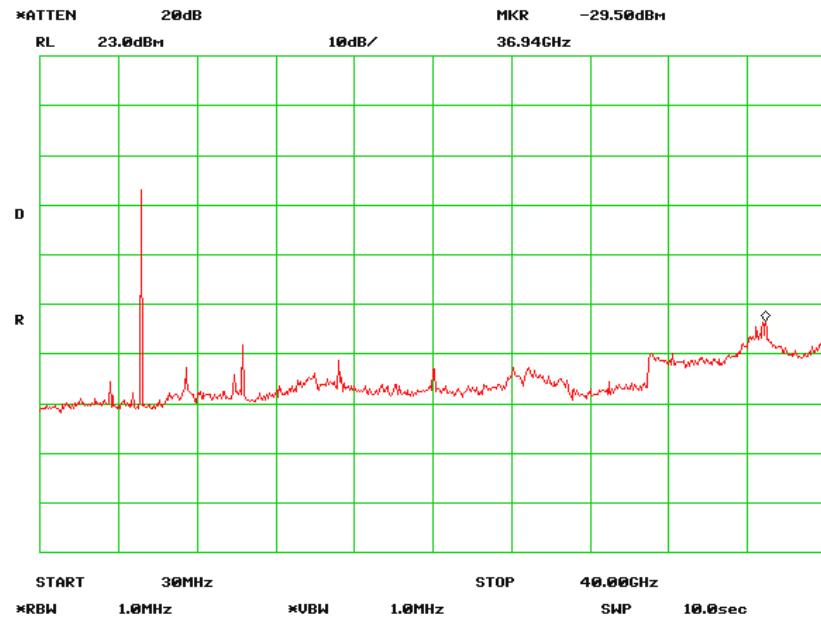

5190 MHz-Chain 1

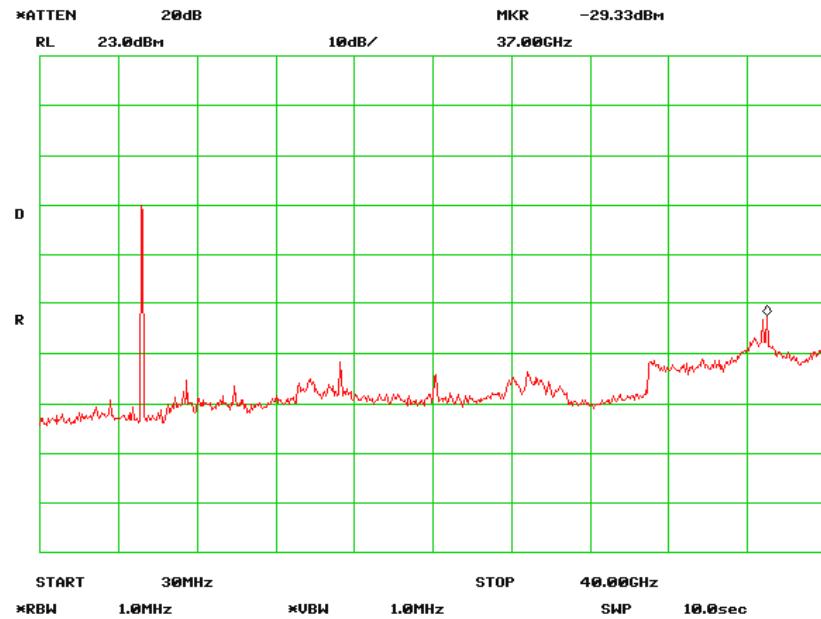

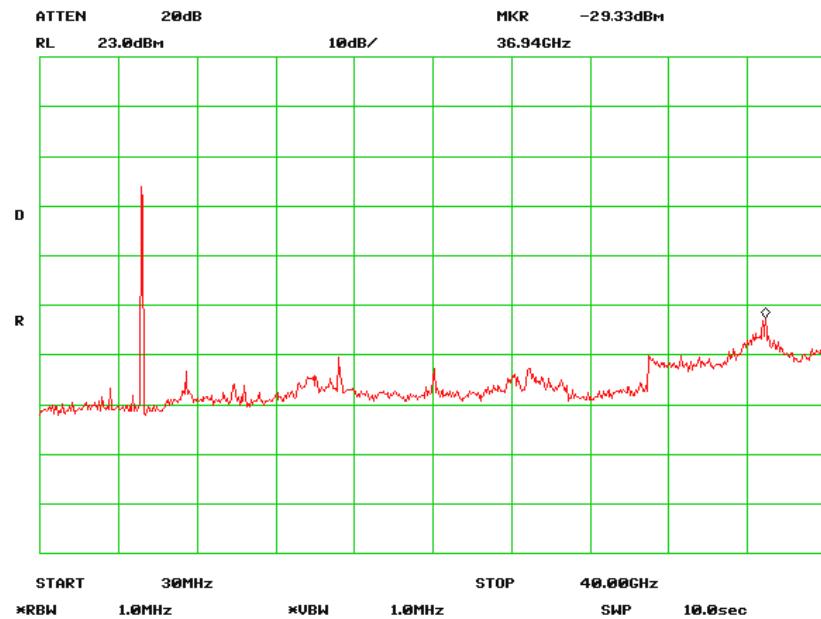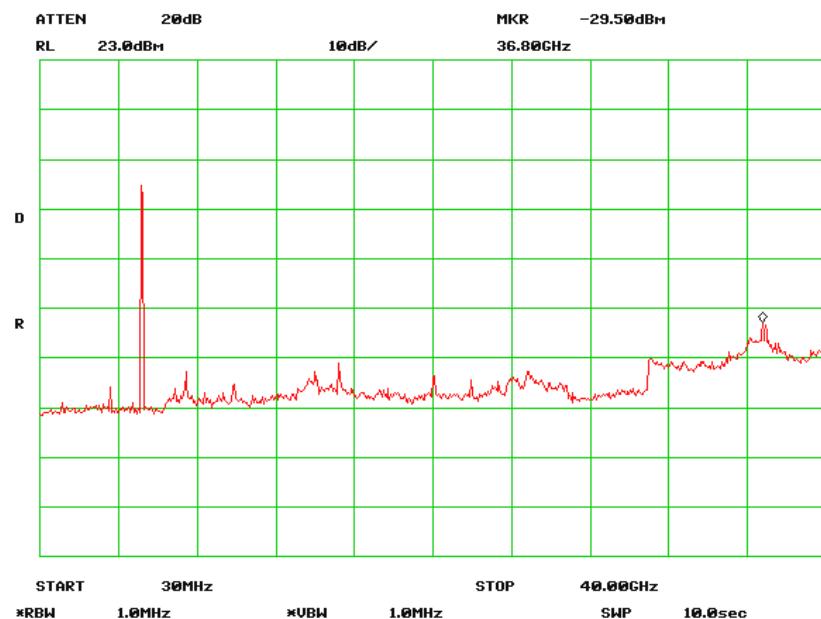5230 MHz-Chain 0**5230 MHz-Chain 1**

FCC §15.407(a) (1) – 26 dB OCCUPIED BANDWIDTH

Applicable Standard

For the band 5.15–5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or $4 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 4 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	Spectrum Analyzer	8564E	3943A01781	2011-04-12	2012-04-11

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Use a RBW = approximately 1% of the emission bandwidth. Set the VBW > RBW. Use a peak detector. Do not use the Max Hold function. Rather, use the viewbutton to capture the emission. Measure maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat, measurement as needed until the RBW/EBW ratio is approximately 1%.
4. Repeat above procedures until all frequencies measured were complete.



Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56%
ATM Pressure:	100.0kPa


The testing was performed by Felix Li on 2011-08-07.



Test Result: Pass.


Please refer to the following tables and plots.

Frequency (MHz)	Antenna Port	26 dB Bandwidth (MHz)
5190	Chain 0	39.47
	Chain 1	39.20
5230	Chain 0	39.47
	Chain 1	39.33

26 dB Bandwidth-5190 MHz, Chain 0

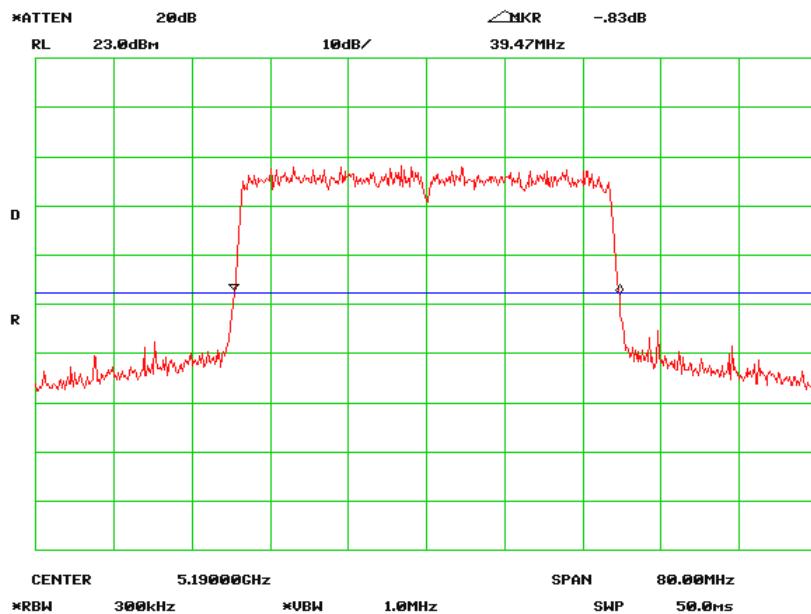

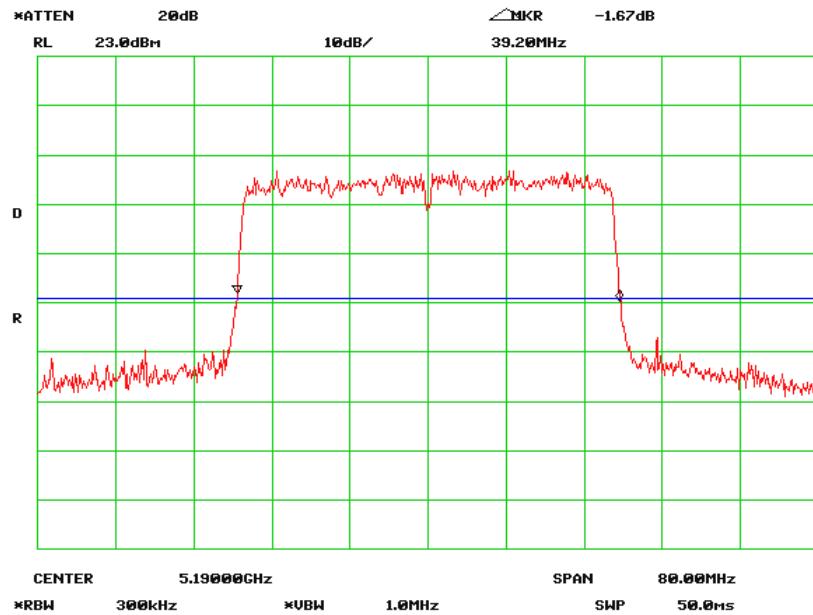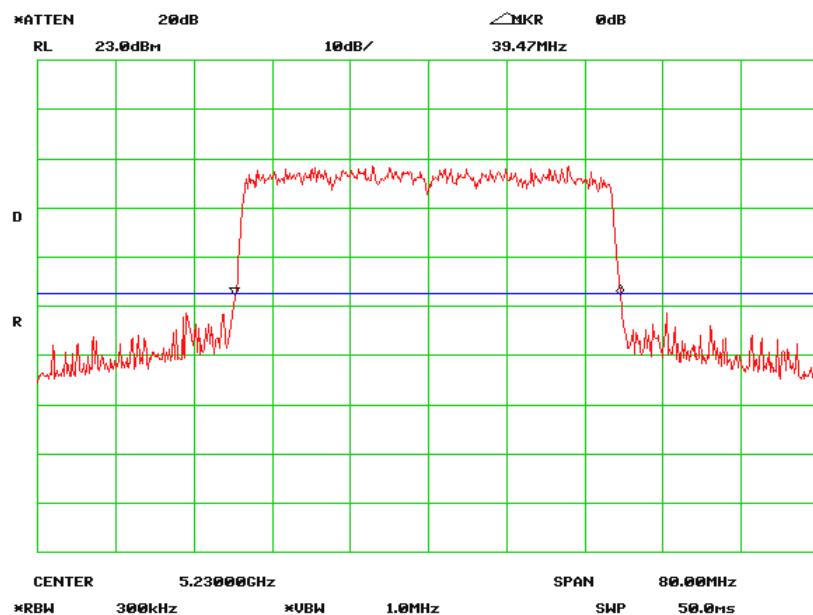26 dB Bandwidth-5190 MHz, Chain 1**26 dB Bandwidth-5230 MHz, Chain 0**

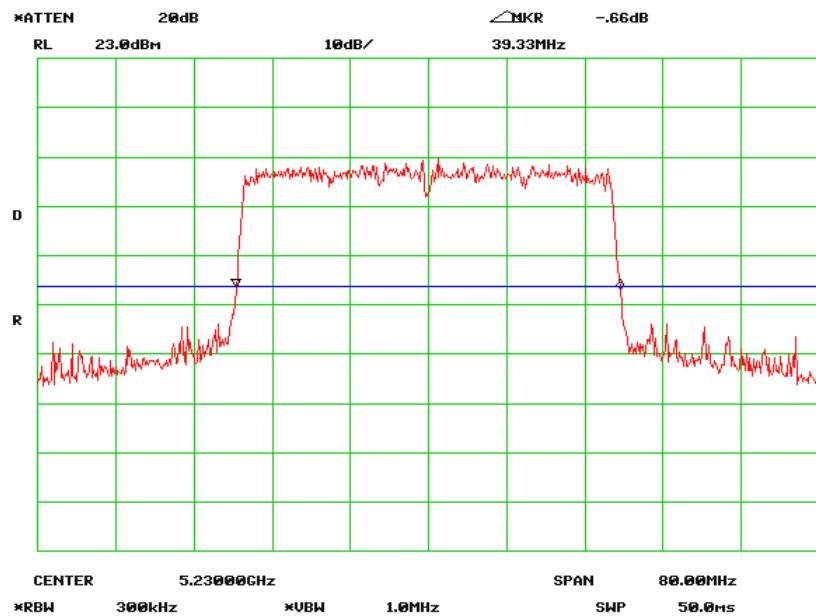26 dB Bandwidth-5230 MHz, Chain 1

FCC §15.407(a) (1) – CONDUCTED TRANSMITTER OUTPUT POWER

Applicable Standard

For the band 5.15–5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or $4 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 4 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Aglient	Spectrum Analyzer	8564E	3943A01781	2011-04-12	2012-04-11

* **Statement of Traceability:** Bay Area Compliance Lab Corp. (ShenZhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set span = 80MHz (to encompass the entire emission bandwidth (EBW) of the signal). Set RBW = 1 MHz. Set VBW \geq 3 MHz. Use sample detector mode. Use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at full control power for entire sweep of every sweep. If the device transmits continuously, with no off intervals or reduced power intervals, the trigger may be set to “free run”. Trace average 100 traces in power averaging mode. Compute power by integrating the spectrum across the 26 dB EBW of the signal. The integration can be performed using the spectrum analyzer’s band power measurement function with band limits set equal to the EBW band edges or by summing power levels in each 1 MHz band in linear power terms. The 1 MHz band power levels to be summed can be obtained by averaging, in linear power terms, power levels in each frequency bin across the 1 MHz.
4. Repeat above procedures until all frequencies measured were complete.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56%
ATM Pressure:	100.0kPa

The testing was performed by Felix Li on 2011-08-07.


Test Mode: Transmitting



Test Result: Pass


Please refer to the following tables and plots.

Frequency (MHz)	Antenna Port	Output Power (dBm)	Total power (dBm)	Limit (dBm)
5190	Chain 0	4.8	7.76	17
	Chain 1	4.7		
5230	Chain 0	4.5	7.46	17
	Chain 1	4.4		

Output Power-5190 MHz, Chain 0

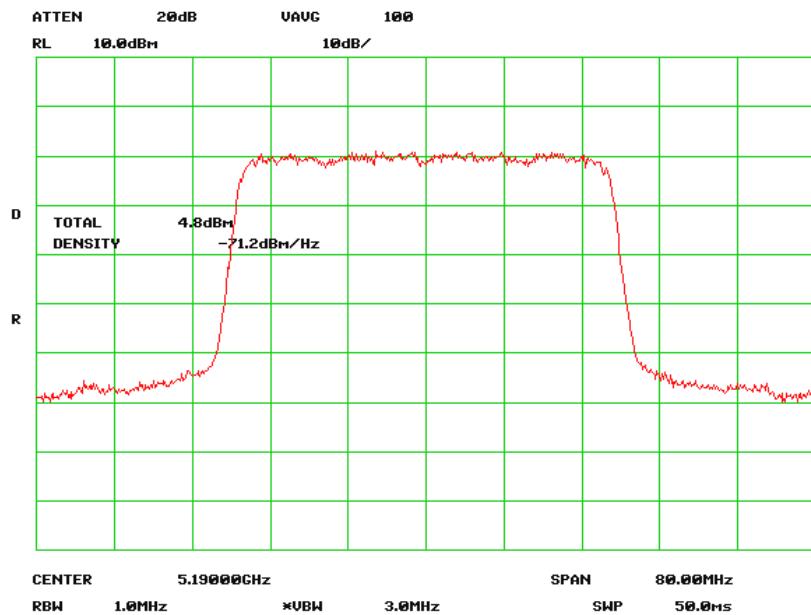

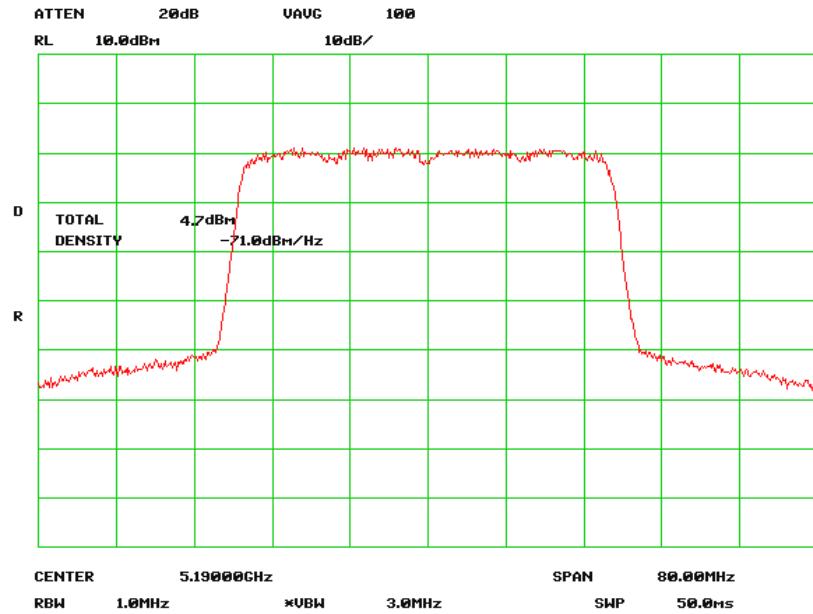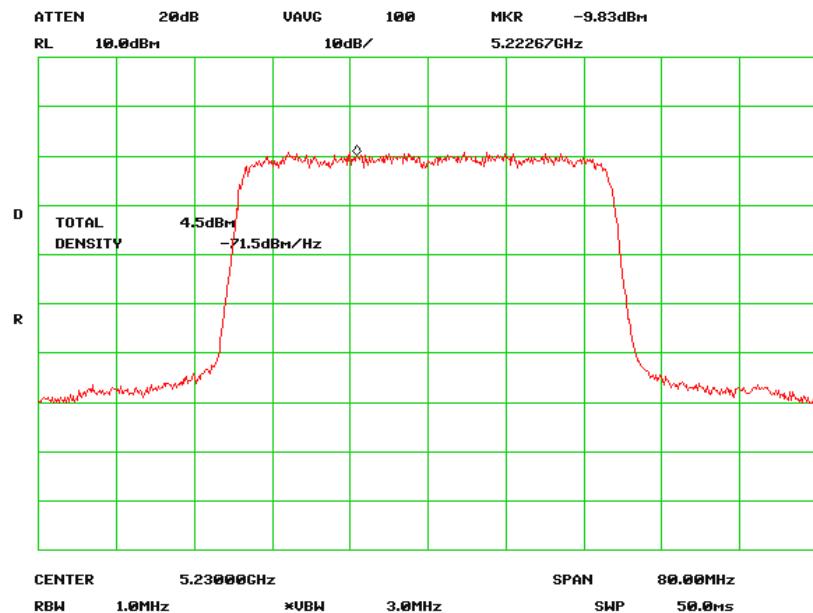Output Power-5190 MHz, Chain 1**Output Power -5230 MHz, Chain 0**

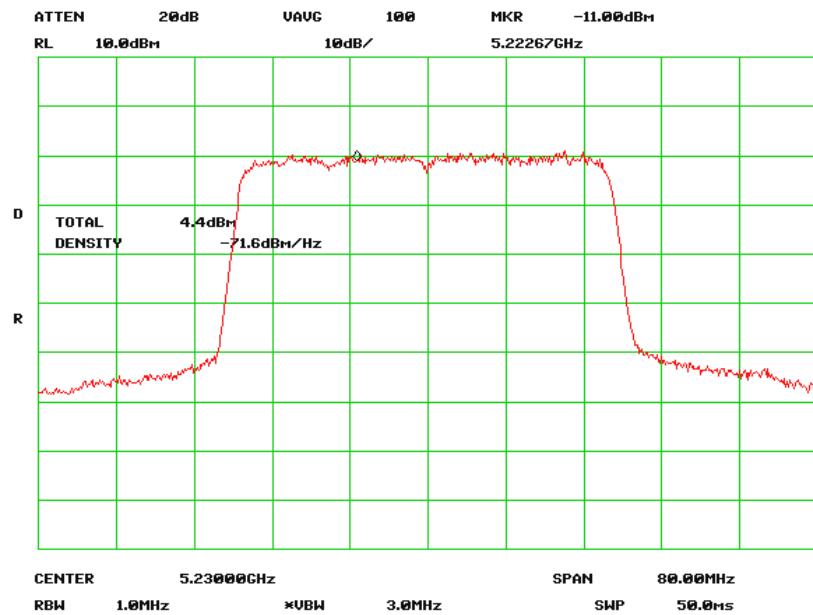Output Power -5230 MHz, Chain 1

FCC §15.407(a) (1) (5) - POWER SPECTRAL DENSITY

Applicable Standard

For the band 5.15–5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or $4 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 4 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The peak power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A resolution bandwidth less than the measurement bandwidth can be used, provided that the measured power is integrated to show total power over the measurement bandwidth. If the resolution bandwidth is approximately equal to the measurement bandwidth, and much less than the emission bandwidth of the equipment under test, the measured results shall be corrected to account for any difference between the resolution bandwidth of the test instrument and its actual noise bandwidth.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Use sample detector and power averaging (not video averaging) mode. Set RBW= 1 MHz*, VBW > 1 MHz. The PPSD is the highest level found across the emission in any 1-MHz band after 100 sweeps of averaging. This method is permitted only if the transmission pulse or sequence of pulses remains at maximum transmits power throughout each of the 100 sweeps of averaging and that the interval between pulses is not included in any of the sweeps.
4. Repeat above procedures until all frequencies measured were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	Spectrum Analyzer	8564E	3943A01781	2011-04-12	2012-04-11

* **Statement of Traceability:** Bay Area Compliance Lab Corp. (ShenZhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Data

Environmental Conditions

Temperature:	25 ° C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa


The testing was performed by Felix Li on 2011-08-08.



Test Mode: Transmitting


Test Result: Pass

Frequency (MHz)	Antenna Port	Power Spectral Density (dBm/MHz)	Total Power Spectral Density (dBm/MHz)	Limit (dBm/MHz)
5190	Chain 0	-10.50	-7.39	4
	Chain 1	-10.33		
5230	Chain 0	-10.83	-7.29	4
	Chain 1	-9.83		

5190 MHz, Chain 0

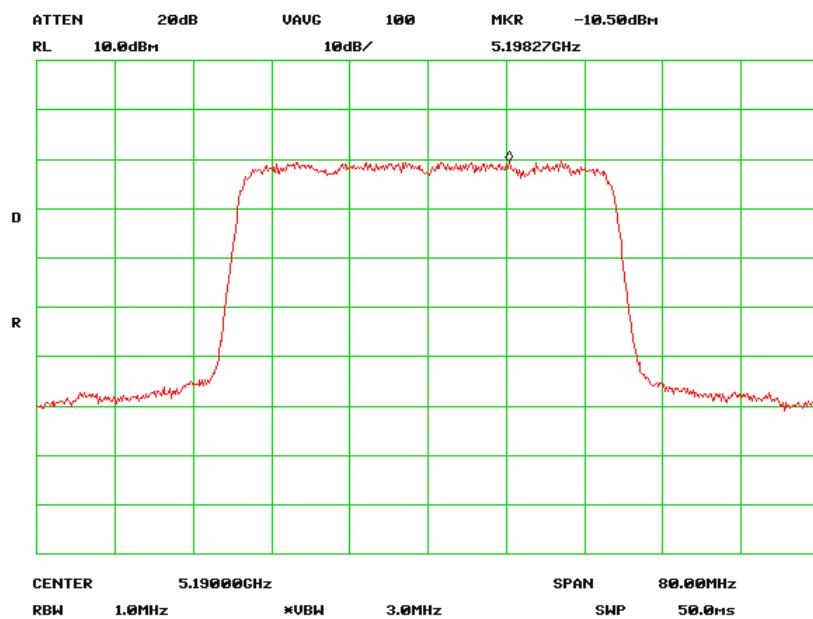

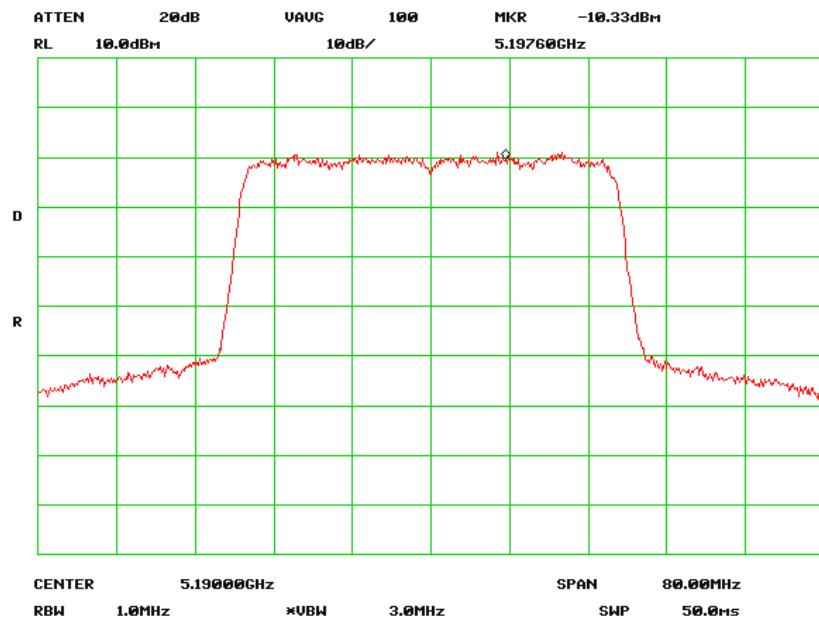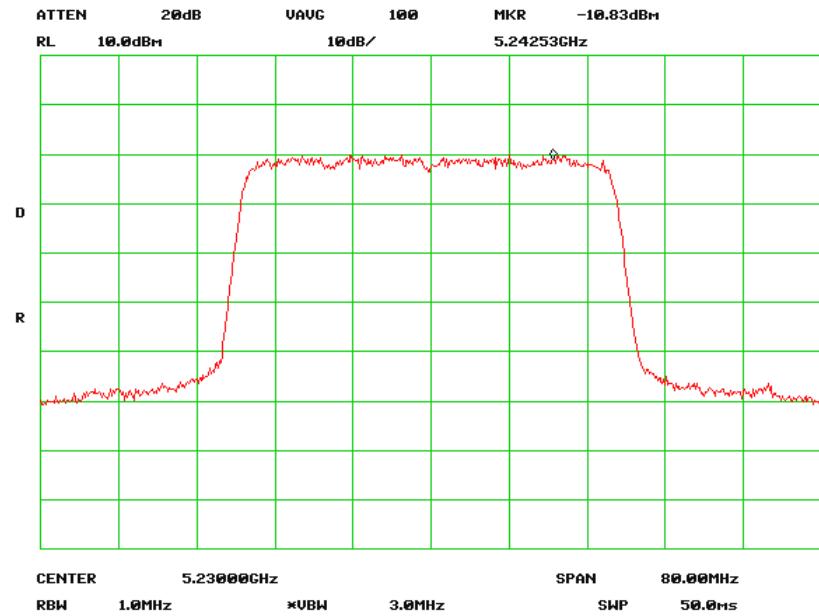5190 MHz, Chain 1**5230 MHz, Chain 0**

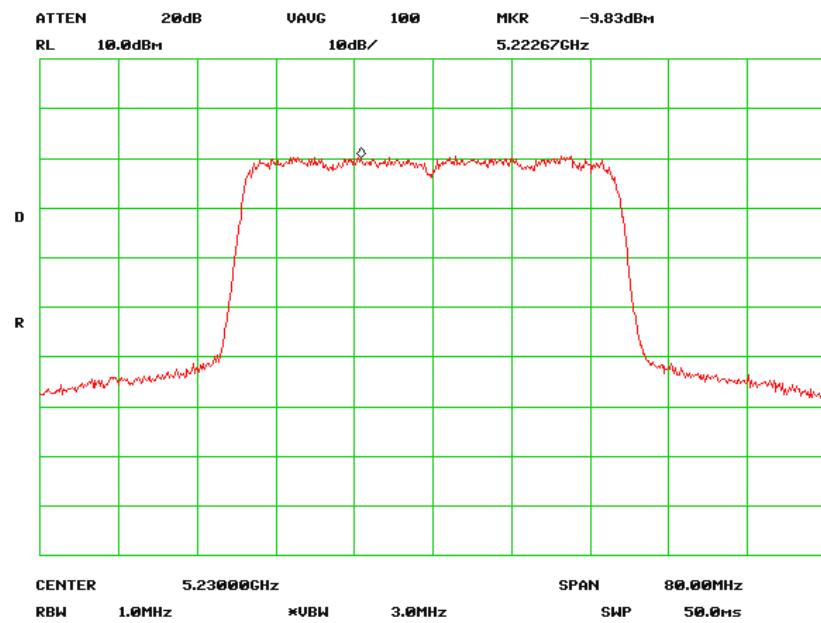5230 MHz, Chain 1

FCC §15.407(a) (6) – PEAK EXCURSION RATIO

Applicable Standard

According to §15.407(a) (6), the ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the maximum conducted output power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less.

Test Procedure

Set the spectrum analyzer span to view the entire emission bandwidth.

The largest difference between the following two traces must be ≤ 13 dB for all frequencies across the emission bandwidth. Submit a plot.

1st Trace:

- Set RBW = 1 MHz, VBW \geq 3 MHz with peak detector and maxhold settings.

2nd Trace:

- create the 2nd trace using the settings described in the section “FCC §15.407(a)(1)(2) – CONDUCTED TRANSMITTER OUTPUT POWER”.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	Spectrum Analyzer	8564E	3943A01781	2011-04-12	2012-04-11

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Data


Environmental Conditions



Temperature:	25 ° C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa



The testing was performed by Felix Li on 2011-08-08.


Test Mode: Transmitting

Frequency (MHz)	Antenna Port	Peak Excursion Ratio (dB)	Limit (dB)
5190	Chain 0	12.50	13
	Chain 1	12.00	
5230	Chain 0	12.67	13
	Chain 1	12.50	

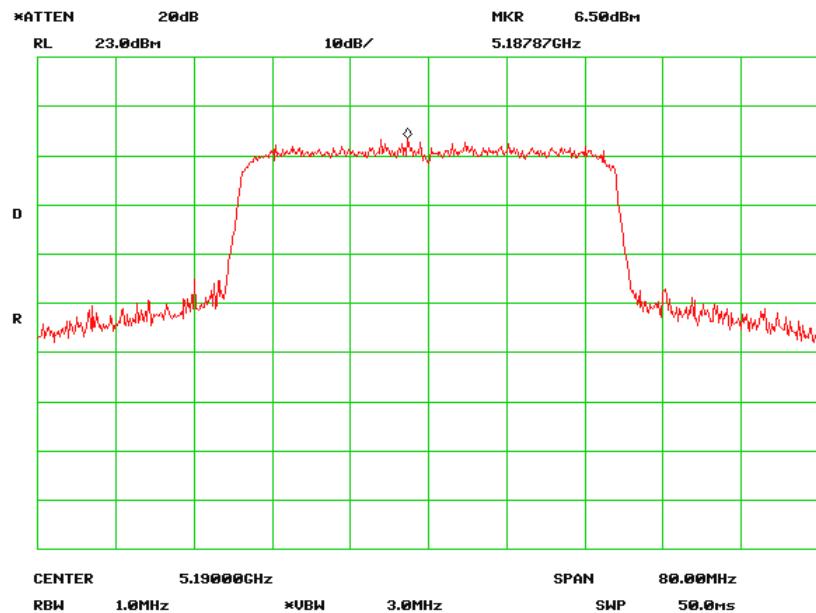
5190 MHz, Chain 0

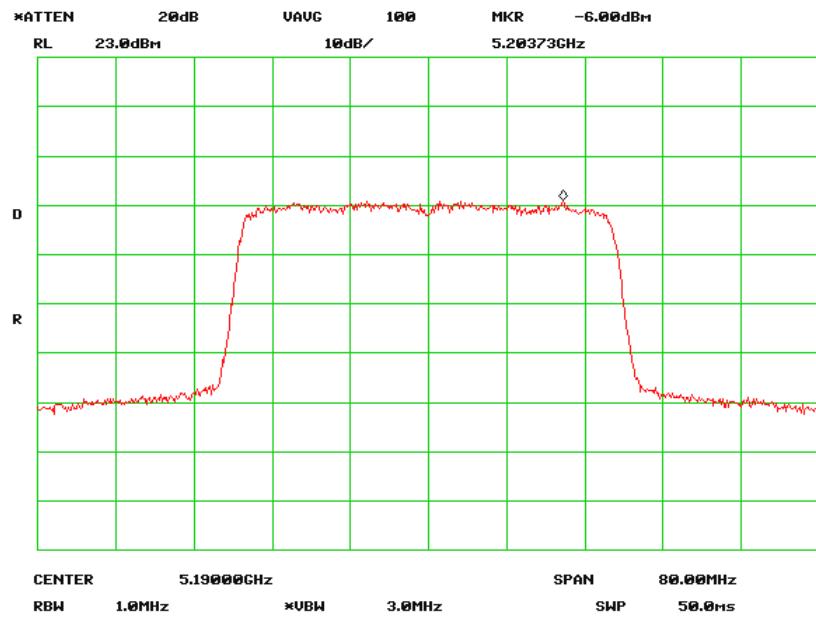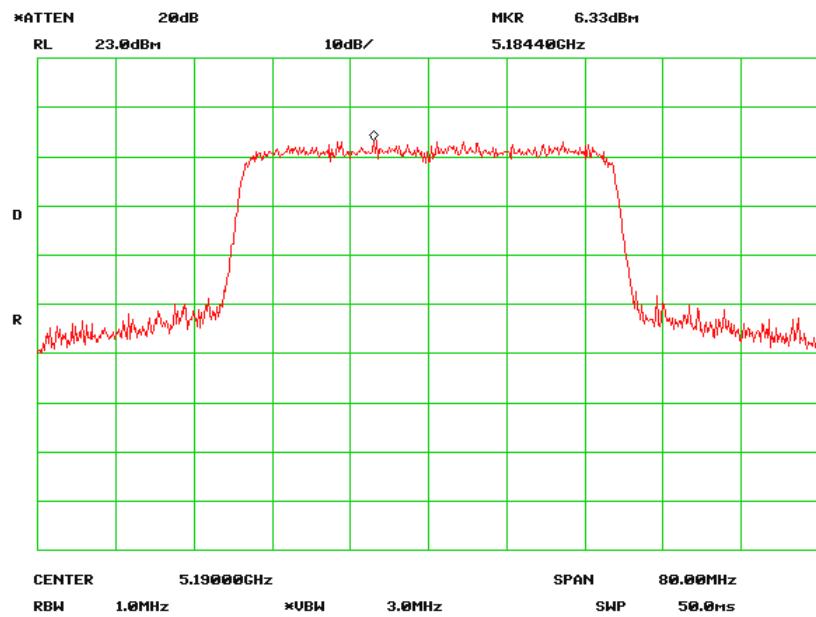
**5190 MHz, Chain 1**

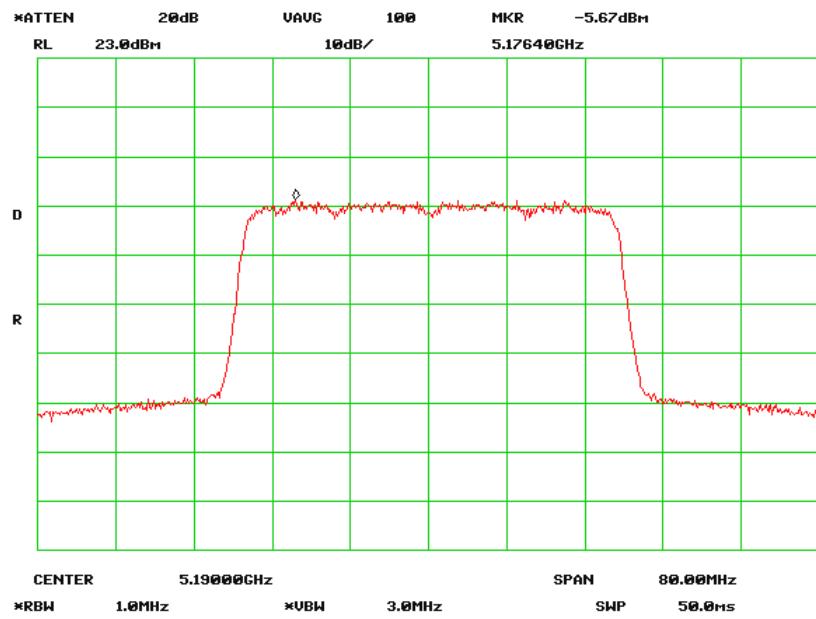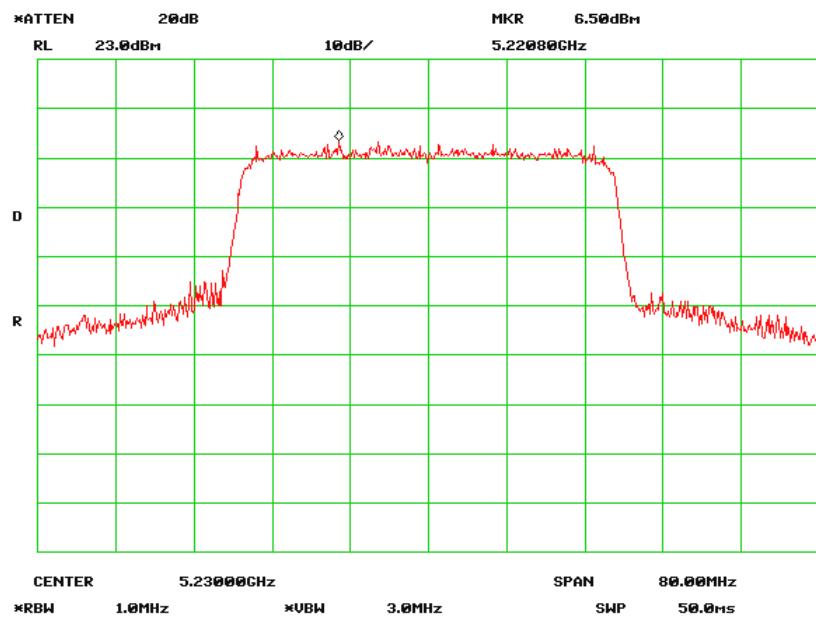**5230 MHz, Chain 0**

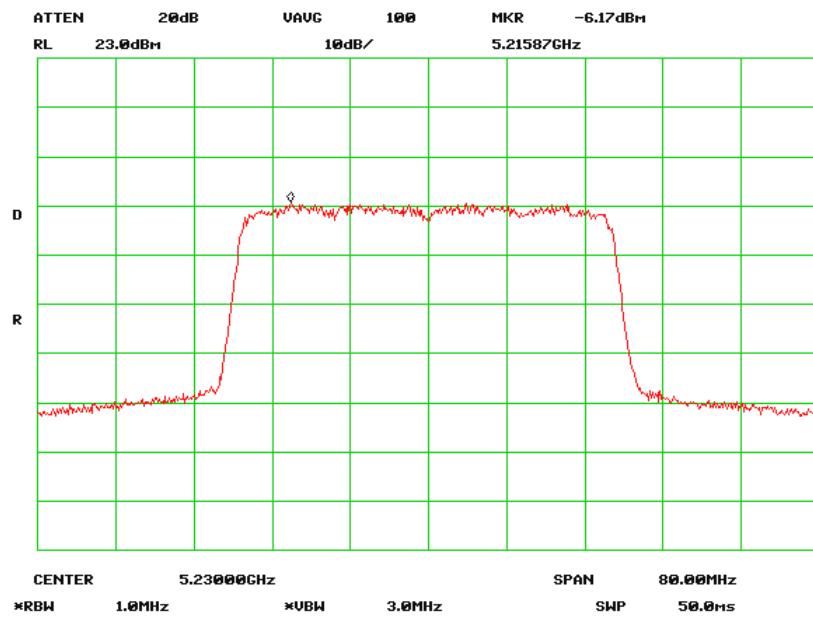

5230 MHz, Chain 1

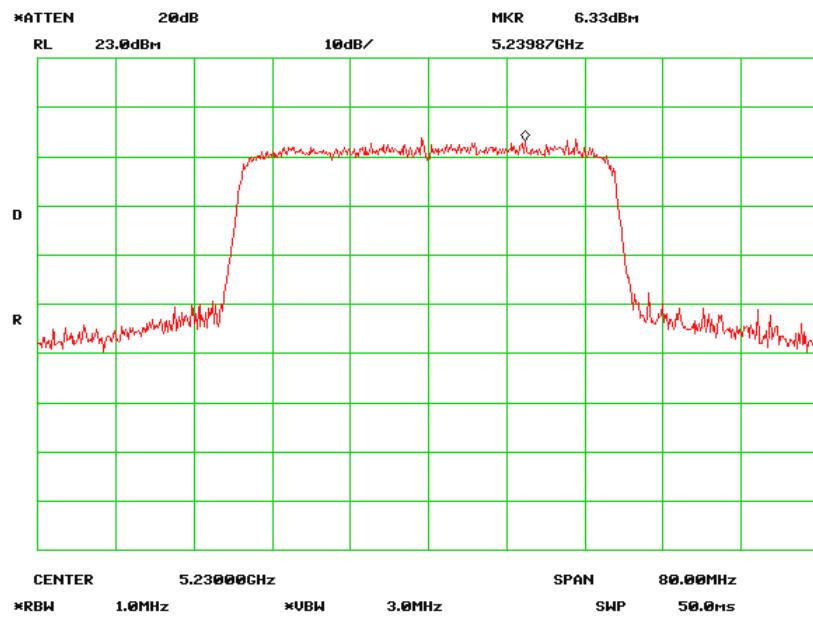

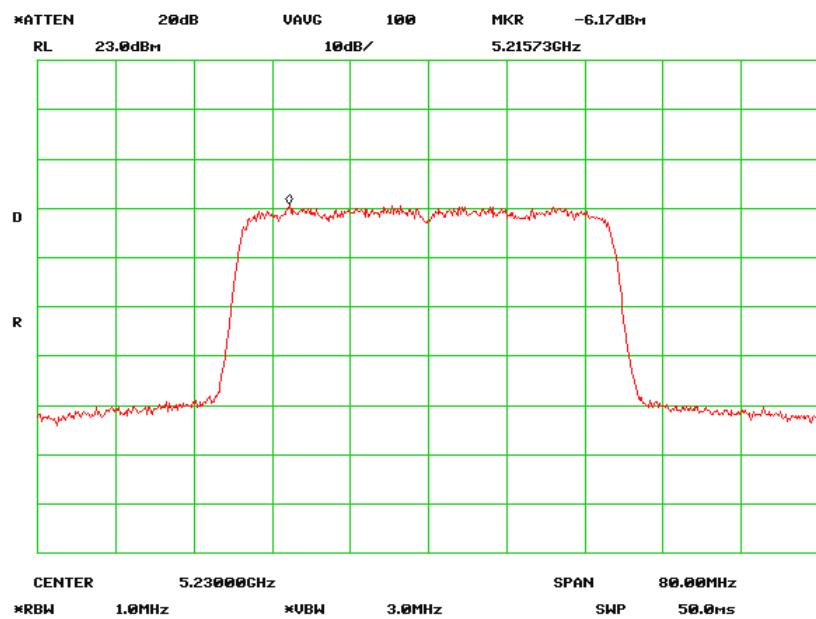

FCC §407(g) - FREQUENCY STABILITY

Applicable Standards


FCC§407(g), manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external AC power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The AC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the communication test set.

Frequency Stability vs. Voltage: An external variable AC power supply was connected to the adaptor terminals of the equipment under test. The voltage was set to 80% and 115% of the nominal value and was then decreased until the transmitter light no longer illuminated. The output frequency was recorded for each voltage.

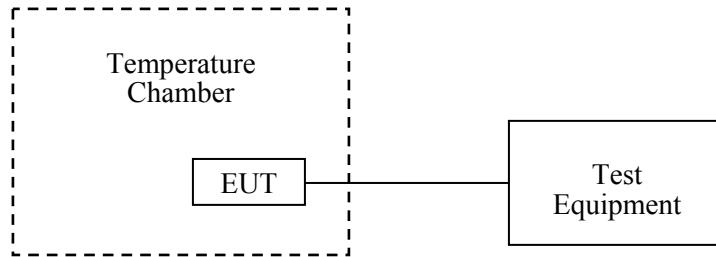

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
WUHUAN	Temperature & Humidity Chamber	HTP205	20021115	2011-06-04	2012-06-03
Rohde & Schwarz	Spectrum Analyzer	FSEM30	849720/019	2011-07-08	2012-07-07

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Data**Environmental Conditions**

Temperature:	25 ° C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa

The testing was performed by Felix Li on 2011-08-08.

Test Mode: Transmitting

Frequency Band (MHz)	Channel Frequency (MHz)	Power Supply (Vdc)	Temperature (°C)	Measured Frequency (MHz)
5150-5250	5190	5	40	5190.0523
			25	5190.0238
			0	5190.0305
	5230	5	40	5230.0456
			25	5230.0812
			0	5230.0316

***** END OF REPORT *****